



FCC RF Test Report

APPLICANT : ASUSTeK COMPUTER INC.
EQUIPMENT : ASUS Phone (Mobile Phone)
BRAND NAME : ASUS
MODEL NAME : ASUS_AI2205_E, ASUS_AI2205_F
FCC ID : MSQAI2205
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Feb. 06, 2023 ~ Mar. 08, 2023

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....3

SUMMARY OF TEST RESULT4

1 GENERAL DESCRIPTION.....5

1.1 Applicant.....5

1.2 Manufacturer.....5

1.3 Product Feature of Equipment Under Test.....5

1.4 Product Specification of Equipment Under Test.....6

1.5 Modification of EUT7

1.6 Testing Location7

1.7 Test Software.....7

1.8 Applicable Standards.....8

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....9

2.1 Carrier Frequency Channel9

2.2 Test Mode.....10

2.3 Connection Diagram of Test System.....11

2.4 Support Unit used in test configuration and system12

2.5 EUT Operation Test Setup12

2.6 Measurement Results Explanation Example.....12

3 TEST RESULT13

3.1 6dB and 99% Bandwidth Measurement13

3.2 Output Power Measurement.....14

3.3 Power Spectral Density Measurement21

3.4 Conducted Band Edges and Spurious Emission Measurement22

3.5 Radiated Band Edges and Spurious Emission Measurement23

3.6 AC Conducted Emission Measurement.....27

3.7 Antenna Requirements.....29

4 LIST OF MEASURING EQUIPMENT.....30

5 UNCERTAINTY OF EVALUATION.....31

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report only	-
3.2	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 2.41 dB at 2483.52 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 8.07 dB at 0.15 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

ASUSTeK COMPUTER INC.

1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan

1.2 Manufacturer

ASUSTeK COMPUTER INC.

1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	ASUS Phone (Mobile Phone)
Brand Name	ASUS
Model Name	ASUS_AI2205_E, ASUS_AI2205_F
FCC ID	MSQAI2205
IMEI Code	Conducted: 357795480101637/357795480101645 Conduction: 355156850100851/355156850100869 Radiation: 355156850101099/355156850101107
HW Version	R2.0
SW Version	Android 13
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are four SKUs of EUT for this project. The differences between them are summary below, According to the difference, we evaluate SKU1 (ASUS_AI2205_F) to perform RF test.

Sample list				
	SKU1	SKU2	SKU3	SKU4
Model name	ASUS_AI2205_F	ASUS_AI2205_E	ASUS_AI2205_F	ASUS_AI2205_E
Config.	US(Pro)	US(Entry)	US(Pro)	US(Entry)
RF module board	US(Pro)	US(Entry)	US(Pro)	US(Entry)
LCD+Touch front frame	AI2205 FRONT CASE ASSY WW			
DDR	16G(Micron) Micron / MT62F2G64D8CL-023 WT:B	16G(Micron) Micron / MT62F2G64D8CL-023 WT:B	16G(Micron) Micron / MT62F2G64D8CL-023 WT:B	16G(Micron) Micron / MT62F2G64D8CL-023 WT:B
UFS	512G(Kioxia)(UFS4.0) Kioxia / THGJFJT2T85BAT0	512G(Samsung)(UFS4.0) Samsung /KLUF8RHHD-B0G1	512G(Kioxia)(UFS4.0) Kioxia / THGJFJT2T85BAT0	512G(Samsung)(UFS4.0) Samsung /KLUF8RHHD-B0G1
MB	AI2205_MB	AI2205_MB	AI2205_MB	AI2205_MB
Back cover	WW-Dark-Ult	WW-Light-Entry	WW-Dark-Ult	WW-Light-Entry
Battery	SCUD / C21P2101	SWD / C21P2101	SWD / C21P2101	SCUD / C21P2101
Rear Camera 50+13M	SHINETECH/CDN60B	TRIPLEWIN/CASDA-002A 1	TRIPLEWIN/CASDA-002A 1	SHINETECH/CDN60B



Front Camera 32M	TSPRECISION/TVHF2170	SHINETECH/ST-CMG07B	SHINETECH/ST-CMG07B	TSPRECISION/TVHF2170
Rear Camera 5M	HUNAN KINGCOME/KBFE378	TSPRECISION/TV8F2224	TSPRECISION/TV8F2224	HUNAN KINGCOME/KBFE378
PCB	COMPEQ	COMPEQ	COMPEQ	COMPEQ
CPU	QUALCOMM MPSP1581 / SM-8550 MPSP1581 CS			

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel (37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	<p><SISO Ant. 4> BLE 1Mbps: 5.80 dBm (0.0038 W) BLE 2Mbps: 5.85 dBm (0.0038 W) BLE 125kbps: 5.85 dBm (0.0038 W) BLE 500kbps: 5.86 dBm (0.0039 W)</p> <p><SISO Ant. 5> BLE 1Mbps: 7.85 dBm (0.0061 W) BLE 2Mbps: 7.86 dBm (0.0061 W) BLE 125kbps: 7.85 dBm (0.0061 W) BLE 500kbps: 7.81 dBm (0.0060 W)</p> <p><SISO Ant. 6> BLE 1Mbps: 5.05 dBm (0.0032 W) BLE 2Mbps: 5.01 dBm (0.0032 W) BLE 125kbps: 5.06 dBm (0.0032 W) BLE 500kbps: 5.07 dBm (0.0032 W)</p>
99% Occupied Bandwidth	<p><SISO Ant. 4> BLE 1Mbps: 1.031 MHz BLE 2Mbps: 2.046 MHz BLE 125kbps: 1.051 MHz BLE 500kbps: 1.031 MHz</p> <p><SISO Ant. 5> BLE 1Mbps: 1.031 MHz BLE 2Mbps: 2.054 MHz BLE 125kbps: 1.043 MHz BLE 500kbps: 1.027 MHz</p> <p><SISO Ant. 6> BLE 1Mbps: 1.035 MHz BLE 2Mbps: 2.054 MHz BLE 125kbps: 1.059 MHz BLE 500kbps: 1.035 MHz</p>
Antenna Type / Gain	<Ant.4>: PIFA Antenna / -0.8 dBi <Ant.5>: PIFA Antenna / -0.6 dBi <Ant.6>: PIFA Antenna / -5.0 dBi
Type of Modulation	Bluetooth LE : GFSK

Note: BLE does not support MIMO, and Ant.4/5/6 can't transmit simultaneously.



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-SZ TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
20	2442	-	-	



2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane for Ant 5 and X plane for Ant 4/6) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz Mode 2: Bluetooth Tx CH19_2440 MHz Mode 3: Bluetooth Tx CH39_2480 MHz
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz Mode 2: Bluetooth Tx CH19_2440 MHz Mode 3: Bluetooth Tx CH39_2480 MHz
AC Conducted Emission	Mode 1: GSM 850 Idle + Bluetooth Link + WLAN Link(2.4G) + USB Cable 1(Charging from Adaptor 1) + Battery 1
Remark: For Radiated Test Cases, The tests were performance with Adapter, Earphone and USB Cable 1	

2.3 Connection Diagram of Test System

AC Conducted Emission:

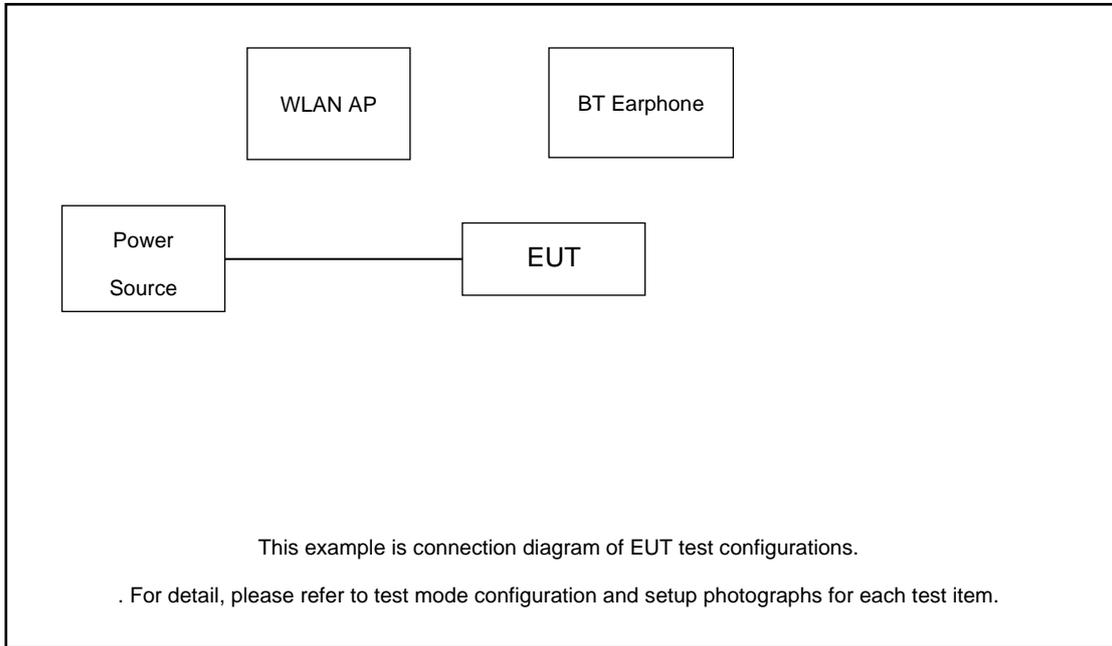

Radiated Emission:

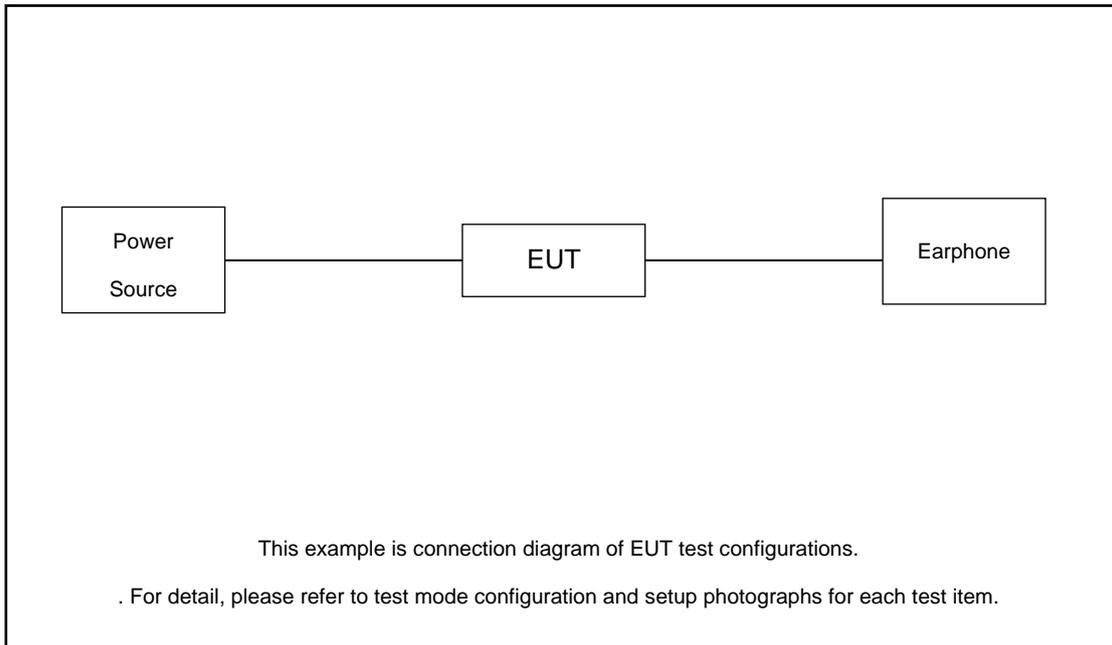



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station(LTE)	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
3.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m

2.5 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.00 dB and 10dB attenuator.

$$\begin{aligned}
\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
&= 2.00 + 10 = 12.00 \text{ (dB)}
\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup

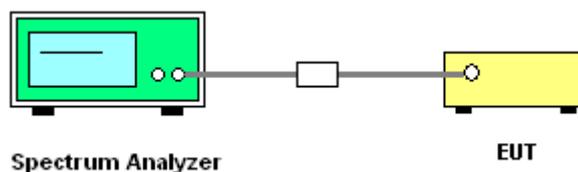

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

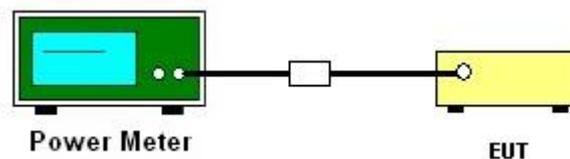



3.2.5 Test Result of Peak Output Power

<Ant.4>

Mod.	Data Rate	Ant	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	4	0	2402	5.65	30.00	-0.80	4.85	36.00	Pass
BLE	1Mbps	4	19	2440	5.80	30.00	-0.80	5.00	36.00	Pass
BLE	1Mbps	4	39	2480	4.01	30.00	-0.80	3.21	36.00	Pass

Mod.	Data Rate	Ant	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	4	0	2402	5.66	30.00	-0.80	4.86	36.00	Pass
BLE	2Mbps	4	19	2440	5.85	30.00	-0.80	5.05	36.00	Pass
BLE	2Mbps	4	39	2480	4.03	30.00	-0.80	3.23	36.00	Pass

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	125Kbps	4	0	2402	5.56	30.00	-0.80	4.76	36.00	Pass
BLE	125Kbps	4	19	2440	5.85	30.00	-0.80	5.05	36.00	Pass
BLE	125Kbps	4	39	2480	4.03	30.00	-0.80	3.23	36.00	Pass

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	500Kbps	4	0	2402	5.54	30.00	-0.80	4.74	36.00	Pass
BLE	500Kbps	4	19	2440	5.86	30.00	-0.80	5.06	36.00	Pass
BLE	500Kbps	4	39	2480	3.96	30.00	-0.80	3.16	36.00	Pass



<Ant.5>

Mod.	Data Rate	Ant	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	5	0	2402	6.23	30.00	-0.60	5.63	36.00	Pass
BLE	1Mbps	5	19	2440	7.85	30.00	-0.60	7.25	36.00	Pass
BLE	1Mbps	5	39	2480	6.41	30.00	-0.60	5.81	36.00	Pass

Mod.	Data Rate	Ant	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	5	0	2402	6.26	30.00	-0.60	5.66	36.00	Pass
BLE	2Mbps	5	19	2440	7.86	30.00	-0.60	7.26	36.00	Pass
BLE	2Mbps	5	39	2480	6.50	30.00	-0.60	5.90	36.00	Pass

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	125Kbps	5	0	2402	6.17	30.00	-0.60	5.57	36.00	Pass
BLE	125Kbps	5	19	2440	7.85	30.00	-0.60	7.25	36.00	Pass
BLE	125Kbps	5	39	2480	6.59	30.00	-0.60	5.99	36.00	Pass

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	500Kbps	5	0	2402	6.15	30.00	-0.60	6.15	36.00	Pass
BLE	500Kbps	5	19	2440	7.81	30.00	-0.60	7.81	36.00	Pass
BLE	500Kbps	5	39	2480	6.50	30.00	-0.60	6.50	36.00	Pass



<Ant.6>

Mod.	Data Rate	Ant	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	6	0	2402	5.05	30.00	-5.00	0.05	36.00	Pass
BLE	1Mbps	6	19	2440	4.92	30.00	-5.00	-0.08	36.00	Pass
BLE	1Mbps	6	39	2480	2.62	30.00	-5.00	-2.38	36.00	Pass

Mod.	Data Rate	Ant	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	6	0	2402	5.01	30.00	-5.00	0.01	36.00	Pass
BLE	2Mbps	6	19	2440	4.90	30.00	-5.00	-0.10	36.00	Pass
BLE	2Mbps	6	39	2480	2.55	30.00	-5.00	-2.45	36.00	Pass

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	125Kbps	6	0	2402	5.06	30.00	-5.00	0.06	36.00	Pass
BLE	125Kbps	6	19	2440	4.91	30.00	-5.00	-0.09	36.00	Pass
BLE	125Kbps	6	39	2480	2.55	30.00	-5.00	-2.45	36.00	Pass

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	500Kbps	6	0	2402	5.07	30.00	-5.00	0.07	36.00	Pass
BLE	500Kbps	6	19	2440	4.88	30.00	-5.00	-0.12	36.00	Pass
BLE	500Kbps	6	39	2480	2.57	30.00	-5.00	-2.43	36.00	Pass



3.2.6 Test Result of Average Output Power (Reporting Only)

<Ant.4>

Mod.	Data Rate	Ant	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	4	0	2402	2.01	5.40
BLE	1Mbps	4	19	2440	2.01	5.70
BLE	1Mbps	4	39	2480	2.01	3.80

Mod.	Data Rate	Ant	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	2Mbps	4	0	2402	4.77	5.50
BLE	2Mbps	4	19	2440	4.77	5.80
BLE	2Mbps	4	39	2480	4.77	3.90

Mod.	Data Rate	Ant	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	125Kbps	4	0	2402	0.83	5.50
BLE	125Kbps	4	19	2440	0.83	5.80
BLE	125Kbps	4	39	2480	0.83	3.90

Mod.	Data Rate	Ant	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	500Kbps	4	0	2402	2.44	5.40
BLE	500Kbps	4	19	2440	2.44	5.70
BLE	500Kbps	4	39	2480	2.44	3.80



<Ant.5>

Mod.	Data Rate	Ant	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	5	0	2402	2.01	6.10
BLE	1Mbps	5	19	2440	2.01	7.70
BLE	1Mbps	5	39	2480	2.01	6.30

Mod.	Data Rate	Ant	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	2Mbps	5	0	2402	4.77	6.20
BLE	2Mbps	5	19	2440	4.77	7.80
BLE	2Mbps	5	39	2480	4.77	6.40

Mod.	Data Rate	Ant	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	125Kbps	5	0	2402	0.83	6.10
BLE	125Kbps	5	19	2440	0.83	7.80
BLE	125Kbps	5	39	2480	0.83	6.50

Mod.	Data Rate	Ant	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	500Kbps	5	0	2402	2.44	6.00
BLE	500Kbps	5	19	2440	2.44	7.70
BLE	500Kbps	5	39	2480	2.44	6.40



<Ant.6>

Mod.	Data Rate	Ant	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	6	0	2402	1.99	4.70
BLE	1Mbps	6	19	2440	1.99	4.80
BLE	1Mbps	6	39	2480	1.99	2.10

Mod.	Data Rate	Ant	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	2Mbps	6	0	2402	4.71	4.60
BLE	2Mbps	6	19	2440	4.71	4.70
BLE	2Mbps	6	39	2480	4.71	2.00

Mod.	Data Rate	Ant	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	125Kbps	6	0	2402	0.82	4.60
BLE	125Kbps	6	19	2440	0.82	4.70
BLE	125Kbps	6	39	2480	0.82	1.90

Mod.	Data Rate	Ant	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	500Kbps	6	0	2402	2.46	4.70
BLE	500Kbps	6	19	2440	2.46	4.80
BLE	500Kbps	6	39	2480	2.46	2.00

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

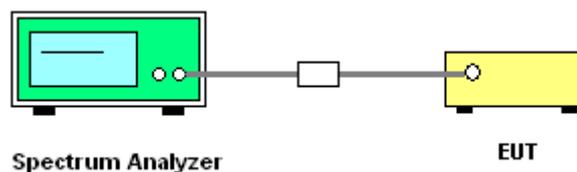

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

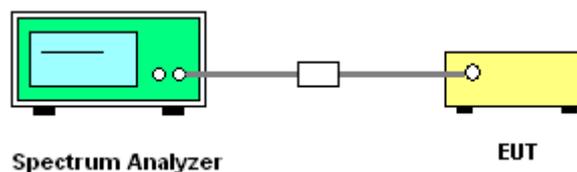

3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.




3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

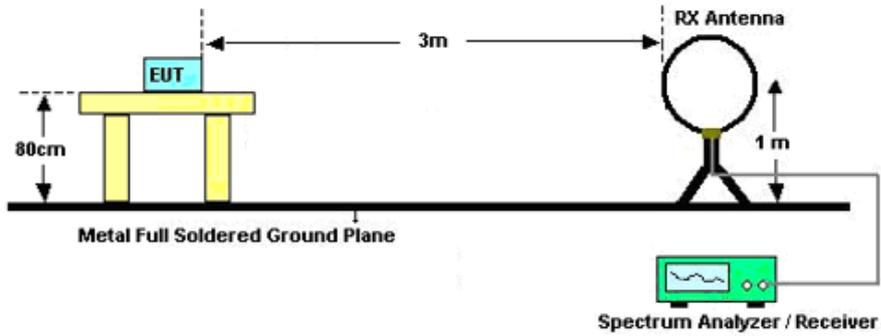

For radiated emissions from 30MHz to 1GHz

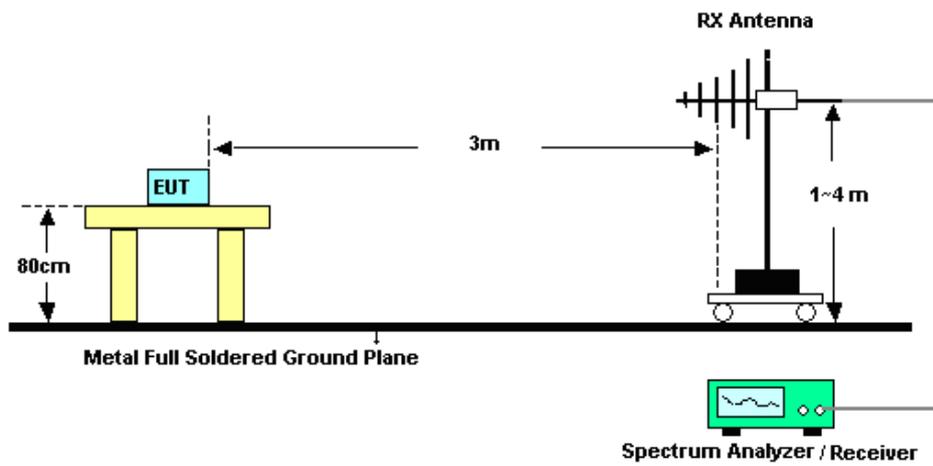

For radiated emissions above 1GHz

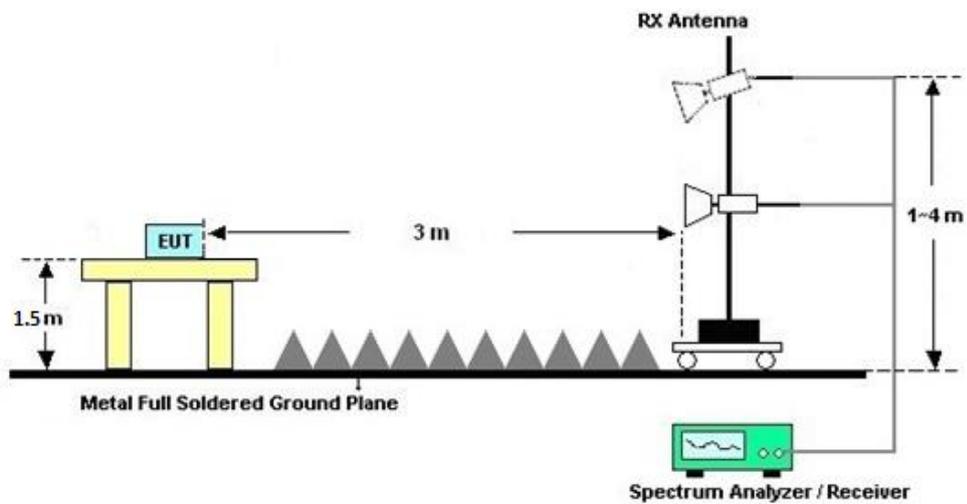



3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

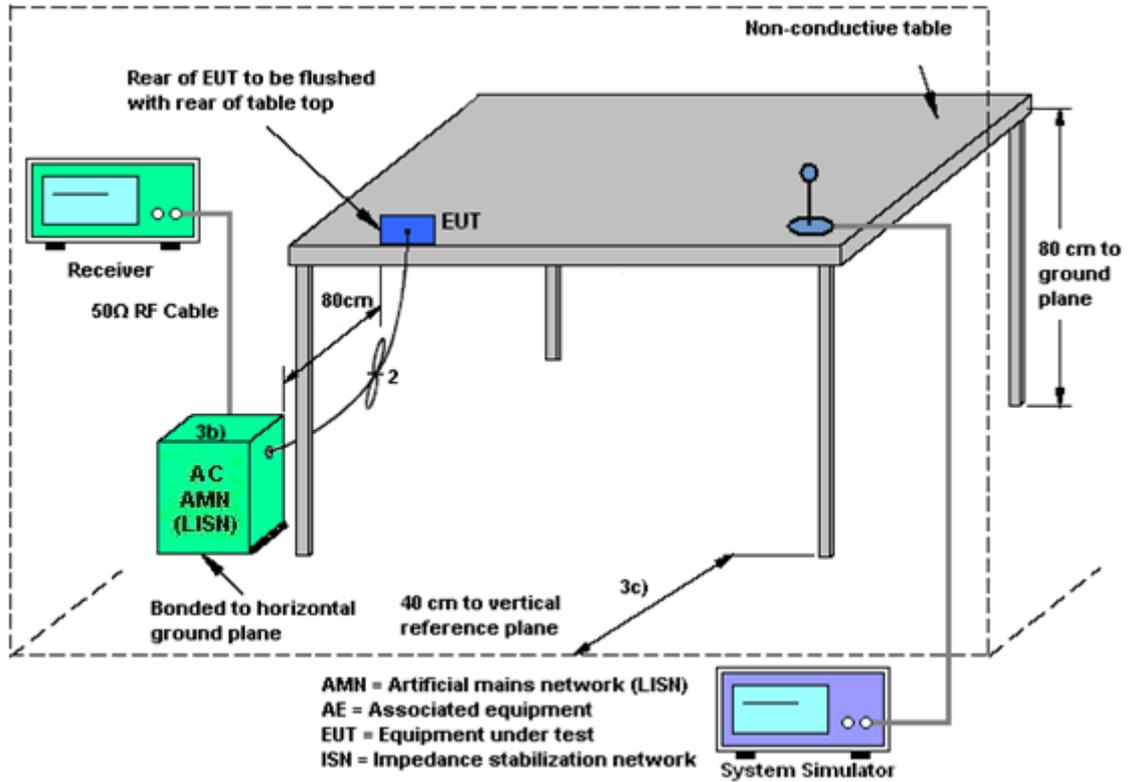

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jul. 07, 2022	Feb. 09, 2023~ Feb. 10, 2023	Jul. 06, 2023	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Sep. 15, 2022	Feb. 09, 2023~ Feb. 10, 2023	Sep. 14, 2023	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 17, 2022	Feb. 09, 2023~ Feb. 10, 2023	Oct. 16, 2023	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000 891	100Vac~250Vac	Jul. 07, 2022	Feb. 09, 2023~ Feb. 10, 2023	Jul. 06, 2023	Conduction (CO01-SZ)
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Oct. 19, 2022	Feb. 06, 2023~ Mar. 08, 2023	Oct. 18, 2023	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY551502 13	10Hz~44GHz	Jul. 07, 2022	Feb. 06, 2023~ Mar. 08, 2023	Jul. 06, 2023	Radiation (03CH04-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 28, 2022	Feb. 06, 2023~ Mar. 08, 2023	Jun. 27, 2024	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	Apr. 27, 2022	Feb. 06, 2023~ Mar. 08, 2023	Apr. 27, 2023	Radiation (03CH04-SZ)
Double Ridge Horn Antenna	SCHWARZBE CK	BBHA9120D	9120D-147 4	1GHz~18GHz	Jul. 07, 2022	Feb. 06, 2023~ Mar. 08, 2023	Jul. 06, 2023	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBE CK	BBHA9170	9170#679	15GHz~40GHz	Jul. 07, 2022	Feb. 06, 2023~ Mar. 08, 2023	Jul. 06, 2023	Radiation (03CH04-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz ~3000MHz	Oct. 19, 2022	Feb. 06, 2023~ Mar. 08, 2023	Oct. 18, 2023	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P- R	1943528	1GHz~18GHz	Oct. 19, 2022	Feb. 06, 2023~ Mar. 08, 2023	Oct. 18, 2023	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35- HG	1871923	18GHz~40GHz	Jul. 06, 2022	Feb. 06, 2023~ Mar. 08, 2023	Jul. 05, 2023	Radiation (03CH04-SZ)
Amplifier	Agilent Technologies	83017A	MY572801 36	500MHz~26.5G Hz	Sep. 30, 2022	Feb. 06, 2023~ Mar. 08, 2023	Sep. 29, 2023	Radiation (03CH04-SZ)
AC Power Source	APC	AFV-S-600B	F11905001 9	N/A	Nov. 10, 2022	Feb. 06, 2023~ Mar. 08, 2023	Nov. 10, 2023	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Feb. 06, 2023~ Mar. 08, 2023	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Feb. 06, 2023~ Mar. 08, 2023	NCR	Radiation (03CH04-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 07, 2022	Feb. 28, 2023~ Mar. 01, 2023	Apr. 08, 2023	Conducted (TH01-SZ)
Pulse Power Senor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 27, 2022	Feb. 28, 2023~ Mar. 01, 2023	Dec. 26, 2023	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1542004	50MHz Bandwidth	Dec. 27, 2022	Feb. 28, 2023~ Mar. 01, 2023	Dec. 26, 2023	Conducted (TH01-SZ)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±1.34 dB
Conducted Emissions	±1.34 dB
Occupied Channel Bandwidth	±0.012 %

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.2 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.8dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1dB
---	-------

----- THE END -----



Appendix A. Conducted Test Results



Ambient Condition: <u>24~26 °C, 45~55 %RH</u>
Test Date: <u>Feb. 28, 2023~Mar. 01, 2023</u> Test Engineer: <u>Zhang Xue Yi</u>

<SISO Ant.4 / Ant.5>



DTS Bandwidth


Test Result

TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant5	2402	0.67	2401.66	2402.33	0.5	PASS
	Ant4	2402	0.69	2401.65	2402.34	0.5	PASS
	Ant5	2440	0.68	2439.66	2440.33	0.5	PASS
	Ant4	2440	0.69	2439.65	2440.34	0.5	PASS
	Ant5	2480	0.69	2479.65	2480.34	0.5	PASS
	Ant4	2480	0.70	2479.64	2480.34	0.5	PASS
BLE_2M	Ant5	2402	1.14	2401.43	2402.57	0.5	PASS
	Ant4	2402	1.14	2401.43	2402.57	0.5	PASS
	Ant5	2440	1.14	2439.43	2440.57	0.5	PASS
	Ant4	2440	1.15	2439.42	2440.57	0.5	PASS
	Ant5	2480	1.14	2479.42	2480.57	0.5	PASS
	Ant4	2480	1.13	2479.43	2480.56	0.5	PASS
BLE_125K	Ant5	2402	0.60	2401.69	2402.30	0.5	PASS
	Ant4	2402	0.60	2401.69	2402.30	0.5	PASS
	Ant5	2440	0.60	2439.69	2440.30	0.5	PASS
	Ant4	2440	0.60	2439.69	2440.30	0.5	PASS
	Ant5	2480	0.60	2479.69	2480.30	0.5	PASS
	Ant4	2480	0.61	2479.69	2480.30	0.5	PASS
BLE_500K	Ant5	2402	0.66	2401.67	2402.33	0.5	PASS
	Ant4	2402	0.66	2401.67	2402.33	0.5	PASS
	Ant5	2440	0.66	2439.67	2440.33	0.5	PASS
	Ant4	2440	0.65	2439.67	2440.32	0.5	PASS
	Ant5	2480	0.66	2479.67	2480.33	0.5	PASS
	Ant4	2480	0.66	2479.67	2480.33	0.5	PASS




Test Graphs

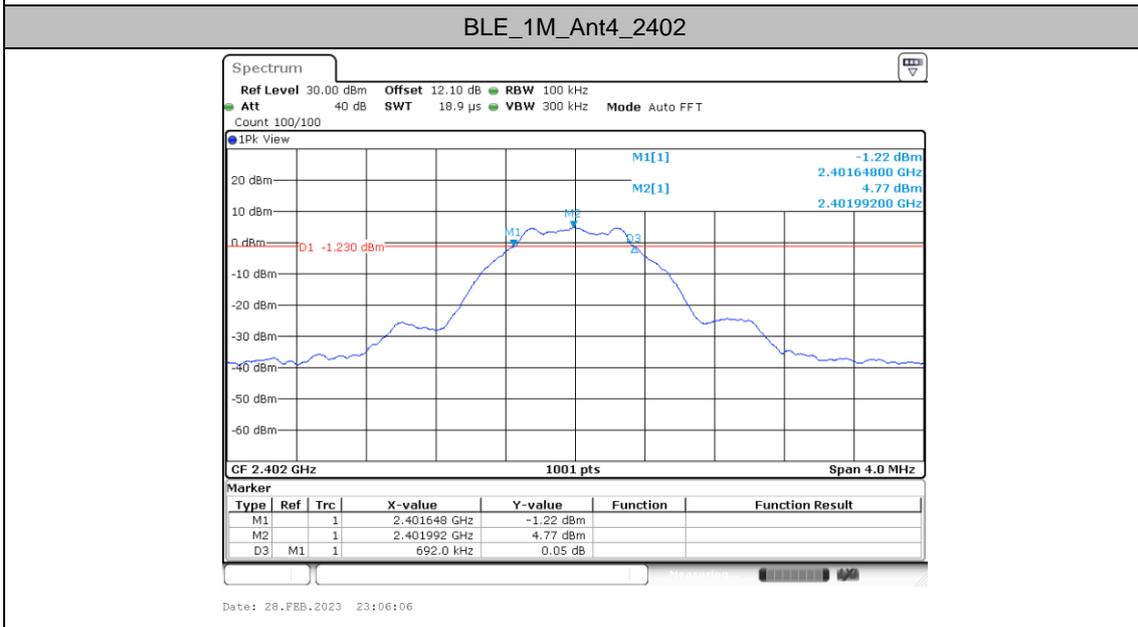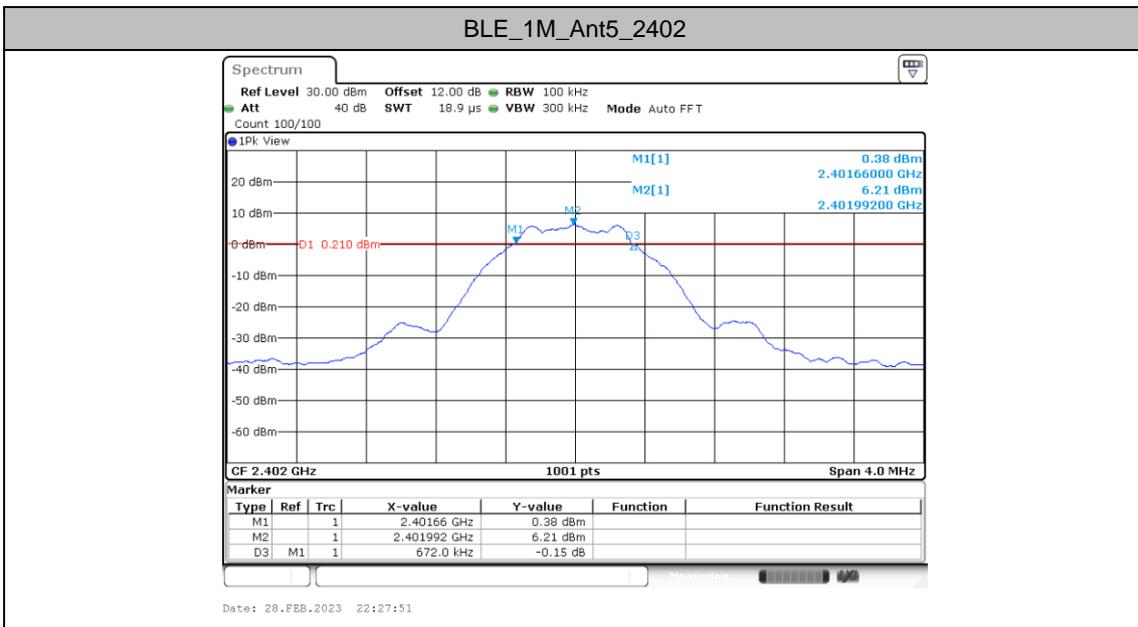

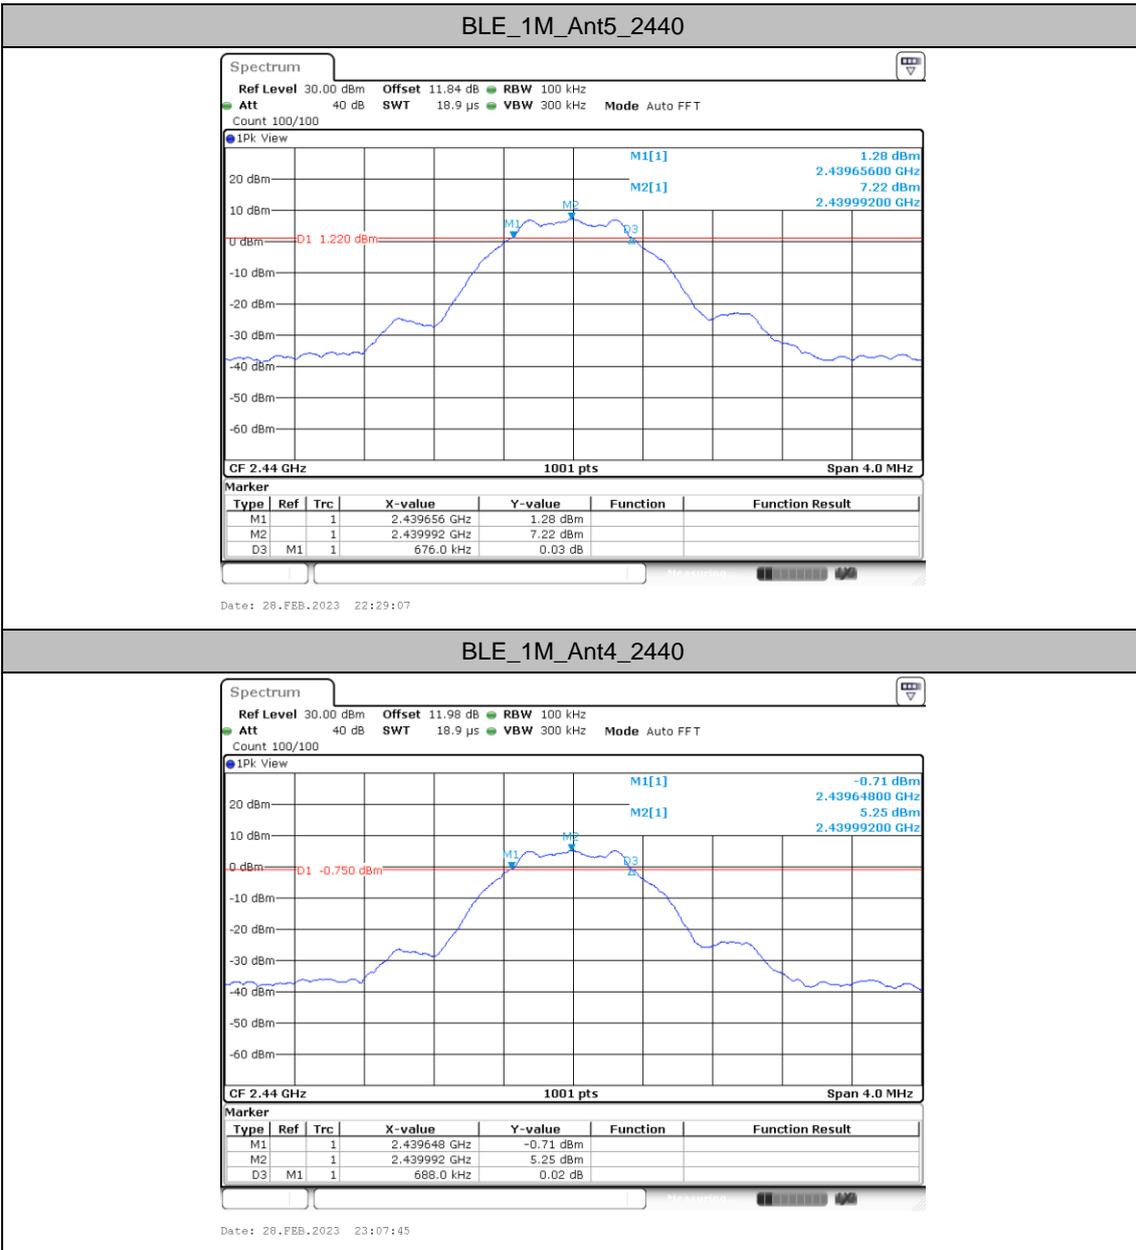




BLE_1M_Ant5_2480


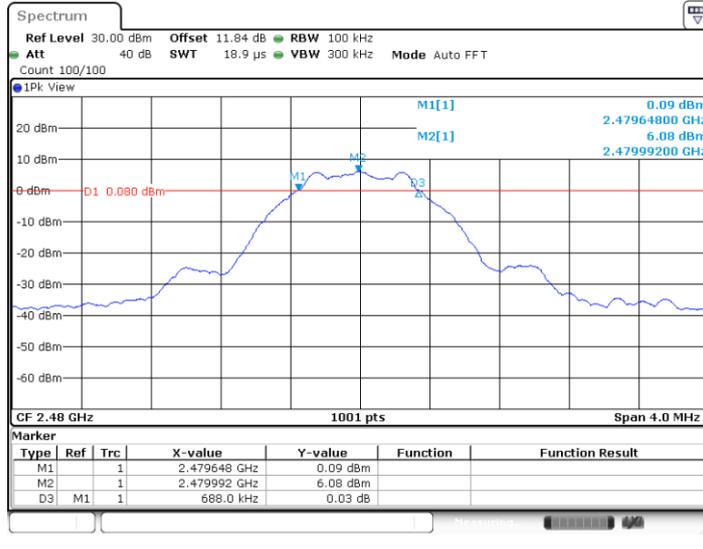




Date: 28.FEB.2023 22:30:12



BLE_1M_Ant4_2480

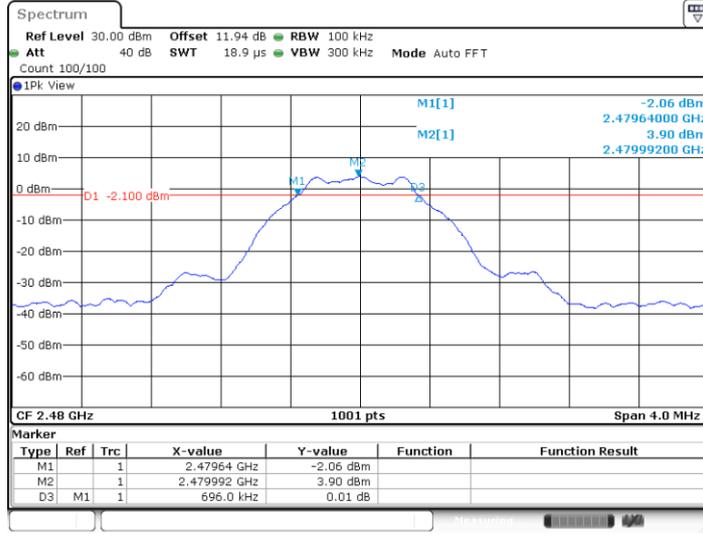



Date: 28.FEB.2023 23:09:11

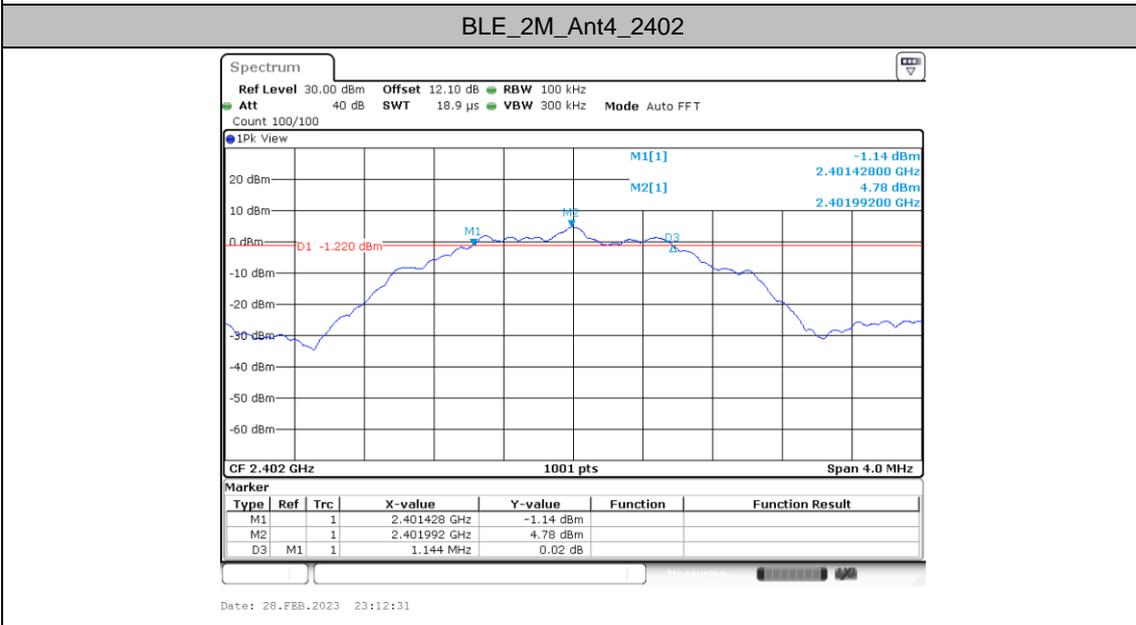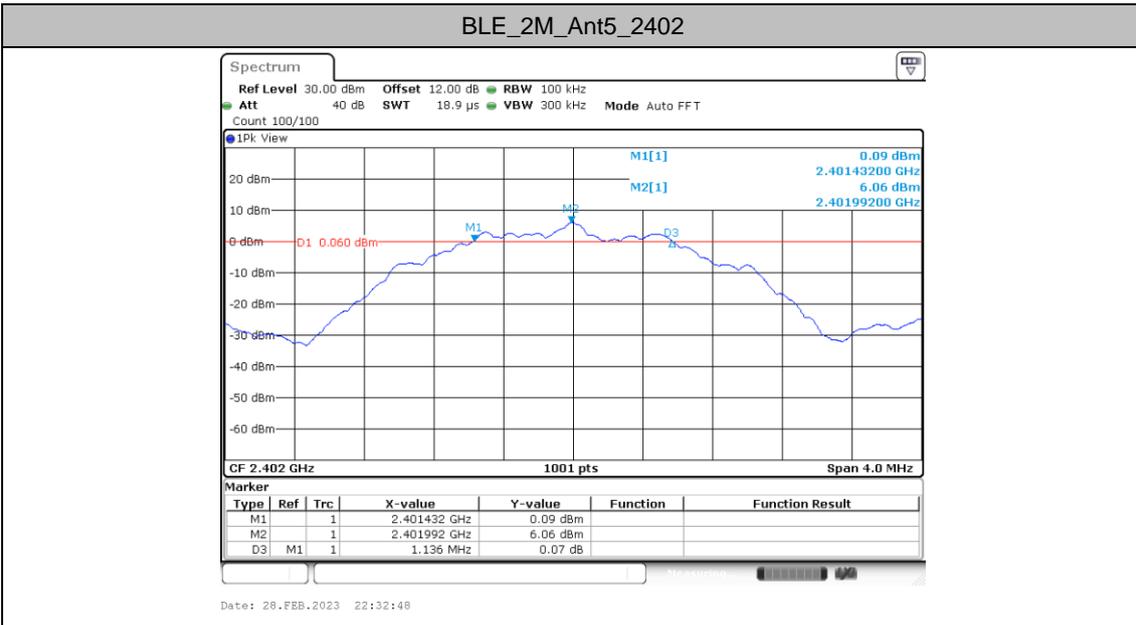

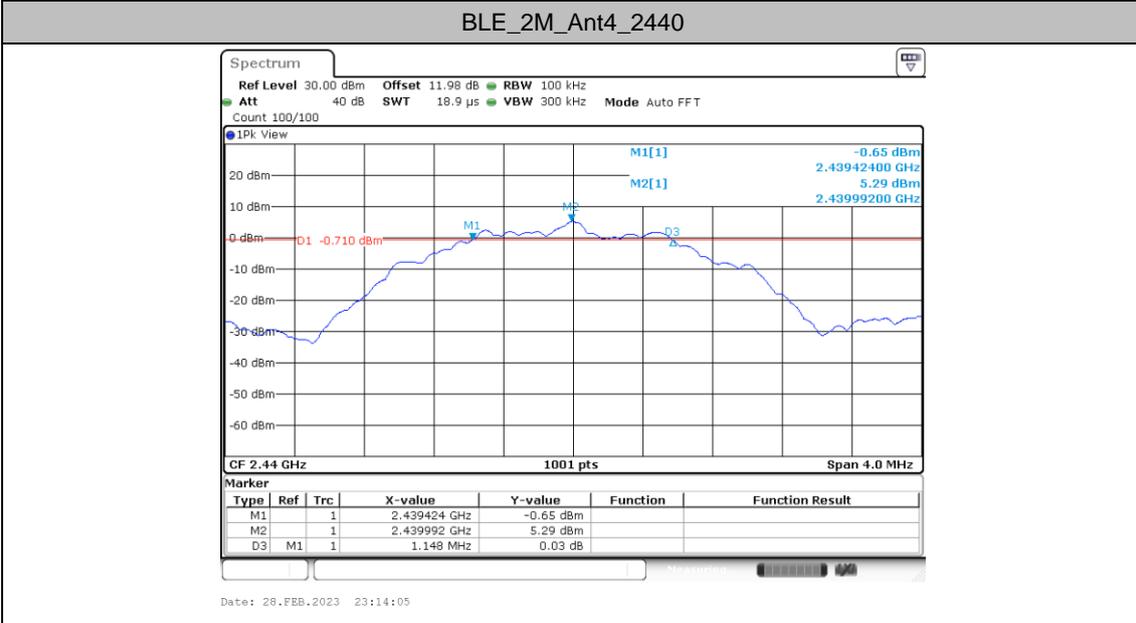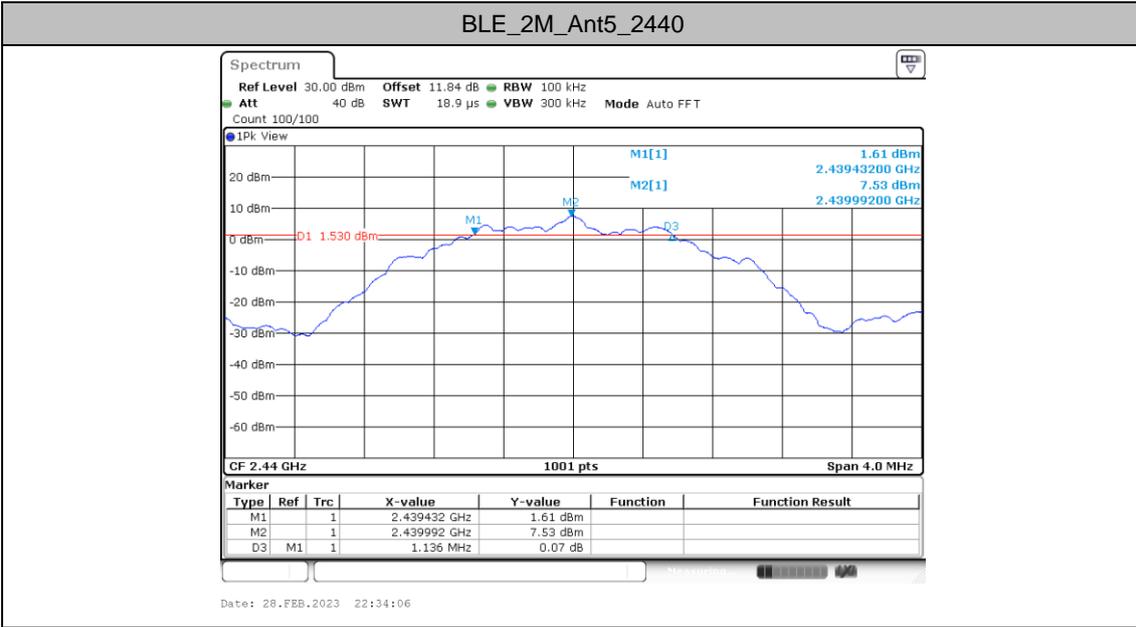

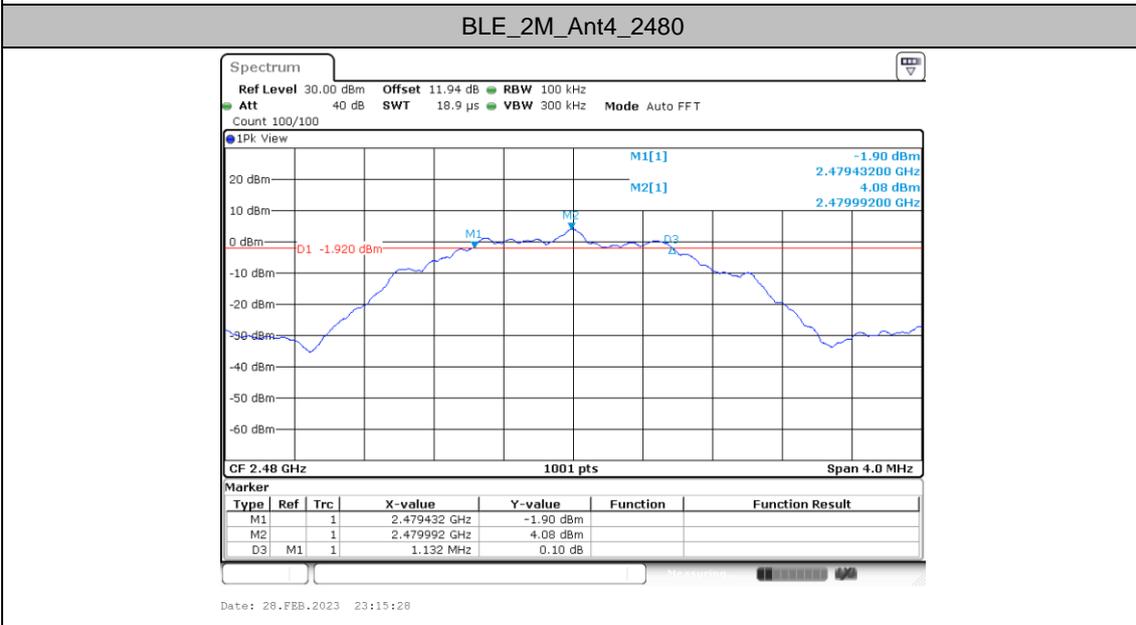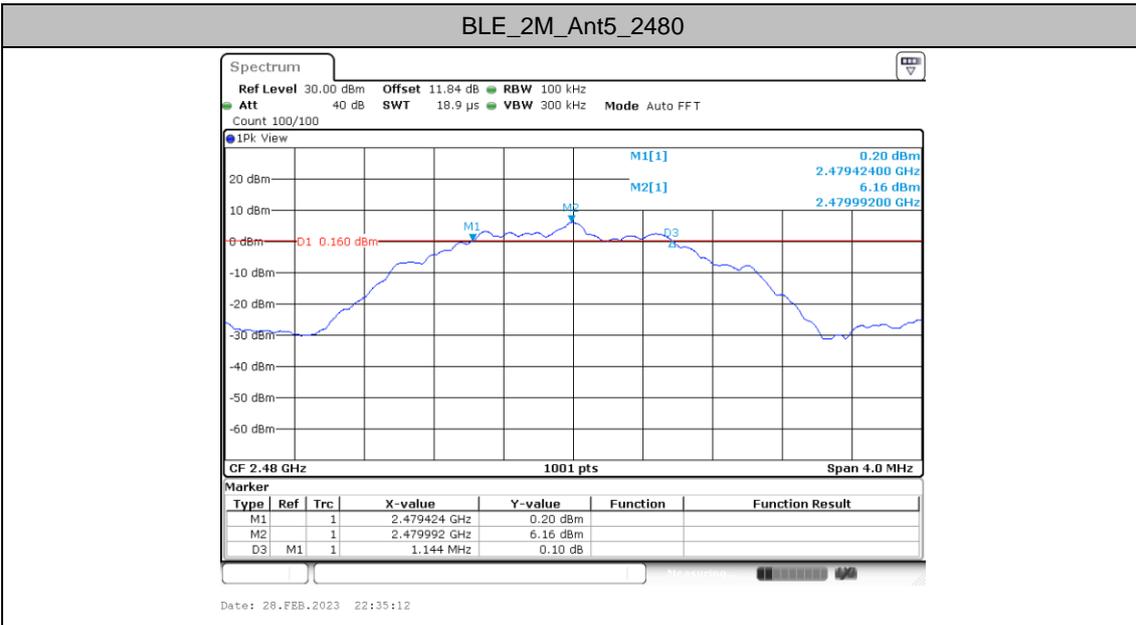


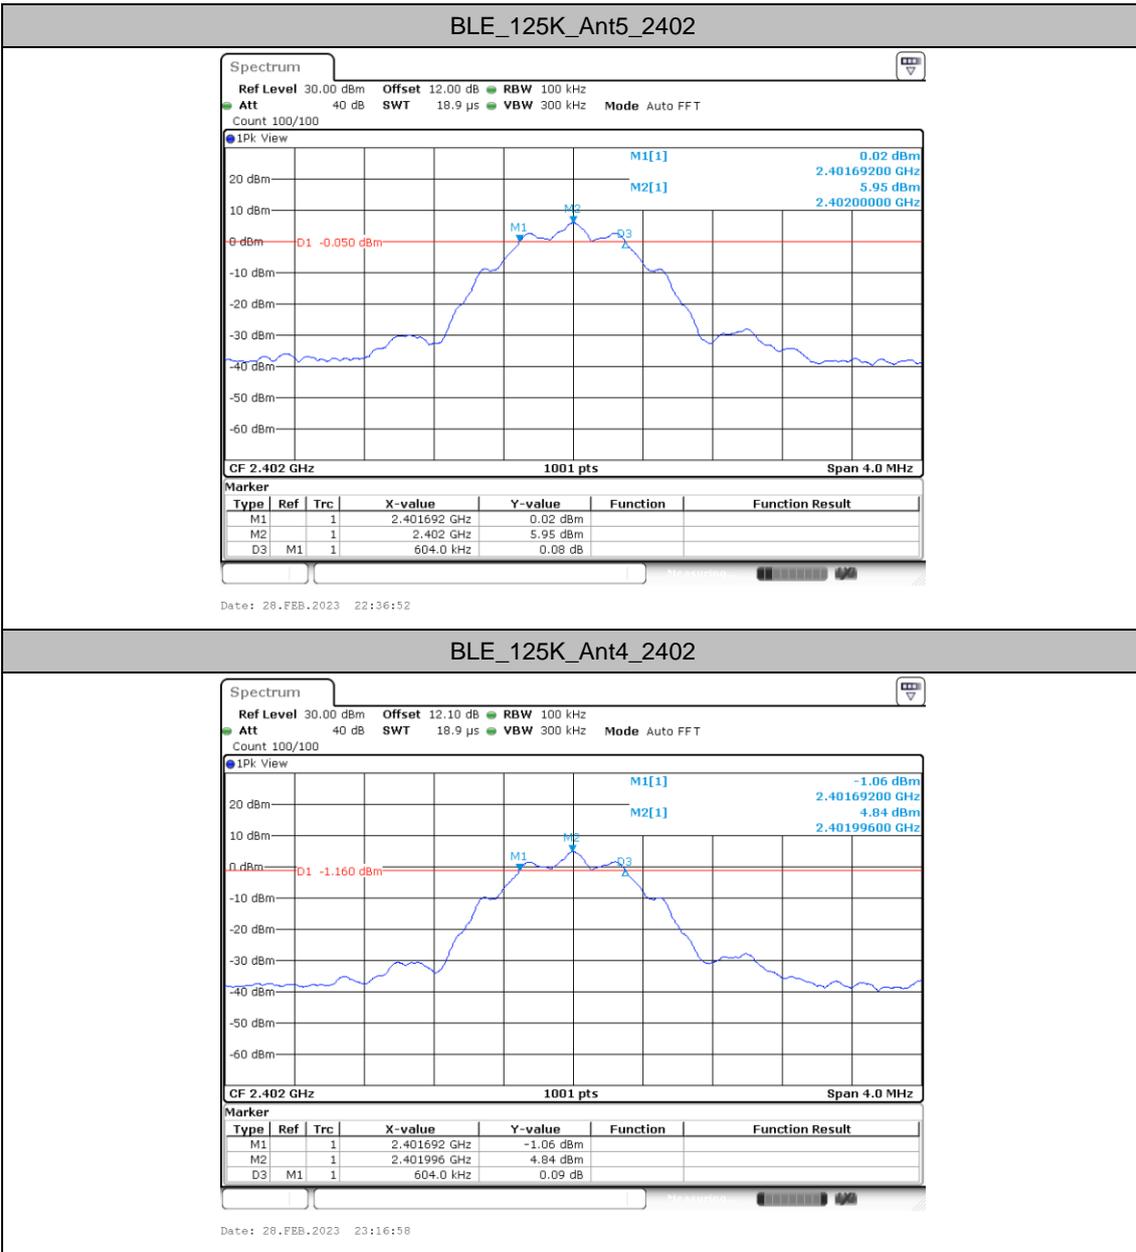

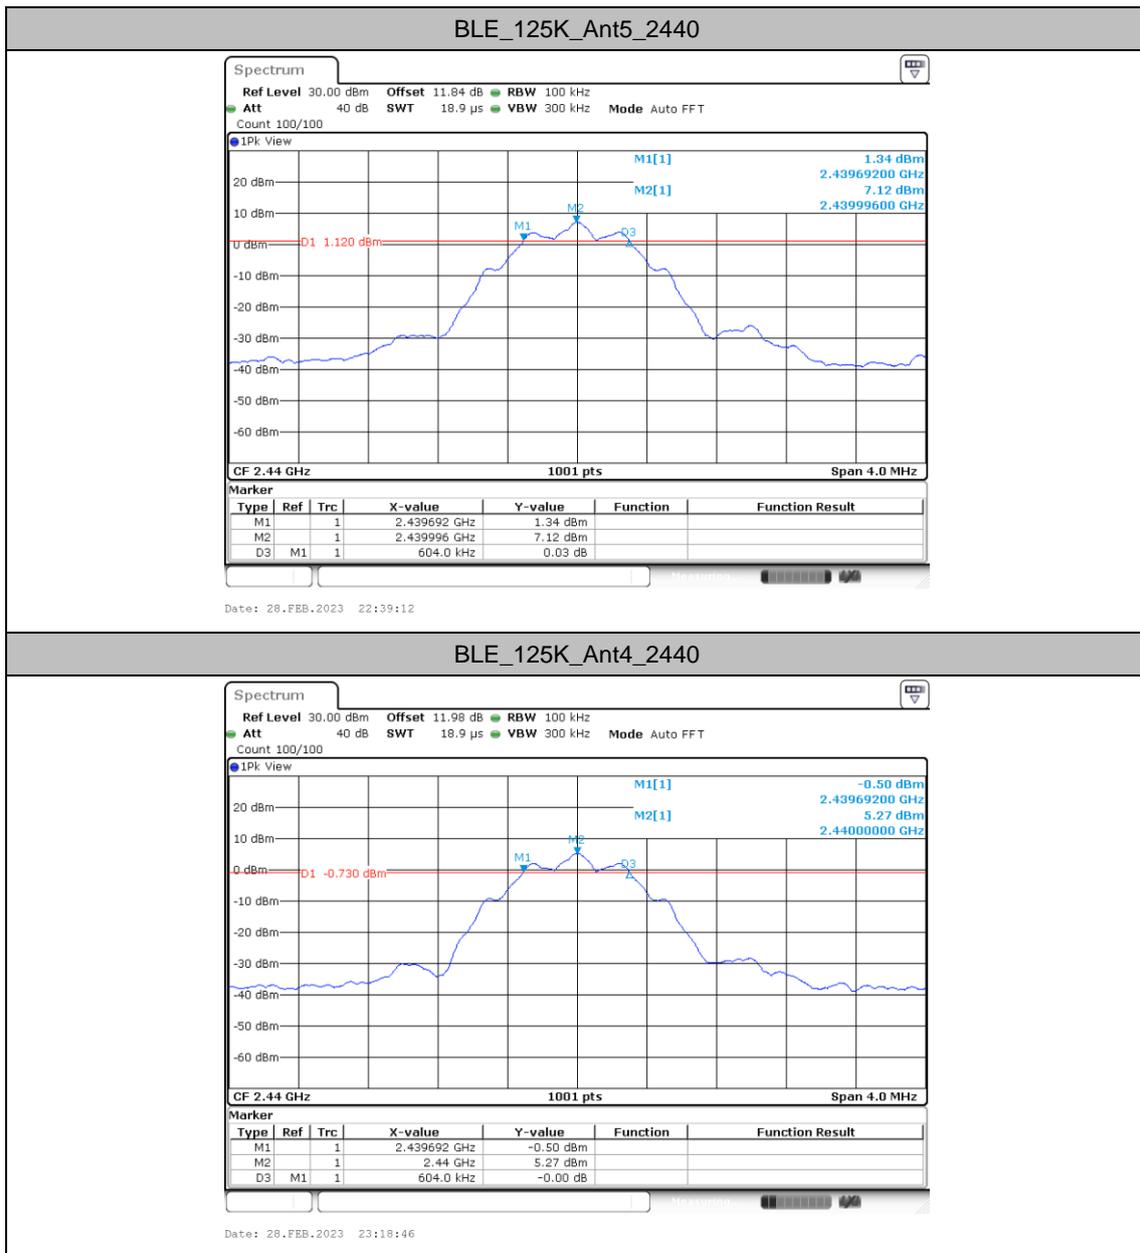

BLE_125K_Ant4_2440



BLE_125K_Ant5_2480

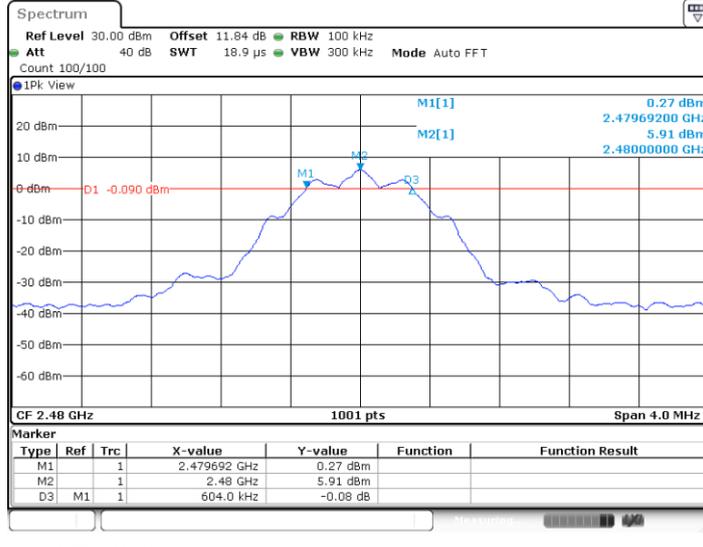


BLE_125K_Ant4_2480

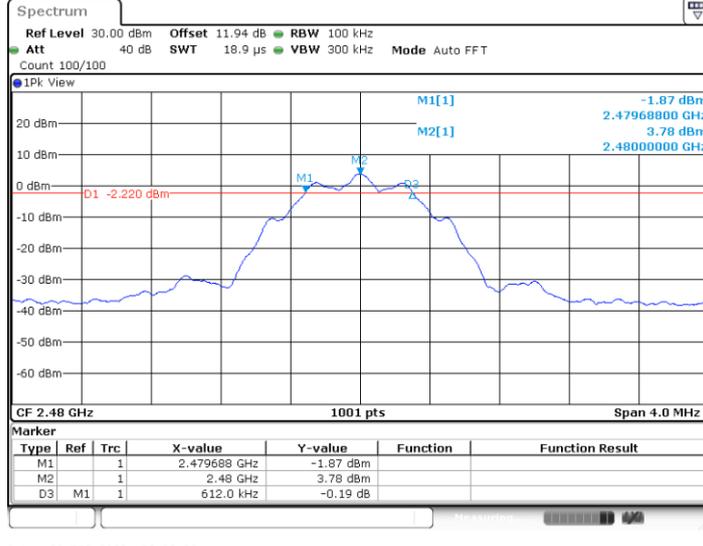





BLE_500K_Ant5_2402

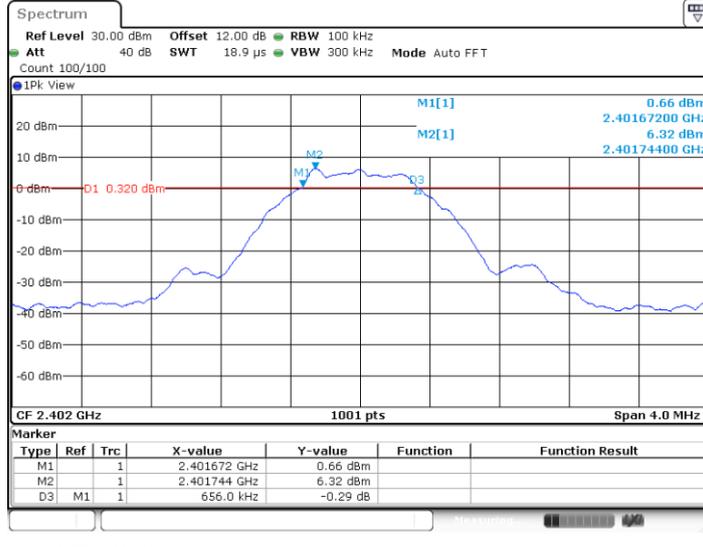

BLE_500K_Ant4_2402

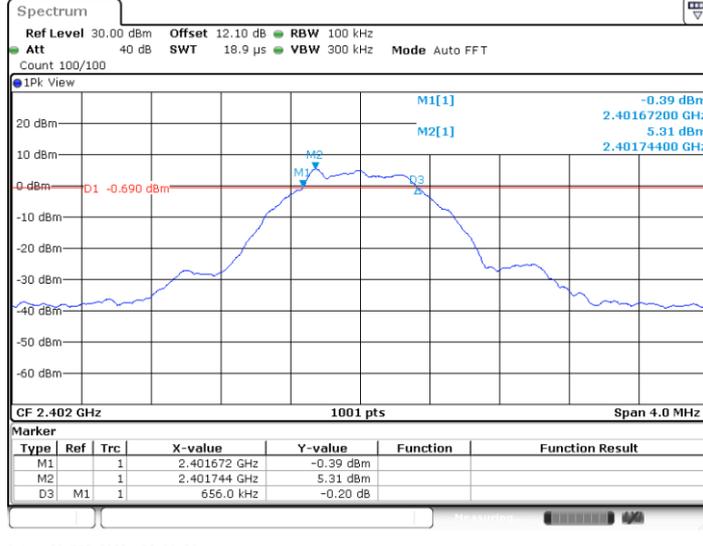


BLE_500K_Ant4_2440

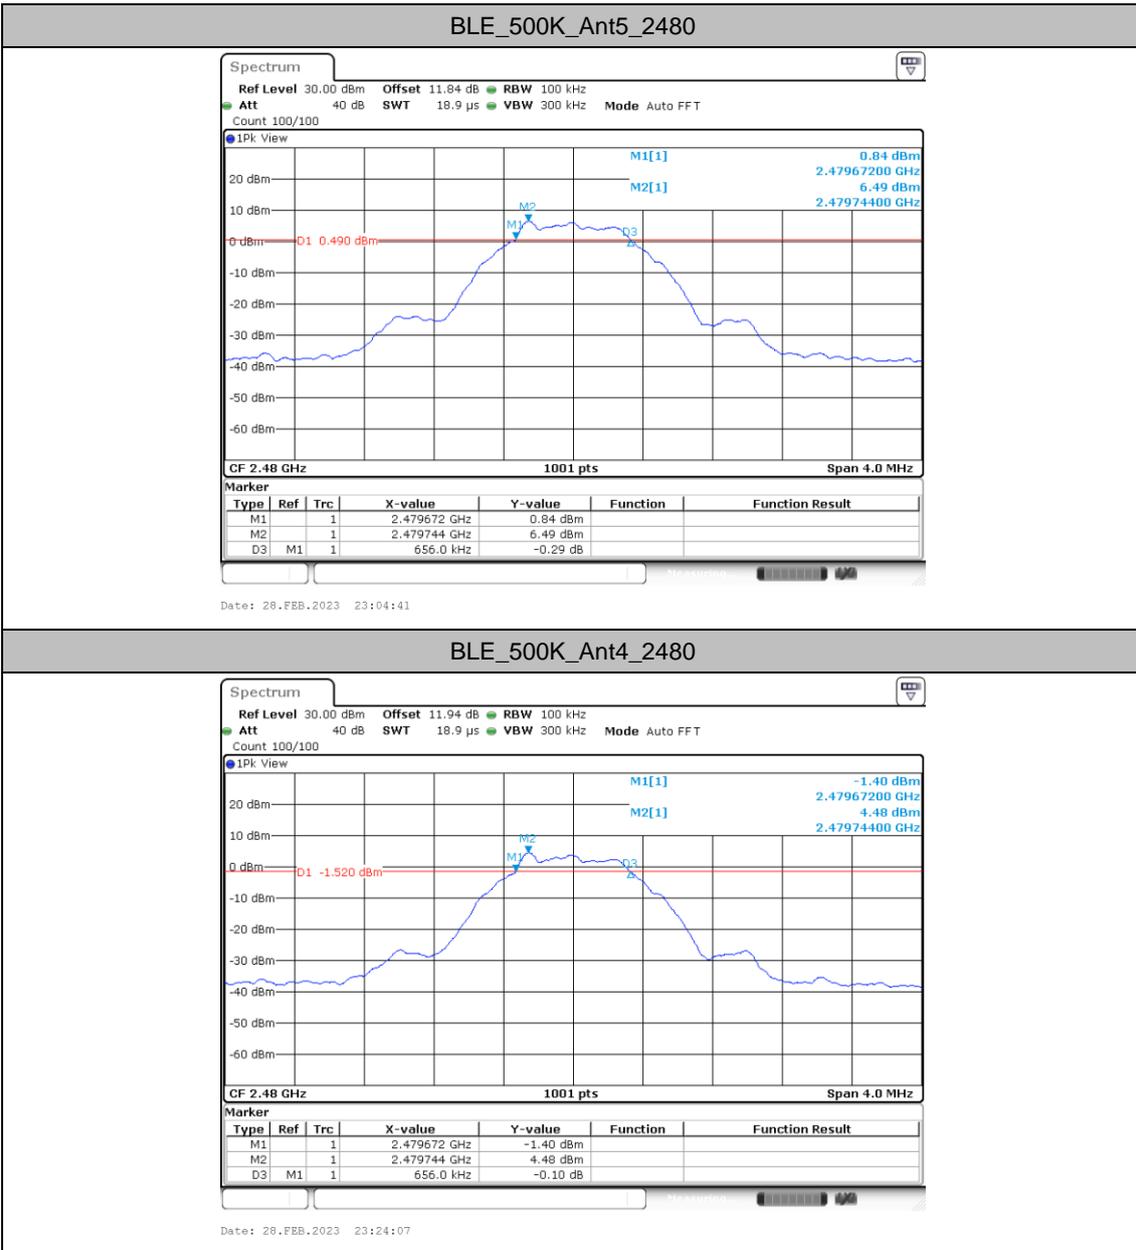





Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant5	2402	1.031	2401.4885	2402.5195	---	---
	Ant4	2402	1.023	2401.4885	2402.5115	---	---
	Ant5	2440	1.031	2439.4885	2440.5195	---	---
	Ant4	2440	1.027	2439.4885	2440.5155	---	---
	Ant5	2480	1.031	2479.4845	2480.5155	---	---
	Ant4	2480	1.031	2479.4845	2480.5155	---	---
BLE_2M	Ant5	2402	2.054	2400.9850	2403.0390	---	---
	Ant4	2402	2.042	2400.9890	2403.0310	---	---
	Ant5	2440	2.046	2438.9890	2441.0350	---	---
	Ant4	2440	2.042	2438.9890	2441.0310	---	---
	Ant5	2480	2.046	2478.9850	2481.0310	---	---
	Ant4	2480	2.046	2478.9850	2481.0310	---	---
BLE_125K	Ant5	2402	1.043	2401.4725	2402.5155	---	---
	Ant4	2402	1.047	2401.4725	2402.5195	---	---
	Ant5	2440	1.043	2439.4725	2440.5155	---	---
	Ant4	2440	1.051	2439.4685	2440.5195	---	---
	Ant5	2480	1.043	2479.4725	2480.5155	---	---
	Ant4	2480	1.051	2479.4685	2480.5195	---	---
BLE_500K	Ant5	2402	1.027	2401.4845	2402.5115	---	---
	Ant4	2402	1.031	2401.4845	2402.5155	---	---
	Ant5	2440	1.023	2439.4885	2440.5115	---	---
	Ant4	2440	1.031	2439.4845	2440.5155	---	---
	Ant5	2480	1.023	2479.4845	2480.5075	---	---
	Ant4	2480	1.027	2479.4845	2480.5115	---	---




Test Graphs

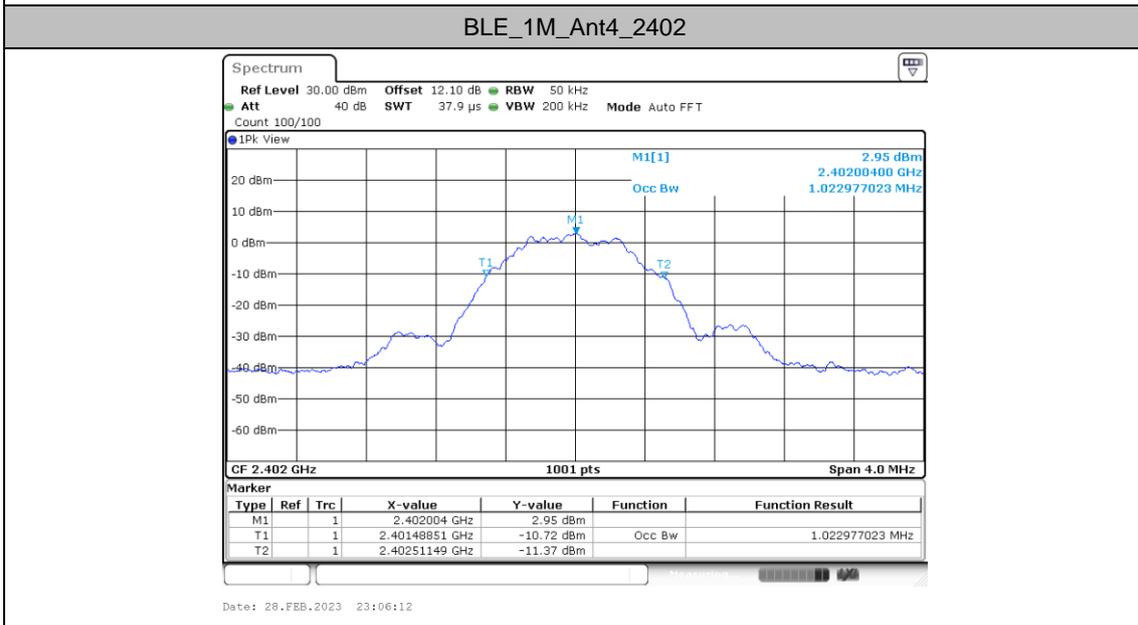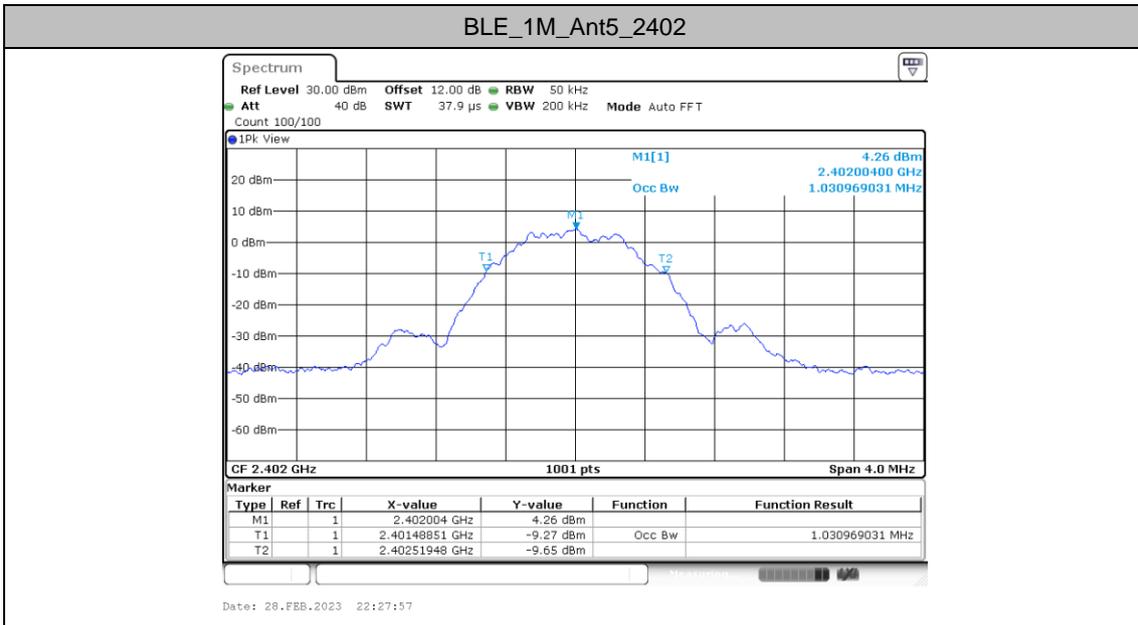




BLE_1M_Ant5_2440

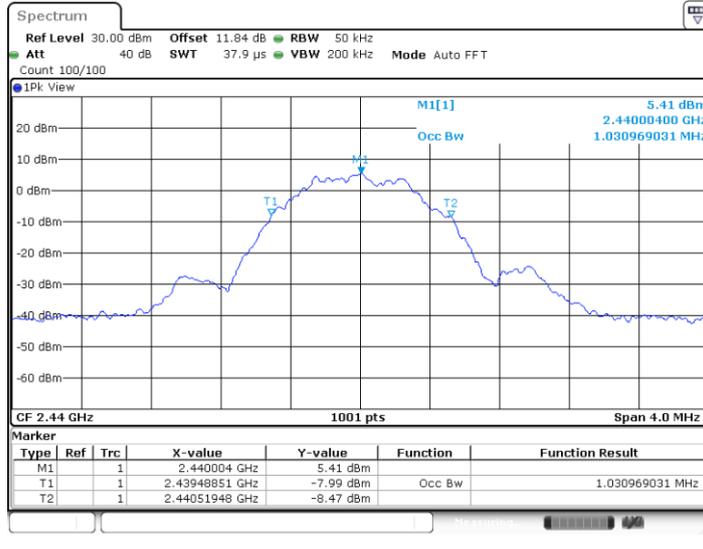


BLE_1M_Ant4_2440

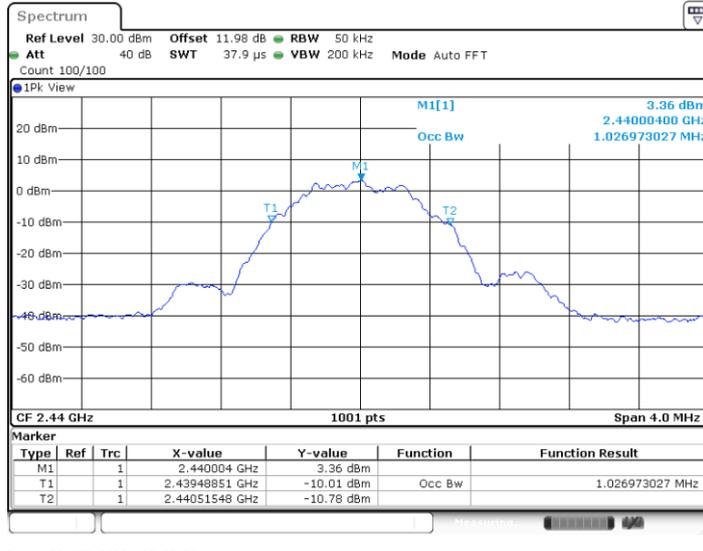




BLE_1M_Ant5_2480

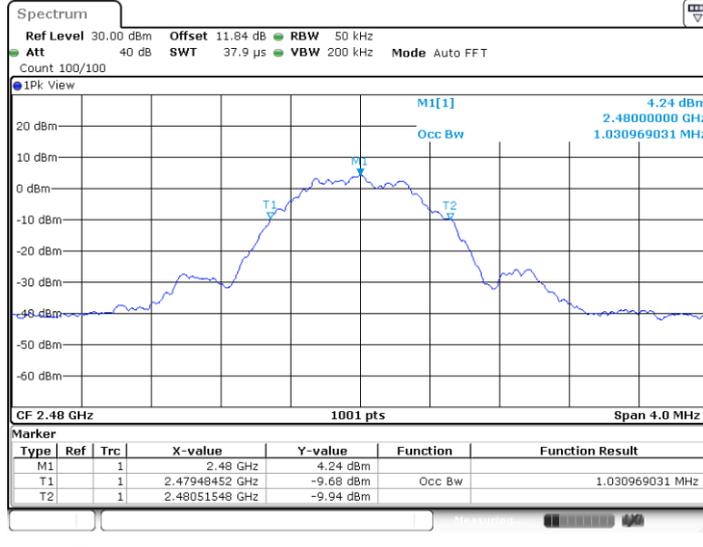


BLE_1M_Ant4_2480

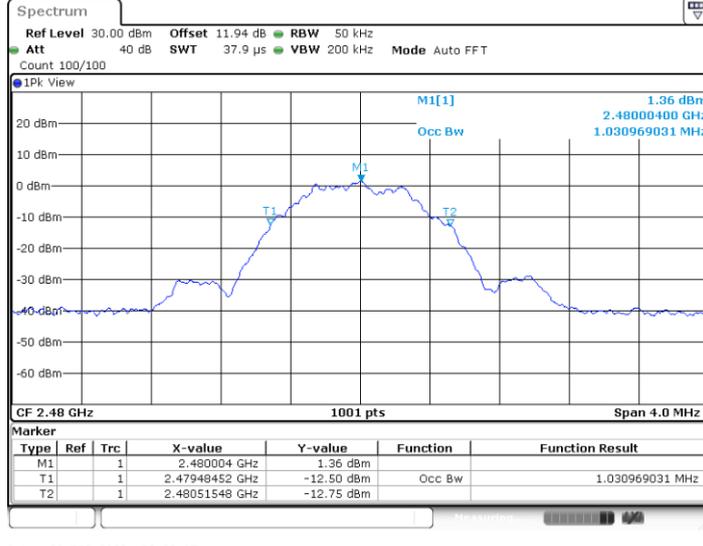




BLE_2M_Ant5_2402

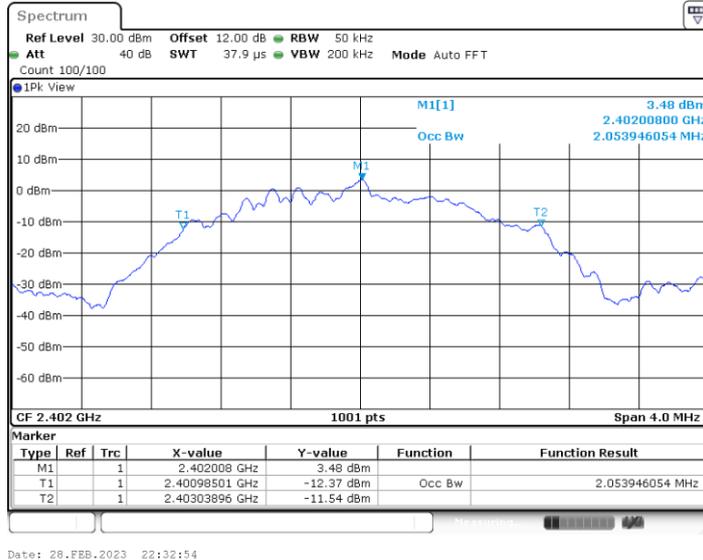


BLE_2M_Ant4_2402

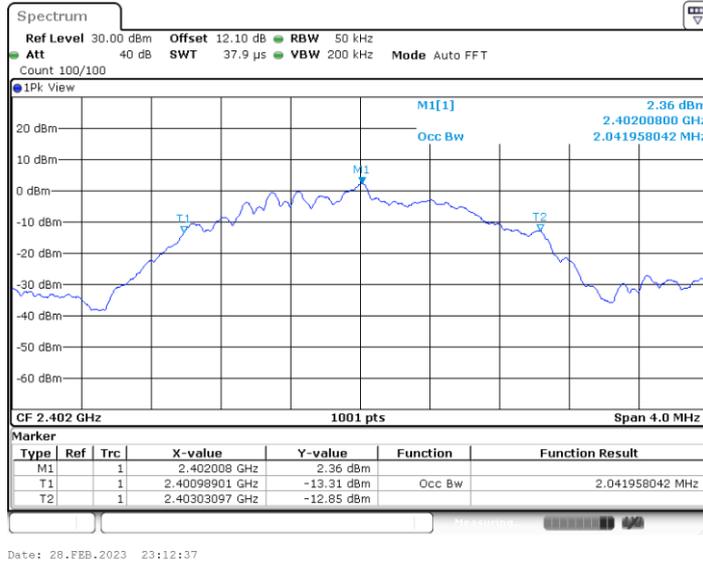




BLE_2M_Ant5_2440

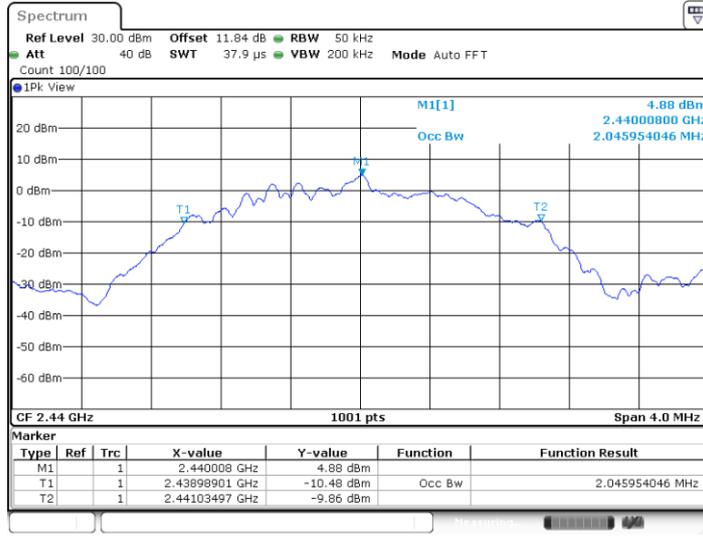

Date: 28.FEB.2023 22:34:12


BLE_2M_Ant4_2440

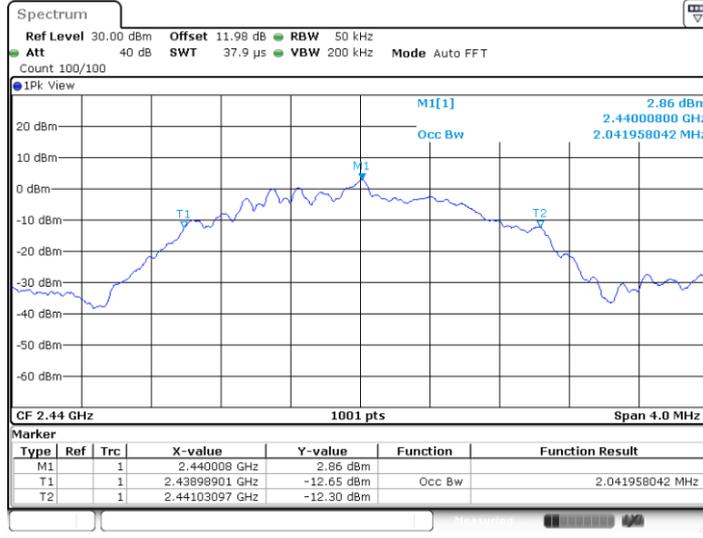

Date: 28.FEB.2023 23:14:11




BLE_2M_Ant5_2480

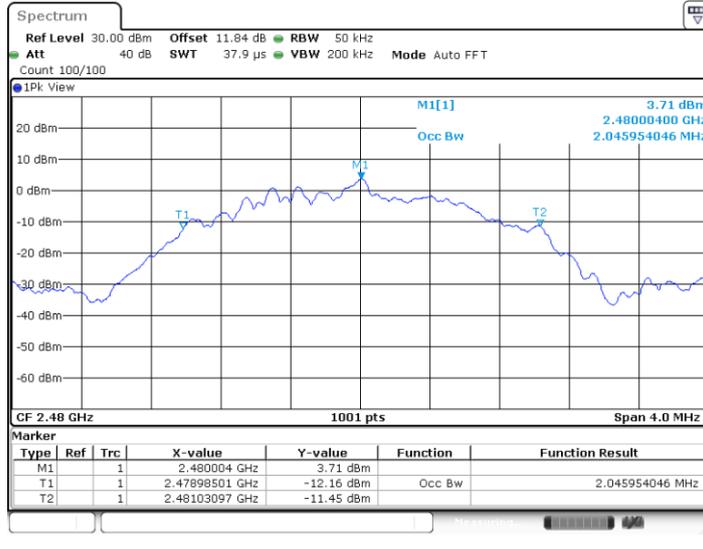


Date: 28.FEB.2023 22:35:18

BLE_2M_Ant4_2480

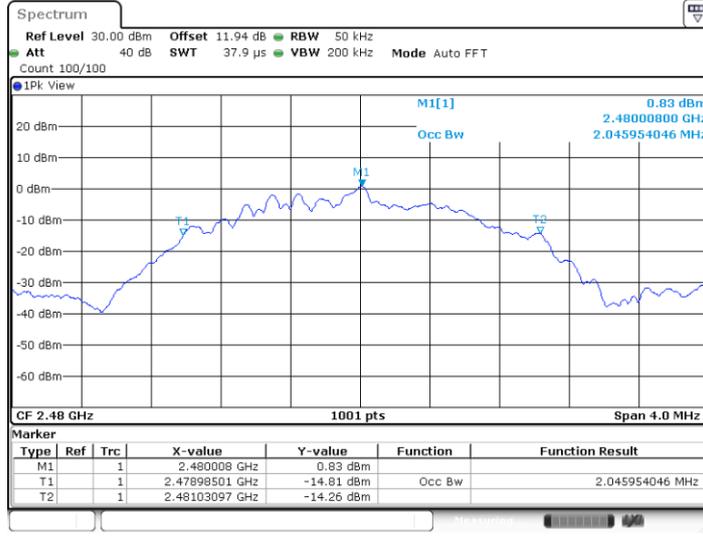


Date: 28.FEB.2023 23:15:34

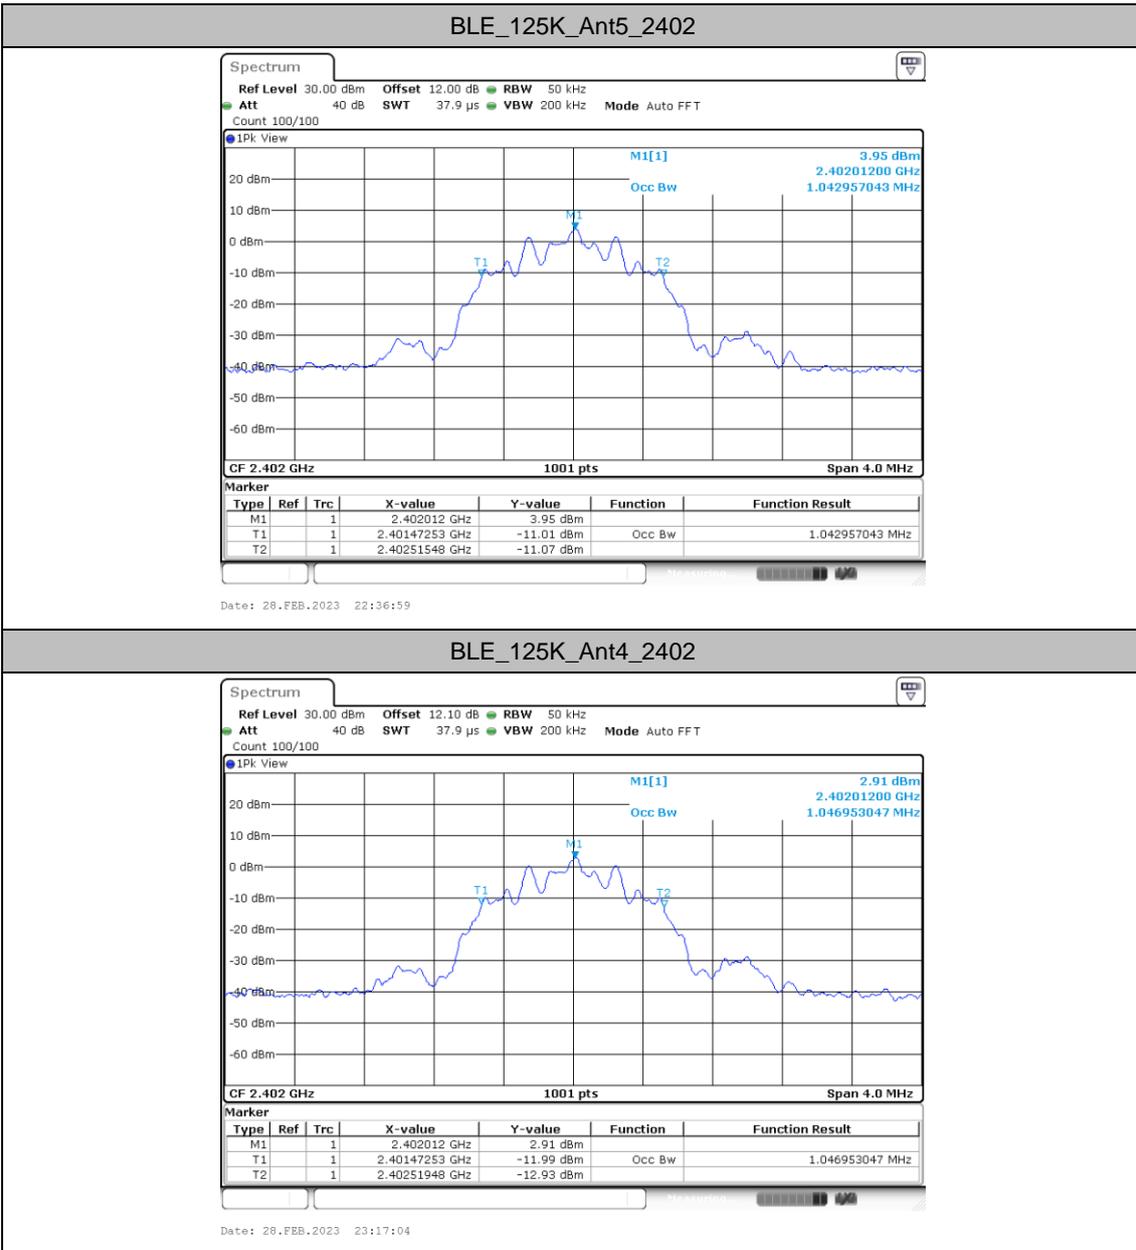




BLE_125K_Ant5_2440

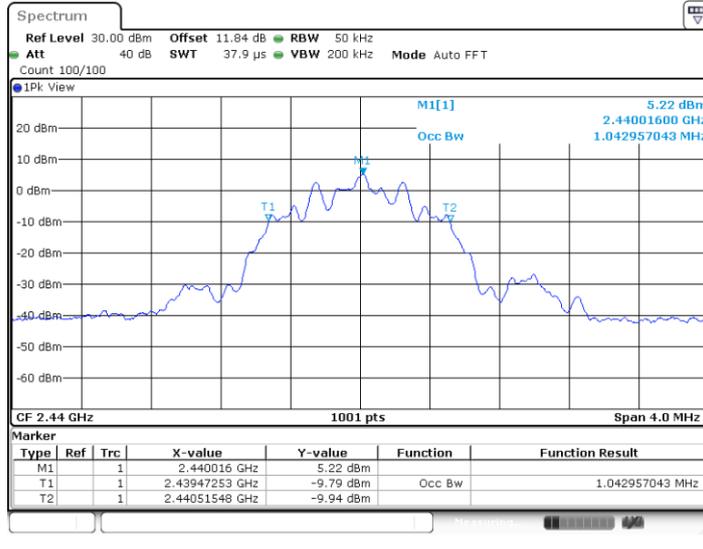


Date: 28.FEB.2023 22:39:18

BLE_125K_Ant4_2440

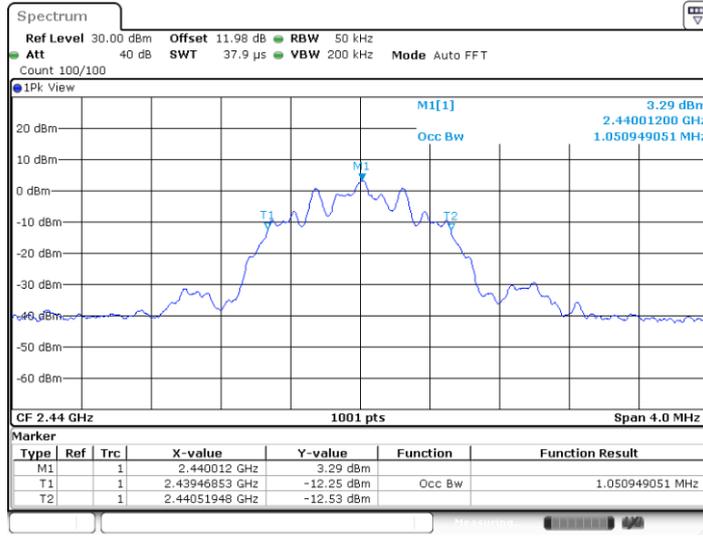


Date: 28.FEB.2023 23:18:52

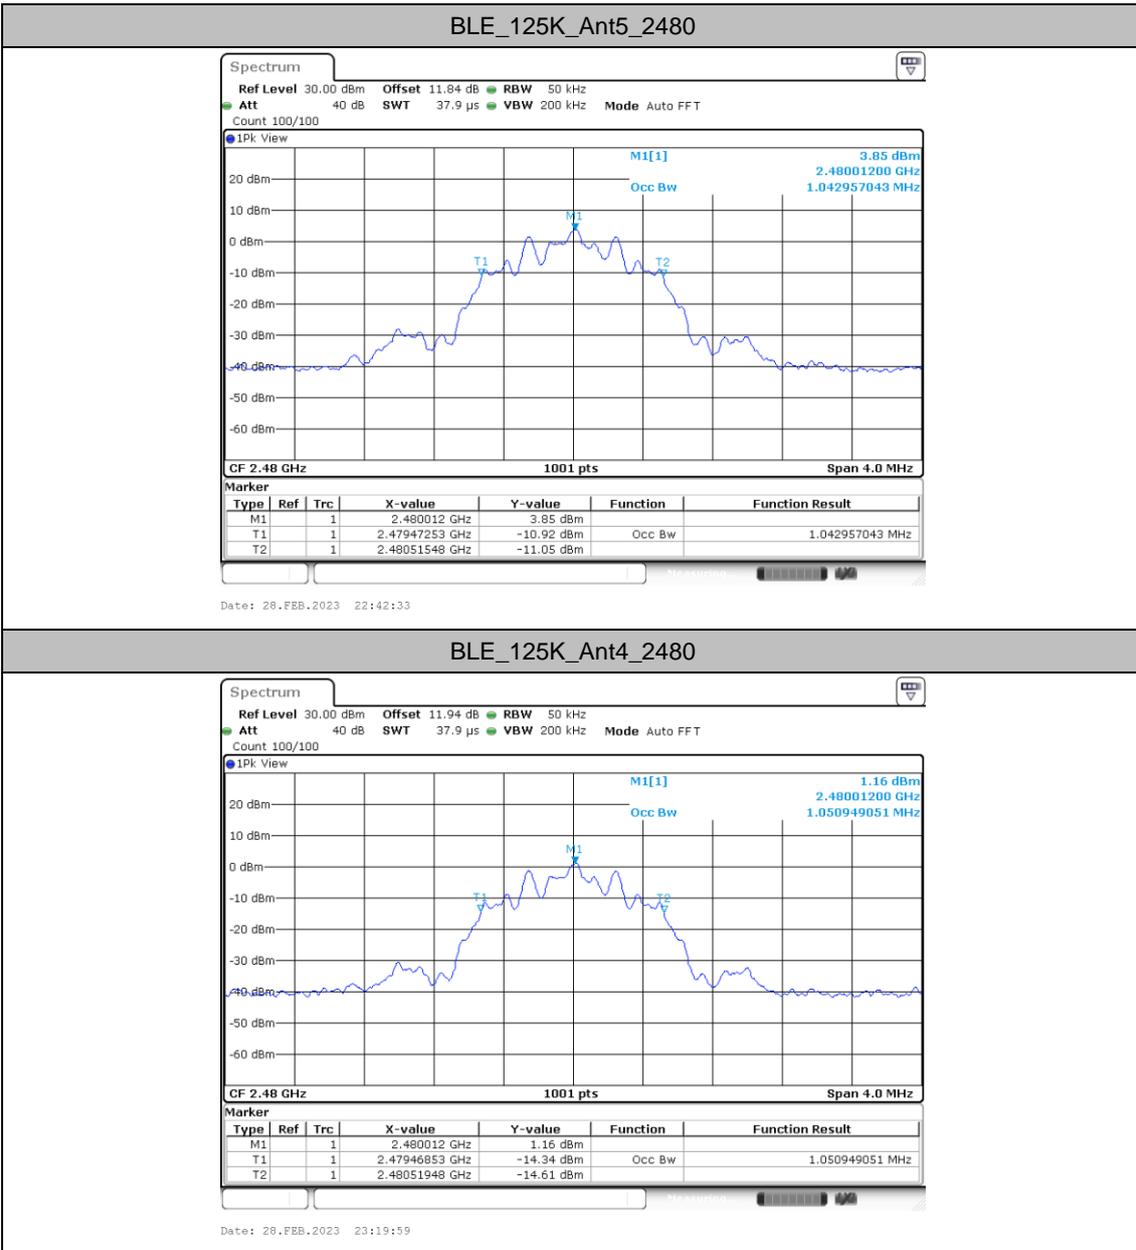




BLE_500K_Ant5_2402

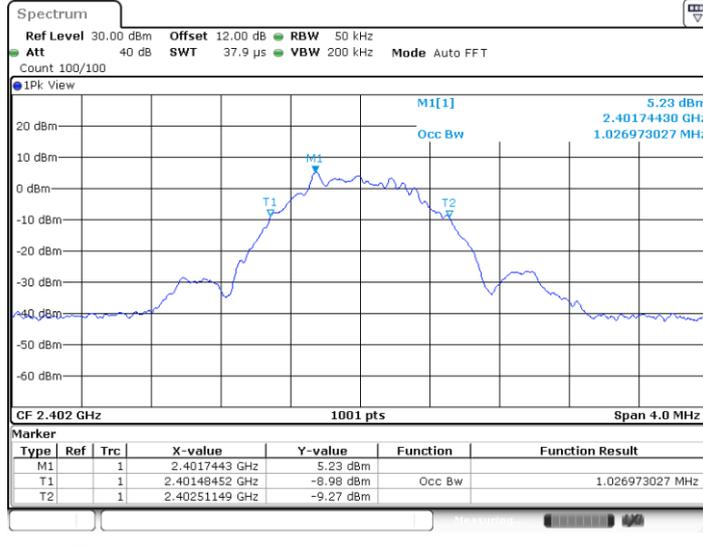


Date: 28.FEB.2023 23:02:05

BLE_500K_Ant4_2402

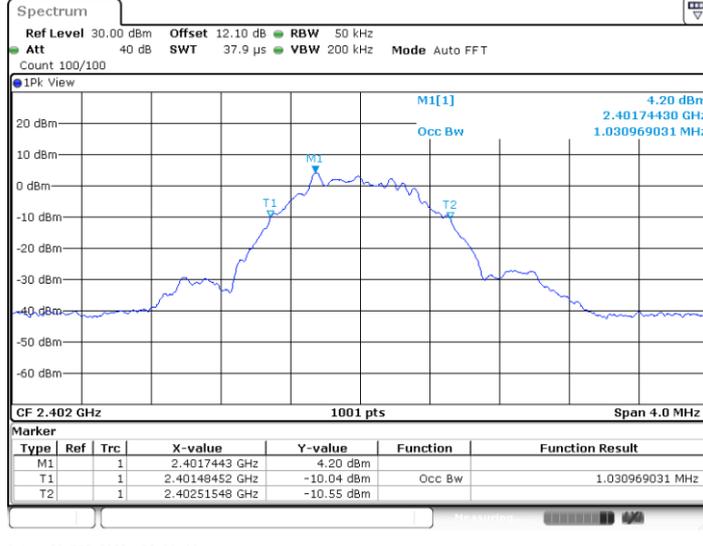


Date: 28.FEB.2023 23:21:44

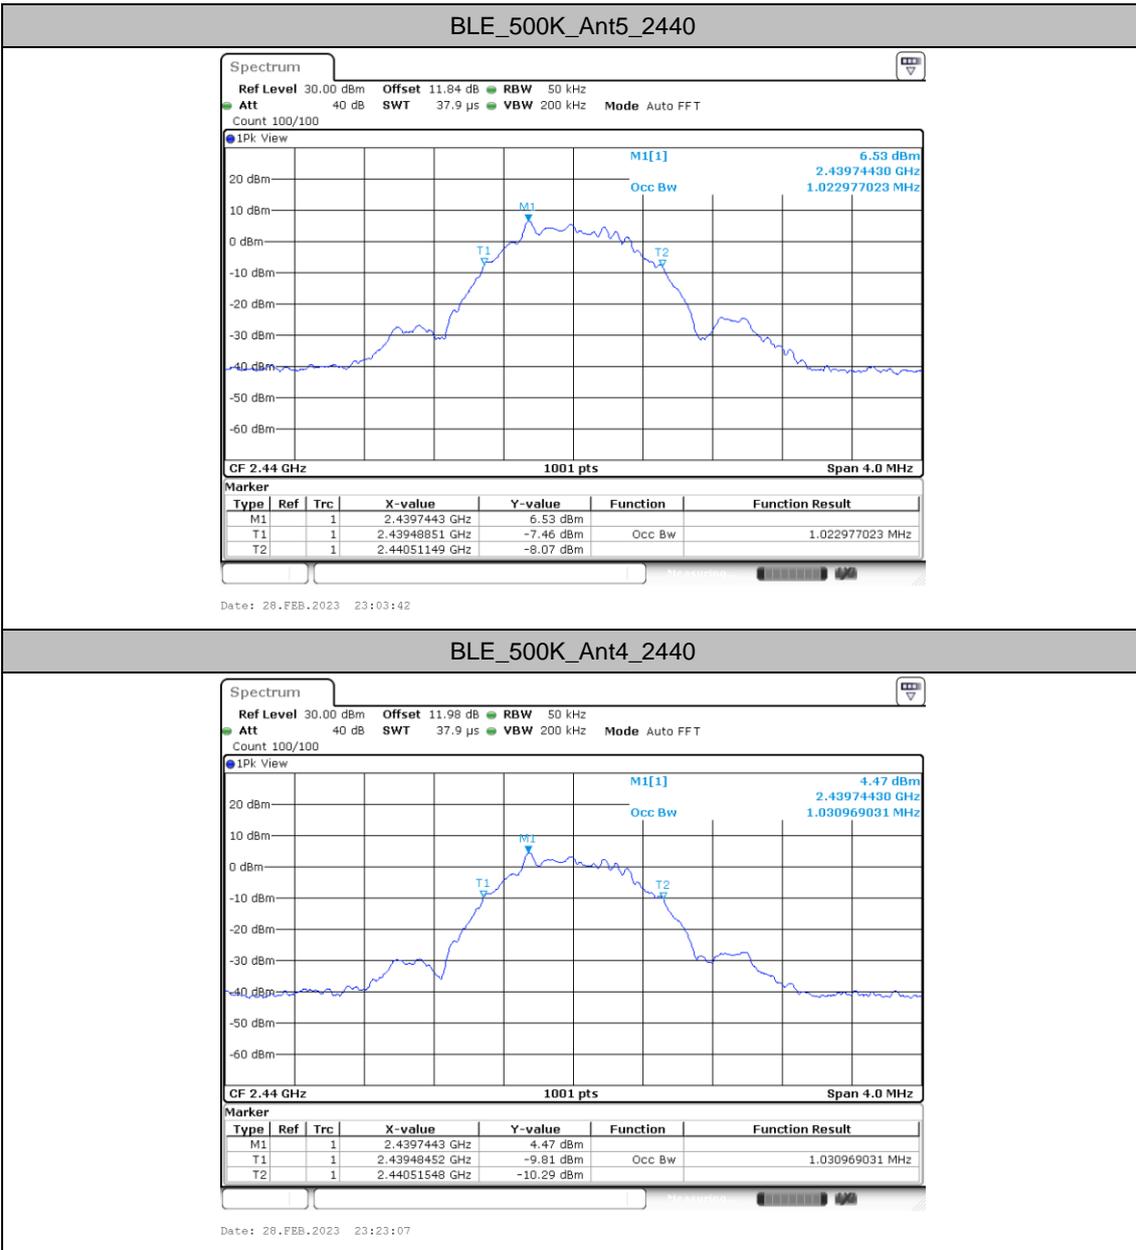




BLE_500K_Ant5_2480

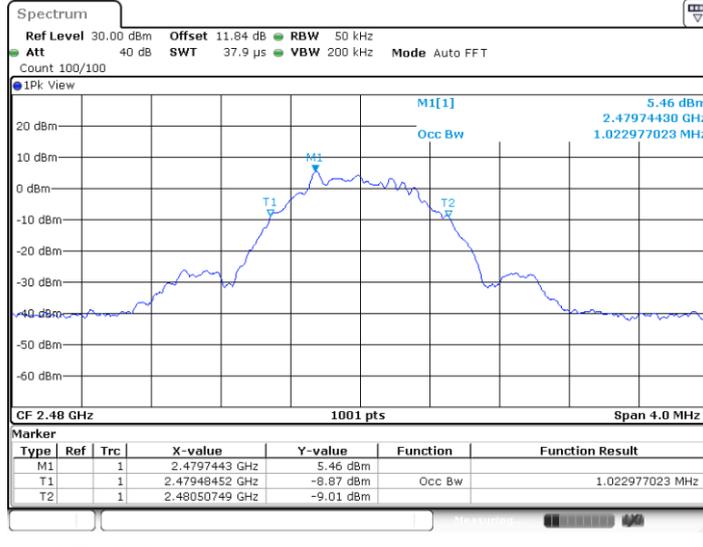

BLE_500K_Ant4_2480

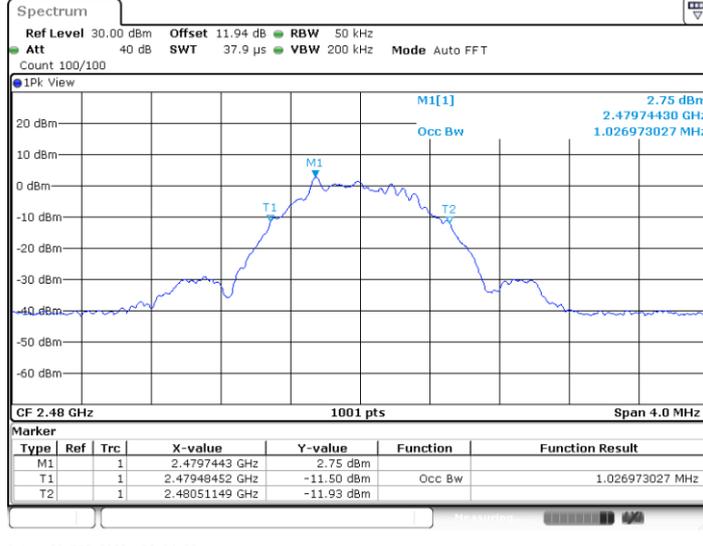





Maximum power spectral density


Test Result

TestMode	Antenna	Freq(MHz)	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant5	2402	-8.82	≤8.00	PASS
	Ant4	2402	-10.03	≤8.00	PASS
	Ant5	2440	-7.55	≤8.00	PASS
	Ant4	2440	-9.61	≤8.00	PASS
	Ant5	2480	-8.78	≤8.00	PASS
	Ant4	2480	-11.62	≤8.00	PASS
BLE_2M	Ant5	2402	-11.08	≤8.00	PASS
	Ant4	2402	-12.14	≤8.00	PASS
	Ant5	2440	-9.62	≤8.00	PASS
	Ant4	2440	-11.69	≤8.00	PASS
	Ant5	2480	-10.85	≤8.00	PASS
	Ant4	2480	-13.67	≤8.00	PASS
BLE_125K	Ant5	2402	0.15	≤8.00	PASS
	Ant4	2402	-0.91	≤8.00	PASS
	Ant5	2440	1.5	≤8.00	PASS
	Ant4	2440	-0.44	≤8.00	PASS
	Ant5	2480	0.37	≤8.00	PASS
	Ant4	2480	-2.45	≤8.00	PASS
BLE_500K	Ant5	2402	-0.08	≤8.00	PASS
	Ant4	2402	-1.12	≤8.00	PASS
	Ant5	2440	1.54	≤8.00	PASS
	Ant4	2440	-0.85	≤8.00	PASS
	Ant5	2480	0.24	≤8.00	PASS
	Ant4	2480	-2.58	≤8.00	PASS




Test Graphs

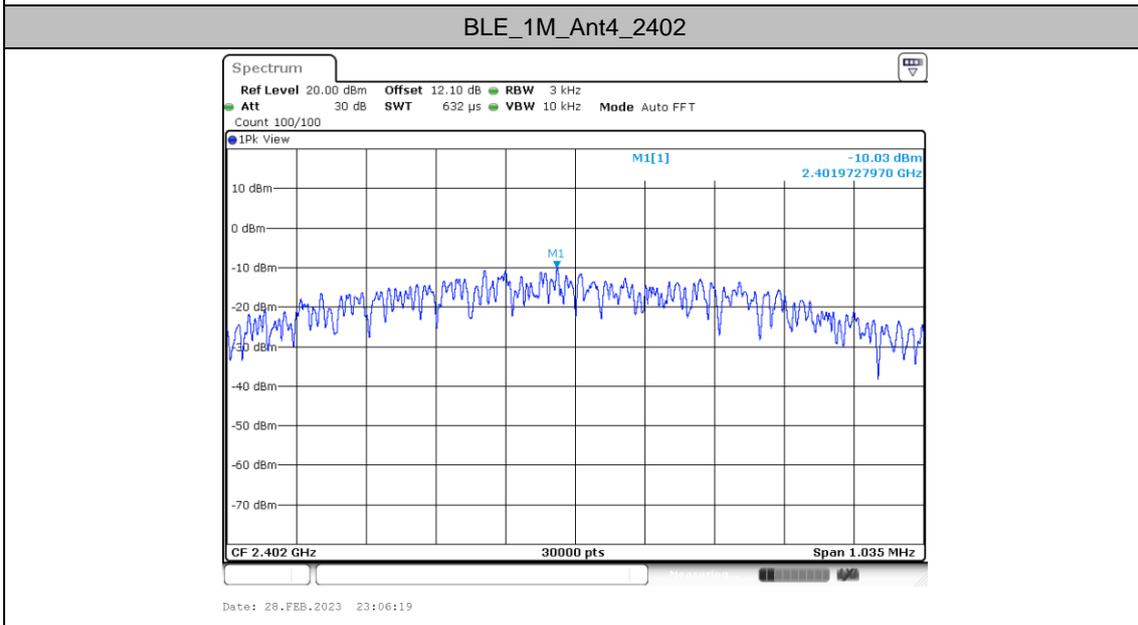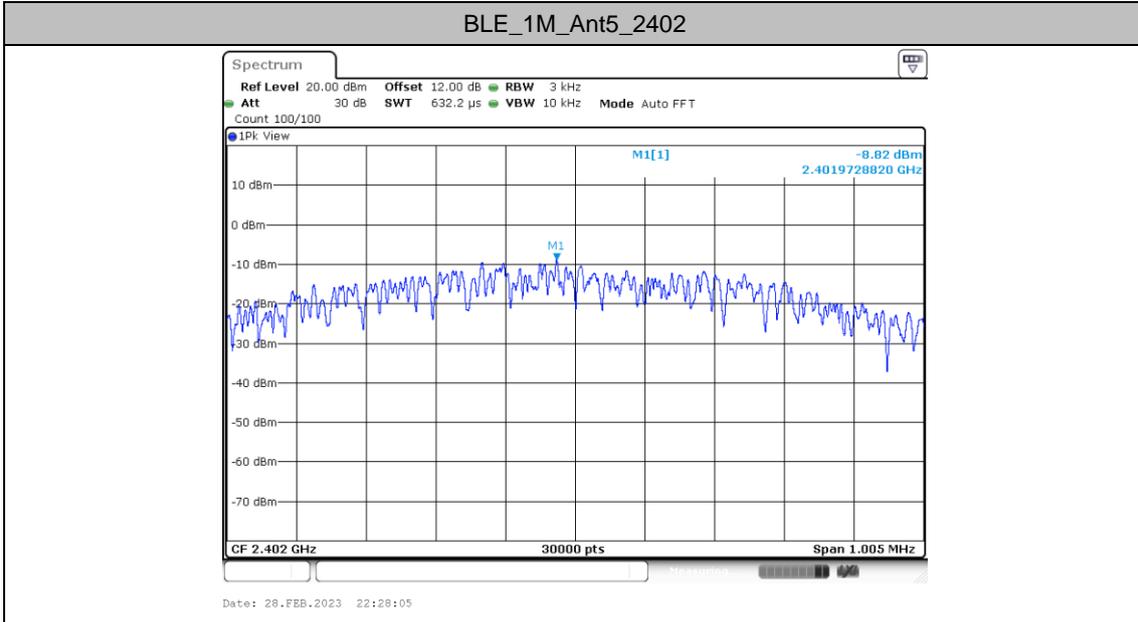

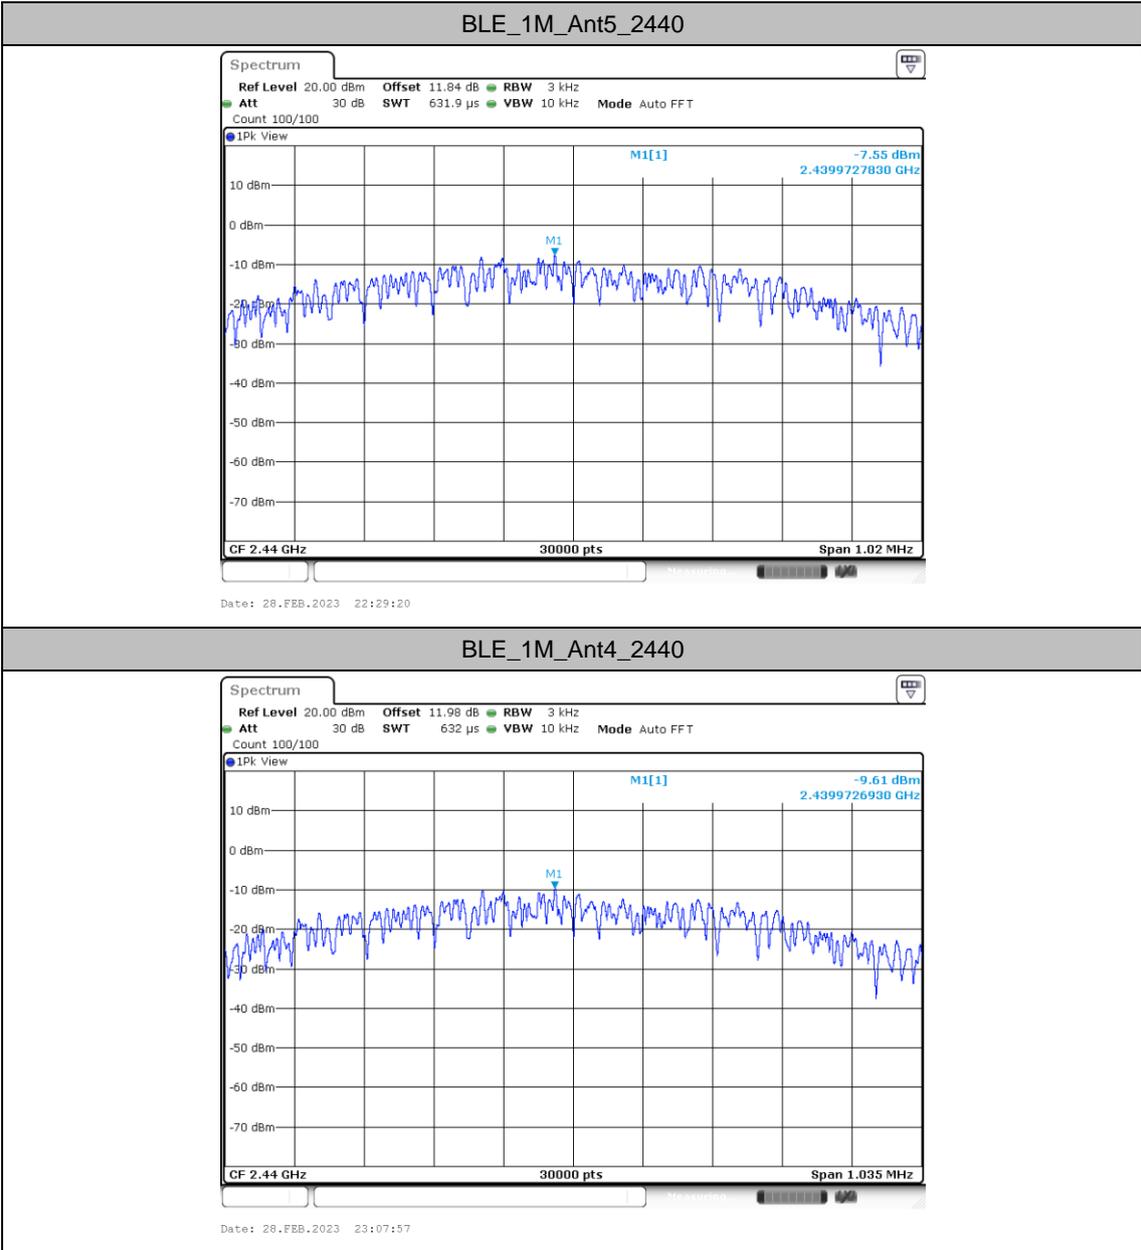




BLE_1M_Ant5_2480

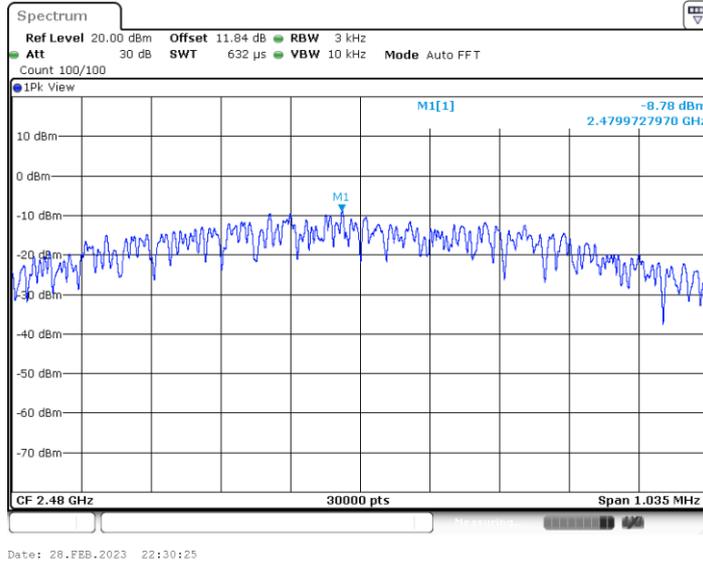


BLE_1M_Ant4_2480

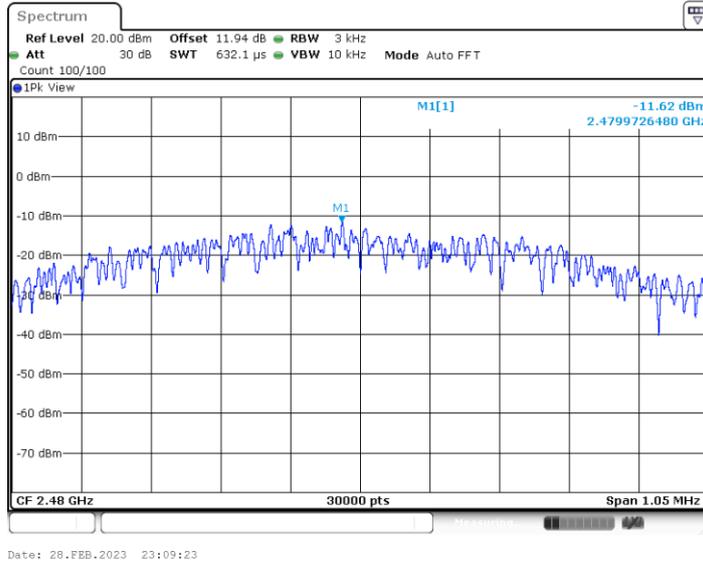




BLE_2M_Ant5_2402

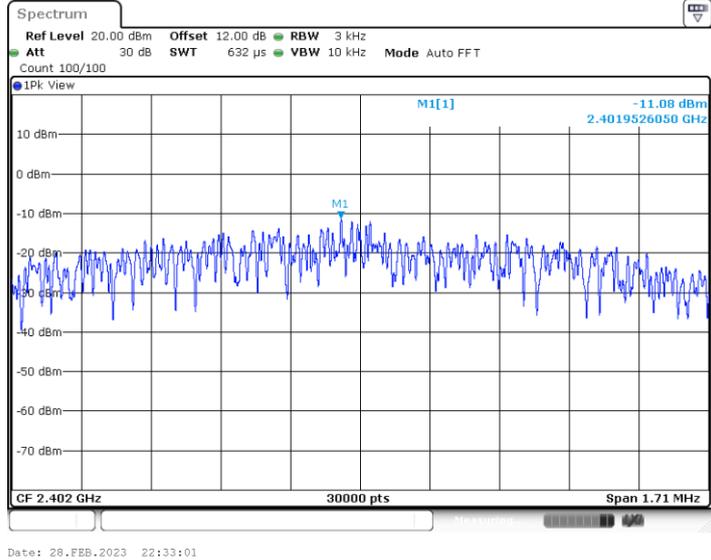


BLE_2M_Ant4_2402

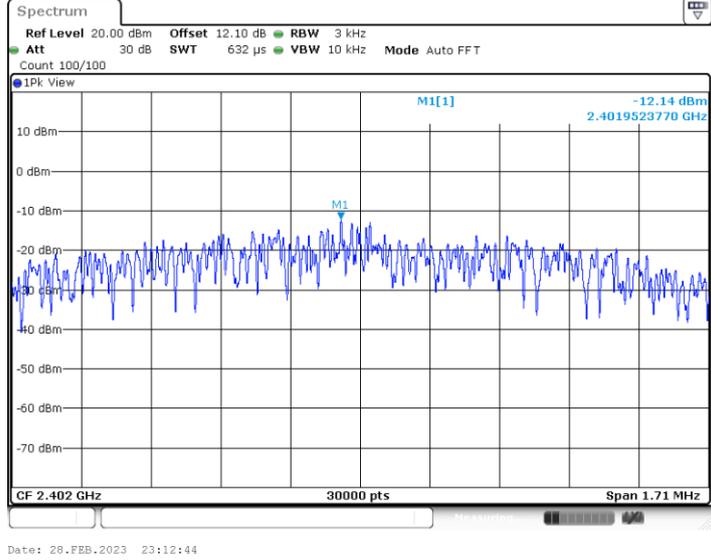




BLE_2M_Ant5_2440

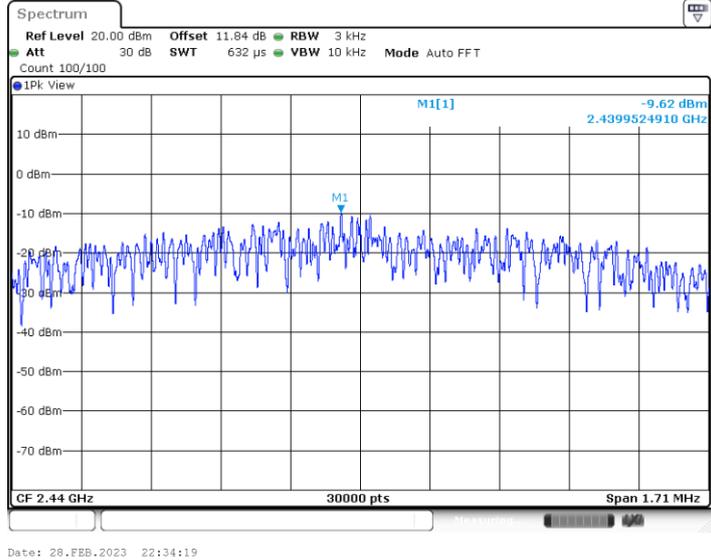


BLE_2M_Ant4_2440

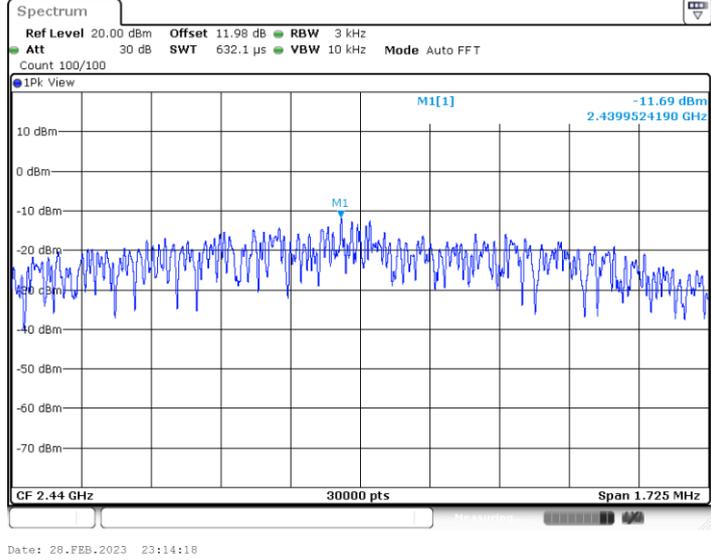




BLE_2M_Ant5_2480

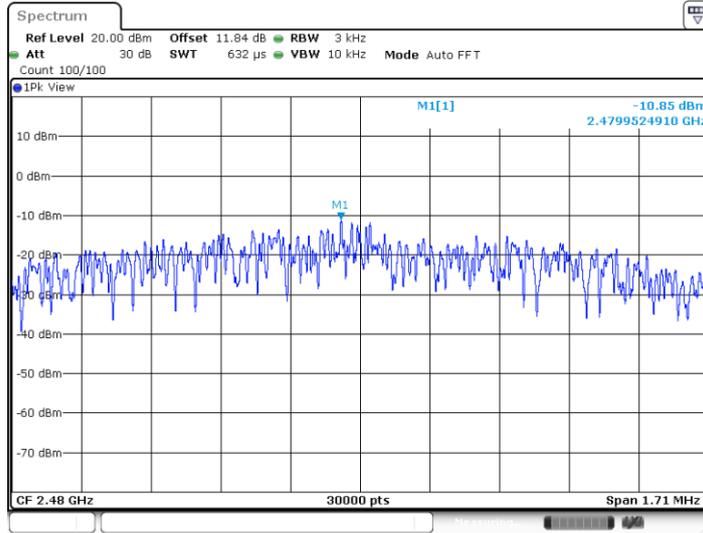


BLE_2M_Ant4_2480

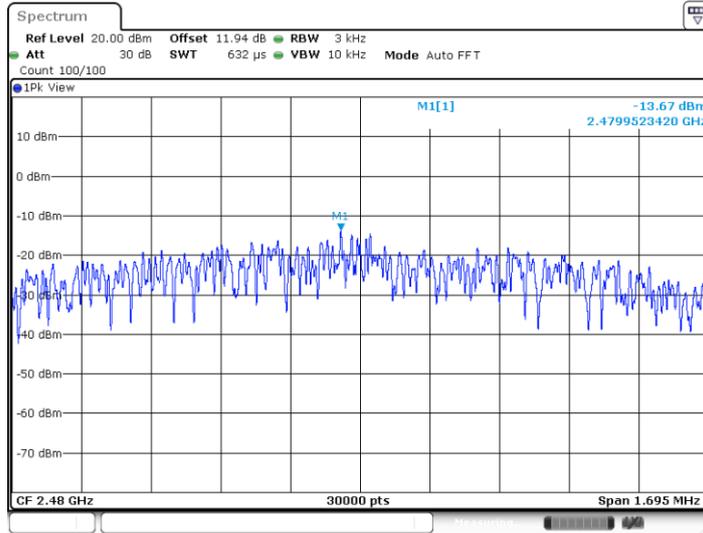




BLE_125K_Ant5_2402

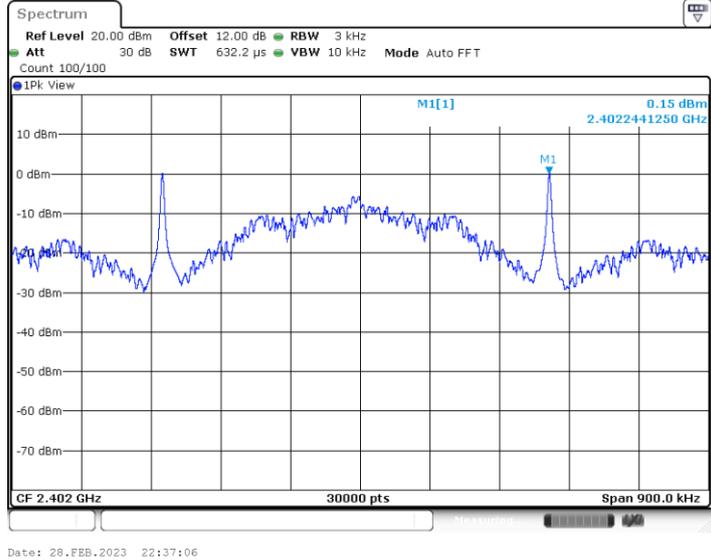


BLE_125K_Ant4_2402

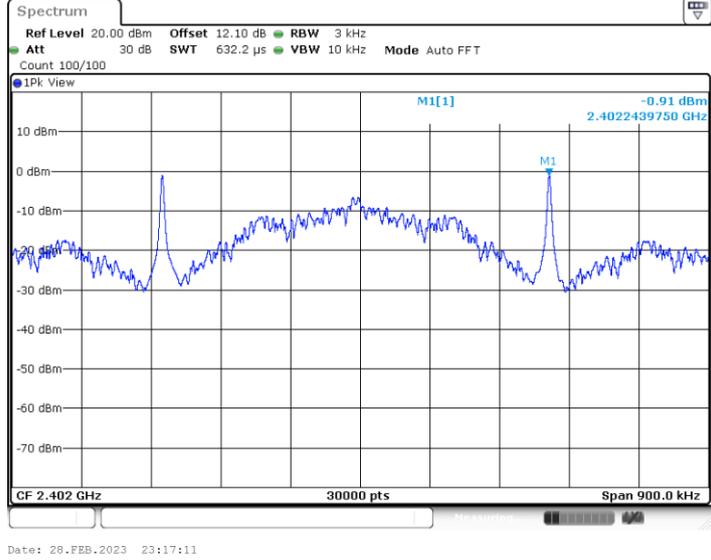






BLE_125K_Ant5_2440

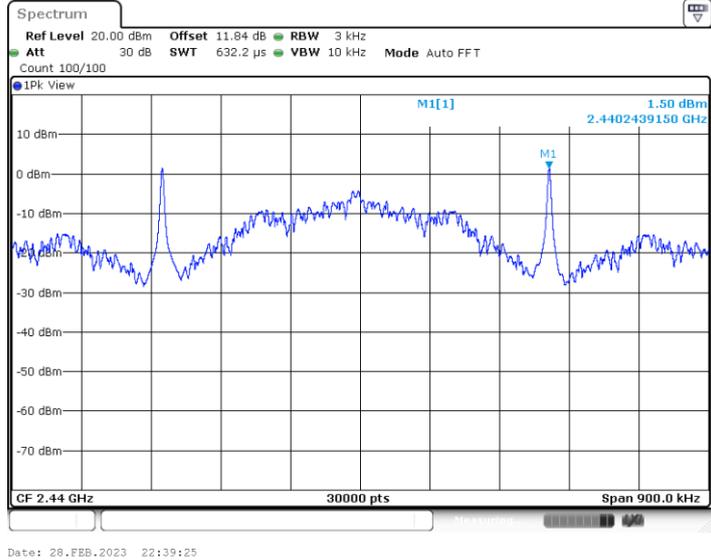


BLE_125K_Ant4_2440

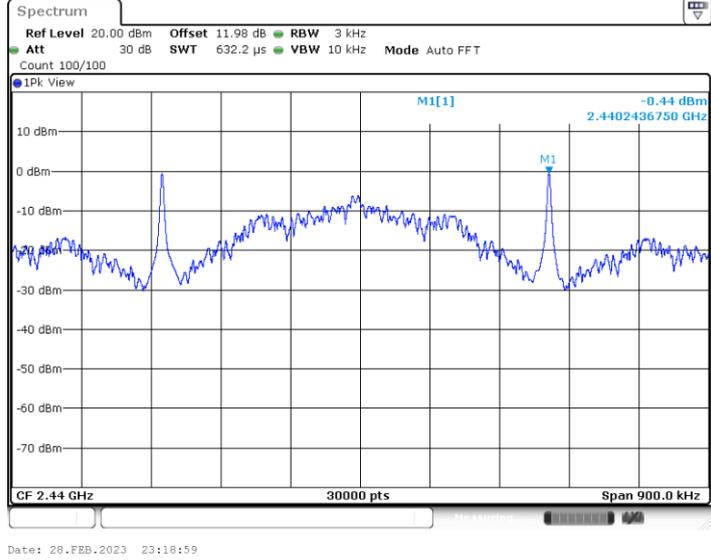

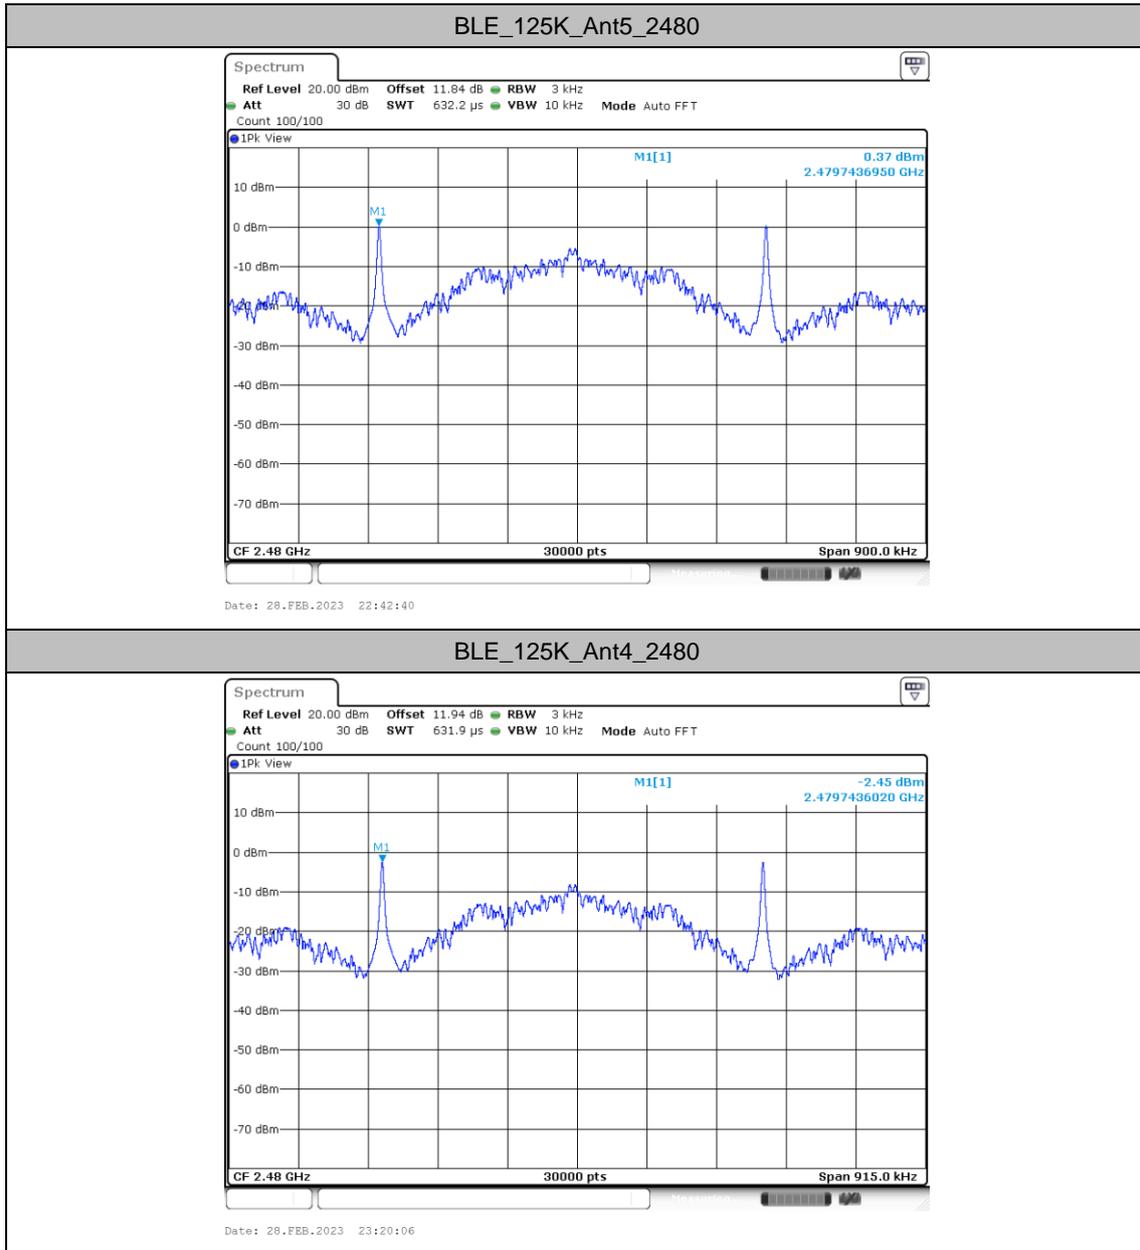


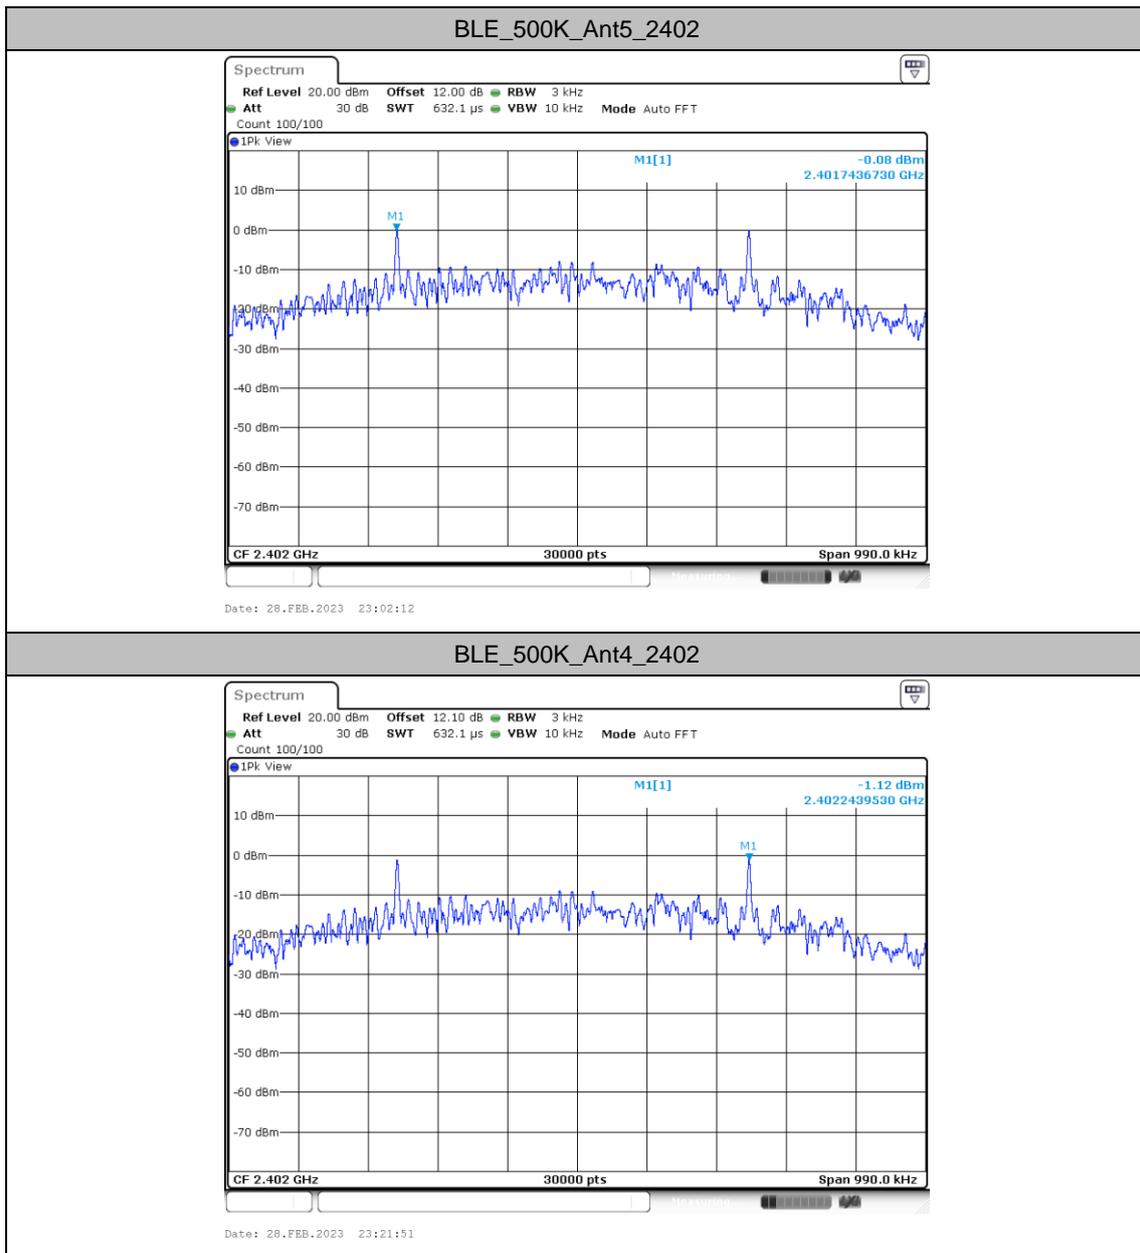

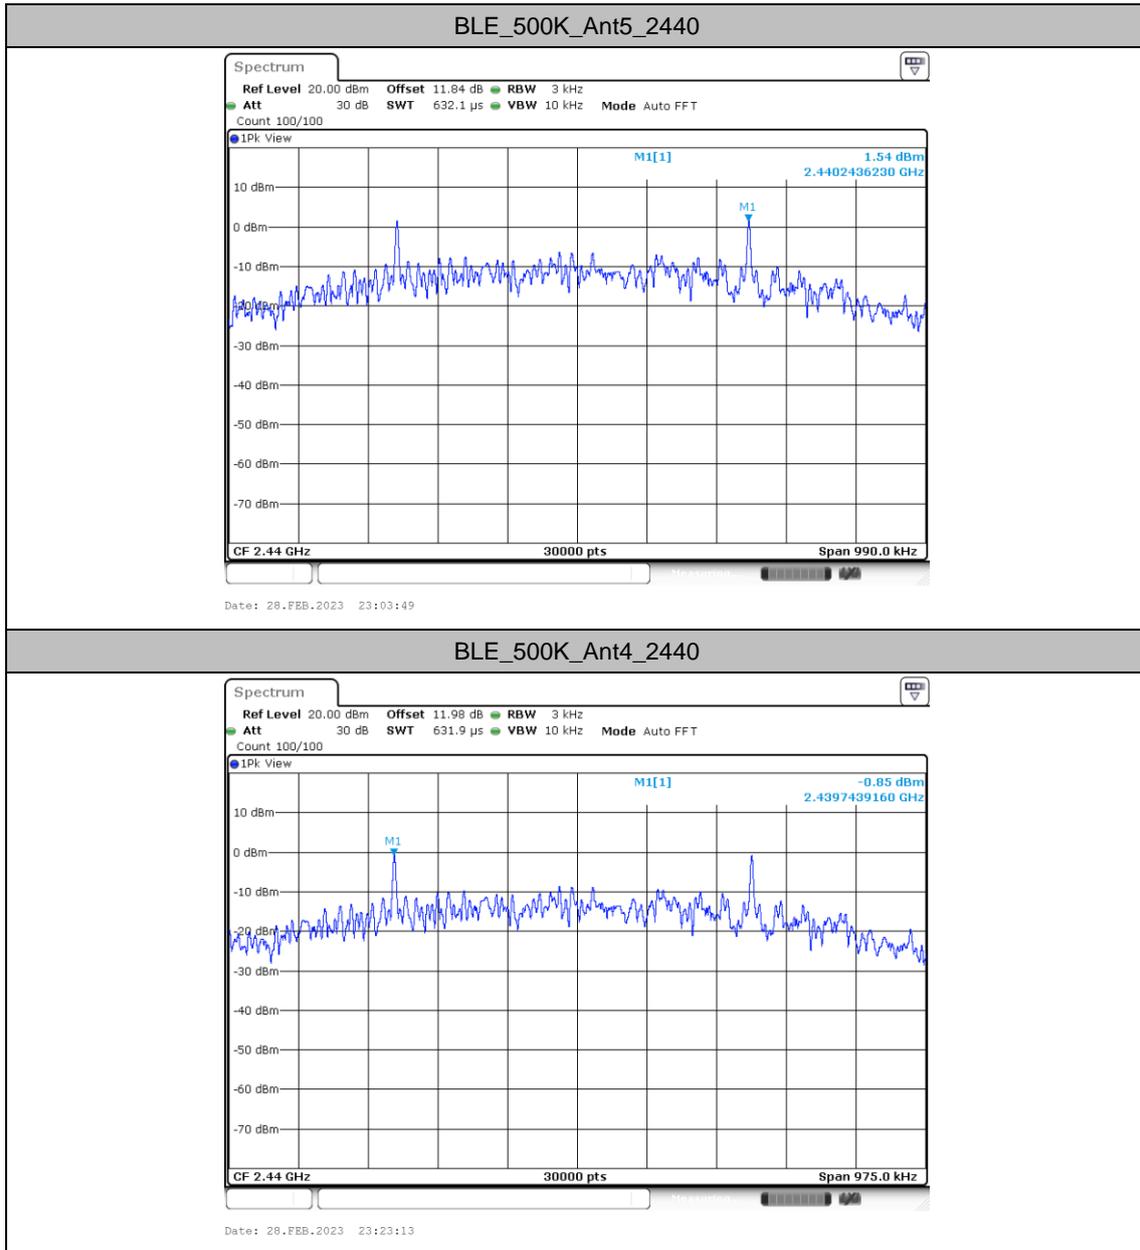




BLE_500K_Ant5_2480

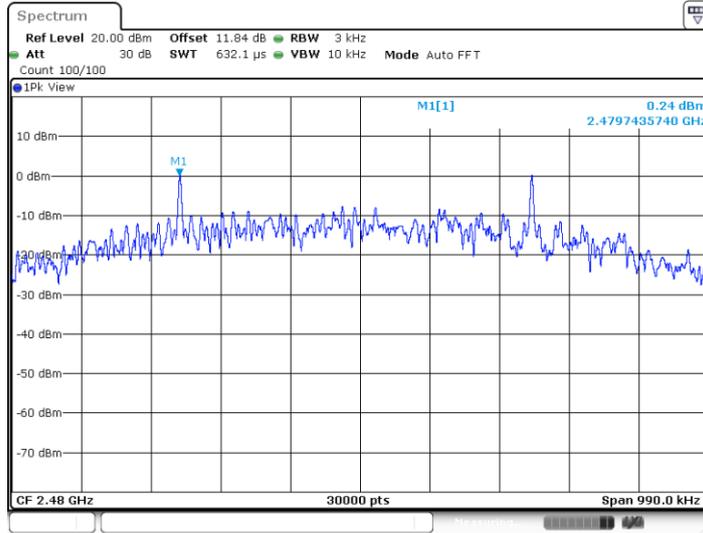

BLE_500K_Ant4_2480

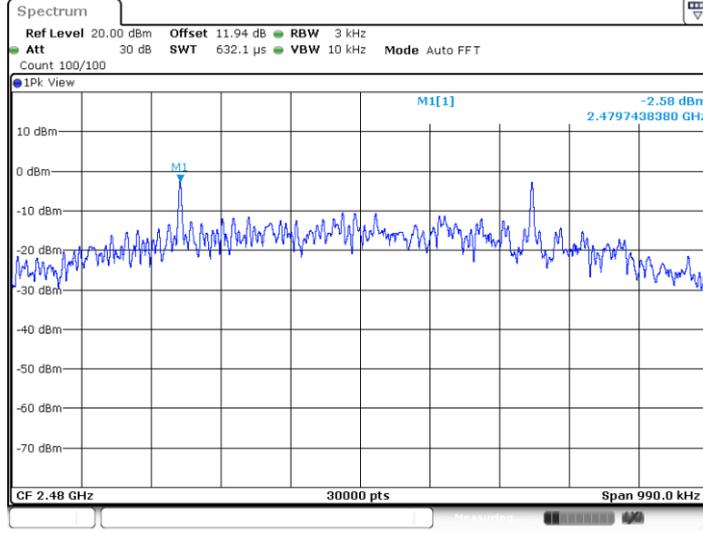





Reference level measurement

Test Result

TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm/100KHz]
BLE_1M	Ant5	2402	2401.99	6.23
	Ant4	2402	2401.99	4.74
	Ant5	2440	2439.99	7.46
	Ant4	2440	2439.99	5.22
	Ant5	2480	2479.99	6.11
	Ant4	2480	2479.99	3.19
BLE_2M	Ant5	2402	2401.99	6.04
	Ant4	2402	2401.99	4.77
	Ant5	2440	2439.99	7.52
	Ant4	2440	2440.00	5.26
	Ant5	2480	2479.99	6.15
	Ant4	2480	2479.99	3.27
BLE_125K	Ant5	2402	2402.00	5.91
	Ant4	2402	2402.00	4.85
	Ant5	2440	2440.00	7.08
	Ant4	2440	2440.00	5.23
	Ant5	2480	2480.00	5.93
	Ant4	2480	2480.00	3.19
BLE_500K	Ant5	2402	2401.74	6.33
	Ant4	2402	2401.75	5.30
	Ant5	2440	2439.75	7.82
	Ant4	2440	2439.74	5.54
	Ant5	2480	2479.74	6.51
	Ant4	2480	2479.74	3.78




Test Graphs

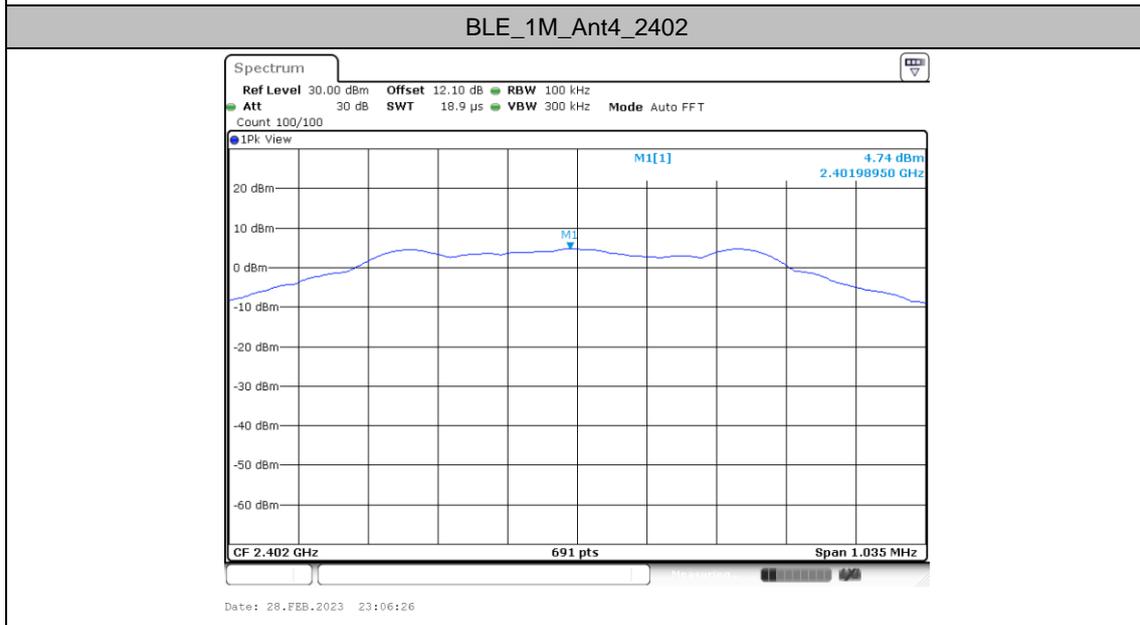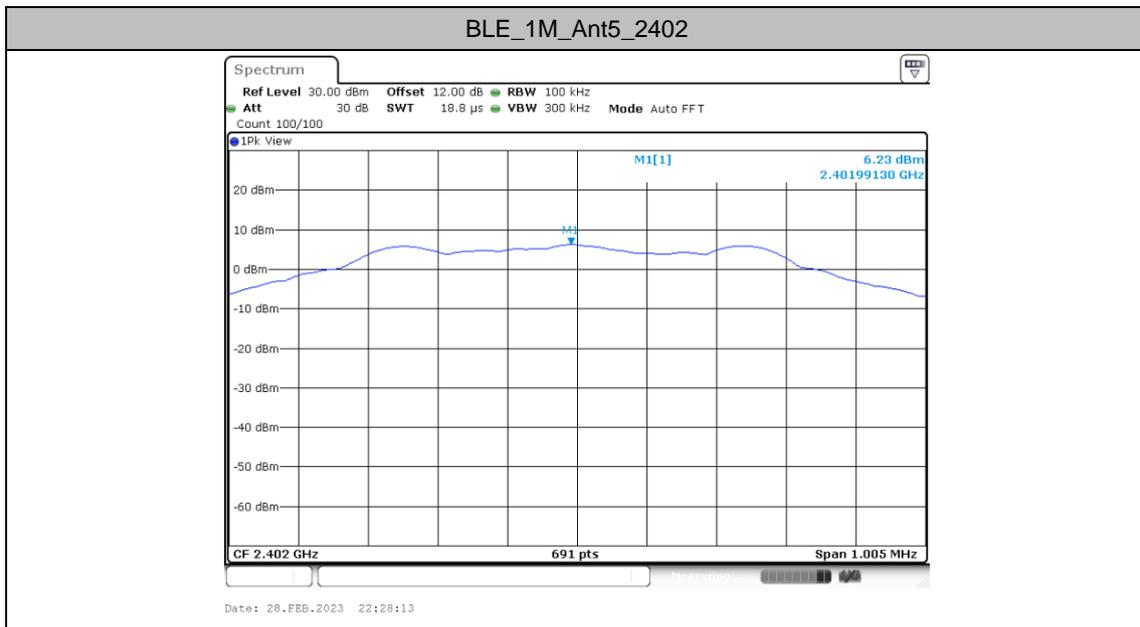




BLE_1M_Ant5_2440

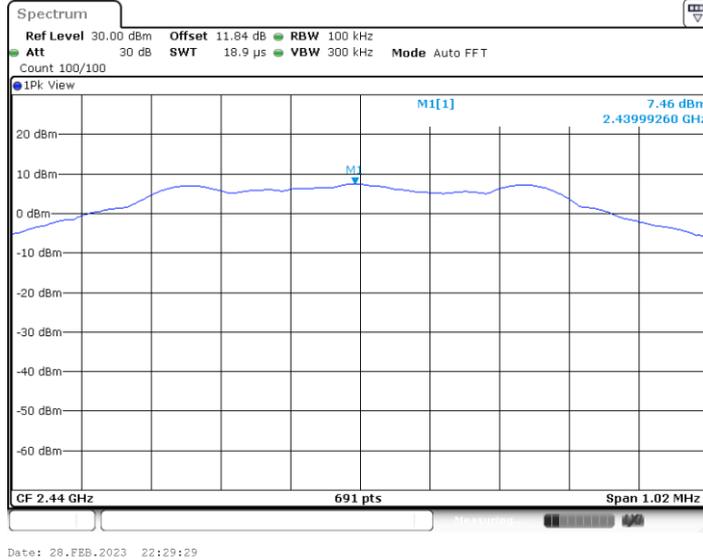


BLE_1M_Ant4_2440

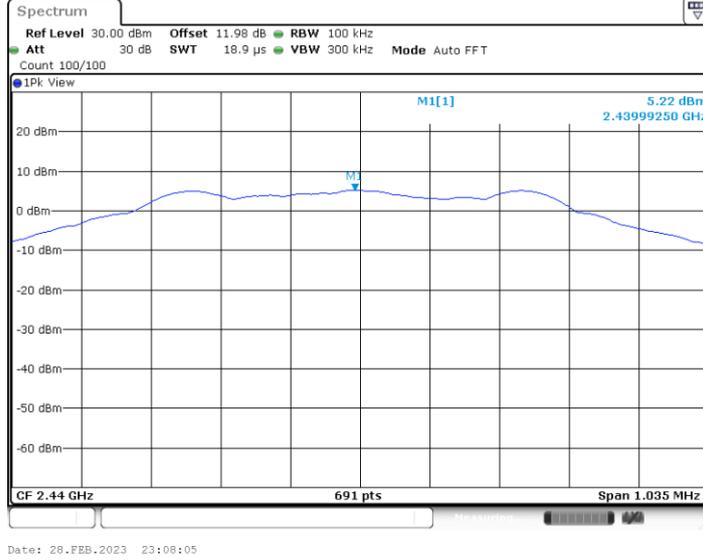




BLE_1M_Ant5_2480

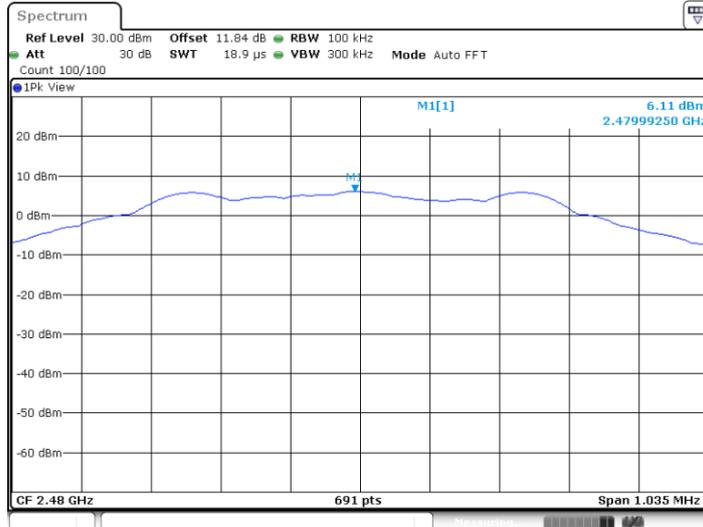

Date: 28.FEB.2023 22:30:33


BLE_1M_Ant4_2480

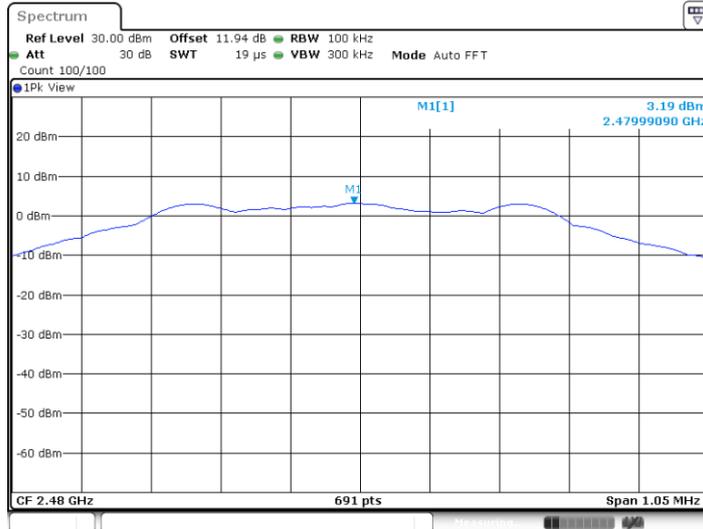

Date: 28.FEB.2023 23:09:31




BLE_2M_Ant5_2402

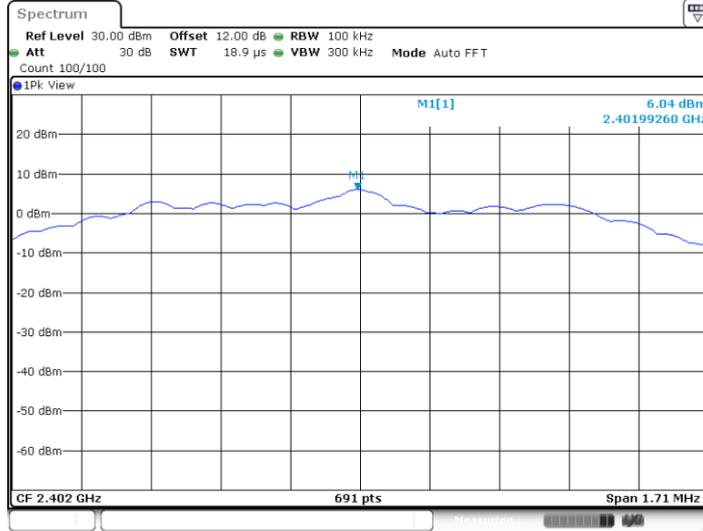

Date: 28.FEB.2023 22:33:09


BLE_2M_Ant4_2402

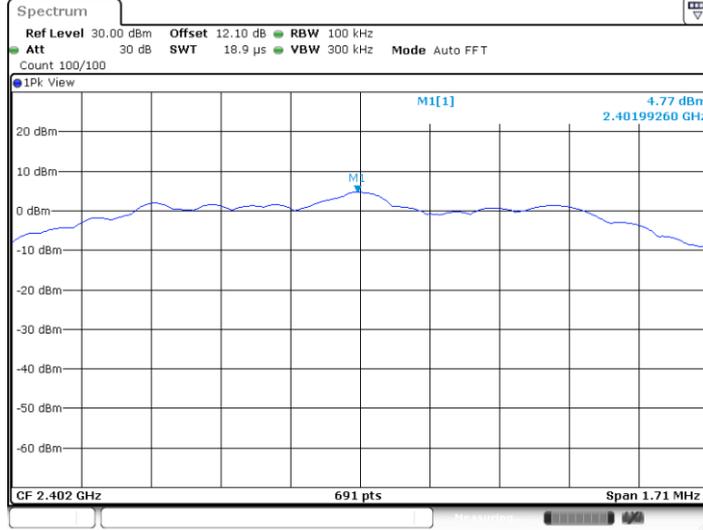


Date: 28.FEB.2023 23:12:52




BLE_2M_Ant5_2440

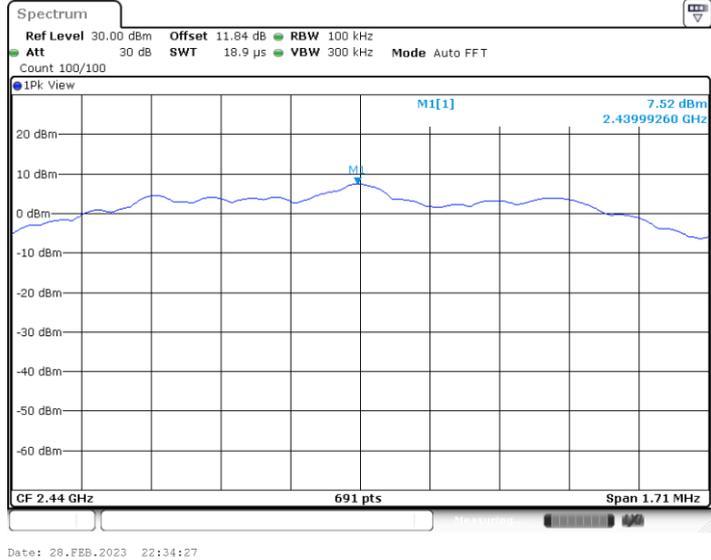


BLE_2M_Ant4_2440

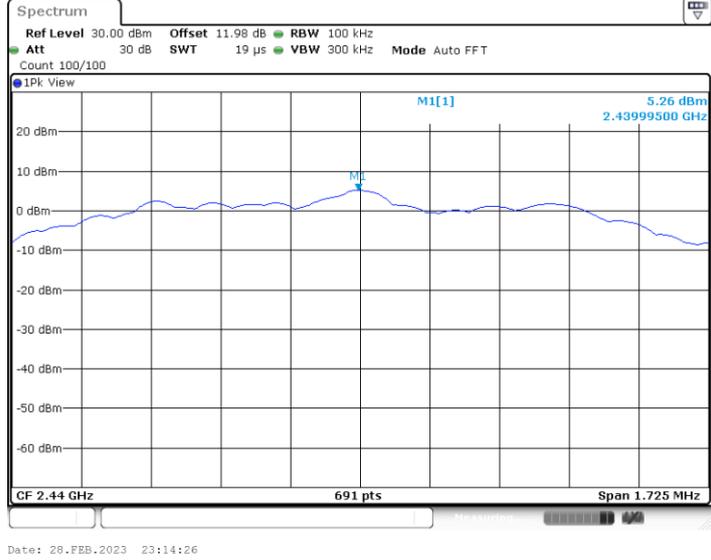

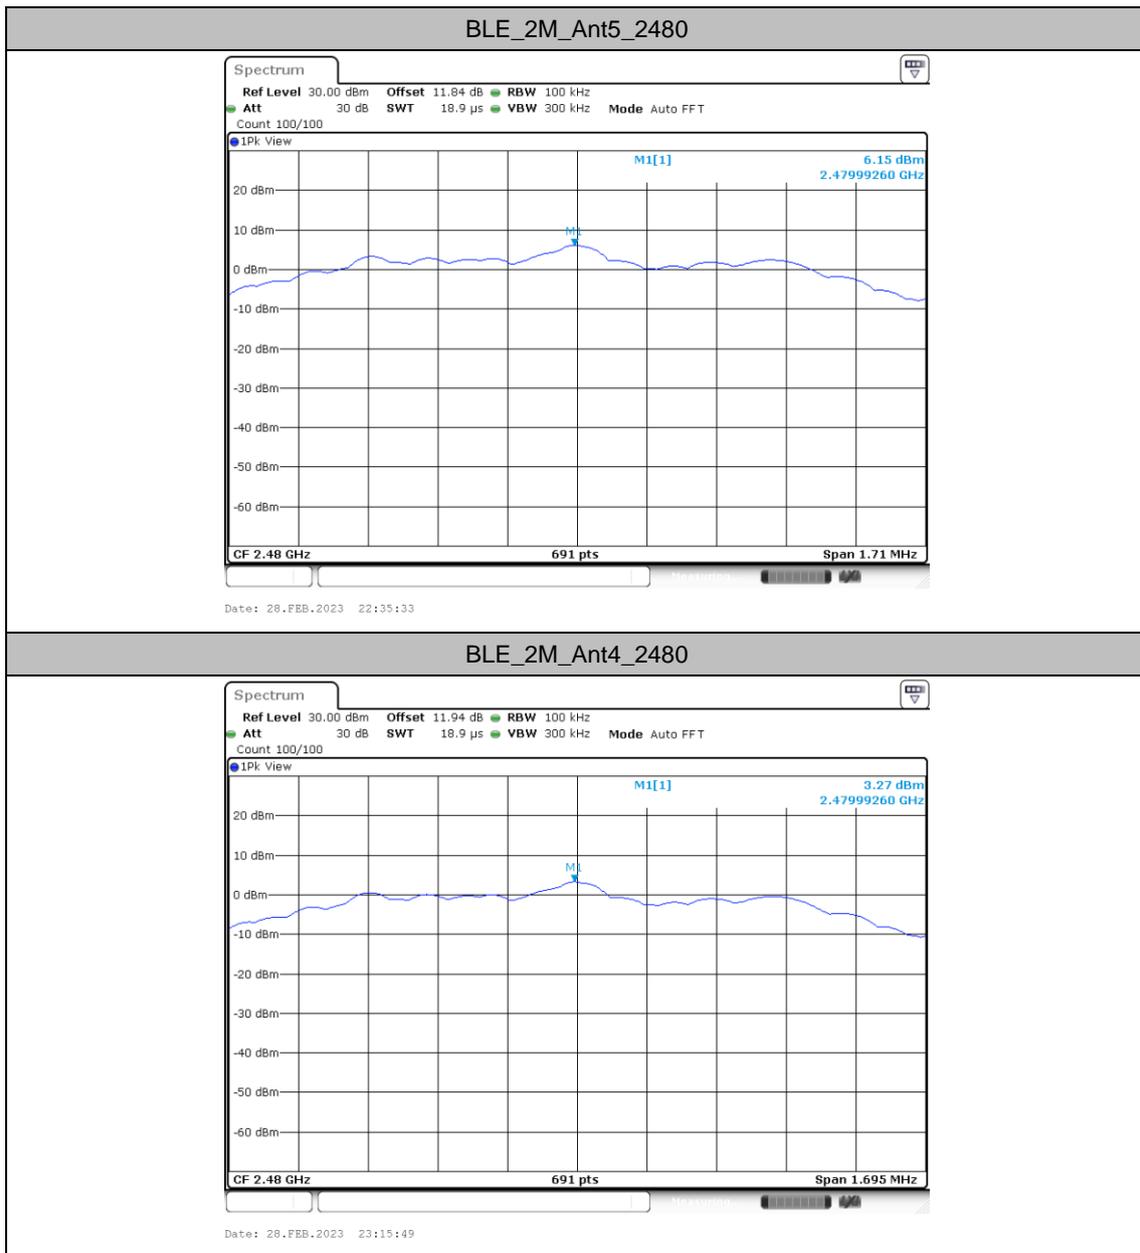




BLE_125K_Ant5_2402

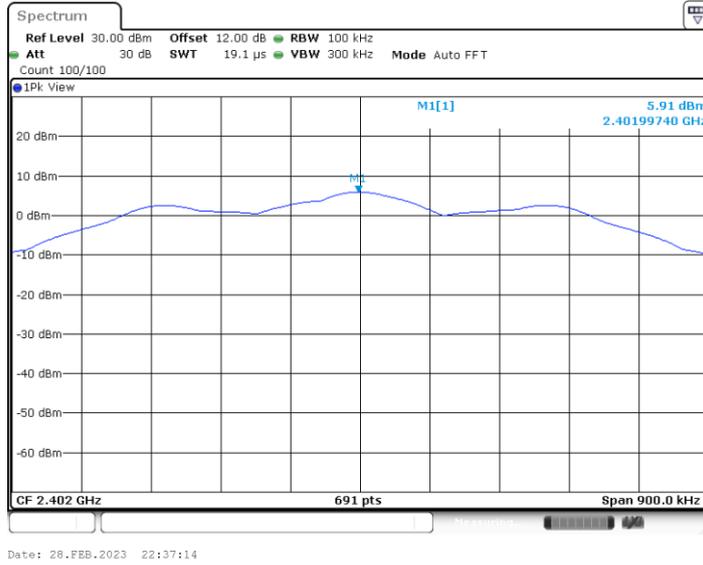


BLE_125K_Ant4_2402

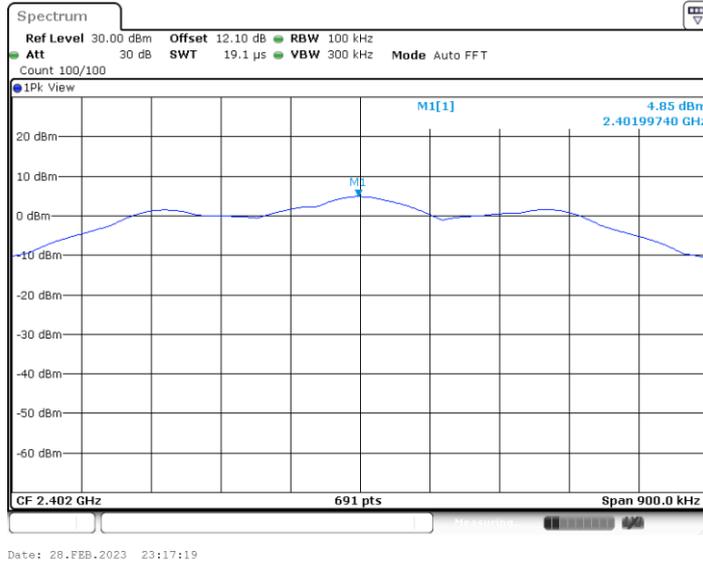




BLE_125K_Ant5_2440

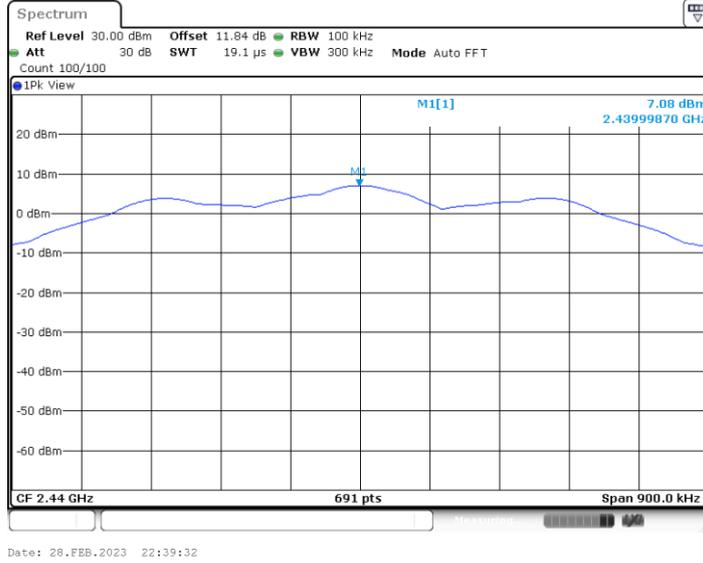


BLE_125K_Ant4_2440

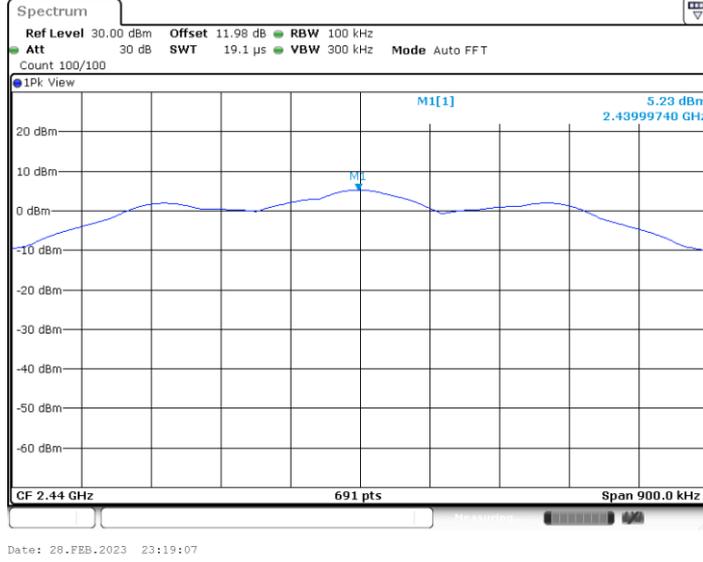



BLE_125K_Ant5_2480

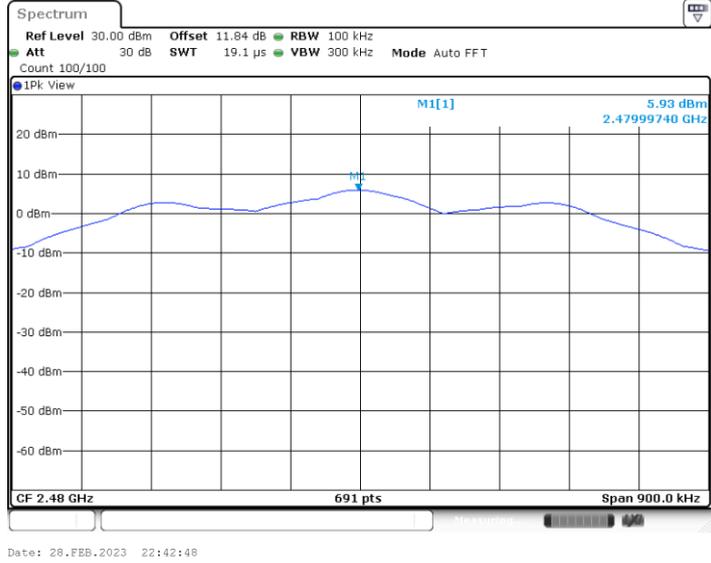

BLE_125K_Ant4_2480

