

Plots of System Verification

Appendix A. Plots of System Verification

The plots for system verification are shown as follows.

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/08

P01 System Check_H2450_220308

DUT: Dipole 2450 MHz; Type: D2450V2; SN: 737

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: H19T27N1_0308 Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.883$ S/m; $\epsilon_r = 38.286$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.34, 7.34, 7.34) @ 2450 MHz; Calibrated: 2021/06/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA001BB; Serial: 1206
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.40 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.36 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 5.52 W/kg

SAR(1 g) = 2.59 W/kg; SAR(10 g) = 1.23 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 4.46 W/kg

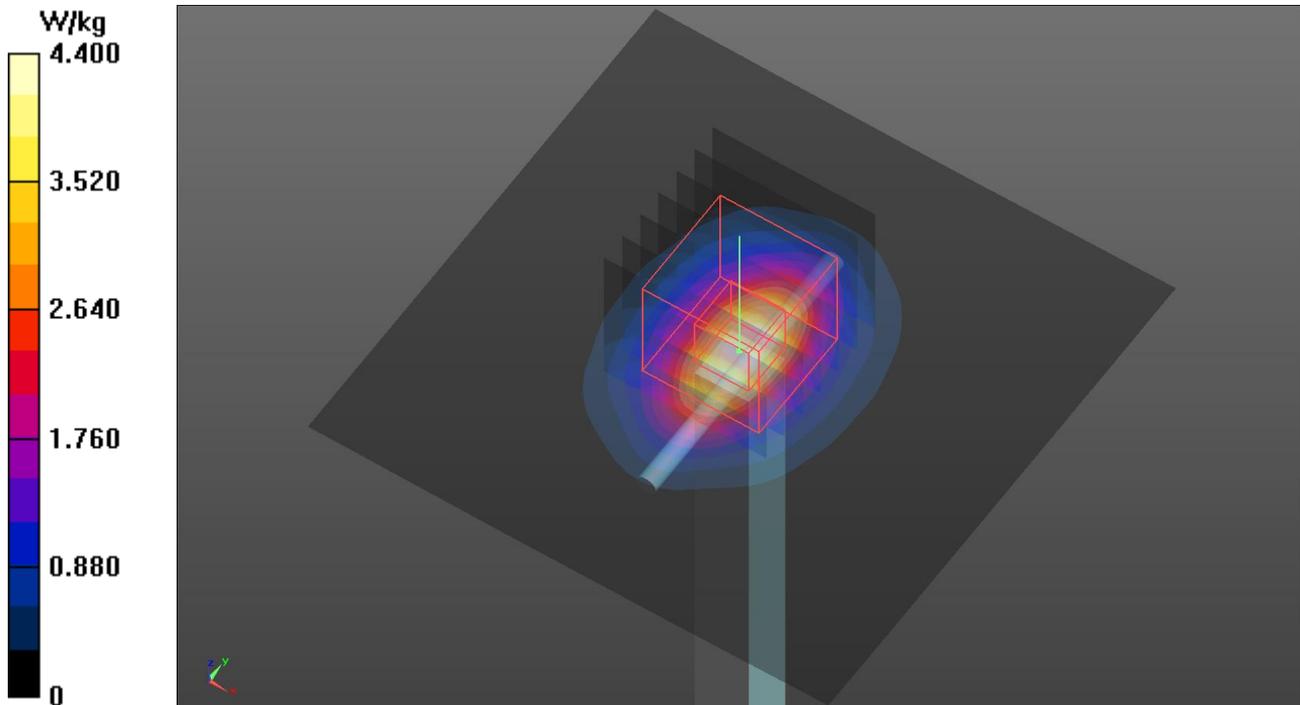

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/09

S02 System Check_H5250_220309

DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: H34T60N1_0309 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.607$ S/m; $\epsilon_r = 34.846$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(5.39, 5.39, 5.39) @ 5250 MHz; Calibrated: 2021/06/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA001BB; Serial: 1206
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.40 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 47.59 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 14.6 W/kg

SAR(1 g) = 3.66 W/kg; SAR(10 g) = 1.06 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 9.16 W/kg

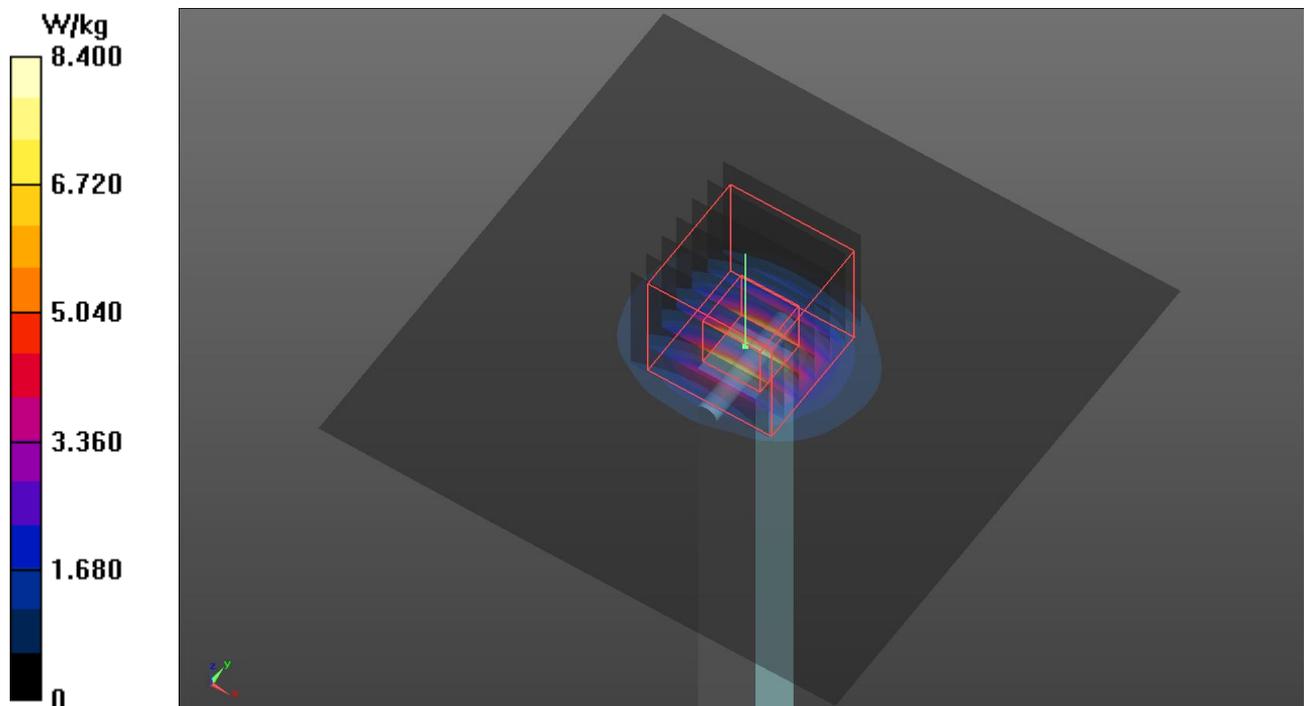

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/09

P03 System Check_H5600_220309

DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: H34T60N1_0309 Medium parameters used: $f = 5600$ MHz; $\sigma = 4.998$ S/m; $\epsilon_r = 34.41$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(5, 5, 5) @ 5600 MHz; Calibrated: 2021/06/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA001BB; Serial: 1206
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 9.16 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 47.47 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 3.84 W/kg; SAR(10 g) = 1.09 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 10.1 W/kg

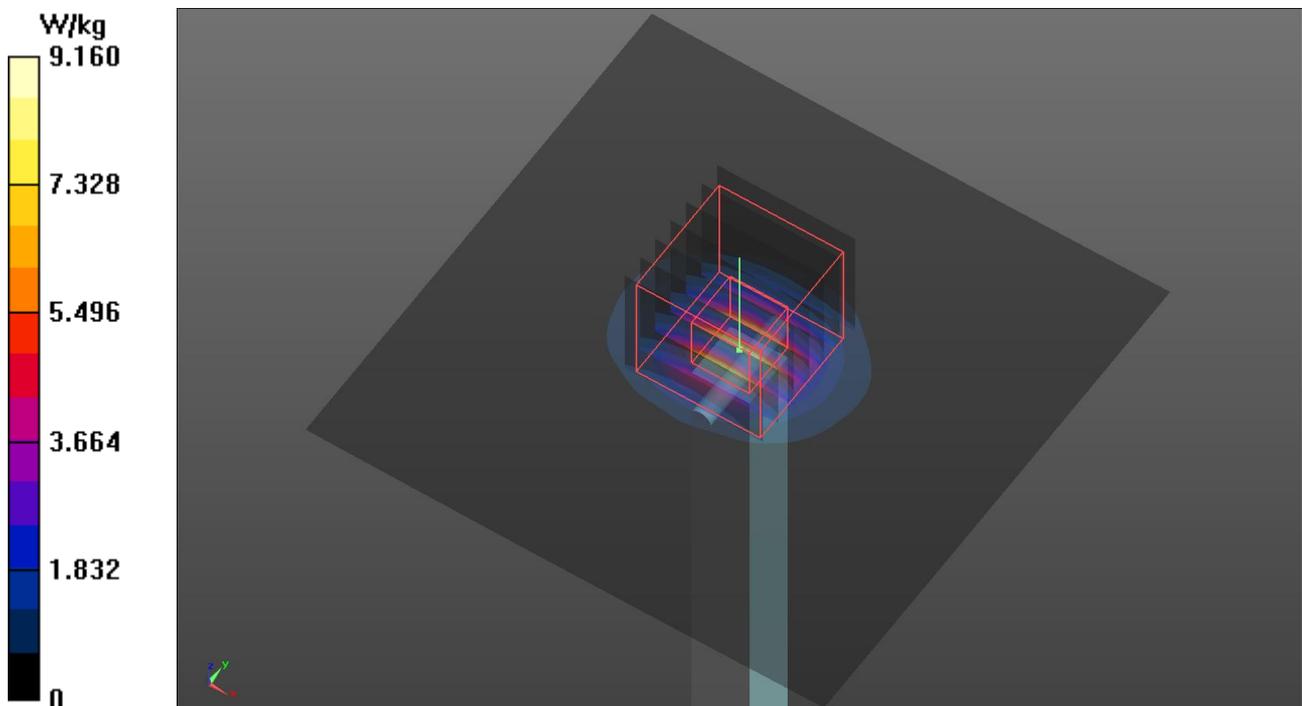

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/08

P04 System Check_H5750_220308

DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: H34T60N1_0308 Medium parameters used: $f = 5750$ MHz; $\sigma = 5.33$ S/m; $\epsilon_r = 35.546$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(5.05, 5.05, 5.05) @ 5750 MHz; Calibrated: 2021/06/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA001BB; Serial: 1206
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 9.13 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 45.79 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 3.77 W/kg; SAR(10 g) = 1.08 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 9.82 W/kg

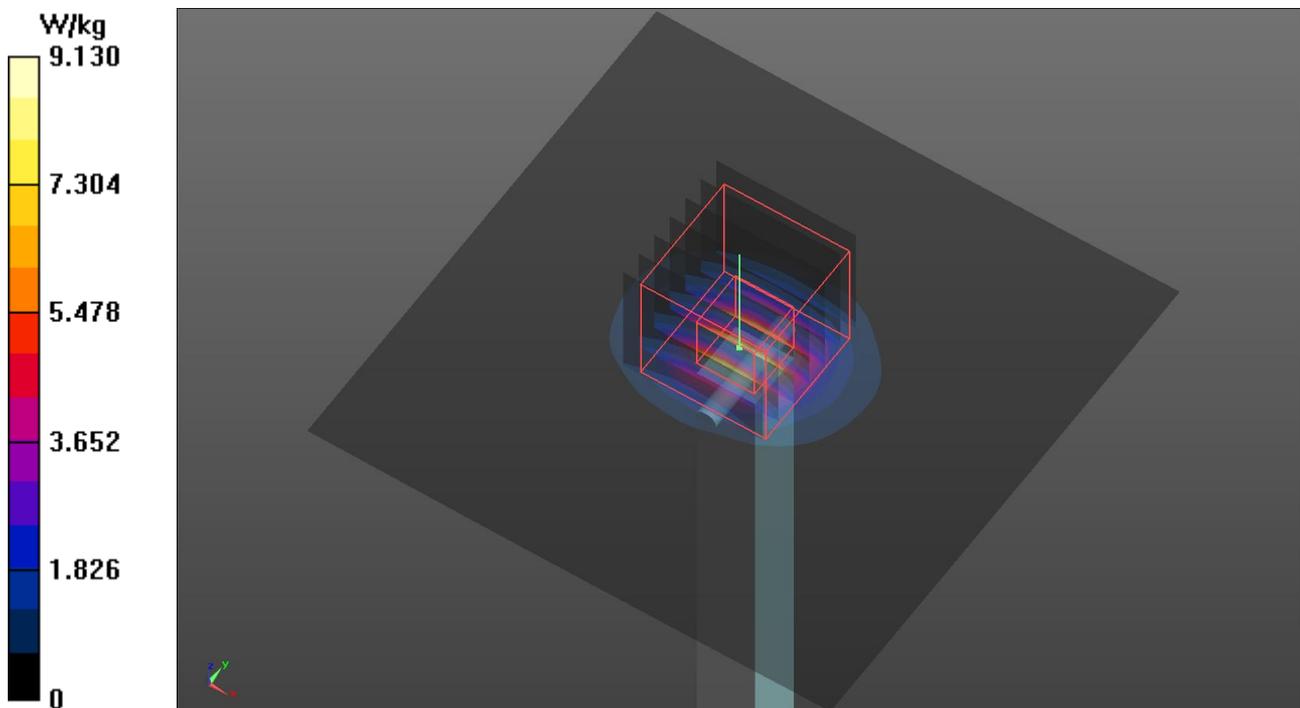

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/08

P05 System Check_H2450_220308

DUT: Dipole 2450 MHz; Type: D2450V2; SN: 737

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: H19T27N1_0308 Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.883$ S/m; $\epsilon_r = 38.286$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.34, 7.34, 7.34) @ 2450 MHz; Calibrated: 2021/06/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA001BB; Serial: 1206
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.40 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.36 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 5.52 W/kg

SAR(1 g) = 2.59 W/kg; SAR(10 g) = 1.23 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 4.46 W/kg

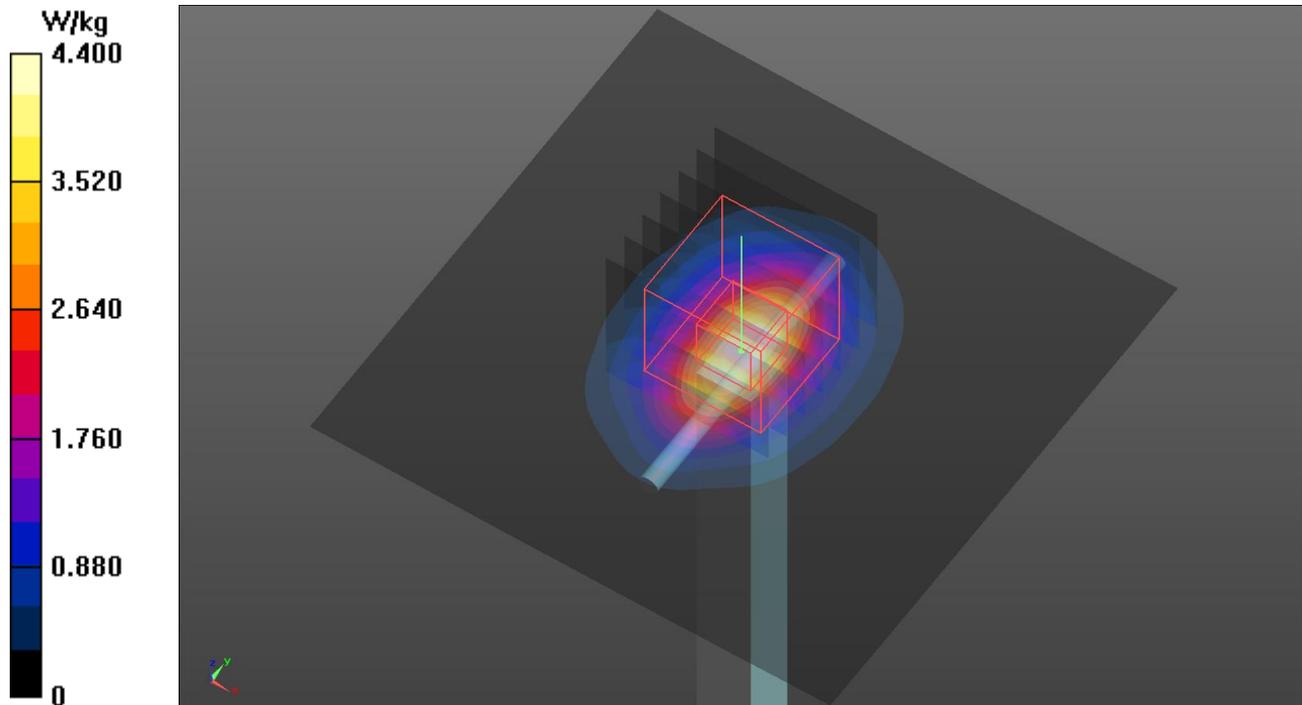

Plots of System Verification

Measurement Report S07 System Check_H5800_230411 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,			5800	4.9	5.30	35.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2186	H51T72N8, 2023-Apr-11	EX3DV4 - SN7736, 2022-11-15	DAE4 Sn1757, 2022-11-07

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-04-11	2023-04-11
psSAR1g [W/kg]	3.45	3.89
psSAR10g [W/kg]	1.07	1.11
Power Drift [dB]	-0.01	0.00

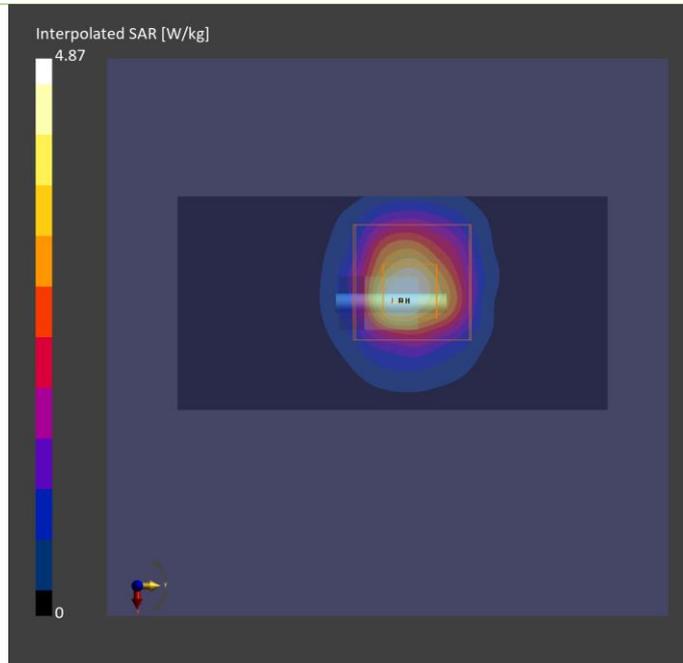

Plots of System Verification

Measurement Report for Device S06 System Check_H6.5GHz_220311 Device under Test Properties

Name, Manufacturer	Dimensions [mm]	IMEI	DUT Type
, Device	50.0 x 10.0 x 8.0		6500

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL			CW	6500.0,	5.65	6.21	33.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H50T72N1, 2022-Mar-11	EX3DV4 - SN7472, 2021-06-03	DAE4 Sn1698, 2021-11-09

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	7.5 x 7.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-03-11	2022-03-11
psSAR1g [W/Kg]	25.0	28.6
psSAR10g [W/Kg]	4.93	5.29
Power Drift [dB]	-0.11	-0.01

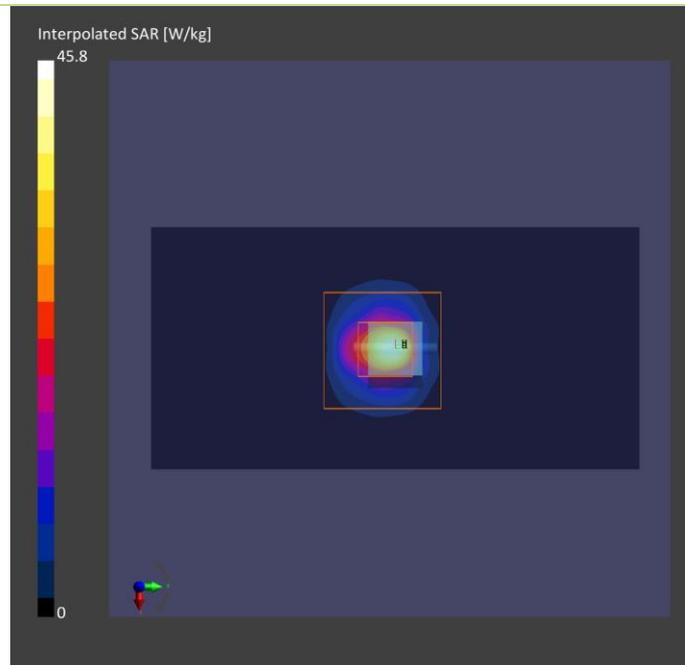

Plots of System Verification

Test Lab: Bureau Veritas ADT SAR/HAC/PD Testing Lab

Power Density Plot No.:

S06 PD Horn_5G Verification Source 10 GHz_220311

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	IMEI	DUT Type
SPEAG, 5G Verification Source 10 GHz	100.0 x 100.0 x 170.0	SN: 1025	

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5GAir	FRONT 5.55	Validation band	CW	10000.0	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air---	EUmWV4 - SN9438_F1-55GHz, 2021-07-26	DAE4 Sn1698, 2021-11-09

Scan Setup

	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	5.55

Measurement Results

	5G Scan
Date	2022-03-11
Avg. Area [cm ²]	4.00
pStotavg [W/m ²]	49.2
pSnavg [W/m ²]	49.1
E _{peak} [V/m]	142
Power Drift [dB]	-0.01

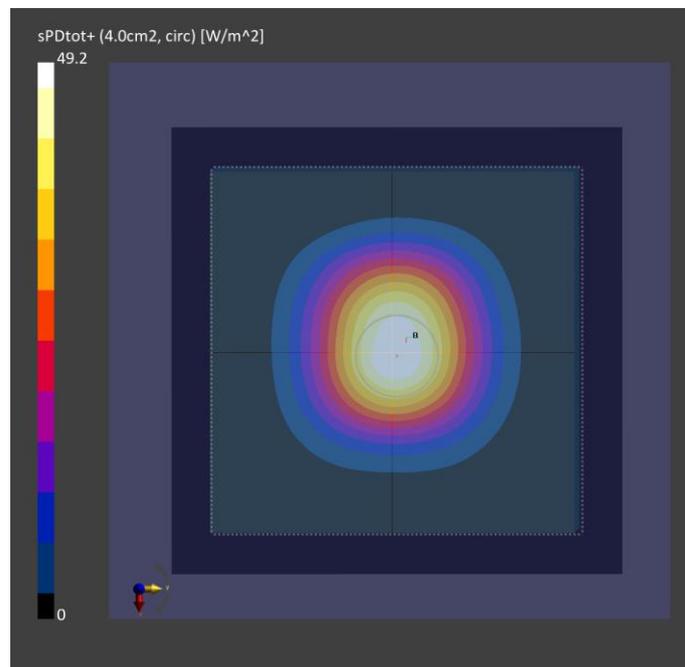

Appendix B. Plots of Measurement

The SAR plots for highest measured SAR in each exposure configuration, wireless mode and frequency band combination are shown as follows.

Plots of Measurement

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/08

P01 WLAN2.4G_802.11b_Bottom_0mm_Ch6_Ant 1

DUT: BFLF-WTW-P23010054

Communication System: UID 10012 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Frequency: 2437 MHz; Duty Cycle: 1:1.07

Medium: H19T27N1_0308 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.873$ S/m; $\epsilon_r = 38.363$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.34, 7.34, 7.34) @ 2437 MHz; Calibrated: 2021/06/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA001BB; Serial: 1206
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x291x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 2.02 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 32.98 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 2.35 W/kg

SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.532 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 52.5%

Maximum value of SAR (measured) = 1.85 W/kg

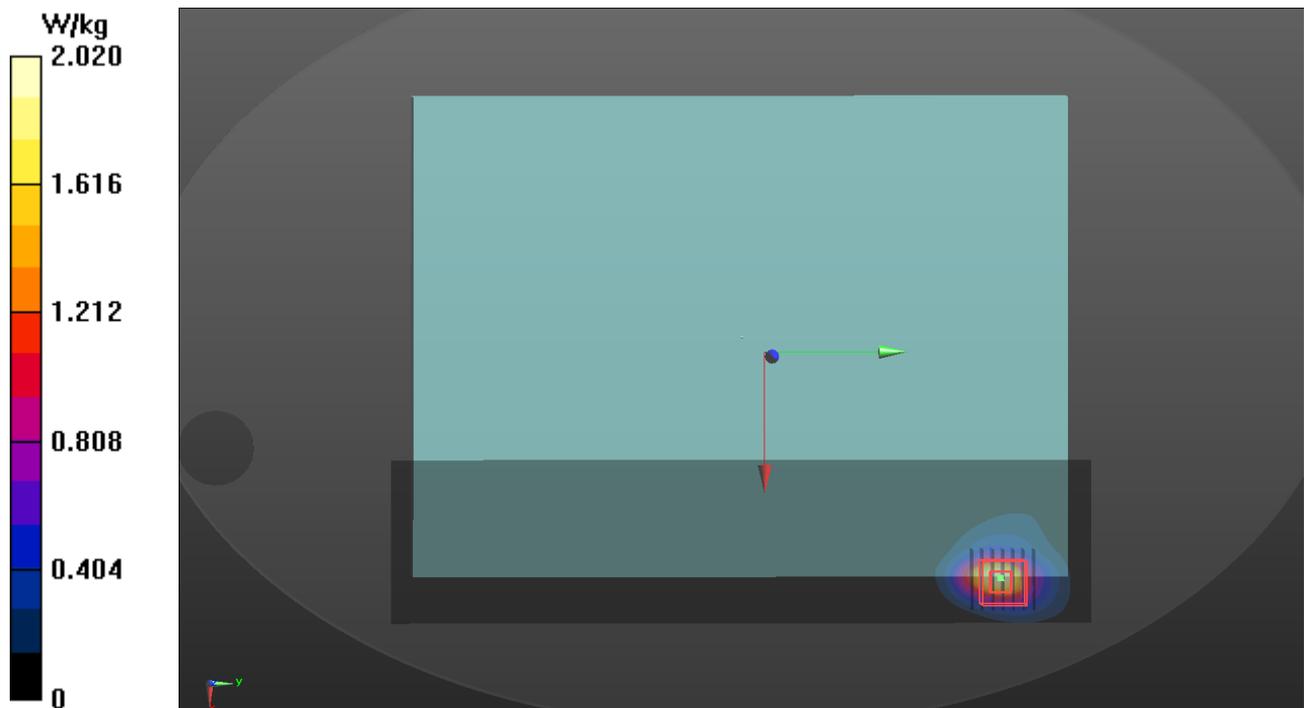

Plots of Measurement

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/09

P02 WLAN5.3G_802.11ac VHT160_Bottom_0mm_Ch50_Ant 1

DUT: BFLF-WTW-P23010054

Communication System: UID 10554 - AAD, IEEE 802.11ac WiFi (160MHz, MCS0); Frequency: 5250 MHz; Duty Cycle: 1:1.02

Medium: H34T60N1_0309 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.607$ S/m; $\epsilon_r = 34.846$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(5.39, 5.39, 5.39) @ 5250 MHz; Calibrated: 2021/06/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA001BB; Serial: 1206
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x341x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.78 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 19.85 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 3.55 W/kg

SAR(1 g) = 0.901 W/kg; SAR(10 g) = 0.209 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 66.6%

Maximum value of SAR (measured) = 2.23 W/kg

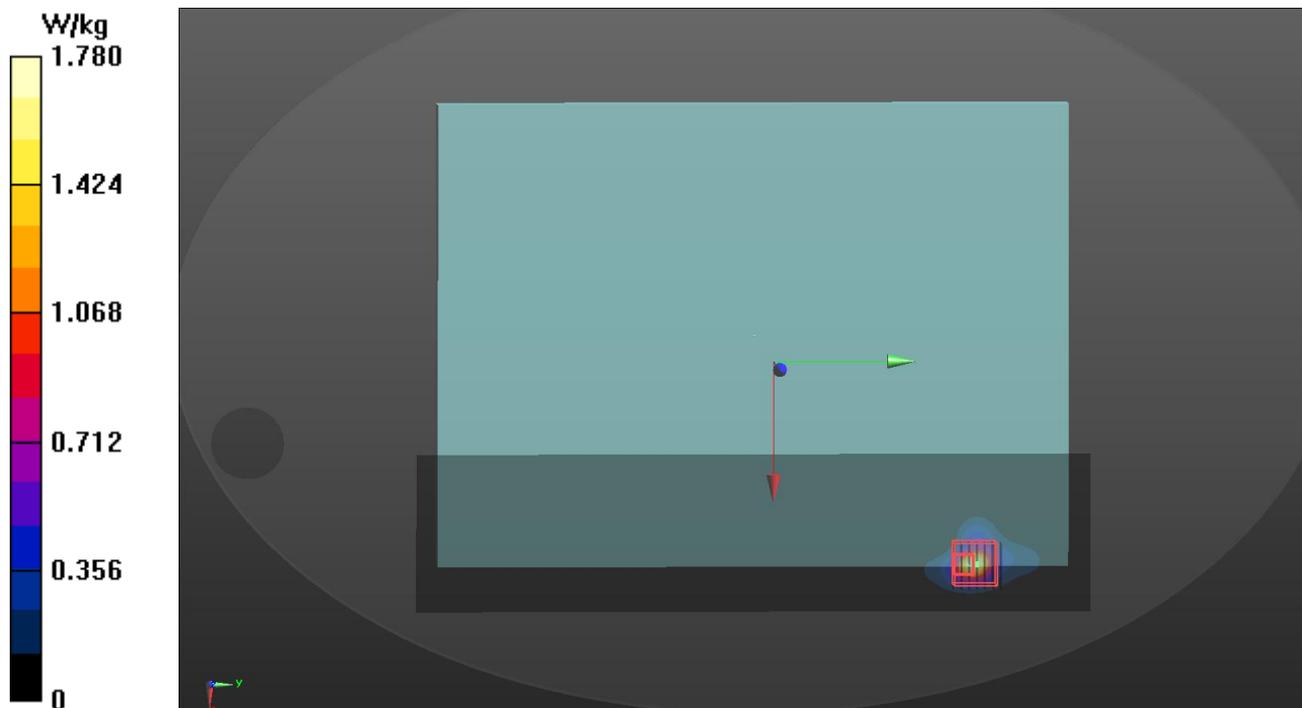

Plots of Measurement

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/09

P03 WLAN5.6G_802.11ac VHT160_Bottom_0mm_Ch114_Ant 0+1

DUT: BFLF-WTW-P23010054

Communication System: UID 10554 - AAD, IEEE 802.11ac WiFi (160MHz, MCS0); Frequency: 5570 MHz; Duty Cycle: 1:1.02

Medium: H34T60N1_0309 Medium parameters used: $f = 5570$ MHz; $\sigma = 4.899$ S/m; $\epsilon_r = 34.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(5, 5, 5) @ 5570 MHz; Calibrated: 2021/06/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA001BB; Serial: 1206
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x341x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.30 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 21.25 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 3.93 W/kg

SAR(1 g) = 0.863 W/kg; SAR(10 g) = 0.222 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 63.3%

Maximum value of SAR (measured) = 2.37 W/kg

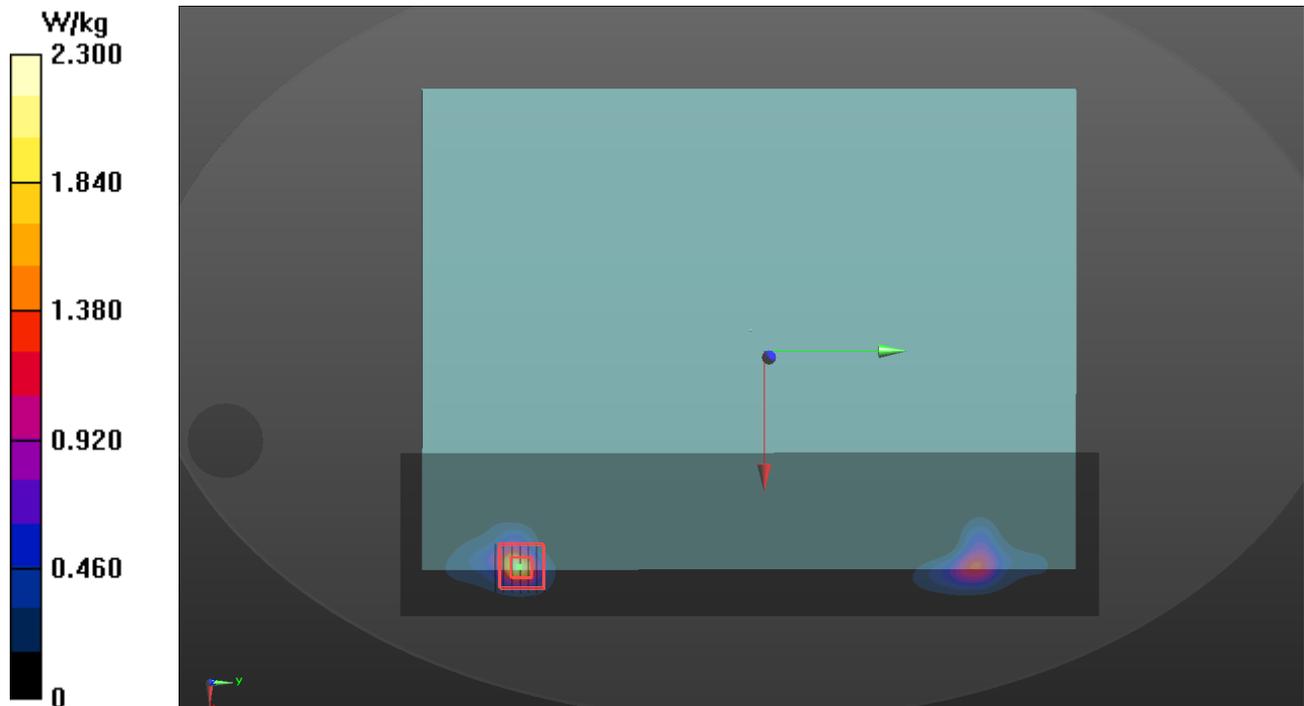

Plots of Measurement

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/08

P04 WLAN5.8G_802.11ac VHT80_Bottom_0mm_Ch155_Ant 1

DUT: BFLF-WTW-P23010054

Communication System: UID 10544 - AAC, IEEE 802.11ac WiFi (80MHz, MCS0); Frequency: 5775 MHz; Duty Cycle: 1:1.03

Medium: H34T60N1_0308 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.309$ S/m; $\epsilon_r = 35.467$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(5.05, 5.05, 5.05) @ 5775 MHz; Calibrated: 2021/06/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA001BB; Serial: 1206
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x341x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.19 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 20.57 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 4.10 W/kg

SAR(1 g) = 0.871 W/kg; SAR(10 g) = 0.221 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 61.8%

Maximum value of SAR (measured) = 2.29 W/kg

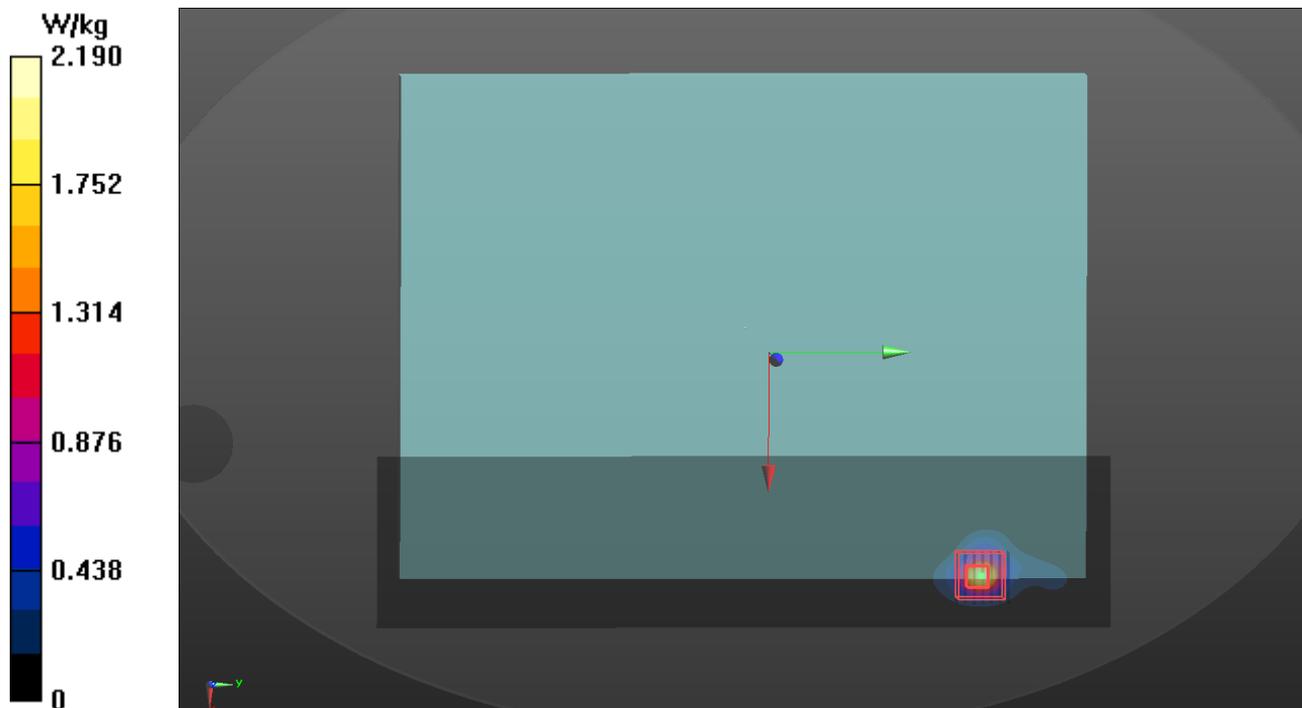

Plots of Measurement

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2022/03/08

P05 BT_BDR_Bottom_0mm_Ch78_Ant 1

DUT: BFLF-WTW-P23010054

Communication System: UID 10032 - CAA, IEEE 802.15.1 Bluetooth (GFSK, DH5); Frequency: 2480 MHz; Duty Cycle: 1:1.3

Medium: H19T27N1_0308 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.914$ S/m; $\epsilon_r = 38.11$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.34, 7.34, 7.34) @ 2480 MHz; Calibrated: 2021/06/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA001BB; Serial: 1206
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x291x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.536 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 15.45 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.541 W/kg

SAR(1 g) = 0.266 W/kg; SAR(10 g) = 0.126 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 53%

Maximum value of SAR (measured) = 0.439 W/kg

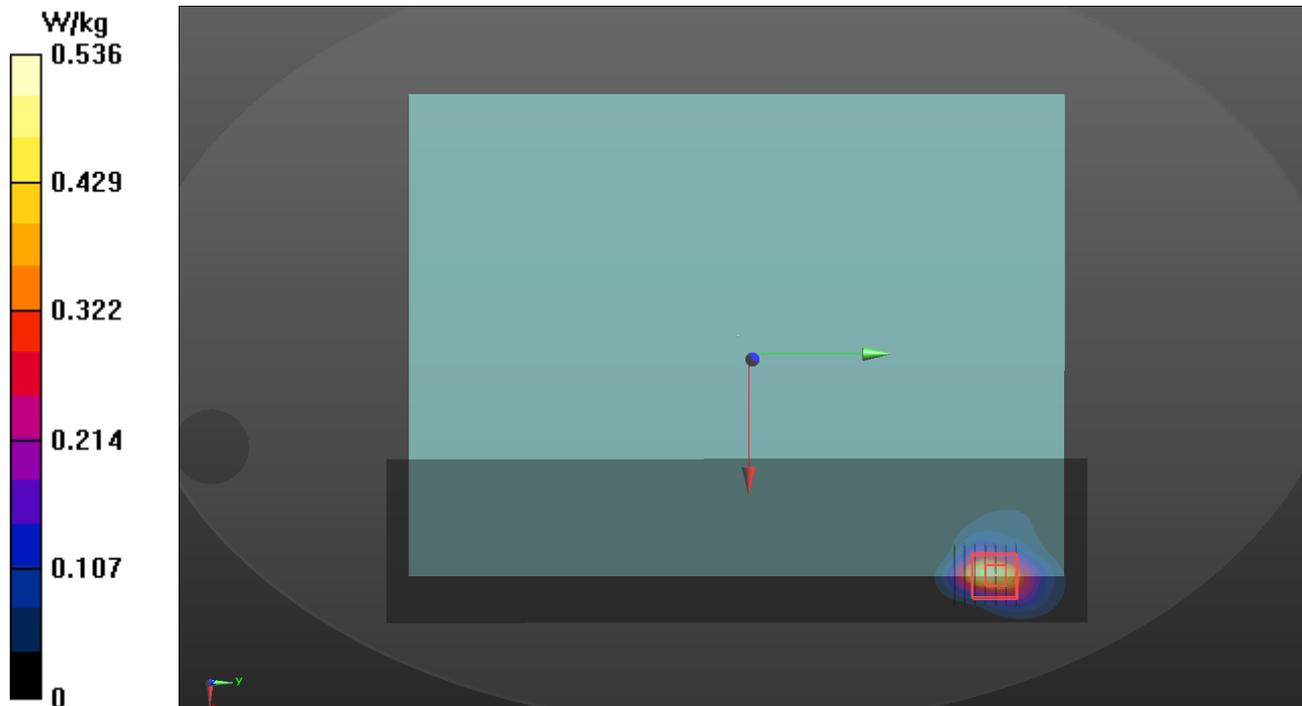

Plots of Measurement

Measurement Report

P07 WLAN5.9G_802.11ac VHT160_Bottom_0mm_Ch163_Ant 0+1

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BFLF-WTW-P23010054,	320.0 x 240.0 x 10.0		Laptop

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom, 0.00	U-NII-4	WLAN, 10554-AAD	5815.0, 163	4.9	5.32	35.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2186	H51T72N8, 2023-Apr-11	EX3DV4 - SN7736, 2022-11-15	DAE4 Sn1757, 2022-11-07

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 360.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-04-11	2023-04-11
psSAR1g [W/kg]	1.16	1.09
psSAR10g [W/kg]	0.382	0.306
Power Drift [dB]	0.08	-0.02
M2/M1 [%]		61.7
Dist 3dB Peak [mm]		5.2

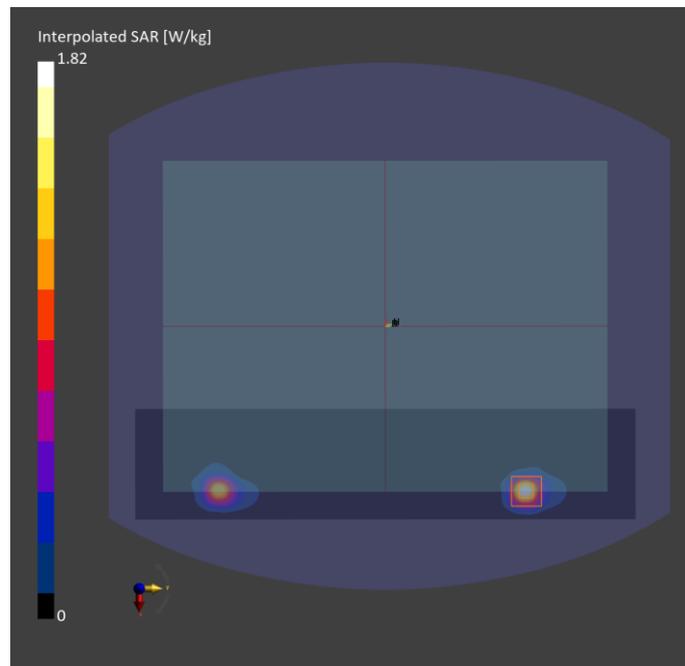

Plots of Measurement

Measurement Report for Device

P06 UNII-5_802.11ax HE160_Bottom_0mm_Ch15_Ant 0+1

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BFLF-WTW-P23010054	318.0 x 235.0 x 20.0		NB

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom 0.00	U-NII-5	WLAN, 10755-AAB	6025.0, 15	5.65	5.53	34.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1245	H50T72N1, 2022-Mar-11	EX3DV4 - SN7472, 2021-06-03	DAE4 Sn1698, 2021-11-09

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	75.0 x 315.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	7.5 x 7.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-03-11	2022-03-11
psSAR1g [W/Kg]	0.694	0.749
psSAR10g [W/Kg]	0.186	0.181
Power Drift [dB]	0.01	0.06

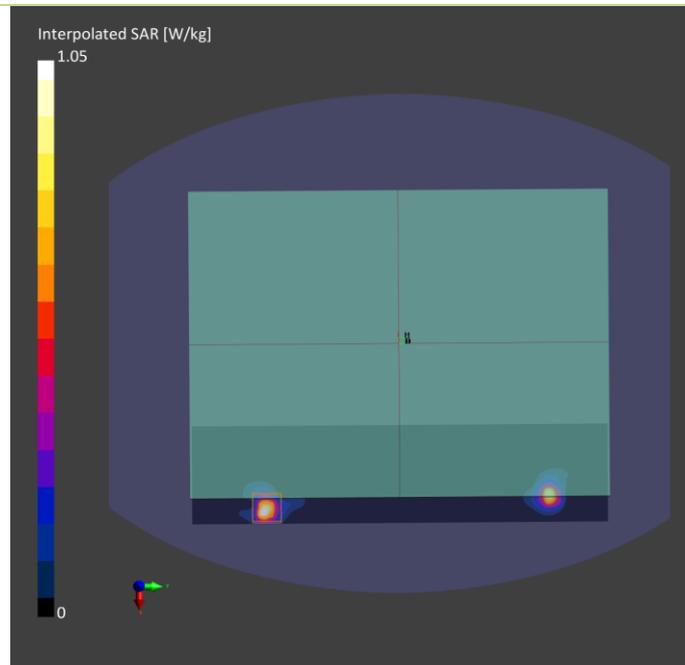

Plots of Measurement

Test Lab: Bureau Veritas ADT SAR/HAC/PD Testing Lab

Power Density Plot No.:

P06 UNII-5_802.11ax HE160_Bottom_0mm_Ch15_Ant 0+1

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BFLF-WTW-P23010054	318.0 x 235.0 x 20.0		NB

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5GAir	Bottom 2.00	U-NII-5	WLAN 10755	6025.0 15	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air---	EUmmWV4 - SN9438_F1-55GHz, 2021-07-26	DAE4 Sn1698, 2021-11-09

Scan Setup

	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	2.0

Measurement Results

	5G Scan
Date	2022-03-11
Avg. Area [cm ²]	4.00
pStotavg [W/m ²]	1.99
pSnavg [W/m ²]	1.86
E _{peak} [V/m]	47.9
Power Drift [dB]	0.03

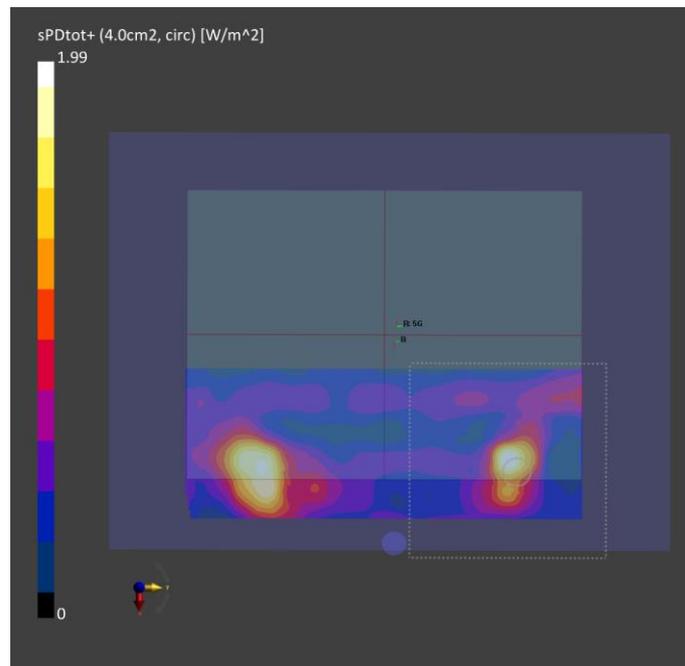

Appendix D. Maximum Target Conducted Power

The maximum conducted average power (Unit: dBm) including tune-up tolerance is shown as below.

WLAN Tune-up Power (Full)							
WLAN 2.4GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11b	1	2412	15.0	15.0	-	-	-
	6	2437	15.0	15.0	-	-	-
	11	2462	15.0	15.0	-	-	-
	12	2467	15.0	15.0	-	-	-
	13	2472	15.0	15.0	-	-	-
802.11g	1	2412	15.0	15.0	-	-	-
	6	2437	15.0	15.0	-	-	-
	11	2462	15.0	15.0	-	-	-
	12	2467	15.0	15.0	-	-	-
	13	2472	12.0	12.0	-	-	-
802.11n HT20	1	2412	15.0	15.0	15.0	15.0	18.0
	6	2437	15.0	15.0	15.0	15.0	18.0
	11	2462	15.0	15.0	15.0	15.0	18.0
	12	2467	15.0	15.0	11.5	11.5	14.5
	13	2472	12.0	12.0	8.5	8.5	11.5
802.11n HT40	3	2422	15.0	15.0	15.0	15.0	18.0
	6	2437	15.0	15.0	15.0	15.0	18.0
	9	2452	15.0	15.0	14.5	14.5	17.5
	10	2457	12.5	12.5	11.5	11.5	14.5
	11	2462	10.0	10.0	8.5	8.5	11.5
802.11ax HE20	1	2412	15.0	15.0	15.0	15.0	18.0
	6	2437	15.0	15.0	15.0	15.0	18.0
	11	2462	15.0	15.0	15.0	15.0	18.0
	12	2467	15.0	15.0	11.5	11.5	14.5
	13	2472	12.0	12.0	8.5	8.5	11.5
802.11ax HE40	3	2422	15.0	15.0	15.0	15.0	18.0
	6	2437	15.0	15.0	15.0	15.0	18.0
	9	2452	15.0	15.0	14.5	14.5	17.5
	10	2457	12.0	12.0	11.5	11.5	14.5
	11	2462	9.5	9.5	8.5	8.5	11.5

WLAN Tune-up Power (Full)				
Bluetooth				
Mode	Channel	Frequency		Ant 1 Max Tune-up
BR / EDR	0	2402		10.0
	39	2441		10.0
	78	2480		10.0
LE	0	2402		4.5
	19	2440		4.5
	39	2480		4.5

WLAN Tune-up Power (Full)							
WLAN 5.2GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	36	5180	10.0	10.0	-	-	-
	40	5200	10.0	10.0	-	-	-
	44	5220	10.0	10.0	-	-	-
	48	5240	10.0	10.0	-	-	-
802.11n HT20	36	5180	10.0	10.0	10.0	10.0	13.0
	40	5200	10.0	10.0	10.0	10.0	13.0
	44	5220	10.0	10.0	10.0	10.0	13.0
	48	5240	10.0	10.0	10.0	10.0	13.0
802.11n HT40	38	5190	10.0	10.0	10.0	10.0	13.0
	46	5230	10.0	10.0	10.0	10.0	13.0
802.11ac VHT80	42	5210	10.0	10.0	10.0	10.0	13.0
802.11ax HE20	36	5180	10.0	10.0	10.0	10.0	13.0
	40	5200	10.0	10.0	10.0	10.0	13.0
	44	5220	10.0	10.0	10.0	10.0	13.0
	48	5240	10.0	10.0	10.0	10.0	13.0
802.11ax HE40	38	5190	10.0	10.0	10.0	10.0	13.0
	46	5230	10.0	10.0	10.0	10.0	13.0
802.11ax HE80	42	5210	10.0	10.0	10.0	10.0	13.0

WLAN Tune-up Power (Full)							
WLAN 5.3GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	52	5260	10.0	10.0	-	-	-
	56	5280	10.0	10.0	-	-	-
	60	5300	10.0	10.0	-	-	-
	64	5320	10.0	10.0	-	-	-
802.11n HT20	52	5260	10.0	10.0	10.0	10.0	13.0
	56	5280	10.0	10.0	10.0	10.0	13.0
	60	5300	10.0	10.0	10.0	10.0	13.0
	64	5320	10.0	10.0	10.0	10.0	13.0
802.11n HT40	54	5270	10.0	10.0	10.0	10.0	13.0
	62	5310	10.0	10.0	10.0	10.0	13.0
802.11ac VHT80	58	5290	10.0	10.0	10.0	10.0	13.0
802.11ac VHT160	50	5250	10.0	10.0	10.0	10.0	13.0
802.11ax HE20	52	5260	10.0	10.0	10.0	10.0	13.0
	56	5280	10.0	10.0	10.0	10.0	13.0
	60	5300	10.0	10.0	10.0	10.0	13.0
	64	5320	10.0	10.0	10.0	10.0	13.0
802.11ax HE40	54	5270	10.0	10.0	10.0	10.0	13.0
	62	5310	10.0	10.0	10.0	10.0	13.0
802.11ax HE80	58	5290	10.0	10.0	10.0	10.0	13.0
802.11ax HE160	50	5250	10.0	10.0	10.0	10.0	13.0



WLAN Tune-up Power (Full)

WLAN 5.6GHz

Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	100	5500	11.0	11.0	-	-	-
	116	5580	11.0	11.0	-	-	-
	120	5600	11.0	11.0	-	-	-
	124	5620	11.0	11.0	-	-	-
	132	5660	11.0	11.0	-	-	-
	140	5700	11.0	11.0	-	-	-
802.11n HT20	100	5500	11.0	11.0	11.0	11.0	14.0
	116	5580	11.0	11.0	11.0	11.0	14.0
	120	5600	11.0	11.0	11.0	11.0	14.0
	124	5620	11.0	11.0	11.0	11.0	14.0
	132	5660	11.0	11.0	11.0	11.0	14.0
	140	5700	11.0	11.0	11.0	11.0	14.0
	144	5720	11.0	11.0	11.0	11.0	14.0
802.11n HT40	102	5510	11.0	11.0	11.0	11.0	14.0
	110	5550	11.0	11.0	11.0	11.0	14.0
	118	5590	11.0	11.0	11.0	11.0	14.0
	126	5630	11.0	11.0	11.0	11.0	14.0
	134	5670	11.0	11.0	11.0	11.0	14.0
	142	5710	11.0	11.0	11.0	11.0	14.0
802.11ac VHT80	106	5530	11.0	11.0	11.0	11.0	14.0
	122	5610	11.0	11.0	11.0	11.0	14.0
	138	5690	11.0	11.0	11.0	11.0	14.0
802.11ac VHT160	114	5570	11.0	11.0	11.0	11.0	14.0
802.11ax HE20	100	5500	11.0	11.0	11.0	11.0	14.0
	116	5580	11.0	11.0	11.0	11.0	14.0
	120	5600	11.0	11.0	11.0	11.0	14.0
	124	5620	11.0	11.0	11.0	11.0	14.0
	132	5660	11.0	11.0	11.0	11.0	14.0
	140	5700	11.0	11.0	11.0	11.0	14.0
	144	5720	11.0	11.0	11.0	11.0	14.0
802.11ax HE40	102	5510	11.0	11.0	11.0	11.0	14.0
	110	5550	11.0	11.0	11.0	11.0	14.0
	118	5590	11.0	11.0	11.0	11.0	14.0
	126	5630	11.0	11.0	11.0	11.0	14.0
	134	5670	11.0	11.0	11.0	11.0	14.0
	142	5710	11.0	11.0	11.0	11.0	14.0
802.11ax HE80	106	5530	11.0	11.0	11.0	11.0	14.0
	122	5610	11.0	11.0	11.0	11.0	14.0
	138	5690	11.0	11.0	11.0	11.0	14.0
802.11ax HE160	114	5570	11.0	11.0	11.0	11.0	14.0

WLAN Tune-up Power (Full)							
WLAN 5.8GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	149	5745	10.5	10.5	-	-	-
	153	5765	10.5	10.5	-	-	-
	157	5785	10.5	10.5	-	-	-
	161	5805	10.5	10.5	-	-	-
	165	5825	10.5	10.5	-	-	-
802.11n HT20	149	5745	10.5	10.5	10.5	10.5	13.5
	153	5765	10.5	10.5	10.5	10.5	13.5
	157	5785	10.5	10.5	10.5	10.5	13.5
	161	5805	10.5	10.5	10.5	10.5	13.5
	165	5825	10.5	10.5	10.5	10.5	13.5
802.11n HT40	151	5755	10.5	10.5	10.5	10.5	13.5
	159	5795	10.5	10.5	10.5	10.5	13.5
802.11ac VHT80	155	5775	10.5	10.5	10.5	10.5	13.5
802.11ax HE20	149	5745	10.5	10.5	10.5	10.5	13.5
	153	5765	10.5	10.5	10.5	10.5	13.5
	157	5785	10.5	10.5	10.5	10.5	13.5
	161	5805	10.5	10.5	10.5	10.5	13.5
	165	5825	10.5	10.5	10.5	10.5	13.5
802.11ax HE40	151	5755	10.5	10.5	10.5	10.5	13.5
	159	5795	10.5	10.5	10.5	10.5	13.5
802.11ax HE80	155	5775	10.5	10.5	10.5	10.5	13.5

WLAN Tune-up Power (Full)							
WLAN 5.9GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	169	5845	11.0	11.0	11.0	11.0	14.0
	173	5865	11.0	11.0	11.0	11.0	14.0
	177	5885	11.0	11.0	11.0	11.0	14.0
802.11n HT20	169	5845	11.0	11.0	11.0	11.0	14.0
	173	5865	11.0	11.0	11.0	11.0	14.0
	177	5885	11.0	11.0	11.0	11.0	14.0
802.11n HT40	167	5835	11.0	11.0	11.0	11.0	14.0
	175	5875	11.0	11.0	11.0	11.0	14.0
802.11ac VHT80	171	5855	11.0	11.0	11.0	11.0	14.0
802.11ac VHT160	163	5815	11.0	11.0	11.0	11.0	14.0
802.11ax HE20	169	5845	11.0	11.0	11.0	11.0	14.0
	173	5865	11.0	11.0	11.0	11.0	14.0
	177	5885	11.0	11.0	11.0	11.0	14.0
802.11ax HE40	167	5835	11.0	11.0	11.0	11.0	14.0
	175	5875	11.0	11.0	11.0	11.0	14.0
802.11ax HE80	171	5855	11.0	11.0	11.0	11.0	14.0
802.11ax HE160	163	5815	11.0	11.0	11.0	11.0	14.0



WLAN Tune-up Power (Full)							
UNII-5							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	1	5955	4.5	4.5	1.5	1.5	4.5
	5	5975	4.5	4.5	1.5	1.5	4.5
	9	5995	4.5	4.5	1.5	1.5	4.5
	13	6015	4.5	4.5	1.5	1.5	4.5
	17	6035	4.5	4.5	1.5	1.5	4.5
	21	6055	4.5	4.5	1.5	1.5	4.5
	25	6075	4.5	4.5	1.5	1.5	4.5
	29	6095	4.5	4.5	1.5	1.5	4.5
	33	6115	4.5	4.5	1.5	1.5	4.5
	37	6135	4.5	4.5	1.5	1.5	4.5
	41	6155	4.5	4.5	1.5	1.5	4.5
	45	6175	4.5	4.5	1.5	1.5	4.5
	49	6195	4.5	4.5	1.5	1.5	4.5
	53	6215	4.5	4.5	1.5	1.5	4.5
	57	6235	4.5	4.5	1.5	1.5	4.5
	61	6255	4.5	4.5	1.5	1.5	4.5
	65	6275	4.5	4.5	1.5	1.5	4.5
	69	6295	4.5	4.5	1.5	1.5	4.5
	73	6315	4.5	4.5	1.5	1.5	4.5
	77	6335	4.5	4.5	1.5	1.5	4.5
81	6355	4.5	4.5	1.5	1.5	4.5	
85	6375	4.5	4.5	1.5	1.5	4.5	
89	6395	4.5	4.5	1.5	1.5	4.5	
93	6415	4.5	4.5	1.5	1.5	4.5	
802.11ax HE40	3	5965	7.5	7.5	4.5	4.5	7.5
	11	6005	7.5	7.5	4.5	4.5	7.5
	19	6045	7.5	7.5	4.5	4.5	7.5
	27	6085	7.5	7.5	4.5	4.5	7.5
	35	6125	7.5	7.5	4.5	4.5	7.5
	43	6165	7.5	7.5	4.5	4.5	7.5
	51	6205	7.5	7.5	4.5	4.5	7.5
	59	6245	7.5	7.5	4.5	4.5	7.5
	67	6285	7.5	7.5	4.5	4.5	7.5
	75	6325	7.5	7.5	4.5	4.5	7.5
	83	6365	7.5	7.5	4.5	4.5	7.5
	91	6405	7.5	7.5	4.5	4.5	7.5
802.11ax HE80	7	5985	10.0	10.0	7.0	7.0	10.0
	23	6065	10.0	10.0	7.0	7.0	10.0
	39	6145	10.0	10.0	7.0	7.0	10.0
	55	6225	10.0	10.0	7.0	7.0	10.0
	71	6305	10.0	10.0	7.0	7.0	10.0
	87	6385	10.0	10.0	7.0	7.0	10.0
802.11ax HE160	15	6025	10.0	10.0	10.0	10.0	13.0
	47	6185	10.0	10.0	10.0	10.0	13.0
	79	6345	10.0	10.0	10.0	10.0	13.0

WLAN Tune-up Power (Full)							
UNII-6							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	97	6435	4.5	4.5	1.5	1.5	4.5
	101	6455	4.5	4.5	1.5	1.5	4.5
	105	6475	4.5	4.5	1.5	1.5	4.5
	109	6495	4.5	4.5	1.5	1.5	4.5
	113	6515	4.5	4.5	1.5	1.5	4.5
	117	6535	4.5	4.5	1.5	1.5	4.5
802.11ax HE40	99	6445	7.5	7.5	4.5	4.5	7.5
	107	6485	7.5	7.5	4.5	4.5	7.5
	115	6525	7.5	7.5	4.5	4.5	7.5
802.11ax HE80	103	6465	10.0	10.0	7.0	7.0	10.0
	119	6545	10.0	10.0	7.0	7.0	10.0
802.11ax HE160	111	6505	10.0	10.0	10.0	10.0	13.0



WLAN Tune-up Power (Full)

UNII-7

Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	121	6555	4.5	4.5	1.5	1.5	4.5
	125	6575	4.5	4.5	1.5	1.5	4.5
	129	6595	4.5	4.5	1.5	1.5	4.5
	133	6615	4.5	4.5	1.5	1.5	4.5
	137	6635	4.5	4.5	1.5	1.5	4.5
	141	6655	4.5	4.5	1.5	1.5	4.5
	145	6675	4.5	4.5	1.5	1.5	4.5
	149	6695	4.5	4.5	1.5	1.5	4.5
	153	6715	4.5	4.5	1.5	1.5	4.5
	157	6735	4.5	4.5	1.5	1.5	4.5
	161	6755	4.5	4.5	1.5	1.5	4.5
	165	6775	4.5	4.5	1.5	1.5	4.5
	169	6795	4.5	4.5	1.5	1.5	4.5
	173	6815	4.5	4.5	1.5	1.5	4.5
	177	6835	4.5	4.5	1.5	1.5	4.5
	181	6855	4.5	4.5	1.5	1.5	4.5
185	6875	4.5	4.5	1.5	1.5	4.5	
802.11ax HE40	123	6565	7.5	7.5	4.5	4.5	7.5
	131	6605	7.5	7.5	4.5	4.5	7.5
	139	6645	7.5	7.5	4.5	4.5	7.5
	147	6685	7.5	7.5	4.5	4.5	7.5
	155	6725	7.5	7.5	4.5	4.5	7.5
	163	6765	7.5	7.5	4.5	4.5	7.5
	171	6805	7.5	7.5	4.5	4.5	7.5
	179	6845	7.5	7.5	4.5	4.5	7.5
802.11ax HE80	187	6885	7.5	7.5	4.5	4.5	7.5
	135	6625	10.0	10.0	7.0	7.0	10.0
	151	6705	10.0	10.0	7.0	7.0	10.0
	167	6785	10.0	10.0	7.0	7.0	10.0
802.11ax HE160	183	6865	10.0	10.0	7.0	7.0	10.0
	143	6665	10.0	10.0	10.0	10.0	13.0
	175	6825	10.0	10.0	10.0	10.0	13.0



WLAN Tune-up Power (Full)							
UNII-8							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	189	6895	4.5	4.5	1.5	1.5	4.5
	193	6915	4.5	4.5	1.5	1.5	4.5
	197	6935	4.5	4.5	1.5	1.5	4.5
	201	6955	4.5	4.5	1.5	1.5	4.5
	205	6975	4.5	4.5	1.5	1.5	4.5
	209	6995	4.5	4.5	1.5	1.5	4.5
	213	7015	4.5	4.5	1.5	1.5	4.5
	217	7035	4.5	4.5	1.5	1.5	4.5
	221	7055	4.5	4.5	1.5	1.5	4.5
	225	7075	4.5	4.5	1.5	1.5	4.5
	229	7095	4.5	4.5	1.5	1.5	4.5
	233	7115	0.5	0.5	-2.0	-2.0	1.0
802.11ax HE40	195	6925	7.5	7.5	4.5	4.5	7.5
	203	6965	7.5	7.5	4.5	4.5	7.5
	211	7005	7.5	7.5	4.5	4.5	7.5
	219	7045	7.5	7.5	4.5	4.5	7.5
	227	7085	7.5	7.5	4.5	4.5	7.5
802.11ax HE80	199	6945	10.0	10.0	7.0	7.0	10.0
	215	7025	10.0	10.0	7.0	7.0	10.0
802.11ax HE160	207	6985	10.0	10.0	10.0	10.0	13.0

Appendix E. Measured Conducted Power Result

The measuring conducted power (Unit: dBm) are shown as below.

WLAN Conducted Power (Full)			
WLAN2.4GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11b	1	2412	14.95
	6	2437	14.92
	11	2462	14.94
	12	2467	14.98
	13	2472	14.92
802.11g	1	2412	14.9
	6	2437	14.8
	11	2462	14.81
	12	2467	14.79
	13	2472	11.88
802.11n HT20	1	2412	14.86
	6	2437	14.89
	11	2462	14.81
	12	2467	14.78
	13	2472	11.83
802.11n HT40	3	2422	14.82
	6	2437	14.82
	9	2452	14.89
	10	2457	12.36
	11	2462	9.75
802.11ax HE20	1	2412	14.85
	6	2437	14.75
	11	2462	14.82
	12	2467	14.89
	13	2472	11.84
802.11ax HE40	3	2422	14.81
	6	2437	14.75
	9	2452	14.77
	10	2457	11.76
	11	2462	9.25

WLAN Conducted Power (Full)			
WLAN2.4GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11b	1	2412	14.91
	6	2437	14.95
	11	2462	14.98
	12	2467	14.99
	13	2472	14.96
802.11g	1	2412	14.87
	6	2437	14.88
	11	2462	14.78
	12	2467	14.81
	13	2472	11.83
802.11n HT20	1	2412	14.78
	6	2437	14.8
	11	2462	14.75
	12	2467	14.86
	13	2472	11.89
802.11n HT40	3	2422	14.86
	6	2437	14.87
	9	2452	14.79
	10	2457	12.39
	11	2462	9.9
802.11ax HE20	1	2412	14.9
	6	2437	14.75
	11	2462	14.78
	12	2467	14.88
	13	2472	11.77
802.11ax HE40	3	2422	14.9
	6	2437	14.79
	9	2452	14.84
	10	2457	11.81
	11	2462	9.3



WLAN Conducted Power (Full)					
WLAN2.4GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11b	1	2412	-	-	-
	6	2437	-	-	-
	11	2462	-	-	-
	12	2467	-	-	-
	13	2472	-	-	-
802.11g	1	2412	-	-	-
	6	2437	-	-	-
	11	2462	-	-	-
	12	2467	-	-	-
	13	2472	-	-	-
802.11n HT20	1	2412	14.85	14.9	17.89
	6	2437	14.8	14.85	17.84
	11	2462	14.9	14.78	17.85
	12	2467	11.26	11.36	14.32
	13	2472	8.33	8.32	11.34
802.11n HT40	3	2422	14.98	14.97	17.99
	6	2437	14.94	14.96	17.96
	9	2452	14.41	14.46	17.45
	10	2457	11.48	11.41	14.46
	11	2462	8.48	8.41	11.46
802.11ax HE20	1	2412	14.9	14.82	17.87
	6	2437	14.79	14.8	17.81
	11	2462	14.78	14.82	17.81
	12	2467	11.31	11.39	14.36
	13	2472	8.26	8.29	11.29
802.11ax HE40	3	2422	14.82	14.83	17.84
	6	2437	14.88	14.89	17.90
	9	2452	14.3	14.25	17.29
	10	2457	11.26	11.28	14.28
	11	2462	8.38	8.4	11.40

WLAN Conducted Power (Full)			
Bluetooth Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
BR / EDR	0	2402	8.72
	39	2441	9.09
	78	2480	9.86
LE	0	2402	4.23
	19	2440	4.31
	39	2480	4.44

WLAN Conducted Power (Full)			
WLAN 5.2GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	36	5180	9.85
	40	5200	9.8
	44	5220	9.82
	48	5240	9.75
802.11n HT20	36	5180	9.77
	40	5200	9.84
	44	5220	9.85
	48	5240	9.89
802.11n HT40	38	5190	9.9
	46	5230	9.75
802.11ac VHT80	42	5210	9.98
802.11ax HE20	36	5180	9.86
	40	5200	9.9
	44	5220	9.87
	48	5240	9.9
802.11ax HE40	38	5190	9.81
	46	5230	9.83
802.11ax HE80	42	5210	9.8

WLAN Conducted Power (Full)			
WLAN 5.2GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	36	5180	9.82
	40	5200	9.88
	44	5220	9.8
	48	5240	9.8
802.11n HT20	36	5180	9.81
	40	5200	9.78
	44	5220	9.87
	48	5240	9.89
802.11n HT40	38	5190	9.85
	46	5230	9.89
802.11ac VHT80	42	5210	9.98
802.11ax HE20	36	5180	9.77
	40	5200	9.88
	44	5220	9.78
	48	5240	9.87
802.11ax HE40	38	5190	9.87
	46	5230	9.9
802.11ax HE80	42	5210	9.83



WLAN Conducted Power (Full)					
WLAN 5.2GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	36	5180	-	-	-
	40	5200	-	-	-
	44	5220	-	-	-
	48	5240	-	-	-
802.11n HT20	36	5180	9.89	9.75	12.83
	40	5200	9.85	9.77	12.82
	44	5220	9.77	9.81	12.8
	48	5240	9.75	9.88	12.83
802.11n HT40	38	5190	9.88	9.85	12.88
	46	5230	9.89	9.75	12.83
802.11ac VHT80	42	5210	9.97	9.98	12.99
802.11ax HE20	36	5180	9.83	9.81	12.83
	40	5200	9.8	9.89	12.86
	44	5220	9.82	9.87	12.86
	48	5240	9.87	9.76	12.83
802.11ax HE40	38	5190	9.79	9.89	12.85
	46	5230	9.86	9.89	12.89
802.11ax HE80	42	5210	9.76	9.82	12.8

WLAN Conducted Power (Full)			
WLAN 5.3GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	52	5260	9.76
	56	5280	9.77
	60	5300	9.78
	64	5320	9.8
802.11n HT20	52	5260	9.85
	56	5280	9.75
	60	5300	9.89
	64	5320	9.78
802.11n HT40	54	5270	9.82
	62	5310	9.81
802.11ac VHT80	58	5290	9.84
802.11ac VHT160	50	5250	9.99
802.11ax HE20	52	5260	9.9
	56	5280	9.89
	60	5300	9.89
	64	5320	9.77
802.11ax HE40	54	5270	9.9
	62	5310	9.76
802.11ax HE80	58	5290	9.9
802.11ax HE160	50	5250	9.8

WLAN Conducted Power (Full)			
WLAN 5.3GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	52	5260	9.88
	56	5280	9.76
	60	5300	9.75
	64	5320	9.87
802.11n HT20	52	5260	9.85
	56	5280	9.84
	60	5300	9.78
	64	5320	9.89
802.11n HT40	54	5270	9.82
	62	5310	9.83
802.11ac VHT80	58	5290	9.78
802.11ac VHT160	50	5250	9.98
802.11ax HE20	52	5260	9.76
	56	5280	9.78
	60	5300	9.81
	64	5320	9.76
802.11ax HE40	54	5270	9.86
	62	5310	9.84
802.11ax HE80	58	5290	9.79
802.11ax HE160	50	5250	9.87



WLAN Conducted Power (Full)					
WLAN 5.3GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	52	5260	-	-	-
	56	5280	-	-	-
	60	5300	-	-	-
	64	5320	-	-	-
802.11n HT20	52	5260	9.81	9.79	12.81
	56	5280	9.89	9.85	12.88
	60	5300	9.81	9.75	12.79
	64	5320	9.76	9.78	12.78
802.11n HT40	54	5270	9.79	9.86	12.84
	62	5310	9.84	9.81	12.84
802.11ac VHT80	58	5290	9.83	9.79	12.82
802.11ac VHT160	50	5250	9.97	9.94	12.97
802.11ax HE20	52	5260	9.88	9.77	12.84
	56	5280	9.9	9.8	12.86
	60	5300	9.9	9.75	12.84
	64	5320	9.89	9.9	12.91
802.11ax HE40	54	5270	9.8	9.79	12.81
	62	5310	9.81	9.83	12.83
802.11ax HE80	58	5290	9.82	9.77	12.81
802.11ax HE160	50	5250	9.78	9.8	12.8

WLAN Conducted Power (Full)			
WLAN 5.6GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	100	5500	10.85
	116	5580	10.75
	120	5600	10.85
	124	5620	10.85
	132	5660	10.83
	140	5700	10.84
802.11n HT20	100	5500	10.82
	116	5580	10.85
	120	5600	10.85
	124	5620	10.85
	132	5660	10.84
	140	5700	10.9
802.11n HT40	144	5720	10.84
	102	5510	10.88
	110	5550	10.79
	118	5590	10.75
	126	5630	10.76
	134	5670	10.84
802.11ac VHT80	142	5710	10.85
	106	5530	10.98
	122	5610	10.91
802.11ac VHT160	138	5690	10.97
	114	5570	10.94
	802.11ax HE20	100	5500
116		5580	10.85
120		5600	10.79
124		5620	10.85
132		5660	10.9
140		5700	10.76
144		5720	10.81
802.11ax HE40	102	5510	10.89
	110	5550	10.85
	118	5590	10.77
	126	5630	10.89
	134	5670	10.89
	142	5710	10.76
802.11ax HE80	106	5530	10.88
	122	5610	10.75
	138	5690	10.76
802.11ax HE160	114	5570	10.83

WLAN Conducted Power (Full)			
WLAN 5.6GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	100	5500	10.79
	116	5580	10.82
	120	5600	10.82
	124	5620	10.89
	132	5660	10.82
	140	5700	10.87
802.11n HT20	100	5500	10.84
	116	5580	10.8
	120	5600	10.87
	124	5620	10.89
	132	5660	10.79
	140	5700	10.86
802.11n HT40	144	5720	10.78
	102	5510	10.89
	110	5550	10.83
	118	5590	10.79
	126	5630	10.78
	134	5670	10.8
802.11ac VHT80	142	5710	10.81
	106	5530	10.98
	122	5610	10.95
802.11ac VHT160	138	5690	10.92
	114	5570	10.94
	802.11ax HE20	100	5500
116		5580	10.82
120		5600	10.89
124		5620	10.85
132		5660	10.89
140		5700	10.78
144		5720	10.9
802.11ax HE40	102	5510	10.84
	110	5550	10.88
	118	5590	10.84
	126	5630	10.75
	134	5670	10.82
	142	5710	10.78
802.11ax HE80	106	5530	10.79
	122	5610	10.84
	138	5690	10.81
802.11ax HE160	114	5570	10.77



WLAN Conducted Power (Full)					
WLAN 5.6GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	100	5500	-	-	-
	116	5580	-	-	-
	120	5600	-	-	-
	124	5620	-	-	-
	132	5660	-	-	-
	140	5700	-	-	-
802.11n HT20	100	5500	10.77	10.76	13.78
	116	5580	10.78	10.83	13.82
	120	5600	10.78	10.76	13.78
	124	5620	10.82	10.78	13.81
	132	5660	10.77	10.85	13.82
	140	5700	10.89	10.88	13.9
	144	5720	10.8	10.85	13.84
802.11n HT40	102	5510	10.76	10.79	13.79
	110	5550	10.8	10.82	13.82
	118	5590	10.9	10.82	13.87
	126	5630	10.77	10.78	13.79
	134	5670	10.77	10.87	13.83
	142	5710	10.8	10.87	13.85
802.11ac VHT80	106	5530	10.95	10.96	13.97
	122	5610	10.91	10.93	13.93
	138	5690	10.92	10.95	13.95
802.11ac VHT160	114	5570	10.96	10.94	13.96
802.11ax HE20	100	5500	10.83	10.82	13.84
	116	5580	10.77	10.84	13.82
	120	5600	10.84	10.86	13.86
	124	5620	10.77	10.81	13.8
	132	5660	10.88	10.81	13.86
	140	5700	10.82	10.89	13.87
	144	5720	10.76	10.87	13.83
802.11ax HE40	102	5510	10.89	10.76	13.84
	110	5550	10.86	10.85	13.87
	118	5590	10.9	10.82	13.87
	126	5630	10.9	10.85	13.89
	134	5670	10.89	10.87	13.89
	142	5710	10.79	10.9	13.86
802.11ax HE80	106	5530	10.85	10.85	13.86
	122	5610	10.87	10.86	13.88
	138	5690	10.89	10.9	13.91
802.11ax HE160	114	5570	10.82	10.86	13.85

WLAN Conducted Power (Full)			
WLAN 5.8GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	149	5745	10.35
	153	5765	10.36
	157	5785	10.32
	161	5805	10.3
	165	5825	10.4
802.11n HT20	149	5745	10.31
	153	5765	10.37
	157	5785	10.28
	161	5805	10.3
	165	5825	10.4
802.11n HT40	151	5755	10.38
	159	5795	10.31
802.11ac VHT80	155	5775	10.47
802.11ax HE20	149	5745	10.4
	153	5765	10.26
	157	5785	10.35
	161	5805	10.39
	165	5825	10.26
802.11ax HE40	151	5755	10.37
	159	5795	10.3
802.11ax HE80	155	5775	10.34

WLAN Conducted Power (Full)			
WLAN 5.8GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	149	5745	10.25
	153	5765	10.26
	157	5785	10.4
	161	5805	10.27
	165	5825	10.32
802.11n HT20	149	5745	10.29
	153	5765	10.27
	157	5785	10.4
	161	5805	10.27
	165	5825	10.25
802.11n HT40	151	5755	10.3
	159	5795	10.25
802.11ac VHT80	155	5775	10.48
802.11ax HE20	149	5745	10.27
	153	5765	10.39
	157	5785	10.39
	161	5805	10.26
	165	5825	10.39
802.11ax HE40	151	5755	10.35
	159	5795	10.35
802.11ax HE80	155	5775	10.36



WLAN Conducted Power (Full)					
WLAN 5.8GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	149	5745	-	-	-
	153	5765	-	-	-
	157	5785	-	-	-
	161	5805	-	-	-
	165	5825	-	-	-
802.11n HT20	149	5745	10.25	10.28	13.28
	153	5765	10.26	10.35	13.32
	157	5785	10.32	10.27	13.31
	161	5805	10.36	10.25	13.32
	165	5825	10.26	10.31	13.3
802.11n HT40	151	5755	10.39	10.4	13.41
	159	5795	10.33	10.27	13.31
802.11ac VHT80	155	5775	10.45	10.47	13.47
802.11ax HE20	149	5745	10.39	10.33	13.37
	153	5765	10.35	10.28	13.33
	157	5785	10.31	10.31	13.32
	161	5805	10.31	10.39	13.36
	165	5825	10.32	10.31	13.33
802.11ax HE40	151	5755	10.33	10.25	13.3
	159	5795	10.31	10.4	13.37
802.11ax HE80	155	5775	10.28	10.34	13.32

WLAN Conducted Power (Full)			
WLAN 5.9GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	169	5845	10.57
	173	5865	10.65
	177	5885	10.8
802.11n HT20	169	5845	10.58
	173	5865	10.78
	177	5885	10.71
802.11n HT40	167	5835	10.63
	175	5875	10.74
802.11ac VHT80	171	5855	10.5
802.11ac VHT160	163	5815	10.93
802.11ax HE20	169	5845	10.55
	173	5865	10.76
	177	5885	10.52
802.11ax HE40	167	5835	10.8
	175	5875	10.58
802.11ax HE80	171	5855	10.71
802.11ax HE160	163	5815	10.78

WLAN Conducted Power (Full)			
WLAN 5.9GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	169	5845	10.66
	173	5865	10.78
	177	5885	10.55
802.11n HT20	169	5845	10.75
	173	5865	10.61
	177	5885	10.77
802.11n HT40	167	5835	10.73
	175	5875	10.79
802.11ac VHT80	171	5855	10.72
802.11ac VHT160	163	5815	10.89
802.11ax HE20	169	5845	10.63
	173	5865	10.6
	177	5885	10.5
802.11ax HE40	167	5835	10.57
	175	5875	10.7
802.11ax HE80	171	5855	10.66
802.11ax HE160	163	5815	10.57



WLAN Conducted Power (Full)					
WLAN 5.9GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	169	5845	10.76	10.79	13.79
	173	5865	10.72	10.77	13.76
	177	5885	10.5	10.72	13.62
802.11n HT20	169	5845	10.64	10.57	13.62
	173	5865	10.75	10.5	13.64
	177	5885	10.69	10.61	13.66
802.11n HT40	167	5835	10.59	10.74	13.68
	175	5875	10.68	10.7	13.7
802.11ac VHT80	171	5855	10.79	10.7	13.76
802.11ac VHT160	163	5815	10.88	10.94	13.92
802.11ax HE20	169	5845	10.63	10.58	13.62
	173	5865	10.74	10.76	13.76
	177	5885	10.71	10.72	13.73
802.11ax HE40	167	5835	10.52	10.51	13.53
	175	5875	10.69	10.7	13.71
802.11ax HE80	171	5855	10.79	10.63	13.72
802.11ax HE160	163	5815	10.53	10.55	13.55

WLAN Conducted Power (Full)			
UNII-5 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	1	5955	4.27
	5	5975	4.26
	9	5995	4.3
	13	6015	4.26
	17	6035	4.3
	21	6055	4.31
	25	6075	4.26
	29	6095	4.32
	33	6115	4.3
	37	6135	4.32
	41	6155	4.27
	45	6175	4.26
	49	6195	4.29
	53	6215	4.38
	57	6235	4.28
	61	6255	4.36
	65	6275	4.31
	69	6295	4.31
	73	6315	4.26
	77	6335	4.25
81	6355	4.4	
85	6375	4.31	
89	6395	4.26	
93	6415	4.37	
802.11ax HE40	3	5965	7.25
	11	6005	7.26
	19	6045	7.34
	27	6085	7.33
	35	6125	7.31
	43	6165	7.27
	51	6205	7.4
	59	6245	7.29
	67	6285	7.32
	75	6325	7.36
83	6365	7.39	
91	6405	7.3	
802.11ax HE80	7	5985	9.81
	23	6065	9.88
	39	6145	9.81
	55	6225	9.77
	71	6305	9.77
87	6385	9.75	
802.11ax HE160	15	6025	9.99
	47	6185	9.97
	79	6345	9.96

WLAN Conducted Power (Full)			
UNII-5 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	1	5955	4.3
	5	5975	4.26
	9	5995	4.38
	13	6015	4.28
	17	6035	4.32
	21	6055	4.33
	25	6075	4.35
	29	6095	4.32
	33	6115	4.35
	37	6135	4.3
	41	6155	4.34
	45	6175	4.26
	49	6195	4.35
	53	6215	4.37
	57	6235	4.36
	61	6255	4.36
	65	6275	4.31
	69	6295	4.35
	73	6315	4.27
	77	6335	4.36
81	6355	4.37	
85	6375	4.3	
89	6395	4.35	
93	6415	4.34	
802.11ax HE40	3	5965	7.31
	11	6005	7.31
	19	6045	7.32
	27	6085	7.32
	35	6125	7.25
	43	6165	7.38
	51	6205	7.25
	59	6245	7.27
	67	6285	7.29
	75	6325	7.27
	83	6365	7.34
91	6405	7.32	
802.11ax HE80	7	5985	9.58
	23	6065	9.9
	39	6145	9.76
	55	6225	9.77
	71	6305	9.84
87	6385	9.78	
802.11ax HE160	15	6025	9.98
	47	6185	9.95
	79	6345	9.92



WLAN Conducted Power (Full)					
UNII-5 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	1	5955	1.37	1.34	4.37
	5	5975	1.3	1.4	4.36
	9	5995	1.26	1.26	4.27
	13	6015	1.37	1.4	4.4
	17	6035	1.29	1.39	4.35
	21	6055	1.31	1.37	4.35
	25	6075	1.37	1.37	4.38
	29	6095	1.32	1.38	4.36
	33	6115	1.35	1.25	4.31
	37	6135	1.32	1.31	4.33
	41	6155	1.35	1.39	4.38
	45	6175	1.29	1.25	4.28
	49	6195	1.26	1.26	4.27
	53	6215	1.32	1.34	4.34
	57	6235	1.33	1.25	4.3
	61	6255	1.33	1.37	4.36
	65	6275	1.27	1.29	4.29
	69	6295	1.39	1.29	4.35
	73	6315	1.36	1.28	4.33
	77	6335	1.26	1.28	4.28
802.11ax HE40	81	6355	1.29	1.3	4.31
	85	6375	1.33	1.39	4.37
	89	6395	1.39	1.29	4.35
	93	6415	1.39	1.29	4.35
	3	5965	4.3	4.31	7.32
	11	6005	4.29	4.4	7.36
	19	6045	4.39	4.36	7.39
	27	6085	4.35	4.37	7.37
	35	6125	4.29	4.25	7.28
	43	6165	4.3	4.37	7.35
	51	6205	4.29	4.39	7.35
	59	6245	4.38	4.33	7.37
802.11ax HE80	67	6285	4.33	4.36	7.36
	75	6325	4.25	4.34	7.31
	83	6365	4.25	4.39	7.33
	91	6405	4.4	4.4	7.41
	7	5985	6.9	6.84	9.88
	23	6065	6.85	6.81	9.84
802.11ax HE160	39	6145	6.87	6.86	9.88
	55	6225	6.87	6.75	9.82
	71	6305	6.81	6.9	9.87
802.11ax HE160	87	6385	6.9	6.9	9.91
	15	6025	9.98	9.97	12.99
	47	6185	9.95	9.96	12.97
	79	6345	9.92	9.93	12.94

WLAN Conducted Power (Full)			
UNII-6 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	97	6435	4.26
	101	6455	4.28
	105	6475	4.28
	109	6495	4.34
	113	6515	4.35
	117	6535	4.3
802.11ax HE40	99	6445	7.32
	107	6485	7.05
	115	6525	7.12
802.11ax HE80	103	6465	9.75
	119	6545	9.84
802.11ax HE160	111	6505	9.93

WLAN Conducted Power (Full)			
UNII-6 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	97	6435	4.36
	101	6455	4.36
	105	6475	4.26
	109	6495	4.4
	113	6515	4.32
	117	6535	4.29
802.11ax HE40	99	6445	7.02
	107	6485	7.19
	115	6525	7.04
802.11ax HE80	103	6465	9.82
	119	6545	9.88
802.11ax HE160	111	6505	9.96



WLAN Conducted Power (Full)					
UNII-6 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	97	6435	1.4	1.36	4.39
	101	6455	1.33	1.32	4.34
	105	6475	1.26	1.38	4.33
	109	6495	1.3	1.35	4.34
	113	6515	1.31	1.32	4.33
	117	6535	1.35	1.4	4.39
802.11ax HE40	99	6445	4.09	4.11	7.11
	107	6485	4.18	4.07	7.14
	115	6525	4	4.19	7.11
802.11ax HE80	103	6465	6.78	6.77	9.79
	119	6545	6.83	6.79	9.82
802.11ax HE160	111	6505	9.94	9.95	12.96

WLAN Conducted Power (Full)			
UNII-7 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	121	6555	4.38
	125	6575	4.35
	129	6595	4.26
	133	6615	4.31
	137	6635	4.25
	141	6655	4.28
	145	6675	4.25
	149	6695	4.34
	153	6715	4.35
	157	6735	4.37
	161	6755	4.37
	165	6775	4.27
	169	6795	4.4
	173	6815	4.31
	177	6835	4.27
	181	6855	4.34
185	6875	4.3	
802.11ax HE40	123	6565	7.34
	131	6605	7.38
	139	6645	7.36
	147	6685	7.3
	155	6725	7.36
	163	6765	7.27
	171	6805	7.25
	179	6845	7.25
	187	6885	7.33
802.11ax HE80	135	6625	9.87
	151	6705	9.9
	167	6785	9.79
	183	6865	9.86
802.11ax HE160	143	6665	9.91
	175	6825	9.95

WLAN Conducted Power (Full)			
UNII-7 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	121	6555	4.26
	125	6575	4.35
	129	6595	4.25
	133	6615	4.25
	137	6635	4.28
	141	6655	4.39
	145	6675	4.28
	149	6695	4.27
	153	6715	4.29
	157	6735	4.26
	161	6755	4.37
	165	6775	4.38
	169	6795	4.25
	173	6815	4.28
	177	6835	4.4
	181	6855	4.26
185	6875	4.35	
802.11ax HE40	123	6565	7.38
	131	6605	7.31
	139	6645	7.25
	147	6685	7.26
	155	6725	7.4
	163	6765	7.26
	171	6805	7.3
	179	6845	7.4
	187	6885	7.34
802.11ax HE80	135	6625	9.9
	151	6705	9.81
	167	6785	9.84
	183	6865	9.87
802.11ax HE160	143	6665	9.95
	175	6825	9.95



WLAN Conducted Power (Full)					
UNII-7 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	121	6555	1.25	1.32	4.3
	125	6575	1.27	1.4	4.35
	129	6595	1.37	1.28	4.34
	133	6615	1.31	1.27	4.3
	137	6635	1.34	1.28	4.32
	141	6655	1.32	1.29	4.32
	145	6675	1.29	1.34	4.33
	149	6695	1.38	1.28	4.34
	153	6715	1.27	1.25	4.27
	157	6735	1.4	1.26	4.34
	161	6755	1.33	1.37	4.36
	165	6775	1.4	1.35	4.39
	169	6795	1.38	1.27	4.34
	173	6815	1.33	1.32	4.34
	177	6835	1.37	1.29	4.34
	181	6855	1.26	1.31	4.3
185	6875	1.26	1.34	4.31	
802.11ax HE40	123	6565	4.31	4.25	7.29
	131	6605	4.35	4.25	7.31
	139	6645	4.3	4.39	7.36
	147	6685	4.3	4.35	7.34
	155	6725	4.3	4.33	7.33
	163	6765	4.33	4.37	7.36
	171	6805	4.38	4.3	7.35
	179	6845	4.35	4.27	7.32
	187	6885	4.37	4.38	7.39
802.11ax HE80	135	6625	6.84	6.83	9.85
	151	6705	6.76	6.81	9.8
	167	6785	6.77	6.84	9.82
	183	6865	6.79	6.86	9.84
802.11ax HE160	143	6665	9.96	9.95	12.97
	175	6825	9.97	9.94	12.97

WLAN Conducted Power (Full)			
UNII-8 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	189	6895	4.28
	193	6915	4.33
	197	6935	4.39
	201	6955	4.31
	205	6975	4.31
	209	6995	4.33
	213	7015	4.35
	217	7035	4.3
	221	7055	4.32
	225	7075	4.27
	229	7095	4.28
	233	7115	0.32
802.11ax HE40	195	6925	7.33
	203	6965	7.37
	211	7005	7.27
	219	7045	7.26
	227	7085	7.33
802.11ax HE80	199	6945	9.81
	215	7025	9.9
802.11ax HE160	207	6985	9.97

WLAN Conducted Power (Full)			
UNII-8 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	189	6895	4.39
	193	6915	4.28
	197	6935	4.38
	201	6955	4.26
	205	6975	4.4
	209	6995	4.39
	213	7015	4.33
	217	7035	4.25
	221	7055	4.32
	225	7075	4.27
	229	7095	4.36
	233	7115	0.38
802.11ax HE40	195	6925	7.27
	203	6965	7.28
	211	7005	7.36
	219	7045	7.39
	227	7085	7.28
802.11ax HE80	199	6945	9.8
	215	7025	9.77
802.11ax HE160	207	6985	9.96



WLAN Conducted Power (Full)					
UNII-8 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	189	6895	1.33	1.25	4.3
	193	6915	1.32	1.39	4.37
	197	6935	1.3	1.3	4.31
	201	6955	1.28	1.3	4.3
	205	6975	1.25	1.32	4.3
	209	6995	1.39	1.37	4.39
	213	7015	1.29	1.34	4.33
	217	7035	1.27	1.34	4.32
	221	7055	1.34	1.34	4.35
	225	7075	1.28	1.29	4.3
	229	7095	1.38	1.31	4.36
	233	7115	-2.22	-2.23	0.79
802.11ax HE40	195	6925	4.39	4.38	7.4
	203	6965	4.35	4.25	7.31
	211	7005	4.25	4.32	7.3
	219	7045	4.35	4.32	7.35
	227	7085	4.37	4.32	7.36
802.11ax HE80	199	6945	6.81	6.79	9.81
	215	7025	6.87	6.83	9.86
802.11ax HE160	207	6985	9.92	9.96	12.95

Appendix F. SAR Test Result

SAR Results for Body Exposure Condition.

Note:

1. SAR testing for WLAN was performed on the maximum power mode.
2. The “< 0.001” means there is no SAR value or the SAR is too low to be measured.
3. There is no any change except enable the operating frequency of UNII-4 band. Hence, the only UNII-4 were tested in this report.

Body SAR Test Result

System & Position						DUT & Accessory		SAR						
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Ant Status	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN2.4G	802.11b	Bottom	0	12	Ant 0	93.30	1.07	15.00	14.98	1.00	-0.14	0.852	0.91
	WLAN2.4G	802.11b	Bottom	0	12	Ant 1	93.30	1.07	15.00	14.99	1.00	-0.14	1.05	1.12
	WLAN2.4G	802.11n HT40	Bottom	0	3	Ant 0+1	93.30	1.07	18.00	17.99	1.00	-0.08	1.02	1.09
	WLAN2.4G	802.11b	Rear Face	0	12	Ant 0	93.30	1.07	15.00	14.98	1.00	-0.19	0.204	0.22
	WLAN2.4G	802.11b	Left Side	0	12	Ant 0	93.30	1.07	15.00	14.98	1.00	0.03	0.109	0.12
	WLAN2.4G	802.11b	Right Side	0	12	Ant 0	93.30	1.07	15.00	14.98	1.00	0	<0.001	0.00
	WLAN2.4G	802.11b	Top Side	0	12	Ant 0	93.30	1.07	15.00	14.98	1.00	0	<0.001	0.00
	WLAN2.4G	802.11b	Bottom Side	0	12	Ant 0	93.30	1.07	15.00	14.98	1.00	0.19	0.755	0.81
	WLAN2.4G	802.11b	Rear Face	0	12	Ant 1	93.30	1.07	15.00	14.99	1.00	0.13	0.316	0.34
	WLAN2.4G	802.11b	Left Side	0	12	Ant 1	93.30	1.07	15.00	14.99	1.00	0	<0.001	0.00
	WLAN2.4G	802.11b	Right Side	0	12	Ant 1	93.30	1.07	15.00	14.99	1.00	0.14	0.172	0.18
	WLAN2.4G	802.11b	Top Side	0	12	Ant 1	93.30	1.07	15.00	14.99	1.00	0	<0.001	0.00
	WLAN2.4G	802.11b	Bottom Side	0	12	Ant 1	93.30	1.07	15.00	14.99	1.00	0.18	1.01	1.08
	WLAN2.4G	802.11n HT40	Rear Face	0	3	Ant 0+1	93.30	1.07	18.00	17.99	1.00	-0.19	0.336	0.36
	WLAN2.4G	802.11n HT40	Left Side	0	3	Ant 0+1	93.30	1.07	18.00	17.99	1.00	0.18	0.243	0.26
	WLAN2.4G	802.11n HT40	Right Side	0	3	Ant 0+1	93.30	1.07	18.00	17.99	1.00	-0.04	0.215	0.23
	WLAN2.4G	802.11n HT40	Top Side	0	3	Ant 0+1	93.30	1.07	18.00	17.99	1.00	0	<0.001	0.00
	WLAN2.4G	802.11n HT40	Bottom Side	0	3	Ant 0+1	93.30	1.07	18.00	17.99	1.00	0.03	1.01	1.08
	WLAN2.4G	802.11b	Bottom	0	1	Ant 0	93.30	1.07	15.00	14.95	1.01	0.06	0.854	0.92
	WLAN2.4G	802.11b	Bottom	0	6	Ant 0	93.30	1.07	15.00	14.92	1.02	0.01	0.888	0.97
	WLAN2.4G	802.11b	Bottom	0	11	Ant 0	93.30	1.07	15.00	14.94	1.01	0.06	0.903	0.98
	WLAN2.4G	802.11b	Bottom	0	13	Ant 0	93.30	1.07	15.00	14.92	1.02	0.16	0.888	0.97
	WLAN2.4G	802.11b	Bottom	0	1	Ant 1	93.30	1.07	15.00	14.91	1.02	0.15	0.977	1.07
1	WLAN2.4G	802.11b	Bottom	0	6	Ant 1	93.30	1.07	15.00	14.95	1.01	0.02	1.09	1.18
	WLAN2.4G	802.11b	Bottom	0	11	Ant 1	93.30	1.07	15.00	14.98	1.00	-0.11	1.07	1.14
	WLAN2.4G	802.11b	Bottom	0	13	Ant 1	93.30	1.07	15.00	14.96	1.01	0.04	1.04	1.12
	WLAN2.4G	802.11n HT40	Bottom	0	6	Ant 0+1	93.30	1.07	18.00	17.96	1.01	0.19	0.986	1.07
	WLAN2.4G	802.11n HT40	Bottom	0	9	Ant 0+1	93.30	1.07	17.50	17.45	1.01	0.12	0.949	1.03
	WLAN2.4G	802.11n HT40	Bottom	0	10	Ant 0+1	93.30	1.07	14.50	14.46	1.01	-0.03	0.472	0.51
	WLAN2.4G	802.11n HT40	Bottom	0	11	Ant 0+1	93.30	1.07	11.50	11.46	1.01	0.16	0.251	0.27
	WLAN2.4G	802.11b	Bottom Side	0	1	Ant 0	93.30	1.07	15.00	14.95	1.01	0.12	0.908	0.98
	WLAN2.4G	802.11b	Bottom Side	0	6	Ant 0	93.30	1.07	15.00	14.92	1.02	-0.11	0.757	0.83
	WLAN2.4G	802.11b	Bottom Side	0	11	Ant 0	93.30	1.07	15.00	14.94	1.01	-0.01	0.792	0.86
	WLAN2.4G	802.11b	Bottom Side	0	13	Ant 0	93.30	1.07	15.00	14.92	1.02	0.11	0.806	0.88
	WLAN2.4G	802.11b	Bottom Side	0	1	Ant 1	93.30	1.07	15.00	14.91	1.02	-0.03	0.93	1.02
	WLAN2.4G	802.11b	Bottom Side	0	6	Ant 1	93.30	1.07	15.00	14.95	1.01	0.01	1.04	1.12
	WLAN2.4G	802.11b	Bottom Side	0	11	Ant 1	93.30	1.07	15.00	14.98	1.00	0.17	1.02	1.09
	WLAN2.4G	802.11b	Bottom Side	0	13	Ant 1	93.30	1.07	15.00	14.96	1.01	-0.06	0.996	1.08
	WLAN2.4G	802.11n HT40	Bottom Side	0	6	Ant 0+1	93.30	1.07	18.00	17.96	1.01	0.09	0.967	1.05
	WLAN2.4G	802.11n HT40	Bottom Side	0	9	Ant 0+1	93.30	1.07	17.50	17.45	1.01	0.08	0.931	1.01
	WLAN2.4G	802.11n HT40	Bottom Side	0	10	Ant 0+1	93.30	1.07	14.50	14.46	1.01	0.12	0.453	0.49
	WLAN2.4G	802.11n HT40	Bottom Side	0	11	Ant 0+1	93.30	1.07	11.50	11.46	1.01	0.06	0.233	0.25
	WLAN2.4G	802.11b	Bottom	0	6	Ant 1	93.30	1.07	15.00	14.95	1.01	-0.08	1.03	1.11

Body SAR Test Result														
System & Position						DUT & Accessory		SAR						
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Ant Status	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN5.3G	802.11ac VHT160	Bottom	0	50	Ant 0	98.00	1.02	10.00	9.99	1.00	0.05	0.762	0.78
2	WLAN5.3G	802.11ac VHT160	Bottom	0	50	Ant 1	98.00	1.02	10.00	9.98	1.00	-0.03	0.901	0.92
	WLAN5.3G	802.11ac VHT160	Bottom	0	50	Ant 0+1	98.40	1.02	13.00	12.97	1.01	0.13	0.883	0.91
	WLAN5.3G	802.11ac VHT160	Rear Face	0	50	Ant 0	98.00	1.02	10.00	9.99	1.00	0.03	0.195	0.20
	WLAN5.3G	802.11ac VHT160	Left Side	0	50	Ant 0	98.00	1.02	10.00	9.99	1.00	0.19	0.07	0.07
	WLAN5.3G	802.11ac VHT160	Right Side	0	50	Ant 0	98.00	1.02	10.00	9.99	1.00	0	<0.001	0.00
	WLAN5.3G	802.11ac VHT160	Top Side	0	50	Ant 0	98.00	1.02	10.00	9.99	1.00	0	<0.001	0.00
	WLAN5.3G	802.11ac VHT160	Bottom Side	0	50	Ant 0	98.00	1.02	10.00	9.99	1.00	0.04	0.49	0.50
	WLAN5.3G	802.11ac VHT160	Rear Face	0	50	Ant 1	98.00	1.02	10.00	9.98	1.00	0.03	0.142	0.14
	WLAN5.3G	802.11ac VHT160	Left Side	0	50	Ant 1	98.00	1.02	10.00	9.98	1.00	0	<0.001	0.00
	WLAN5.3G	802.11ac VHT160	Right Side	0	50	Ant 1	98.00	1.02	10.00	9.98	1.00	-0.01	0.048	0.05
	WLAN5.3G	802.11ac VHT160	Top Side	0	50	Ant 1	98.00	1.02	10.00	9.98	1.00	0	<0.001	0.00
	WLAN5.3G	802.11ac VHT160	Bottom Side	0	50	Ant 1	98.00	1.02	10.00	9.98	1.00	0.07	0.45	0.46
	WLAN5.3G	802.11ac VHT160	Rear Face	0	50	Ant 0+1	98.40	1.02	13.00	12.97	1.01	0.09	0.155	0.16
	WLAN5.3G	802.11ac VHT160	Left Side	0	50	Ant 0+1	98.40	1.02	13.00	12.97	1.01	0.02	0.079	0.08
	WLAN5.3G	802.11ac VHT160	Right Side	0	50	Ant 0+1	98.40	1.02	13.00	12.97	1.01	0.05	0.051	0.05
	WLAN5.3G	802.11ac VHT160	Top Side	0	50	Ant 0+1	98.40	1.02	13.00	12.97	1.01	0	<0.001	0.00
	WLAN5.3G	802.11ac VHT160	Bottom Side	0	50	Ant 0+1	98.40	1.02	13.00	12.97	1.01	-0.15	0.546	0.56
	WLAN5.3G	802.11ac VHT160	Bottom	0	50	Ant 1	98.00	1.02	10.00	9.98	1.00	0.14	0.879	0.90
	WLAN5.6G	802.11ac VHT160	Bottom	0	114	Ant 0	98.00	1.02	11.00	10.94	1.01	0.02	0.741	0.76
	WLAN5.6G	802.11ac VHT160	Bottom	0	114	Ant 1	98.00	1.02	11.00	10.94	1.01	0.01	0.802	0.83
3	WLAN5.6G	802.11ac VHT160	Bottom	0	114	Ant 0+1	98.40	1.02	14.00	13.96	1.01	-0.14	0.863	0.89
	WLAN5.6G	802.11ac VHT160	Rear Face	0	114	Ant 0	98.00	1.02	11.00	10.94	1.01	0.08	0.231	0.24
	WLAN5.6G	802.11ac VHT160	Left Side	0	114	Ant 0	98.00	1.02	11.00	10.94	1.01	0.07	0.062	0.06
	WLAN5.6G	802.11ac VHT160	Right Side	0	114	Ant 0	98.00	1.02	11.00	10.94	1.01	0	<0.001	0.00
	WLAN5.6G	802.11ac VHT160	Top Side	0	114	Ant 0	98.00	1.02	11.00	10.94	1.01	0	<0.001	0.00
	WLAN5.6G	802.11ac VHT160	Bottom Side	0	114	Ant 0	98.00	1.02	11.00	10.94	1.01	0.13	0.672	0.69
	WLAN5.6G	802.11ac VHT160	Rear Face	0	114	Ant 1	98.00	1.02	11.00	10.94	1.01	-0.18	0.14	0.14
	WLAN5.6G	802.11ac VHT160	Left Side	0	114	Ant 1	98.00	1.02	11.00	10.94	1.01	0	<0.001	0.00
	WLAN5.6G	802.11ac VHT160	Right Side	0	114	Ant 1	98.00	1.02	11.00	10.94	1.01	-0.04	0.061	0.06
	WLAN5.6G	802.11ac VHT160	Top Side	0	114	Ant 1	98.00	1.02	11.00	10.94	1.01	0	<0.001	0.00
	WLAN5.6G	802.11ac VHT160	Bottom Side	0	114	Ant 1	98.00	1.02	11.00	10.94	1.01	-0.16	0.715	0.74
	WLAN5.6G	802.11ac VHT160	Rear Face	0	114	Ant 0+1	98.40	1.02	14.00	13.96	1.01	-0.05	0.177	0.18
	WLAN5.6G	802.11ac VHT160	Left Side	0	114	Ant 0+1	98.40	1.02	14.00	13.96	1.01	0.06	0.065	0.07
	WLAN5.6G	802.11ac VHT160	Right Side	0	114	Ant 0+1	98.40	1.02	14.00	13.96	1.01	-0.14	0.056	0.06
	WLAN5.6G	802.11ac VHT160	Top Side	0	114	Ant 0+1	98.40	1.02	14.00	13.96	1.01	0	<0.001	0.00
	WLAN5.6G	802.11ac VHT160	Bottom Side	0	114	Ant 0+1	98.40	1.02	14.00	13.96	1.01	0.01	0.764	0.79
	WLAN5.6G	802.11ac VHT160	Bottom	0	114	Ant 0+1	98.40	1.02	14.00	13.96	1.01	0.06	0.832	0.86

Body SAR Test Result

System & Position						DUT & Accessory		SAR						
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Ant Status	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
4	WLAN5.8G	802.11ac VHT80	Bottom	0	155	Ant 0	97.80	1.02	10.50	10.47	1.01	0.18	0.83	0.86
	WLAN5.8G	802.11ac VHT80	Bottom	0	155	Ant 1	97.50	1.03	10.50	10.48	1.00	-0.11	0.871	0.90
	WLAN5.8G	802.11ac VHT80	Bottom	0	155	Ant 0+1	98.60	1.01	13.50	13.47	1.01	0.07	0.822	0.84
	WLAN5.8G	802.11ac VHT80	Rear Face	0	155	Ant 0	97.80	1.02	10.50	10.47	1.01	0.02	0.127	0.13
	WLAN5.8G	802.11ac VHT80	Left Side	0	155	Ant 0	97.80	1.02	10.50	10.47	1.01	0.02	0.052	0.05
	WLAN5.8G	802.11ac VHT80	Right Side	0	155	Ant 0	97.80	1.02	10.50	10.47	1.01	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Top Side	0	155	Ant 0	97.80	1.02	10.50	10.47	1.01	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Bottom Side	0	155	Ant 0	97.80	1.02	10.50	10.47	1.01	0.05	0.783	0.81
	WLAN5.8G	802.11ac VHT80	Rear Face	0	155	Ant 1	97.50	1.03	10.50	10.48	1.00	-0.03	0.105	0.11
	WLAN5.8G	802.11ac VHT80	Left Side	0	155	Ant 1	97.50	1.03	10.50	10.48	1.00	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Right Side	0	155	Ant 1	97.50	1.03	10.50	10.48	1.00	-0.13	0.06	0.06
	WLAN5.8G	802.11ac VHT80	Top Side	0	155	Ant 1	97.50	1.03	10.50	10.48	1.00	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Bottom Side	0	155	Ant 1	97.50	1.03	10.50	10.48	1.00	0.04	0.732	0.75
	WLAN5.8G	802.11ac VHT80	Rear Face	0	155	Ant 0+1	98.60	1.01	13.50	13.47	1.01	0.16	0.175	0.18
	WLAN5.8G	802.11ac VHT80	Left Side	0	155	Ant 0+1	98.60	1.01	13.50	13.47	1.01	-0.06	0.058	0.06
	WLAN5.8G	802.11ac VHT80	Right Side	0	155	Ant 0+1	98.60	1.01	13.50	13.47	1.01	0.01	0.051	0.05
	WLAN5.8G	802.11ac VHT80	Top Side	0	155	Ant 0+1	98.60	1.01	13.50	13.47	1.01	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Bottom Side	0	155	Ant 0+1	98.60	1.01	13.50	13.47	1.01	-0.17	0.606	0.62
WLAN5.8G	802.11ac VHT80	Bottom	0	155	Ant 1	97.50	1.03	10.50	10.48	1.00	0.04	0.849	0.87	
7	WLAN5.9G	802.11ac VHT160	Bottom	0	163	Ant 0	98.00	1.02	11.00	10.93	1.02	-0.07	1.01	1.05
	WLAN5.9G	802.11ac VHT160	Bottom	0	163	Ant 1	99.00	1.01	11.00	10.89	1.03	0.07	1.06	1.10
	WLAN5.9G	802.11ac VHT160	Bottom	0	163	Ant 0+1	98.90	1.01	14.00	13.92	1.02	-0.02	1.09	1.12
	WLAN5.9G	802.11ac VHT160	Rear Face	0	163	Ant 0	98.00	1.02	11.00	10.93	1.02	0.15	0.197	0.20
	WLAN5.9G	802.11ac VHT160	Left Side	0	163	Ant 0	98.00	1.02	11.00	10.93	1.02	0	<0.001	0.00
	WLAN5.9G	802.11ac VHT160	Right Side	0	163	Ant 0	98.00	1.02	11.00	10.93	1.02	0	<0.001	0.00
	WLAN5.9G	802.11ac VHT160	Top Side	0	163	Ant 0	98.00	1.02	11.00	10.93	1.02	0	<0.001	0.00
	WLAN5.9G	802.11ac VHT160	Bottom Side	0	163	Ant 0	98.00	1.02	11.00	10.93	1.02	0.13	1.05	1.09
	WLAN5.9G	802.11ac VHT160	Rear Face	0	163	Ant 1	99.00	1.01	11.00	10.89	1.03	-0.13	0.192	0.20
	WLAN5.9G	802.11ac VHT160	Left Side	0	163	Ant 1	99.00	1.01	11.00	10.89	1.03	0	<0.001	0.00
	WLAN5.9G	802.11ac VHT160	Right Side	0	163	Ant 1	99.00	1.01	11.00	10.89	1.03	0	<0.001	0.00
	WLAN5.9G	802.11ac VHT160	Top Side	0	163	Ant 1	99.00	1.01	11.00	10.89	1.03	0	<0.001	0.00
	WLAN5.9G	802.11ac VHT160	Bottom Side	0	163	Ant 1	99.00	1.01	11.00	10.89	1.03	0.04	0.817	0.85
	WLAN5.9G	802.11ac VHT160	Rear Face	0	163	Ant 0+1	98.90	1.01	14.00	13.92	1.02	-0.17	0.195	0.20
	WLAN5.9G	802.11ac VHT160	Left Side	0	163	Ant 0+1	98.90	1.01	14.00	13.92	1.02	-0.03	0.055	0.06
	WLAN5.9G	802.11ac VHT160	Right Side	0	163	Ant 0+1	98.90	1.01	14.00	13.92	1.02	-0.01	0.048	0.05
	WLAN5.9G	802.11ac VHT160	Top Side	0	163	Ant 0+1	98.90	1.01	14.00	13.92	1.02	0	<0.001	0.00
	WLAN5.9G	802.11ac VHT160	Bottom Side	0	163	Ant 0+1	98.90	1.01	14.00	13.92	1.02	0.13	1.04	1.07
WLAN5.9G	802.11ac VHT160	Bottom	0	163	Ant 0+1	98.90	1.01	14.00	13.92	1.02	0.09	1.08	1.11	

Body SAR Test Result														
System & Position						DUT & Accessory	SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Ant Status	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
5	BT	BR / EDR	Bottom	0	78	Ant 1	76.92	1.30	10.00	9.86	1.03	-0.05	0.266	0.36
	BT	BR / EDR	Rear Face	0	78	Ant 1	76.92	1.30	10.00	9.86	1.03	0.08	0.098	0.13
	BT	BR / EDR	Left Side	0	78	Ant 1	76.92	1.30	10.00	9.86	1.03	0	<0.001	0.00
	BT	BR / EDR	Right Side	0	78	Ant 1	76.92	1.30	10.00	9.86	1.03	0	<0.001	0.00
	BT	BR / EDR	Top Side	0	78	Ant 1	76.92	1.30	10.00	9.86	1.03	0	<0.001	0.00
	BT	BR / EDR	Bottom Side	0	78	Ant 1	76.92	1.30	10.00	9.86	1.03	-0.04	0.162	0.22
	BT	BR / EDR	Bottom	0	0	Ant 1	76.92	1.30	10.00	8.72	1.34	0.01	0.194	0.34
	BT	BR / EDR	Bottom	0	39	Ant 1	76.92	1.30	10.00	9.09	1.23	0.17	0.173	0.28

SAR and Power Density Test Result

System & Position						DUT & Accessory	SAR								Power Density										
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Ant Status	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)	Measured APD W/m ² (4cm ²)	Scaled APD W/m ² (4cm ²)	Grid Step [λ]	iPD [W/m ²]	Scaling Factor for Measurement Uncertainty	Averaging Area [cm ²]	Power Drift [dB]	Normal psPD [W/m ²]	Scaled Normal psPD [W/m ²]	Total psPD [W/m ²]	Scaled Total psPD [W/m ²]
6	UNII-5	802.11ax HE160	Bottom	0	15	Ant 0	97.00	1.03	10.00	9.99	1.00	-0.05	0.582	0.60	3.52	3.63			-				-		-
	UNII-5	802.11ax HE160	Bottom	0	15	Ant 1	97.70	1.02	10.00	9.98	1.00	0.02	0.577	0.59	3.49	3.56			-				-		-
	UNII-5	802.11ax HE160	Bottom	0	15	Ant 0+1	98.00	1.02	13.00	12.99	1.00	0.06	0.749	0.76	4.53	4.62	0.25	8.41	1.545	4.00	0.03	1.86	2.93	1.99	3.14
	UNII-5	802.11ax HE160	Rear Face	0	15	Ant 0	97.00	1.03	10.00	9.99	1.00	0.04	0.187	0.19	1.13	1.16			-				-		-
	UNII-5	802.11ax HE160	Left Side	0	15	Ant 0	97.00	1.03	10.00	9.99	1.00	-0.14	0.027	0.03	0.165	0.17			-				-		-
	UNII-5	802.11ax HE160	Right Side	0	15	Ant 0	97.00	1.03	10.00	9.99	1.00	0	<0.001	0.00	<0.001	0.00			-				-		-
	UNII-5	802.11ax HE160	Top Side	0	15	Ant 0	97.00	1.03	10.00	9.99	1.00	0	<0.001	0.00	<0.001	0.00			-				-		-
	UNII-5	802.11ax HE160	Bottom Side	0	15	Ant 0	97.00	1.03	10.00	9.99	1.00	0.03	0.411	0.42	2.48	2.55			-				-		-
	UNII-5	802.11ax HE160	Rear Face	0	15	Ant 1	97.70	1.02	10.00	9.98	1.00	-0.14	0.108	0.11	0.654	0.67			-				-		-
	UNII-5	802.11ax HE160	Left Side	0	15	Ant 1	97.70	1.02	10.00	9.98	1.00	0	<0.001	0.00	<0.001	0.00			-				-		-
	UNII-5	802.11ax HE160	Right Side	0	15	Ant 1	97.70	1.02	10.00	9.98	1.00	0	<0.001	0.00	<0.001	0.00			-				-		-
	UNII-5	802.11ax HE160	Top Side	0	15	Ant 1	97.70	1.02	10.00	9.98	1.00	0	<0.001	0.00	<0.001	0.00			-				-		-
	UNII-5	802.11ax HE160	Bottom Side	0	15	Ant 1	97.70	1.02	10.00	9.98	1.00	0.03	0.532	0.54	3.22	3.28			-				-		-
	UNII-5	802.11ax HE160	Rear Face	0	15	Ant 0+1	98.00	1.02	13.00	12.99	1.00	0.18	0.16	0.16	0.968	0.99			-				-		-
	UNII-5	802.11ax HE160	Left Side	0	15	Ant 0+1	98.00	1.02	13.00	12.99	1.00	0.06	0.058	0.06	0.351	0.36			-				-		-
	UNII-5	802.11ax HE160	Right Side	0	15	Ant 0+1	98.00	1.02	13.00	12.99	1.00	0	<0.001	0.00	<0.001	0.00			-				-		-
	UNII-5	802.11ax HE160	Top Side	0	15	Ant 0+1	98.00	1.02	13.00	12.99	1.00	0	<0.001	0.00	<0.001	0.00			-				-		-
	UNII-5	802.11ax HE160	Bottom Side	0	15	Ant 0+1	98.00	1.02	13.00	12.99	1.00	-0.05	0.536	0.55	3.24	3.3			-				-		-
	UNII-5	802.11ax HE160	Bottom	0	47	Ant 0+1	98.00	1.02	13.00	12.97	1.01	0.15	0.569	0.59	3.44	3.54			-				-		-
	UNII-5	802.11ax HE160	Bottom	0	79	Ant 0+1	98.00	1.02	13.00	12.94	1.01	0.17	0.705	0.73	4.26	4.39			-				-		-
UNII-6	802.11ax HE160	Bottom	0	111	Ant 0+1	98.00	1.02	13.00	12.96	1.01	0.01	0.712	0.73	4.23	4.36			-				-		-	
UNII-7	802.11ax HE160	Bottom	0	143	Ant 0+1	98.00	1.02	13.00	12.97	1.01	0.11	0.732	0.75	4.47	4.6			-				-		-	
UNII-7	802.11ax HE160	Bottom	0	175	Ant 0+1	98.00	1.02	13.00	12.97	1.01	0.07	0.723	0.74	4.37	4.5			-				-		-	
UNII-8	802.11ax HE160	Bottom	0	207	Ant 0+1	98.00	1.02	13.00	12.95	1.01	0.08	0.615	0.63	3.72	3.83			-				-		-	

Appendix H. Analysis of Simultaneous Transmission.

The analysis of simultaneous transmission SAR are shown as below.

<Possibilities of Simultaneous Transmission>

The simultaneous transmission possibilities for this device are listed as below.

Simultaneous TX Combination	Capable Transmit Configurations	Body Exposure Condition
A	WLAN 2.4G + BT	Yes
B	WLAN 5G + BT	Yes
C	WLAN 6G + BT	Yes

Notes

1. The WLAN 2.4G, WLAN 5G and WLAN 6G cannot transmit simultaneously.

Simultaneous Transmission SAR Evaluation (Body)							
Position	1	2	3	4	A (1 + 4)	B (2 + 4)	C (3 + 4)
	Max WLAN 2.4GHz	Max WLAN 5GHz	Max WLAN 6E	BT Ant 1	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg
	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg			
Bottom	1.18	1.12	0.76	0.36	1.54	1.48	1.12
Rear Face	0.36	0.27	0.19	0.13	0.49	0.40	0.32
Left Side	0.26	0.08	0.06	0.00	0.26	0.08	0.06
Right Side	0.23	0.06	0.00	0.00	0.23	0.06	0.00
Top Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Bottom Side	1.12	1.09	0.55	0.22	1.34	1.31	0.77