



# FCC RF Test Report

**APPLICANT** : ASUSTeK COMPUTER INC.  
**EQUIPMENT** : ASUS Phone  
**BRAND NAME** : ASUS  
**MODEL NAME** : ASUS\_Z01GD  
**FCC ID** : MSQZ01GD  
**STANDARD** : FCC Part 15 Subpart E §15.407  
**CLASSIFICATION** : (NII) Unlicensed National Information Infrastructure

The product was received on Apr. 08, 2017 and testing was completed on Jul. 12, 2017. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : MSQZ01GD

Page Number : 1 of 33

Report Issued Date : Aug. 09, 2017

Report Version : Rev. 01

Report Template No.: BU5-FR15EWLB4 AC MA Version 1.5



# TABLE OF CONTENTS

- 1 GENERAL DESCRIPTION ..... 5**
  - 1.1 Applicant ..... 5
  - 1.2 Manufacturer ..... 5
  - 1.3 Product Feature of Equipment Under Test ..... 5
  - 1.4 Modification of EUT ..... 6
  - 1.5 Testing Location ..... 7
  - 1.6 Applicable Standards ..... 7
- 2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 8**
  - 2.1 Carrier Frequency and Channel ..... 8
  - 2.2 Test Mode ..... 9
  - 2.3 Connection Diagram of Test System ..... 10
  - 2.4 Support Unit used in test configuration and system ..... 10
  - 2.5 EUT Operation Test Setup ..... 11
  - 2.6 Measurement Results Explanation Example ..... 11
- 3 TEST RESULT ..... 12**
  - 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement ..... 12
  - 3.2 Maximum Conducted Output Power Measurement ..... 15
  - 3.3 Power Spectral Density Measurement ..... 16
  - 3.4 Unwanted Emissions Measurement ..... 19
  - 3.5 AC Conducted Emission Measurement ..... 25
  - 3.6 Frequency Stability Measurement ..... 29
  - 3.7 Automatically Discontinue Transmission ..... 30
  - 3.8 Antenna Requirements ..... 31
- 4 LIST OF MEASURING EQUIPMENT ..... 32**
- 5 UNCERTAINTY OF EVALUATION ..... 33**
- APPENDIX A. CONDUCTED TEST RESULTS**
- APPENDIX B. RADIATED SPURIOUS EMISSION**
- APPENDIX C. RADIATED SPURIOUS EMISSION PLOTS**
- APPENDIX D. DUTY CYCLE PLOTS**
- APPENDIX E. SETUP PHOTOGRAPHS**



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR740840F	Rev. 01	Initial issue of report	Aug. 09, 2017



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB, 26dB and 99% Occupied Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 4.39 dB at 11510.000 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 14.5 dB at 0.158 MHz
3.6	15.407(g)	Frequency Stability	Within Operation Band	Pass	-
3.7	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.8	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

ASUSTeK COMPUTER INC.

4F, No. 150, LI-TE RD., PEITOU, TAIPEI, TAIWAN

## 1.2 Manufacturer

COTEK ELECTRONICS (SUZHOU) CO., LTD.

No.288, Mayun Road, Suzhou Hi-and-New Tech Park, Jiangsu, PRC

## 1.3 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n/ac, FM Receiver, NFC, and GPS

Product Specification subjective to this standard	
Sample 1	EUT with SKU 1
Sample 2	EUT with SKU 2
Sample 3	EUT with SKU 3
Sample 4	EUT with SKU 4
Sample 5	EUT with SKU 5
Sample 6	EUT with SKU 6
Antenna Type	WWAN: PIFA Antenna WLAN: PIFA Antenna Bluetooth: PIFA Antenna GPS / Glonass / BDS / Galileo: PIFA Antenna NFC: Loop Antenna



<Sample Information>

SKU MB	SKU1	SKU2
DDR4X	6G/ Hynix	6G/ Hynix
UFS 2.1	128G/ Samsung	64G/ Toshiba
CPU	MSM-8998-1-885MPSP-TR-02-0-AB	
TP Module	TIANMA/TA055VVHM08-03 ON CELL	TIANMA//TA055VVHM09-03 ON CELL
Front Camera (8M)	CAMERA MODULE 8M AF (SonyIMX319, XPT 85B-BC28-SU,KT F6518)	
Rear Camera (12+16M)	DUAL CAMERA MODULE 12M+16M/SEMCO/MOMDM82PG3A V0.0	
Battery	ZS551KL BAT/ATL POLY/C11P1701/SMP/PS414997/1S1P/3.85V/13.8WH	

SKU MB	SKU3	SKU4
DDR4X	4G/ Hynix	6G/ Hynix
UFS 2.1	64G/ Toshiba	64G/ Samsung
CPU	MSM-8998-1-885MPSP-TR-02-0-AB	
TP Module	TIANMA/TA055VVHM09-03 ON CELL	TIANMA/TA055VVHM08-00 ON CELL
Front Camera (8M)	CAMERA MODULE 8M AF (SonyIMX319, XPT 85B-BC28-SU,KT F6518)	
Rear Camera (12+16M)	DUAL CAMERA MODULE 12M+16M/SEMCO/MOMDM82PG3A V0.0	
Battery	ZS551KL BAT/ATL POLY/C11P1701/SMP/PS414997/1S1P/3.85V/13.8WH	

1.

SKU MB	SKU5	SKU6
DDR4X	6G Hynix	6G Hynix
UFS 2.1	128G Toshiba	UFS 2.0 64G Toshiba
CPU	MSM-8998-1-885MPSP-TR-02-0-AB	
TP Module	TIANMA/TA055VVHM09-05 ON CELL	
Front Camera (8M)	CAMERA MODULE 8M AF (SonyIMX319, XPT 85B-BC28-SU,KT F6518)	
Rear Camera (12+16M)	DUAL CAMERA MODULE 12M+16M/SEMCO/MOMDM82PG3A V0.0	
Battery	ZS551KL BAT/ATL POLY/C11P1701/SMP/PS414997/1S1P/3.85V/13.8WH	

## 1.4 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.5 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW 0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.	
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	TH05-HY	CO05-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.	
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	03CH11-HY	

**Note:** The test site complies with ANSI C63.4 2014 requirement.

### 1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart E
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04
- FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
  
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5745-5825 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	5825

**Note:**

- 1. The above Frequency and Channel in "\*" were 802.11n HT40 and 802.11ac VHT40.
- 2. The above Frequency and Channel in "#n" were 802.11ac VHT80.



## 2.2 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates as below table.


Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0

AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link (5G) + SD (play MP3) + NB USB Cable 1 Data Link to EUT (eMMC) + Earphone for Sample 3
-----------------------	--

Ch. #		Band IV : 5745-5825 MHz		
		802.11a	802.11n HT20	802.11n HT40
L	Low	149	149	151
M	Middle	157	157	-
H	High	165	165	159

Ch. #		Band IV : 5745-5825 MHz
		802.11ac VHT80
L	Low	-
M	Middle	155
H	High	-

### 2.3 Connection Diagram of Test System

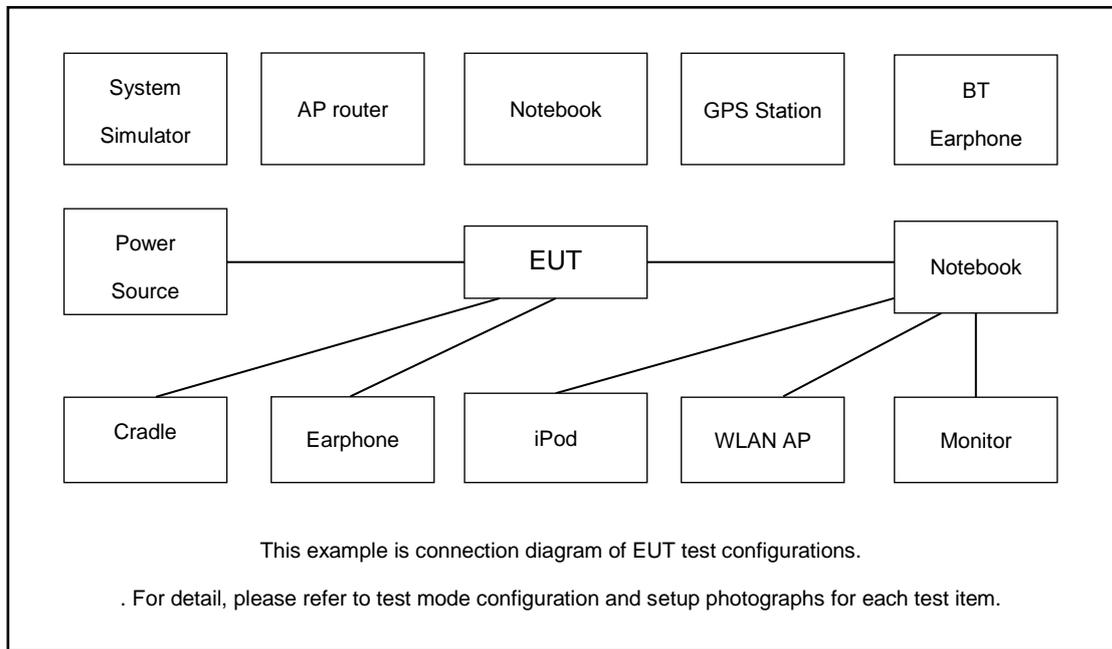

### 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
3.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8m
4.	iPod	Apple	A1285	FCC DoC	Shielded, 1.0 m	N/A
5.	Notebook	DELL	P20G	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
6.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
7.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A



## 2.5 EUT Operation Test Setup

The RF test items, programmed RF utility, “QRCT” installed in the notebook make the EUT provide functions like channel selection and power level for continuous transmitting and receiving signals.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor=26.9.*

*Offset(dB) = RF cable loss(dB) + attenuator factor(dB).*  
*= 4.2 + 10 = 14.2 (dB)*

### 3 Test Result

#### 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

##### 3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.  
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.



##### 3.1.4 Test Setup

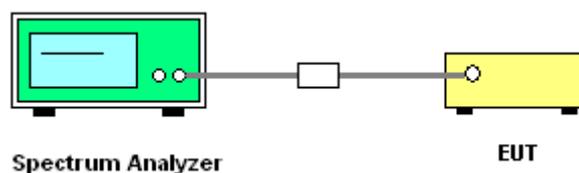




### 3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

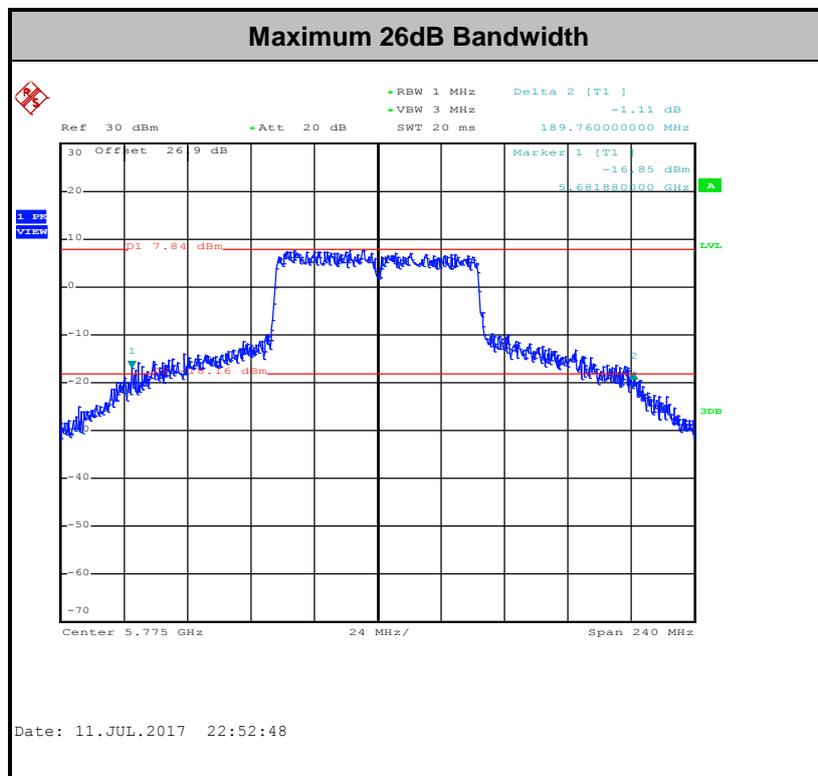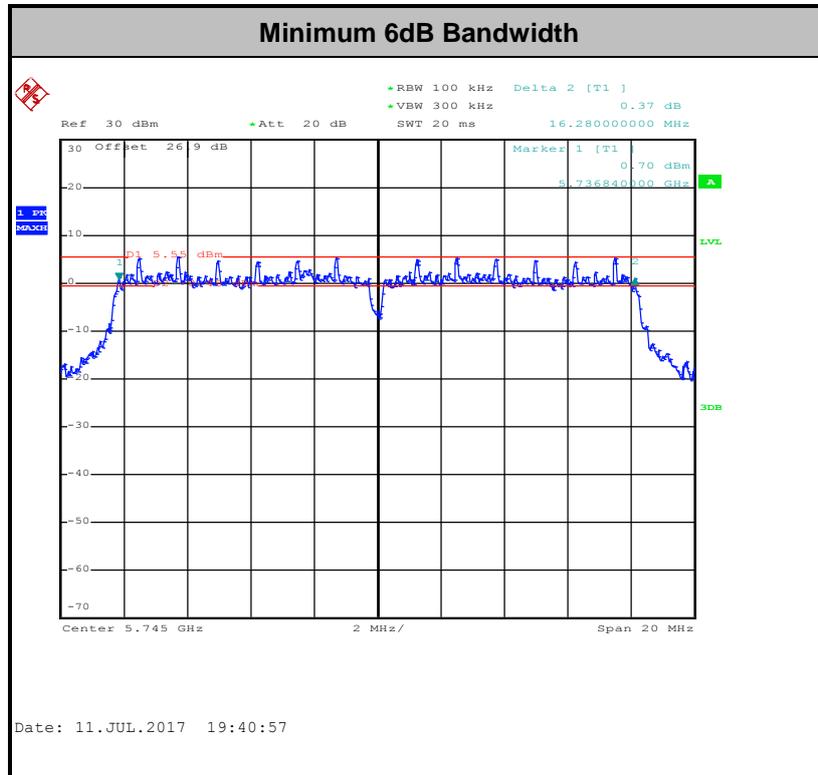

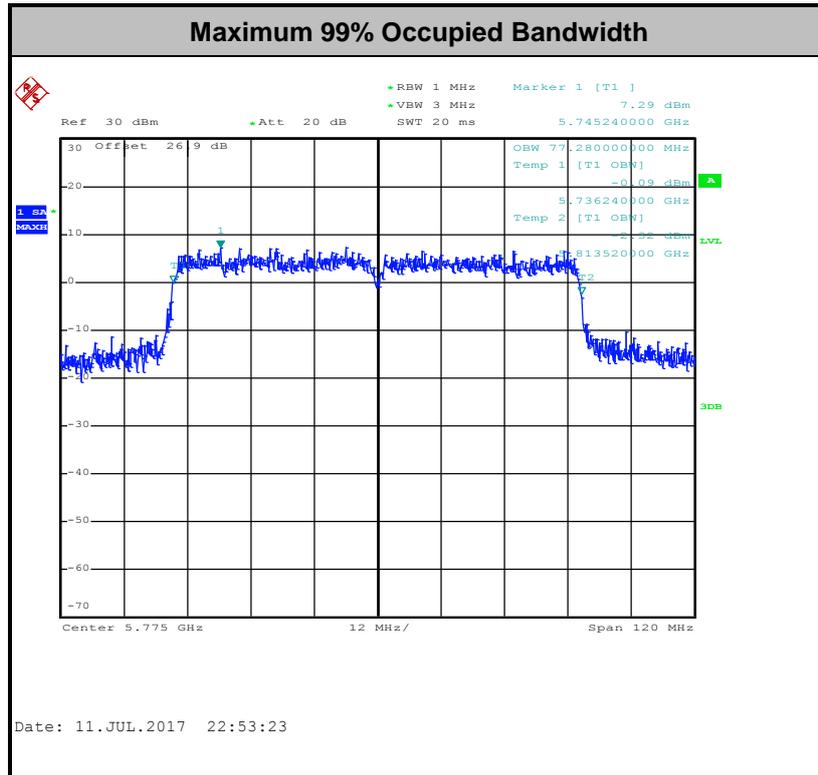

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Maximum Conducted Output Power Measurement

### 3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


### 3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where  $x$  is the duty cycle.

### 3.2.4 Test Setup

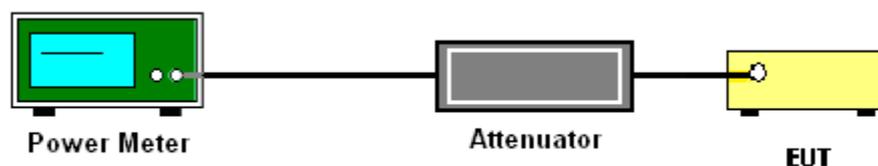

### 3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section F) Maximum power spectral density.

##### # Method SA-2 #

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz.
- Set VBW  $\geq$  1 MHz.
- Number of points in sweep  $\geq$  2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add  $10 \log(500\text{kHz}/\text{RBW})$  to the test result.
- Add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (c): Measure and add  $10 \log(N_{\text{ANT}})$  dB.

With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity  $10 \log(N_{\text{ANT}})$  dB is added to each spectrum value before comparing to the emission limit. The addition of  $10 \log(N_{\text{ANT}})$  dB serves to apportion the emission limit among the  $N_{\text{ANT}}$  outputs so that each output is permitted to contribute no more than  $1/N_{\text{ANT}}^{\text{th}}$  of the PSD limit.


### 3.3.4 Test Setup

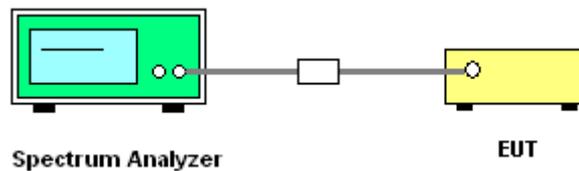



### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

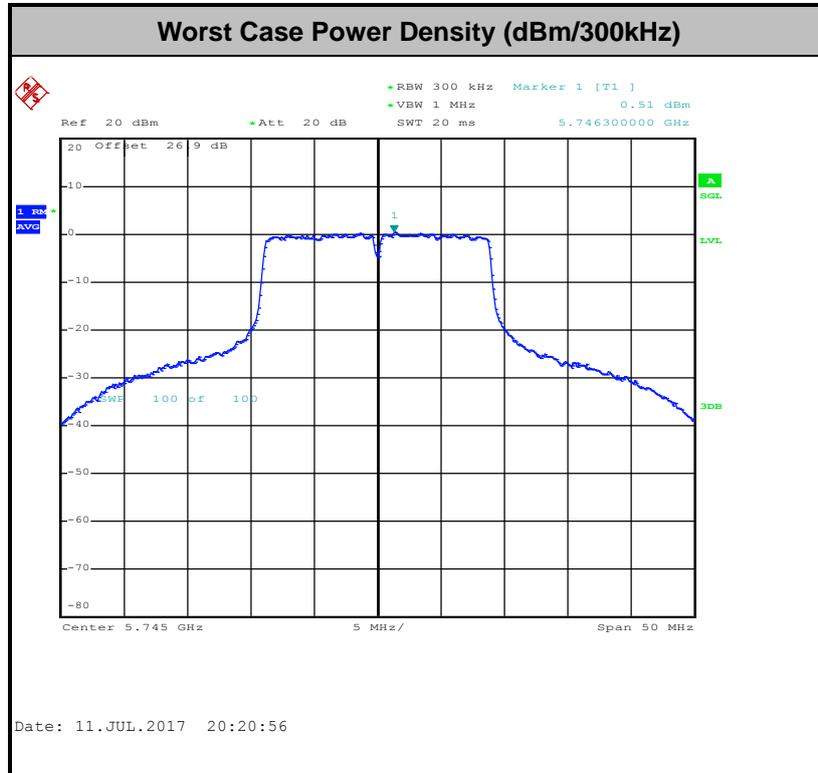



### 3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part15.205.

#### 3.4.1 Limit of Unwanted Emissions

(1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(2) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

**Note:** The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$



EIRP (dBm)	Field Strength at 3m (dBμV/m)
-17	78.3
- 27	68.3

(3) KDB789033 D02 v01r04 G)2)c)

- (i) Section 15.407(b)(1) to (b)(3) specify the unwanted emission limits for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.<sup>3</sup>
- (ii) Section 15.407(b)(4) specifies the unwanted emission limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are in terms of a Peak detector. An alternative to the band emissions mask is specified in Section 15.407(b)(4)(ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the devices using the alternative limit.<sup>4</sup>

**Note 3:** An out-of-band emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit.

**Note 4:** Only devices with antenna gains of 10 dBi or less may be approved using the emission limits specified in Section 15.247(d) till March 2, 2018; all other devices operating in this band must use the mask specified in Section 15.407(b)(4)(i).



### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW  $\geq$  3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold


(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW  $\geq$  1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 3.4.4 Test Setup


For radiated emissions below 30MHz

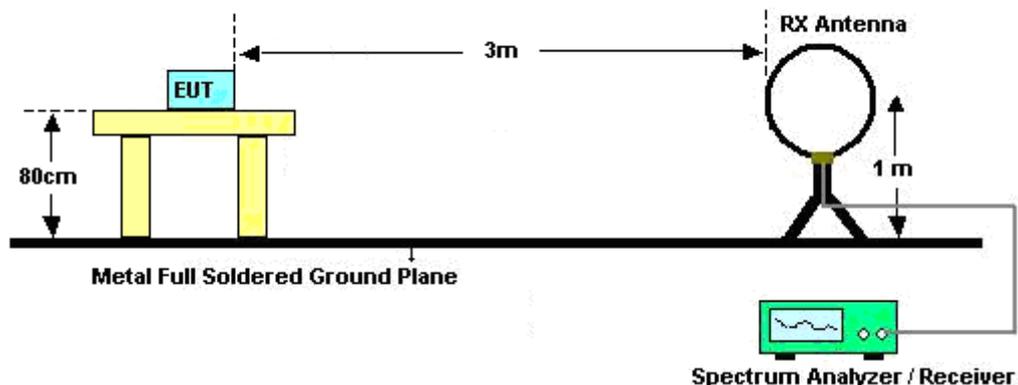

For radiated emissions from 30MHz to 1GHz

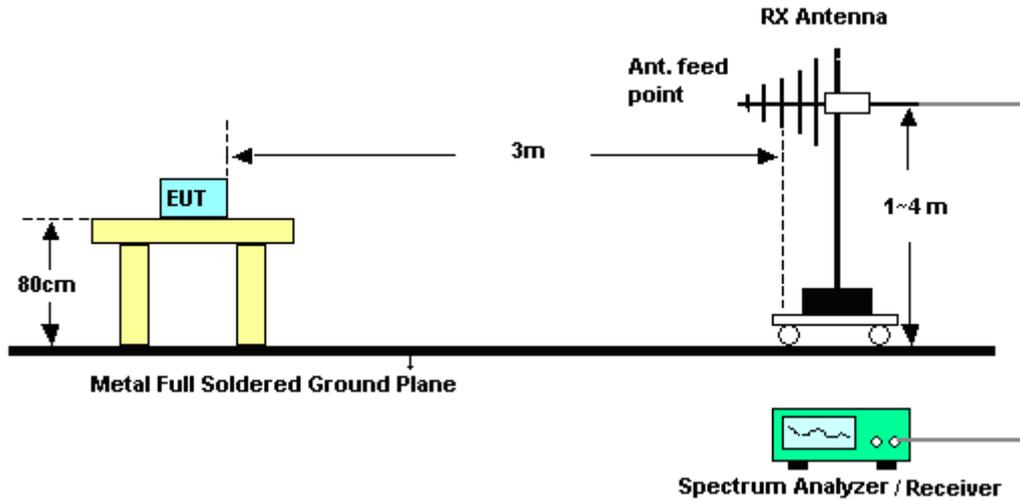

For radiated emissions above 1GHz

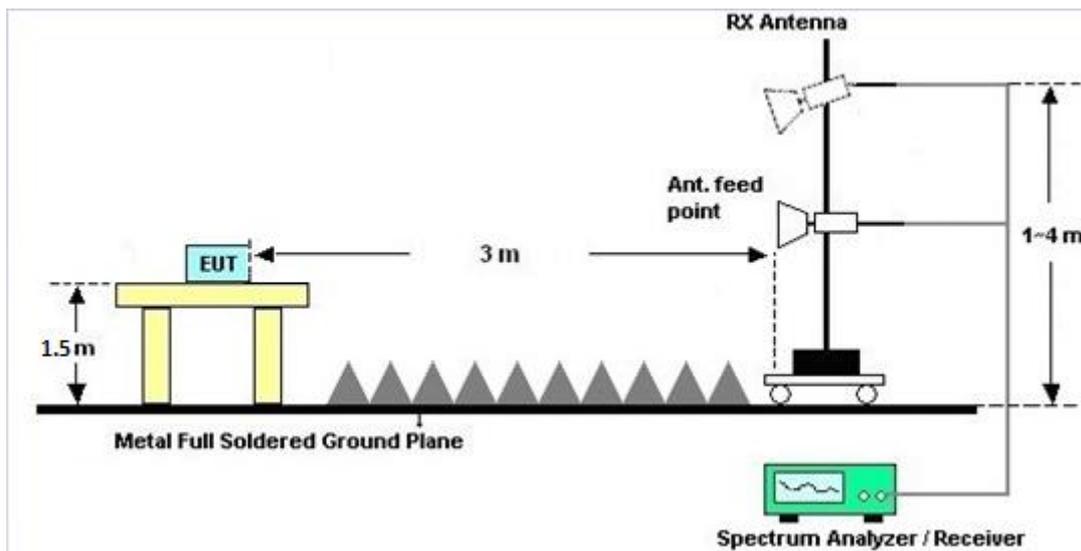



### **3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

### **3.4.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix B and C.

### **3.4.7 Duty Cycle**

Please refer to Appendix D.

### **3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)**

Please refer to Appendix B and C.



### 3.5 AC Conducted Emission Measurement

#### 3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.5.4 Test Setup

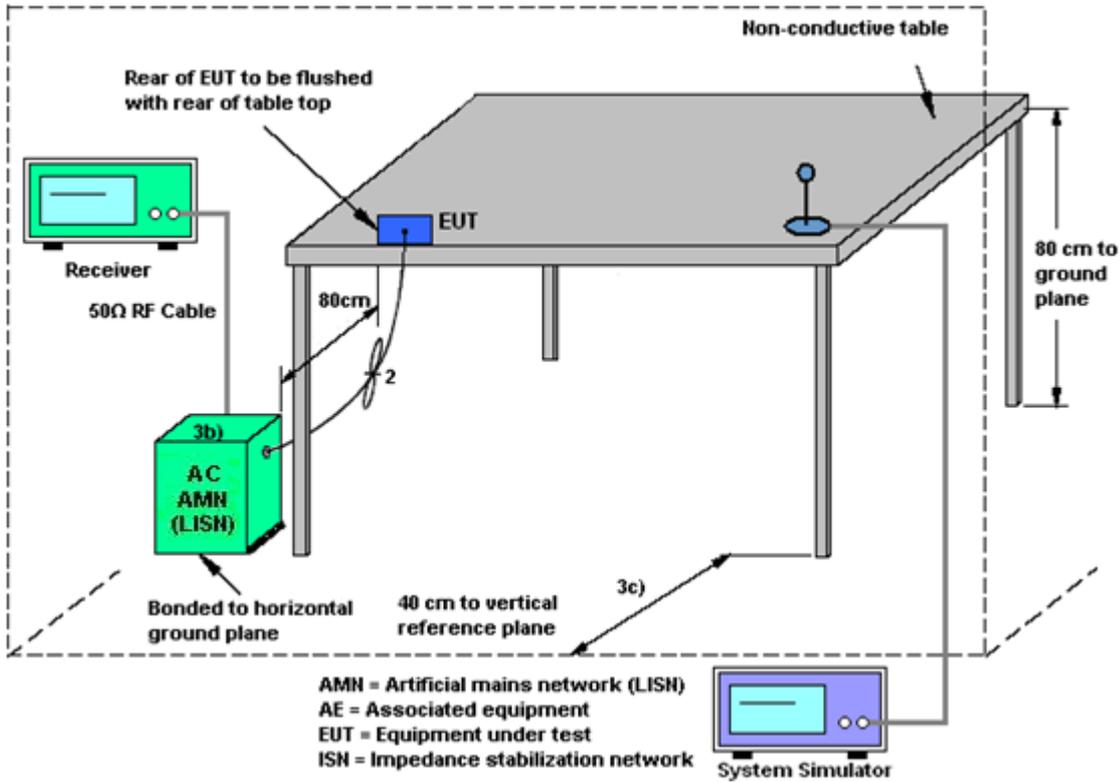




3.5.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	21~25°C
Test Engineer :	Kai-Chun Chu	Relative Humidity :	51~55%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link (5G) + SD (play MP3) + NB USB Cable 1 Data Link to EUT (eMMC) + Earphone for Sample 3		

ENV216 Auto Test-L

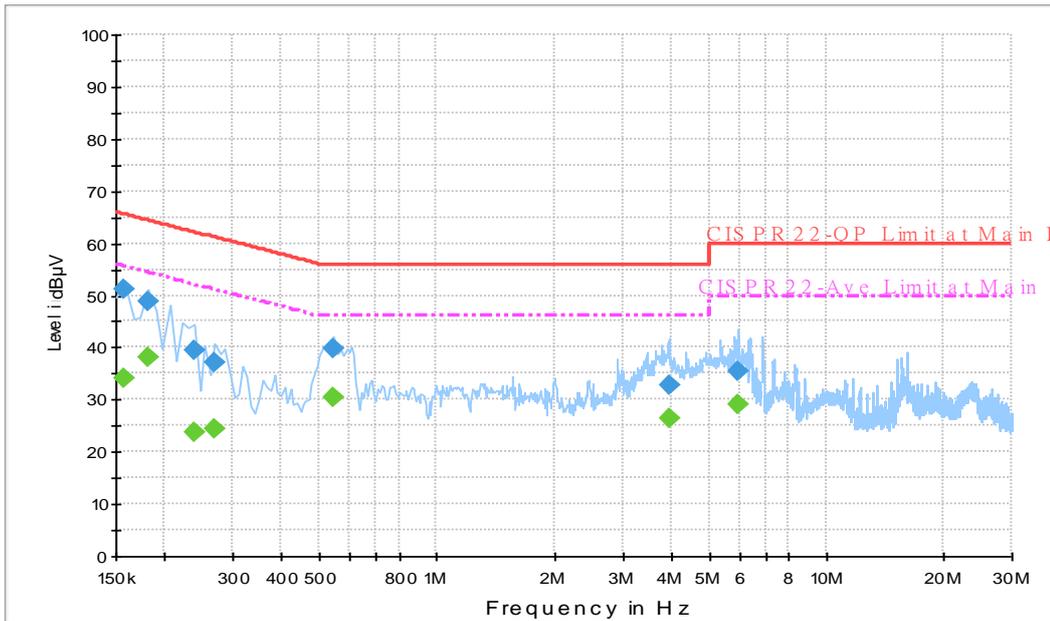

Final Result : QuasiPeak

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.158000	51.1	Off	L1	19.5	14.5	65.6
0.182000	48.9	Off	L1	19.5	15.5	64.4
0.238000	39.3	Off	L1	19.5	22.9	62.2
0.270000	37.0	Off	L1	19.5	24.1	61.1
0.542000	39.7	Off	L1	19.5	16.3	56.0
3.942000	32.6	Off	L1	19.6	23.4	56.0
5.966000	35.5	Off	L1	19.6	24.5	60.0


Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.158000	34.0	Off	L1	19.5	21.6	55.6
0.182000	38.1	Off	L1	19.5	16.3	54.4
0.238000	23.8	Off	L1	19.5	28.4	52.2
0.270000	24.5	Off	L1	19.5	26.6	51.1
0.542000	30.5	Off	L1	19.5	15.5	46.0
3.942000	26.5	Off	L1	19.6	19.5	46.0
5.966000	29.1	Off	L1	19.6	20.9	50.0



Test Mode :	Mode 1	Temperature :	21~25°C
Test Engineer :	Kai-Chun Chu	Relative Humidity :	51~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link (5G) + SD (play MP3) + NB USB Cable 1 Data Link to EUT (eMMC) + Earphone for Sample 3		

ENV216 Auto Test-N

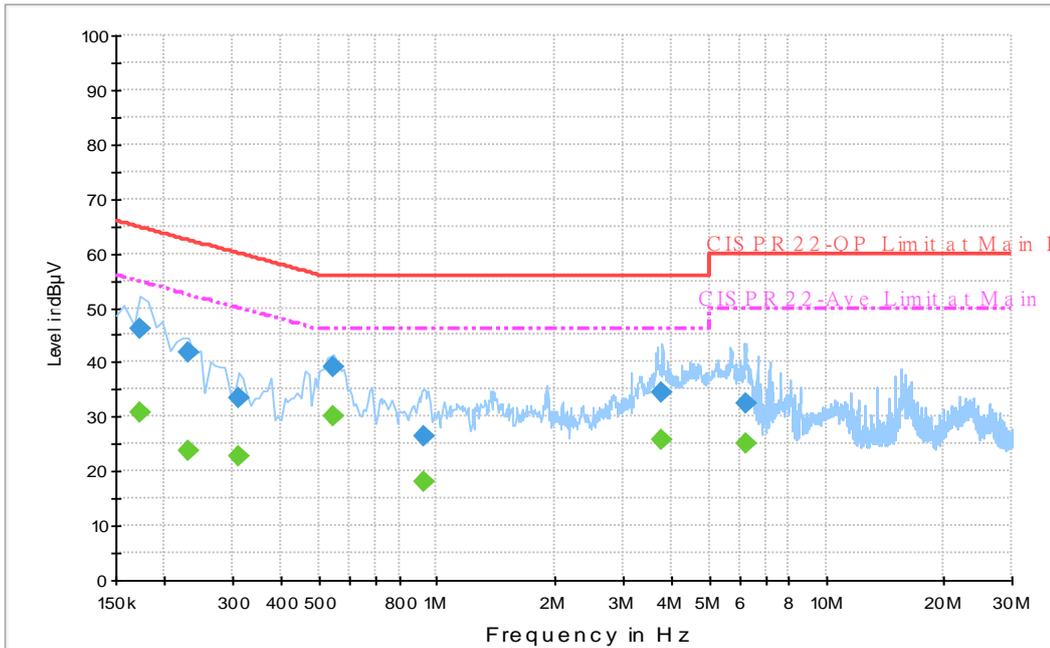

Final Result : QuasiPeak

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.174000	46.2	Off	N	19.5	18.6	64.8
0.230000	41.7	Off	N	19.5	20.7	62.4
0.310000	33.5	Off	N	19.5	26.5	60.0
0.542000	39.2	Off	N	19.5	16.8	56.0
0.926000	26.5	Off	N	19.5	29.5	56.0
3.798000	34.3	Off	N	19.6	21.7	56.0
6.222000	32.5	Off	N	19.6	27.5	60.0

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.174000	30.7	Off	N	19.5	24.1	54.8
0.230000	23.7	Off	N	19.5	28.7	52.4
0.310000	22.8	Off	N	19.5	27.2	50.0
0.542000	30.3	Off	N	19.5	15.7	46.0
0.926000	18.0	Off	N	19.5	28.0	46.0
3.798000	25.8	Off	N	19.6	20.2	46.0
6.222000	25.0	Off	N	19.6	25.0	50.0

### 3.6 Frequency Stability Measurement

#### 3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


#### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.6.3 Test Procedures

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

#### 3.6.4 Test Setup

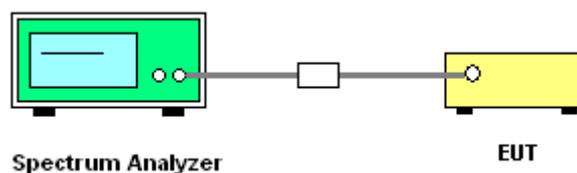

#### 3.6.5 Test Result of Frequency Stability

Please refer to Appendix A.



## **3.7 Automatically Discontinue Transmission**

### **3.7.1 Limit of Automatically Discontinue Transmission**

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

### **3.7.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

### **3.7.3 Test Result of Automatically Discontinue Transmission**

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



### 3.8 Antenna Requirements

#### 3.8.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.8.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

#### 3.8.3 Antenna Gain

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain =  $G_{ANT} + \text{Array Gain}$ , where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain =  $10 \log(N_{ANT}/N_{SS}=1)$  dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ .

Directional gain may be calculated by using the formulas applicable to equal gain antennas with  $G_{ANT}$  set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain  $G_{ANT}$  is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<PTP>

	Ant 1 (dBi)	Ant 2 (dBi)	DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
Band IV	0.30	-1.40	0.30	2.50	0.00	0.00

$\text{Power Limit Reduction} = \text{Floor} [ (DG(\text{Power}) - 6) / 3 ] \text{ dBi, ( min = 0 )}$

$\text{PSD Limit Reduction} = \text{Floor} [ (DG(\text{PSD}) - 6) / 3 ] \text{ dBi, ( min = 0 )}$



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	0932001	300MHz~40GHz	Sep. 29, 2016	Jul. 06, 2017~ Jul. 12, 2017	Sep. 28, 2017	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	0846202	300MHz~40GHz	Sep. 29, 2016	Jul. 06, 2017~ Jul. 12, 2017	Sep. 28, 2017	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz-40GHz	Jul. 17, 2016	Jul. 06, 2017~ Jul. 12, 2017	Jul. 16, 2017	Conducted (TH05-HY)
Temperature Chamber	ESPEC	SH-641	92013720	-40°C ~90°C	Sep. 01, 2016	Jul. 06, 2017~ Jul. 12, 2017	Aug. 31, 2017	Conducted (TH05-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890094	1V~20V 0.5A~5A	Oct. 11, 2016	Jul. 06, 2017~ Jul. 12, 2017	Oct. 10, 2017	Conducted (TH05-HY)
AC Power Source	AC POWER	AFC-500W	F104070011	50Hz~60Hz	Dec 01.2016	Jul. 06, 2017~ Jul. 12, 2017	Nov 30 2017	Conducted (TH05-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Nov. 10, 2016	Jun. 17, 2017~ Jul. 06, 2017	Nov. 09, 2017	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D&N-6-06	35414&AT-N 0602	30MHz~1GHz	Oct. 15, 2016	Jun. 17, 2017~ Jul. 06, 2017	Oct. 14, 2017	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1326	1GHz ~ 18GHz	Oct. 07, 2016	Jun. 17, 2017~ Jul. 06, 2017	Oct. 06, 2017	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Oct. 20, 2016	Jun. 17, 2017~ Jul. 06, 2017	Oct. 19, 2018	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Nov. 10, 2016	Jun. 17, 2017~ Jul. 06, 2017	Nov. 09, 2017	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz ~ 44GHz	Oct. 12, 2016	Jun. 17, 2017~ Jul. 06, 2017	Oct. 11, 2017	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Jun. 17, 2017~ Jul. 06, 2017	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Jun. 17, 2017~ Jul. 06, 2017	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jun. 17, 2017~ Jul. 06, 2017	N/A	Radiation (03CH11-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800	2025787	1GHz~18GHz	Feb. 13, 2017	Jun. 17, 2017~ Jul. 06, 2017	Feb. 12, 2018	Radiation (03CH11-HY)
Preamplifier	MITEQ	TTA 1840-35-HG	1887435	18GHz ~ 40GHz	Oct. 13, 2016	Jun. 17, 2017~ Jul. 06, 2017	Oct. 12, 2017	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA917058 4	18GHz- 40GHz	Nov. 08, 2016	Jun. 17, 2017~ Jul. 06, 2017	Nov. 07, 2017	Radiation (03CH11-HY)
EMI Test Receiver	Agilent	N9038A(MXE)	MY53290053	20Hz to 26.5GHz	Jan. 12, 2017	Jun. 17, 2017~ Jul. 06, 2017	Jan. 11, 2018	Radiation (03CH11-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jun. 16, 2017	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 30, 2016	Jun. 16, 2017	Aug. 29, 2017	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 29, 2016	Jun. 16, 2017	Nov. 28, 2017	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Dec. 06, 2016	Jun. 16, 2017	Dec. 05, 2017	Conduction (CO05-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.7 dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.2 dB
---	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.5 dB
---	--------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.2 dB
---	--------



## **Appendix A. Conducted Test Results**

Test Engineer:	Allen Lin	Temperature:	21~25	°C
Test Date:	2017/7/6~2017/7/12	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 26dB EBW and 99% OBW**

Band IV													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	149	5745	18.40	18.70	39.05	38.60	16.28	16.28	0.5		Pass
11a	6Mbps	2	157	5785	18.40	18.75	39.20	39.90	16.28	16.30	0.5		Pass
11a	6Mbps	2	165	5825	20.05	20.90	42.70	42.75	16.32	16.30	0.5		Pass
HT20	MCS0	2	149	5745	19.65	21.55	44.00	45.00	17.60	17.52	0.5		Pass
HT20	MCS0	2	157	5785	20.60	21.95	44.65	45.80	17.56	17.52	0.5		Pass
HT20	MCS0	2	165	5825	24.30	26.85	47.10	48.15	17.56	17.54	0.5		Pass
HT40	MCS0	2	151	5755	51.40	51.30	99.02	99.08	36.28	36.40	0.5		Pass
HT40	MCS0	2	159	5795	51.40	56.00	99.84	101.42	36.36	36.32	0.5		Pass
VHT80	MCS0	2	155	5775	77.04	77.28	174.63	189.76	75.68	75.04	0.5		Pass

**TEST RESULTS DATA**  
**Average Power Table**

Band IV														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	0.26	0.22	16.74	16.27		30.00	30.00	0.30	-1.40	Pass
11a	6Mbps	1	157	5785	0.26	0.22	16.96	16.21		30.00	30.00	0.30	-1.40	Pass
11a	6Mbps	1	165	5825	0.26	0.22	16.99	16.44		30.00	30.00	0.30	-1.40	Pass
HT20	MCS0	1	149	5745	0.26	0.26	17.30	16.86		30.00	30.00	0.30	-1.40	Pass
HT20	MCS0	1	157	5785	0.26	0.26	17.42	16.77		30.00	30.00	0.30	-1.40	Pass
HT20	MCS0	1	165	5825	0.26	0.26	17.77	16.96		30.00	30.00	0.30	-1.40	Pass
HT40	MCS0	1	151	5755	0.50	0.44	18.34	18.33		30.00	30.00	0.30	-1.40	Pass
HT40	MCS0	1	159	5795	0.50	0.44	18.68	17.80		30.00	30.00	0.30	-1.40	Pass
VHT20	MCS0	1	149	5745	0.24	0.24	17.28	16.83		30.00	30.00	0.30	-1.40	Pass
VHT20	MCS0	1	157	5785	0.24	0.24	17.39	16.71		30.00	30.00	0.30	-1.40	Pass
VHT20	MCS0	1	165	5825	0.24	0.24	17.42	16.90		30.00	30.00	0.30	-1.40	Pass
VHT40	MCS0	1	151	5755	0.42	0.49	18.28	17.85		30.00	30.00	0.30	-1.40	Pass
VHT40	MCS0	1	159	5795	0.42	0.49	18.46	17.72		30.00	30.00	0.30	-1.40	Pass
VHT80	MCS0	1	155	5775	0.67	0.60	17.97	17.20		30.00	30.00	0.30	-1.40	Pass
11a	6Mbps	2	149	5745	0.22	0.22	17.18	16.58	19.91	30.00		0.30		Pass
11a	6Mbps	2	157	5785	0.22	0.22	17.36	16.52	19.97	30.00		0.30		Pass
11a	6Mbps	2	165	5825	0.22	0.22	17.72	16.73	20.27	30.00		0.30		Pass
HT20	MCS0	2	149	5745	0.26	0.24	17.64	17.21	20.44	30.00		0.30		Pass
HT20	MCS0	2	157	5785	0.26	0.24	17.80	17.08	20.47	30.00		0.30		Pass
HT20	MCS0	2	165	5825	0.26	0.24	18.02	17.23	20.66	30.00		0.30		Pass
HT40	MCS0	2	151	5755	0.44	0.47	18.80	18.47	21.65	30.00		0.30		Pass
HT40	MCS0	2	159	5795	0.44	0.47	19.17	18.22	21.73	30.00		0.30		Pass
VHT20	MCS0	2	149	5745	0.24	0.24	17.32	16.88	20.12	30.00		0.30		Pass
VHT20	MCS0	2	157	5785	0.24	0.24	17.51	16.72	20.14	30.00		0.30		Pass
VHT20	MCS0	2	165	5825	0.24	0.24	17.81	16.84	20.36	30.00		0.30		Pass
VHT40	MCS0	2	151	5755	0.47	0.45	18.79	18.45	21.63	30.00		0.30		Pass
VHT40	MCS0	2	159	5795	0.47	0.45	19.11	18.20	21.69	30.00		0.30		Pass
VHT80	MCS0	2	155	5775	0.67	0.62	18.09	17.62	20.87	30.00		0.30		Pass

**TEST RESULTS DATA**  
**Power Spectral Density**

Band IV																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	149	5745	0.22	0.22	2.22					5.38	30.00	2.50		Pass
11a	6Mbps	2	157	5785	0.22	0.22	2.22					5.51	30.00	2.50		Pass
11a	6Mbps	2	165	5825	0.22	0.22	2.22					5.59	30.00	2.50		Pass
HT20	MCS0	2	149	5745	0.26	0.24	2.22					6.00	30.00	2.50		Pass
HT20	MCS0	2	157	5785	0.26	0.24	2.22					5.86	30.00	2.50		Pass
HT20	MCS0	2	165	5825	0.26	0.24	2.22					5.91	30.00	2.50		Pass
HT40	MCS0	2	151	5755	0.44	0.47	2.22					4.11	30.00	2.50		Pass
HT40	MCS0	2	159	5795	0.44	0.47	2.22					4.38	30.00	2.50		Pass
VHT80	MCS0	2	155	5775	0.67	0.62	2.22					0.50	30.00	2.50		Pass

**TEST RESULTS DATA**  
**Frequency Stability**

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)	Note
11a	6Mbps	1	149	5745	5744.950	-0.050	-8.70	50	3.85	
11a	6Mbps	1	149	5745	5745.050	0.050	8.70	-30	3.85	
11a	6Mbps	1	149	5745	5745.000	0.000	0.00	20	4.2	
11a	6Mbps	1	149	5745	5745.000	0.000	0.00	20	3.6	
11a	6Mbps	1	149	5745	5744.950	-0.050	-8.70	20	3.85	



# Appendix B. Radiated Spurious Emission

## Band 4 - 5725~5850MHz

### WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11a CH 149 5745MHz		5639.8	49.67	-18.53	68.2	40.46	32.73	9.58	33.1	227	71	P	H
		5679	51.53	-38.17	89.7	42.16	32.81	9.67	33.11	227	71	P	H
		5720	58.75	-52.05	110.8	49.12	32.94	9.82	33.13	227	71	P	H
		5723.2	63.03	-55.07	118.1	53.4	32.94	9.82	33.13	227	71	P	H
	*	5745	110.25	-	-	100.55	32.98	9.87	33.15	227	71	P	H
	*	5745	102.6	-	-	92.9	32.98	9.87	33.15	227	71	A	H
		5646.8	50.6	-17.6	68.2	41.35	32.73	9.62	33.1	106	107	P	V
		5696.4	50.52	-52.03	102.55	41.06	32.86	9.72	33.12	106	107	P	V
		5720	56.26	-54.54	110.8	46.63	32.94	9.82	33.13	106	107	P	V
		5725	61.41	-60.79	122.2	51.78	32.94	9.82	33.13	106	107	P	V
	*	5745	104.8	-	-	95.1	32.98	9.87	33.15	106	107	P	V
	*	5745	97.77	-	-	88.07	32.98	9.87	33.15	106	107	A	V



WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 157 5785MHz		5617.8	50.04	-18.16	68.2	40.9	32.69	9.53	33.08	226	69	P	H
		5691.2	50.03	-48.68	98.71	40.57	32.86	9.72	33.12	226	69	P	H
		5711.8	50.48	-58.03	108.51	40.94	32.9	9.77	33.13	226	69	P	H
		5720.2	50.67	-60.59	111.26	41.04	32.94	9.82	33.13	226	69	P	H
	*	5785	109.44	-	-	99.58	33.06	9.97	33.17	226	69	P	H
	*	5785	102.31	-	-	92.45	33.06	9.97	33.17	226	69	A	H
		5854.4	50.02	-62.15	112.17	39.92	33.27	10.02	33.19	226	69	P	H
		5867.2	51.25	-56.13	107.38	41.17	33.27	10.02	33.21	226	69	P	H
		5882.2	51.26	-48.59	99.85	41.14	33.31	10.02	33.21	226	69	P	H
		5932.4	49.16	-19.04	68.2	38.94	33.43	10.02	33.23	226	69	P	H
		5647.2	51.31	-16.89	68.2	42.06	32.73	9.62	33.1	100	107	P	V
		5685.2	50.99	-43.29	94.28	41.53	32.86	9.72	33.12	100	107	P	V
		5701.2	49.83	-55.71	105.54	40.28	32.9	9.77	33.12	100	107	P	V
		5720.8	50.35	-62.27	112.62	40.72	32.94	9.82	33.13	100	107	P	V
	*	5785	105.38	-	-	95.52	33.06	9.97	33.17	100	107	P	V
	*	5785	97.32	-	-	87.46	33.06	9.97	33.17	100	107	A	V
		5854.8	48.66	-62.6	111.26	38.56	33.27	10.02	33.19	100	107	P	V
		5869.6	49.76	-56.95	106.71	39.68	33.27	10.02	33.21	100	107	P	V
		5876.6	50.84	-53.17	104.01	40.72	33.31	10.02	33.21	100	107	P	V
		5938	49.69	-18.51	68.2	39.48	33.43	10.02	33.24	100	107	P	V



WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11a CH 165 5825MHz	*	5825	109.93	-	-	99.9	33.19	10.02	33.18	228	70	P	H
	*	5825	102.76	-	-	92.73	33.19	10.02	33.18	228	70	A	H
		5850	58.45	-63.75	122.2	48.39	33.23	10.02	33.19	228	70	P	H
		5855.8	56.83	-53.75	110.58	46.73	33.27	10.02	33.19	228	70	P	H
		5877.8	51.53	-51.59	103.12	41.41	33.31	10.02	33.21	228	70	P	H
		5932.6	50.57	-17.63	68.2	40.35	33.43	10.02	33.23	228	70	P	H
	*	5825	105.22	-	-	95.19	33.19	10.02	33.18	100	109	P	V
	*	5825	97.25	-	-	87.22	33.19	10.02	33.18	100	109	A	V
		5850.6	58.44	-62.39	120.83	48.38	33.23	10.02	33.19	100	109	P	V
		5855	52.85	-57.95	110.8	42.75	33.27	10.02	33.19	100	109	P	V
		5878	51.06	-51.91	102.97	40.94	33.31	10.02	33.21	100	109	P	V
		5938	50.34	-17.86	68.2	40.13	33.43	10.02	33.24	100	109	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11a CH 149 5745MHz		11490	58.17	-15.83	74	68.96	38.52	15.8	65.39	100	322	P	H
		11490	48.73	-5.27	54	59.52	38.52	15.8	65.39	100	322	A	H
		17235	57.7	-10.5	68.2	60.99	40.76	19.86	64.27	100	0	P	H
		11490	58.33	-15.67	74	69.12	38.52	15.8	65.39	100	329	P	V
		11490	49.23	-4.77	54	60.02	38.52	15.8	65.39	100	329	A	V
		17235	59.39	-8.81	68.2	62.68	40.76	19.86	64.27	100	0	P	V
802.11a CH 157 5785MHz		11570	59.81	-14.19	74	70.47	38.56	15.87	65.37	100	326	P	H
		11570	49.02	-4.98	54	59.68	38.56	15.87	65.37	100	326	A	H
		17355	54.96	-13.24	68.2	58.1	40.69	19.91	64.11	100	0	P	H
		11570	58.31	-15.69	74	69.25	38.56	15.87	65.37	100	335	P	V
		11570	48.62	-5.38	54	59.56	38.56	15.87	65.37	100	335	A	V
		17355	55.46	-12.74	68.2	58.6	40.69	19.91	64.11	100	0	P	V
802.11a CH 165 5825MHz		11650	58.58	-15.42	74	69.09	38.61	15.94	65.34	100	325	P	H
		11650	49.17	-4.83	54	59.68	38.61	15.94	65.34	100	325	A	H
		17475	57.88	-10.32	68.2	60.88	40.62	19.95	63.95	100	0	P	H
		11650	58.37	-15.63	74	68.88	38.61	15.94	65.34	100	337	P	V
		11650	48.95	-5.05	54	59.46	38.61	15.94	65.34	100	337	A	V
		17475	55.06	-13.14	68.2	58.06	40.62	19.95	63.95	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include frequencies from 5615.6 to 5745 MHz with various level and limit values.



WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT20 CH 157 5785MHz		5616.8	49.56	-18.64	68.2	40.42	32.69	9.53	33.08	225	71	P	H
		5686.6	50.96	-44.36	95.32	41.5	32.86	9.72	33.12	225	71	P	H
		5707.4	50.08	-57.19	107.27	40.54	32.9	9.77	33.13	225	71	P	H
		5721.8	50.35	-64.55	114.9	40.72	32.94	9.82	33.13	225	71	P	H
	*	5785	110.11	-	-	100.25	33.06	9.97	33.17	225	71	P	H
	*	5785	102.79	-	-	92.93	33.06	9.97	33.17	225	71	A	H
		5850.8	50.65	-69.73	120.38	40.59	33.23	10.02	33.19	225	71	P	H
		5856.8	49.95	-60.35	110.3	39.85	33.27	10.02	33.19	225	71	P	H
		5918.4	50.78	-22.29	73.07	40.6	33.39	10.02	33.23	225	71	P	H
		5928.6	50.11	-18.09	68.2	39.89	33.43	10.02	33.23	225	71	P	H
		5615.2	50.13	-18.07	68.2	41.03	32.65	9.53	33.08	102	107	P	V
		5667.2	50.15	-30.81	80.96	40.78	32.81	9.67	33.11	102	107	P	V
		5715	49.54	-59.86	109.4	40	32.9	9.77	33.13	102	107	P	V
		5722.2	49.52	-66.3	115.82	39.89	32.94	9.82	33.13	102	107	P	V
	*	5785	104.57	-	-	94.71	33.06	9.97	33.17	102	107	P	V
	*	5785	97.33	-	-	87.47	33.06	9.97	33.17	102	107	A	V
		5854.8	49.26	-62	111.26	39.16	33.27	10.02	33.19	102	107	P	V
		5860.6	50.51	-58.72	109.23	40.43	33.27	10.02	33.21	102	107	P	V
	5882.6	50.27	-49.29	99.56	40.15	33.31	10.02	33.21	102	107	P	V	
	5934	50.36	-17.84	68.2	40.14	33.43	10.02	33.23	102	107	P	V	



WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT20 CH 165 5825MHz	*	5825	110.65	-	-	100.62	33.19	10.02	33.18	227	71	P	H
	*	5825	103.24	-	-	93.21	33.19	10.02	33.18	227	71	A	H
		5850	66.3	-55.9	122.2	56.24	33.23	10.02	33.19	227	71	P	H
		5856.2	58.13	-52.33	110.46	48.03	33.27	10.02	33.19	227	71	P	H
		5888	52.96	-42.59	95.55	42.81	33.35	10.02	33.22	227	71	P	H
		5930.8	50.03	-18.17	68.2	39.81	33.43	10.02	33.23	227	71	P	H
	*	5825	105.07	-	-	95.04	33.19	10.02	33.18	100	110	P	V
	*	5825	97.58	-	-	87.55	33.19	10.02	33.18	100	110	A	V
		5850.2	59.84	-61.9	121.74	49.78	33.23	10.02	33.19	100	110	P	V
		5856	55.01	-55.51	110.52	44.91	33.27	10.02	33.19	100	110	P	V
		5911	50.76	-27.77	78.53	40.58	33.39	10.02	33.23	100	110	P	V
		5947.8	50.68	-17.52	68.2	40.42	33.48	10.02	33.24	100	110	P	V
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> </ol>												



**Band 4 5725~5850MHz**  
**WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT20 CH 149 5745MHz		11490	59.02	-14.98	74	69.81	38.52	15.8	65.39	100	323	P	H
		11490	48.37	-5.63	54	59.16	38.52	15.8	65.39	100	323	A	H
		17235	58.77	-9.43	68.2	62.06	40.76	19.86	64.27	100	0	P	H
		11490	57.52	-16.48	74	68.31	38.52	15.8	65.39	100	322	P	V
		11490	48.66	-5.34	54	59.45	38.52	15.8	65.39	100	322	A	V
		17235	58.54	-9.66	68.2	61.83	40.76	19.86	64.27	100	0	P	V
802.11n HT20 CH 157 5785MHz		11570	59	-15	74	69.66	38.56	15.87	65.37	100	332	P	H
		11570	49.15	-4.85	54	59.81	38.56	15.87	65.37	100	332	A	H
		17355	53.16	-15.04	68.2	56.3	40.69	19.91	64.11	100	0	P	H
		11570	58.93	-15.07	74	69.59	38.56	15.87	65.37	100	337	P	V
		11570	49.43	-4.57	54	60.09	38.56	15.87	65.37	100	337	A	V
		17355	54.03	-14.17	68.2	57.17	40.69	19.91	64.11	100	0	P	V
802.11n HT20 CH 165 5825MHz		11650	57.3	-16.7	74	67.81	38.61	15.94	65.34	100	316	P	H
		11650	48.6	-5.4	54	59.11	38.61	15.94	65.34	100	316	A	H
		17475	51.02	-17.18	68.2	54.02	40.62	19.95	63.95	100	0	P	H
		11650	59.69	-14.31	74	70.2	38.61	15.94	65.34	100	338	P	V
		11650	49.42	-4.58	54	59.93	38.61	15.94	65.34	100	338	A	V
		17475	54.62	-13.58	68.2	57.62	40.62	19.95	63.95	100	0	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include frequencies from 5639 to 5941 MHz with various measurement values and notes.



WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT40 CH 159 5795MHz		5610.8	49.64	-18.56	68.2	40.54	32.65	9.53	33.08	232	70	P	H
		5696.2	52.35	-50.05	102.4	42.89	32.86	9.72	33.12	232	70	P	H
		5709.2	55.93	-51.85	107.78	46.39	32.9	9.77	33.13	232	70	P	H
		5725	54.02	-68.18	122.2	44.39	32.94	9.82	33.13	232	70	P	H
	*	5795	108.21	-	-	98.27	33.1	10.01	33.17	232	70	P	H
	*	5795	101.28	-	-	91.34	33.1	10.01	33.17	232	70	A	H
		5850	60.71	-61.49	122.2	50.65	33.23	10.02	33.19	232	70	P	H
		5857.8	60.71	-49.3	110.01	50.63	33.27	10.02	33.21	232	70	P	H
		5875.8	54.66	-49.95	104.61	44.54	33.31	10.02	33.21	232	70	P	H
		5942.6	49.74	-18.46	68.2	39.48	33.48	10.02	33.24	232	70	P	H
		5616.2	50.52	-17.68	68.2	41.38	32.69	9.53	33.08	100	108	P	V
		5660	49.57	-26.06	75.63	40.29	32.77	9.62	33.11	100	108	P	V
		5718.6	53.95	-56.46	110.41	44.32	32.94	9.82	33.13	100	108	P	V
		5720.6	54.12	-58.05	112.17	44.49	32.94	9.82	33.13	100	108	P	V
	*	5795	103.11	-	-	93.17	33.1	10.01	33.17	100	108	P	V
	*	5795	96.27	-	-	86.33	33.1	10.01	33.17	100	108	A	V
		5851.6	58.93	-59.62	118.55	48.87	33.23	10.02	33.19	100	108	P	V
		5856	57.53	-52.99	110.52	47.43	33.27	10.02	33.19	100	108	P	V
	5877	51.9	-51.81	103.71	41.78	33.31	10.02	33.21	100	108	P	V	
	5947.8	52.05	-16.15	68.2	41.79	33.48	10.02	33.24	100	108	P	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11n HT40 CH 151 5755MHz and 802.11n HT40 CH 159 5795MHz.

Remark

- 1. No other spurious found.
2. All results are PASS against Peak and Average limit line.



**Band 4 5725~5850MHz**  
**WIFI 802.11ac VHT80 (Band Edge @ 3m)**

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11ac VHT80 CH 155 5775MHz		5648	60.46	-7.74	68.2	51.21	32.73	9.62	33.1	232	71	P	H
		5689.6	73.2	-24.33	97.53	63.74	32.86	9.72	33.12	232	71	P	H
		5711.2	77.91	-30.43	108.34	68.37	32.9	9.77	33.13	232	71	P	H
		5723.8	77.88	-41.58	119.46	68.25	32.94	9.82	33.13	232	71	P	H
	*	5775	106.44	-	-	96.57	33.06	9.97	33.16	232	71	P	H
	*	5775	99.38	-	-	89.51	33.06	9.97	33.16	232	71	A	H
		5851.4	77.72	-41.29	119.01	67.66	33.23	10.02	33.19	232	71	P	H
		5855	74.85	-35.95	110.8	64.75	33.27	10.02	33.19	232	71	P	H
		5875	67.49	-37.71	105.2	57.37	33.31	10.02	33.21	232	71	P	H
		5926	54.11	-14.09	68.2	43.89	33.43	10.02	33.23	232	71	P	H
		5646.2	56.32	-11.88	68.2	47.07	32.73	9.62	33.1	100	109	P	V
		5696.2	71.37	-31.03	102.4	61.91	32.86	9.72	33.12	100	109	P	V
		5718.8	73.36	-37.1	110.46	63.73	32.94	9.82	33.13	100	109	P	V
		5720.2	73.02	-38.24	111.26	63.39	32.94	9.82	33.13	100	109	P	V
	*	5775	101.57	-	-	91.7	33.06	9.97	33.16	100	109	P	V
	*	5775	94.2	-	-	84.33	33.06	9.97	33.16	100	109	A	V
		5850.6	69.54	-51.29	120.83	59.48	33.23	10.02	33.19	100	109	P	V
		5856.4	72.41	-38	110.41	62.31	33.27	10.02	33.19	100	109	P	V
		5875.2	65.33	-39.72	105.05	55.21	33.31	10.02	33.21	100	109	P	V
		5945.8	52	-16.2	68.2	41.74	33.48	10.02	33.24	100	109	P	V

**Remark**

- No other spurious found.
- All results are PASS against Peak and Average limit line.



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		11550	55.64	-18.36	74	66.33	38.54	15.87	65.38	100	0	P	H
		11550	46.47	-7.53	54	57.16	38.54	15.87	65.38	100	0	A	H
		17325	51.15	-17.05	68.2	54.33	40.71	19.9	64.16	100	0	P	H
		11550	56.8	-17.2	74	67.49	38.54	15.87	65.38	100	338	P	V
		11550	49.37	-4.63	54	60.06	38.54	15.87	65.38	100	338	A	V
		17325	48.22	-19.98	68.2	51.4	40.71	19.9	64.16	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

5GHz WIFI 802.11n HT40 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
5GHz 802.11n HT40 LF		30	22.55	-17.45	40	29.98	24.36	0.68	32.5	-	-	P	H
		78.6	22.31	-17.69	40	40.53	13.03	1.22	32.48	-	-	P	H
		105.33	26.92	-16.58	43.5	41.53	16.57	1.27	32.48	-	-	P	H
		561.8	26.86	-19.14	46	29.95	26.23	3.02	32.43	-	-	P	H
		759.9	30.68	-15.32	46	31.15	28.22	3.47	32.3	-	-	P	H
		955.2	33.83	-12.17	46	29.97	31.02	3.82	31.15	100	0	P	H
		40.8	29.64	-10.36	40	42.35	18.83	0.94	32.49	100	96	P	V
		59.97	25.24	-14.76	40	44.95	11.7	1.06	32.49	-	-	P	V
		80.49	26	-14	40	43.94	13.31	1.22	32.48	-	-	P	V
		467.3	24.76	-21.24	46	30.81	23.52	2.75	32.36	-	-	P	V
		740.3	30.09	-15.91	46	30.84	28.03	3.44	32.35	-	-	P	V
	952.4	33.64	-12.36	46	29.93	30.9	3.82	31.18	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



## Appendix C. Radiated Spurious Emission Plots

### Note symbol

-L	Low channel location
-R	High channel location



**Band 4 - 5725~5850MHz**  
**WIFI 802.11a (Band Edge @ 3m)**

<b>WIFI</b>	<b>Band 4 5725~5850MHz Band Edge @ 3m</b>	
<b>ANT</b>	<b>802.11a CH149 5745MHz</b>	
<b>1+2</b>	<b>Horizontal</b>	<b>Fundamental</b>
<b>Peak</b>		
<b>WIFI</b>	<b>Band 4 5725~5850MHz Band Edge @ 3m</b>	
<b>ANT</b>	<b>802.11a CH149 5745MHz</b>	
<b>1+2</b>	<b>Vertical</b>	<b>Fundamental</b>
<b>Peak</b>		



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1+2	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY          Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL          RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak</p>	<p>Site : 03CH11-HY          Condition : PEAK(UNIT) 3m HORN 91200-HF HORIZONTAL          RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak</p>
Peak	<p>Site : 03CH11-HY          Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL          RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak</p>	Left blank







WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1+2	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Peak</p>	<p>Site : 03CH11-HY Condition : PEAK(UNB) 3m HORN 9120D-HF VERTICAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Peak</p>
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Peak</p>	Left blank



<b>WIFI</b>	<b>Band 4 5725~5850MHz Band Edge @ 3m</b>	
<b>ANT</b>	<b>802.11a CH165 5825MHz</b>	
<b>1+2</b>	<b>Horizontal</b>	<b>Fundamental</b>
<b>Peak</b>	<p>Site : 03CH11-HY          Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL          RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak</p>	<p>Site : 03CH11-HY          Condition : PEAK(LINB) 3m HORN 9120D-HF HORIZONTAL          RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak</p>
<b>WIFI</b>	<b>Band 4 5725~5850MHz Band Edge @ 3m</b>	
<b>ANT</b>	<b>802.11a CH165 5825MHz</b>	
<b>1+2</b>	<b>Vertical</b>	<b>Fundamental</b>
<b>Peak</b>	<p>Site : 03CH11-HY          Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL          RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak</p>	<p>Site : 03CH11-HY          Condition : PEAK(LINB) 3m HORN 9120D-HF VERTICAL          RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak</p>



**Band 4 5725~5850MHz  
WIFI 802.11n HT20 (Band Edge @ 3m)**
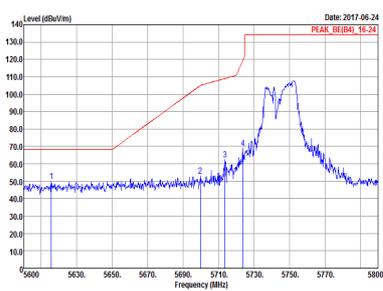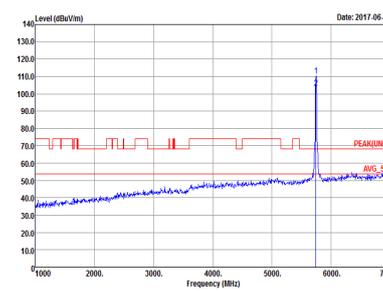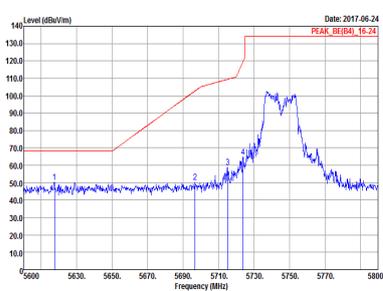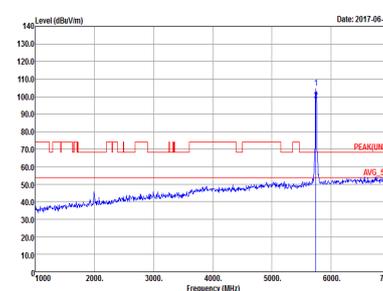
<b>WIFI</b>	<b>Band 4 5725~5850MHz Band Edge @ 3m</b>	
<b>ANT</b>	<b>802.11n HT20 CH149 5745MHz</b>	
<b>1+2</b>	<b>Horizontal</b>	<b>Fundamental</b>
<b>Peak</b>	 <p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>
<b>WIFI</b>	<b>Band 4 5725~5850MHz Band Edge @ 3m</b>	
<b>ANT</b>	<b>802.11n HT20 CH149 5745MHz</b>	
<b>1+2</b>	<b>Vertical</b>	<b>Fundamental</b>
<b>Peak</b>	 <p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>







WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1+2	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY          Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL          : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto          Detector : Peak</p>	<p>Site : 03CH11-HY          Condition : PEAK(LINE1) 3m HORN 91200-HF HORIZONTAL          : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto          Detector : Peak</p>
Peak	<p>Site : 03CH11-HY          Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL          : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto          Detector : Peak</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1+2	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak</p>	<p>Site : 03CH11-HY            Condition : PEAK(BE(B4)_16-24 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak</p>
Peak	<p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak</p>	Left blank

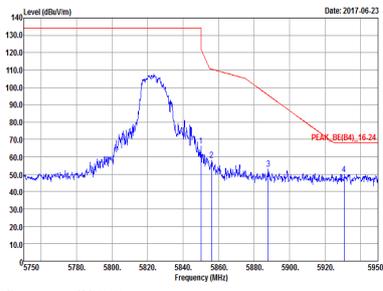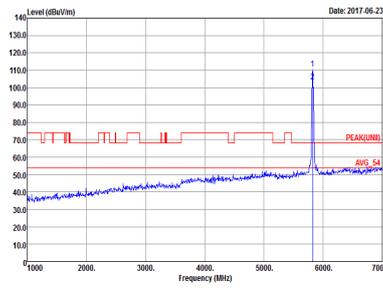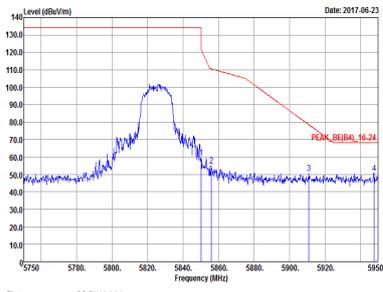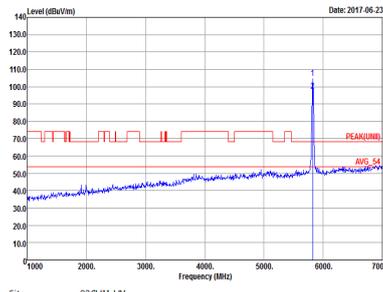

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1+2	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>
WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1+2	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>



**Band 4 5725~5850MHz  
WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1+2	Horizontal	Fundamental
<b>Peak</b>	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	<p>Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>
<b>Peak</b>	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	<p>Left blank</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1+2	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY          Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF VERTICAL          RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak</p>	<p>Site : 03CH11-HY          Condition : PEAK(LINE) 3m HORN 91200-HF VERTICAL          RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak</p>
Peak	<p>Site : 03CH11-HY          Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF VERTICAL          RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak</p>	Left blank



WIFI	Band 4 5725-5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1+2	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak</p>	<p>Site : 03CH11-HY            Condition : PEAK(URB) 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak</p>
Peak	<p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1+2	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak</p>	<p>Site : 03CH11-HY            Condition : PEAK(LNII) 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak</p>
Peak	<p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak</p>	Left blank



**Band 4 5725~5850MHz**  
**WIFI 802.11ac VHT80 (Band Edge @ 3m)**

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1+2	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak</p>	<p>Site : 03CH11-HY            Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak</p>
Peak	<p>Site : 03CH11-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1+2	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY          Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL          RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak</p>	<p>Site : 03CH11-HY          Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL          RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak</p>
Peak	<p>Site : 03CH11-HY          Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL          RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak</p>	Left blank



**Band 4 - 5725~5850MHz**  
**WIFI 802.11a (Harmonic @ 3m)**

<b>WIFI</b>	<b>Band 4 5725~5850MHz Harmonic @ 3m</b>	
<b>ANT</b>	<b>802.11a CH149 5745MHz</b>	
<b>1+2</b>	<b>Horizontal</b>	<b>Vertical</b>
<b>Peak</b>	<p>Site : 03CH11-4FY          Condition : PEAK(LINE) 3m 9170 SHF HORM_150809 HORIZONTAL          Detector : Peak</p>	<p>Site : 03CH11-4FY          Condition : PEAK(LINE) 3m 9170 SHF HORM_150809 VERTICAL          Detector : Peak</p>





WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH157 5785MHz	
1+2	Horizontal	Vertical
Peak	<p>Site : 03CH11-HY          Condition : PEAK(LINII) 3m 9170 SHF HORM_150809 HORIZONTAL          Detector : Peak</p>	<p>Site : 03CH11-HY          Condition : PEAK(LINII) 3m 9170 SHF HORM_150809 VERTICAL          Detector : Peak</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH165 5825MHz	
1+2	Horizontal	Vertical
Peak		



**Band 4 5725~5850MHz  
WIFI 802.11n HT20 (Harmonic @ 3m)**
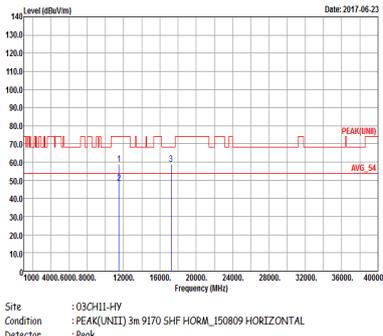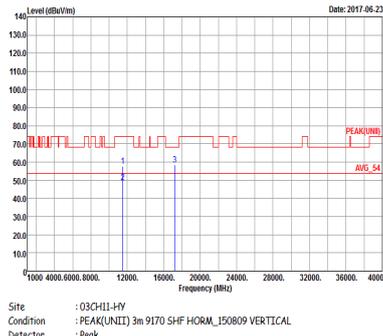
<b>WIFI</b>	<b>Band 4 5725~5850MHz Harmonic @ 3m</b>	
<b>ANT</b>	<b>802.11n HT20 CH149 5745MHz</b>	
<b>1+2</b>	<b>Horizontal</b>	<b>Vertical</b>
<b>Peak</b>	 <p>Site : 03CH11-HY Condition : PEAK[UNII] 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : PEAK[UNII] 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1+2	Horizontal	Vertical
Peak	<p>Site : 03CH11-HY Condition : PEAK(LINII) 3m HORN 91200-HF HORIZONTAL Detector : Peak</p>	<p>Site : 03CH11-HY Condition : PEAK(LINII) 3m HORN 91200-HF VERTICAL Detector : Peak</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1+2	Horizontal	Vertical
Peak	<p>Site : 03CH11-HY          Condition : PEAK(LINII) 3m HORN 91200-HF HORIZONTAL          Detector : Peak</p>	<p>Site : 03CH11-HY          Condition : PEAK(LINII) 3m HORN 91200-HF VERTICAL          Detector : Peak</p>



**Band 4 5725~5850MHz  
WIFI 802.11n HT40 (Harmonic @ 3m)**

<b>WIFI</b>	<b>Band 4 5725~5850MHz Harmonic @ 3m</b>	
<b>ANT</b>	<b>802.11n HT40 CH151 5755MHz</b>	
<b>1+2</b>	<b>Horizontal</b>	<b>Vertical</b>
<b>Peak</b>	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL Detector : Peak</p>	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL Detector : Peak</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1+2	Horizontal	Vertical
Peak	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL Detector : Peak</p>	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL Detector : Peak</p>



**Band 4 5725~5850MHz  
WIFI 802.11ac VHT80 (Harmonic @ 3m)**

<b>WIFI</b>	<b>Band 4 5725~5850MHz Harmonic @ 3m</b>	
<b>ANT</b>	<b>802.11ac VHT80 CH155 5775MHz</b>	
<b>1+2</b>	<b>Horizontal</b>	<b>Vertical</b>
<b>Peak</b>	<p>Site : 03CH11-HY Condition : PEAK(LINE) 3m HORN 9120D-HF HORIZONTAL Detector : Peak</p>	<p>Site : 03CH11-HY Condition : PEAK(LINE) 3m HORN 9120D-HF VERTICAL Detector : Peak</p>



Emission below 1GHz
5GHz WIFI 802.11n HT40 (LF)

Table with 2 columns: Horizontal and Vertical. Rows include WIFI (5GHz 5725-5850MHz), ANT (802.11n HT40 LF), and 1+2 (QP / Peak). Each plot shows Level (dBu/m) vs Frequency (MHz) with a red QP line and a blue Peak line.




### Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
1	802.11a	94.09	2.070	0.483	1kHz
2	802.11a	94.95	2.070	0.483	1kHz
1+2(1)	802.11a	94.95	2.070	0.483	1kHz
1+2(2)	802.11a	94.98	2.080	0.481	1kHz
1	802.11n HT20	94.12	1.920	0.521	1kHz
2	802.11n HT20	94.15	1.930	0.518	1kHz
1+2(1)	802.11n HT20	94.12	1.920	0.521	1kHz
1+2(2)	802.11n HT20	94.61	1.930	0.518	1kHz
1	802.11n HT40	89.21	0.942	1.062	3kHz
2	802.11n HT40	90.29	0.948	1.055	3kHz
1+2(1)	802.11n HT40	90.29	0.948	1.055	3kHz
1+2(2)	802.11n HT40	89.77	0.948	1.055	3kHz
1	802.11ac VHT20	94.63	1.940	0.515	1kHz
2	802.11ac VHT20	94.63	1.940	0.515	1kHz
1+2(1)	802.11ac VHT20	94.63	1.940	0.515	1kHz
1+2(2)	802.11ac VHT20	94.63	1.940	0.515	1kHz
1	802.11ac VHT40	90.86	0.954	1.048	3kHz
2	802.11ac VHT40	89.27	0.948	1.055	3kHz
1+2(1)	802.11ac VHT40	89.80	0.951	1.052	3kHz
1+2(2)	802.11ac VHT40	90.06	0.951	1.052	3kHz
1	802.11ac VHT80	85.71	0.648	1.543	3kHz
2	802.11ac VHT80	87.17	0.652	1.534	3kHz
1+2(1)	802.11ac VHT80	85.71	0.648	1.543	3kHz
1+2(2)	802.11ac VHT80	86.63	0.648	1.543	3kHz




802.11a for Ant.1

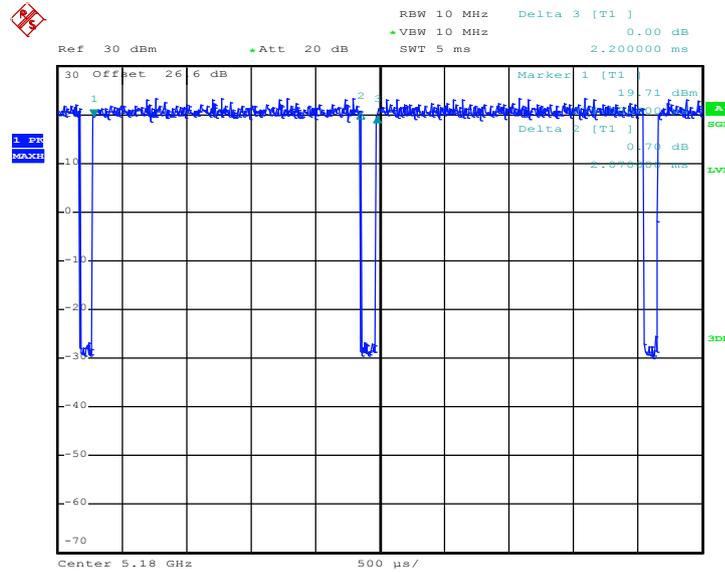

Date: 6.JUL.2017 16:31:12


802.11a for Ant.2

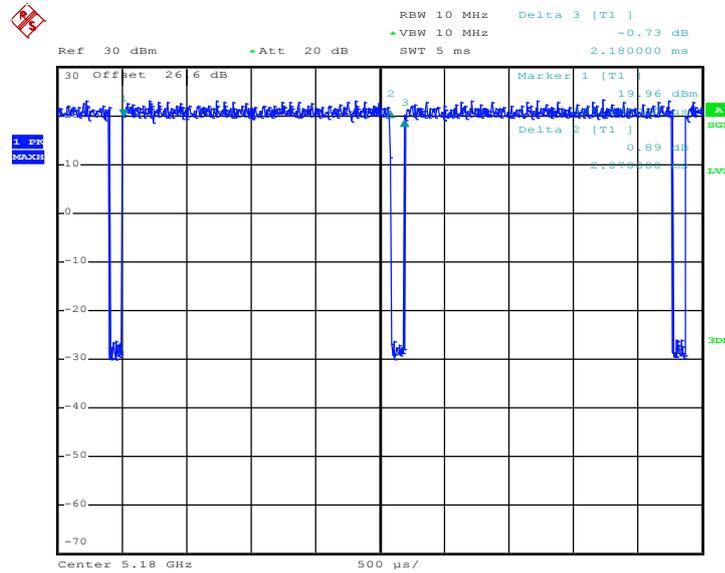

Date: 6.JUL.2017 16:32:19




802.11a for Ant.1+2(1)

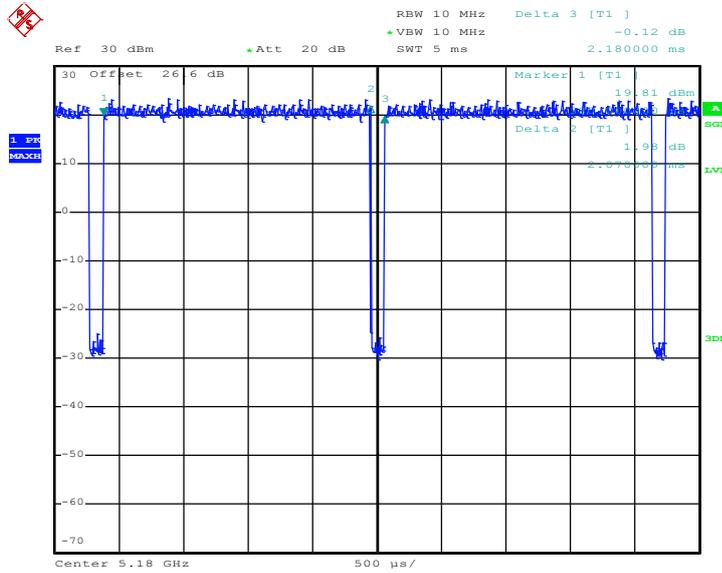

Date: 6.JUL.2017 16:33:25


802.11a for Ant. 1+2(2)

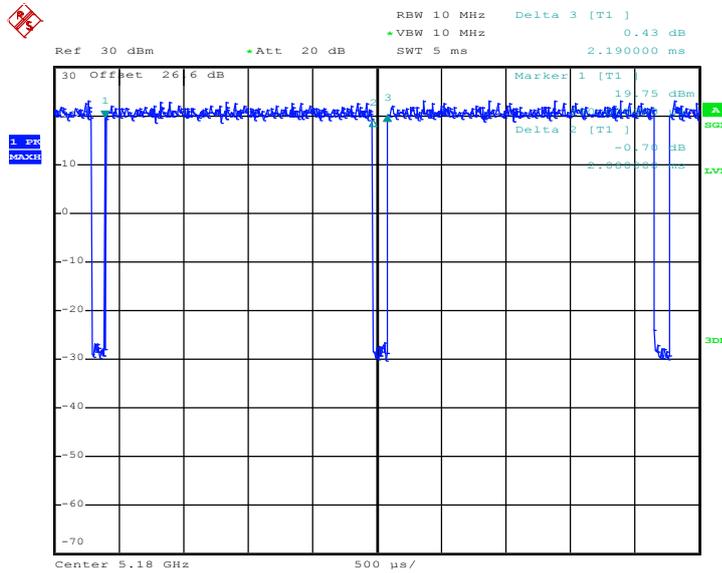

Date: 6.JUL.2017 16:34:11




802.11n HT20 for Ant.1

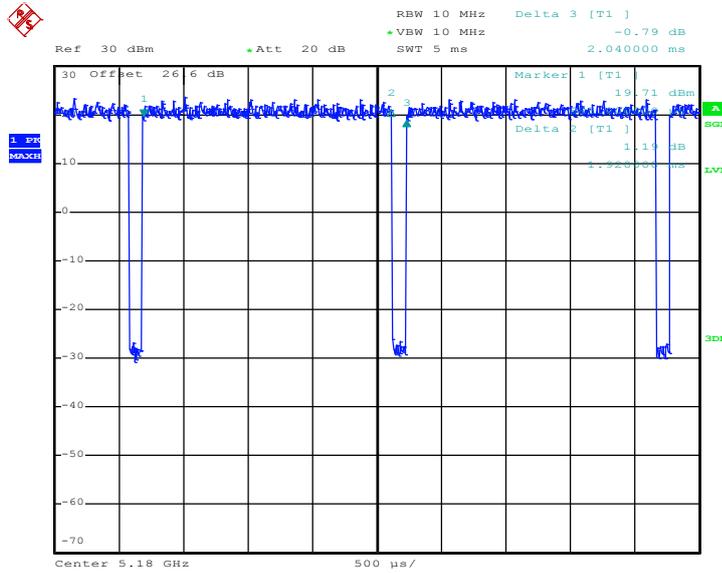

Date: 6.JUL.2017 16:35:41


802.11n HT20 for Ant.2

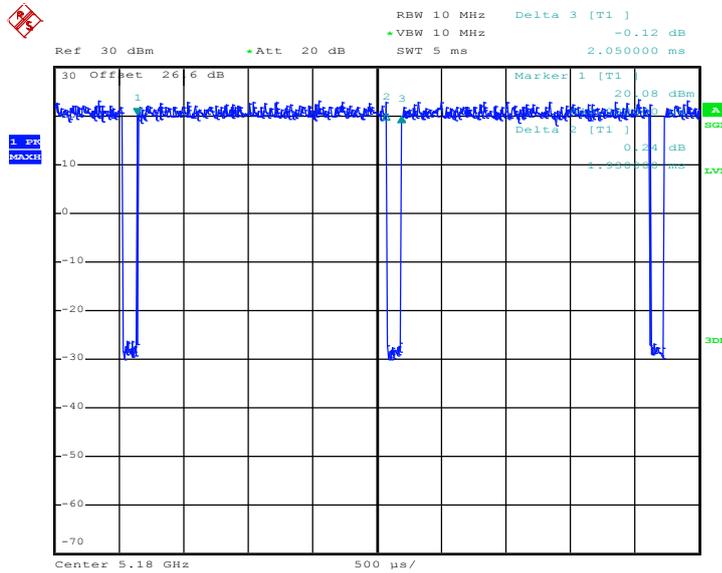

Date: 6.JUL.2017 16:36:31




802.11n HT20 for Ant.1+2(1)

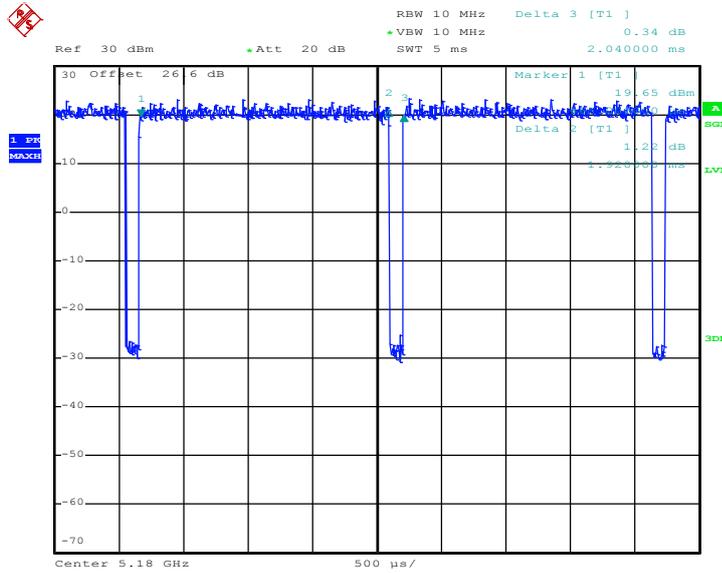

Date: 6.JUL.2017 16:37:29


802.11n HT20 for Ant. 1+2(2)

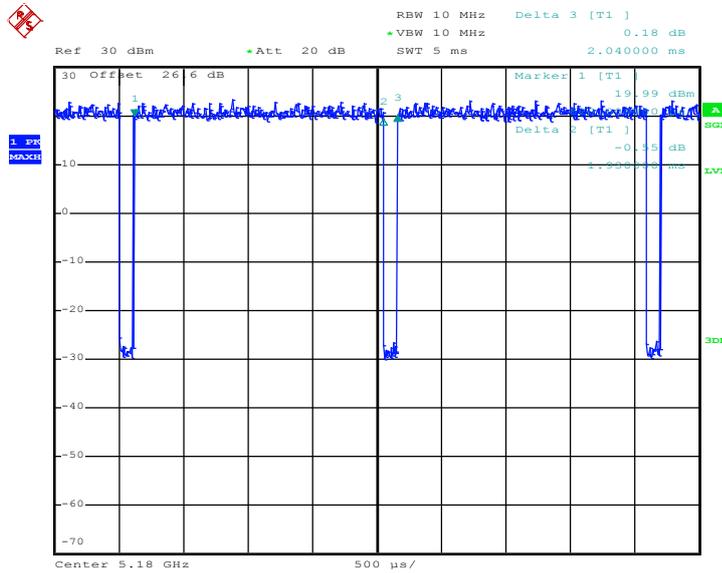

Date: 6.JUL.2017 16:43:29




802.11n HT40 for Ant.1

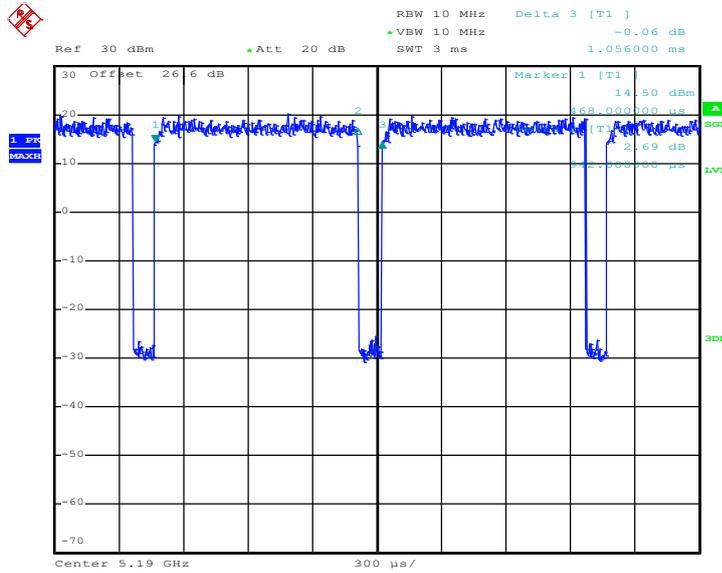

Date: 6.JUL.2017 16:44:46


802.11n HT40 for Ant.2

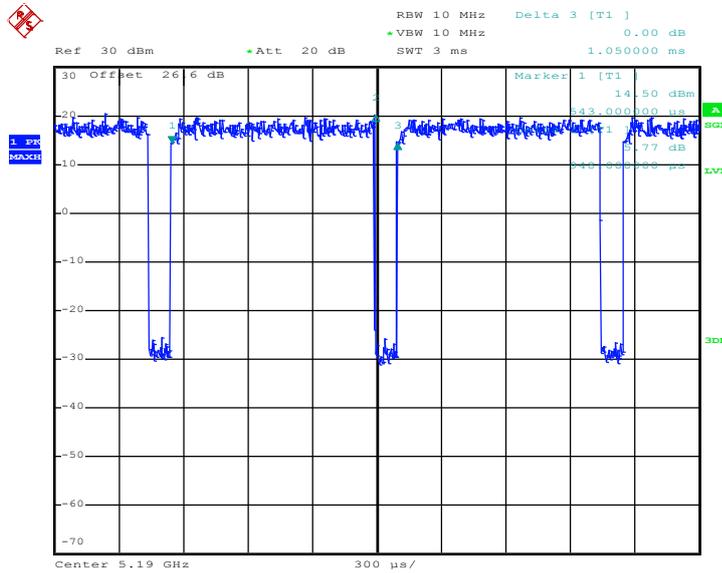

Date: 6.JUL.2017 16:45:47




802.11n HT40 for Ant.1+2(1)

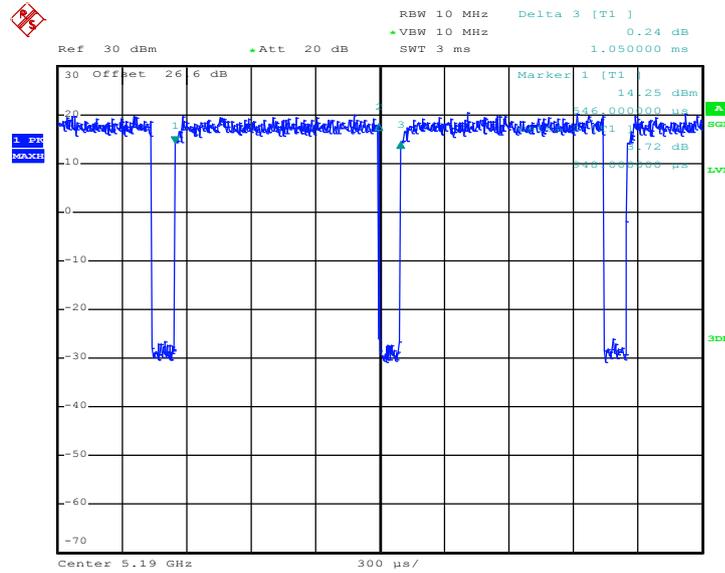

Date: 6.JUL.2017 16:46:54


802.11n HT40 for Ant. 1+2(2)

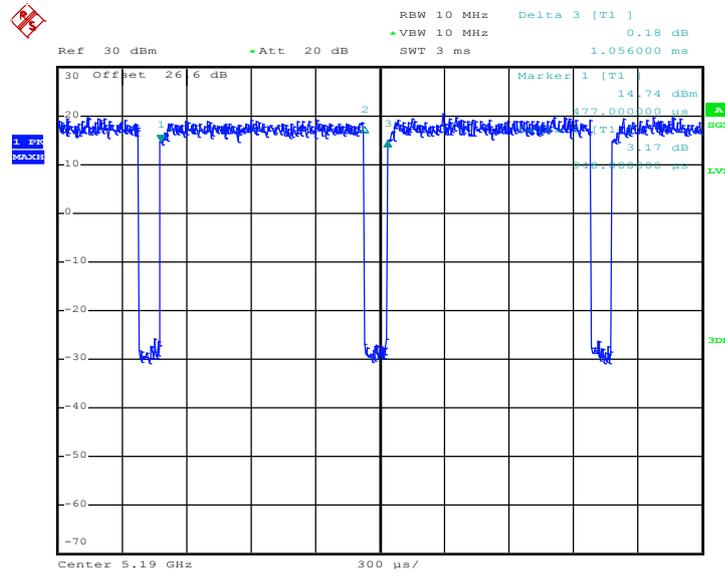

Date: 6.JUL.2017 16:48:28




802.11ac VHT20 for Ant.1

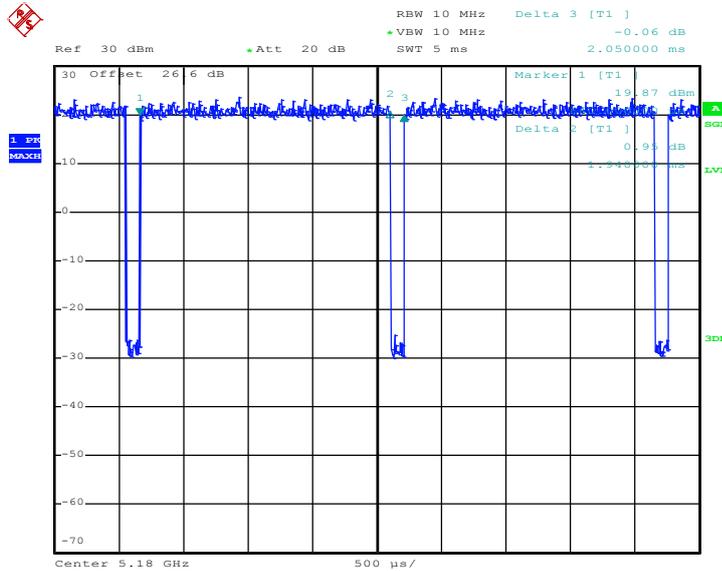

Date: 6.JUL.2017 16:50:29


802.11ac VHT20 for Ant.2

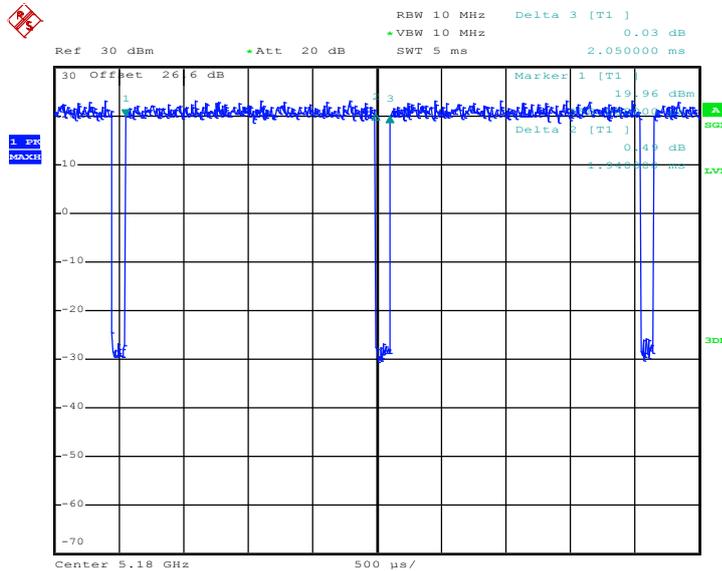

Date: 6.JUL.2017 16:51:13




802.11ac VHT20 for Ant.1+2(1)

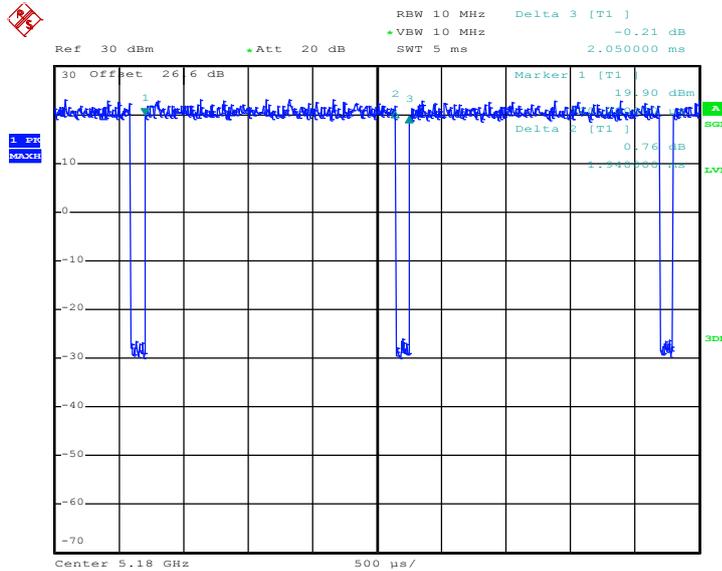

Date: 6.JUL.2017 16:52:51


802.11ac VHT20 for Ant. 1+2(2)

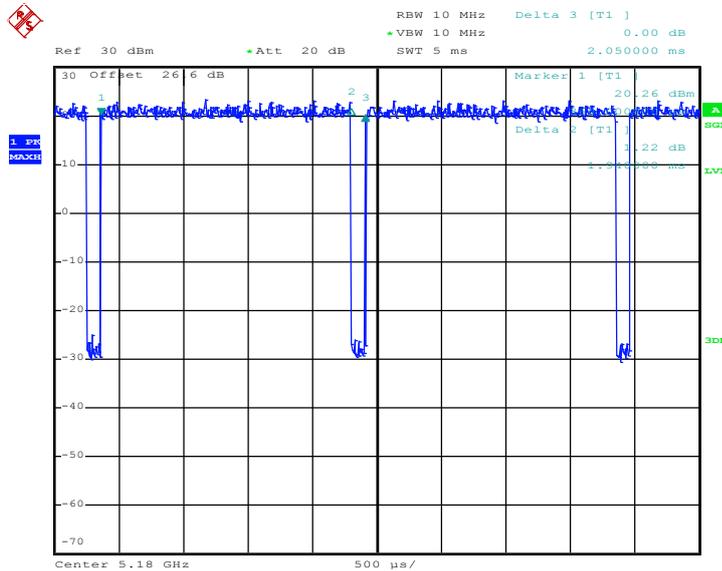

Date: 6.JUL.2017 16:53:25




802.11ac VHT40 for Ant.1

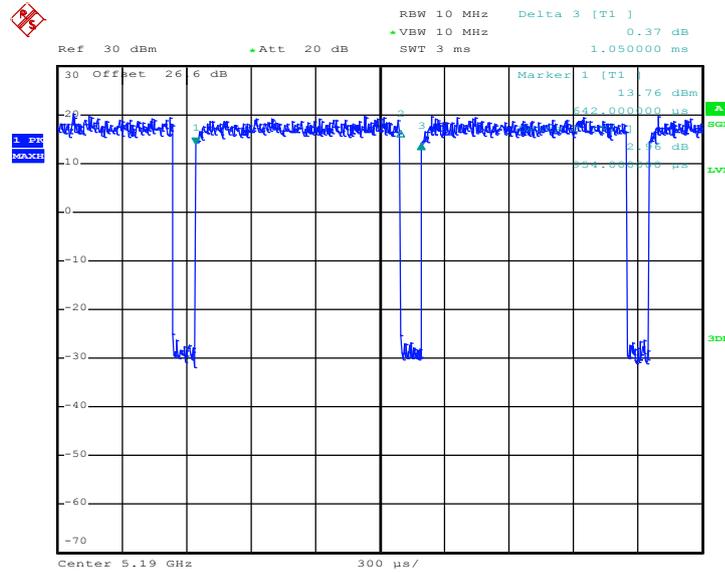

Date: 6.JUL.2017 16:54:35


802.11ac VHT40 for Ant.2

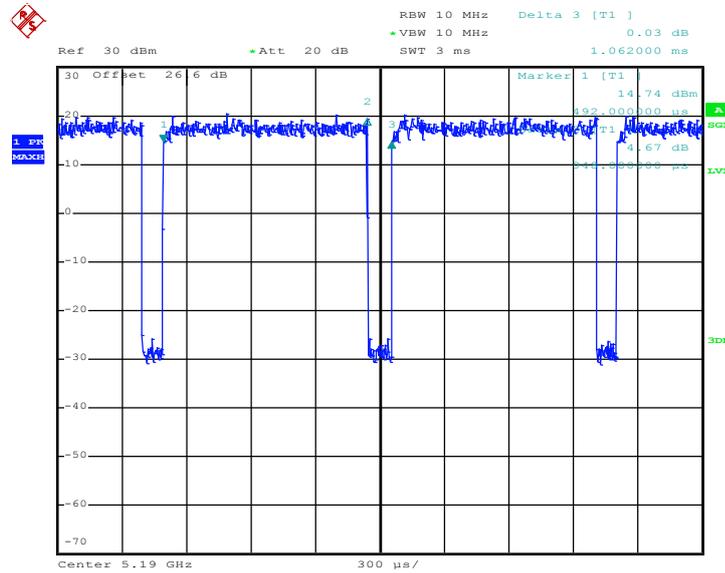

Date: 6.JUL.2017 16:55:24




802.11ac VHT40 for Ant.1+2(1)

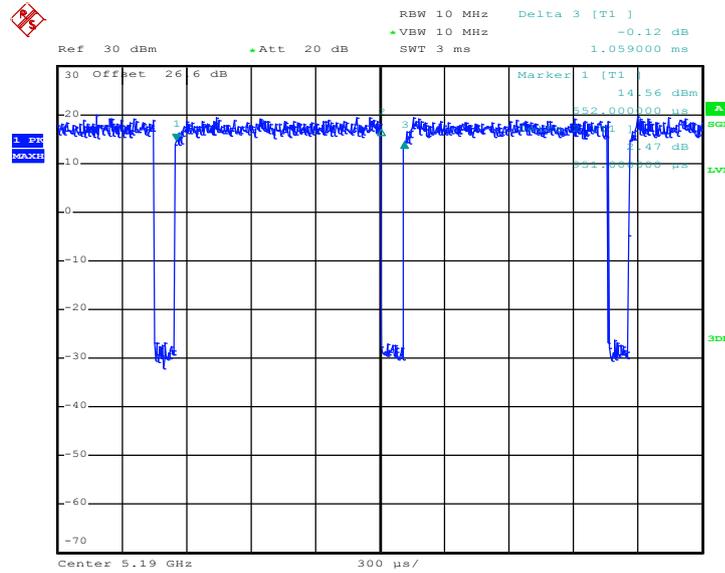

Date: 6.JUL.2017 16:56:17


802.11ac VHT40 for Ant. 1+2(2)

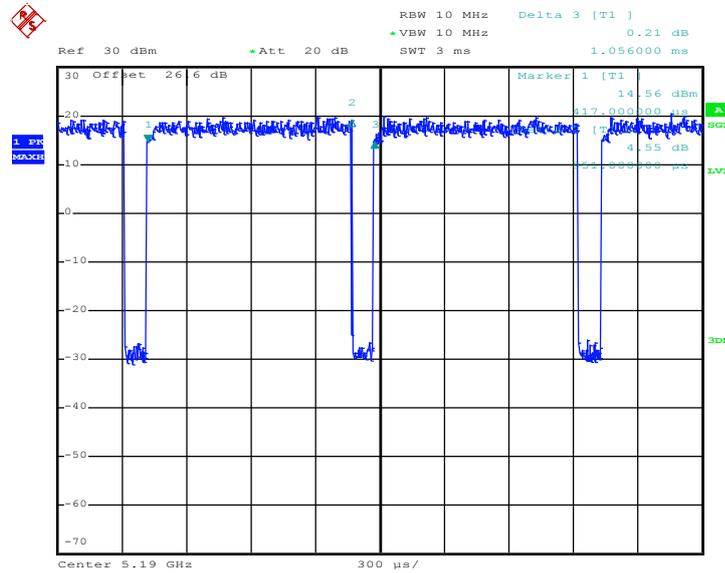

Date: 6.JUL.2017 16:57:12




802.11ac VHT80 for Ant.1

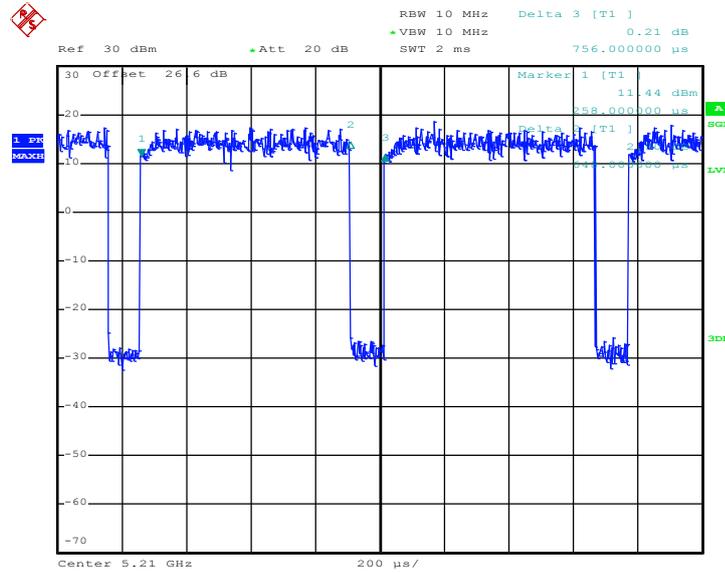

Date: 6.JUL.2017 16:59:20


802.11ac VHT80 for Ant.2

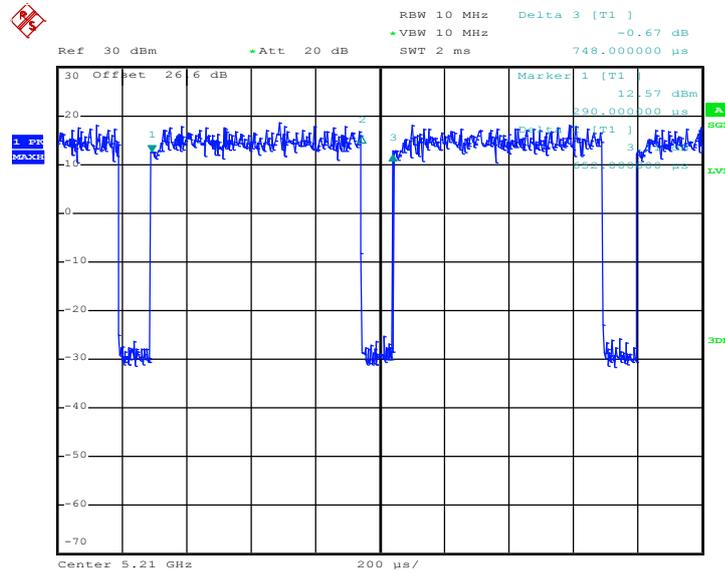

Date: 6.JUL.2017 17:00:23




802.11ac VHT80 for Ant.1+2(1)

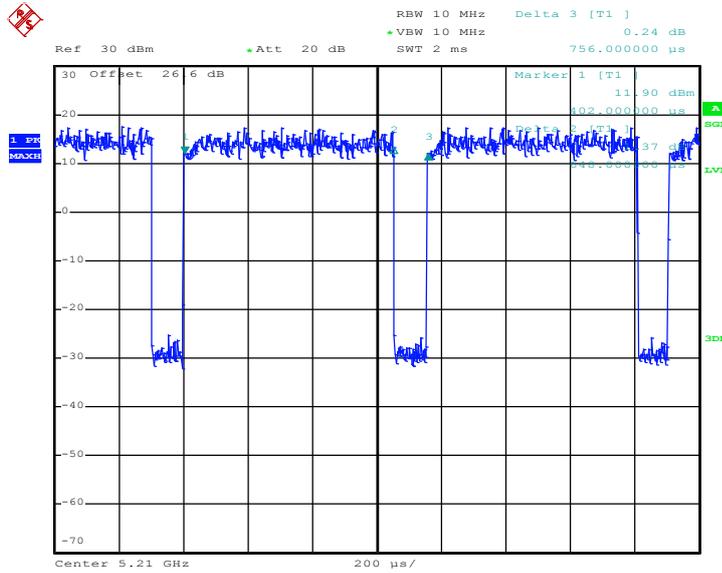

Date: 6.JUL.2017 17:01:26

802.11ac VHT80 for Ant. 1+2(2)

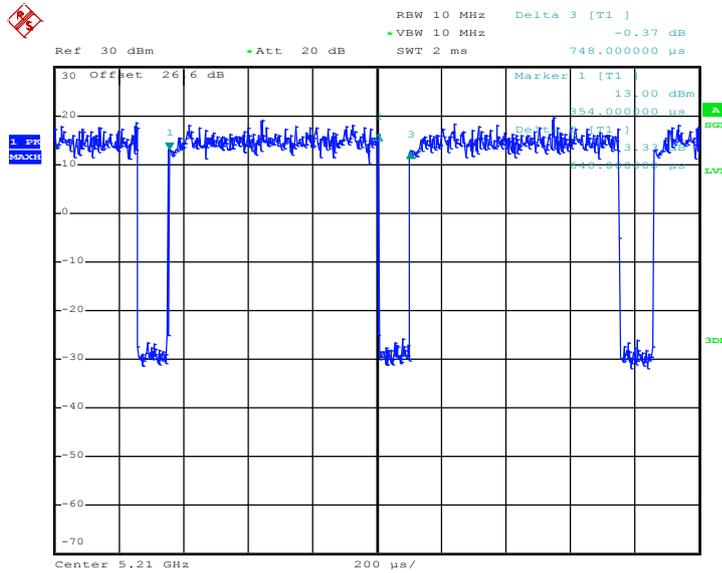

Date: 6.JUL.2017 17:02:10