

## Variant FCC Test Report

**Report No.:** RF170426C41A-8

**FCC ID:** MSQZ01KDA

**Test Model:** ASUS\_Z01KDA / ASUS\_Z01KS

**Received Date:** Aug. 24, 2017

**Test Date:** Sep. 19, 2017

**Issued Date:** Nov. 14, 2017

**Applicant:** ASUSTek COMPUTER INC.

**Address:** 4F, No. 150, LI-TE Rd., PEITOU, TAIPEI 112, TAIWAN

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan  
( R.O.C )

**Test Location (1):** No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei Shan Hsiang, Taoyuan  
Hsien 333, Taiwan, R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

|                                                                 |           |
|-----------------------------------------------------------------|-----------|
| <b>Release Control Record .....</b>                             | <b>3</b>  |
| <b>1 Certificate of Conformity .....</b>                        | <b>4</b>  |
| <b>2 Summary of Test Results.....</b>                           | <b>5</b>  |
| 2.1 Measurement Uncertainty.....                                | 5         |
| 2.2 Modification Record .....                                   | 5         |
| <b>3 General Information .....</b>                              | <b>6</b>  |
| 3.1 General Description of EUT .....                            | 6         |
| 3.2 Description of Test Modes.....                              | 7         |
| 3.2.1 Test Mode Applicability and Tested Channel Detail.....    | 7         |
| 3.3 Description of Support Units .....                          | 8         |
| 3.3.1 Configuration of System under Test .....                  | 8         |
| 3.4 General Description of Applied Standards.....               | 8         |
| <b>4 Test Types and Results .....</b>                           | <b>9</b>  |
| 4.1 Radiated Emission Measurement.....                          | 9         |
| 4.1.1 Limits of Radiated Emission Measurement .....             | 9         |
| 4.1.2 Test Instruments .....                                    | 10        |
| 4.1.3 Test Procedures.....                                      | 11        |
| 4.1.4 Deviation from Test Standard .....                        | 11        |
| 4.1.5 Test Set Up .....                                         | 12        |
| 4.1.6 EUT Operating Conditions.....                             | 12        |
| 4.1.7 Test Results .....                                        | 13        |
| 4.2 Conducted Emission Measurement.....                         | 16        |
| 4.2.1 Limits of Conducted Emission Measurement .....            | 16        |
| 4.2.2 Test Instruments .....                                    | 16        |
| 4.2.3 Test Procedures.....                                      | 17        |
| 4.2.4 Deviation from Test Standard .....                        | 17        |
| 4.2.5 Test Setup.....                                           | 17        |
| 4.2.6 EUT Operating Conditions.....                             | 17        |
| 4.2.7 Test Results .....                                        | 18        |
| <b>5 Pictures of Test Arrangements.....</b>                     | <b>20</b> |
| <b>Appendix – Information on the Testing Laboratories .....</b> | <b>21</b> |

### Release Control Record

| Issue No.      | Description      | Date Issued   |
|----------------|------------------|---------------|
| RF170426C41A-8 | Original Release | Nov. 14, 2017 |

## 1 Certificate of Conformity

**Product:** ASUS Phone

**Brand:** ASUS

**Test Model:** ASUS\_Z01KDA / ASUS\_Z01KS

**Sample Status:** Production Unit

**Applicant:** ASUSTek COMPUTER INC.

**Test Date:** Sep. 19, 2017

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.225)

47 CFR FCC Part 15, Subpart C (Section 15.215)

ANSI C63.10:2013

This report is issued as a supplementary report to BV CPS report no.: RF170726C31-9. This report shall be used by combining with its original report.

**Prepared by :**



**Date:**

Nov. 14, 2017

Ivonne Wu / Supervisor

**Approved by :**



**Date:**

Nov. 14, 2017

Dylan Chiou / Project Engineer

## 2 Summary of Test Results

| 47 CFR FCC Part 15, Subpart C (Section 15.225, 15.215) |                                                                                              |        |                                                                                    |
|--------------------------------------------------------|----------------------------------------------------------------------------------------------|--------|------------------------------------------------------------------------------------|
| FCC Clause                                             | Test Item                                                                                    | Result | Remarks                                                                            |
| 15.207                                                 | Conducted emission test                                                                      | Pass   | Meet the requirement of limit. Minimum passing margin is -0.99 dB at 13.55800 MHz. |
| 15.225 (a)                                             | The field strength of any emissions within the band 13.553-13.567 MHz                        | N/A    | Refer to Note                                                                      |
| 15.225 (b)                                             | The field strength of any emissions within the bands 13.410-13.553 MHz and 13.567-13.710 MHz | N/A    | Refer to Note                                                                      |
| 15.225 (c)                                             | The field strength of any emissions within the bands 13.110-13.410 MHz and 13.710-14.010 MHz | N/A    | Refer to Note                                                                      |
| 15.225 (d)                                             | The field strength of any emissions appearing outside of the 13.110-14.010 MHz band          | Pass   | Meet the requirement of limit. Minimum passing margin is -2.07 dB at 40.67 MHz.    |
| 15.225 (e)                                             | The frequency tolerance                                                                      | N/A    | Refer to Note                                                                      |
| 15.215 (c)                                             | 20dB Bandwidth                                                                               | N/A    | Refer to Note                                                                      |
| 15.203                                                 | Antenna Requirement                                                                          | Pass   | No antenna connector is used.                                                      |

**Note:** Only conducted emission and radiated emissions tests had been performed for the addendum. Refer to original report for other test data.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| Measurement                        | Frequency         | Expanded Uncertainty (k=2) ( $\pm$ ) |
|------------------------------------|-------------------|--------------------------------------|
| Conducted Emissions at mains ports | 150 kHz ~ 30 MHz  | 2.44 dB                              |
| Radiated Emissions up to 1 GHz     | 30 MHz ~ 200 MHz  | 2.93 dB                              |
|                                    | 200 MHz ~1000 MHz | 2.95 dB                              |
| Radiated Emissions above 1 GHz     | 1 GHz ~ 18 GHz    | 2.26 dB                              |
|                                    | 18 GHz ~ 40 GHz   | 1.94 dB                              |

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

|                            |                                                         |
|----------------------------|---------------------------------------------------------|
| <b>Product</b>             | ASUS Phone                                              |
| <b>Brand</b>               | ASUS                                                    |
| <b>Test Model</b>          | ASUS_Z01KDA / ASUS_Z01KS                                |
| <b>SKU</b>                 | Operator-3CA                                            |
| <b>Status of EUT</b>       | Production Unit                                         |
| <b>Power Supply Rating</b> | 5.0 Vdc or 9 Vdc (adapter)<br>3.85 Vdc (Li-ion battery) |
| <b>Modulation Type</b>     | ASK                                                     |
| <b>Operating Frequency</b> | 13.56 MHz                                               |
| <b>Antenna Type</b>        | Loop Antenna                                            |
| <b>Accessory Device</b>    | Refer to Note                                           |
| <b>Data Cable Supplied</b> | Refer to Note                                           |

Note:

1. This report is issued as a supplementary report to BV CPS report no.: RF170726C31-9. The difference compared with original report is adding 2<sup>nd</sup> source of LCD panel, front camera, and rear camera. Therefore, only conducted emission and radiated emissions tests had been performed for this report.
2. All models are listed as below.

| Brand | Model       | Difference |
|-------|-------------|------------|
| ASUS  | ASUS_Z01KDA | Dual SIM   |
|       | ASUS_Z01KS  | Single SIM |

\* Since the difference doesn't affect the test result, only ASUS\_Z01KDA was chosen for the final test.

3. The EUT's accessories list refers to Ext. Pho.
4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 Description of Test Modes

One channel was provided to this EUT:

| Channel | Frequency (MHz) |
|---------|-----------------|
| 1       | 13.56           |

#### 3.2.1 Test Mode Applicability and Tested Channel Detail

| EUT Configure Mode | Applicable To |     | Description |
|--------------------|---------------|-----|-------------|
|                    | RE            | PLC |             |
| -                  | √             | √   | -           |

Where

RE: Radiated Emission

PLC: Power Line Conducted Emission

#### Radiated Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT Configure Mode | Available Channel | Tested Channel | Modulation Type | Axis |
|--------------------|-------------------|----------------|-----------------|------|
| -                  | 1                 | 1              | ASK             | Y    |

#### Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT Configure Mode | Available Channel | Tested Channel | Modulation Type | Axis |
|--------------------|-------------------|----------------|-----------------|------|
| -                  | 1                 | 1              | ASK             | Y    |


#### Test Condition:

| Applicable To | Environmental Conditions | Input Power    | Tested By  |
|---------------|--------------------------|----------------|------------|
| RE            | 25 deg. C, 65 % RH       | 120 Vac, 60 Hz | Getaz Yang |
| PLC           | 25 deg. C, 65 % RH       | 120 Vac, 60 Hz | Getaz Yang |

### 3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

#### 3.3.1 Configuration of System under Test

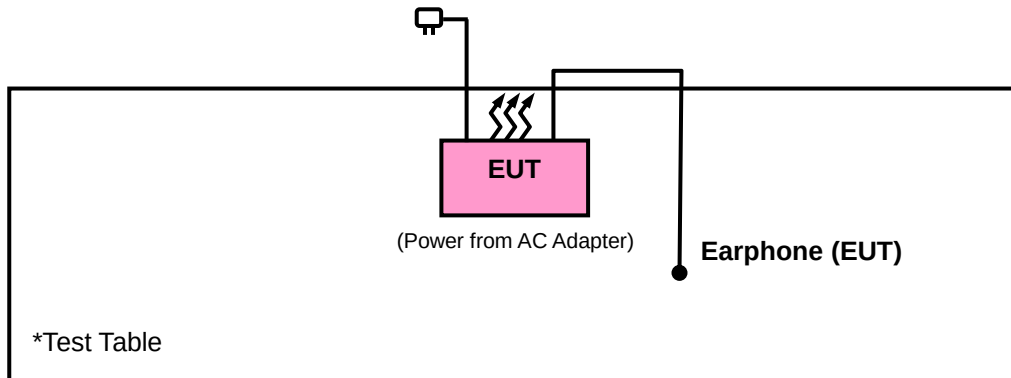

### 3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (15.225)**

**FCC Part 15, Subpart C (15.215)**

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC).  
The test report has been issued separately.



## 4 Test Types and Results

### 4.1 Radiated Emission Measurement

#### 4.1.1 Limits of Radiated Emission Measurement

The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

The field strength of any emissions within the bands 13.410-13.553 MHz and 13.567-13.710 MHz shall not exceed 334 microvolts/meter at 30 meters.

The field strength of any emissions within the bands 13.110-13.410 MHz and 13.710-14.010 MHz shall not exceed 106 microvolts/meter at 30 meters.

The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009 ~ 0.490     | 2400/F (kHz)                      | 300                           |
| 0.490 ~ 1.705     | 24000/F (kHz)                     | 30                            |
| 1.705 ~ 30.0      | 30                                | 30                            |
| 30 ~ 88           | 100                               | 3                             |
| 88 ~ 216          | 150                               | 3                             |
| 216 ~ 960         | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

#### NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

#### 4.1.2 Test Instruments

| Description & Manufacturer                     | Model No.      | Serial No.                                                        | Date of Calibration | Due Date of Calibration |
|------------------------------------------------|----------------|-------------------------------------------------------------------|---------------------|-------------------------|
| Test Receiver<br>Agilent                       | N9038A         | MY51210203                                                        | Feb. 17, 2017       | Feb. 16, 2018           |
| Spectrum Analyzer<br>Agilent                   | N9010A         | MY52220314                                                        | Dec. 16, 2016       | Dec. 15, 2017           |
| BILOG Antenna<br>SCHWARZBECK                   | VULB9168       | 9168-472                                                          | Dec. 13, 2016       | Dec. 12, 2017           |
| HORN Antenna<br>SCHWARZBECK                    | BBHA 9120 D    | 9120D-969                                                         | Dec. 27, 2016       | Dec. 26, 2017           |
| HORN Antenna<br>SCHWARZBECK                    | BBHA 9170      | 9170-480                                                          | Dec. 14, 2016       | Dec. 13, 2017           |
| RF signal cable<br>ETS-LINDGREN                | 5D-FB          | Cable-CH1-01(R<br>FC-SMS-100-SM<br>S-120+RFC-SMS<br>-100-SMS-400) | Jun. 23, 2017       | Jun. 22, 2018           |
| Loop Antenna                                   | EM-6879        | 269                                                               | Aug. 11, 2017       | Aug. 10, 2018           |
| Preamplifier<br>EMCI                           | EMC001340      | 980201                                                            | Nov. 02, 2016       | Nov. 01, 2017           |
| Preamplifier<br>EMCI                           | EMC 012645     | 980115                                                            | Oct. 21, 2016       | Oct. 20, 2017           |
| Preamplifier<br>EMCI                           | EMC 184045     | 980116                                                            | Oct. 21, 2016       | Oct. 20, 2017           |
| Preamplifier<br>EMCI                           | EMC 330H       | 980112                                                            | Oct. 21, 2016       | Oct. 20, 2017           |
| RF signal cable<br>HUBER+SUHNNER               | SUCOFLEX 104   | 309219/4<br>2950114                                               | Oct. 21, 2016       | Oct. 20, 2017           |
| RF signal cable<br>HUBER+SUHNNER               | SUCOFLEX 104   | 250130/4                                                          | Oct. 21, 2016       | Oct. 20, 2017           |
| RF Coaxial Cable<br>Worken                     | 8D-FB          | Cable-Ch10-01                                                     | Oct. 21, 2016       | Oct. 20, 2017           |
| Software<br>BV ADT                             | E3<br>6.120103 | NA                                                                | NA                  | NA                      |
| Antenna Tower<br>MF                            | MFA-440H       | NA                                                                | NA                  | NA                      |
| Turn Table<br>MF                               | MFT-201SS      | NA                                                                | NA                  | NA                      |
| Antenna Tower & Turn<br>Table Controller<br>MF | MF-7802        | NA                                                                | NA                  | NA                      |
| Turn Table<br>MF                               | MFT-201SS      | NA                                                                | NA                  | NA                      |
| Antenna Tower & Turn<br>Table Controller<br>MF | MF-7802        | NA                                                                | NA                  | NA                      |

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 10.
3. The horn antenna and preamplifier (model: EMC 184045) are used only for the measurement of emission frequency above 1 GHz if tested.
4. The IC Site Registration No. is IC7450F-10.

#### 4.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Height of receiving antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

#### NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle  $< 98\%$ ) or 10 Hz (Duty cycle  $> 98\%$ ) for Average detection (AV) at frequency above 1 GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Set Up

Frequency range 9k~30MHz:

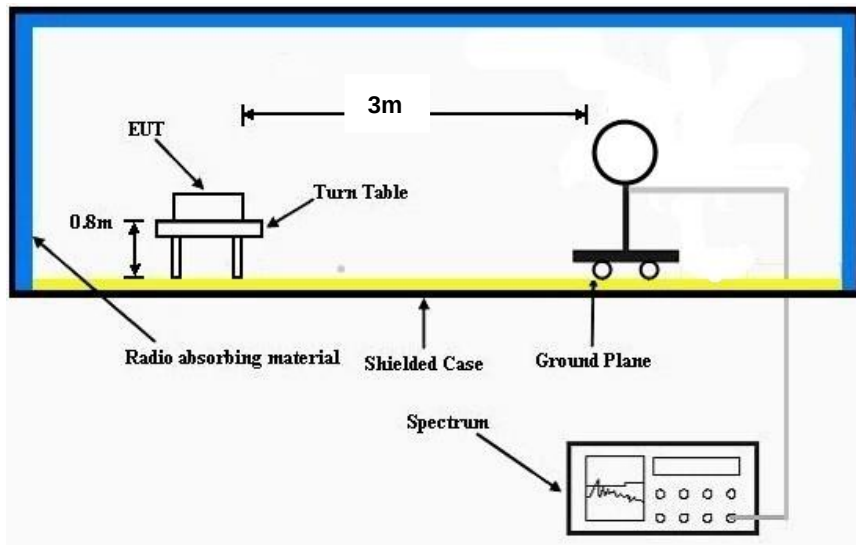

Frequency range 30~1000MHz:

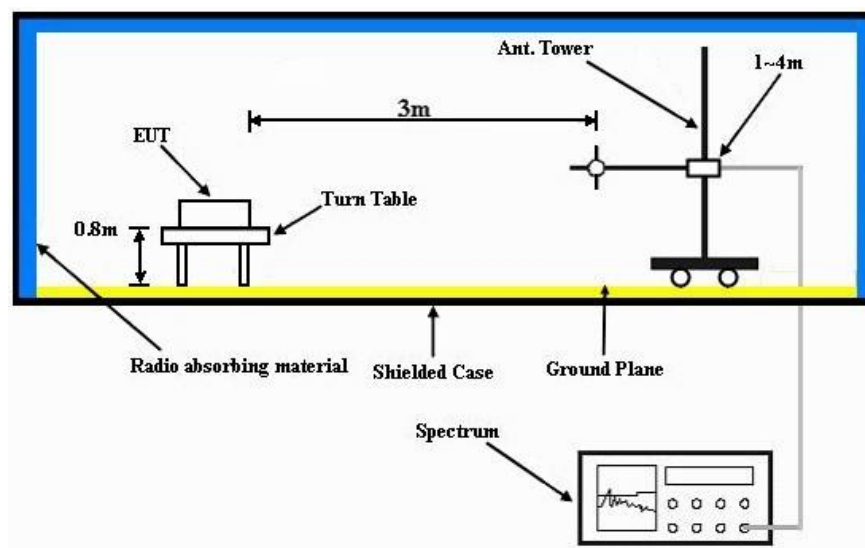

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Set the EUT under transmission condition continuously at specific channel frequency.

#### 4.1.7 Test Results


No non-compliance noted:

#### **KDB 937606 OATS and Chamber Correlation Justification**


- Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.
- OATs and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

| EUT Test Condition       |                    | Measurement Detail |                |
|--------------------------|--------------------|--------------------|----------------|
| Channel                  | Channel 1          | Frequency Range    | Below 1000 MHz |
| Input Power              | 120 Vac, 60 Hz     | Detector Function  | Peak           |
| Environmental Conditions | 25 deg. C, 65 % RH | Tested By          | Getaz Yang     |

#### HORIZONTAL

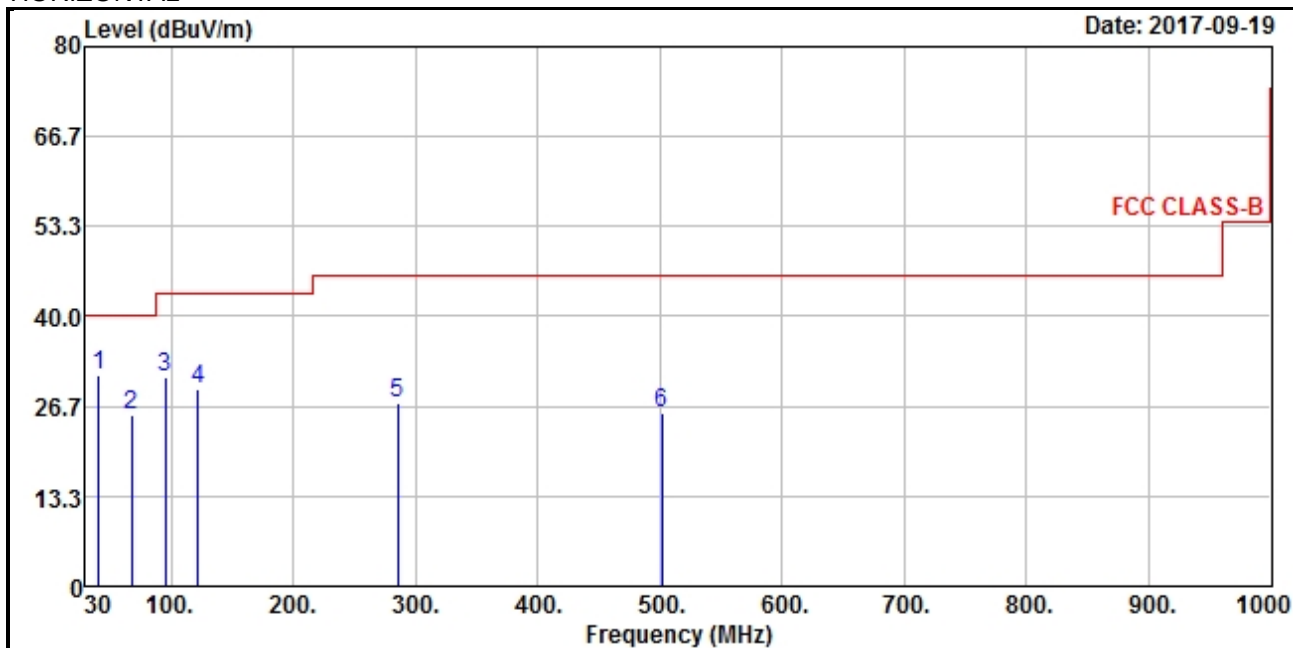

#### VERTICAL

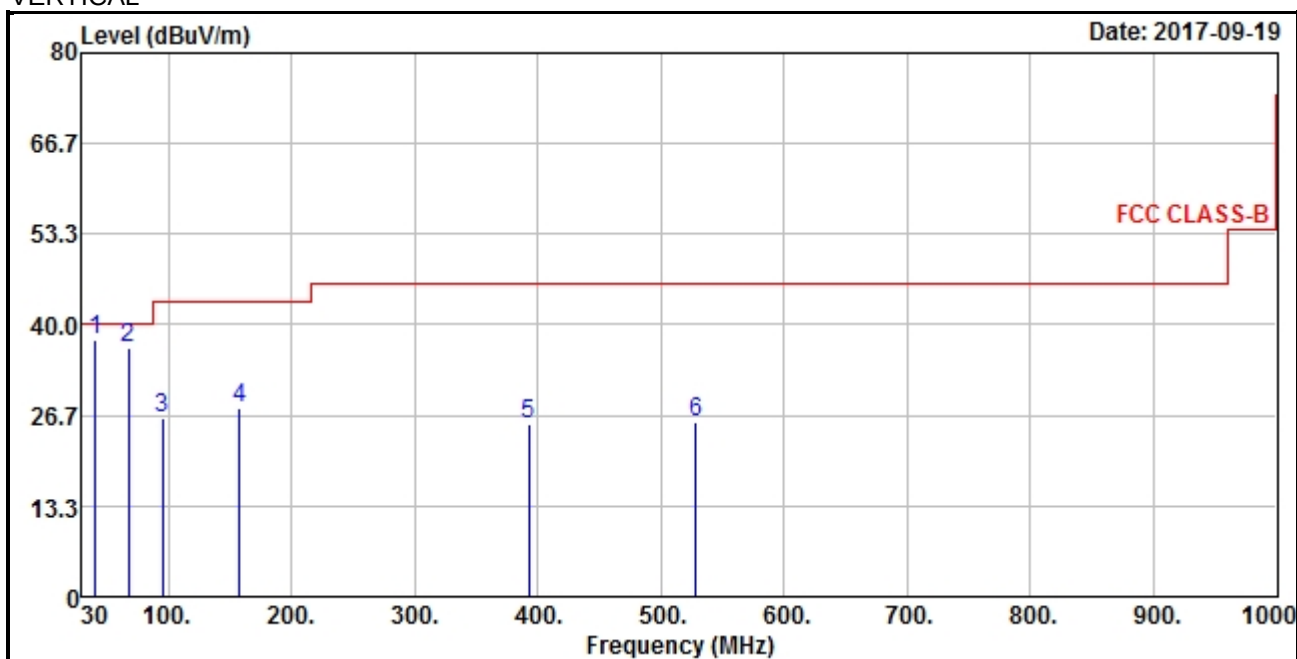

| Antenna Polarity & Test Distance: Horizontal at 3 m |                         |                   |                |             |                       |                 |                    |                     |                      |        |
|-----------------------------------------------------|-------------------------|-------------------|----------------|-------------|-----------------------|-----------------|--------------------|---------------------|----------------------|--------|
| Frequency (MHz)                                     | Emission Level (dBuV/m) | Read Level (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Antenna Height (cm) | Table Angle (Degree) | Remark |
| 40.67                                               | 31.2                    | 48.18             | 40             | -8.8        | 13.55                 | 0.49            | 31.02              | 164                 | 194                  | Peak   |
| 67.83                                               | 25.45                   | 45.55             | 40             | -14.55      | 11                    | 0.63            | 31.73              | 118                 | 334                  | Peak   |
| 94.99                                               | 31.12                   | 53.67             | 43.5           | -12.38      | 8.68                  | 0.73            | 31.96              | 126                 | 346                  | Peak   |
| 122.15                                              | 29.19                   | 49.09             | 43.5           | -14.31      | 11.15                 | 0.85            | 31.9               | 143                 | 253                  | Peak   |
| 285.11                                              | 27.24                   | 44.87             | 46             | -18.76      | 12.51                 | 1.6             | 31.74              | 110                 | 182                  | Peak   |
| 501.42                                              | 25.71                   | 37.46             | 46             | -20.29      | 17.35                 | 2.52            | 31.62              | 130                 | 318                  | Peak   |
| Antenna Polarity & Test Distance: Vertical at 3 m   |                         |                   |                |             |                       |                 |                    |                     |                      |        |
| Frequency (MHz)                                     | Emission Level (dBuV/m) | Read Level (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Antenna Height (cm) | Table Angle (Degree) | Remark |
| 40.67                                               | 37.93                   | 54.91             | 40             | -2.07       | 13.55                 | 0.49            | 31.02              | 128                 | 131                  | Peak   |
| 67.83                                               | 36.46                   | 56.56             | 40             | -3.54       | 11                    | 0.63            | 31.73              | 134                 | 146                  | Peak   |
| 94.99                                               | 26.26                   | 48.81             | 43.5           | -17.24      | 8.68                  | 0.73            | 31.96              | 133                 | 101                  | Peak   |
| 158.04                                              | 27.83                   | 45.92             | 43.5           | -15.67      | 12.73                 | 1.01            | 31.83              | 113                 | 329                  | Peak   |
| 392.78                                              | 25.44                   | 40.28             | 46             | -20.56      | 15.17                 | 2.06            | 32.07              | 111                 | 67                   | Peak   |
| 528.58                                              | 25.75                   | 36.84             | 46             | -20.25      | 17.97                 | 2.62            | 31.68              | 136                 | 110                  | Peak   |

**REMARKS:**

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor  
Margin value = Emission level – Limit value.

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

| Frequency (MHz) | Conducted Limit (dBuV) |         |
|-----------------|------------------------|---------|
|                 | Quasi-peak             | Average |
| 0.15 - 0.5      | 66 - 56                | 56 - 46 |
| 0.50 - 5.0      | 56                     | 46      |
| 5.0 - 30.0      | 60                     | 50      |

Note:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

### 4.2.2 Test Instruments

| Description & Manufacturer                  | Model No.                | Serial No.     | Date Of Calibration | Due Date Of Calibration |
|---------------------------------------------|--------------------------|----------------|---------------------|-------------------------|
| Test Receiver<br>ROHDE & SCHWARZ            | ESCI                     | 100613         | Nov. 21, 2016       | Nov. 20, 2017           |
| RF signal cable (with<br>10dB PAD)<br>Woken | 5D-FB                    | Cable-cond1-01 | Sep. 05, 2017       | Sep. 04, 2018           |
| LISN/AMN<br>ROHDE & SCHWARZ<br>(EUT)        | ESH3-Z5                  | 835239/001     | Mar. 10, 2017       | Mar. 09, 2018           |
| LISN/AMN<br>ROHDE & SCHWARZ<br>(Peripheral) | ESH3-Z5                  | 100311         | Aug. 15, 2017       | Aug. 14, 2018           |
| Software<br>ADT                             | BV ADT_Cond_<br>V7.3.7.3 | NA             | NA                  | NA                      |

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Shielded Room 1.
  3. The VCCI Site Registration No. is C-2047.



#### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz - 30 MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

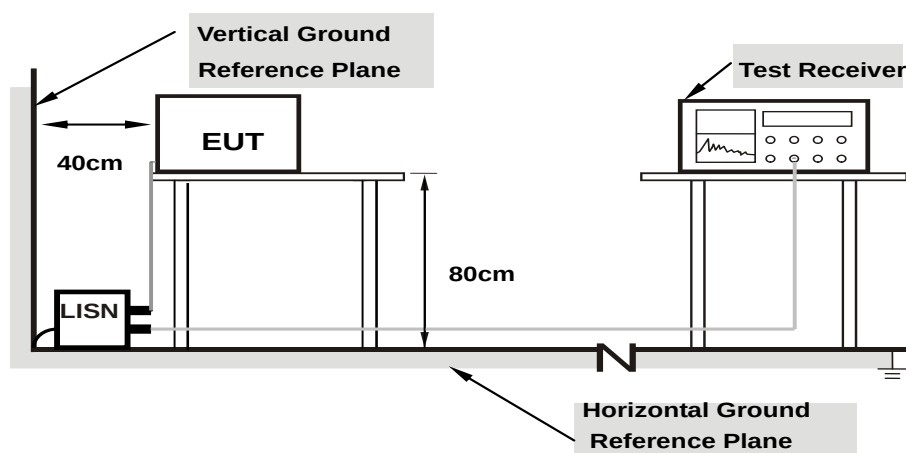

**Note: 1.Support units were connected to second LISN.  
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Set the EUT under transmission condition continuously at specific channel frequency.


#### 4.2.7 Test Results

|                 |                |                                          |                                      |
|-----------------|----------------|------------------------------------------|--------------------------------------|
| Frequency Range | 150kHz ~ 30MHz | Detector Function & Resolution Bandwidth | Quasi-Peak (QP) / Average (AV), 9kHz |
| Input Power     | 120Vac, 60Hz   | Environmental Conditions                 | 25°C, 65%RH                          |
| Tested by       | Getaz Yang     | Test Date                                | 2017/9/19                            |

| Phase Of Power : Line (L) |                 |                        |                      |       |                       |       |              |       |             |        |
|---------------------------|-----------------|------------------------|----------------------|-------|-----------------------|-------|--------------|-------|-------------|--------|
| No                        | Frequency (MHz) | Correction Factor (dB) | Reading Value (dBuV) |       | Emission Level (dBuV) |       | Limit (dBuV) |       | Margin (dB) |        |
|                           |                 |                        | Q.P.                 | AV.   | Q.P.                  | AV.   | Q.P.         | AV.   | Q.P.        | AV.    |
| 1                         | 0.17801         | 10.39                  | 31.79                | 22.93 | 42.18                 | 33.32 | 64.58        | 54.58 | -22.40      | -21.26 |
| 2                         | 0.19832         | 10.39                  | 35.62                | 23.92 | 46.01                 | 34.31 | 63.68        | 53.68 | -17.67      | -19.37 |
| 3                         | 0.29444         | 10.40                  | 28.15                | 15.73 | 38.55                 | 26.13 | 60.40        | 50.40 | -21.85      | -24.27 |
| 4                         | 1.75000         | 10.45                  | 14.93                | 6.70  | 25.38                 | 17.15 | 56.00        | 46.00 | -30.62      | -28.85 |
| 5                         | 13.55800        | 11.04                  | 39.40                | 37.88 | 50.44                 | 48.92 | 60.00        | 50.00 | -9.56       | -1.08  |
| 6                         | 21.61000        | 11.41                  | 18.57                | 9.23  | 29.98                 | 20.64 | 60.00        | 50.00 | -30.02      | -29.36 |

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

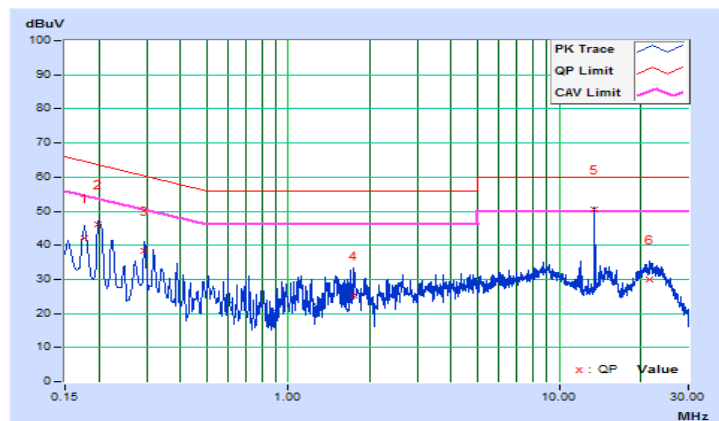


|                 |                |                                          |                                      |
|-----------------|----------------|------------------------------------------|--------------------------------------|
| Frequency Range | 150kHz ~ 30MHz | Detector Function & Resolution Bandwidth | Quasi-Peak (QP) / Average (AV), 9kHz |
| Input Power     | 120Vac, 60Hz   | Environmental Conditions                 | 25°C, 65%RH                          |
| Tested by       | Getaz Yang     | Test Date                                | 2017/9/19                            |

| Phase Of Power : Neutral (N) |                 |                        |                      |       |                       |       |              |       |             |        |
|------------------------------|-----------------|------------------------|----------------------|-------|-----------------------|-------|--------------|-------|-------------|--------|
| No                           | Frequency (MHz) | Correction Factor (dB) | Reading Value (dBuV) |       | Emission Level (dBuV) |       | Limit (dBuV) |       | Margin (dB) |        |
|                              |                 |                        | Q.P.                 | AV.   | Q.P.                  | AV.   | Q.P.         | AV.   | Q.P.        | AV.    |
| 1                            | 0.19800         | 10.16                  | 33.61                | 22.71 | 43.77                 | 32.87 | 63.69        | 53.69 | -19.92      | -20.82 |
| 2                            | 0.31400         | 10.17                  | 19.75                | 12.72 | 29.92                 | 22.89 | 59.86        | 49.86 | -29.94      | -26.97 |
| 3                            | 0.68592         | 10.18                  | 20.27                | 11.59 | 30.45                 | 21.77 | 56.00        | 46.00 | -25.55      | -24.23 |
| 4                            | 2.56600         | 10.26                  | 21.88                | 10.83 | 32.14                 | 21.09 | 56.00        | 46.00 | -23.86      | -24.91 |
| 5                            | 13.55800        | 10.72                  | 40.43                | 38.29 | 51.15                 | 49.01 | 60.00        | 50.00 | -8.85       | -0.99  |
| 6                            | 23.37400        | 11.06                  | 18.79                | 12.41 | 29.85                 | 23.47 | 60.00        | 50.00 | -30.15      | -26.53 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

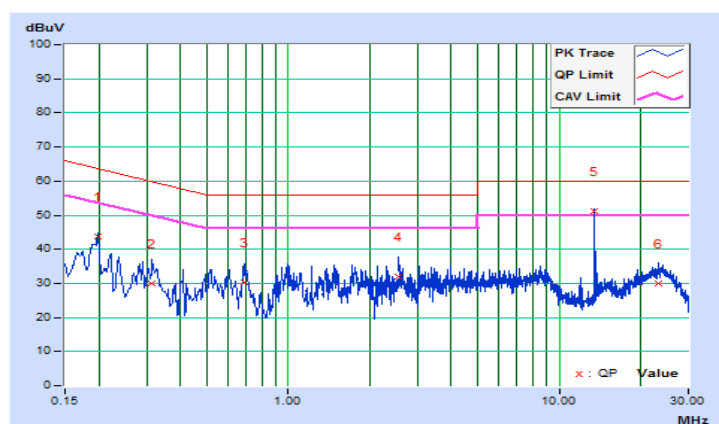

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---