

FCC PART 15.247


TEST REPORT

For

DOPPIO MOBILE INTERNATIONAL LIMITED

ROOM 1708,17/F HART AVENUE PLAZA,5-9 HART AVENUE TSIM SHA TSUI,KOWLOON,
Hong Kong

FCC ID: N2GSG351

Report Type: Original Report	Product Type: Doppio Onix
Test Engineer:	Allen Qiao 
Report Number:	RDG151126003-00B
Report Date:	2015-12-08
Reviewed By:	Sula Huang  RF Leader
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EQUIPMENT MODIFICATIONS	5
EUT EXERCISE SOFTWARE	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE	9
APPLICABLE STANDARD	9
FCC §15.203 - ANTENNA REQUIREMENT.....	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY	11
EUT SETUP	11
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	12
CORRECTED AMPLITUDE & MARGIN CALCULATION	12
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST RESULTS SUMMARY	13
TEST DATA	13
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	18
APPLICABLE STANDARD	18
MEASUREMENT UNCERTAINTY	18
EUT SETUP	18
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	19
TEST PROCEDURE	19
CORRECTED AMPLITUDE & MARGIN CALCULATION	20
TEST EQUIPMENT LIST AND DETAILS.....	20
TEST RESULTS SUMMARY	20
TEST DATA	20
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST EQUIPMENT LIST AND DETAILS.....	34
TEST DATA	34
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	43

APPLICABLE STANDARD	43
TEST PROCEDURE	43
TEST EQUIPMENT LIST AND DETAILS.....	43
TEST DATA	43
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	45
APPLICABLE STANDARD	45
TEST PROCEDURE	45
TEST EQUIPMENT LIST AND DETAILS.....	45
TEST DATA	45
FCC §15.247(e) - POWER SPECTRAL DENSITY	51
APPLICABLE STANDARD	51
TEST PROCEDURE	51
TEST EQUIPMENT LIST AND DETAILS.....	51
TEST DATA	51

FINAL

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *DOPPIO MOBILE INTERNATIONAL LIMITED*'s product, model number:SG351 (FCC ID: N2GSG351) (the "EUT") in this report was a *Doppio Onix*, which was measured approximately: 11.5 cm (L) x 6.1cm (W) x 1.0 cm (H), rated input voltage: DC3.7V rechargeable Li-ion battery or DC5.0V charging from adapter.

Adapter information:

Model: SG351

Input: AC100-240V, 50/60 Hz, 0.2A

Output: DC 5V, 700mA

All measurement and test data in this report was gathered from production sample serial number: 151126003 (Assigned byBACL, Dongguan). The EUT was received on 2015-11-27.

Objective

This report is prepared on behalf of *DOPPIO MOBILE INTERNATIONAL LIMITED*.in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communications Commission's rules

The tests were performed in order to determine the compliance of the EUT with FCC Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP submissions with FCC ID:N2GSG351.

FCC Part 15C DSS submissions with FCC ID:N2GSG351.

FCC Part 22H, 24E PCE submissions with FCC ID:N2GSG351.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in testing mode, which was provided by manufacturer.
For 2.4GHz band, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, and 802.11n ht20 modes were tested with channel 1, 6 and 11.
For 802.11n ht40 mode were tested with Channel 3, 6 and 9.

For Bluetooth LE mode, 40 channels are provided for testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	...	...
...	...	...	...
...	...	...	...
..	...	38	2478
19	2440	39	2480

EUT was tested with channel 0, 19 and 39.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

The worst condition (maximum power with 100% duty cycle) was setting by the software as following table:

Test Mode	Test Software Version	Engineering Mode-TX		
802.11b	Test Frequency	2412MHz	2437MHz	2462MHz
	Data Rate	1Mbps	1Mbps	1Mbps
	Power Level Setting	11	10.5	10
802.11g	Test Frequency	2412MHz	2437MHz	2462MHz
	Data Rate	6Mbps	6Mbps	6Mbps
	Power Level Setting	10	10	9.5
802.11n ht20	Test Frequency	2412MHz	2437MHz	2462MHz
	Data Rate	MCS0	MCS0	MCS0
	Power Level Setting	10	10	10
802.11n ht40	Test Frequency	2422MHz	2437MHz	2452MHz
	Data Rate	MCS0	MCS0	MCS0
	Power Level Setting	12	12	12
BLE	Test Frequency	2402MHz	2440MHz	2480MHz
	BLE	N/A	N/A	N/A


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/

External Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	yes	no	0.8	USB Port of Adapter	EUT
Earphone Cable	no	no	1.1	Audio Port of EUT	Earphone

Block Diagram of Test Setup

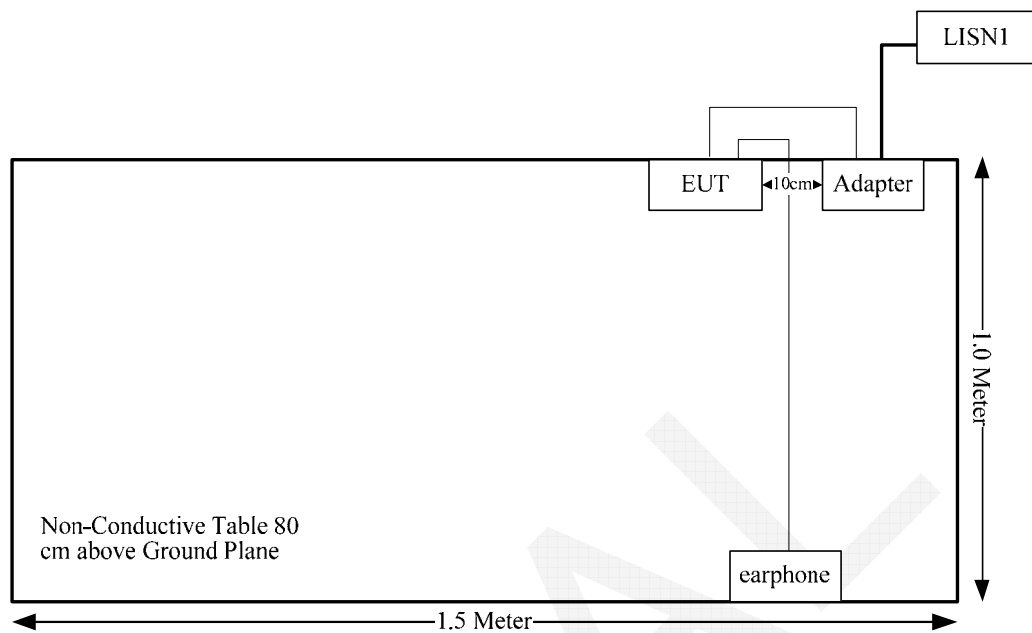

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum conducted output power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

For 100 MHz to 6 GHz and *test separation distances* ≤ 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}]$
 ≤ 3.0 for 1-g SAR, and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- The values 3.0 and 7.5 are referred to as *numeric thresholds* in step b) below

The test exclusions are applicable only when the minimum *test separation distance* is ≤ 50 mm, and for transmission frequencies between 100 MHz and 6 GHz. When the minimum *test separation distance* is < 5 mm, a distance of 5 mm according to 4.1 f) is applied to determine SAR test

Measurement Result

For Wi-Fi mode:

The tune-up conducted average output power = 9.4 dBm (8.71 mW) at 2462 MHz
 $[(\text{max. power of channel, mW}) / (\text{min. test separation distance, mm})] [\sqrt{f(\text{GHz})}]$
 $= 8.71/5 \cdot (\sqrt{2.462}) = 2.73 < 3.0$

For bluetooth LE mode:

The tune-up conducted output power = -5.6 dBm (0.275 mW) at 2480 MHz
 $[(\text{max. power of channel, mW}) / (\text{min. test separation distance, mm})] [\sqrt{f(\text{GHz})}]$
 $= 0.275/5 \cdot (\sqrt{2.48}) = 0.087 < 3.0$

So the stand-alone SAR evaluation is not necessary.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT has one integral antenna arrangement for WiFi/BT, which was permanently attached and the antenna gain is -1 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner :

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.


Based on CISPR 16-4-2-2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cispr}

Measurement	U_{cispr}
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

Note: The $U_{lab} > U_{cispr}$, so the U_{lab} is add in the calculation.

EUT Setup

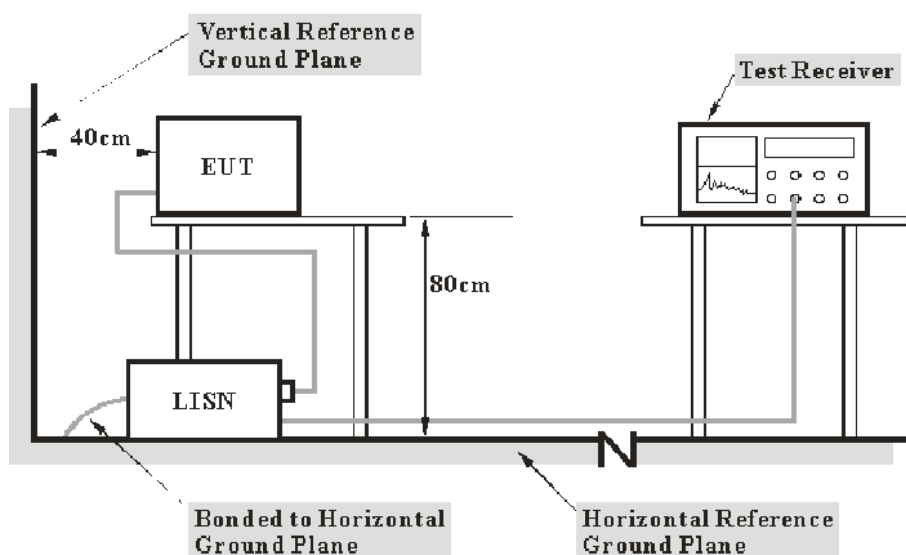

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2015-10-20	2016-10-20
R&S	L.I.S.N	ESH2-Z5	892107/021	2015-07-16	2016-07-15
R&S	Two-line V-network	ENV 216	3560.6550.12	2014-12-11	2015-12-11
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

7.5 dB at 0.436318 MHz in the **Neutral** conducted for WiFi mode


Test Data**Environmental Conditions**

Temperature:	23.6°C
Relative Humidity:	41 %
ATM Pressure:	101.5 kPa

The testing was performed by Allen Qiao on 2015-11-30.


Test Mode: Transmitting (Wi-Fi)

AC120 V, 60 Hz, Line:

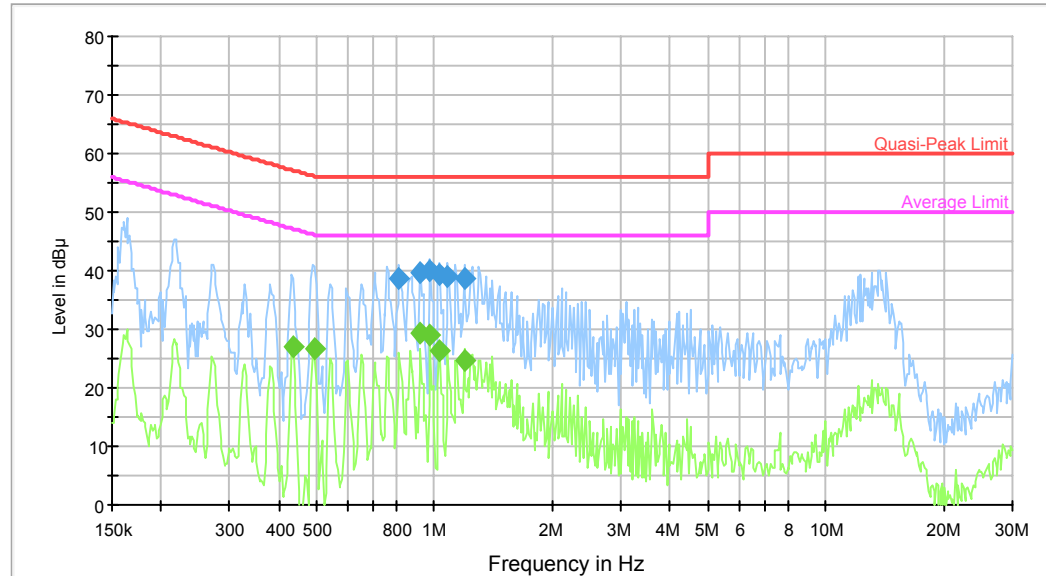

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.812315	38.6	9.000	L1	0.2	17.4	56.0	Compliance
0.922769	39.8	9.000	L1	0.2	16.2	56.0	Compliance
0.975701	40.1	9.000	L1	0.2	15.9	56.0	Compliance
1.031669	39.4	9.000	L1	0.2	16.6	56.0	Compliance
1.082190	38.9	9.000	L1	0.2	17.1	56.0	Compliance
1.190776	38.6	9.000	L1	0.2	17.4	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.436318	27.1	9.000	L1	0.2	20.0	47.1	Compliance
0.491712	26.7	9.000	L1	0.2	19.4	46.1	Compliance
0.922769	29.2	9.000	L1	0.2	16.8	46.0	Compliance
0.975701	28.9	9.000	L1	0.2	17.1	46.0	Compliance
1.031669	26.5	9.000	L1	0.2	19.5	46.0	Compliance
1.190776	24.7	9.000	L1	0.2	21.3	46.0	Compliance

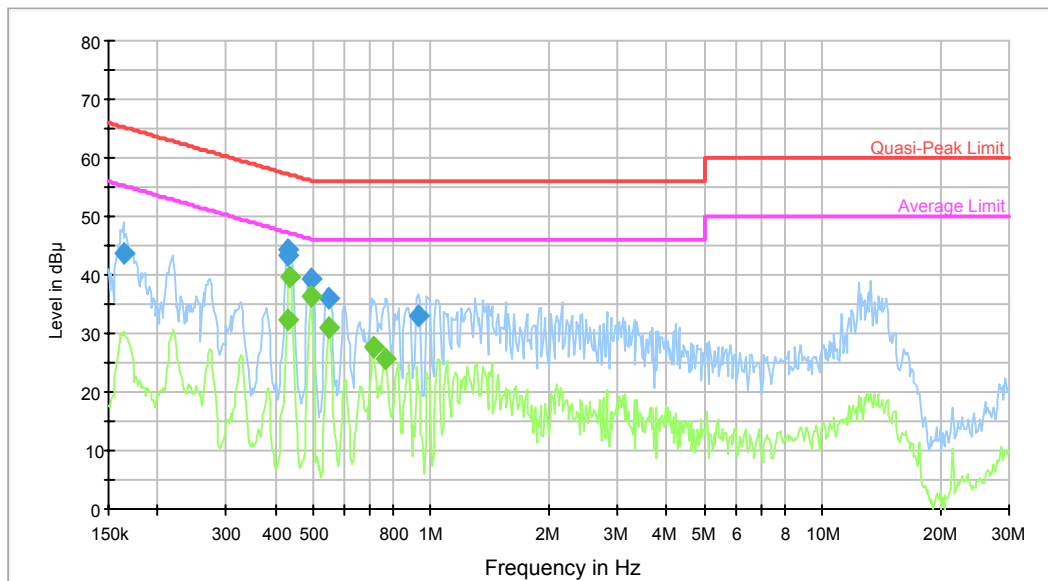
AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.163741	43.8	9.000	N	0.2	21.5	65.3	Compliance
0.429420	43.2	9.000	N	0.2	14.1	57.3	Compliance
0.432855	44.4	9.000	N	0.2	12.8	57.2	Compliance
0.495646	39.3	9.000	N	0.2	16.8	56.1	Compliance
0.545378	36.0	9.000	N	0.2	20.0	56.0	Compliance
0.930151	33.2	9.000	N	0.2	22.8	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.429420	32.3	9.000	N	0.2	15.0	47.3	Compliance
0.436318	39.6	9.000	N	0.2	7.5	47.1	Compliance
0.491712	36.3	9.000	N	0.2	9.8	46.1	Compliance
0.549741	30.9	9.000	N	0.2	15.1	46.0	Compliance
0.715082	27.6	9.000	N	0.2	18.4	46.0	Compliance
0.768247	25.8	9.000	N	0.2	20.2	46.0	Compliance


Test Mode: Transmitting (BLE)

AC120 V, 60 Hz, Line:

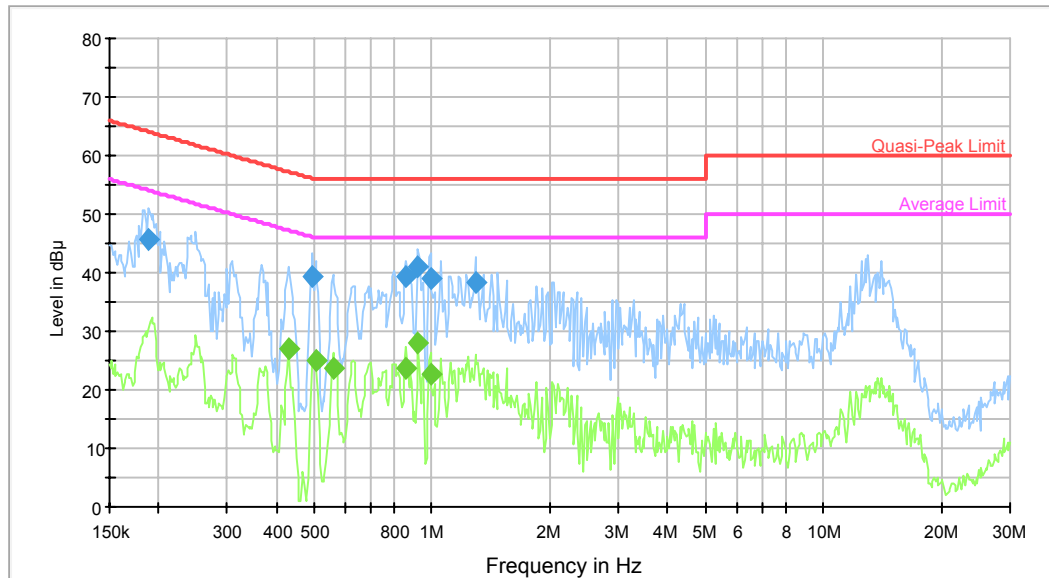

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.188994	45.5	9.000	L1	0.2	18.6	64.1	Compliance
0.495646	39.2	9.000	L1	0.2	16.9	56.1	Compliance
0.858911	39.3	9.000	L1	0.2	16.7	56.0	Compliance
0.922769	41.0	9.000	L1	0.2	15.0	56.0	Compliance
0.991374	38.9	9.000	L1	0.2	17.1	56.0	Compliance
1.289541	38.4	9.000	L1	0.2	17.6	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.429420	27.2	9.000	L1	0.2	20.1	47.3	Compliance
0.503608	24.9	9.000	L1	0.2	21.1	46.0	Compliance
0.558572	23.5	9.000	L1	0.2	22.5	46.0	Compliance
0.858911	23.7	9.000	L1	0.2	22.3	46.0	Compliance
0.922769	28.1	9.000	L1	0.2	17.9	46.0	Compliance
0.991374	22.6	9.000	L1	0.2	23.4	46.0	Compliance

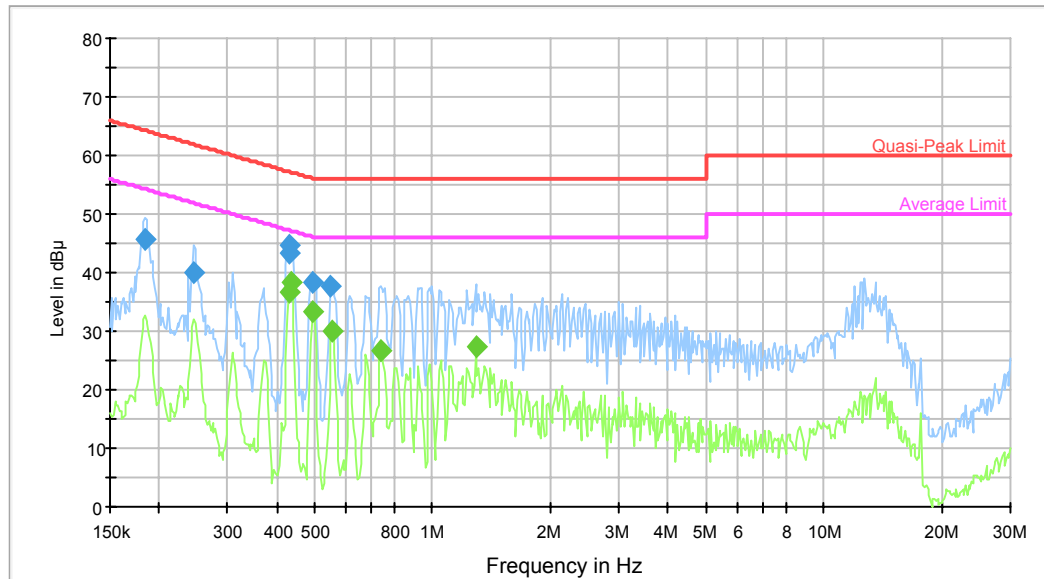AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.184529	45.5	9.000	N	0.2	18.8	64.3	Compliance
0.245835	39.8	9.000	N	0.2	22.1	61.9	Compliance
0.429420	44.5	9.000	N	0.2	12.8	57.3	Compliance
0.432855	43.3	9.000	N	0.2	13.9	57.2	Compliance
0.495646	38.4	9.000	N	0.2	17.7	56.1	Compliance
0.549741	37.6	9.000	N	0.2	18.4	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.429420	36.6	9.000	N	0.2	10.7	47.3	Compliance
0.436318	38.2	9.000	N	0.2	8.9	47.1	Compliance
0.495646	33.4	9.000	N	0.2	12.7	46.1	Compliance
0.554139	30.1	9.000	N	0.2	15.9	46.0	Compliance
0.738241	26.7	9.000	N	0.2	19.3	46.0	Compliance
1.289541	27.2	9.000	N	0.3	18.8	46.0	Compliance

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner :

If U_{lab} is less than or equal to U_{cisp} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cisp} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:

30M~200MHz: 5.0 dB

200M~1GHz: 6.2 dB

1G~6GHz: 4.45 dB


6G~18GHz: 5.23 dB


Table 2 – Values of U_{cisp}

Measurement	U_{cisp}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1GHz:

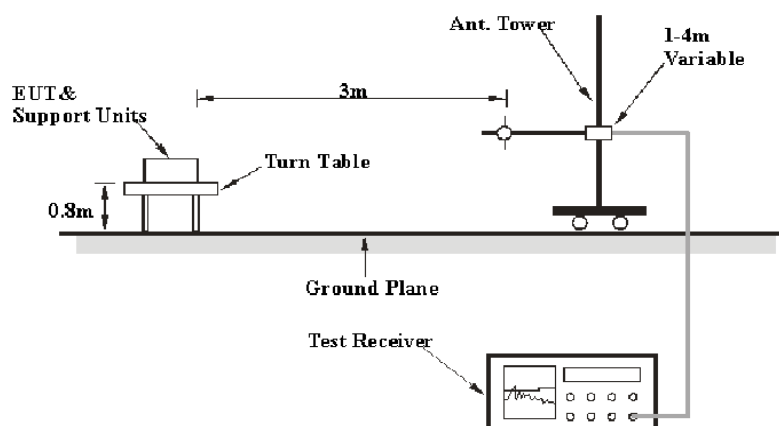

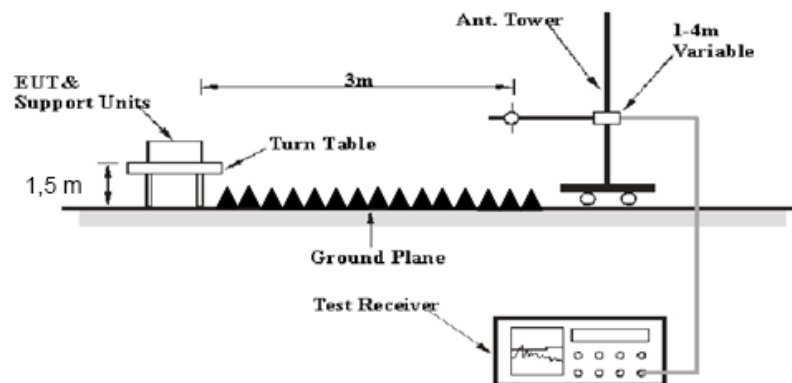Above 1GHz:

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits. The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2015-08-03	2016-08-02
Sunol Sciences	Antenna	JB3	A060611-3	2014-11-06	2017-11-05
HP	Amplifier	8447E	2434A02181	2015-09-01	2016-09-01
Agilent	Spectrum Analyzer	E4440A	SG43360054	2015-11-23	2016-11-22
ETS-Lindgren	Horn Antenna	3115	9808-5557	2015-09-06	2018-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2015-02-19	2016-02-19
R&S	Spectrum Analyzer	FSP 38	100478	2015-11-23	2016-11-22
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2017-06-15
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2015-09-06	2016-09-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Section 15.205, 15.209 and 15.247, with the worst margin reading of:

9.93 dB at 2483.5 MHz in the Horizontal polarization for WiFi mode

Test Data

Environmental Conditions

Temperature:	24.3~25.4 °C
Relative Humidity:	42~45 %
ATM Pressure:	101.4~101.5 kPa

* The testing was performed by Allen Qiao on 2015-12-03 & 2015-12-04.

Test Mode: Transmitting

802.11b Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	64.49	PK	H	25.67	3.68	0.00	93.84	N/A	N/A
2412	61.15	AV	H	25.67	3.68	0.00	90.50	N/A	N/A
2412	62.48	PK	V	25.67	3.68	0.00	91.83	N/A	N/A
2412	59.19	AV	V	25.67	3.68	0.00	88.54	N/A	N/A
2390	26.11	PK	H	25.61	3.63	0.00	55.35	74.00	18.65
2390	12.9	AV	H	25.61	3.63	0.00	42.14	54.00	11.86
4824	31.09	PK	H	30.64	5.03	27.41	39.35	74.00	34.65
4824	18.08	AV	H	30.64	5.03	27.41	26.34	54.00	27.66
7236	31.55	PK	H	34.17	6.65	25.90	46.47	74.00	27.53
7236	18.6	AV	H	34.17	6.65	25.90	33.52	54.00	20.48
9648	29.16	PK	H	36.06	8.55	27.46	46.31	74.00	27.69
9648	16.07	AV	H	36.06	8.55	27.46	33.22	54.00	20.78
3460	34.29	PK	H	28.67	4.86	27.22	40.60	74.00	33.40
3460	21.68	AV	H	28.67	4.86	27.22	27.99	54.00	26.01
251.3	30.2	QP	H	12.14	1.91	21.49	22.76	46.00	23.24
Middle Channel: 2437 MHz									
2437	64.22	PK	H	25.74	3.75	0.00	93.71	N/A	N/A
2437	60.71	AV	H	25.74	3.75	0.00	90.20	N/A	N/A
2437	62.1	PK	V	25.74	3.75	0.00	91.59	N/A	N/A
2437	58.84	AV	V	25.74	3.75	0.00	88.33	N/A	N/A
4874	30.96	PK	H	30.77	5.14	27.42	39.45	74.00	34.55
4874	17.98	AV	H	30.77	5.14	27.42	26.47	54.00	27.53
7311	31.06	PK	H	34.35	6.74	25.88	46.27	74.00	27.73
7311	18.24	AV	H	34.35	6.74	25.88	33.45	54.00	20.55
9748	29.36	PK	H	36.30	8.61	27.24	47.03	74.00	26.97
9748	16.32	AV	H	36.30	8.61	27.24	33.99	54.00	20.01
3460	34.49	PK	H	28.67	4.86	27.22	40.80	74.00	33.20
3460	21.86	AV	H	28.67	4.86	27.22	28.17	54.00	25.83
3295	33.05	PK	H	28.14	5.26	27.29	39.16	74.00	34.84
3295	20.41	AV	H	28.14	5.26	27.29	26.52	54.00	27.48
251.3	30.4	QP	H	12.14	1.91	21.49	22.96	46.00	23.04
High Channel: 2462 MHz									
2462	64.04	PK	H	25.80	3.75	0.00	93.59	N/A	N/A
2462	60.54	AV	H	25.80	3.75	0.00	90.09	N/A	N/A
2462	61.99	PK	V	25.80	3.75	0.00	91.54	N/A	N/A
2462	58.53	AV	V	25.80	3.75	0.00	88.08	N/A	N/A
2483.5	26.9	PK	H	25.86	3.67	0.00	56.43	74.00	17.57
2483.5	13.53	AV	H	25.86	3.67	0.00	43.06	54.00	10.94
4924	30.87	PK	H	30.90	5.34	27.43	39.68	74.00	34.32
4924	17.71	AV	H	30.90	5.34	27.43	26.52	54.00	27.48
7386	31.21	PK	H	34.53	6.83	25.86	46.71	74.00	27.29
7386	18.18	AV	H	34.53	6.83	25.86	33.68	54.00	20.32
9848	29.44	PK	H	36.54	8.66	26.94	47.70	74.00	26.30
9848	16.35	AV	H	36.54	8.66	26.94	34.61	54.00	19.39
3460	34.47	PK	H	28.67	4.86	27.22	40.78	74.00	33.22
3460	21.97	AV	H	28.67	4.86	27.22	28.28	54.00	25.72
251.3	30.6	QP	H	12.14	1.91	21.49	23.16	46.00	22.84

802.11g Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	66.32	PK	H	25.67	3.68	0.00	95.67	N/A	N/A
2412	57.64	AV	H	25.67	3.68	0.00	86.99	N/A	N/A
2412	63.76	PK	V	25.67	3.68	0.00	93.11	N/A	N/A
2412	54.91	AV	V	25.67	3.68	0.00	84.26	N/A	N/A
2390	25.13	PK	H	25.61	3.63	0.00	54.37	74.00	19.63
2390	13.27	AV	H	25.61	3.63	0.00	42.51	54.00	11.49
4824	31.55	PK	H	30.64	5.03	27.41	39.81	74.00	34.19
4824	18.39	AV	H	30.64	5.03	27.41	26.65	54.00	27.35
7236	32.07	PK	H	34.17	6.65	25.90	46.99	74.00	27.01
7236	18.61	AV	H	34.17	6.65	25.90	33.53	54.00	20.47
9648	29.39	PK	H	36.06	8.55	27.46	46.54	74.00	27.46
9648	16.09	AV	H	36.06	8.55	27.46	33.24	54.00	20.76
3910	32.75	PK	H	29.70	4.44	27.28	39.61	74.00	34.39
3910	20.16	AV	H	29.70	4.44	27.28	27.02	54.00	26.98
251.3	30.6	QP	H	12.14	1.91	21.49	23.16	46.00	22.84
Middle Channel: 2437 MHz									
2437	66.11	PK	H	25.74	3.75	0.00	95.60	N/A	N/A
2437	57.19	AV	H	25.74	3.75	0.00	86.68	N/A	N/A
2437	63.35	PK	V	25.74	3.75	0.00	92.84	N/A	N/A
2437	54.59	AV	V	25.74	3.75	0.00	84.08	N/A	N/A
4874	31.42	PK	H	30.77	5.14	27.42	39.91	74.00	34.09
4874	18.19	AV	H	30.77	5.14	27.42	26.68	54.00	27.32
7311	31.71	PK	H	34.35	6.74	25.88	46.92	74.00	27.08
7311	18.32	AV	H	34.35	6.74	25.88	33.53	54.00	20.47
9748	29.54	PK	H	36.30	8.61	27.24	47.21	74.00	26.79
9748	16.3	AV	H	36.30	8.61	27.24	33.97	54.00	20.03
3910	33.03	PK	H	29.70	4.44	27.28	39.89	74.00	34.11
3910	20.43	AV	H	29.70	4.44	27.28	27.29	54.00	26.71
3295	32.39	PK	H	28.14	5.26	27.29	38.50	74.00	35.50
3295	19.87	AV	H	28.14	5.26	27.29	25.98	54.00	28.02
251.3	30.1	QP	H	12.14	1.91	21.49	22.66	46.00	23.34
High Channel: 2462 MHz									
2462	65.69	PK	H	25.80	3.75	0.00	95.24	N/A	N/A
2462	56.97	AV	H	25.80	3.75	0.00	86.52	N/A	N/A
2462	63.11	PK	V	25.80	3.75	0.00	92.66	N/A	N/A
2462	54.42	AV	V	25.80	3.75	0.00	83.97	N/A	N/A
2483.5	26.32	PK	H	25.86	3.67	0.00	55.85	74.00	18.15
2483.5	13.9	AV	H	25.86	3.67	0.00	43.43	54.00	10.57
4924	31.27	PK	H	30.90	5.34	27.43	40.08	74.00	33.92
4924	18.08	AV	H	30.90	5.34	27.43	26.89	54.00	27.11
7386	31.63	PK	H	34.53	6.83	25.86	47.13	74.00	26.87
7386	18.23	AV	H	34.53	6.83	25.86	33.73	54.00	20.27
9848	29.57	PK	H	36.54	8.66	26.94	47.83	74.00	26.17
9848	16.32	AV	H	36.54	8.66	26.94	34.58	54.00	19.42
3910	32.98	PK	H	29.70	4.44	27.28	39.84	74.00	34.16
3910	20.45	AV	H	29.70	4.44	27.28	27.31	54.00	26.69
251.3	30.8	QP	H	12.14	1.91	21.49	23.36	46.00	22.64

802.11 n ht20 Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	66.4	PK	H	25.67	3.68	0.00	95.75	N/A	N/A
2412	57.28	AV	H	25.67	3.68	0.00	86.63	N/A	N/A
2412	63.74	PK	V	25.67	3.68	0.00	93.09	N/A	N/A
2412	54.86	AV	V	25.67	3.68	0.00	84.21	N/A	N/A
2390	25.32	PK	H	25.61	3.63	0.00	54.56	74.00	19.44
2390	13.35	AV	H	25.61	3.63	0.00	42.59	54.00	11.41
4824	31.38	PK	H	30.64	5.03	27.41	39.64	74.00	34.36
4824	18.15	AV	H	30.64	5.03	27.41	26.41	54.00	27.59
7236	31.64	PK	H	34.17	6.65	25.90	46.56	74.00	27.44
7236	18.2	AV	H	34.17	6.65	25.90	33.12	54.00	20.88
9648	29.66	PK	H	36.06	8.55	27.46	46.81	74.00	27.19
9648	16.34	AV	H	36.06	8.55	27.46	33.49	54.00	20.51
3910	32.87	PK	H	29.70	4.44	27.28	39.73	74.00	34.27
3910	20.28	AV	H	29.70	4.44	27.28	27.14	54.00	26.86
251.3	30.8	QP	H	12.14	1.91	21.49	23.36	46.00	22.64
Middle Channel: 2437 MHz									
2437	66.18	PK	H	25.74	3.75	0.00	95.67	N/A	N/A
2437	57.04	AV	H	25.74	3.75	0.00	86.53	N/A	N/A
2437	63.31	PK	V	25.74	3.75	0.00	92.80	N/A	N/A
2437	54.54	AV	V	25.74	3.75	0.00	84.03	N/A	N/A
4874	31.45	PK	H	30.77	5.14	27.42	39.94	74.00	34.06
4874	18.26	AV	H	30.77	5.14	27.42	26.75	54.00	27.25
7311	31.73	PK	H	34.35	6.74	25.88	46.94	74.00	27.06
7311	18.31	AV	H	34.35	6.74	25.88	33.52	54.00	20.48
9748	29.51	PK	H	36.30	8.61	27.24	47.18	74.00	26.82
9748	16.24	AV	H	36.30	8.61	27.24	33.91	54.00	20.09
3910	32.88	PK	H	29.70	4.44	27.28	39.74	74.00	34.26
3910	20.42	AV	H	29.70	4.44	27.28	27.28	54.00	26.72
3295	33.16	PK	H	28.14	5.26	27.29	39.27	74.00	34.73
3295	20.55	AV	H	28.14	5.26	27.29	26.66	54.00	27.34
251.3	30.5	QP	H	12.14	1.91	21.49	23.06	46.00	22.94
High Channel: 2462 MHz									
2462	65.84	PK	H	25.80	3.75	0.00	95.39	N/A	N/A
2462	56.91	AV	H	25.80	3.75	0.00	86.46	N/A	N/A
2462	63.15	PK	V	25.80	3.75	0.00	92.70	N/A	N/A
2462	54.24	AV	V	25.80	3.75	0.00	83.79	N/A	N/A
2483.5	26.18	PK	H	25.86	3.67	0.00	55.71	74.00	18.29
2483.5	13.87	AV	H	25.86	3.67	0.00	43.40	54.00	10.60
4924	31.31	PK	H	30.90	5.34	27.43	40.12	74.00	33.88
4924	18.17	AV	H	30.90	5.34	27.43	26.98	54.00	27.02
7386	31.68	PK	H	34.53	6.83	25.86	47.18	74.00	26.82
7386	18.37	AV	H	34.53	6.83	25.86	33.87	54.00	20.13
9848	29.67	PK	H	36.54	8.66	26.94	47.93	74.00	26.07
9848	16.34	AV	H	36.54	8.66	26.94	34.60	54.00	19.40
3910	32.91	PK	H	29.70	4.44	27.28	39.77	74.00	34.23
3910	20.35	AV	H	29.70	4.44	27.28	27.21	54.00	26.79
251.3	30.2	QP	H	12.14	1.91	21.49	22.76	46.00	23.24

*within uncertainty measurement!

802.11 n ht40 Mode


Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2422 MHz									
2422	64.96	PK	H	25.70	3.71	0.00	94.37	N/A	N/A
2422	55.99	AV	H	25.70	3.71	0.00	85.40	N/A	N/A
2422	62.73	PK	V	25.70	3.71	0.00	92.14	N/A	N/A
2422	54.02	AV	V	25.70	3.71	0.00	83.43	N/A	N/A
2390	25.38	PK	H	25.61	3.63	0.00	54.62	74.00	19.38
2390	13.65	AV	H	25.61	3.63	0.00	42.89	54.00	11.11
4844	31.21	PK	H	30.69	4.99	27.42	39.47	74.00	34.53
4844	18.15	AV	H	30.69	4.99	27.42	26.41	54.00	27.59
7266	32.19	PK	H	34.24	6.68	25.89	47.22	74.00	26.78
7266	18.82	AV	H	34.24	6.68	25.89	33.85	54.00	20.15
9688	29.31	PK	H	36.15	8.58	27.37	46.67	74.00	27.33
9688	16.17	AV	H	36.15	8.58	27.37	33.53	54.00	20.47
3295	33.26	PK	H	28.14	5.26	27.29	39.37	74.00	34.63
3295	20.68	AV	H	28.14	5.26	27.29	26.79	54.00	27.21
251.3	30.7	QP	H	12.14	1.91	21.49	23.26	46.00	22.74
Middle Channel: 2437 MHz									
2437	64.84	PK	H	25.74	3.75	0.00	94.33	N/A	N/A
2437	55.73	AV	H	25.74	3.75	0.00	85.22	N/A	N/A
2437	62.28	PK	V	25.74	3.75	0.00	91.77	N/A	N/A
2437	53.41	AV	V	25.74	3.75	0.00	82.90	N/A	N/A
4874	30.95	PK	H	30.77	5.14	27.42	39.44	74.00	34.56
4874	17.83	AV	H	30.77	5.14	27.42	26.32	54.00	27.68
7311	31.8	PK	H	34.35	6.74	25.88	47.01	74.00	26.99
7311	18.54	AV	H	34.35	6.74	25.88	33.75	54.00	20.25
9748	29.55	PK	H	36.30	8.61	27.24	47.22	74.00	26.78
9748	16.43	AV	H	36.30	8.61	27.24	34.10	54.00	19.90
3295	33.37	PK	H	28.14	5.26	27.29	39.48	74.00	34.52
3295	20.8	AV	H	28.14	5.26	27.29	26.91	54.00	27.09
3565	32.83	PK	H	28.94	4.54	27.26	39.05	74.00	34.95
3565	20.24	AV	H	28.94	4.54	27.26	26.46	54.00	27.54
251.3	30.1	QP	H	12.14	1.91	21.49	22.66	46.00	23.34
High Channel: 2452 MHz									
2452	64.25	PK	H	25.78	3.78	0.00	93.81	N/A	N/A
2452	55.16	AV	H	25.78	3.78	0.00	84.72	N/A	N/A
2452	62.02	PK	V	25.78	3.78	0.00	91.58	N/A	N/A
2452	53.17	AV	V	25.78	3.78	0.00	82.73	N/A	N/A
2483.5	27.56	PK	H	25.86	3.67	0.00	57.09	74.00	16.91
2483.5	14.54	AV	H	25.86	3.67	0.00	44.07	54.00	9.93
4904	31.01	PK	H	30.85	5.31	27.43	39.74	74.00	34.26
4904	17.94	AV	H	30.85	5.31	27.43	26.67	54.00	27.33
7356	31.76	PK	H	34.45	6.79	25.87	47.13	74.00	26.87
7356	18.49	AV	H	34.45	6.79	25.87	33.86	54.00	20.14
9808	29.45	PK	H	36.44	8.64	27.09	47.44	74.00	26.56
9808	16.37	AV	H	36.44	8.64	27.09	34.36	54.00	19.64
3295	33.54	PK	H	28.14	5.26	27.29	39.65	74.00	34.35
3295	20.89	AV	H	28.14	5.26	27.29	27.00	54.00	27.00
251.3	30.5	QP	H	12.14	1.91	21.49	23.06	46.00	22.94

BLE Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2402 MHz									
2402	61.1	PK	H	25.65	3.66	0.00	90.41	N/A	N/A
2402	56.24	AV	H	25.65	3.66	0.00	85.55	N/A	N/A
2402	57.55	PK	V	25.65	3.66	0.00	86.86	N/A	N/A
2402	52.75	AV	V	25.65	3.66	0.00	82.06	N/A	N/A
2390	26.08	PK	H	25.61	3.63	0.00	55.32	74.00	18.68
2390	13.44	AV	H	25.61	3.63	0.00	42.68	54.00	11.32
4804	30.88	PK	H	30.59	5.06	27.41	39.12	74.00	34.88
4804	17.79	AV	H	30.59	5.06	27.41	26.03	54.00	27.97
7206	31.55	PK	H	34.09	6.61	25.91	46.34	74.00	27.66
7206	18.31	AV	H	34.09	6.61	25.91	33.10	54.00	20.90
9608	29.33	PK	H	35.96	8.53	27.55	46.27	74.00	27.73
9608	16.08	AV	H	35.96	8.53	27.55	33.02	54.00	20.98
3190	34.15	PK	H	27.81	6.26	27.38	40.84	74.00	33.16
3190	21.59	AV	H	27.81	6.26	27.38	28.28	54.00	25.72
251.3	29.7	QP	H	12.14	1.91	21.49	22.26	46.00	23.74
Middle Channel: 2440 MHz									
2440	60.83	PK	H	25.74	3.76	0.00	90.33	N/A	N/A
2440	55.96	AV	H	25.74	3.76	0.00	85.46	N/A	N/A
2440	57.17	PK	V	25.74	3.76	0.00	86.67	N/A	N/A
2440	52.44	AV	V	25.74	3.76	0.00	81.94	N/A	N/A
4880	30.78	PK	H	30.79	5.18	27.42	39.33	74.00	34.67
4880	17.66	AV	H	30.79	5.18	27.42	26.21	54.00	27.79
7320	31.48	PK	H	34.37	6.75	25.88	46.72	74.00	27.28
7320	18.29	AV	H	34.37	6.75	25.88	33.53	54.00	20.47
9760	29.5	PK	H	36.32	8.62	27.21	47.23	74.00	26.77
9760	16.32	AV	H	36.32	8.62	27.21	34.05	54.00	19.95
3190	34.27	PK	H	27.81	6.26	27.38	40.96	74.00	33.04
3190	21.82	AV	H	27.81	6.26	27.38	28.51	54.00	25.49
3550	33.56	PK	H	28.91	4.50	27.25	39.72	74.00	34.28
3550	21.01	AV	H	28.91	4.50	27.25	27.17	54.00	26.83
251.3	29.3	QP	H	12.14	1.91	21.49	21.86	46.00	24.14
High Channel: 2480 MHz									
2480	60.67	PK	H	25.85	3.68	0.00	90.20	N/A	N/A
2480	55.76	AV	H	25.85	3.68	0.00	85.29	N/A	N/A
2480	57.08	PK	V	25.85	3.68	0.00	86.61	N/A	N/A
2480	52.19	AV	V	25.85	3.68	0.00	81.72	N/A	N/A
2483.5	26.04	PK	H	25.86	3.67	0.00	55.57	74.00	18.43
2483.5	13.99	AV	H	25.86	3.67	0.00	43.52	54.00	10.48
4960	30.69	PK	H	31.00	5.34	27.43	39.60	74.00	34.40
4960	17.55	AV	H	31.00	5.34	27.43	26.46	54.00	27.54
7440	31.14	PK	H	34.66	6.89	25.97	46.72	74.00	27.28
7440	17.97	AV	H	34.66	6.89	25.97	33.55	54.00	20.45
9920	29.47	PK	H	36.71	8.71	26.66	48.23	74.00	25.77
9920	16.21	AV	H	36.71	8.71	26.66	34.97	54.00	19.03
3190	34.45	PK	H	27.81	6.26	27.38	41.14	74.00	32.86
3190	21.85	AV	H	27.81	6.26	27.38	28.54	54.00	25.46
251.3	29.2	QP	H	12.14	1.91	21.49	21.76	46.00	24.24


Conducted Spurious Emissions at Antenna Port

802.11b Low Channel

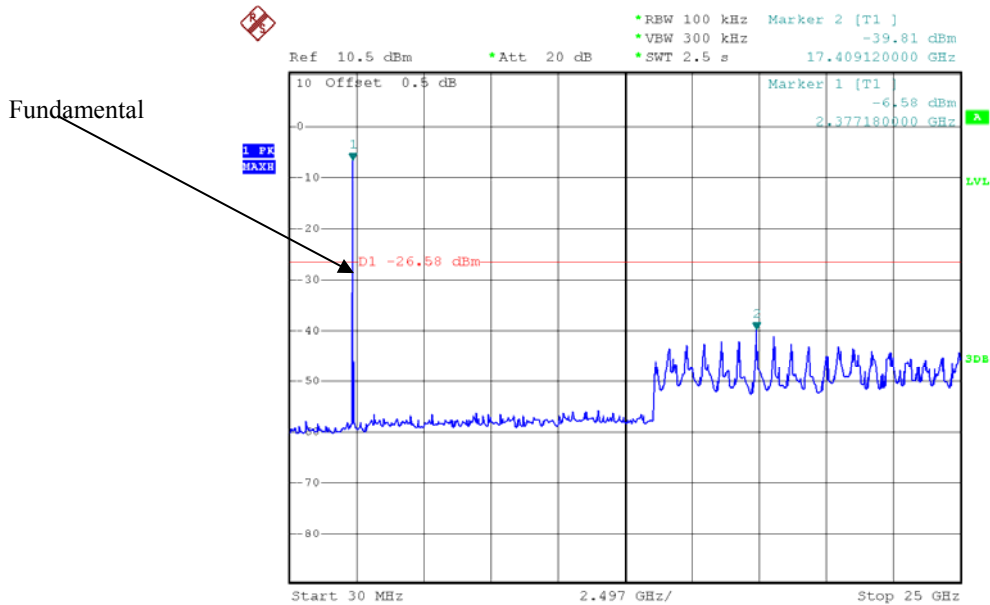


Date: 4.DEC.2015 17:04:16

802.11b Middle Channel

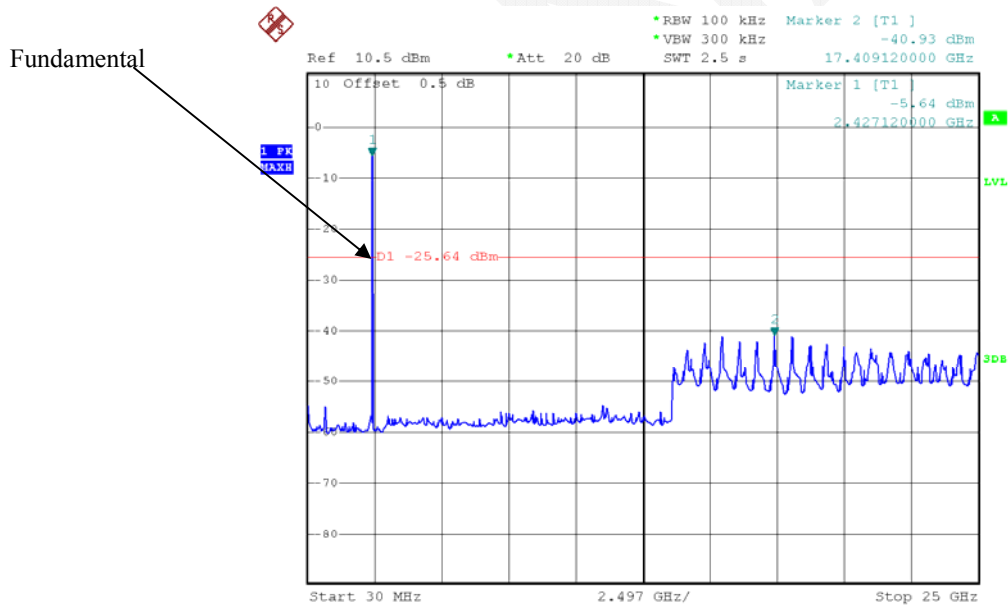


Date: 3.DEC.2015 17:22:50

802.11b High Channel

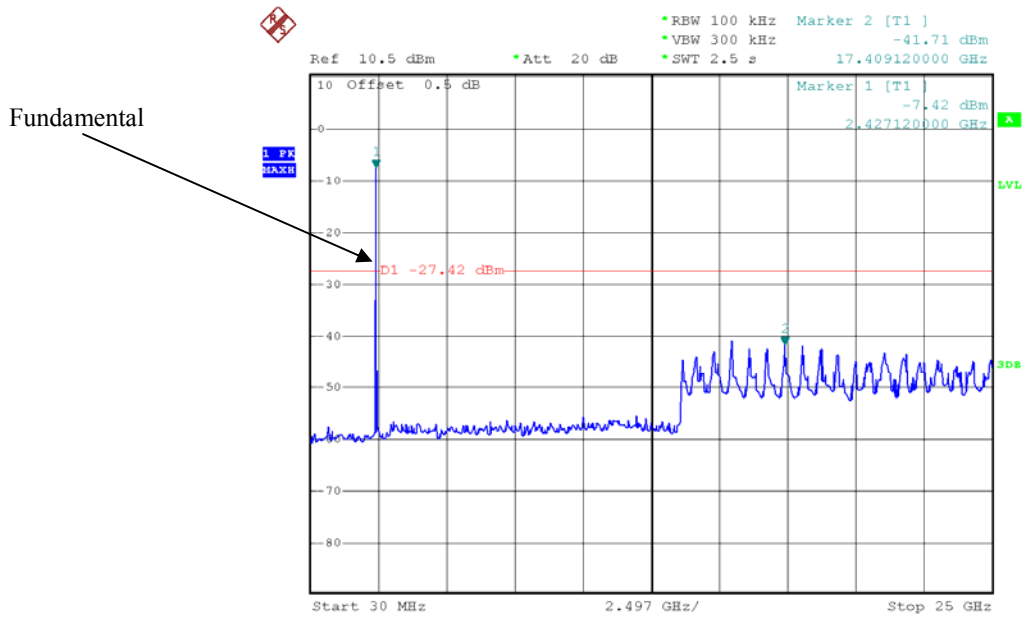


Date: 4.DEC.2015 17:05:40

802.11g Low Channel

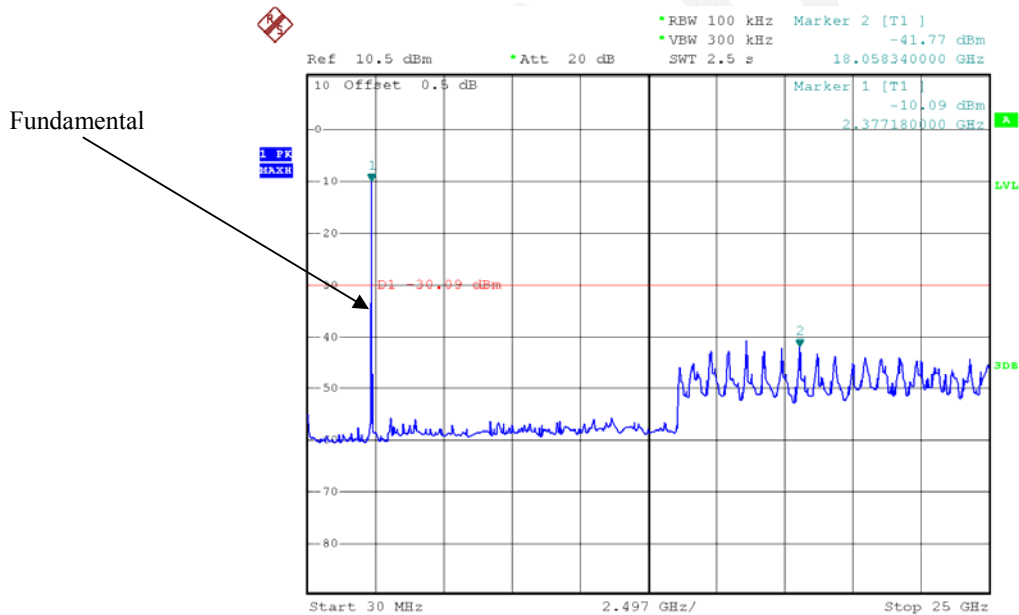


Date: 3.DEC.2015 17:28:40

802.11g Middle Channel

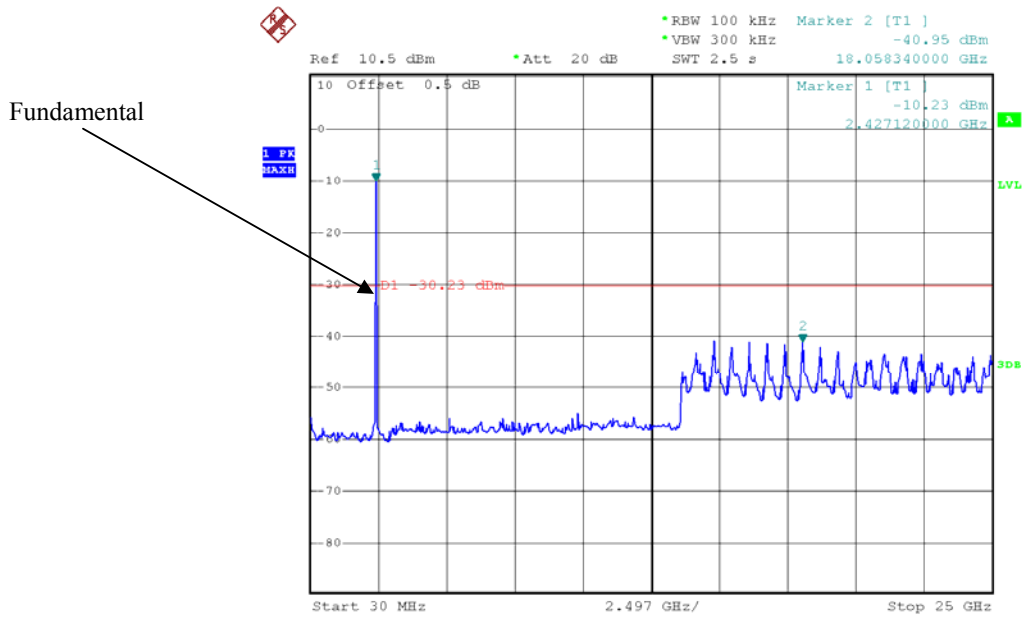


Date: 3.DEC.2015 17:55:25

802.11g High Channel

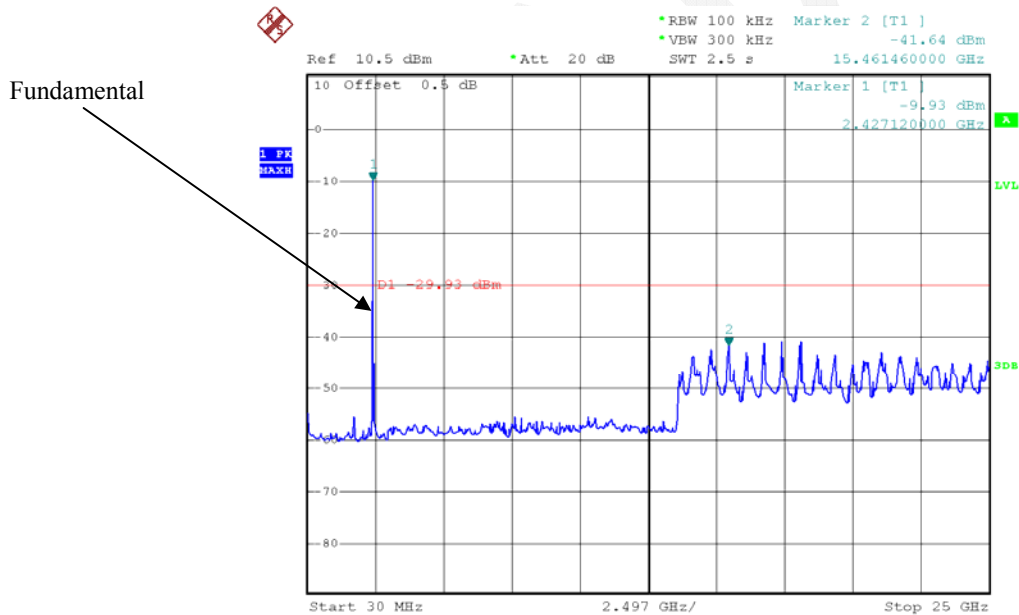


Date: 3.DEC.2015 17:25:45

802.11n ht20 Low Channel

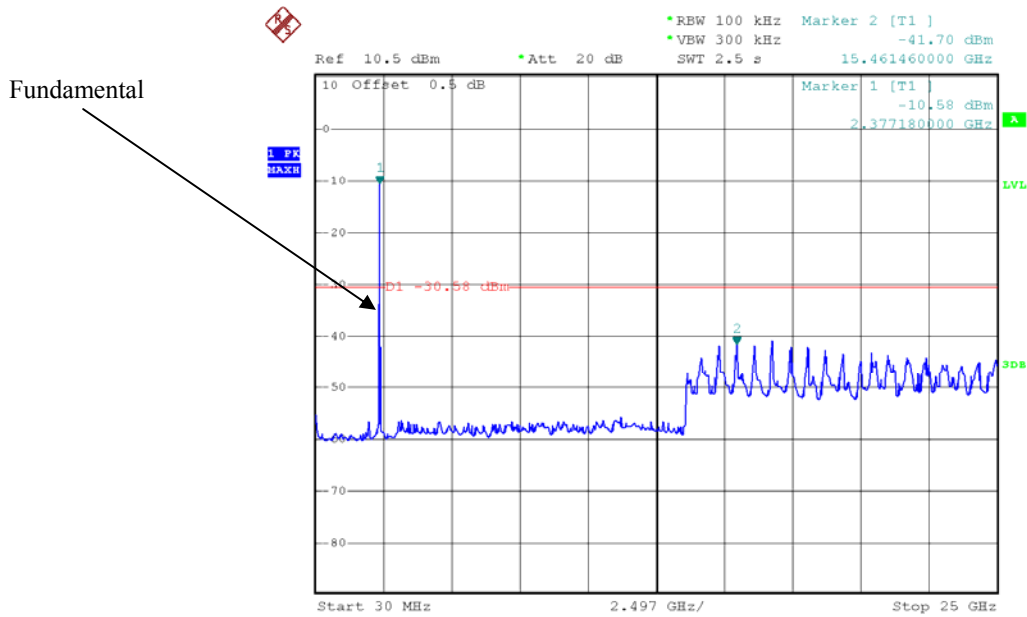


Date: 3.DEC.2015 17:31:39

802.11n ht20 Middle Channel

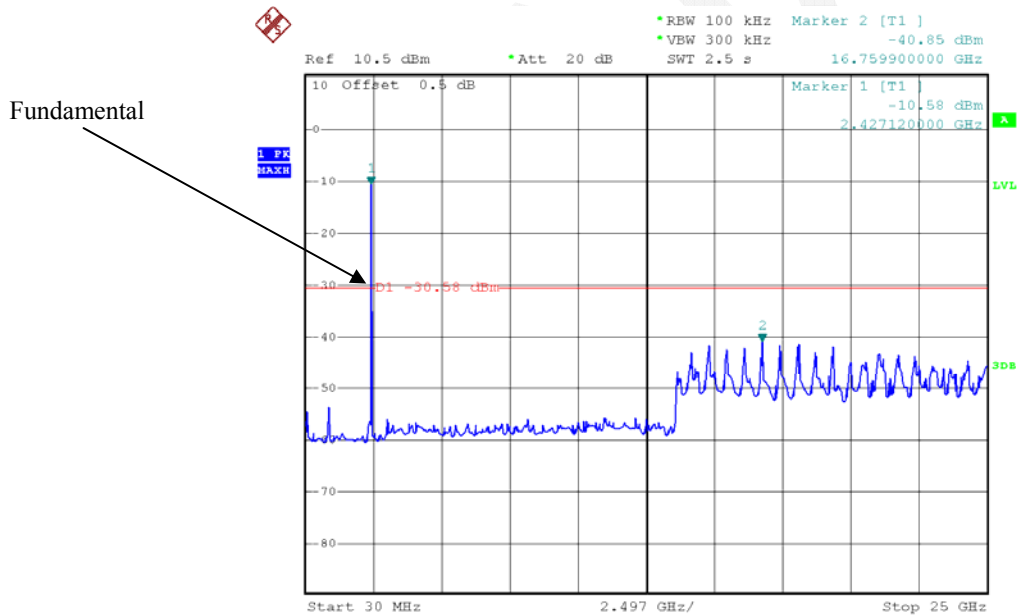


Date: 3.DEC.2015 17:32:50

802.11n ht20 High Channel

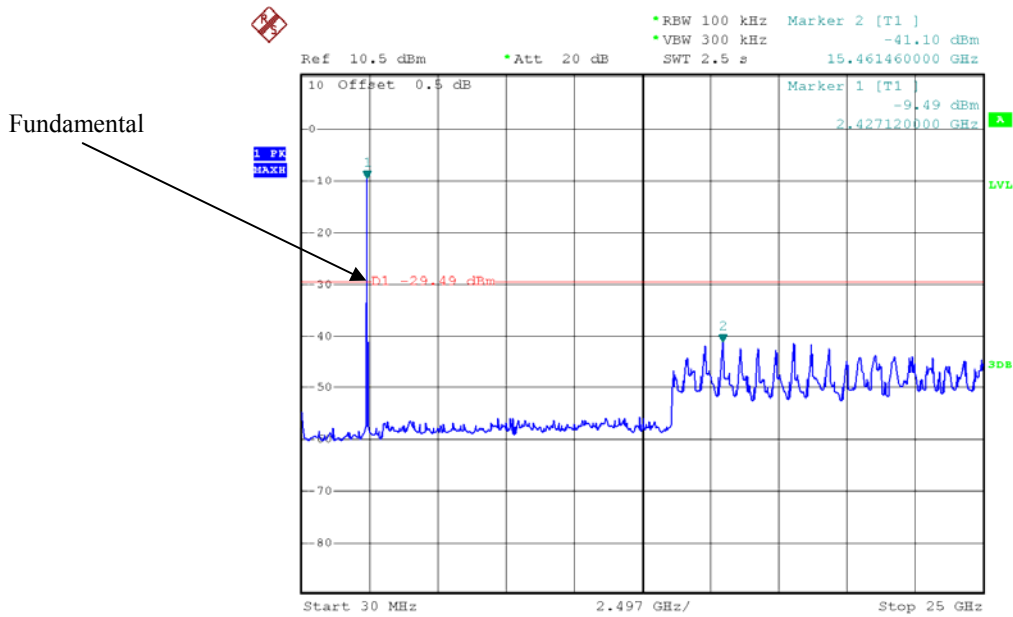


Date: 3.DEC.2015 17:37:17

802.11n ht40 Low Channel

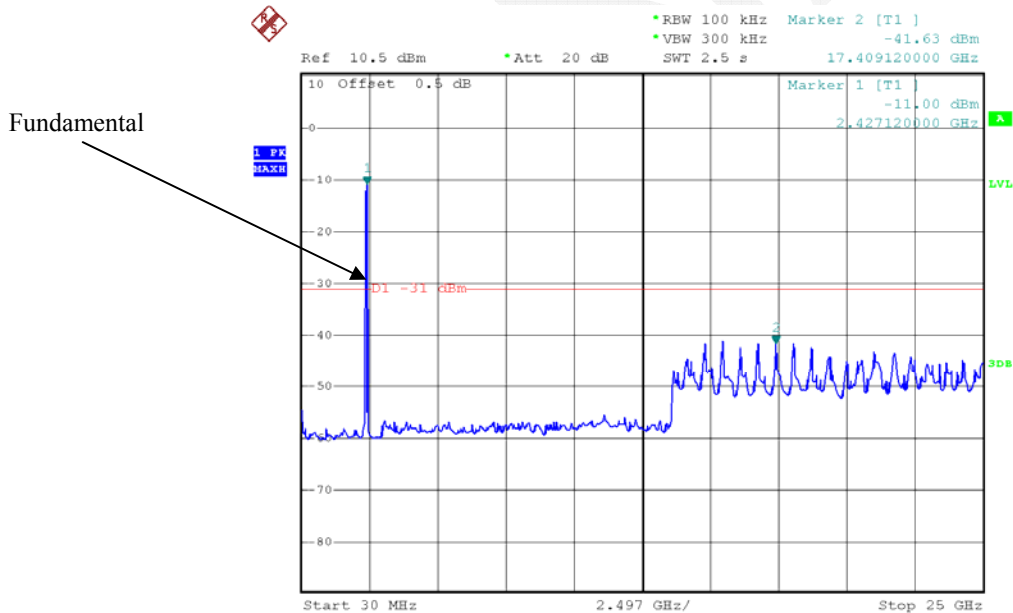


Date: 3.DEC.2015 17:53:29

802.11n ht40 Middle Channel

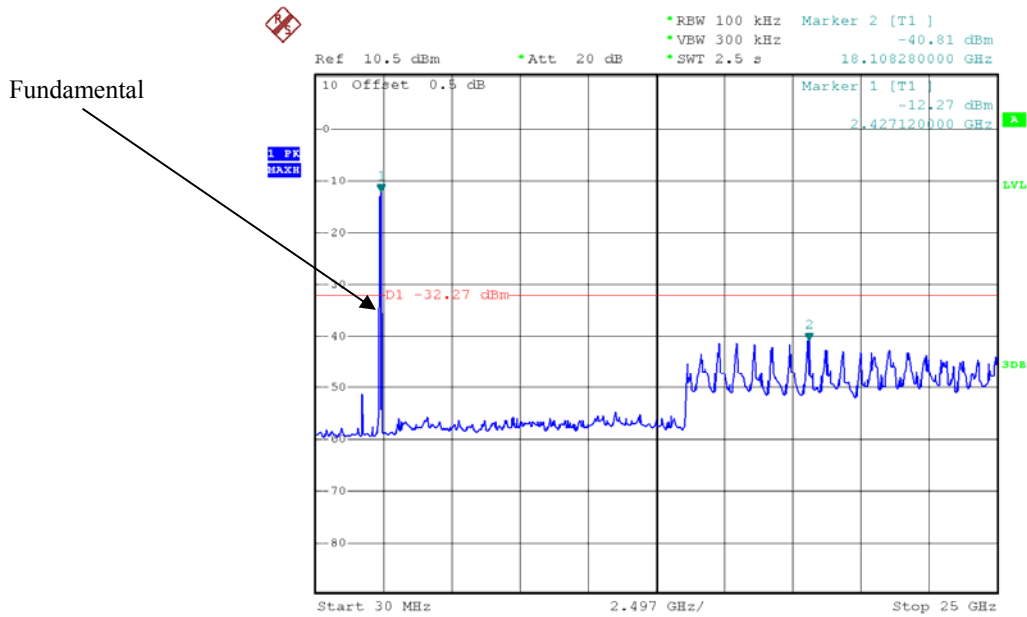


Date: 4.DEC.2015 17:01:56

802.11n ht40 High Channel

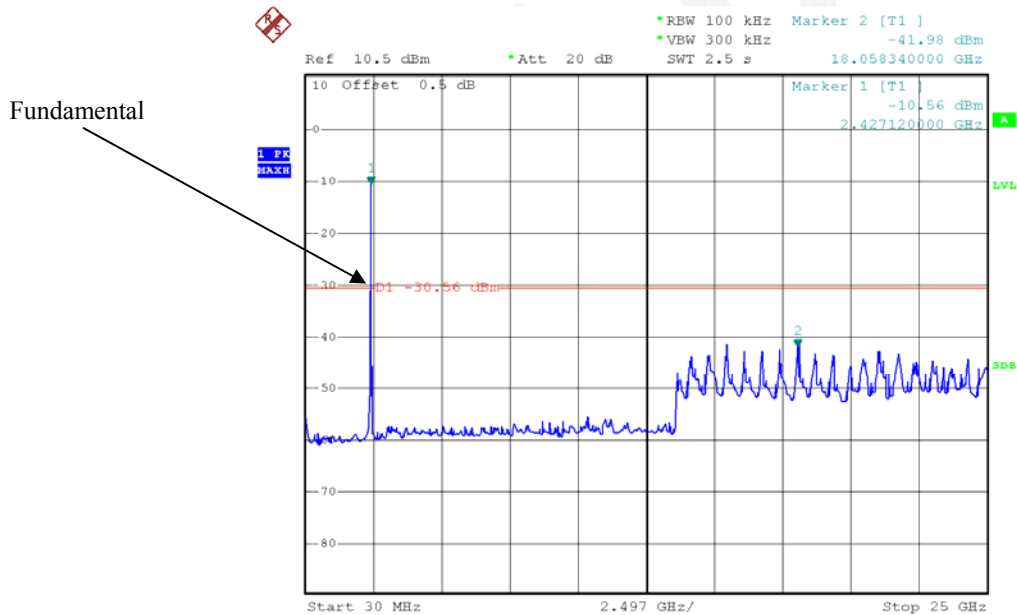


Date: 3.DEC.2015 17:52:12

BLE Low Channel

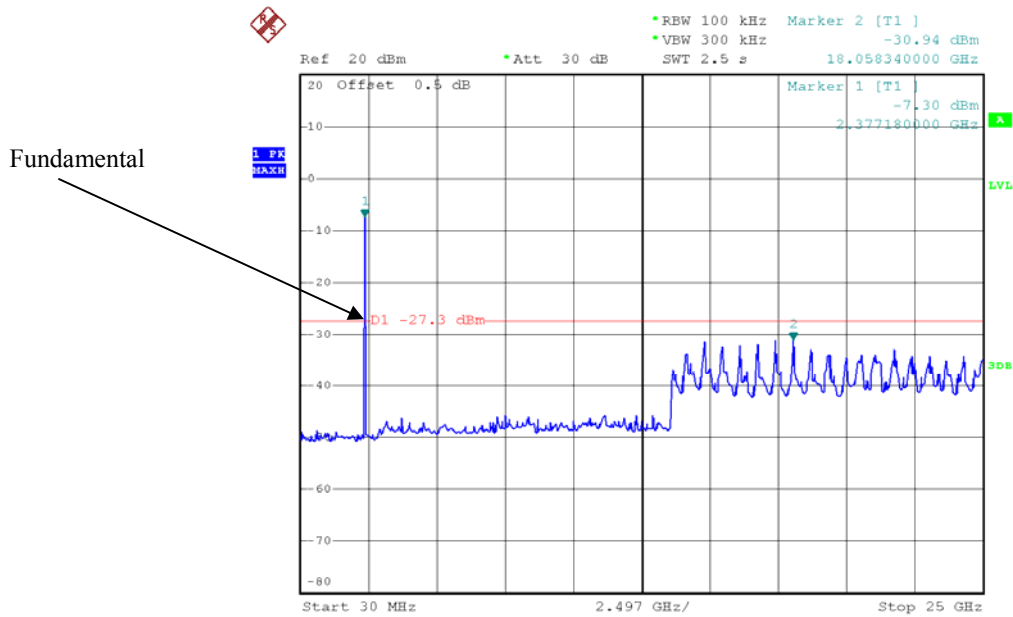


Date: 4.DEC.2015 12:56:01

BLE Middle Channel

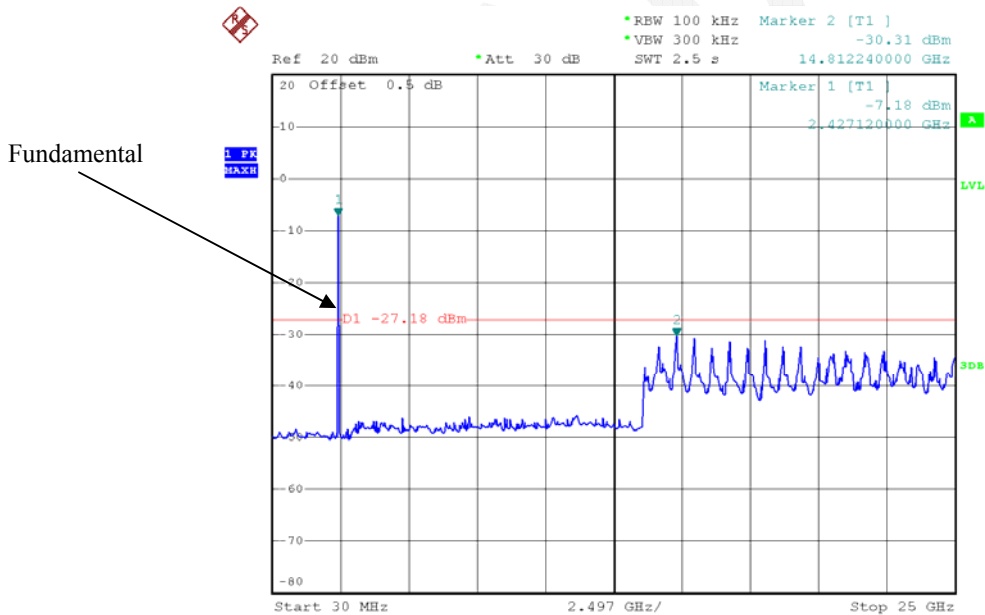

Date: 4.DEC.2015 12:54:44

BLE High Channel

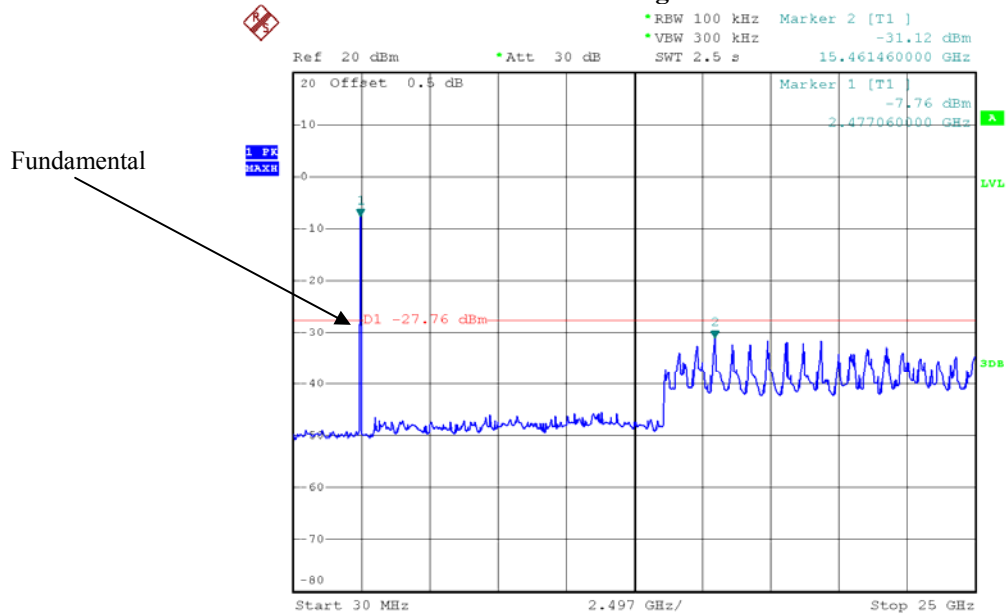

Date: 4.DEC.2015 12:52:27

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r03

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24.3~25.9 °C
Relative Humidity:	43~45 %
ATM Pressure:	101.1~101.5 kPa


* The testing was performed by Allen Qiao from 2015-12-02 to 2015-12-04.

Test Mode: Transmitting


Test Result: Compliance. Please refer to the following table and plots.

Test mode	Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
802.11b	Low	2412	10.16	≥ 0.5
	Middle	2437	10.16	≥ 0.5
	High	2462	10.16	≥ 0.5
802.11g	Low	2412	16.40	≥ 0.5
	Middle	2437	16.64	≥ 0.5
	High	2462	16.60	≥ 0.5
802.11n20	Low	2412	17.92	≥ 0.5
	Middle	2437	17.92	≥ 0.5
	High	2462	17.92	≥ 0.5
802.11n40	Low	2422	36.80	≥ 0.5
	Middle	2437	36.64	≥ 0.5
	High	2452	36.68	≥ 0.5
BLE	Low	2402	0.705	≥ 0.5
	Middle	2440	0.700	≥ 0.5
	High	2480	0.700	≥ 0.5


802.11b Low Channel

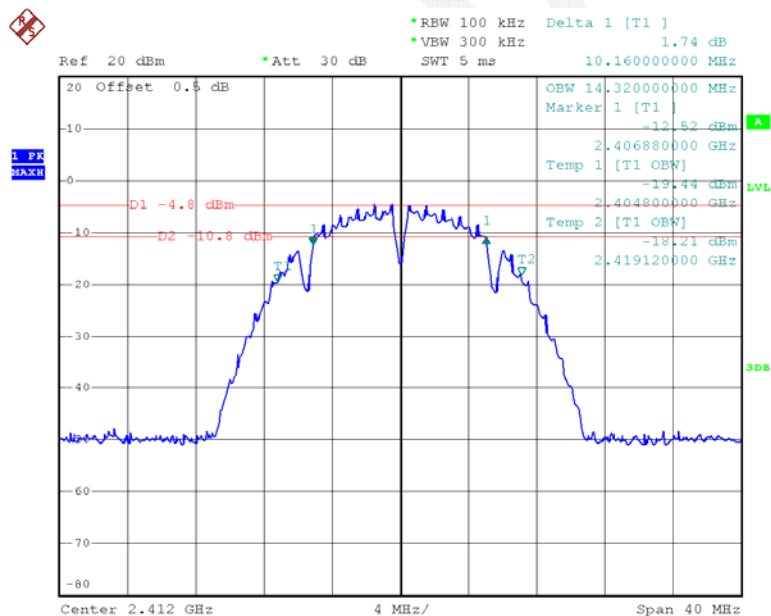

Date: 2.DEC.2015 20:18:03

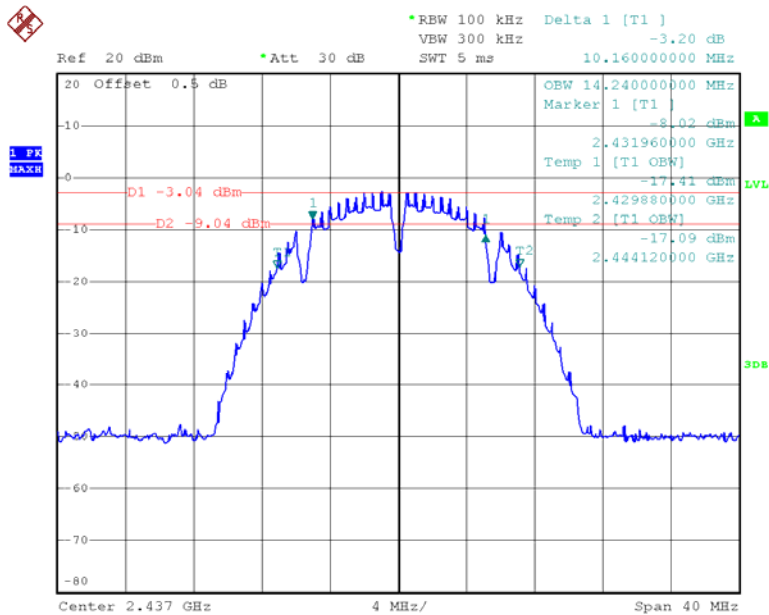
802.11b Middle Channel

Date: 2.DEC.2015 21:04:31

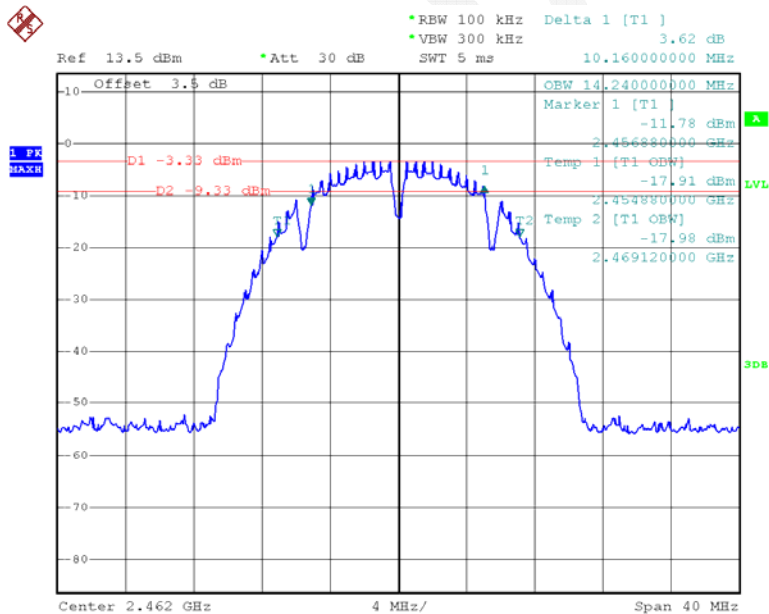802.11b High Channel


Date: 4.DEC.2015 19:05:47

802.11g Low Channel

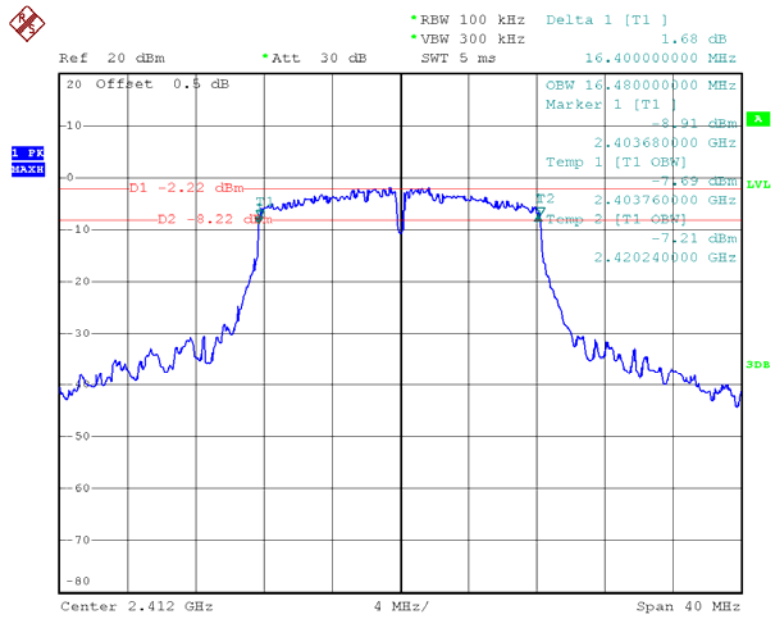


Date: 2.DEC.2015 20:19:40


802.11g Middle Channel

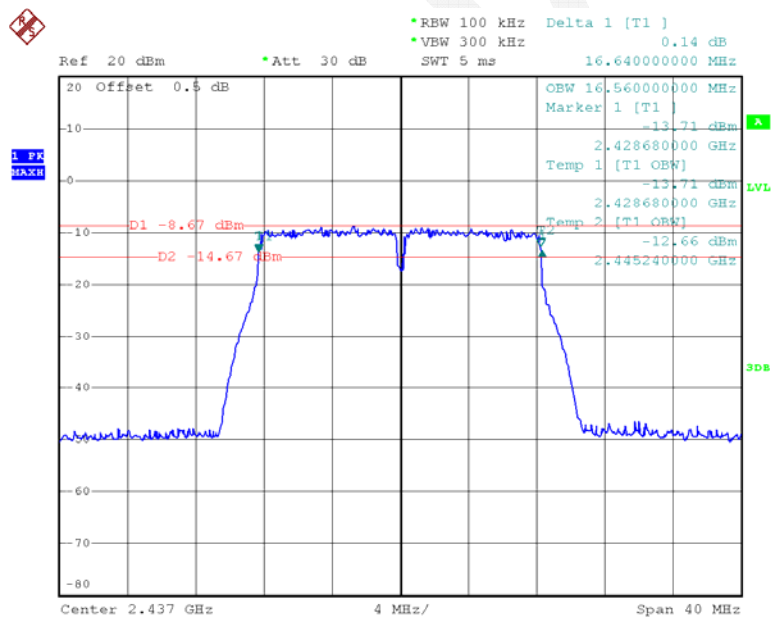

Date: 2.DEC.2015 20:55:31

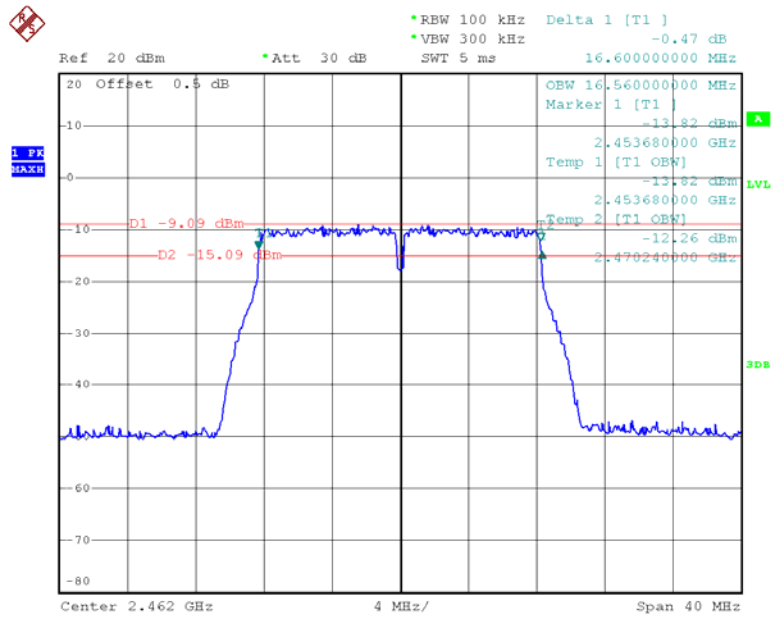
802.11g High Channel

Date: 2.DEC.2015 20:57:35

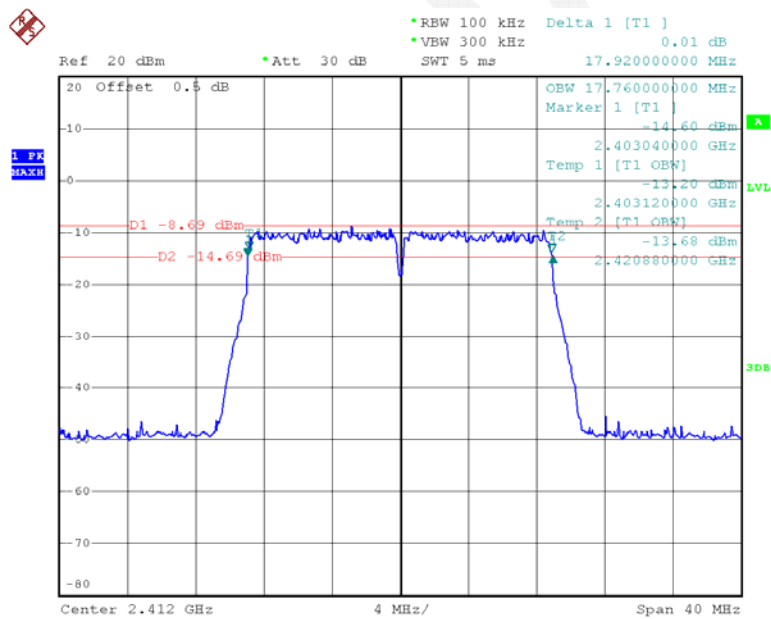802.11n ht20 Low Channel


Date: 2.DEC.2015 20:21:54

802.11n ht20 Middle Channel

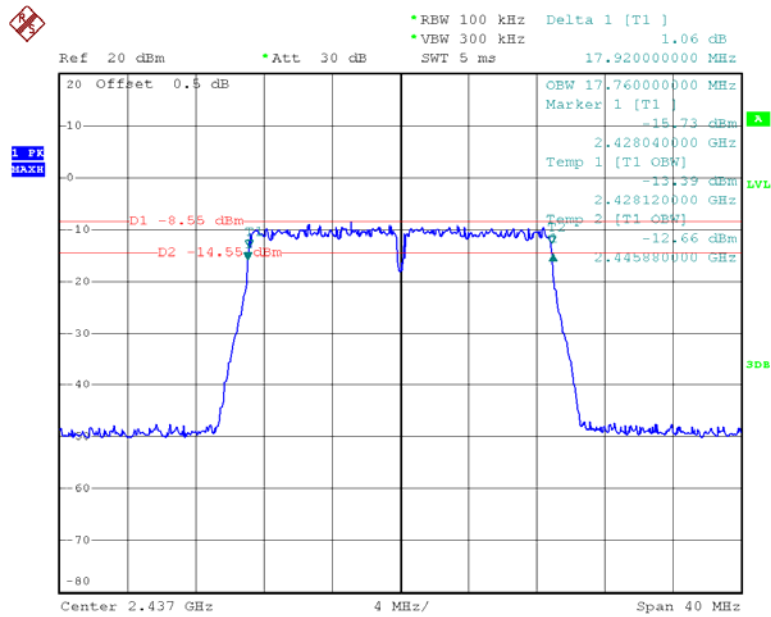


Date: 2.DEC.2015 20:41:06

802.11n ht20 High Channel

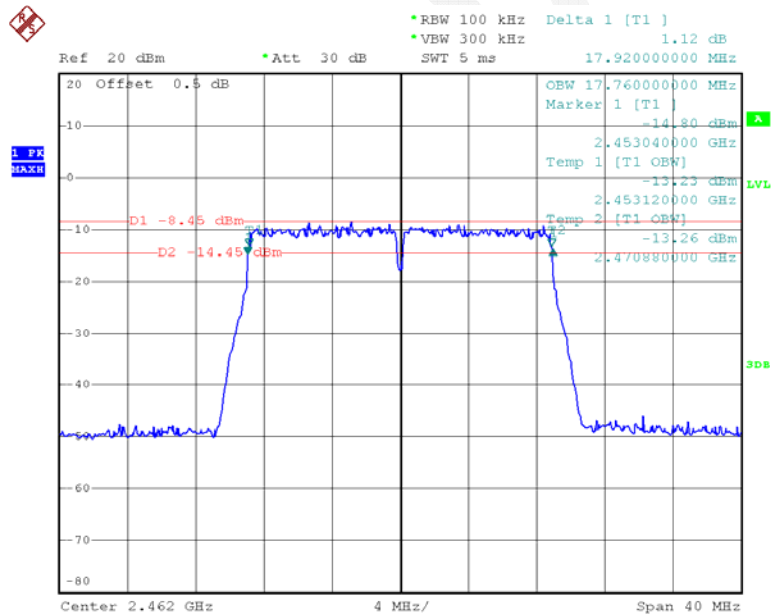


Date: 2.DEC.2015 20:52:42

802.11n ht40 Low Channel

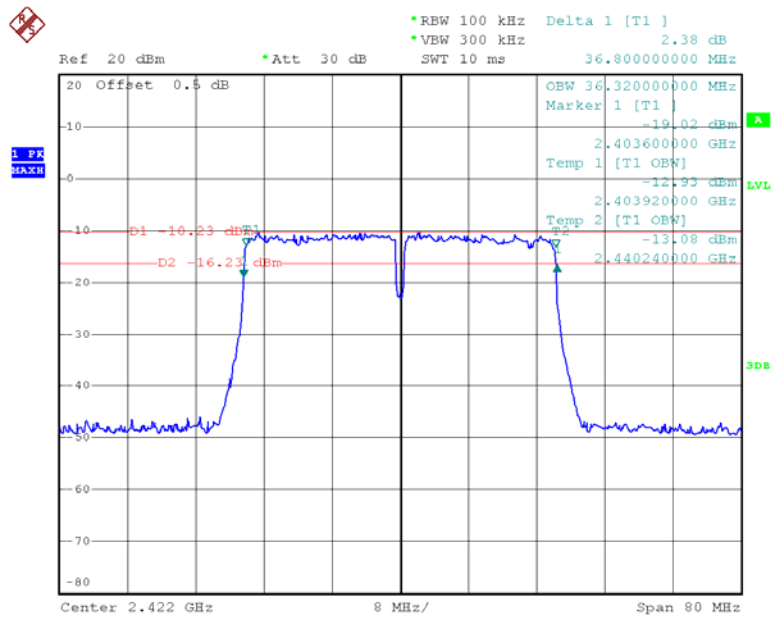


Date: 2.DEC.2015 20:25:11


802.11n ht40 Middle Channel

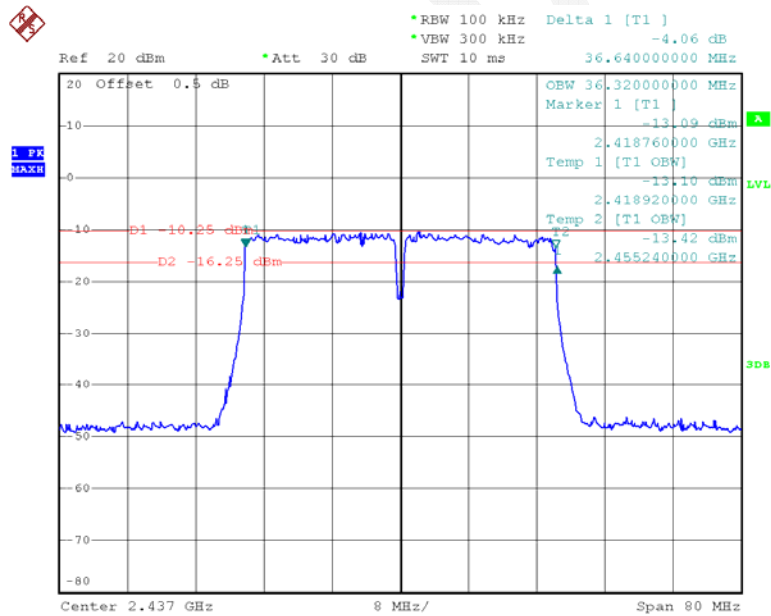

Date: 2.DEC.2015 20:35:07

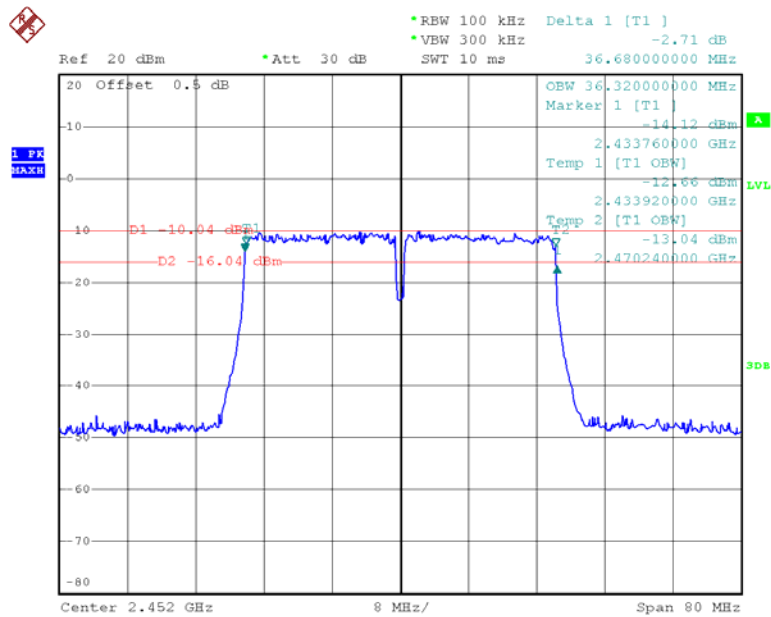
802.11n ht40 High Channel

Date: 2.DEC.2015 20:37:03

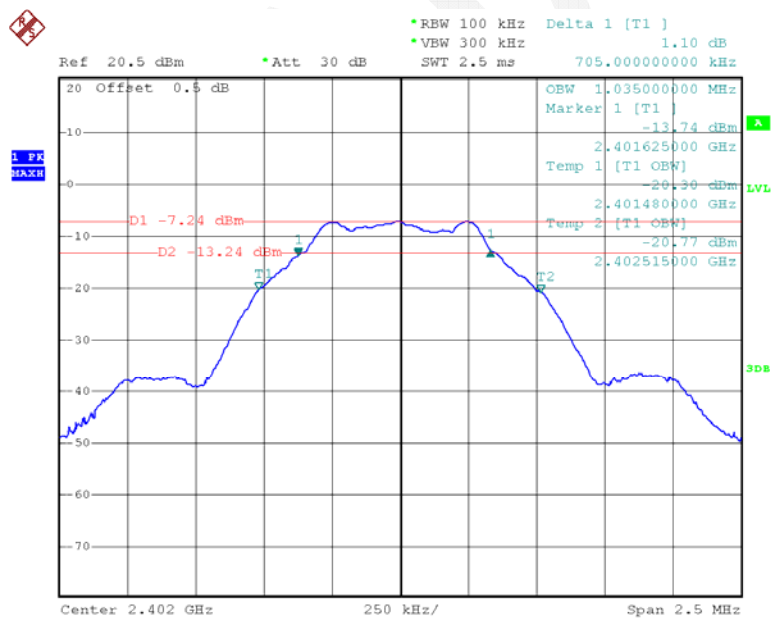BLE Low Channel


Date: 4.DEC.2015 12:37:21

BLE Middle Channel

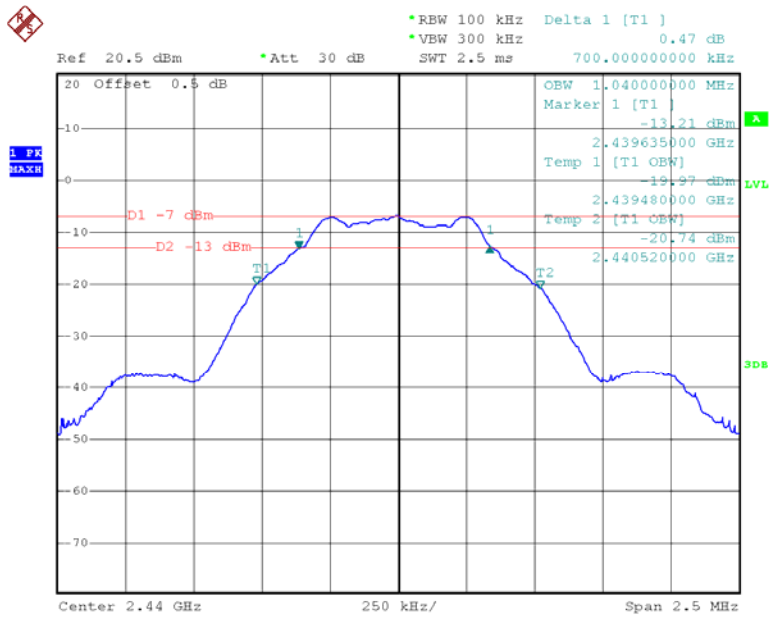

Date: 4.DEC.2015 12:40:50

BLE High Channel

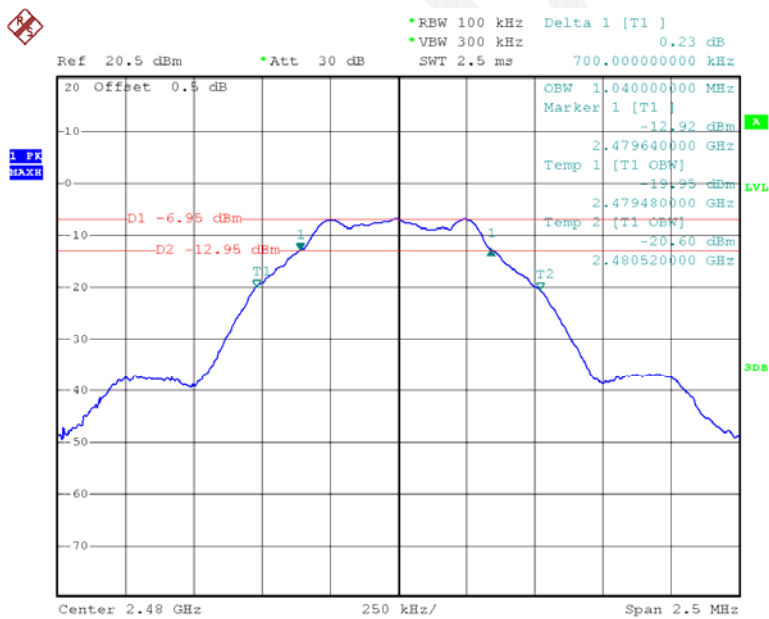

Date: 4.DEC.2015 12:42:19

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r03

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Wideband Power Sensor	N1921A	MY54210016	2015-11-03	2016-11-03
Agilent	Wideband Power Sensor	N1921A	MY54170013	2015-11-03	2016-11-03
Agilent	P-Series Power Meter	N1912A	MY5000448	2015-11-03	2016-11-03

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24.8 °C
Relative Humidity:	41 %
ATM Pressure:	101.5 kPa

* The testing was performed by Allen Qiao on 2015-12-04.

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table.

Test mode	Channel	Frequency	Max Peak Conducted Output Power	Max Conducted Average Output Power	Limit
		(MHz)	(dBm)	(dBm)	(dBm)
802.11b	Low	2412	9.38	9.27	30
	Middle	2437	9.24	9.19	30
	High	2462	9.19	9.12	30
802.11g	Low	2412	13.02	8.91	30
	Middle	2437	13.51	9.32	30
	High	2462	13.08	9.18	30
802.11n20	Low	2412	13.58	8.82	30
	Middle	2437	13.91	8.86	30
	High	2462	13.08	9.11	30
802.11n40	Low	2422	15.36	9.00	30
	Middle	2437	14.91	9.05	30
	High	2452	15.25	9.11	30
BLE	Low	2402	-6.03	/	30
	Middle	2440	-5.83	/	30
	High	2480	-5.71	/	30

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	24.3~25.4 °C
Relative Humidity:	42~45 %
ATM Pressure:	101.4~101.5 kPa

* The testing was performed by Allen Qiao on 2015-12-03 & 2015-12-04.

Test mode: Transmitting


Test Result: Compliance. Please refer to following plots.

802.11b: Band Edge, Left Side

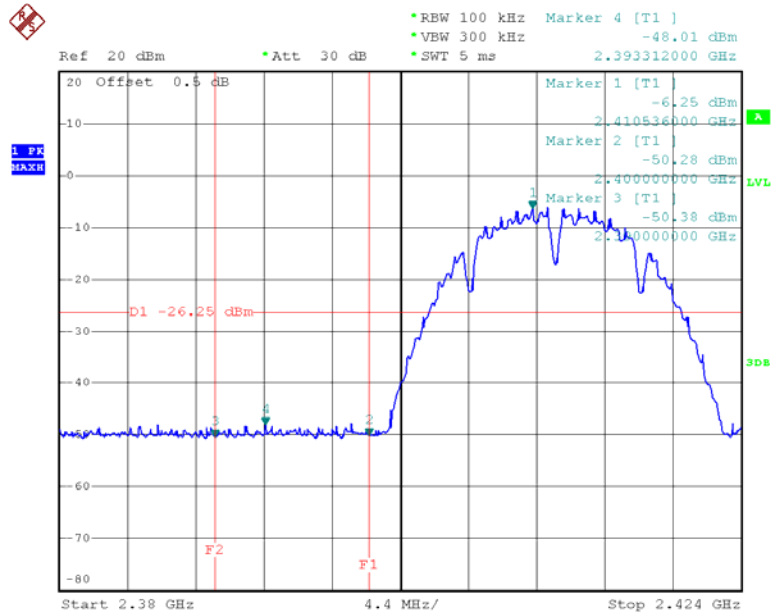

Date: 4.DEC.2015 17:14:33


802.11b: Band Edge, Right Side

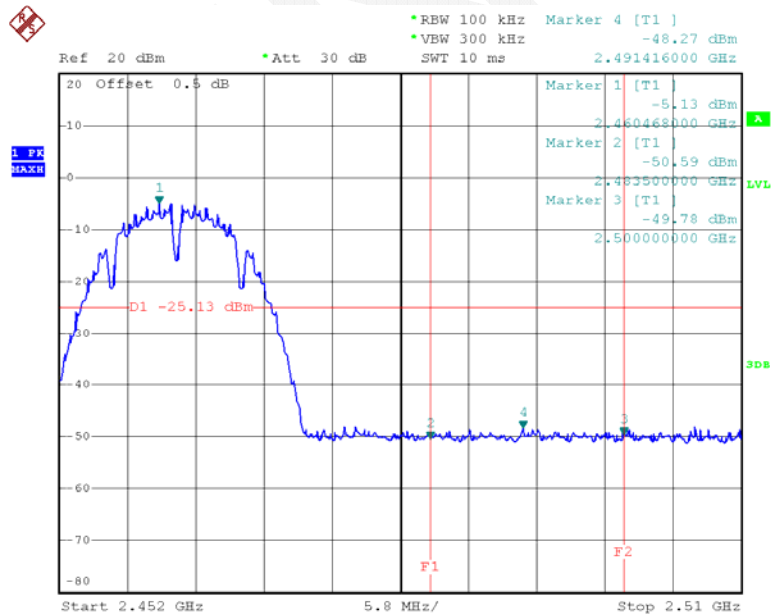


Date: 3.DEC.2015 12:58:34

[illegible]


802.11g: Band Edge, Right Side

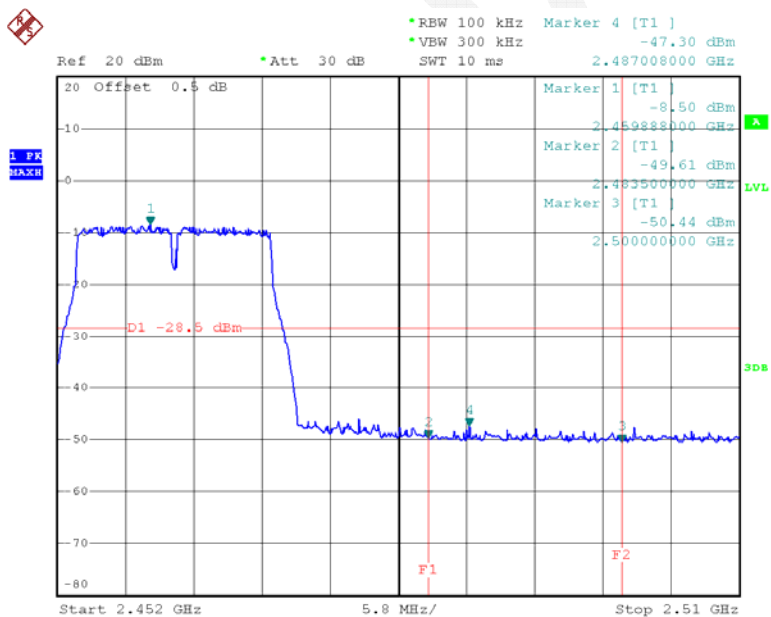


Page 47 of 59

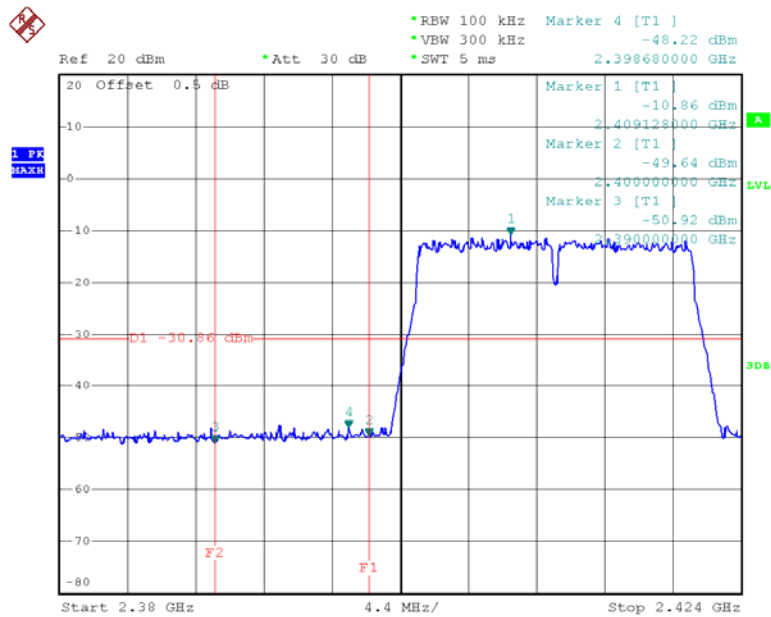802.11n ht20 Band Edge, Left Side


Date: 4.DEC.2015 17:17:32

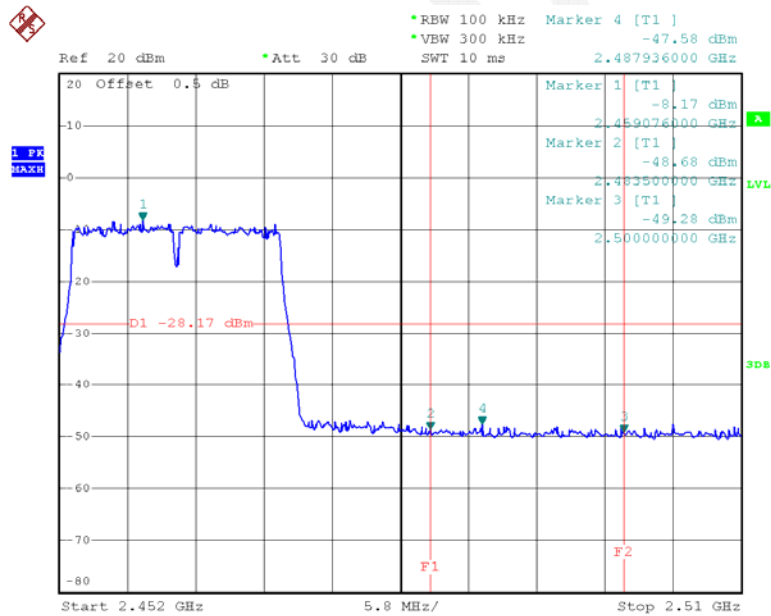802.11n ht20 Band Edge, Right Side

Date: 3.DEC.2015 12:48:43

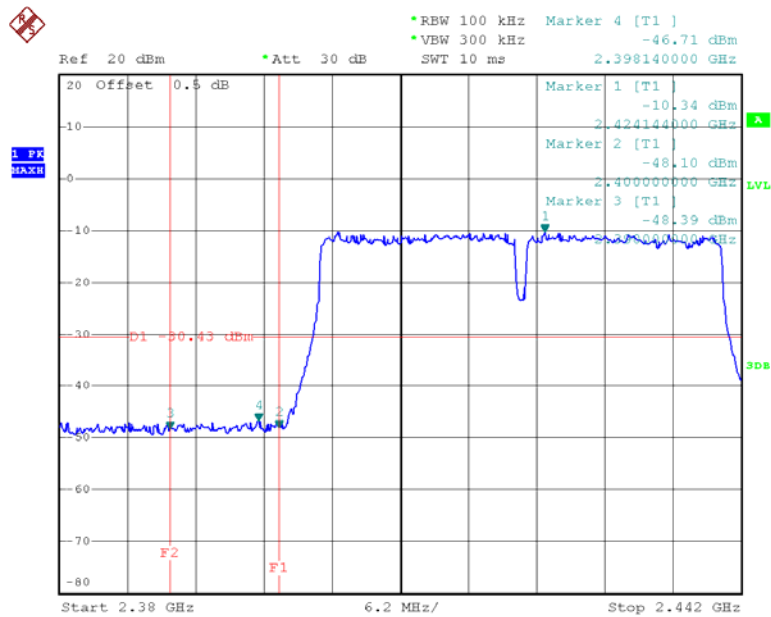
802.11n ht40 Band Edge, Left Side

Date: 3.DEC.2015 12:39:45

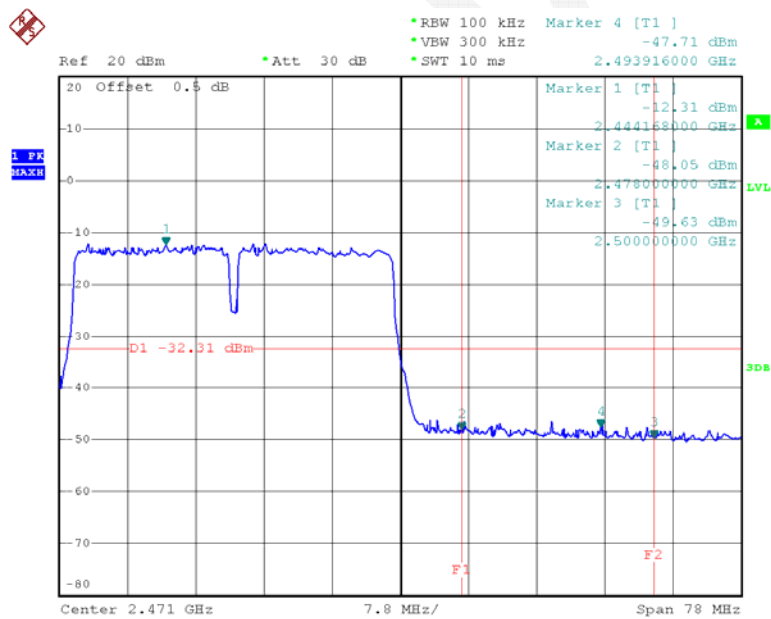802.11n ht40 Band Edge, Right Side


Date: 4.DEC.2015 17:23:15

BLE Band Edge, Left Side

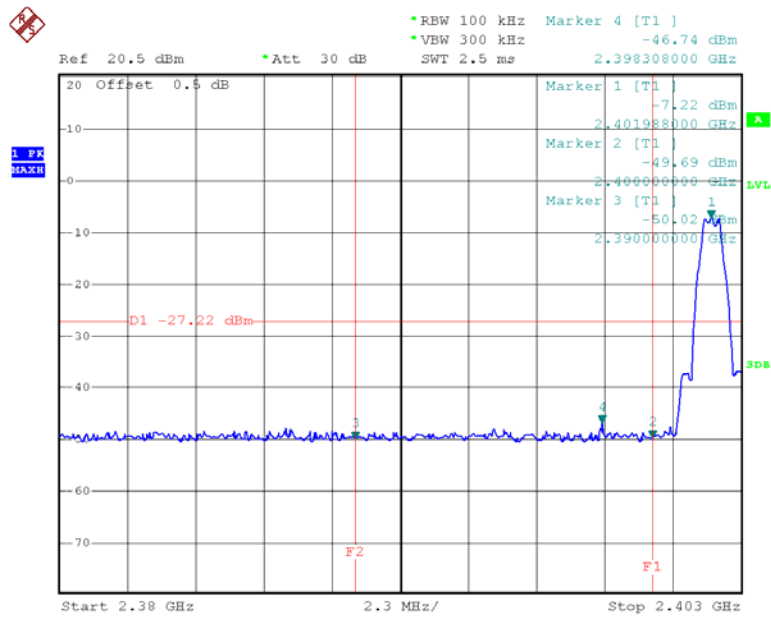

Date: 4.DEC.2015 12:33:34

BLE Band Edge, Right Side

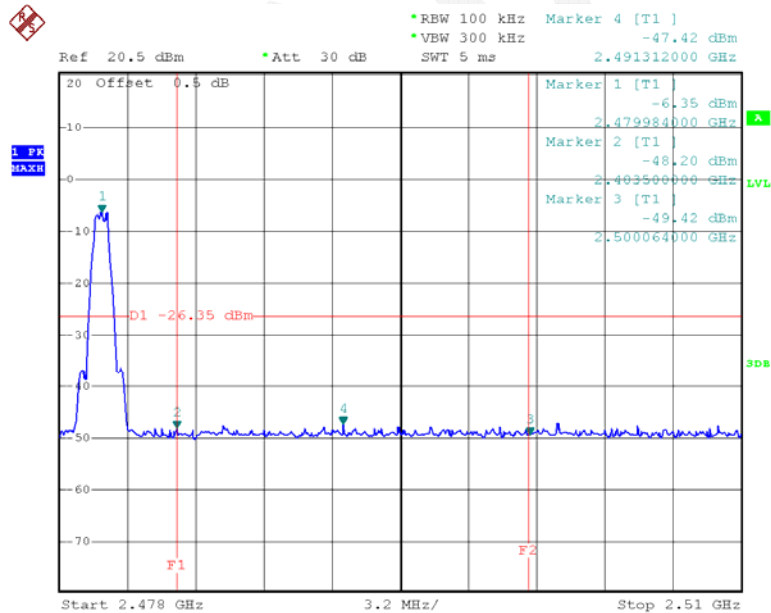

Date: 4.DEC.2015 12:29:34

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r03

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24.3~25.4 °C
Relative Humidity:	42~45 %
ATM Pressure:	101.4~101.5 kPa


* The testing was performed by Allen Qiao on 2015-12-03 & 2015-12-04.

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plots


Test mode	Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
802.11b	Low	2412	-22.77	≤ 8
	Middle	2437	-23.03	≤ 8
	High	2462	-23.17	≤ 8
802.11g	Low	2412	-23.92	≤ 8
	Middle	2437	-23.56	≤ 8
	High	2462	-24.17	≤ 8
802.11n20	Low	2412	-23.58	≤ 8
	Middle	2437	-23.29	≤ 8
	High	2462	-22.80	≤ 8
802.11n40	Low	2422	-24.86	≤ 8
	Middle	2437	-23.77	≤ 8
	High	2452	-24.05	≤ 8
BLE	Low	2402	-21.90	≤ 8
	Middle	2440	-21.71	≤ 8
	High	2480	-21.66	≤ 8

Power Spectral Density, 802.11b Low Channel

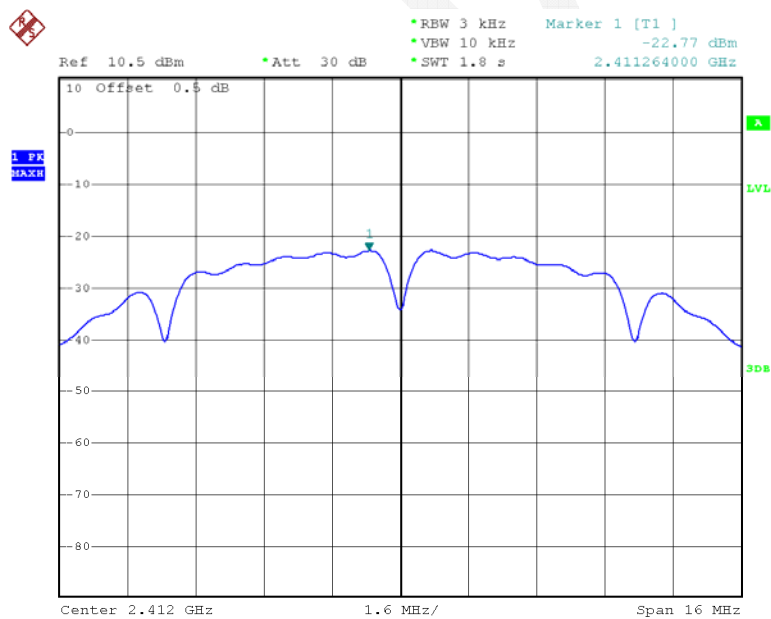


Date: 3.DEC.2015 16:26:49

Power Spectral Density, 802.11b Middle Channel

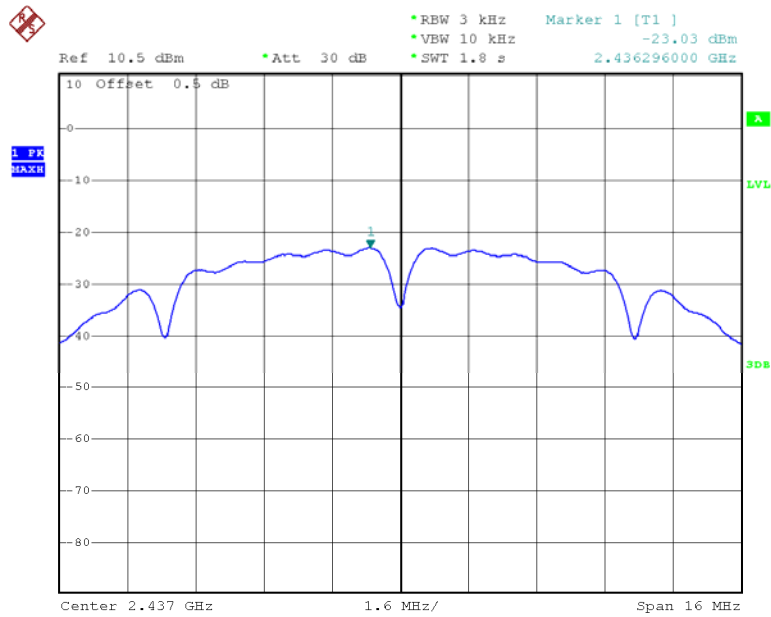


Date: 3.DEC.2015 16:28:11

Power Spectral Density, 802.11b High Channel

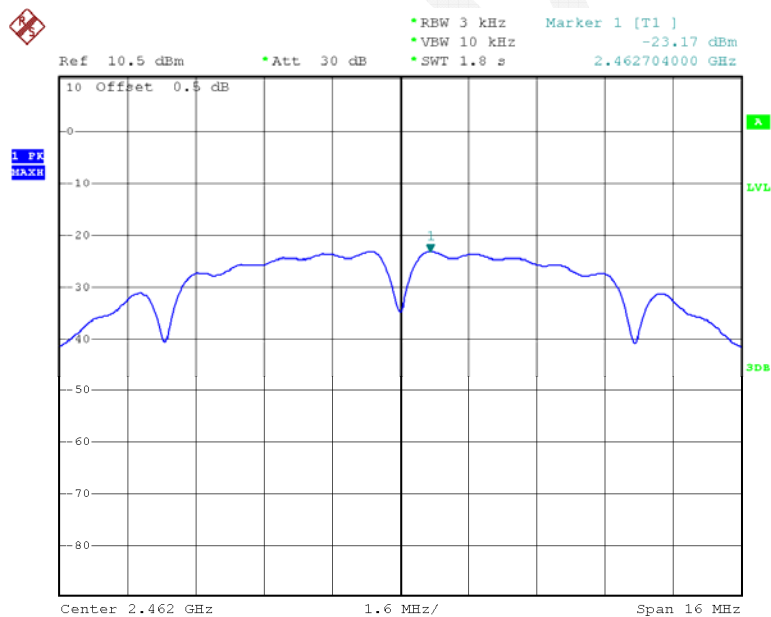


Date: 3.DEC.2015 16:29:16

Power Spectral Density, 802.11g Low Channel

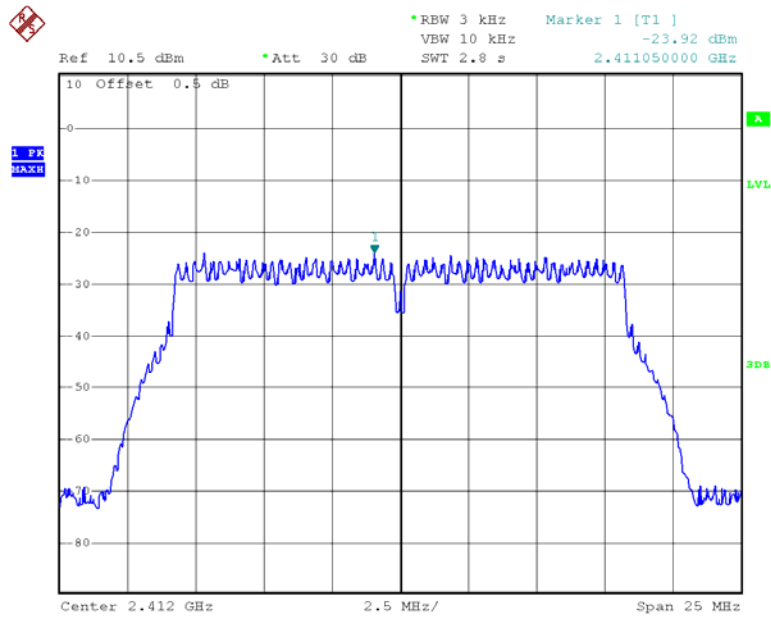


Date: 3.DEC.2015 16:45:19

Power Spectral Density, 802.11g Middle Channel

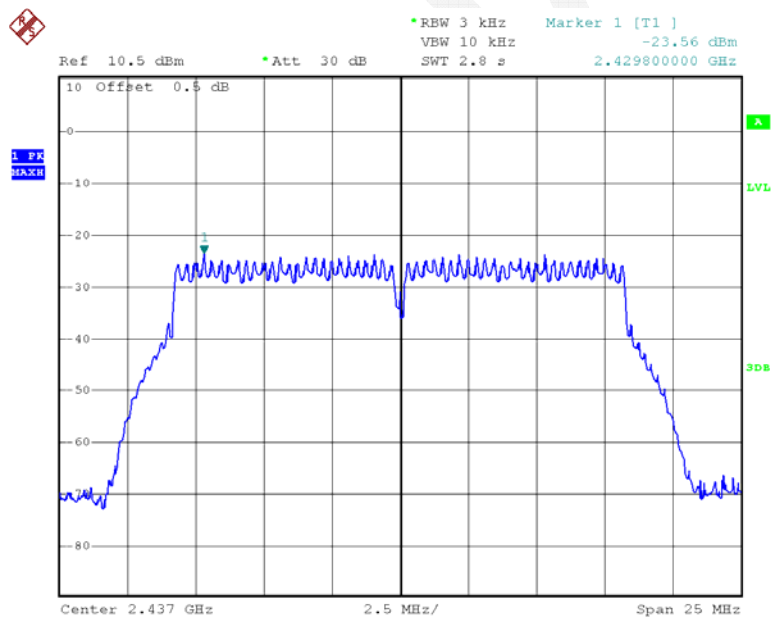


Date: 3.DEC.2015 16:44:15

Power Spectral Density, 802.11g High Channel

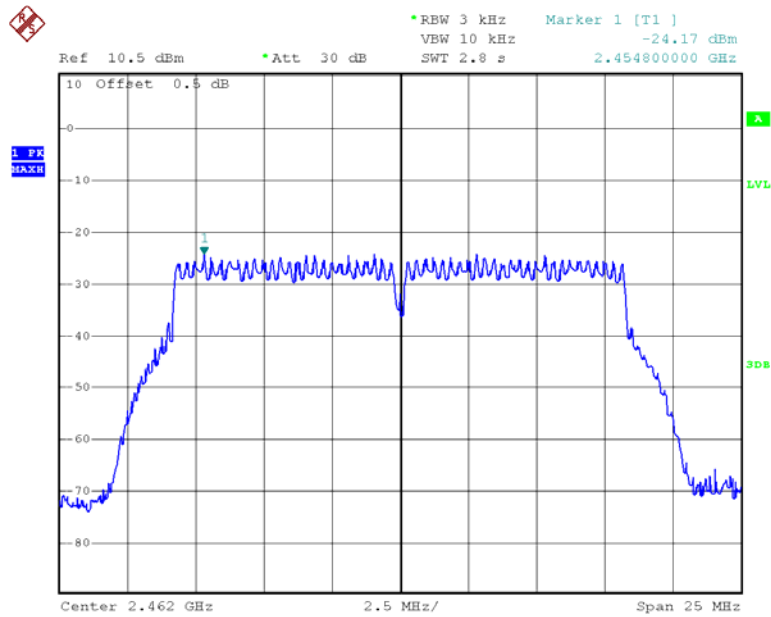


Date: 3.DEC.2015 16:46:36

Power Spectral Density, 802.11n ht20 Low Channel

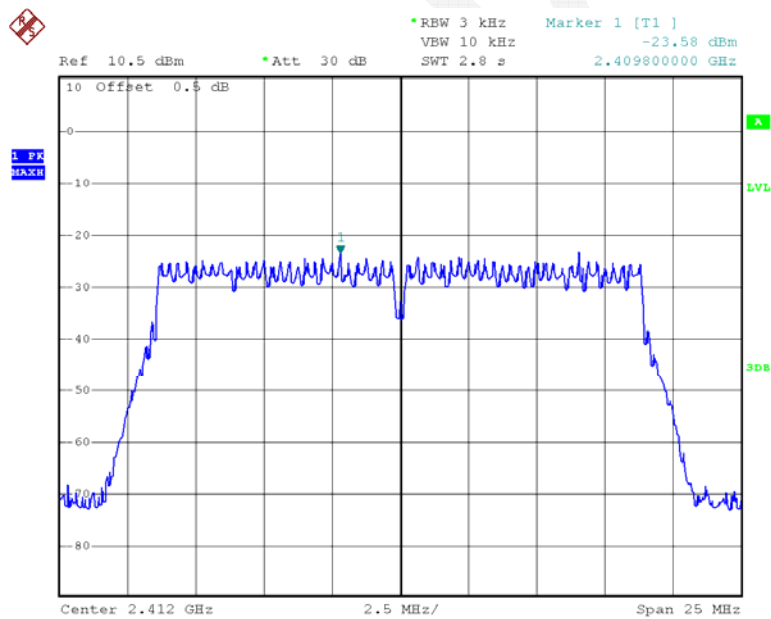


Date: 3.DEC.2015 16:49:40

Power Spectral Density, 802.11n ht20 Middle Channel

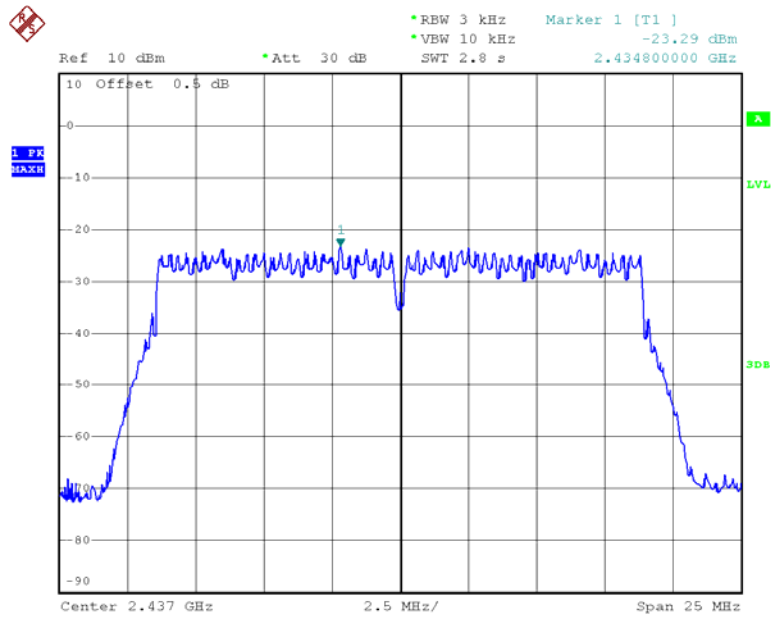


Date: 4.DEC.2015 13:29:16

Power Spectral Density, 802.11n ht20 High Channel

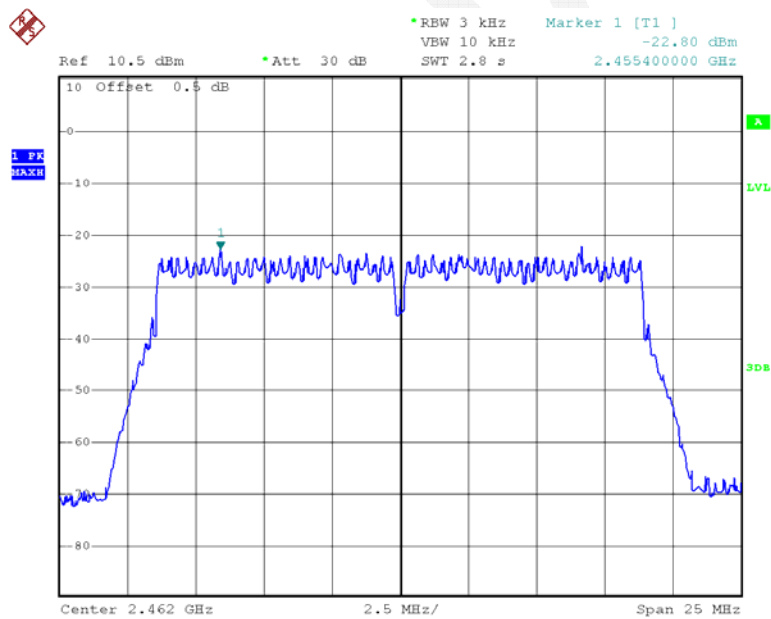


Date: 3.DEC.2015 16:48:04

Power Spectral Density, 802.11n ht40 Low Channel

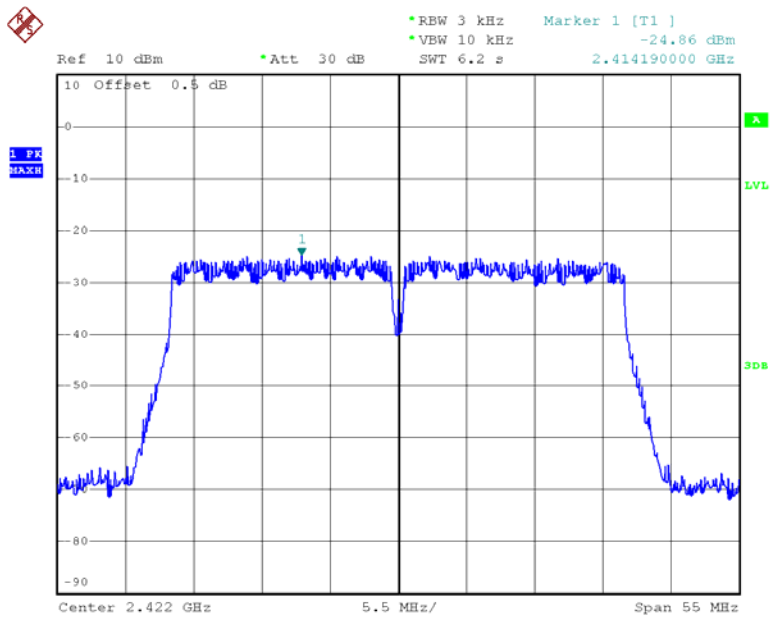


Date: 4.DEC.2015 13:32:47

Power Spectral Density, 802.11n ht40 Middle Channel

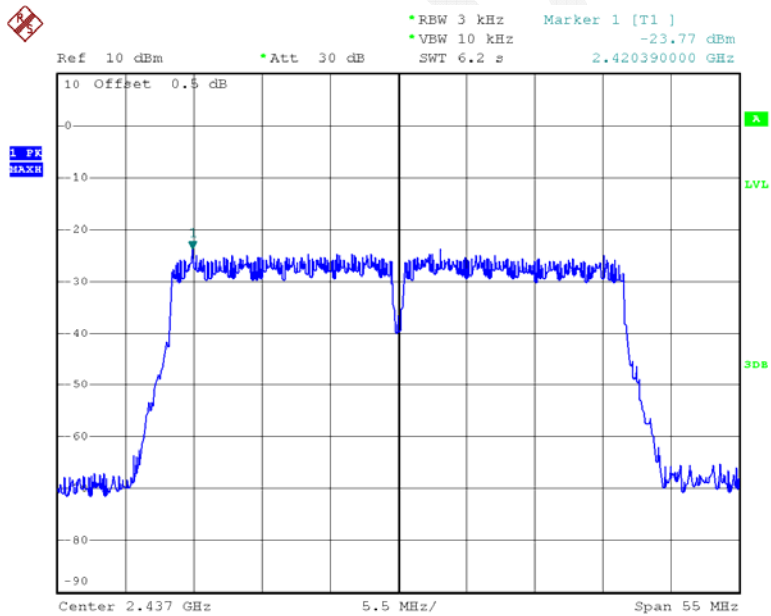


Date: 4.DEC.2015 13:34:20

Power Spectral Density, 802.11n ht40 High Channel

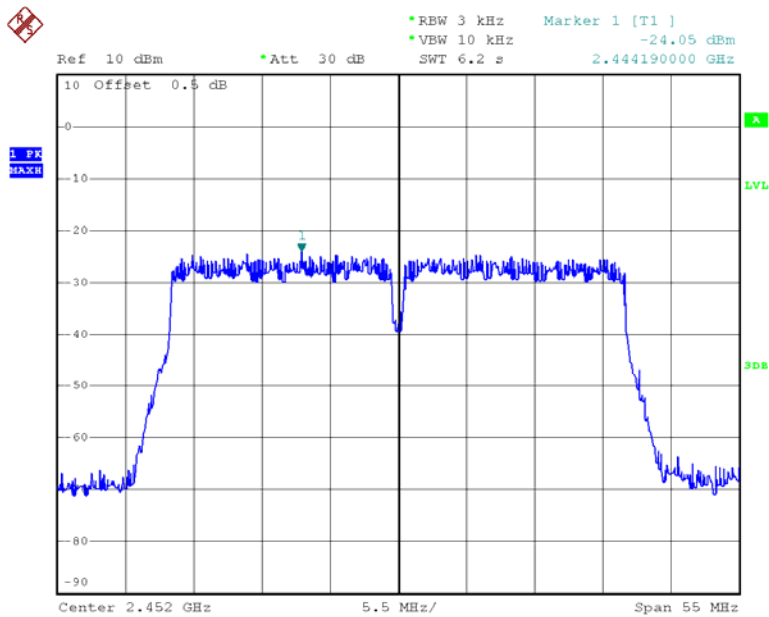


Date: 4.DEC.2015 13:35:51

Power Spectral Density, BLE Low Channel

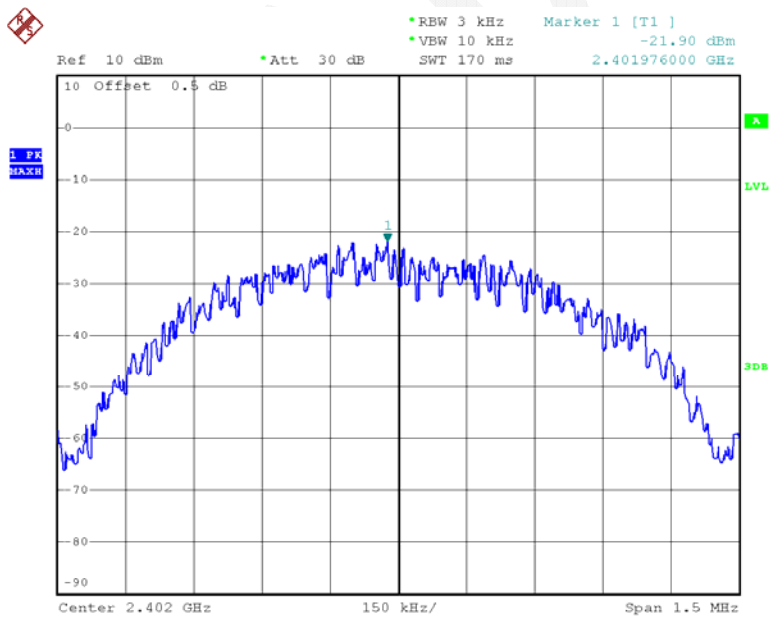


Date: 4.DEC.2015 12:48:15

Power Spectral Density, BLE Middle Channel

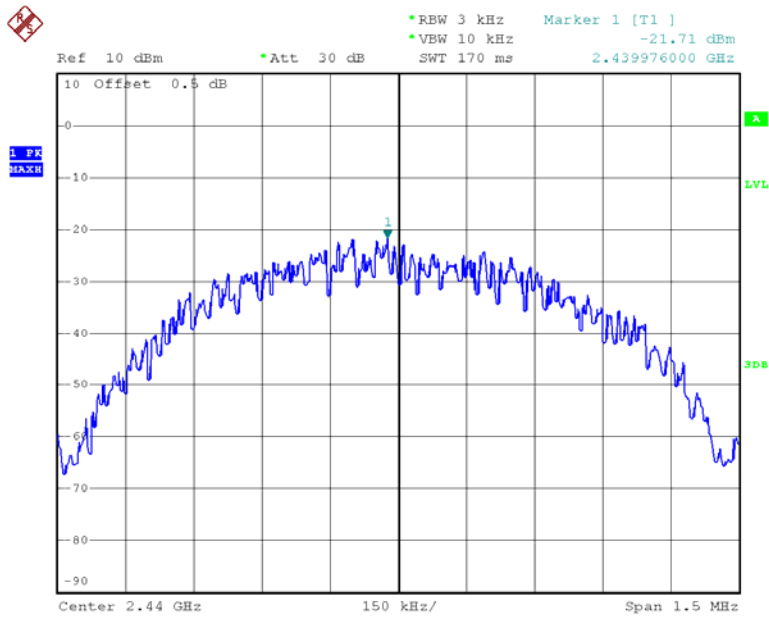

Date: 4.DEC.2015 12:49:06

Power Spectral Density, BLE High Channel

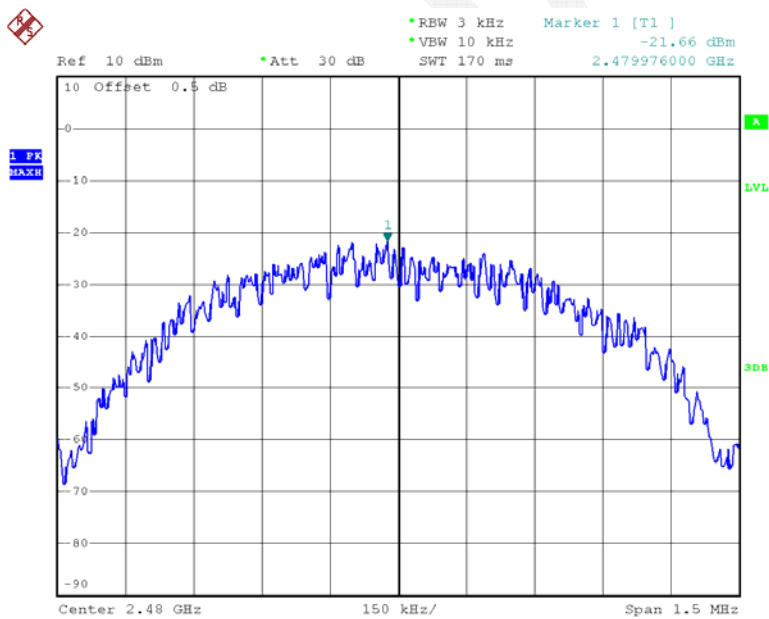

Date: 4.DEC.2015 12:49:46

***** END OF REPORT *****