



## Certificate of Compliance

Test Report No.:	KTI01E-F0730		
Registration No.:	99058		
Applicant:	BF TECH CO., LTD		
Applicant Address:	4 <sup>TH</sup> 404, TWIN PLAZA BUILDING, 1058 HOGYE-DONG, DONGAN-KU		
Product:	Numeric Radio Paging Receiver		
FCC ID:	N45BF-2000	Model No.	BF-2000
Receipt No.:	KTI20010702-2	Date of receipt:	July, 2, 2001
Date of Issue:	July, 2, 2001		
Testing location	Korea Technology Institute Co., Ltd. 51-19, Sanglim3-Ri, Docheok-Myeun, Gwangju-Shi, Gyeungki-Do, Korea		
Test Standards:	ANSI. C63.4 : 1992		
Rule Parts:	FCC Part 15, Subpart B		
Equipment Class:	Low Power Communications Device Receiver(CYY)		
Test Result:	The above mentioned product has been tested and passed.		

Prepare by: J. H. Lee

Tested by: S. B. Kim/ Engineer

Approved by: G. C. Min/ President

Signature	Date	Signature	Date	Signature	Date
Other Aspects :					
Abbreviations :	• OK, Pass=passed   • Fail=failed   • N/A=not applicable				

- This test report is not permitted to copy partly without our permission.
- This test result is dependent on only equipment to be used.
- This test result is based on a single evaluation of one sample of the above mentioned.
- This test report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S Government.
- We certify this test report has been based on the measurement standards that is traceable to the national or international standards.

**•• Contents ••**

Contents	2
List of Tables	2
List of Figures	2
List of Photographs	3
1. General	3
2. Test Site	3
2.1 Location	4
2.2 List of Test and Measurement Instruments	4
2.3 Test Data	4
2.4 Test Environment	5
3. Description of the tested samples	5
3.1 Rating and Physical characteristics	5
3.2 Submitted documents	6
4. Measurement conditions	6
4.1 Modes of operation	6
4.2 Additional equipments	6
4.3 Uncertainty	6
4.4 Test Setup	7
5. Emission Test	8
5.1 Conducted Emissions	8
5.2 Radiated Emissions	10
6. Photographs of the Test Set-up	13
Annex1 Label	15
Annex2 Photographs of EUT	16~17

**• List of Tables**

Table 1	List of test and measurement equipment	4
Table 2	Test Data. Radiated Emissions	11

**• List of Photographs**

Photograph 1	Setup for Conducted Emissions	15
Photograph 2	Setup for Radiated Emissions	14



## **1. General**

This equipment has been shown to be capable of compliance with the applicable technical standards and was tested in accordance with the measurement procedures as indicated in this report.

We attest to the accuracy of data. All measurements reported herein were performed by Korea Technology Institute Co., LTD. And were made under Chief Engineer's supervision.

We assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

## **2. Test Site**

Korea Technology Institute Co., LTD

### **2.1 Location**

51-19, Sanglim3-Ri, Docheok-Myeon, Gwangju-Shi, Gyeungki-Do, Korea

The Test Site is in compliance with ANSI C63.4/1992 for measurement of radio Interference.



**Korea Technology Institute Co., Ltd.**

*Page 4 of 12*

## 2.2 List of Test and Measurement Instruments

**Table 1 : List of Test and Measurement Equipment**

- **Conducted Emissions**

Kind of Equipment	Type	S/N	Calibrated until
Spectrum Analyzer	R3261C	61720427	11.2001
Field Strength Meter	ESPC	832827/011	11.2001
LISN	ESH3-Z5	8254601019	5.2002
LISN	KNW407	8-1097-7	11.2001
Pulse limiter	ESH3Z2	357.8810.52	11.2001
Conducted Cable	N/A	N/A	11.2001

- **Radiated Emissions**

Kind of Equipment	Type	S/N	Calibrated until
Field Strength Meter	ESPC	832827/011	11.2001
Spectrum Analyzer	R3261C	61720427	11.2001
Pre Amplifier	8447D	2944A06874	11.2001
Log Periodic Antenna	3146	9105-1343	11.2001
Biconical Antenna	3110	9105-3100	11.2001
Open Site Cable	N/A	N/A	11.2001
Antenna Mast	DETT-03	N/A	N/A
Antenna & Turntable controller	DETT-03	91X519	N/A

## 2.3 Test Date

Date of Application : July, 2, 2001

Date of Test : July, 11, 2001

## 2.4 Test Environment

See each test item's description.



### **3. Description of the tested samples**

The EUT is Numeric Radio Paging Receiver.

#### **3.1 Rating and Physical Characteristics**

- Frequency range : 929-932MHz
- Using battery:1.5V

#### **3.2 Submitted Documents**

- User's Guide
- Block Diagram



## 4. Measurement Conditions

### 4.1 Modes of Operation

The EUT was in the following normal mode during all testing;

### 4.2 Uncertainty

#### 1) Radiated disturbance

UC (Combined standard Uncertainty) =  $\pm$  1.8dB

Expanded uncertainty  $U = KU_c$

$K = 2$

- $U = \pm 3.6\text{dB}$


#### 2) Conducted disturbance

$UC = \pm 0.88\text{dB}$

$U = KU_c = 2 \times U_c = \pm 1.8\text{dB}$



### 4.3 Test setup

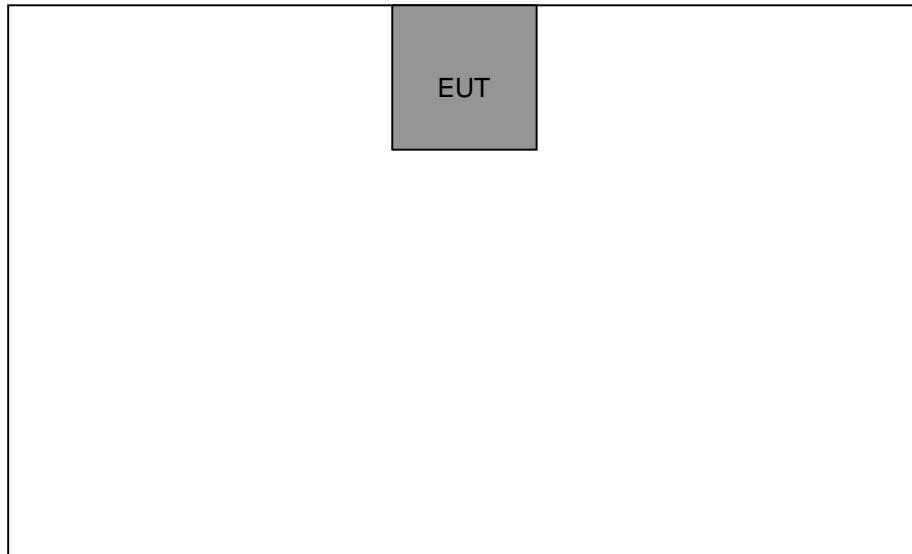



## **5. EMISSION Test**

### **5.1 Conducted Emissions**

**Result :**

**Not Applicable**

The line-conducted facility is located inside a 2.3M x 3.5M x 5.5M shielded closure.

The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 605-05.

A 1m x 1.5m wooden table 80cm high is placed 80cm away from the conducting ground plane and 40cm away from the sidewall of the shielded room. Kyoritsu Model KNW-407 (10kHz-30MHz) 50ohm/50 uH Line-Impedance Stabilization Networks (LISN) are bonded to the shielded room.

The EUT is powered from the R&S LISN and the support equipment is powered from the Kyoritsu LISN. Power to the LISN are filtered by a high-current high-insertion loss shield enclosures power line filters (100dB 14kHz-1GHz).

The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure.

All electrical cables are shielded by braided tinned copper zipper tubing with inner diameter of 1/2".

If the EUT is a DC-Powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the R&S LISN.

All interconnecting cables more than 1 meter were shortened by non-inductive bundling (serpentine fashion) to a 1-meter length.

Sufficient time for the EUT, Support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT.

The spectrum was scanned from 450kHz to 30MHz with 100msec. Sweep time.

The frequency producing the maximum level was reexamined using EMI field Intensity meter (ESPC) and Quasi-Peak adapter. The detector function was set to CISPR quasi-peak mode.

The bandwidth of the receiver was set to 10kHz. The EUT, support equipment, and interconnecting Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; if applicable; whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in photograph of conducted test.

Each EME reported was calibrated using self-calibrating mode.

KTI01E-F0730  
N45BF-2000

FCC ID :



**Korea Technology Institute Co., Ltd.**

*Page 9 of 12*

**Table 2 : Test Data, Conducted Emissions****The EUT is only a battery operated device.**

Frequency (MHz)	(1)Reading (dB•V)	Line	(2)Limit (dB•V)	(3)Margin (dB)
			48.00	

**NOTES:**

1. All modes of operation were investigated  
And the worst-case emission are reported.
2. All other emissions are non-significant.
3. All readings are calibrated by self-mode in receiver.
4. Measurements using CISPR quasi-peak mode.
5. Line H = LINE-PE, Line N = NEUTRAL-PE
6. C/F = Correction Factor
7. C/L = Cable Loss
8. The limit for Class B digital device is 250 uV (48dBuV) from 450KHz to 30MHz

**• Margin Calculation**

$$(6) \text{Margin} = (2)\text{Limit} - (1)\text{Reading}$$



## 5.2 Radiated Emissions

**Result :** Pass

Preliminary measurements were made indoors at 1 meter using broadband antennas, broadband Amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and Investigated. The system configurations, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 to 300 MHz using biconical antenna and from 300 to 1000 MHz using log-periodic antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3-meter test range using EMCO antennas. The test equipment was placed on a wooden table situated on a 4x4 meter area adjacent to the measurement area. Turntable was to protect from weather in the dome that made with Polyethylene film. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined and investigated using EMI/Field Intensity Meter (ESPC) R & S. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120kHz or 1 MHz depending on the frequency or type or signal.

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated Measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8meter high non-metallic 1 x 1.5 meter table.

The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed, and/or support equipment, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in photograph of radiated emission test. Each EME reported was calibrated using self-calibrating mode.

KTI01E-F0730  
N45BF-2000

FCC ID :



**Korea Technology Institute Co., Ltd.**

*Page 13 of 12*

**Table 3 : Test Data, Radiated Emissions (Test Frequency : 929.3MHz)**

Frequency (MHz)	Pol.	Height [m]	Angle [°]	(1) Reading (dB•V)	(2) AFCL (dB/m)	(3) Actual (dB•V/m)	(4) Limit (dB•V/m)	(5) Margin (dB)
231.44	H	3.15	54	3.58	21.57	25.15	46	20.85
326.46	H	2.84	202	3.76	19.30	23.06		22.94
347.11	H	2.75	51	3.14	19.66	22.8		23.2
431.15	H	2.65	123	4.56	22.68	27.24		18.76
465.26	H	2.56	359	4.23	23.75	27.98		18.02
482.29	V	1.86	239	4.13	23.75	27.88		18.12
494.32	V	1.57	167	3.69	25.92	29.61		16.39

Table. Radiated Measurements at 3-meters

**Notes:**

1. All modes of operation were investigated  
And the worst-case emission are reported.
2. All other emission are non-significant.
3. All readings are calibrated by self-mode in receiver.
4. Measurements using CISPR quasi-peak mode.
5. AFCL = Antenna factor and cable loss
6. H = Horizontal, V = Vertical Polarization
7. The limit for Class B digital device is 100uV(40dBuV) from 30MHz to 88MHz, 150 uV (43.5dBuV) from 88MHz to 216MHz, 200uV(46dBuV) from 216MHz to 960MHz and 500 uV (54dBuV) from above 960MHz.

• **Margin Calculation**

$$(5)\text{Margin} = (4)\text{Limit} - (3)\text{Actual}$$

$$[(3)\text{Actual} = (1)\text{Reading} + (2)\text{AFCL}]$$

KTI01E-F0730  
N45BF-2000

FCC ID :



**Korea Technology Institute Co., Ltd.**

*Page 15 of 12*

**Table 3 : Test Data, Radiated Emissions (Test Frequency : 931.4MHz)**

Frequency (MHz)	Pol.	Height [m]	Angle [°]	(1) Reading (dB•V)	(2) AFCL (dB/m)	(3) Actual (dB•V/m)	(4) Limit (dB•V/m)	(5) Margin (dB)
45.45	H	1.56	145	4.5	14.99	19.49	40	20.51
61.54	H	2.94	193	4.9	10.26	15.16		24.84
133.57	H	3.51	203	4.2	17.61	21.81	43.5	21.69
344.76	V	2.91	194	4.9	19.66	24.56		21.44
495.78	V	2.64	269	3.69	25.92	29.61	46	16.39
531.16	V	3.16	96	5.3	25.57	30.87		15.13
687.56	V	2.97	48	4.5	29.84	34.34		11.66

Table. Radiated Measurements at 3-meters

**Notes:**

1. All modes of operation were investigated  
And the worst-case emission are reported.
2. All other emission are non-significant.
3. All readings are calibrated by self-mode in receiver.
4. Measurements using CISPR quasi-peak mode.
5. AFCL = Antenna factor and cable loss
6. H = Horizontal, V = Vertical Polarization
7. The limit for Class B digital device is 100uV(40dBuV) from 30MHz to 88MHz, 150 uV (43.5dBuV) from 88MHz to 216MHz, 200uV(46dBuV) from 216MHz to 960MHz and 500 uV (54dBuV) from above 960MHz.

- **Margin Calculation**

$$(5)\text{Margin} = (4)\text{Limit} - (3)\text{Actual}$$

$$[(3)\text{Actual} = (1)\text{Reading} + (2)\text{AFCL}]$$