

On your side



# TEST REPORT

FCC Test for PSR-78-9537-XB  
Certification

APPLICANT  
ADRF KOREA, Inc.

REPORT NO.  
HCT-RF-2004-FC048-R1

DATE OF ISSUE  
April 29, 2020

**HCT Co., Ltd.**

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 634 6300 F ax. +82 31 645 6401



HCT CO., LTD.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA

Tel. +82 31 634 6300 F ax. +82 31 645 6401

# TEST REPORT

FCC Test for  
PSR-78-9537-XB

**REPORT NO.**  
HCT-RF-2004-FC048-R1  
**DATE OF ISSUE**  
29 April 2020  
**Additional Model**  
-

<b>Applicant</b>	ADRF KOREA, Inc. 5-5, Mojeon-Ri, Backsa-Myun, Icheon-Citi, Kyunggi-Do, Korea
<b>EUT Type</b> <b>Model Name</b>	REPEATER PSR-78-9537-XB
<b>FCC ID</b>	N52-PSR-78-9537XB
<b>Output Power</b>	Downlink: 37 dBm Uplink: 30 dBm
<b>Date of Test</b>	April 06, 2020 ~ April 17, 2020
<b>FCC Rule Parts:</b>	Part 2, Part 90

This test results were applied only to the test methods required by the standard.

**Tested by**  
Kwang Il Yoon

(signature)

**Technical Manager**  
Jong Seok Lee

(signature)

**HCT CO., LTD.**  
Soo Chan Lee / CEO  
SooChan Lee

## REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	April 21, 2020	Initial Release
1	April 29, 2020	We have changed the antenna gain.

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

**CONTENTS**

<b>1. GENERAL INFORMATION</b>	<b>5</b>
<b>1.1. APPLICANT INFORMATION</b>	<b>5</b>
<b>1.2. PRODUCT INFORMATION</b>	<b>5</b>
<b>1.3. TEST INFORMATION</b>	<b>5</b>
<b>2. FACILITIES AND ACCREDITATIONS</b>	<b>6</b>
<b>2.1. FACILITIES</b>	<b>6</b>
<b>2.2. EQUIPMENT</b>	<b>6</b>
<b>3. TEST SPECIFICATIONS</b>	<b>7</b>
<b>3.1. STANDARDS</b>	<b>7</b>
<b>3.2. ADDITIONAL DESCRIPTIONS ABOUT TEST</b>	<b>8</b>
<b>3.3. MEASUREMENT UNCERTAINTY</b>	<b>11</b>
<b>3.4. STANDARDS ENVIRONMENTAL TEST CONDITIONS</b>	<b>11</b>
<b>3.5. TEST DIAGRAMS</b>	<b>12</b>
<b>4. TEST EQUIPMENTS</b>	<b>13</b>
<b>5. TEST RESULT</b>	<b>14</b>
<b>5.1. AGC THRESHOLD</b>	<b>14</b>
<b>5.2. OUT-OF-BAND REJECTION</b>	<b>17</b>
<b>5.3. INPUT-VERSUS-OUTPUT SIGNAL COMPARISON</b>	<b>20</b>
<b>5.4. INPUT/OUTPUT POWER AND AMPLIFIER/BOOSTER GAIN</b>	<b>32</b>
<b>5.5. OUT-OF-BAND/OUT-OF-BLOCK EMISSIONS AND SPURIOUS EMISSIONS</b>	<b>39</b>
<b>5.6. RADIATED SPURIOUS EMISSIONS</b>	<b>107</b>
<b>6. Annex A_EUT AND TEST SETUP PHOTO</b>	<b>110</b>

## 1. GENERAL INFORMATION

### 1.1. APPLICANT INFORMATION

Company Name	ADRF KOREA, Inc.
Company Address	5-5, Mojeon-Ri, Backsa-Myun, Icheon-Citi, Kyunggi-Do, Korea

### 1.2. PRODUCT INFORMATION

EUT Type	REPEATER		
EUT Serial Number	P789537XB200001		
Power Supply	100 -240 VAC, 60 Hz		
Frequency Range	Band Name	Uplink (MHz)	Downlink (MHz)
	FirstNet	788 ~ 798	758 ~ 768
Tx Output Power	Downlink: 37 dBm Uplink: 30 dBm		
Antenna Peak Gain	Downlink: 2.6 dBi Uplink: 15 dBi		

### 1.3. TEST INFORMATION

FCC Rule Parts	Part 2, Part 90
Measurement Standards	KDB 935210 D05 v01r04, ANSI C63.26-2015
Test Location	HCT CO., LTD. 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

## 2. FACILITIES AND ACCREDITATIONS

### 2.1. FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4 (Version: 2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

### 2.2. EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 3. TEST SPECIFICATIONS

#### 3.1. STANDARDS

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 2, 90.

Description	Reference
AGC threshold	KDB 935210 D05 v01r04 3.2 KDB 935210 D05 v01r04 4.2
Out-of-band rejection	KDB 935210 D05 v01r04 3.3 KDB 935210 D05 v01r04 4.3
Input-versus-output signal comparison	§ 90.210, § 90.219(e)(4)(iii)
Input/output power and amplifier/booster gain	§ 2.1046, § 90.219, § 90.541, § 90.635
Noise figure	§ 90.219(e)(2)
Emission masks Out-of-band/out-of-block emissions and spurious emissions	§ 2.1051, § 90.219(e)(3)
Spurious emissions radiated	§ 2.1053

### 3.2. ADDITIONAL DESCRIPTIONS ABOUT TEST

Except for the following cases, EUT was tested under normal operating conditions.

: Out-of-band rejection test requires maximum gain condition without AGC.

This EUT is supported power supply both of AC and DC. Test results are only attached worst cases.

The test was generally based on the method of KDB 935210 D05 v01r04 and only followed ANSI C63.26-2015 if there was no test method in KDB standard.

EUT was tested with following modulated signals provide by applicant.

Band Name	Tested signals
FirstNet	LTE 5 MHz
	LTE 10 MHz

The frequency stability measurement has been omitted in accordance with section 3.7 of KDB 935210 D05 v01r04.

: It can be confirmed through input-versus-output signal comparison test that EUT does not alter the input signal.

The tests results included actual loss value for attenuator and cable combination as shown in the table below.

: Input Path

Correction factor table			
Frequency (MHz)	Factor (dB)	Frequency (MHz)	Factor (dB)
600	0.723	2 100	1.245
650	0.760	2 150	1.198
700	0.763	2 200	0.985
750	0.756	2 250	1.565
800	0.795	2 300	1.442
850	0.756	2 350	1.470
900	0.728	2 400	1.530
1 700	1.033	2 450	1.289
1 750	0.970	2 500	1.300
1 800	0.929	2 550	1.551
1 850	1.252	2 600	1.630
1 900	1.093	2 650	1.390
1 950	1.207	2 700	1.350
2 000	1.083		

: Output Path

Correction factor table			
Frequency (MHz)	Factor (dB)	Frequency (MHz)	Factor (dB)
2	30.497	3 000	32.272
10	29.846	4 000	32.685
30	29.772	5 000	32.662
50	29.780	6 000	33.361
100	29.858	7 000	33.551
200	30.053	8 000	33.681
300	30.409	9 000	34.452
400	30.536	10 000	36.689
500	30.682	-	-
600	30.773	-	-
700	30.855	-	-
800	30.878	-	-
900	30.890	-	-
1 000	30.920	-	-
1 100	30.991	-	-
1 200	31.244	-	-
1 300	31.227	-	-
1 400	31.309	-	-
1 500	31.413	-	-
1 600	31.515	-	-
1 700	31.368	-	-
1 800	31.368	-	-
1 900	31.419	-	-
2 000	31.603	-	-
2 100	31.650	-	-
2 200	31.707	-	-
2 300	31.738	-	-
2 400	31.866	-	-
2 500	31.931	-	-
2 600	32.047	-	-
2 700	31.816	-	-

### 3.3. MEASUREMENT UNCERTAINTY



Description	Reference	Results
AGC threshold	-	$\pm 0.87$ dB
Out-of-band rejection	-	$\pm 0.58$ MHz
Occupied Bandwidth	OBW 25 kHz	$\pm 0.16$ MHz
	OBW > 5 MHz	$\pm 0.58$ MHz
Input-versus-output signal comparison	-	$\pm 0.87$ dB
Input/output power and amplifier/booster gain	-	$\pm 0.87$ dB
Out-of-band/out-of-block emissions and spurious emissions	-	$\pm 1.08$ dB
Spurious emissions radiated	$f \leq 1$ GHz	$\pm 4.80$ dB
	$f > 1$ GHz	$\pm 6.07$ dB

\* Coverage factor  $k = 2$ , Confidence levels of 95 %

### 3.4. STANDARDS ENVIRONMENTAL TEST CONDITIONS

Temperature	+15 °C to +35 °C
Relative humidity	30 % to 60 %
Air pressure	860 mbar to 1 060 mbar

### 3.5. TEST DIAGRAMS

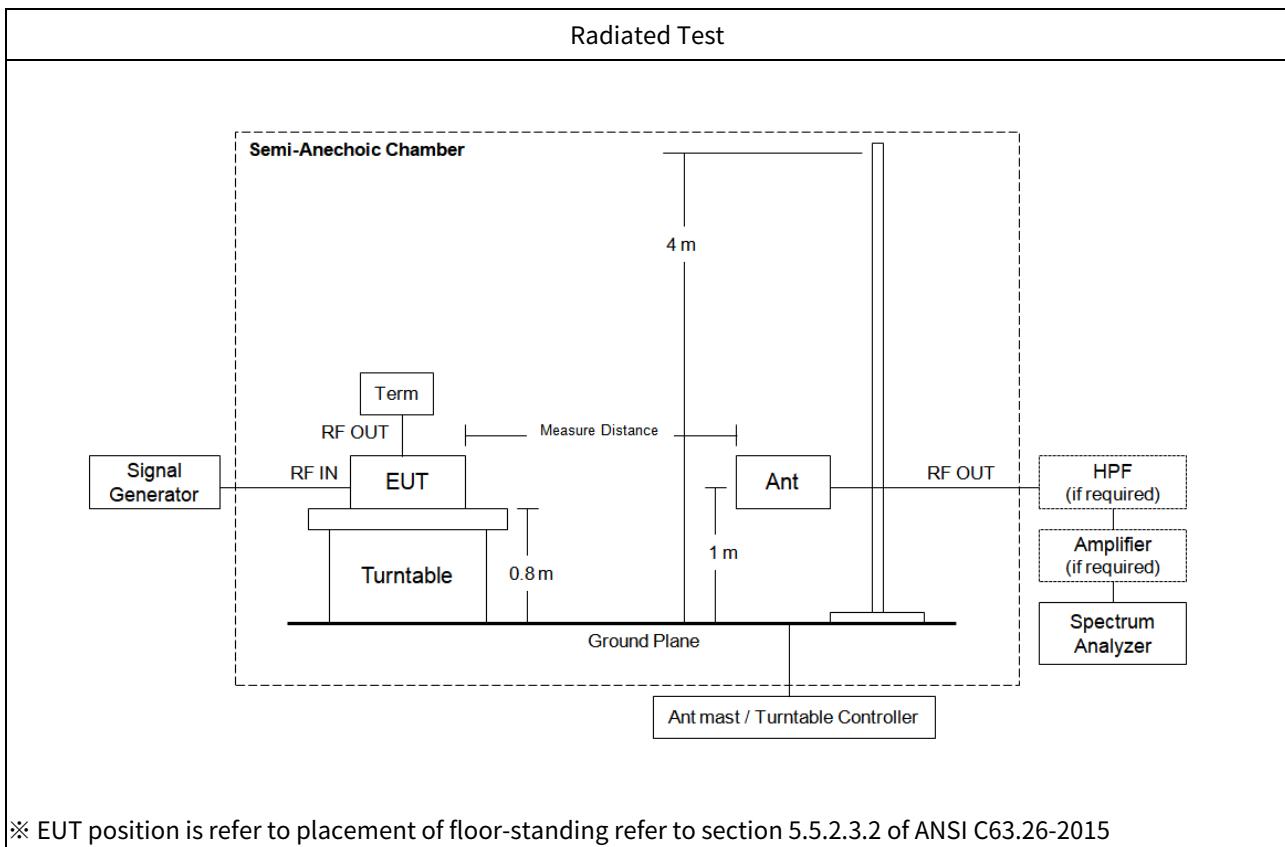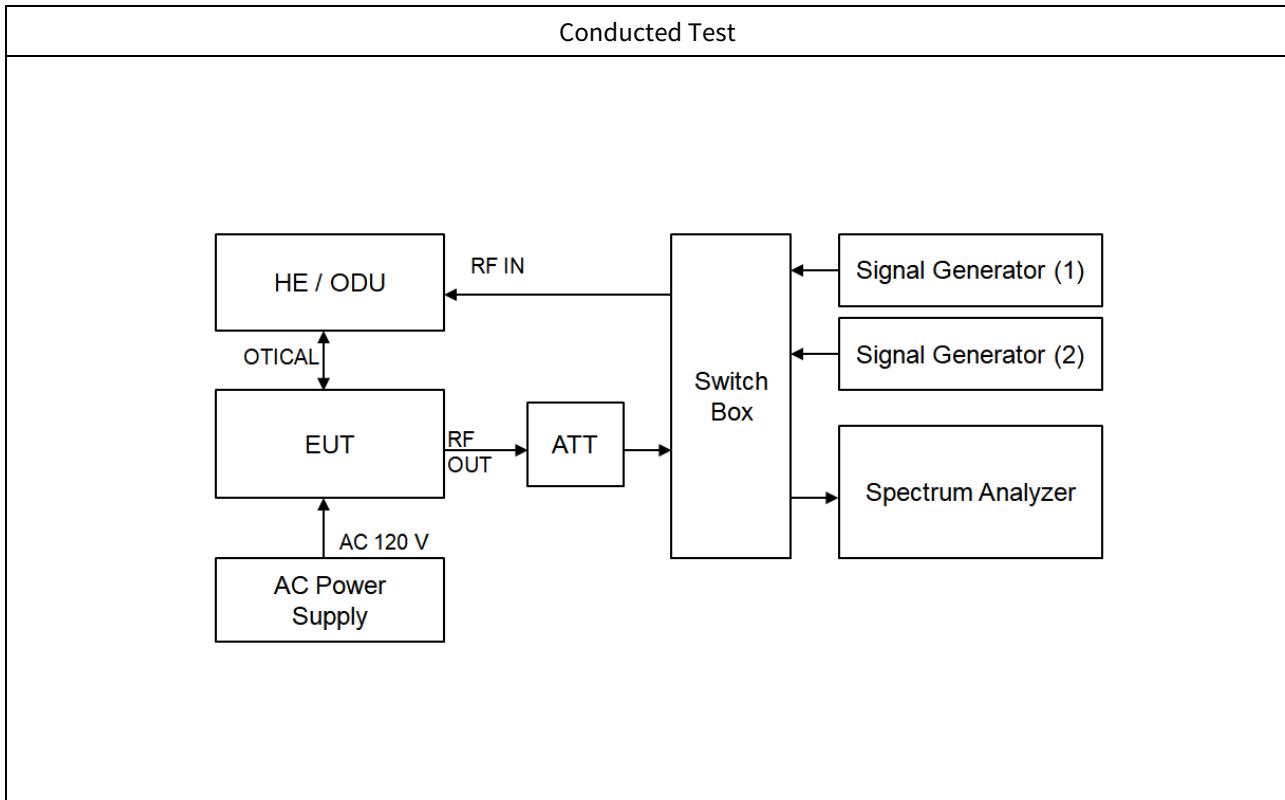

**4. TEST EQUIPMENTS**

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Agilent	N9020A / MXA Signal Analyzer	08/21/2019	Annual	MY46471250
Keysight	N9030B / PXA Signal Analyzer	03/27/2020	Annual	MY55480167
Agilent	N5182A / MXG Vector Signal Generator	08/08/2019	Annual	MY50141649
Agilent	N5182A / MXG Vector Signal Generator	01/17/2020	Annual	MY47070406
Weinschel	WA93-30-33 / Attenuator	04/01/2020	Annual	0190
KEITHLEY	S46 / Switch	N/A	N/A	1088024
Deayoung ENT	DFSS60 / AC Power Supply	04/07/2020	Annual	1003030-1
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
TNM system	FBSM-01B / Amp & Filter Bank Switch Controller	N/A	N/A	N/A
Schwarzbeck	VULB 9168 / Hybrid Antenna	08/02/2019	Biennial	01039
Schwarzbeck	BBHA 9120D / Horn Antenna	06/28/2019	Biennial	1300
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	04/29/2019	Biennial	BBHA9170342
Rohde & Schwarz	FSP(9 kHz ~ 40 GHz) / Spectrum Analyzer	07/16/2019	Annual	100843
Wainwright Instruments	WHKX10-900-1000-15000-40SS	07/15/2019	Annual	5
CERNEX	CBL18265035 / Power Amplifier	12/26/2019	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	06/18/2019	Annual	25956
TNM system	FBSM-05B / HPF(3~18GHz) + LNA1(1~18GHz)	01/21/2020	Annual	F6
TNM system	FBSM-05B / LNA1(1~18GHz)	01/21/2020	Annual	25540

## 5. TEST RESULT

### 5.1. AGC THRESHOLD

#### Test Requirement:

#### KDB 935210 D05 v01r04

Testing at and above the AGC threshold is required.

#### Test Procedures:

Measurements were in accordance with the test methods section 3.2 of KDB 935210 D05 v01r04.

In the case of fiber-optic distribution systems, the RF input port of the equipment under test (EUT) refers to the RF input of the supporting equipment RF to optical convertor; see also descriptions and diagrams for typical DAS booster systems in KDB Publication 935210 D02

Devices intended to be directly connected to an RF source (donor port) only need to be evaluated for any over-the-air transmit paths.

- a) Connect a signal generator to the input of the EUT.
- b) Connect a spectrum analyzer or power meter to the output of the EUT using appropriate attenuation as necessary.
- c) The signal generator should initially be configured to produce either of the required test signals.
- d) Set the signal generator frequency to the center frequency of the EUT operating band.
- e) While monitoring the output power of the EUT, measured using the methods of ANSI C63.26-2015 subclause 5.2.4.4.1, increase the input level until a 1 dB increase in the input signal power no longer causes a 1 dB increase in the output signal power.
- f) Record this level as the AGC threshold level.
- g) Repeat the procedure with the remaining test signal.

Measurements were in accordance with the test methods section 4.2 of KDB 935210 D05 v01r04.

Testing at and above the AGC threshold will be required. The AGC threshold shall be determined by applying the procedure of 3.2, but with the signal generator configured to produce a test signal defined in Table 1, a CW input signal, or a digitally modulated signal, consistent with the discussion about signal types in 4.1.

#### Output power measurement in subclause 5.2.4.4.1 of ANSI C63.26

- a) Set span to  $2 \times$  to  $3 \times$  the OBW.
- b) Set RBW = 1% to 5% of the OBW.
- c) Set VBW  $\geq 3 \times$  RBW.
- d) Set number of measurement points in sweep  $\geq 2 \times$  span / RBW.

- e) Sweep time: auto-couple
- f) Detector = power averaging (rms).
- g) If the EUT can be configured to transmit continuously, then set the trigger to free run.
- h) Omit
- i) Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over multiple symbols, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.
- j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band or channel power measurement function, with the band/channel limits set equal to the OBW band edges. If the instrument does not have a band or channel power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

**Test Results:**

Test Band	Link	Signal	Center Frequency (MHz)	AGC Threshold Level (dBm)	Output Level (dBm)
FirstNet	Uplink	LTE 5 MHz	793.00	-65	30.25
		LTE 10 MHz	793.00	-65	30.23
	Downlink	LTE 5 MHz	763.00	-58	37.39
		LTE 10 MHz	763.00	-58	37.35

## 5.2. OUT-OF-BAND REJECTION

**Test Requirement:****KDB 935210 D05 v01r04**

Out-of-band rejection required.

**Test Procedures:**

Measurements were in accordance with the test methods section 3.3 of KDB 935210 D05 v01r04.

Adjust the internal gain control of the EUT to the maximum gain for which equipment certification is sought.

- a) Connect a signal generator to the input of the EUT.
- b) Configure a swept CW signal with the following parameters:
  - 1) Frequency range =  $\pm 250\%$  of the passband, for each applicable CMRS band.
  - 2) Level = a sufficient level to affirm that the out-of-band rejection is  $> 20$  dB above the noise floor and will not engage the AGC during the entire sweep.
  - 3) Dwell time = approximately 10 ms.
  - 4) Number of points = SPAN/(RBW/2).
- c) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation.
- d) Set the span of the spectrum analyzer to the same as the frequency range of the signal generator.
- e) Set the resolution bandwidth (RBW) of the spectrum analyzer to be 1 % to 5 % of the EUT passband, and the video bandwidth (VBW) shall be set to  $\geq 3 \times$  RBW.
- f) Set the detector to Peak Max-Hold and wait for the spectrum analyzer's spectral display to fill.
- g) Place a marker to the peak of the frequency response and record this frequency as  $f_0$ .
- h) Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the  $-20$  dB down amplitude, to determine the 20 dB bandwidth.
- i) Capture the frequency response of the EUT.
- j) Repeat for all frequency bands applicable for use by the EUT.

Measurements were in accordance with the test methods section 4.3 of KDB 935210 D05 v01r04.



Adjust the internal gain control of the EUT to the maximum gain for which equipment certification is sought.

a)

- a) Connect a signal generator to the input of the EUT.
- b) Configure a swept CW signal with the following parameters:
  - 1) Frequency range =  $\pm 250\%$  of the manufacturer's specified pass band.
  - 2) The CW amplitude shall be 3 dB below the AGC threshold (see 4.2), and shall not activate the AGC threshold throughout the test.
  - 3) Dwell time = approximately 10 ms.

- 4) Frequency step = 50 kHz.
- c) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation.
- d) Set the RBW of the spectrum analyzer to between 1 % and 5 % of the manufacturer's rated passband, and  $VBW = 3 \times RBW$ .
- e) Set the detector to Peak and the trace to Max-Hold.
- f) After the trace is completely filled, place a marker at the peak amplitude, which is designated as  $f_0$ , and with two additional markers (use the marker-delta method) at the 20 dB bandwidth (i.e., at the points where the level has fallen by 20 dB).
- g) Capture the frequency response plot for inclusion in the test report.

## Test Results:

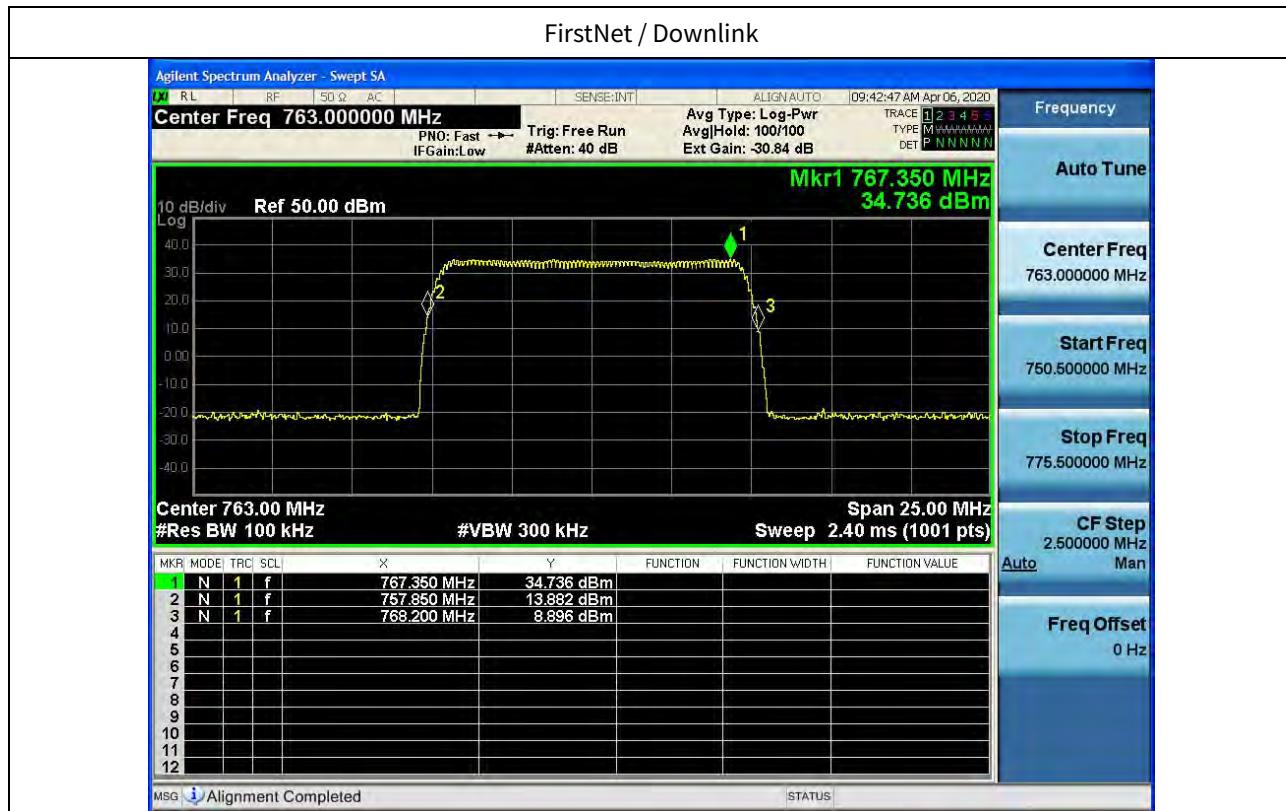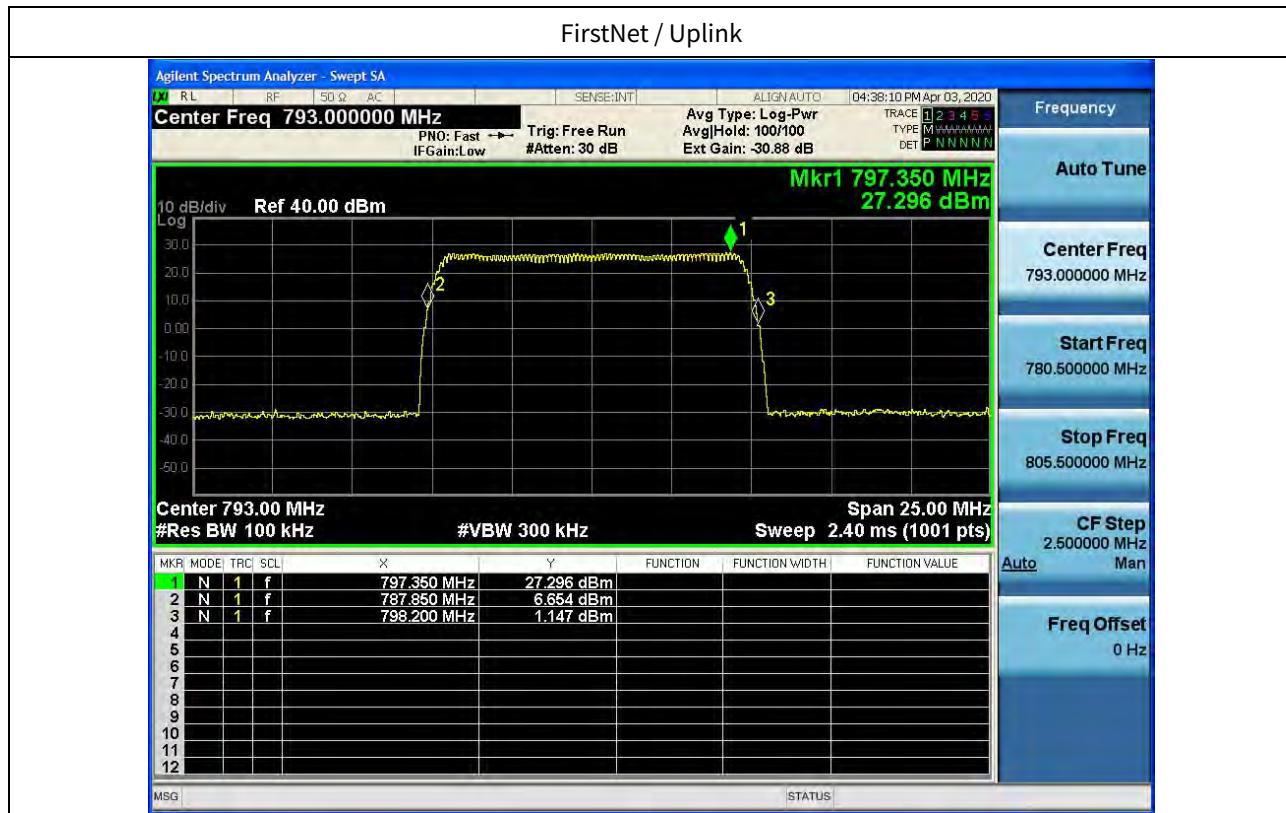

### 5.3. INPUT-VERSUS-OUTPUT SIGNAL COMPARISON

#### Test Requirement:

##### § 2.1049 Measurements required: Occupied bandwidth.

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the specified conditions of § 2.1049 (a) through (i) as applicable.

#### Test Procedures:

Measurements were in accordance with the test methods section 3.4 of KDB 935210 D05 v01r04.

- a) Connect a signal generator to the input of the EUT.
- b) Configure the signal generator to transmit the AWGN signal.
- c) Configure the signal amplitude to be just below the AGC threshold level (see 3.2), but not more than 0.5 dB below.
- d) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation.
- e) Set the spectrum analyzer center frequency to the center frequency of the operational band under test. The span range of the spectrum analyzer shall be between 2 times to 5 times the emission bandwidth (EBW) or alternatively, the OBW.
- f) The nominal RBW shall be in the range of 1 % to 5 % of the anticipated OBW, and the VBW shall be  $\geq 3 \times$  RBW.
- g) Set the reference level of the instrument as required to preclude the signal from exceeding the maximum spectrum analyzer input mixer level for linear operation. In general, the peak of the spectral envelope must be more than  $[10 \log (OBW / RBW)]$  below the reference level.
- h) Steps f) and g) may require iteration to enable adjustments within the specified tolerances.
- i) The noise floor of the spectrum analyzer at the selected RBW shall be at least 36 dB below the reference level.
- j) Set spectrum analyzer detection function to positive peak.
- k) Set the trace mode to max hold.
- l) Determine the reference value: Allow the trace to stabilize. Set the spectrum analyzer marker to the highest amplitude level of the displayed trace (this is the reference value) and record the associated frequency.
- m) Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the  $-26$  dB down amplitude. The 26 dB EBW (alternatively OBW) is the positive frequency difference between the two markers. If the spectral envelope crosses the  $-26$  dB down amplitude at multiple points, the lowest or highest frequency shall be selected as the frequencies that are the furthest removed from the center frequency at which the spectral envelope crosses the  $-26$  dB down amplitude point.
- n) Repeat steps e) to l) with the input signal connected directly to the spectrum analyzer (i.e., input signal measurement).
- o) Compare the spectral plot of the input signal (determined from step m) to the output signal (determined from step l) to affirm that they are similar (in passband and rolloff characteristic features and relative spectral

locations), and include plot(s) and descriptions in test report.

- A. Repeat the procedure [steps e) to n)] with the input signal amplitude set to 3 dB above the AGC threshold.
- p) Repeat steps e) to o) with the signal generator set to the narrowband signal.
- q) Repeat steps e) to p) for all frequency bands authorized for use by the EUT.

**Test Results:**

Tabular data of Output Occupied Bandwidth

Test Band	Link	Signal	Center Frequency (MHz)	99 % OBW (MHz)	26 dB OBW (MHz)
FirstNet	Uplink	LTE 5 MHz	793.00	4.5276	5.046
		LTE 10 MHz	793.00	9.0094	9.792
	Downlink	LTE 5 MHz	763.00	4.5200	5.044
		LTE 10 MHz	763.00	8.9962	9.754

Tabular data of Input Occupied Bandwidth

Test Band	Link	Signal	Center Frequency (MHz)	99 % OBW (MHz)	26 dB OBW (MHz)
FirstNet	Uplink	LTE 5 MHz	793.00	4.5121	5.039
		LTE 10 MHz	793.00	9.0097	10.019
	Downlink	LTE 5 MHz	763.00	4.5251	5.032
		LTE 10 MHz	763.00	9.0386	10.046

Tabular data of 3 dB above the AGC threshold Output Occupied Bandwidth



Test Band	Link	Signal	Center Frequency (MHz)	99 % OBW (MHz)	26 dB OBW (MHz)
FirstNet	Uplink	LTE 5 MHz	793.00	4.5256	5.005
		LTE 10 MHz	793.00	9.0032	9.742
	Downlink	LTE 5 MHz	763.00	4.5242	5.048
		LTE 10 MHz	763.00	8.9978	9.775


## Measured Occupied Bandwidth Comparison



Test Band	Link	Signal	Variant of Input and output Occupied Bandwidth (%)	Variant of Input and 3 dB above the AGC threshold output Occupied Bandwidth (%)
FirstNet	Uplink	LTE 5 MHz	0.139	-0.675
		LTE 10 MHz	-2.266	-2.765
	Downlink	LTE 5 MHz	0.238	0.318
		LTE 10 MHz	-2.907	-2.698

\* Change in input-output OBW is less than  $\pm 5\%$ .


## Plot data of Occupied Bandwidth

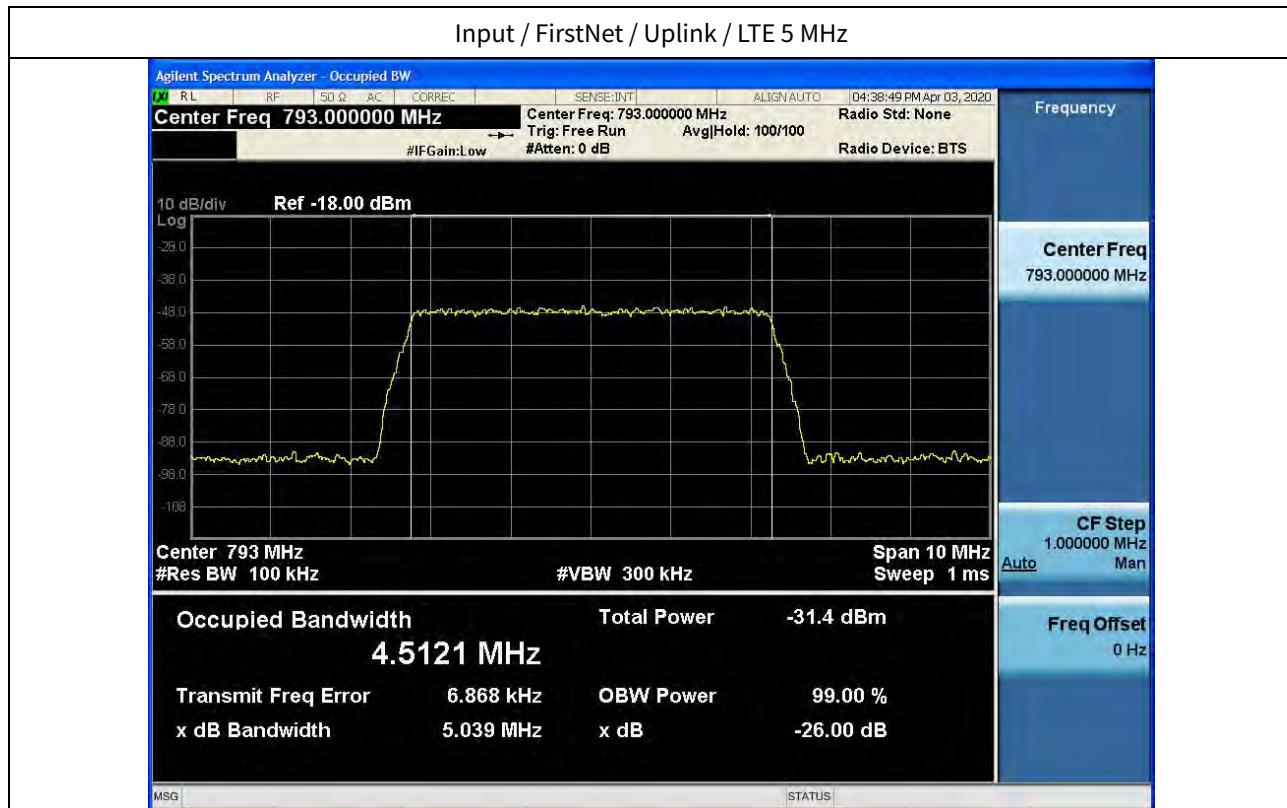
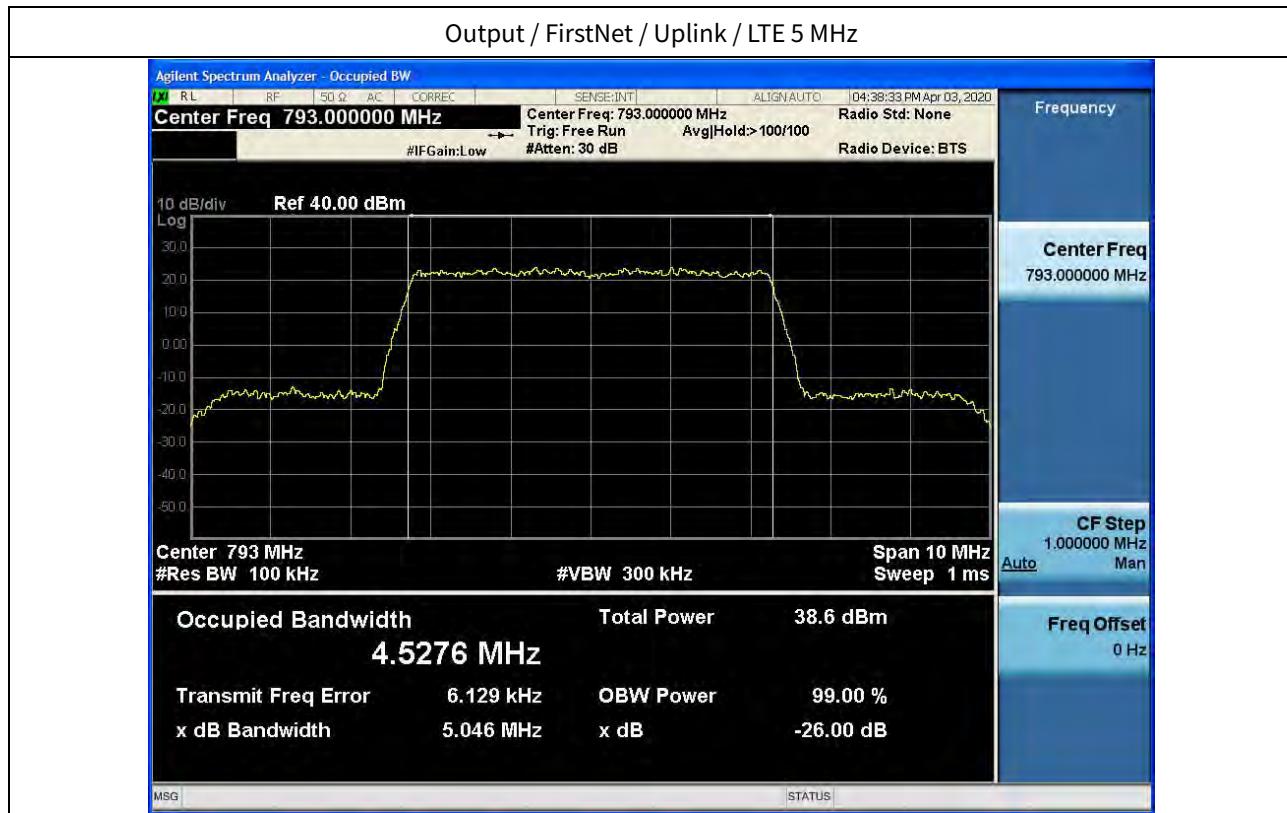


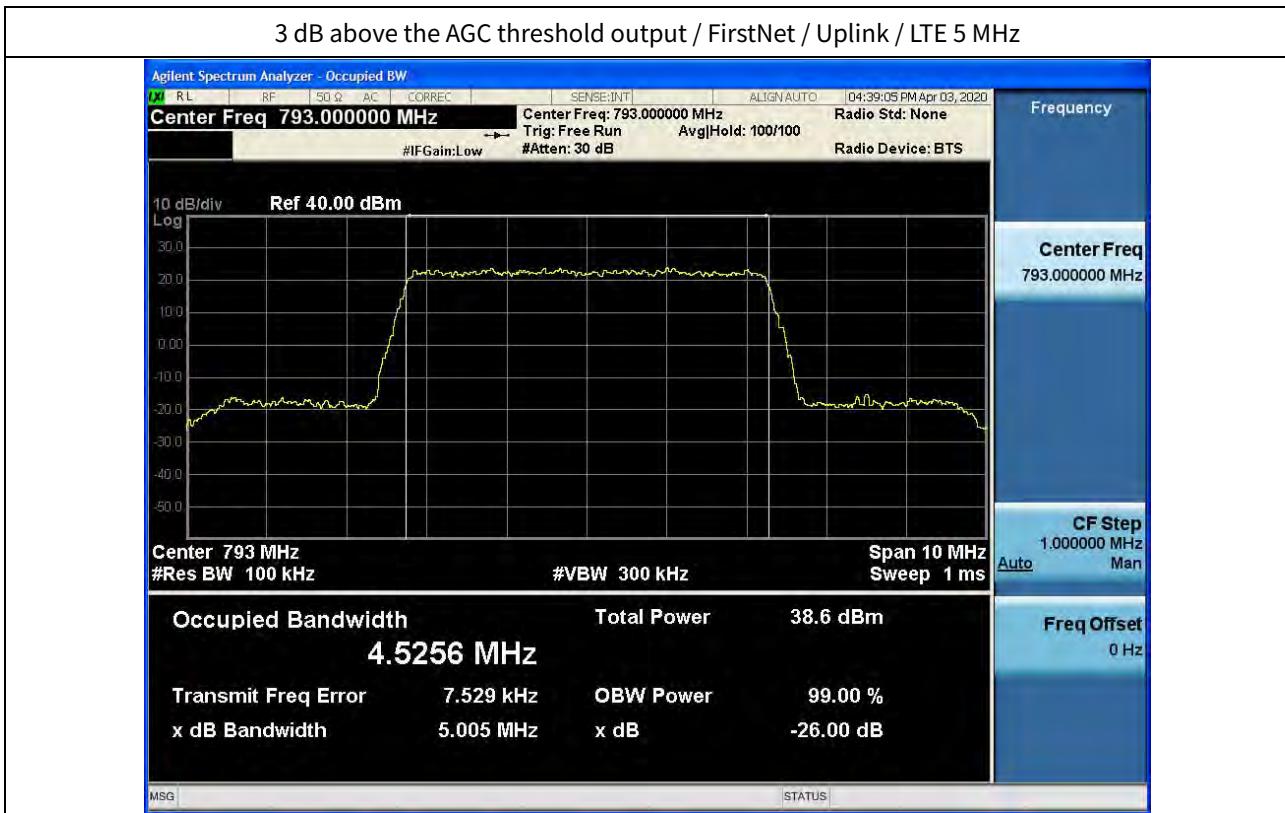

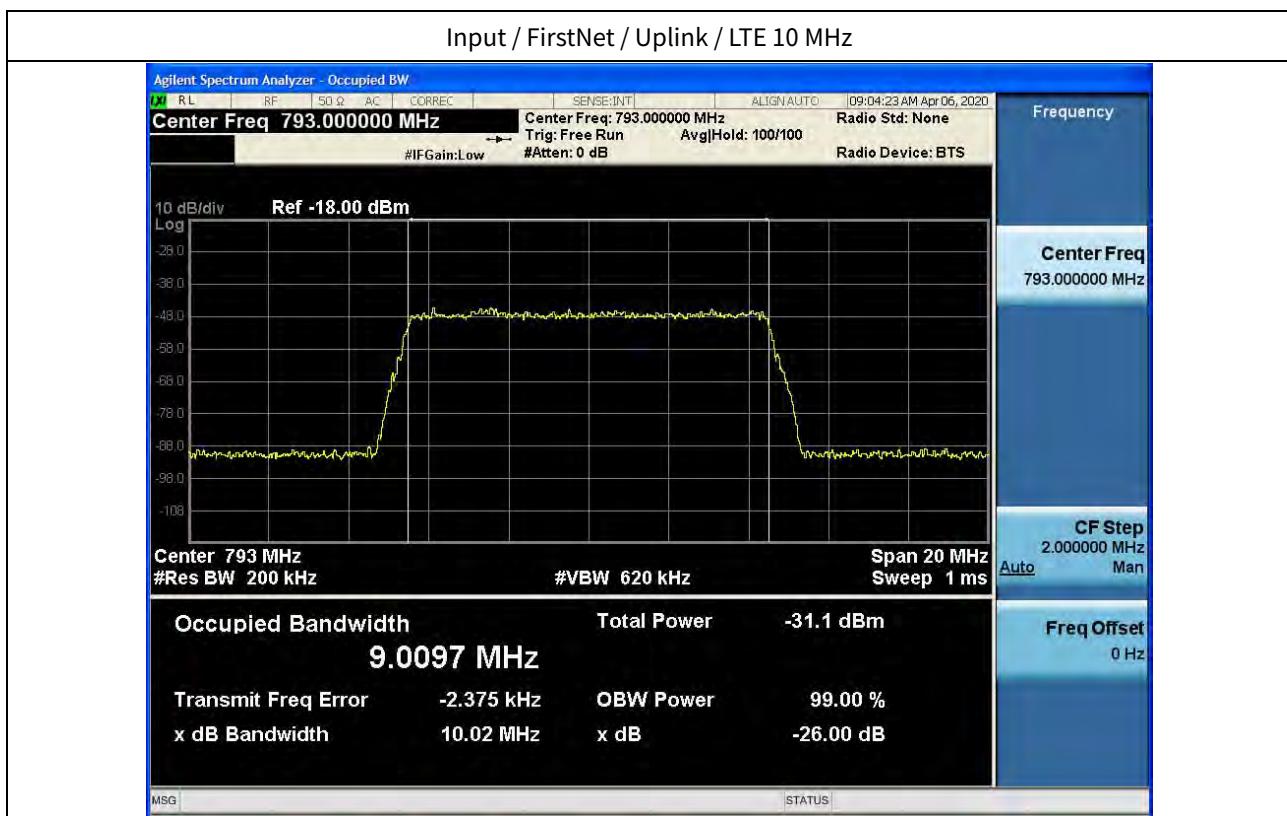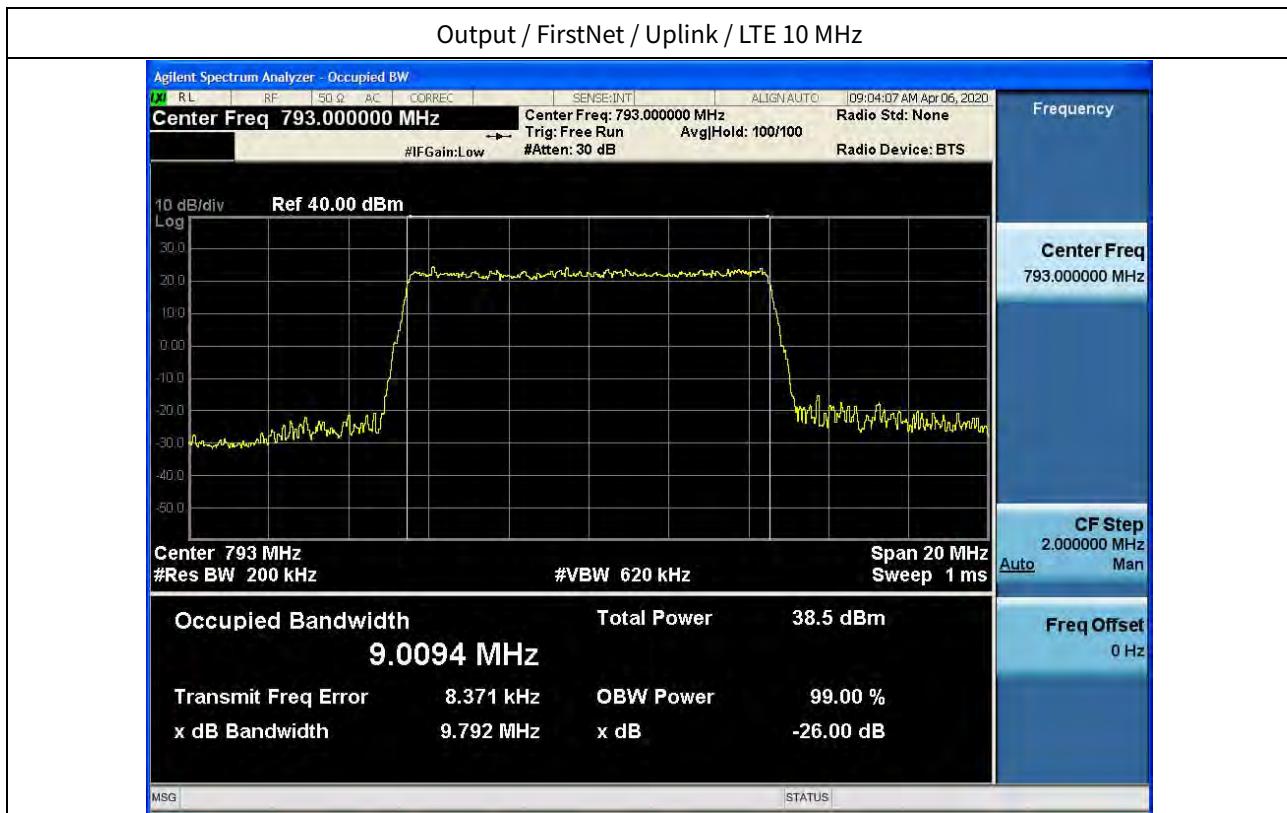



## 3 dB above the AGC threshold output / FirstNet / Uplink / LTE 10 MHz

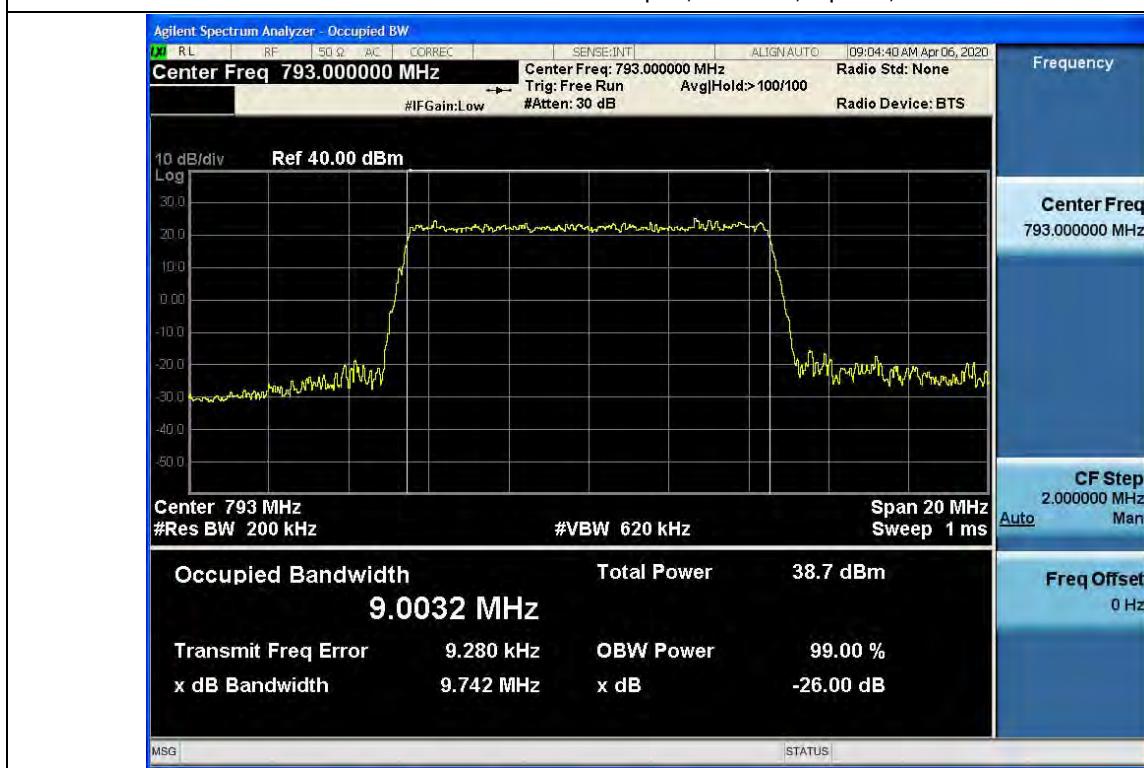

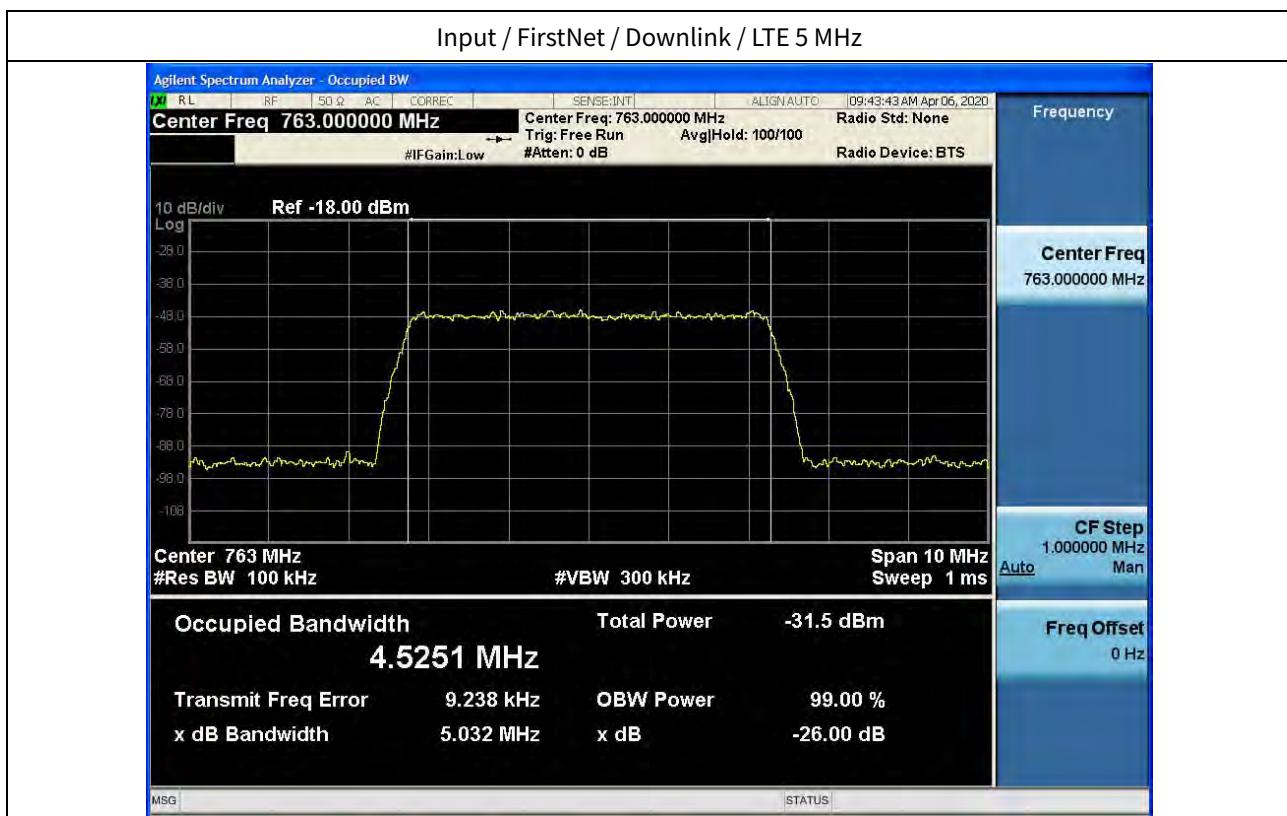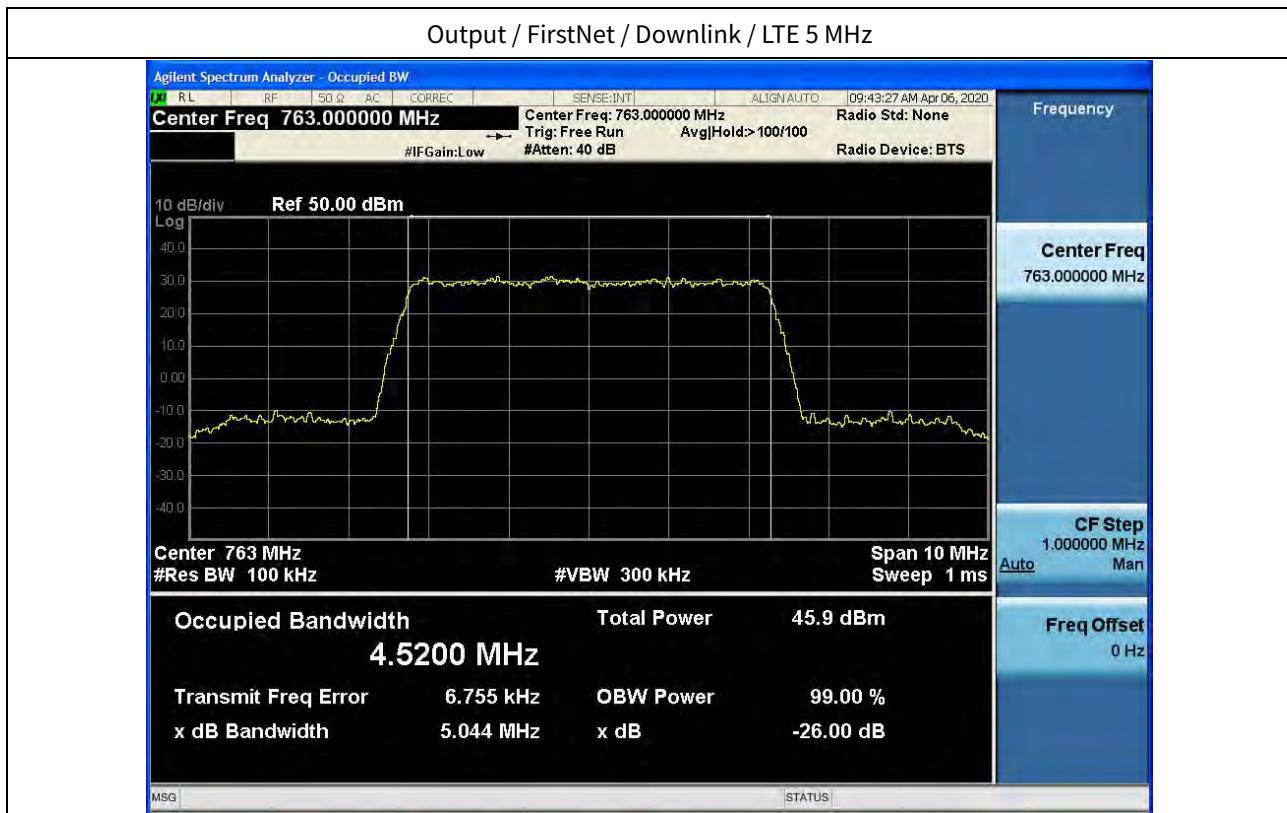


## 3 dB above the AGC threshold output / FirstNet / Downlink / LTE 5 MHz



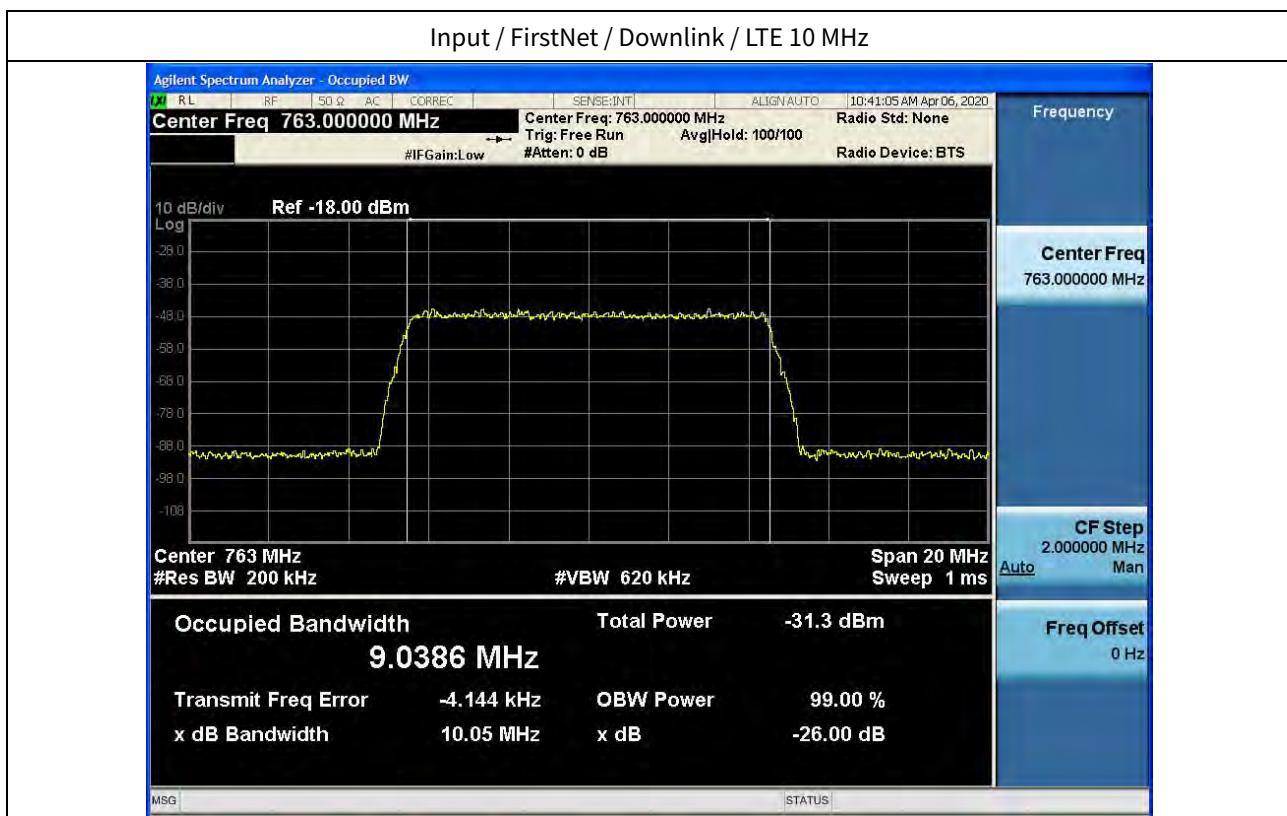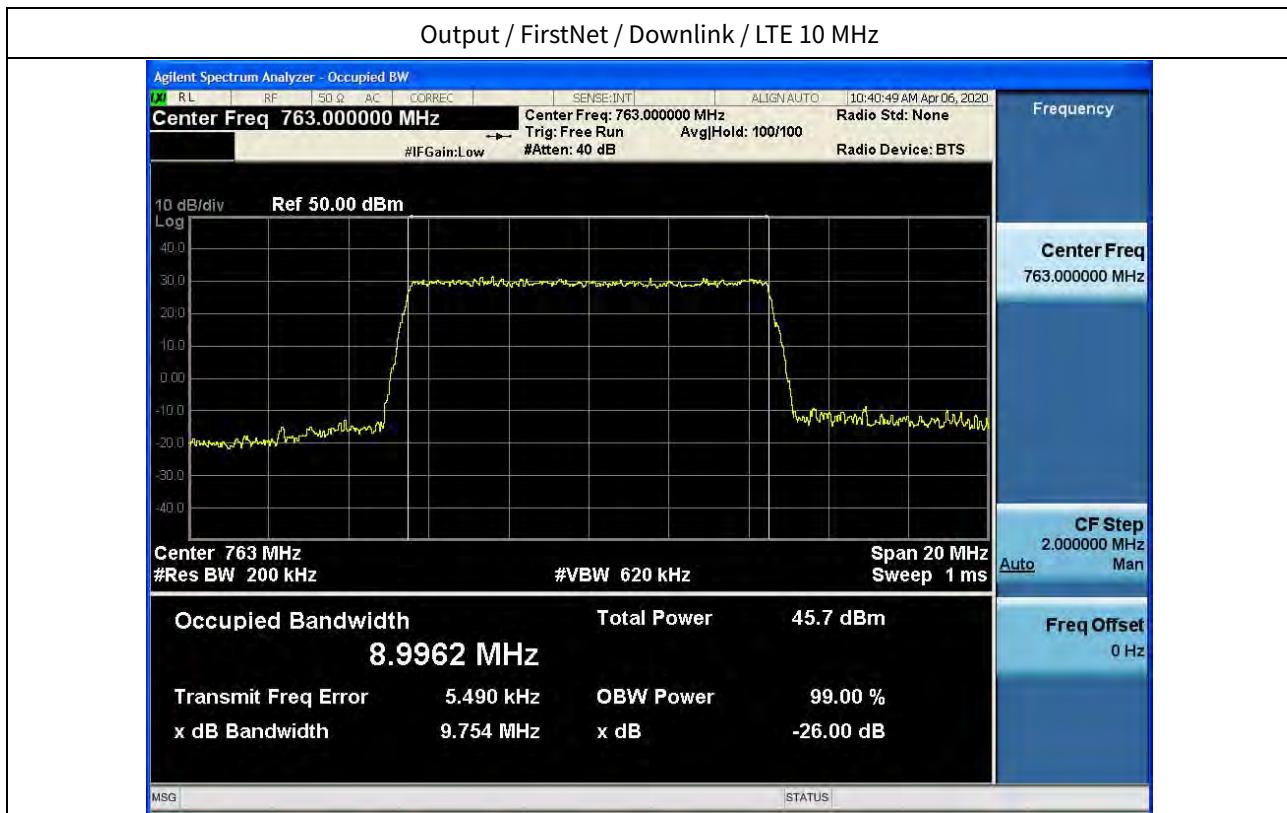

## 3 dB above the AGC threshold output / FirstNet / Downlink / LTE 10 MHz

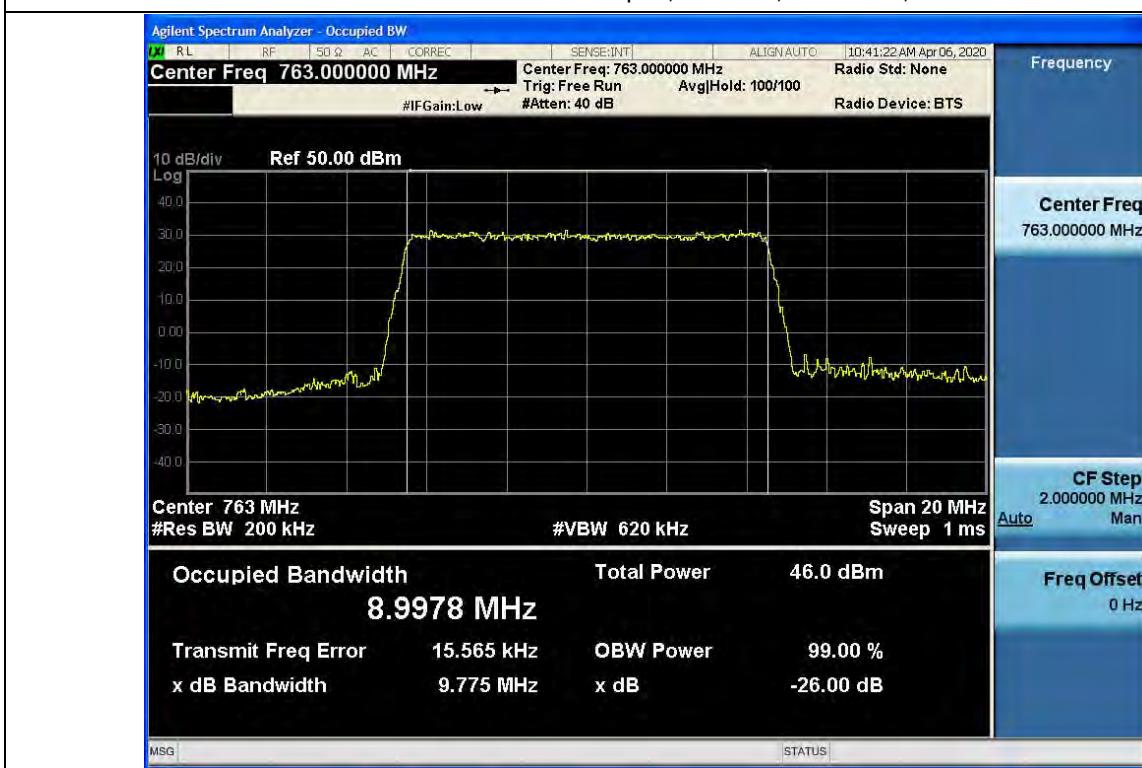

## 5.4. INPUT/OUTPUT POWER AND AMPLIFIER/BOOSTER GAIN

### Test Requirement:

#### § 2.1046 Measurements required: RF power output.

- (a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.
- (b) For single sideband, independent sideband, and single channel, controlled carrier radiotelephone transmitters the procedure specified in paragraph (a) of this section shall be employed and, in addition, the transmitter shall be modulated during the test as specified and applicable in § 2.1046 (b) (1-5). In all tests, the input level of the modulating signal shall be such as to develop rated peak envelope power or carrier power, as appropriate, for the transmitter.
- (c) For measurements conducted pursuant to paragraphs (a) and (b) of this section, all calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. Under the test conditions specified, no components of the emission spectrum shall exceed the limits specified in the applicable rule parts as necessary for meeting occupied bandwidth or emission limitations.

#### § 90.542 Broadband transmitting power limits.

- (a) The following power limits apply to the 758-768/788-798 MHz band:
  - (1) Fixed and base stations transmitting a signal in the 758-768 MHz band with an emission bandwidth of 1 MHz or less must not exceed an ERP of 1000 watts and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 1000 watts ERP in accordance with Table 1 of this section.
  - (2) Fixed and base stations located in a county with population density of 100 or fewer persons per square mile, based upon the most recently available population statistics from the Bureau of the Census, and transmitting a signal in the 758-768 MHz band with an emission bandwidth of 1 MHz or less must not exceed an ERP of 2000 watts and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 2000 watts ERP in accordance with Table 2 of this section.
  - (3) Fixed and base stations transmitting a signal in the 758-768 MHz band with an emission bandwidth greater than 1 MHz must not exceed an ERP of 1000 watts/MHz and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 1000 watts/MHz ERP in accordance with Table 3 of this section.
  - (4) Fixed and base stations located in a county with population density of 100 or fewer persons per square mile, based upon the most recently available population statistics from the Bureau of the Census, and transmitting a signal in the 758-768 MHz band with an emission bandwidth greater than 1 MHz must not exceed an ERP of 2000

watts/MHz and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 2000 watts/MHz ERP in accordance with Table 4 of this section.

(5) Licensees of fixed or base stations transmitting a signal in the 758-768 MHz band at an ERP greater than 1000 watts must comply with the provisions set forth in paragraph (b) of this section.

(6) Control stations and mobile stations transmitting in the 758-768 MHz band and the 788-798 MHz band are limited to 30 watts ERP.

(7) Portable stations (hand-held devices) transmitting in the 758-768 MHz band and the 788-798 MHz band are limited to 3 watts ERP.

(8) For transmissions in the 758-768 MHz and 788-798 MHz bands, licensees may employ equipment operating in compliance with either of the following measurement techniques:

(i) The maximum composite transmit power shall be measured over any interval of continuous transmission using instrumentation calibrated in terms of RMS-equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, etc., so as to obtain a true maximum composite measurement for the emission in question over the full bandwidth of the channel.

(ii) A Commission-approved average power technique.

Table 1 to § 90.542(a)—Permissible Power and Antenna Heights for Base and Fixed Stations in the 758-768 MHz Band Transmitting a Signal With an Emission Bandwidth of 1 MHz or Less

Antenna height (AAT) in meters (feet)	Effective radiated power (ERP) (watts)
Above 1372 (4500)	65
Above 1220 (4000) To 1372 (4500)	70
Above 1067 (3500) To 1220 (4000)	75
Above 915 (3000) To 1067 (3500)	100
Above 763 (2500) To 915 (3000)	140
Above 610 (2000) To 763 (2500)	200
Above 458 (1500) To 610 (2000)	350
Above 305 (1000) To 458 (1500)	600
Up to 305 (1000)	1000

Table 2 to § 90.542(a)—Permissible Power and Antenna Heights for Base and Fixed Stations in the 758-768 MHz Band Transmitting a Signal With an Emission Bandwidth of 1 MHz or Less

Antenna height (AAT) in meters (feet)	Effective radiated power (ERP) (watts)
Above 1372 (4500)	130
Above 1220 (4000) To 1372 (4500)	140

Above 1067 (3500) To 1220 (4000)	150
Above 915 (3000) To 1067 (3500)	200
Above 763 (2500) To 915 (3000)	280
Above 610 (2000) To 763 (2500)	400
Above 458 (1500) To 610 (2000)	700
Above 305 (1000) To 458 (1500)	1200
Up to 305 (1000)	2000

Table 3 to § 90.542(a)—Permissible Power and Antenna Heights for Base and Fixed Stations in the 758-768 MHz Band Transmitting a Signal With an Emission Bandwidth Greater Than 1 MHz

Antenna height (AAT) in meters (feet)	Effective radiated power (ERP) per MHz (watts/MHz)
Above 1372 (4500)	65
Above 1220 (4000) To 1372 (4500)	70
Above 1067 (3500) To 1220 (4000)	75
Above 915 (3000) To 1067 (3500)	100
Above 763 (2500) To 915 (3000)	140
Above 610 (2000) To 763 (2500)	200
Above 458 (1500) To 610 (2000)	350
Above 305 (1000) To 458 (1500)	600
Up to 305 (1000)	1000

Table 4 to § 90.542(a)—Permissible Power and Antenna Heights for Base and Fixed Stations in the 758-768 MHz Band Transmitting a Signal With an Emission Bandwidth Greater Than 1 MHz

Antenna height (AAT) in meters (feet)	Effective radiated power (ERP) per MHz (watts/MHz)
Above 1372 (4500)	130
Above 1220 (4000) To 1372 (4500)	140
Above 1067 (3500) To 1220 (4000)	150
Above 915 (3000) To 1067 (3500)	200
Above 763 (2500) To 915 (3000)	280
Above 610 (2000) To 763 (2500)	400
Above 458 (1500) To 610 (2000)	700
Above 305 (1000) To 458 (1500)	1200
Up to 305 (1000)	2000

(b) For base and fixed stations operating in the 758-768 MHz band in accordance with the provisions of paragraph (a)(5) of this section, the power flux density that would be produced by such stations through a combination of antenna height and vertical gain pattern must not exceed 3000 microwatts per square meter on the ground over the area extending to 1 km from the base of the antenna mounting structure.

**Test Procedures:**

Measurements were in accordance with the test methods section 3.5 of KDB 935210 D05 v01r04.

*Adjust the internal gain control of the EUT to the maximum gain for which the equipment certification is being sought. Any EUT attenuation settings shall be set to their minimum value.*

*Input power levels (uplink and downlink) should be set to maximum input ratings while confirming that the device is not capable of operating in saturation (non-linear mode) at the rated input levels, including during the performance of the input/output power measurements.*

### 3.5.2 Measuring the EUT mean input and output power

- a) Connect a signal generator to the input of the EUT.
- b) Configure to generate the test signal.
- c) The frequency of the signal generator shall be set to the frequency  $f_0$  as determined from out-of-band rejection test.
- d) Connect a spectrum analyzer or power meter to the output of the EUT using appropriate attenuation as necessary.
- e) Set the signal generator output power to a level that produces an EUT output level that is just below the AGC threshold, but not more than 0.5 dB below.
- f) Measure and record the output power of the EUT; use ANSI C63.26-2015 subclause 5.2.4.4.1, for power measurement.
- g) Remove the EUT from the measurement setup. Using the same signal generator settings, repeat the power measurement at the signal generator port, which was used as the input signal to the EUT, and record as the input power. EUT gain may be calculated as described in 3.5.5.
- h) Repeat steps f) and g) with input signal amplitude set to 3 dB above the AGC threshold level.
- i) Repeat steps e) to h) with the narrowband test signal.
- j) Repeat steps e) to i) for all frequency bands authorized for use by the EUT.

### 3.5.5 Calculating amplifier, repeater, or industrial booster gain

After the input and output power levels have been measured as described in the preceding subclauses, the gain of the EUT can be determined from:

$$\text{Gain (dB)} = \text{output power (dBm)} - \text{input power (dBm)}.$$

Report the gain for each authorized operating frequency band, and each test signal stimulus.

**Note 1.** If  $f_0$  that determined from out-of-band test is smaller or greater than difference of test signal's center frequency and operation band block, test is performed at the lowest or the highest frequency that test signals can be passed.

**Test Results:**

Tabular data of Input / Output Power and Gain

Test Band	Link	Signal	f <sub>0</sub> Frequency (MHz)	Input Power (dBm)	Output Power (dBm)	Gain (dB)
FirstNet	Uplink	LTE 5 MHz	795.50	-64.72	30.39	95.11
		LTE 10 MHz	793.00	-64.64	30.23	94.87
	Downlink	LTE 5 MHz	765.50	-58.02	37.44	95.46
		LTE 10 MHz	763.00	-57.94	37.23	95.17



Tabular data of Input / 3 dB above AGC threshold Output Power and Gain



Test Band	Link	Signal	f <sub>0</sub> Frequency (MHz)	Input Power (dBm)	+3 dB Output Power (dBm)	Gain (dB)
FirstNet	Uplink	LTE 5 MHz	795.50	-64.72	30.30	95.02
		LTE 10 MHz	793.00	-64.64	30.16	94.80
	Downlink	LTE 5 MHz	765.50	-58.02	37.20	95.22
		LTE 10 MHz	763.00	-57.94	37.39	95.33

Tabular data of PAPR

Test Band	Link	Signal	f <sub>0</sub> Frequency (MHz)	0.1 % PAPR (dB)
FirstNet	Uplink	LTE 5 MHz	795.50	8.42
		LTE 10 MHz	793.00	8.43
	Downlink	LTE 5 MHz	765.50	8.42
		LTE 10 MHz	763.00	8.41

## Plot data of PAPR

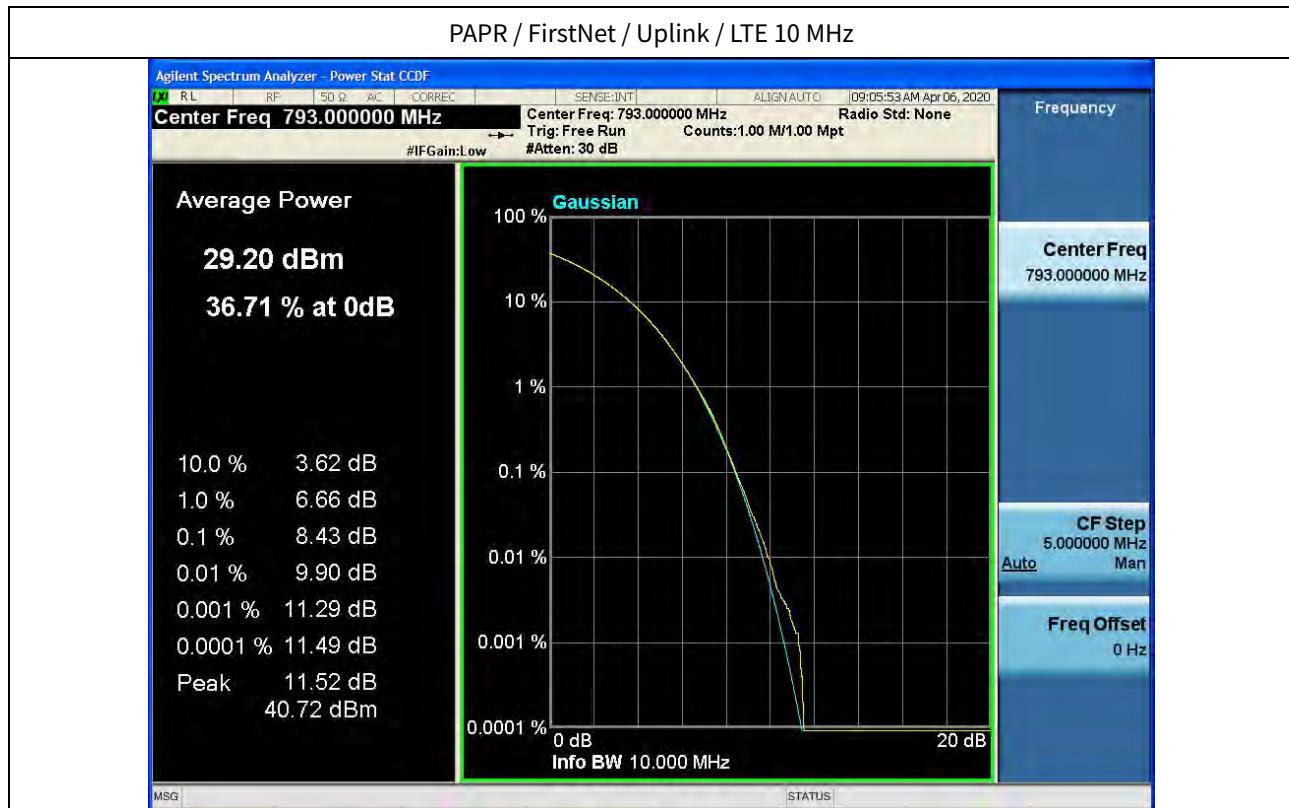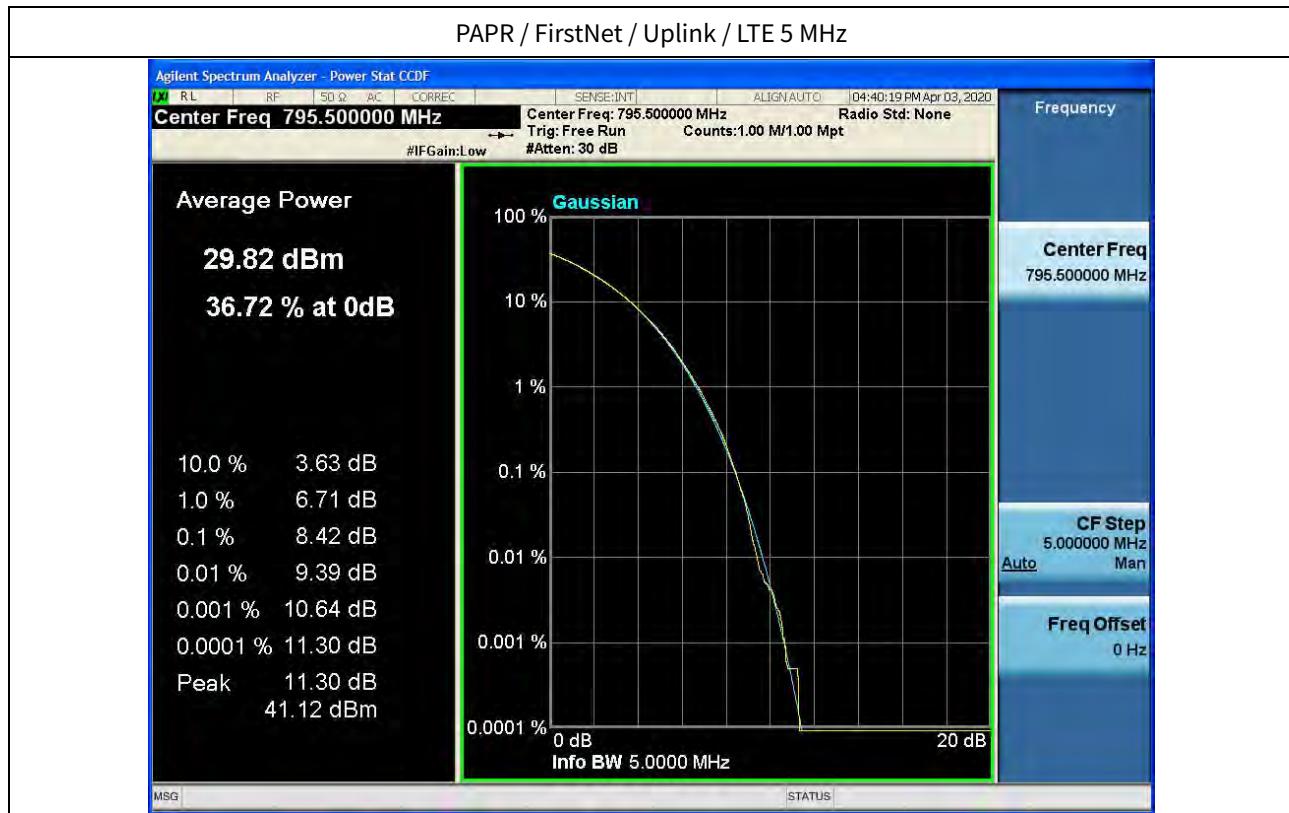

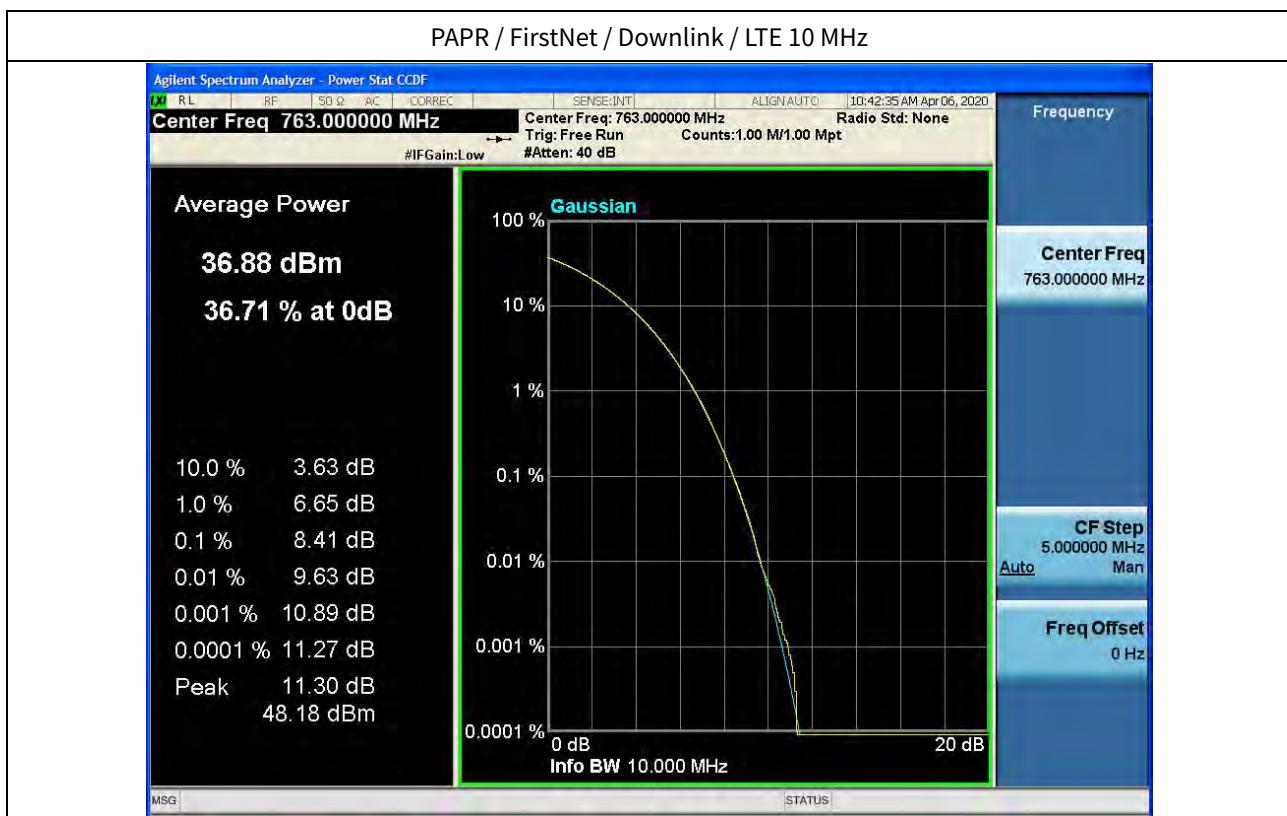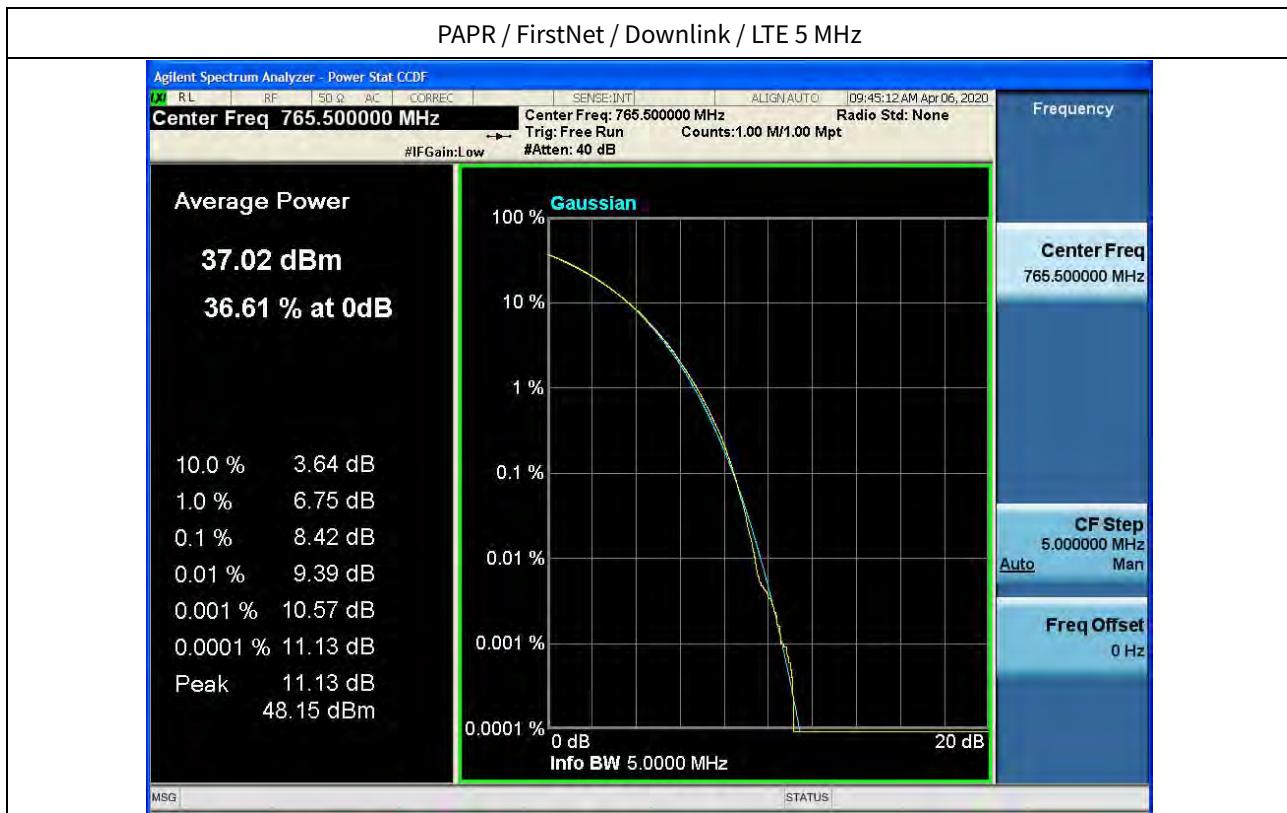

## 5.5. OUT-OF-BAND/OUT-OF-BLOCK EMISSIONS AND SPURIOUS EMISSIONS

### Test Requirements:

#### § 2.1051 Measurements required: Spurious emissions at antenna terminals.

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in § 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

#### § 90.219 Use of signal boosters.

- (e) Device Specifications. In addition to the general rules for equipment certification in § 90.203(a)(2) and part 2, subpart J of this chapter, a signal booster must also meet the rules in this paragraph.
- (3) Spurious emissions from a signal booster must not exceed  $-13$  dBm within any 100 kHz measurement bandwidth.

#### § 90.543 Emission limitations.

- (e) For operations in the 758-768 MHz and the 788-798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:
  - (1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than  $76 + 10 \log (P)$  dB in a 6.25 kHz band segment, for base and fixed stations.
  - (2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations.
  - (3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least  $43 + 10 \log (P)$  dB.
  - (4) Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.
  - (5) Compliance with the provisions of paragraph (e)(3) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of 30 kHz may be employed.
- (f) For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to  $-70$  dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and  $-80$  dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

**Test Procedures:**

Measurements were in accordance with the test methods section 3.6 of KDB 935210 D05 v01r04.

*Spurious emissions shall be measured using a single test signal sequentially tuned to the low, middle, and high channels or frequencies within each authorized frequency band of operation.*

*Out-of-band/out-of-block emissions (including intermodulation products) shall be measured under each of the following two stimulus conditions:*

- a) two adjacent test signals sequentially tuned to the lower and upper frequency band/block edges;*
- b) a single test signal, sequentially tuned to the lowest and highest frequencies or channels within the frequency band/block under examination.*

*NOTE—Single-channel boosters that cannot accommodate two simultaneous signals within the passband may be excluded from the test stipulated in step a).*

### 3.6.2 Out-of-band/out-of-block emissions conducted measurements

- a) Connect a signal generator to the input of the EUT.

If the signal generator is not capable of generating two modulated carriers simultaneously, then two discrete signal generators can be connected with an appropriate combining network to support this two-signal test.

- b) Set the signal generator to produce two AWGN signals as previously described.

- c) Set the center frequencies such that the AWGN signals occupy adjacent channels, as defined by industry standards such as 3GPP or 3GPP2, at the upper edge of the frequency band or block under test.

- d) Set the composite power levels such that the input signal is just below the AGC threshold, but not more than

0.5 dB below. The composite power can be measured using the procedures provided in KDB Publication 971168, but it will be necessary to expand the power integration bandwidth so as to include both of the transmit channels.

- e) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation as necessary.

- f) Set the RBW = reference bandwidth in the applicable rule section for the supported frequency band.

- g) Set the VBW =  $3 \times$  RBW.

- h) Set the detector to power averaging (rms) detector.

- i) Set the Sweep time = auto-couple.

- j) Set the spectrum analyzer start frequency to the upper block edge frequency, and the stop frequency to the upper block edge frequency plus 300 kHz or 3 MHz, for frequencies below and above 1 GHz, respectively.

- k) Trace average at least 100 traces in power averaging (rms) mode.

- l) Use the marker function to find the maximum power level.

- m) Capture the spectrum analyzer trace of the power level for inclusion in the test report.

- n) Repeat steps k) to m) with the composite input power level set to 3 dB above the AGC threshold.
- o) Reset the frequencies of the input signals to the lower edge of the frequency block or band under test.
- p) Reset the spectrum analyzer start frequency to the lower block edge frequency minus 300 kHz or 3 MHz, for frequencies below and above 1 GHz, respectively, and the stop frequency to the lower band or block edge frequency.
- q) Repeat steps k) to n).
- r) Repeat steps a) to q) with the signal generator configured for a single test signal tuned as close as possible to the block edges.
- s) Repeat steps a) to r) with the narrowband test signal.
- t) Repeat steps a) to s) for all authorized frequency bands or blocks used by the EUT.

### 3.6.3 Spurious emissions conducted measurements



- a) Connect a signal generator to the input of the EUT.
- b) Set the signal generator to produce the broadband test signal as previously described.
- c) Set the center frequency of the test signal to the lowest available channel within the frequency band or block.
- d) Set the EUT input power to a level that is just below the AGC threshold, but not more than 0.5 dB below.
- e) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation as necessary.
- f) Set the RBW = reference bandwidth in the applicable rule section for the supported frequency band of operation.
- g) Set the VBW  $\geq 3 \times$  RBW.
- h) Set the Sweep time = auto-couple.
- i) Set the spectrum analyzer start frequency to the lowest RF signal generated in the equipment, without going below 9 kHz, and the stop frequency to the lower band/block edge frequency minus 100 kHz or 1 MHz, as specified in the applicable rule part.  
The number of measurement points in each sweep must be  $\geq (2 \times \text{span}/\text{RBW})$ , which may require that the measurement range defined by the start and stop frequencies be subdivided, depending on the available number of measurement points provided by the spectrum analyzer.
- j) Select the power averaging (rms) detector function.
- k) Trace average at least 10 traces in power averaging (rms) mode.
- l) Use the peak marker function to identify the highest amplitude level over each measured frequency range.  
Record the frequency and amplitude and capture a plot for inclusion in the test report.
- m) Reset the spectrum analyzer start frequency to the upper band/block edge frequency plus 100 kHz or 1 MHz, as specified in the applicable rule part, and the spectrum analyzer stop frequency to 10 times the highest frequency of the fundamental emission. The number of measurement points in each sweep must be  $\geq (2 \times \text{span}/\text{RBW})$ , which may require that the measurement range defined by the start and stop frequencies be subdivided, depending on the available number of measurement points provided by the spectrum analyzer.
- n) Trace average at least 10 traces in power averaging (rms) mode.
- o) Use the peak marker function to identify the highest amplitude level over each of the measured frequency

ranges. Record the frequency and amplitude and capture a plot for inclusion in the test report; also provide tabular data, if required.


- p) Repeat steps i) to o) with the input test signals firstly tuned to a middle band/block frequency/channel, and then tuned to a high band/block frequency/channel.
- q) Repeat steps b) to p) with the narrowband test signal.
- r) Repeat steps b) to q) for all authorized frequency bands/blocks used by the EUT.

***Note: In 9 kHz-150 kHz and 150 kHz-30 MHz bands, RBW was reduced to 0.1 % and 1 % of the reference bandwidth for measuring unwanted emission level (typically, 1 MHz if the authorized frequency band is above 1 GHz) and power was integrated.(1% = +30 dB, 10% = +20 dB)***


## Test Results: Plot data of Out-of-band/out-of-block emissions

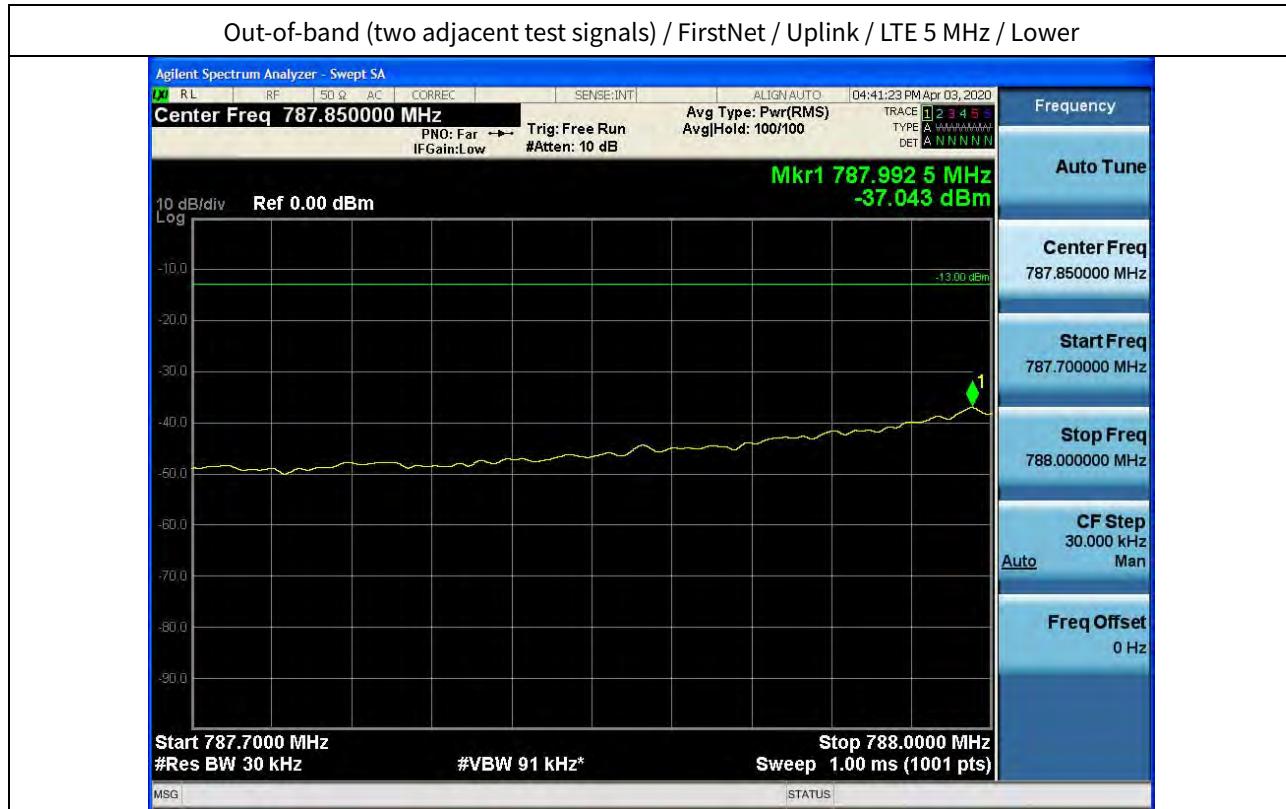
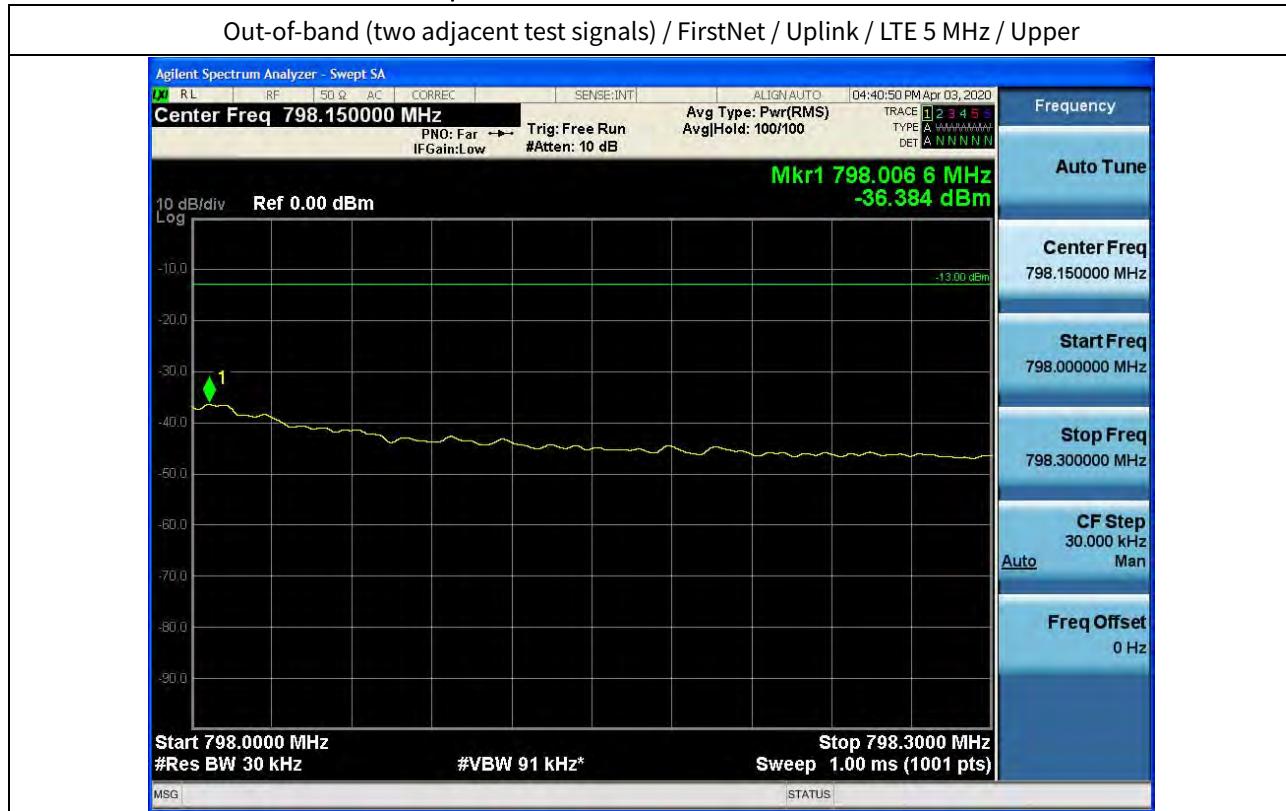


## +3 dB above Out-of-band (two adjacent test signals) / FirstNet / Uplink / LTE 5 MHz / Upper

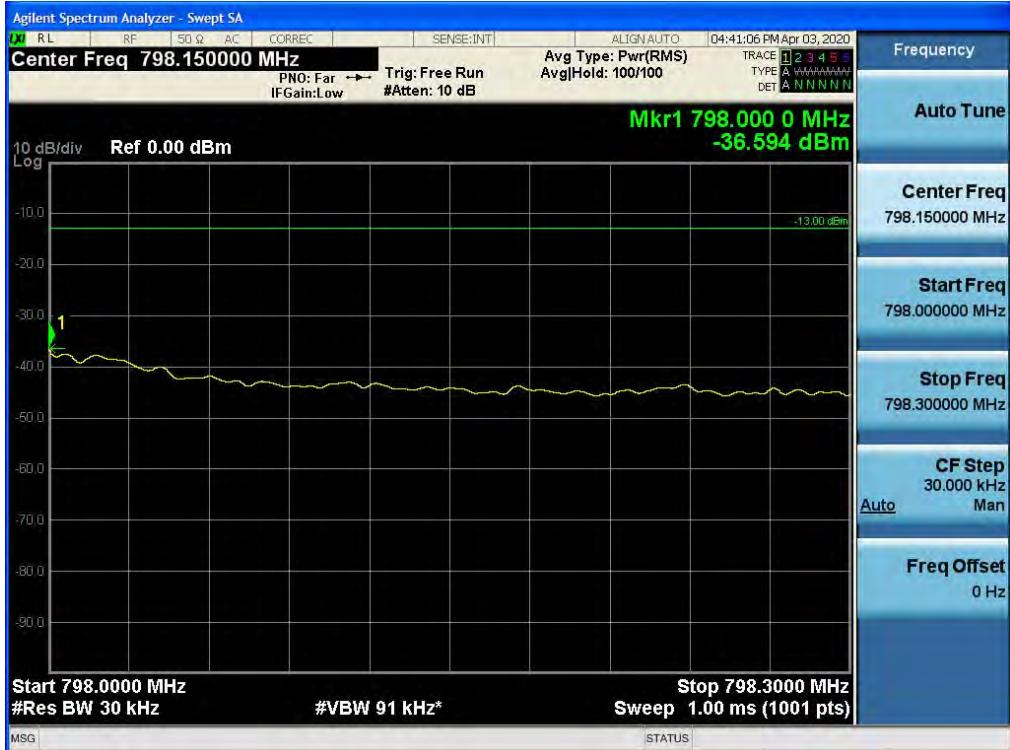

## +3 dB above Out-of-band (two adjacent test signals) / FirstNet / Uplink / LTE 5 MHz / Lower

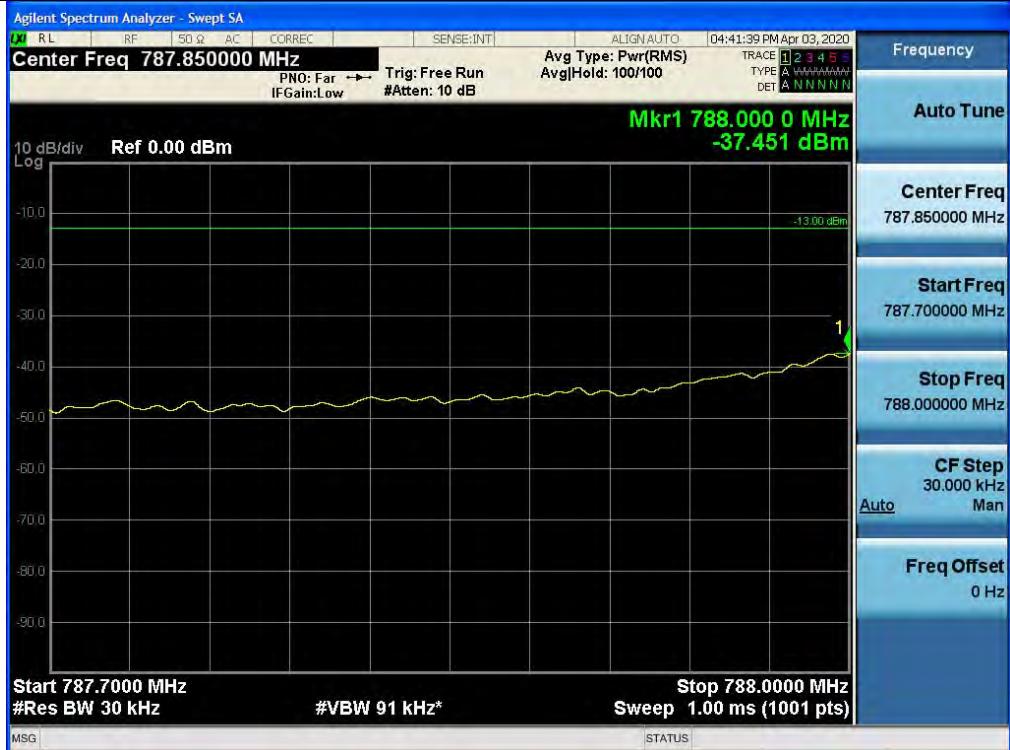

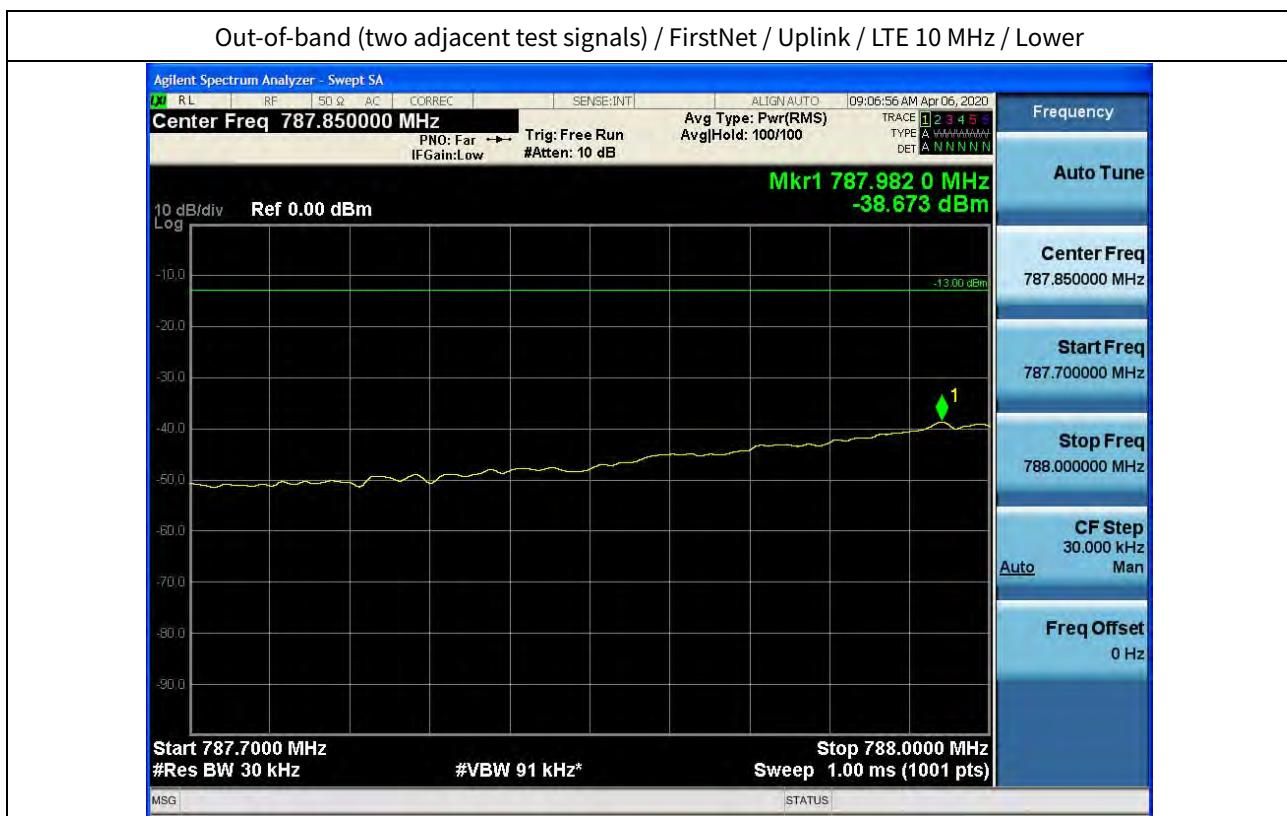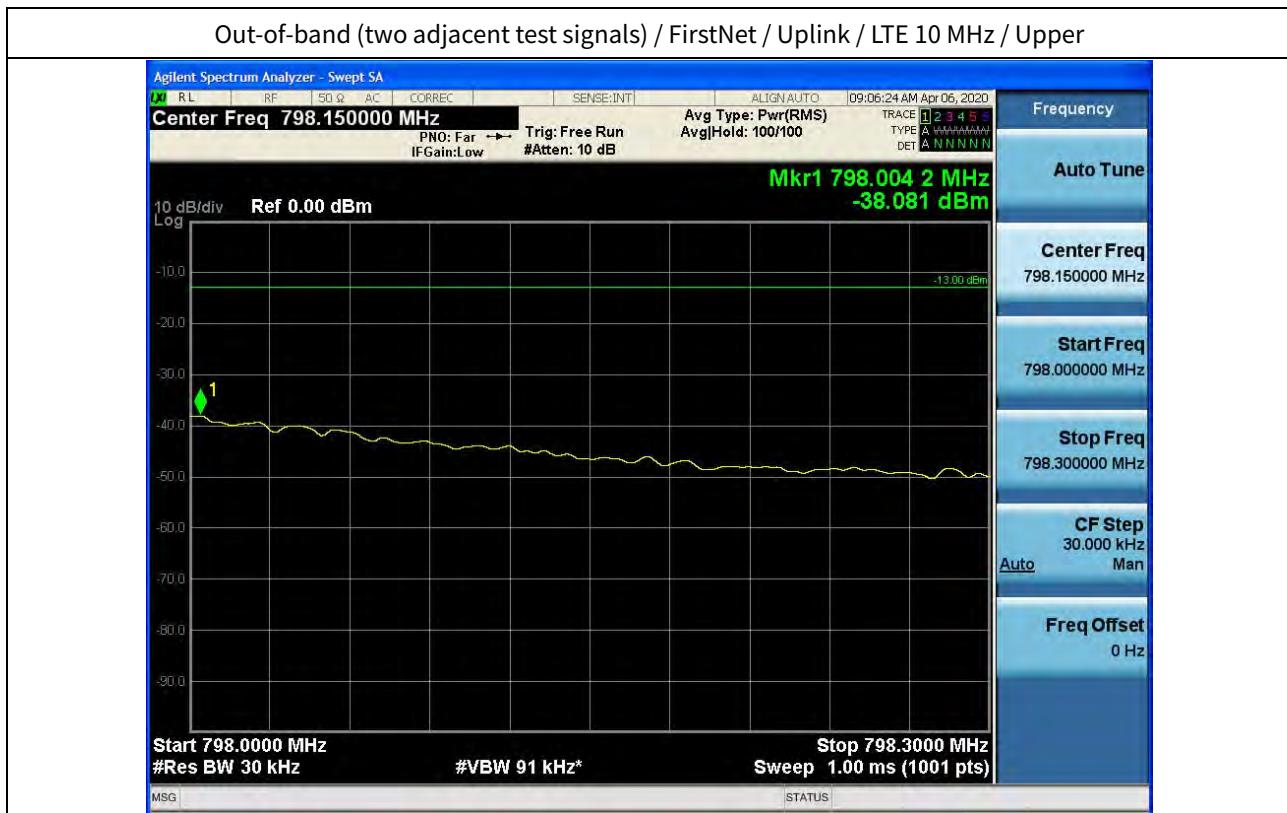

## +3 dB above Out-of-band (two adjacent test signals) / FirstNet / Uplink / LTE 10 MHz / Upper



## +3 dB above Out-of-band (two adjacent test signals) / FirstNet / Uplink / LTE 10 MHz / Lower




## Out-of-band (two adjacent test signals) / FirstNet / Downlink / LTE 5 MHz / Upper



## Out-of-band (two adjacent test signals) / FirstNet / Downlink / LTE 5 MHz / Lower





## +3 dB above Out-of-band (two adjacent test signals) / FirstNet / Downlink / LTE 5 MHz / Upper

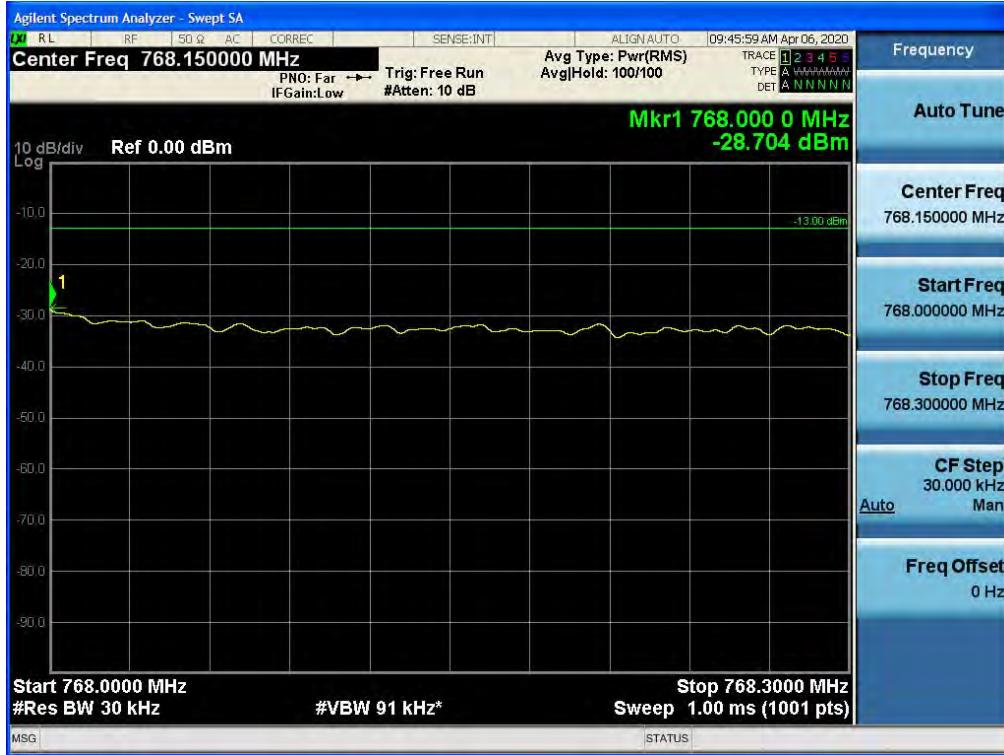

## +3 dB above Out-of-band (two adjacent test signals) / FirstNet / Downlink / LTE 5 MHz / Lower




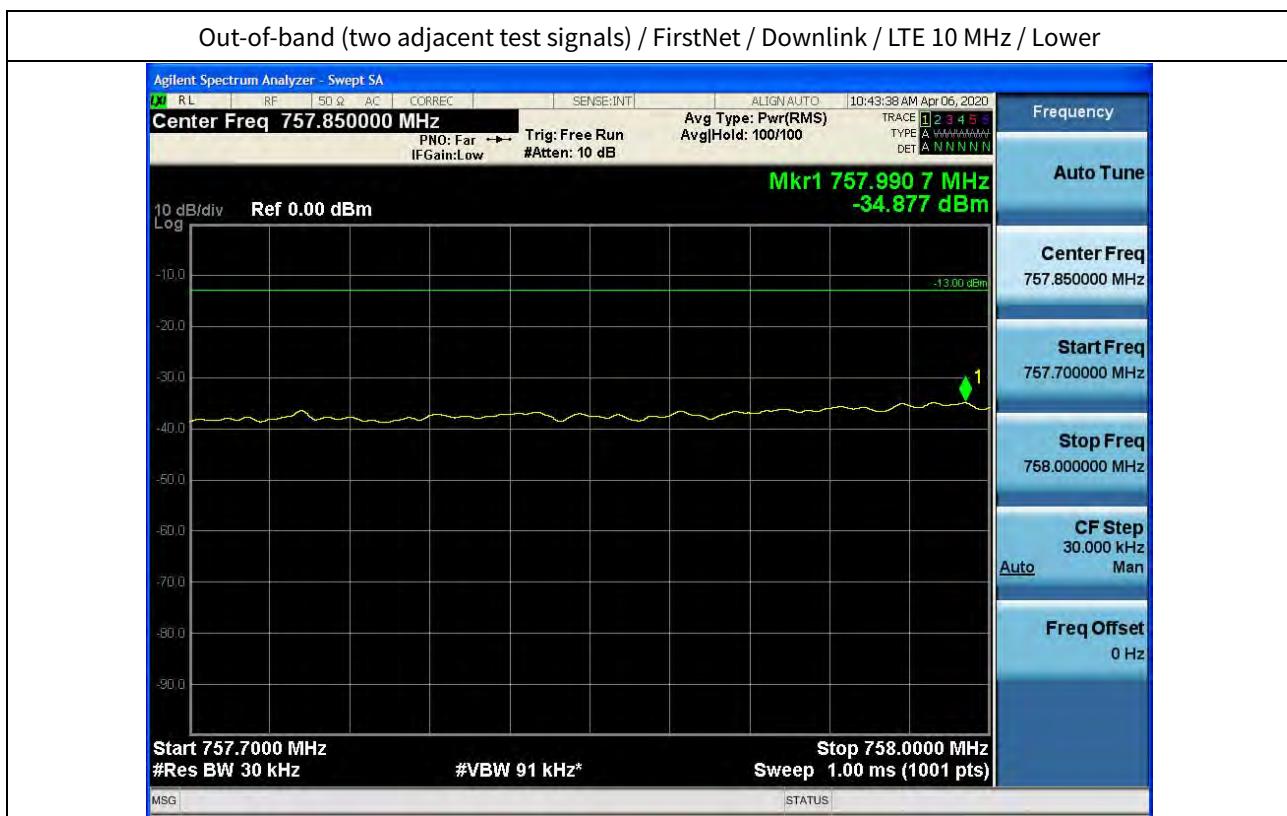
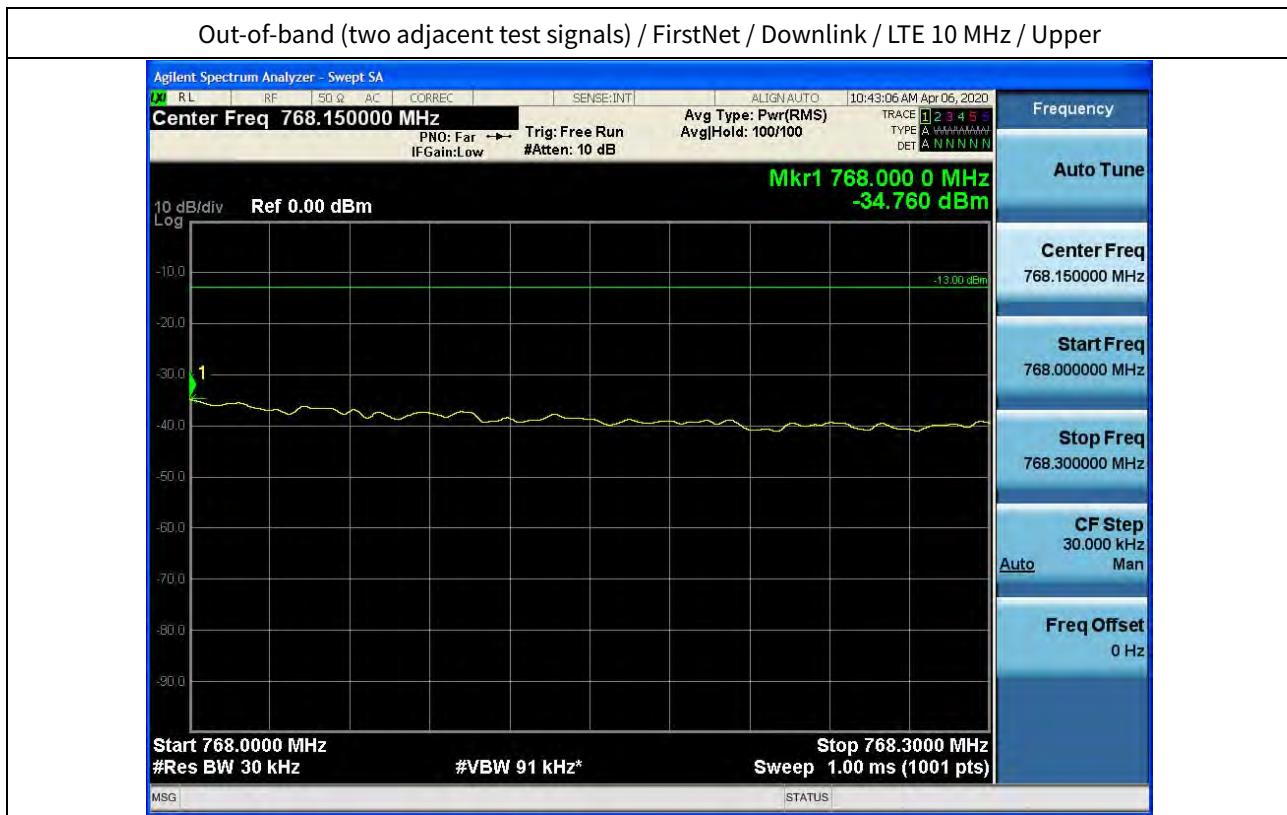


## +3 dB above Out-of-band (two adjacent test signals) / FirstNet / Downlink / LTE 10 MHz / Upper



## +3 dB above Out-of-band (two adjacent test signals) / FirstNet / Downlink / LTE 10 MHz / Lower

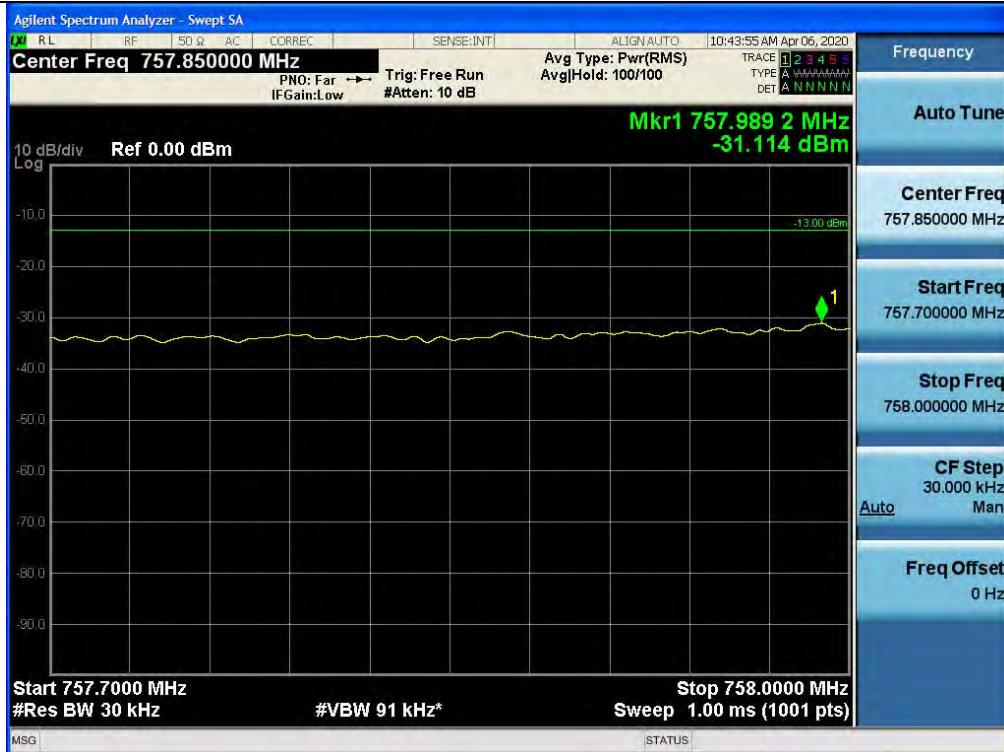

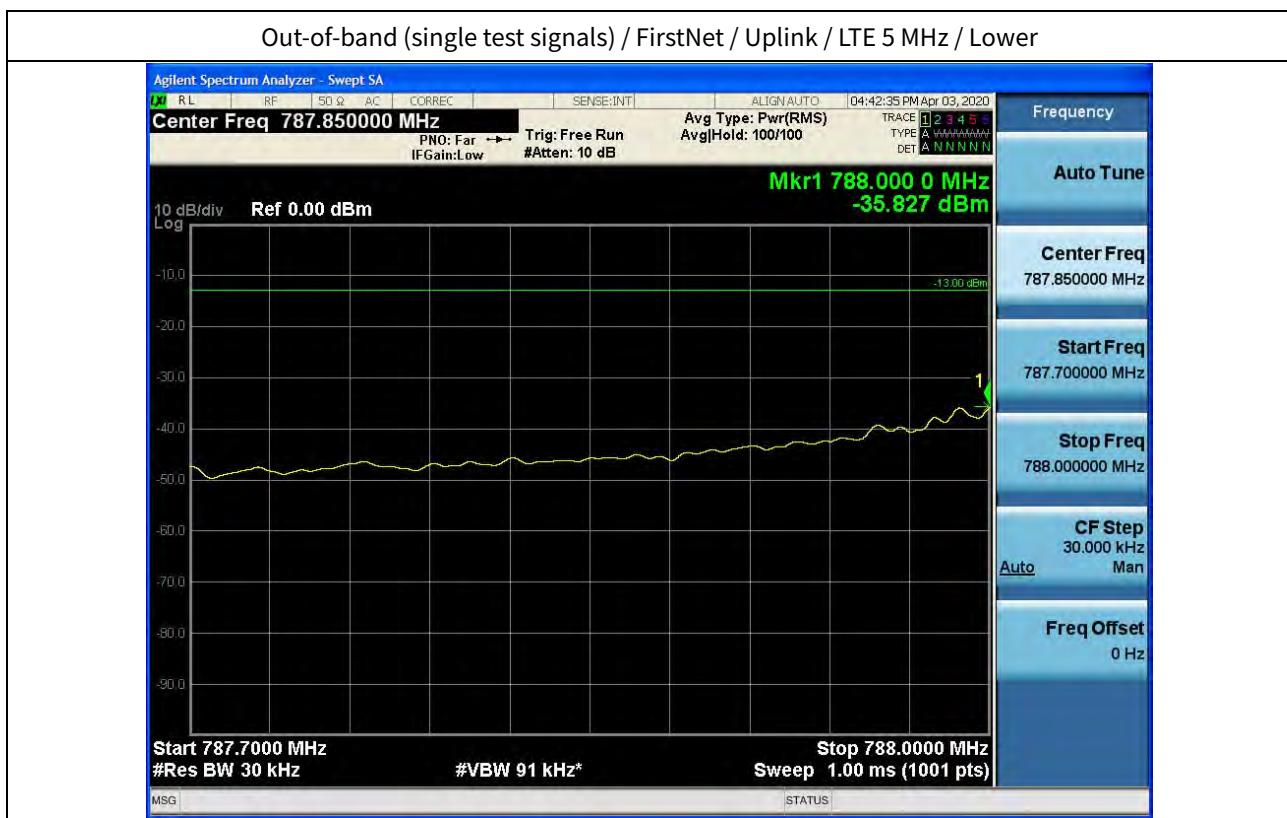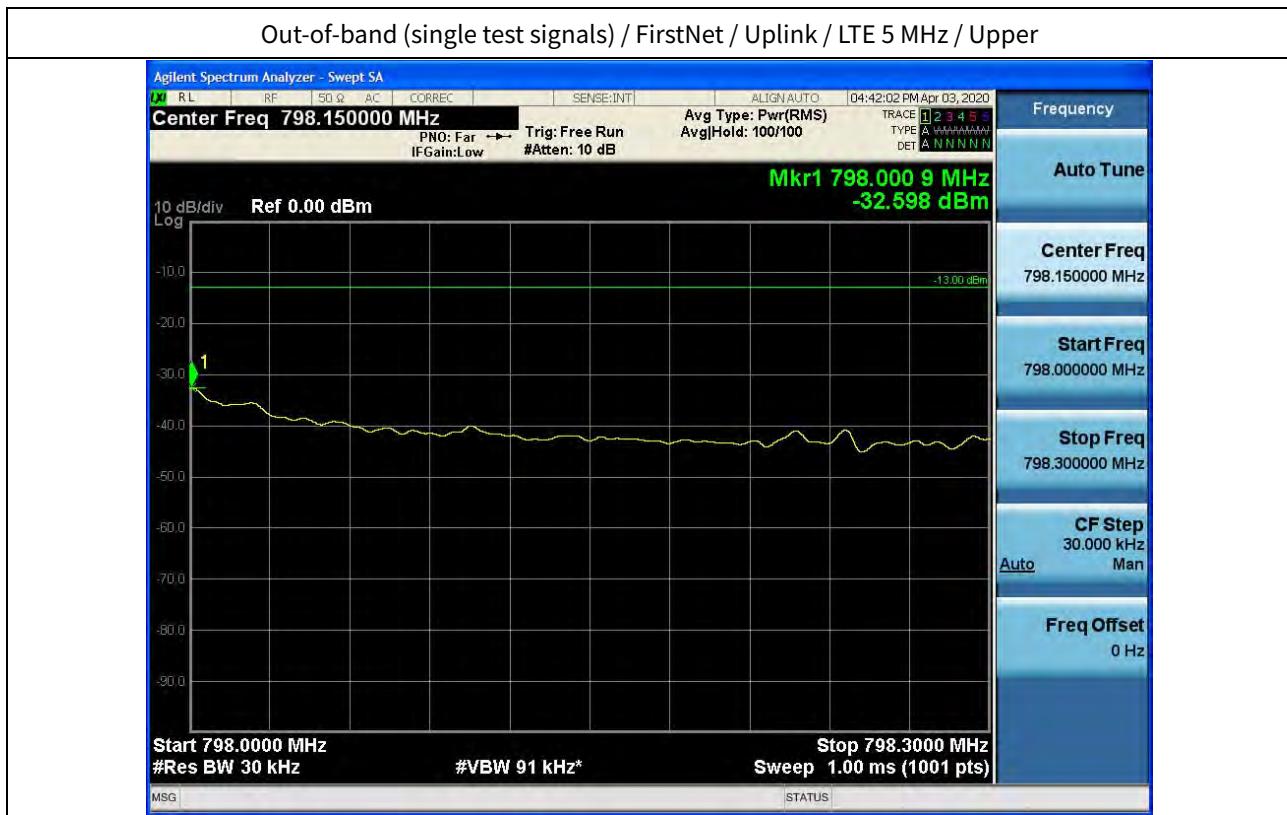

## +3 dB above Out-of-band (single test signals) / FirstNet / Uplink / LTE 5 MHz / Upper



## +3 dB above Out-of-band (single test signals) / FirstNet / Uplink / LTE 5 MHz / Lower



## Out-of-band (single test signals) / FirstNet / Uplink / LTE 10 MHz / Upper



## Out-of-band (single test signals) / FirstNet / Uplink / LTE 10 MHz / Lower





## +3 dB above Out-of-band (single test signals) / FirstNet / Uplink / LTE 10 MHz / Upper



## +3 dB above Out-of-band (single test signals) / FirstNet / Uplink / LTE 10 MHz / Lower




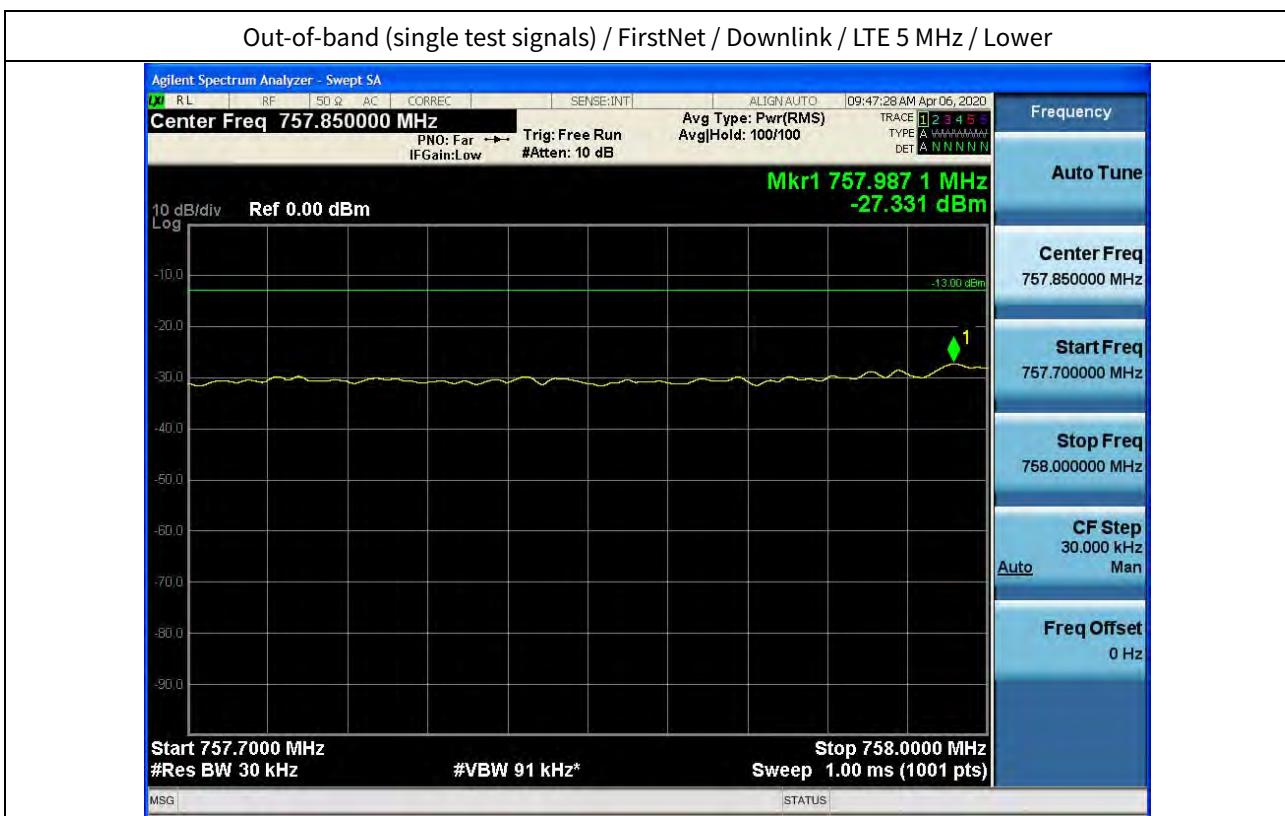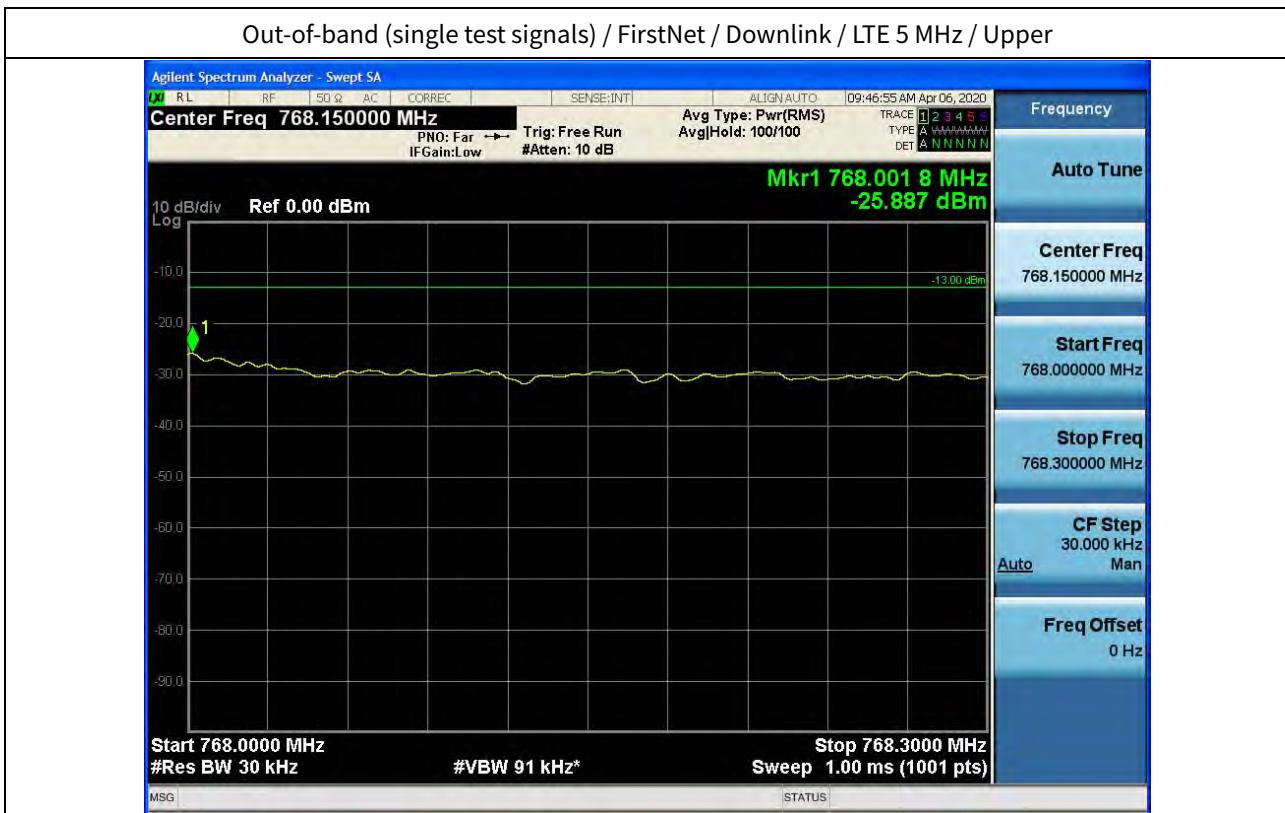

## +3 dB above Out-of-band (single test signals) / FirstNet / Downlink / LTE 5 MHz / Upper




## +3 dB above Out-of-band (single test signals) / FirstNet / Downlink / LTE 5 MHz / Lower

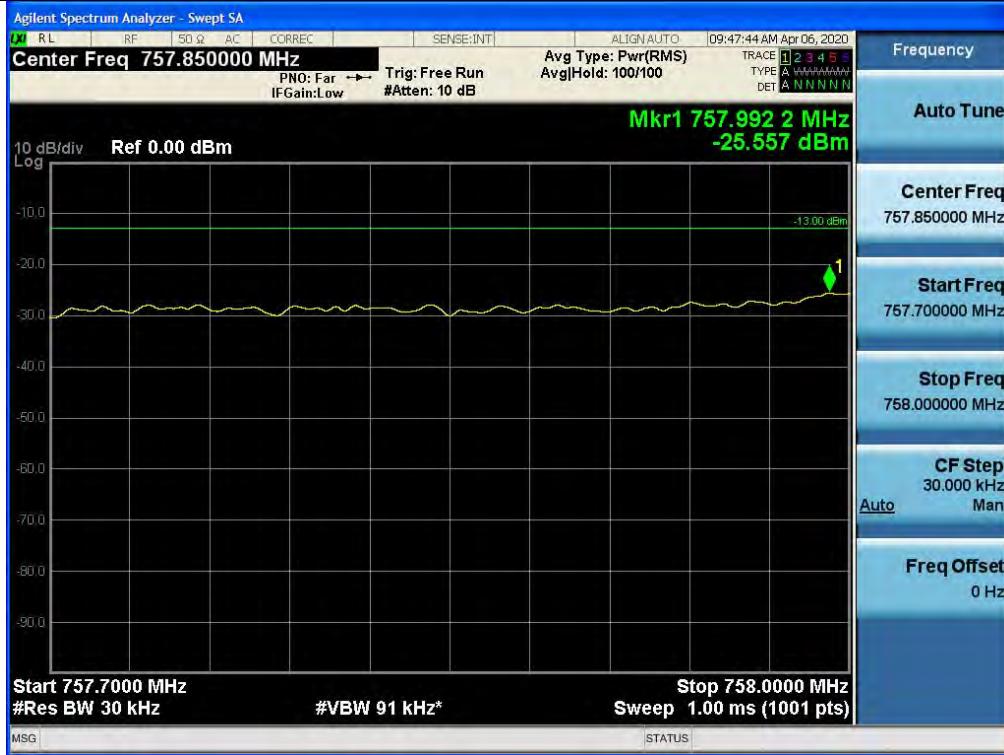

## Out-of-band (single test signals) / FirstNet / Downlink / LTE 10 MHz / Upper




## Out-of-band (single test signals) / FirstNet / Downlink / LTE 10 MHz / Lower

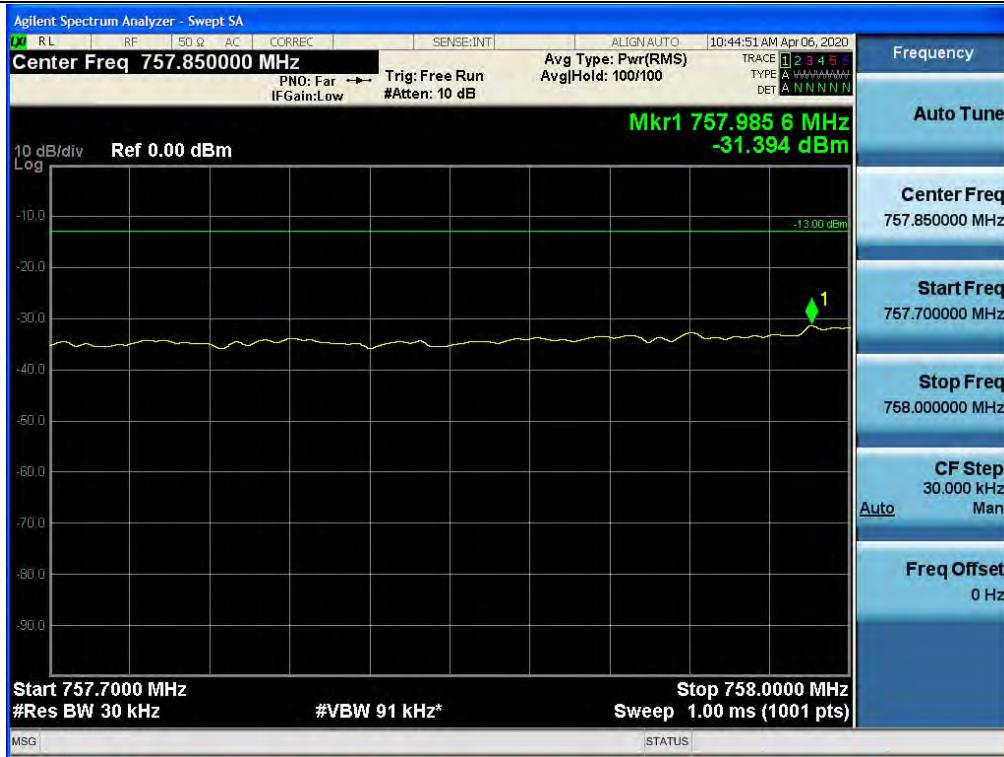



## +3 dB above Out-of-band (single test signals) / FirstNet / Downlink / LTE 10 MHz / Upper




## +3 dB above Out-of-band (single test signals) / FirstNet / Downlink / LTE 10 MHz / Lower

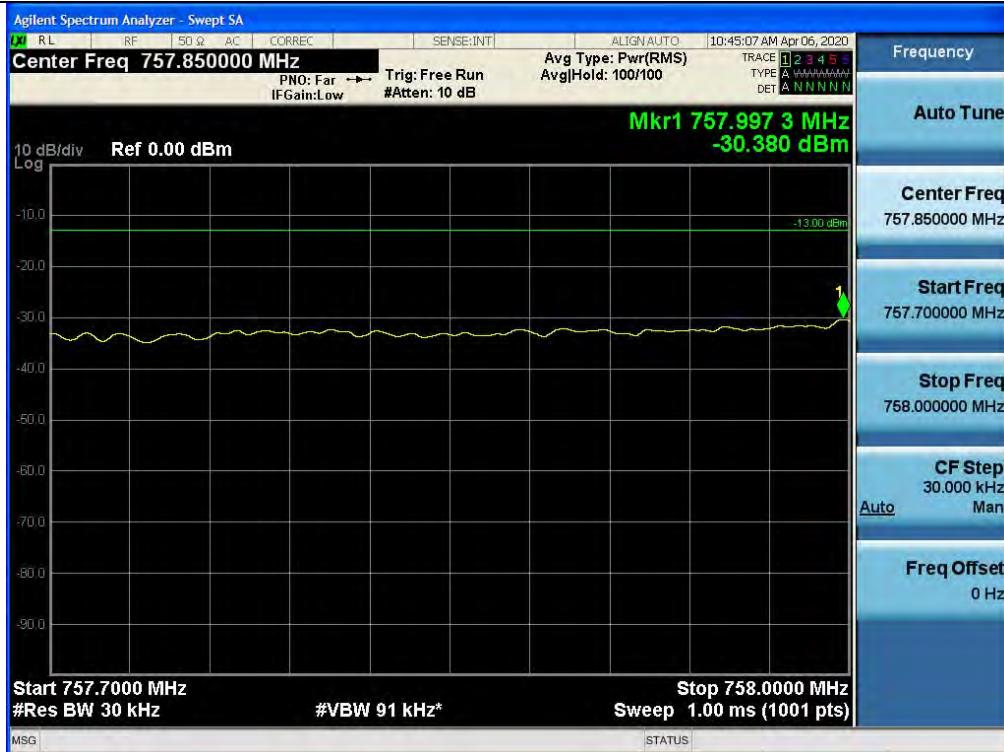


## Plot data of Spurious Emissions

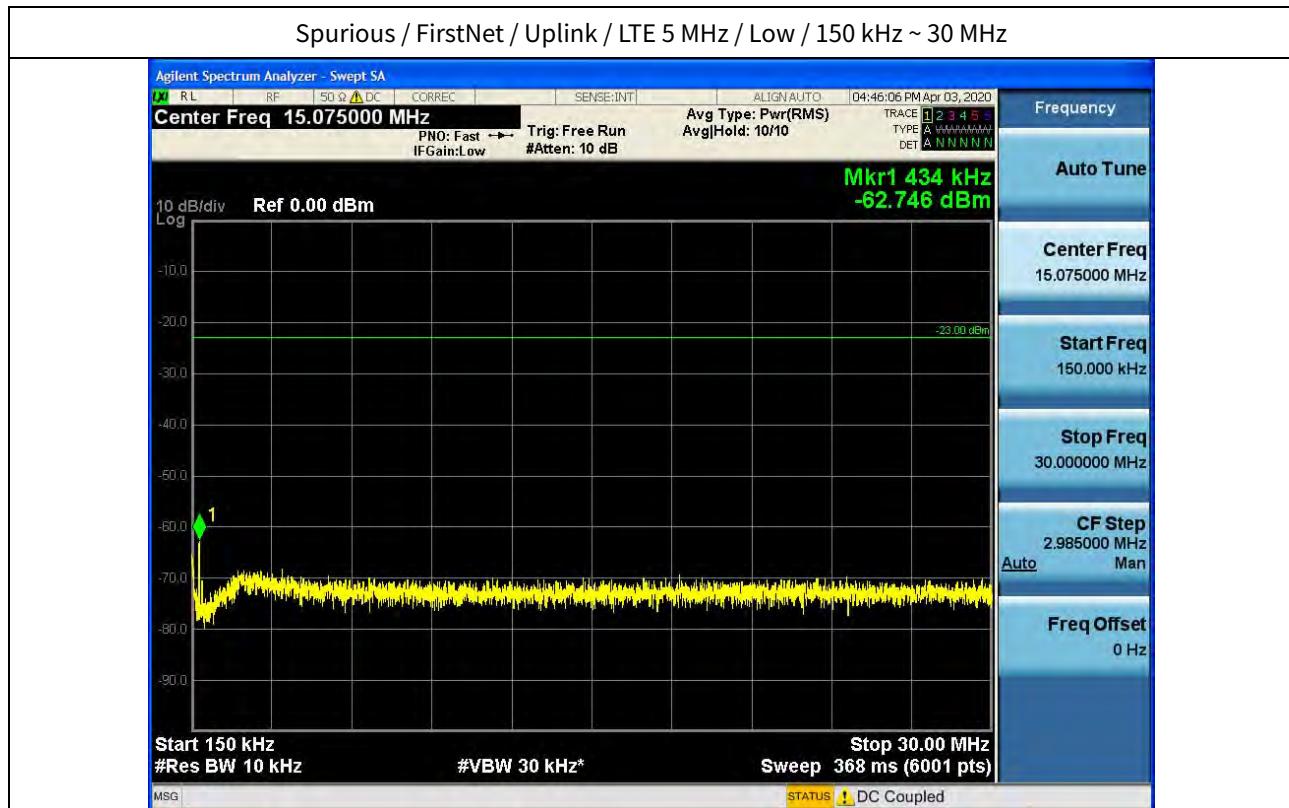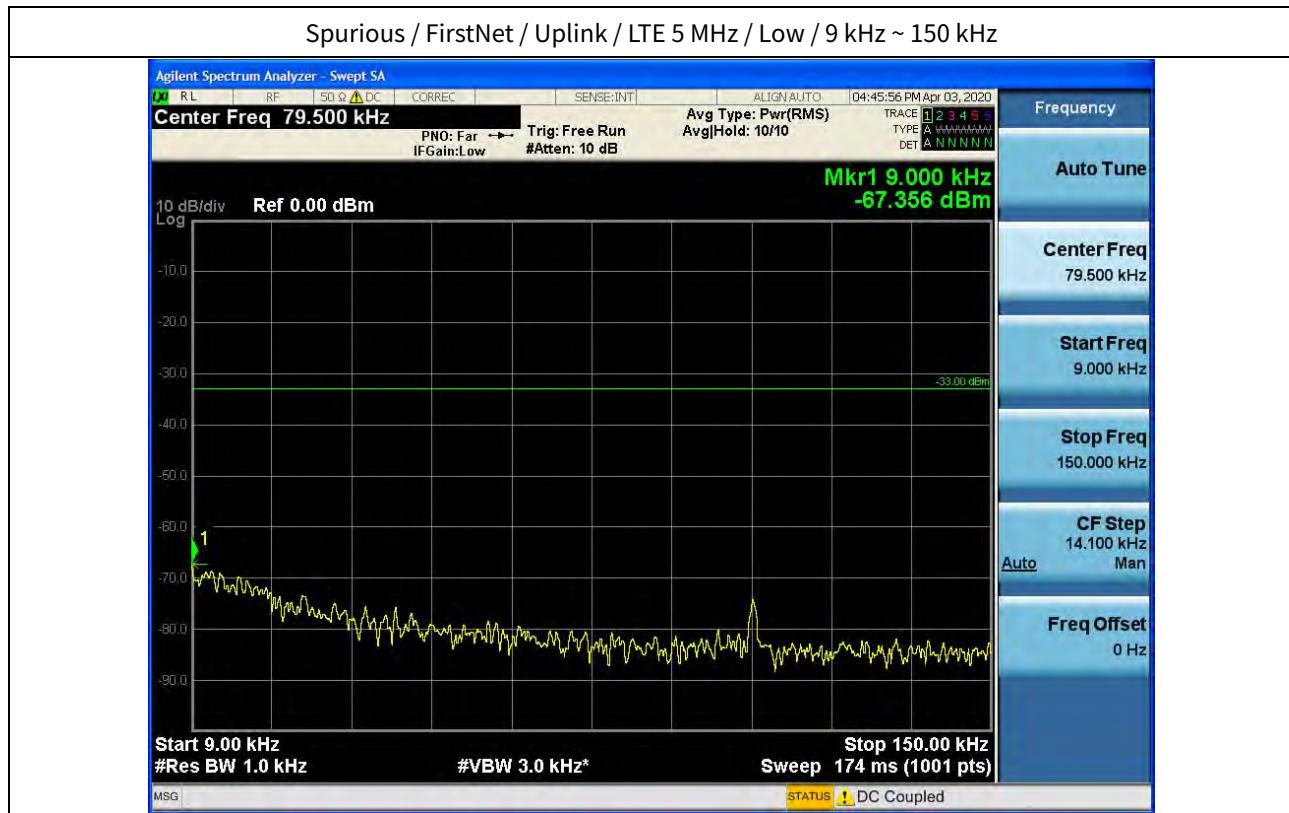


## Spurious / FirstNet / Uplink / LTE 5 MHz / Low / 30 MHz ~ Low Edge-10

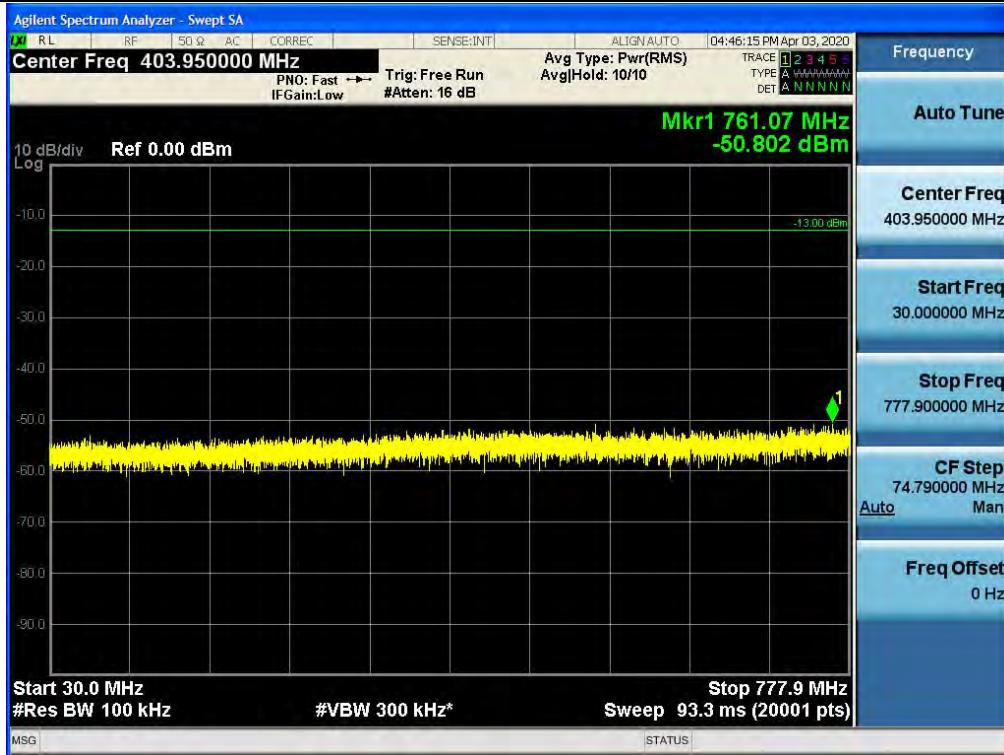


## Spurious / FirstNet / Uplink / LTE 5 MHz / Low / Low Edge-10 ~ Low Edge


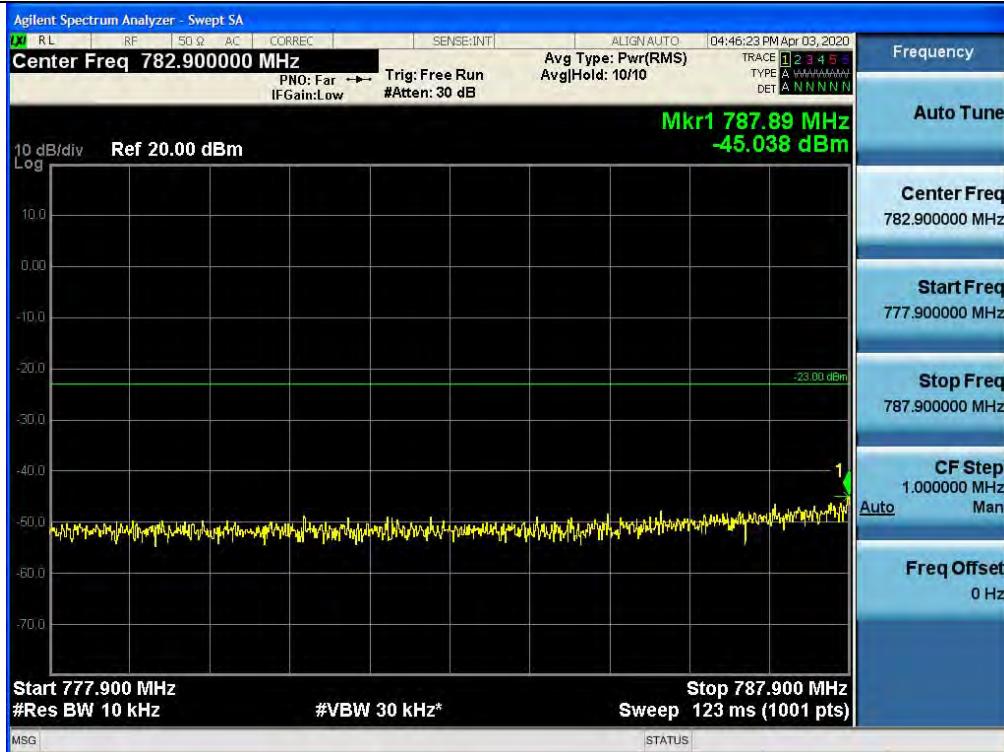




## Spurious / FirstNet / Uplink / LTE 5 MHz / Low / High Edge ~ High Edge+10

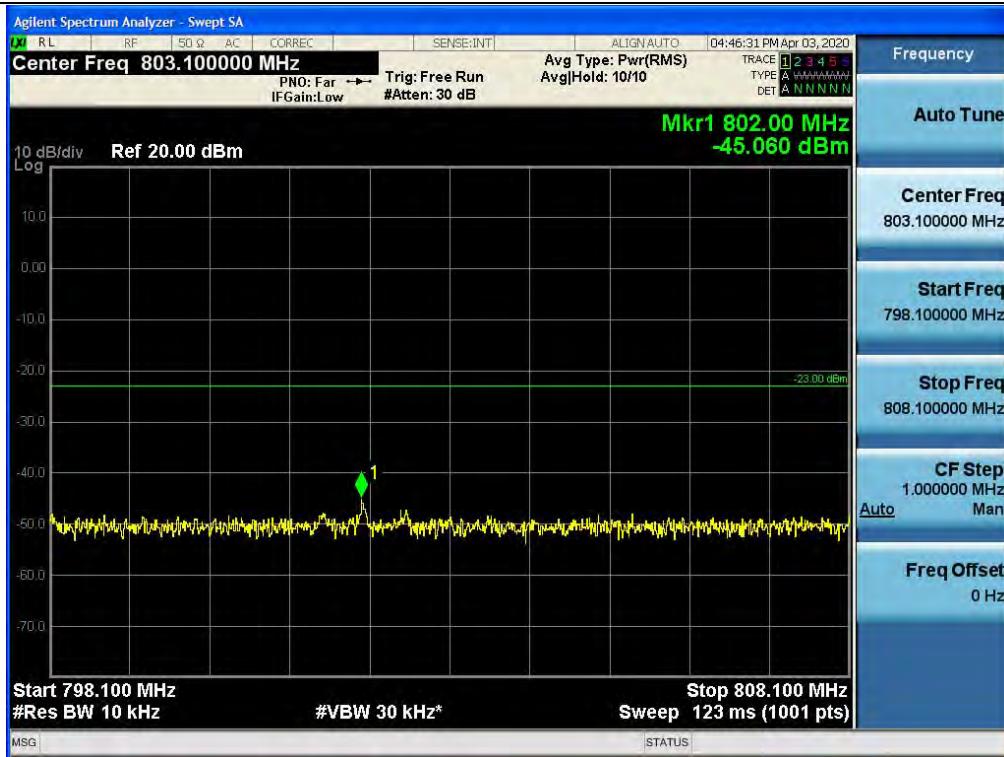




## Spurious / FirstNet / Uplink / LTE 5 MHz / Low / High Edge+10 ~ 2 GHz


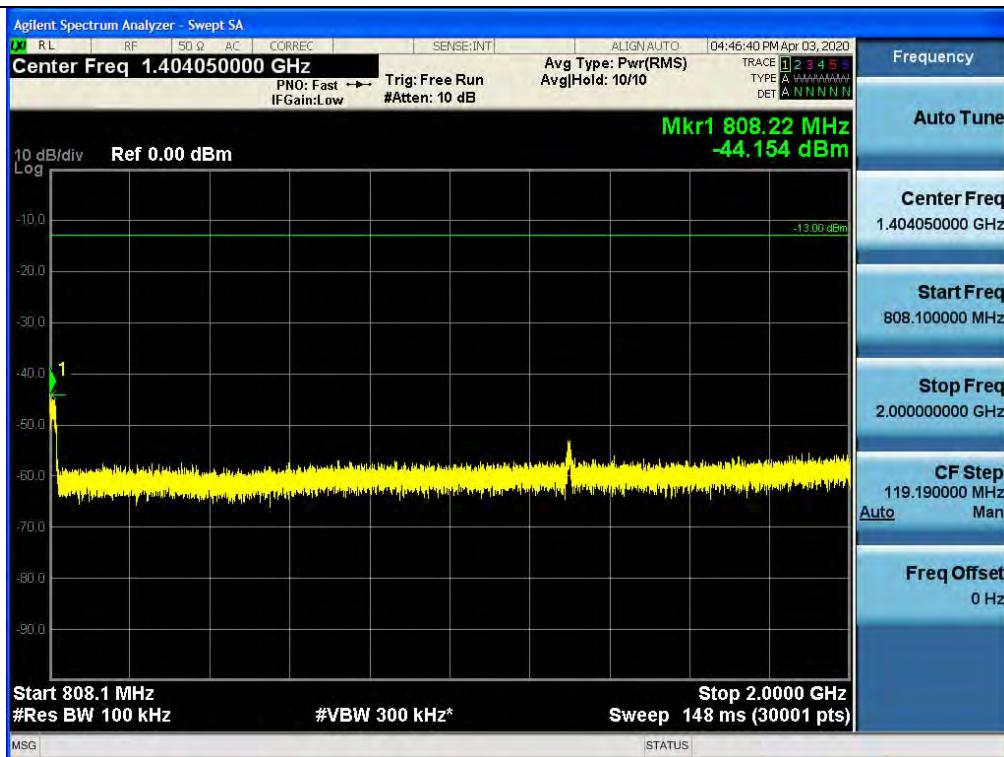


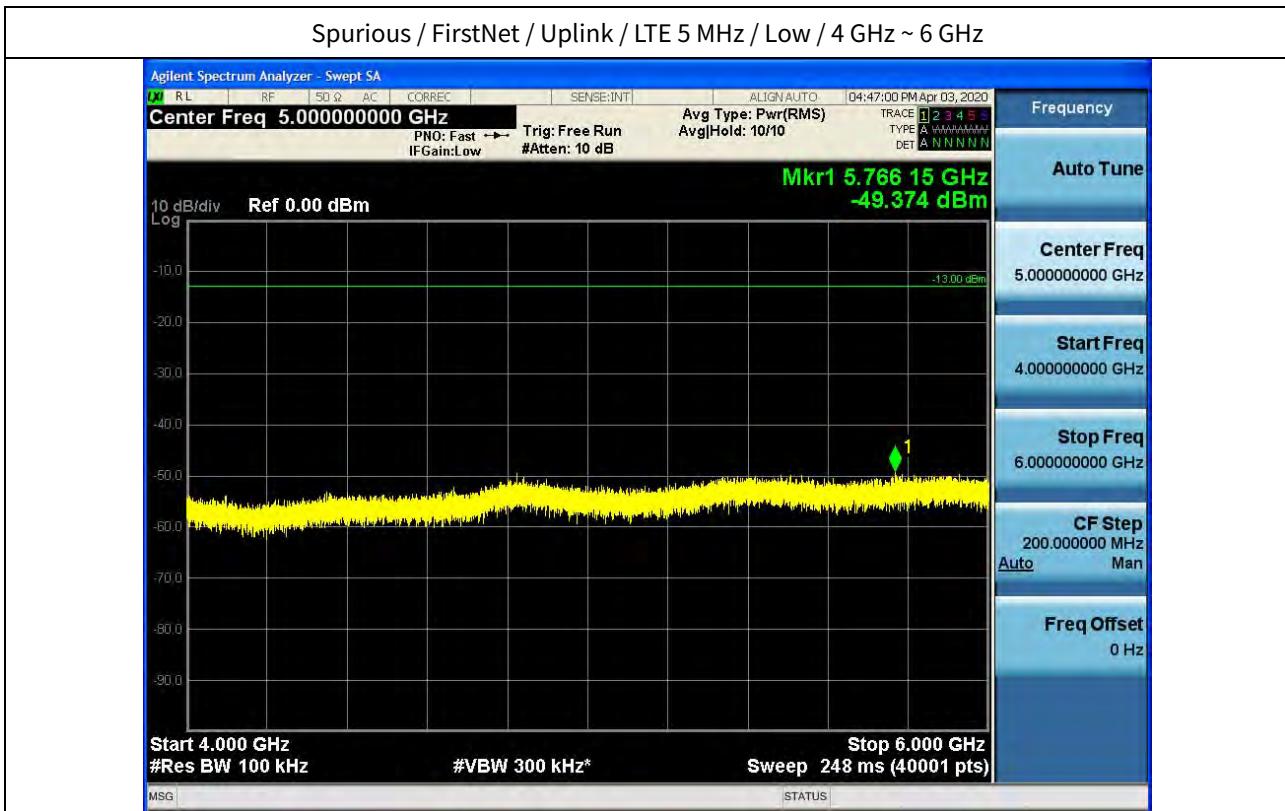
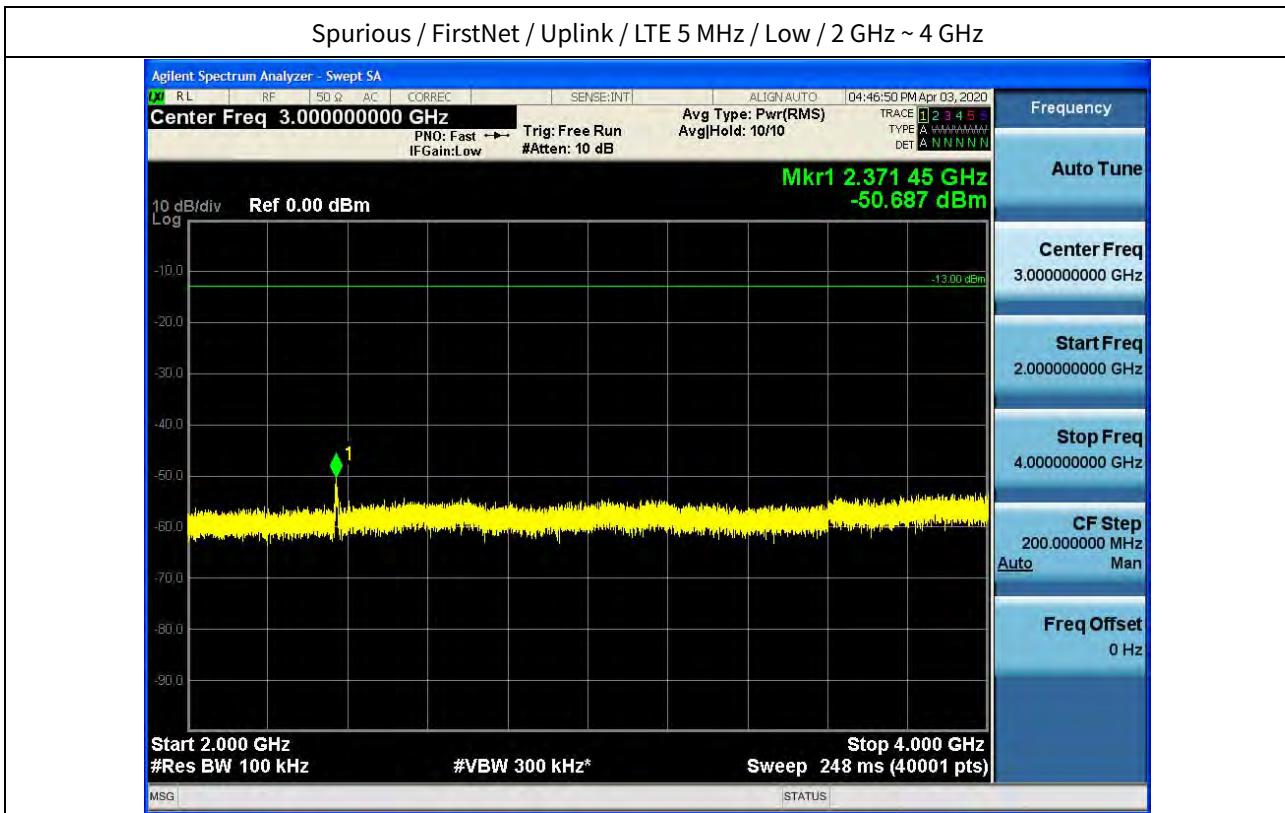


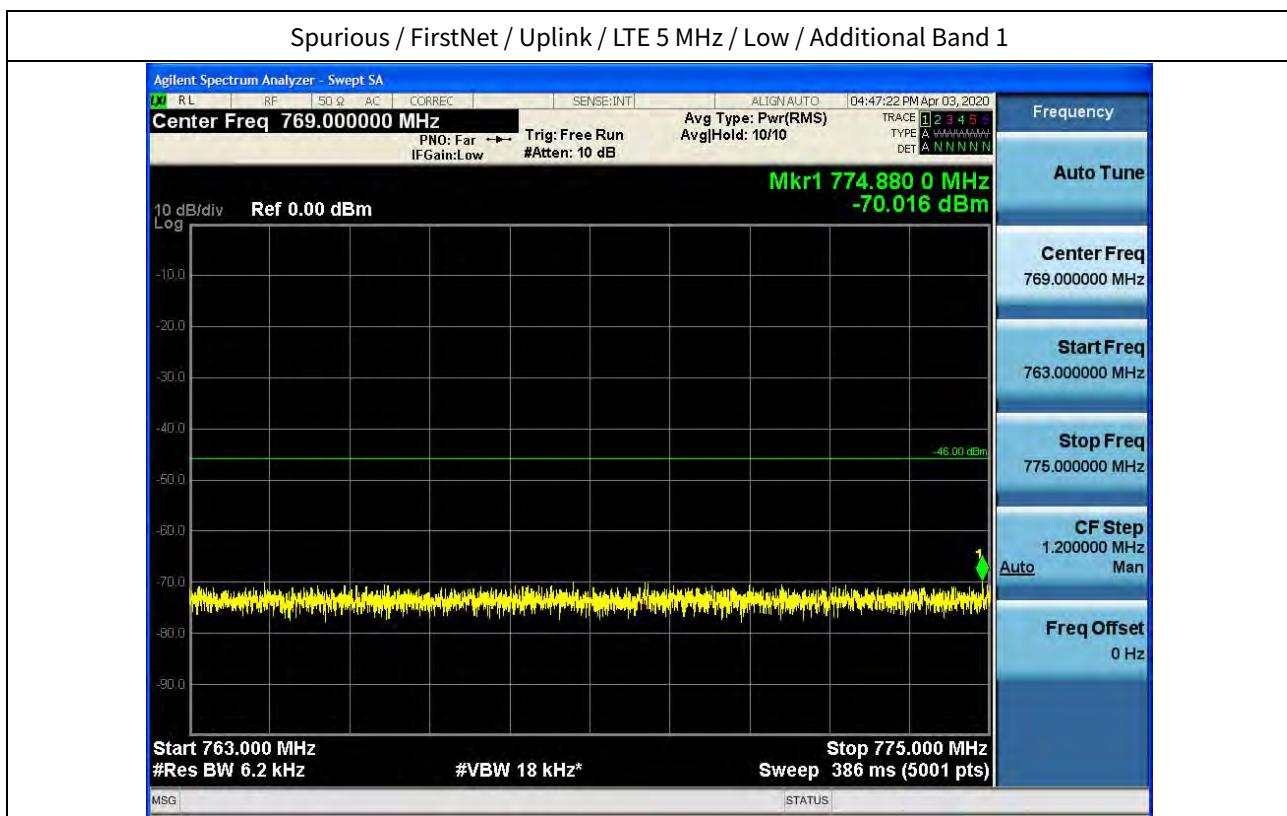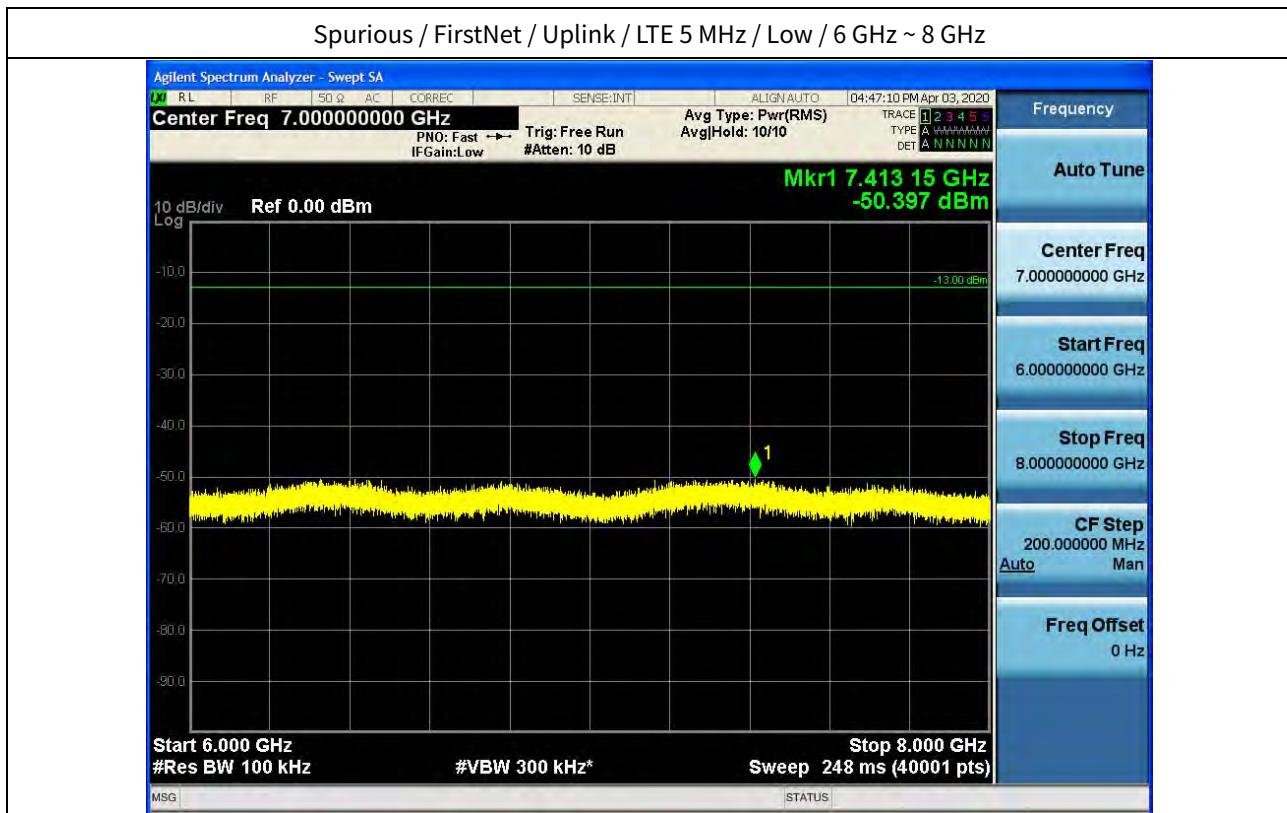

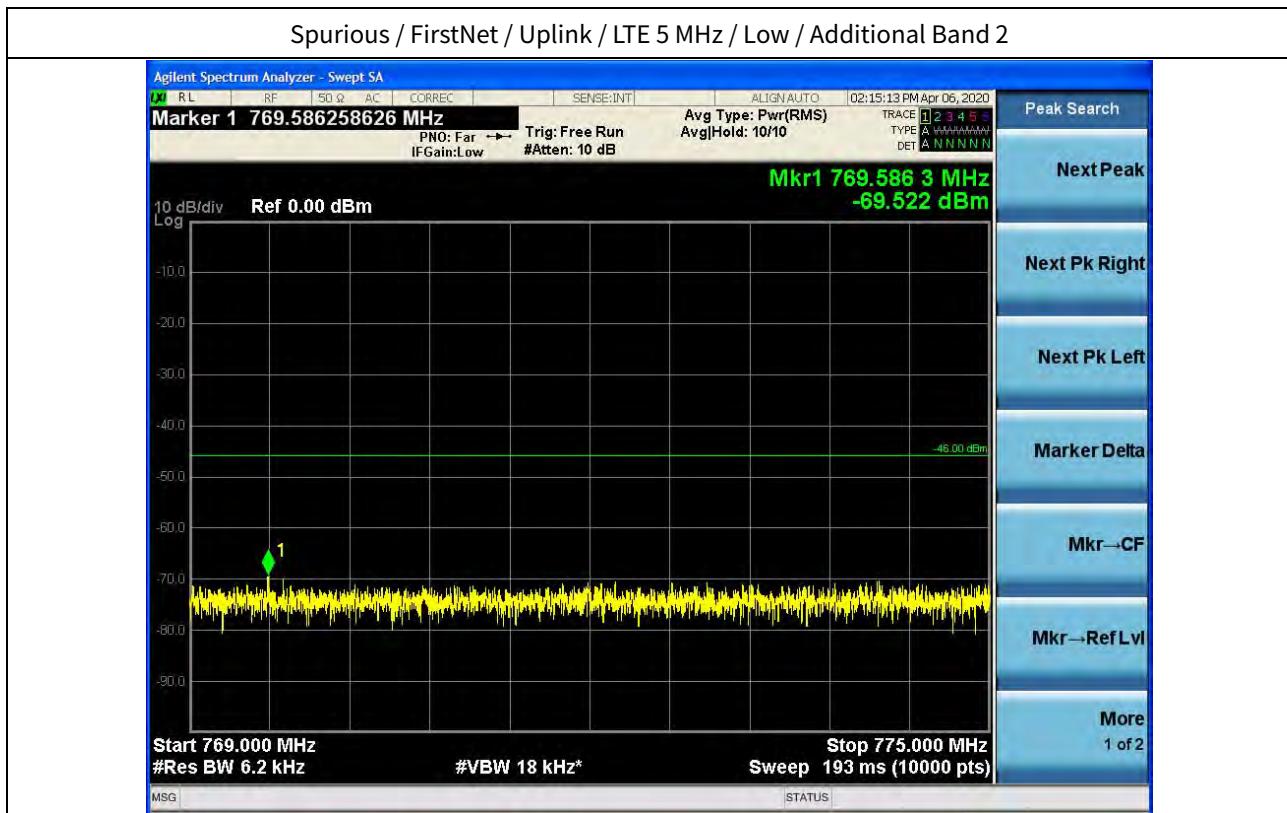


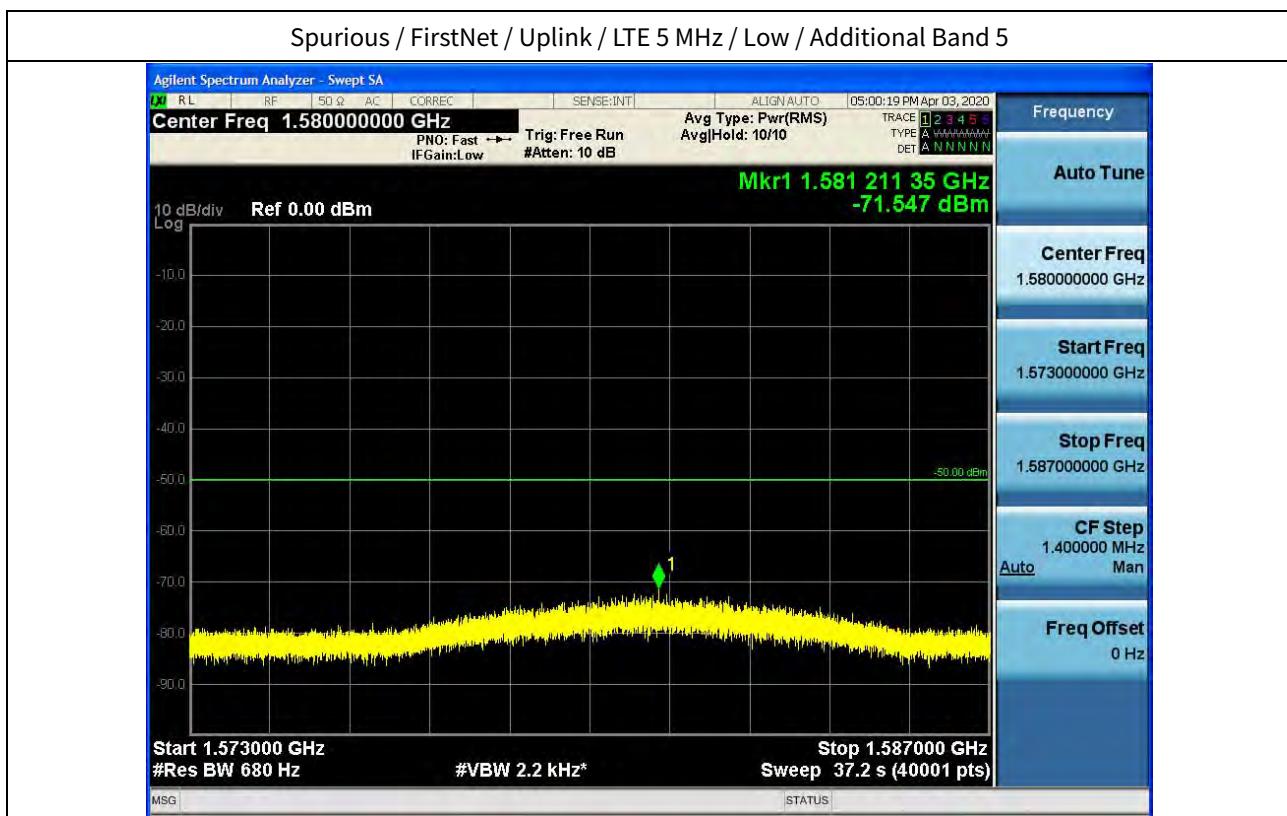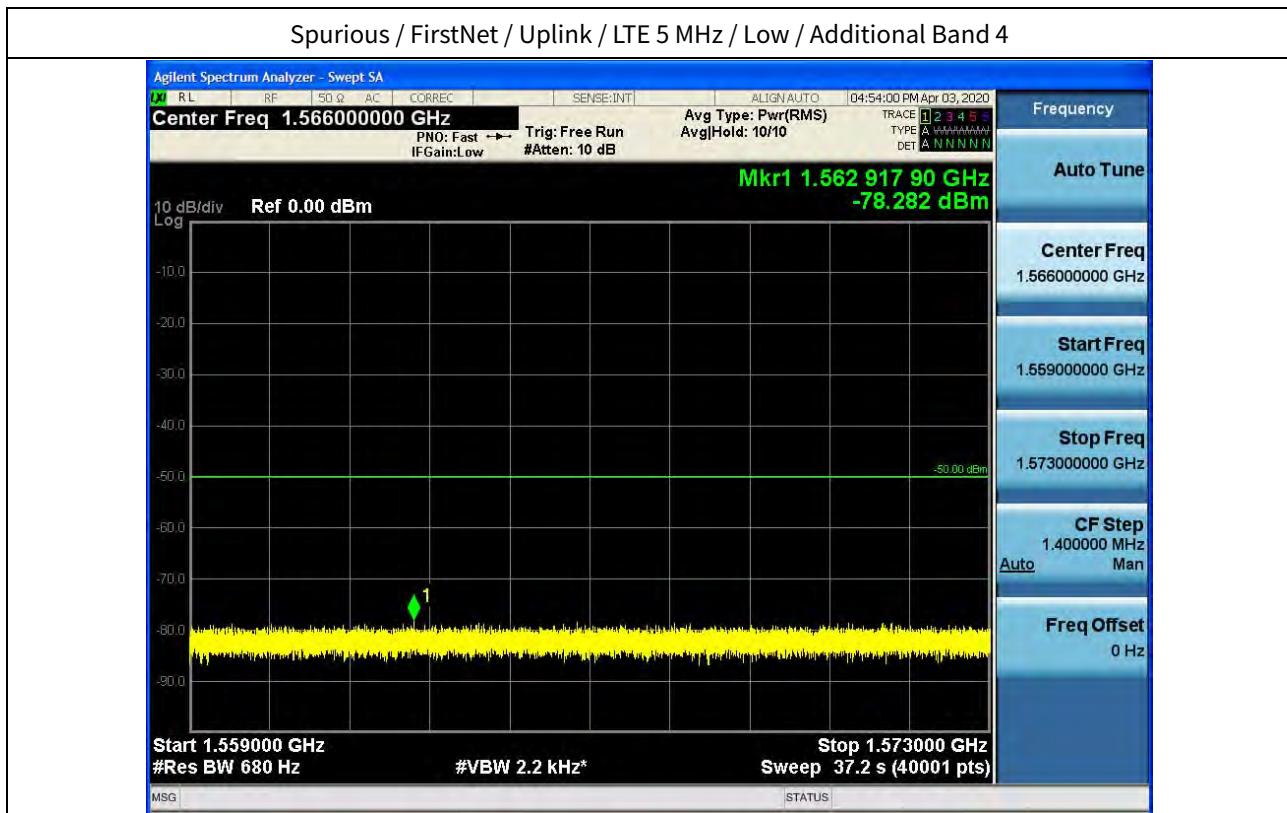

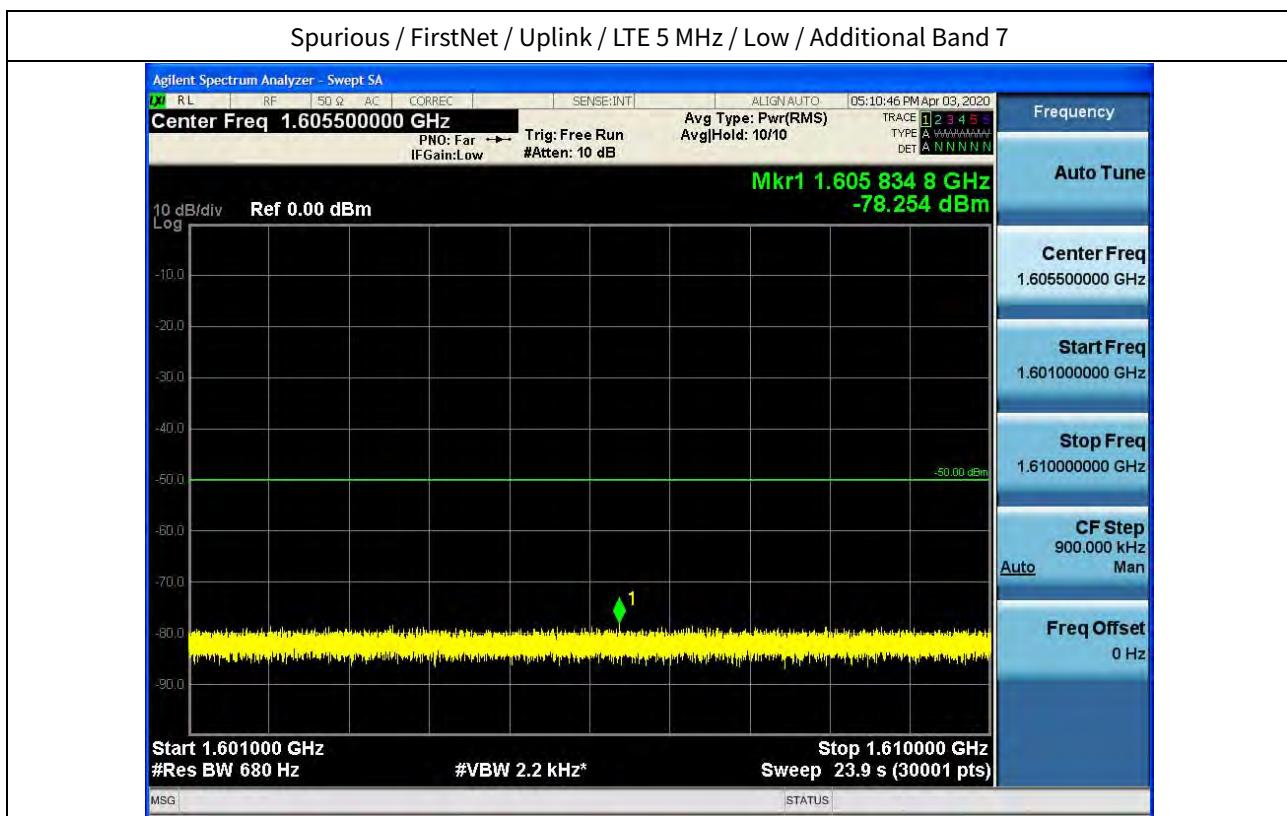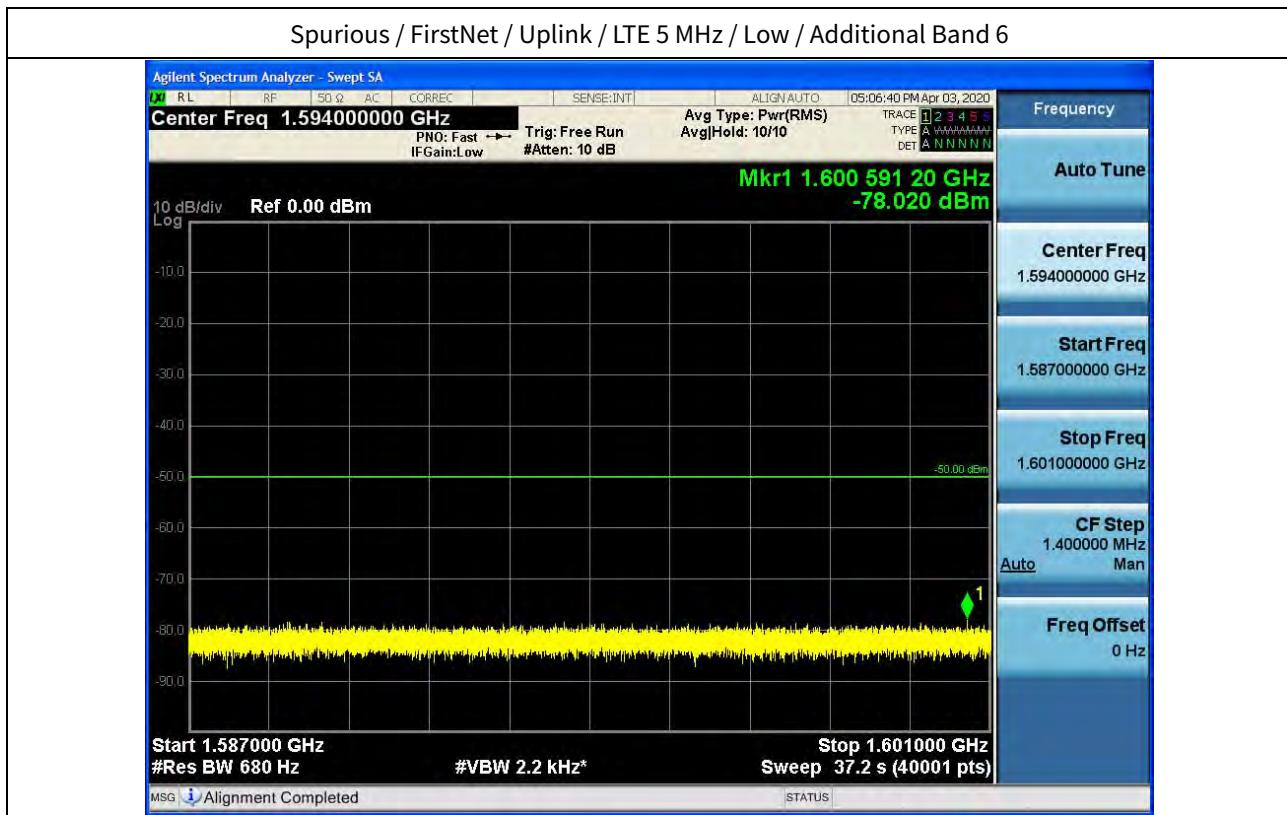


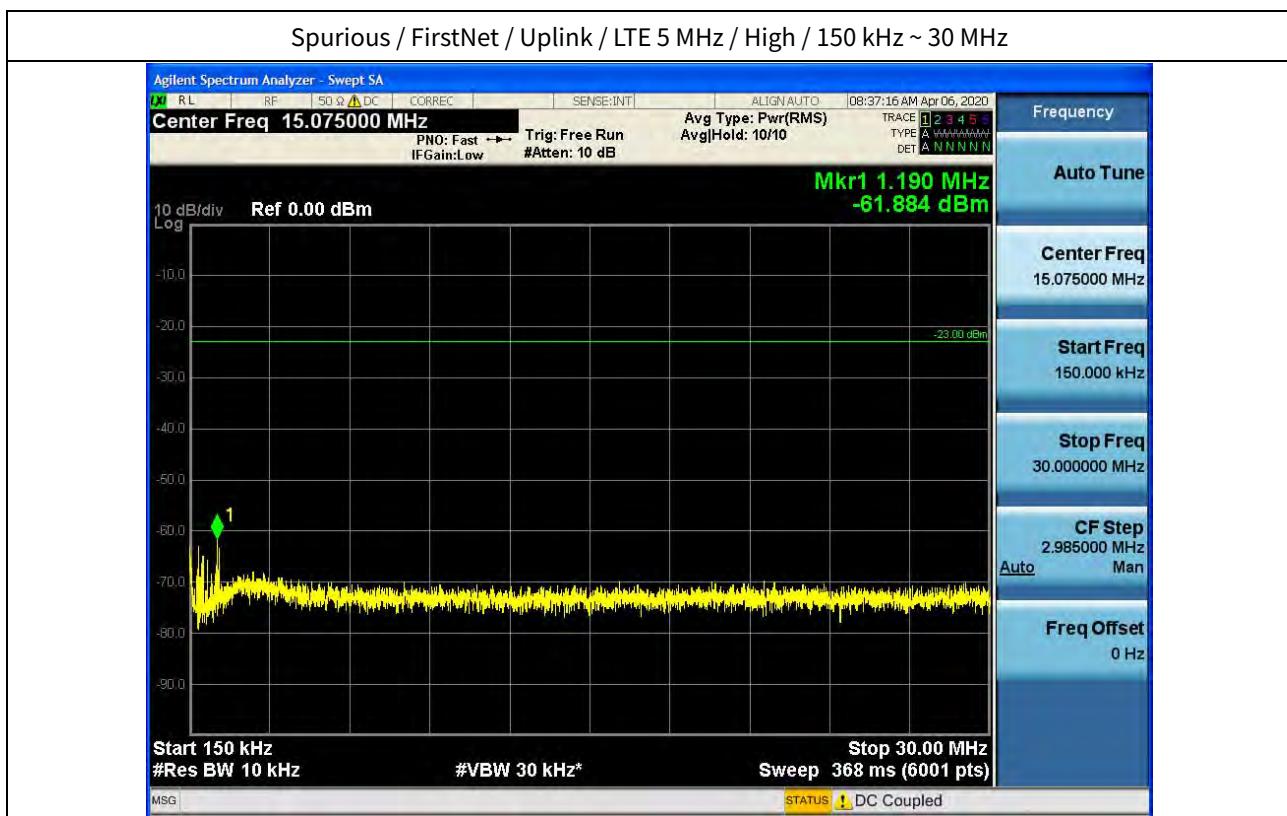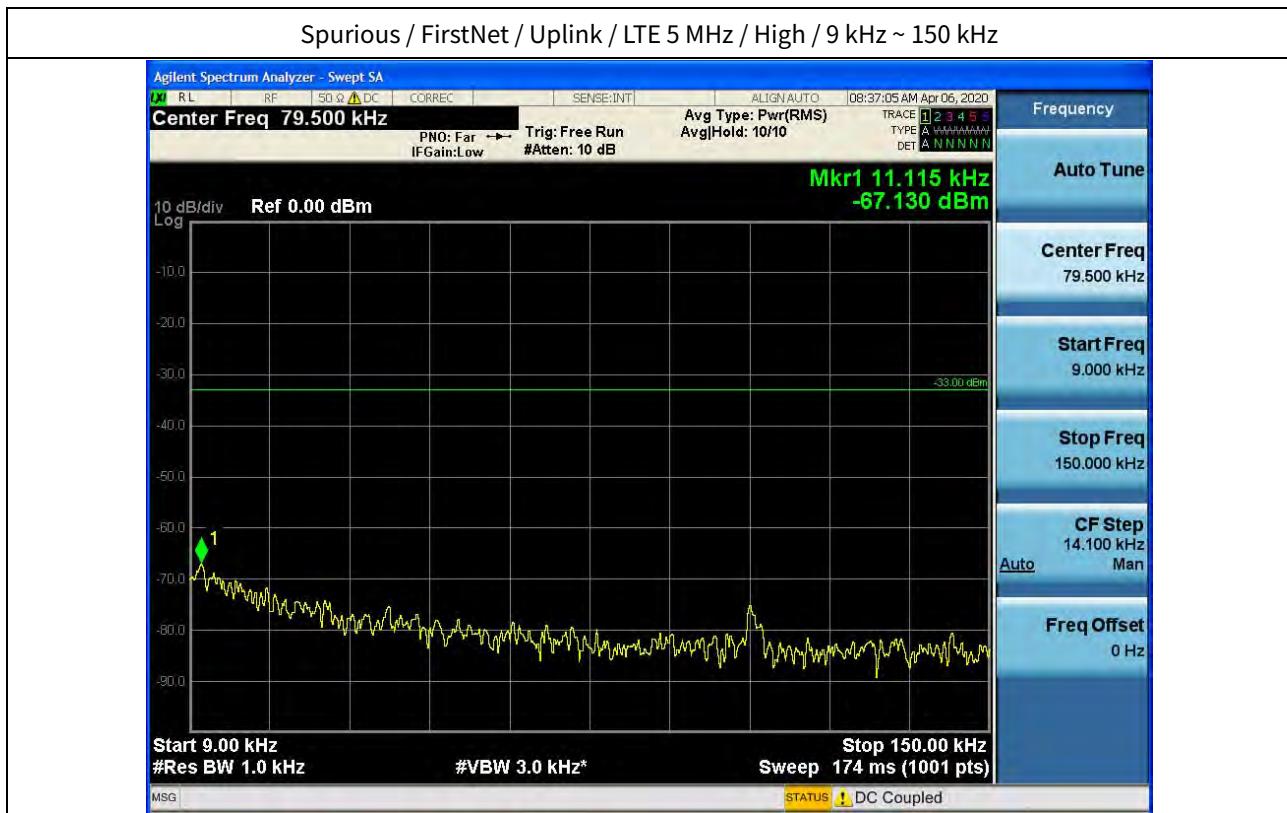

## Spurious / FirstNet / Uplink / LTE 5 MHz / High / 30 MHz ~ Low Edge-10

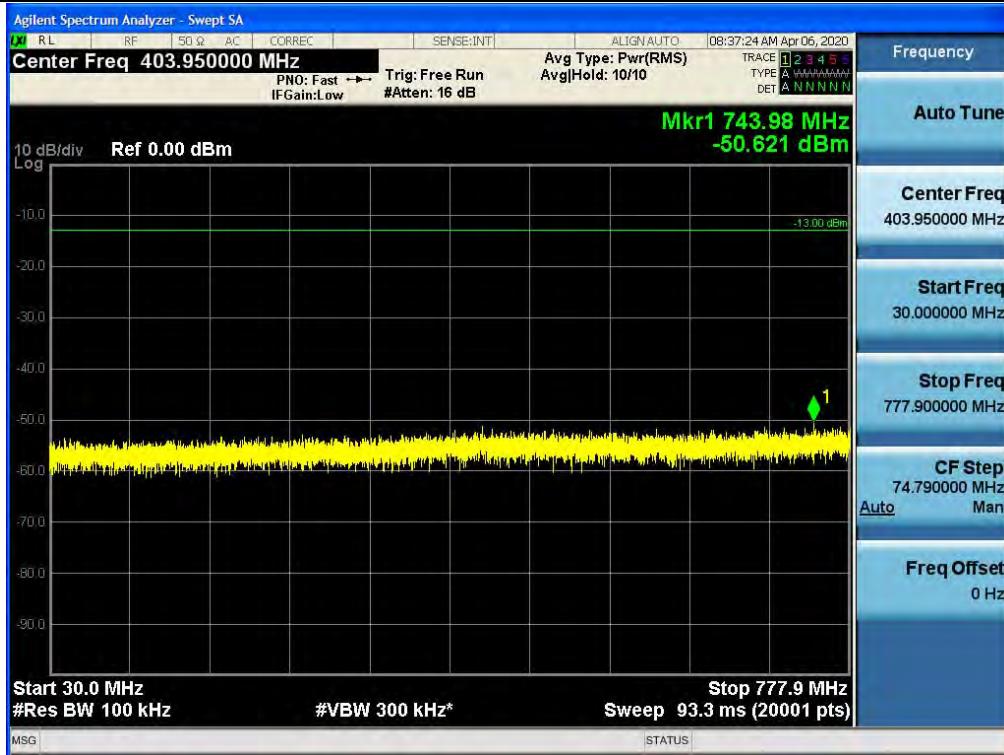


## Spurious / FirstNet / Uplink / LTE 5 MHz / High / Low Edge-10 ~ Low Edge


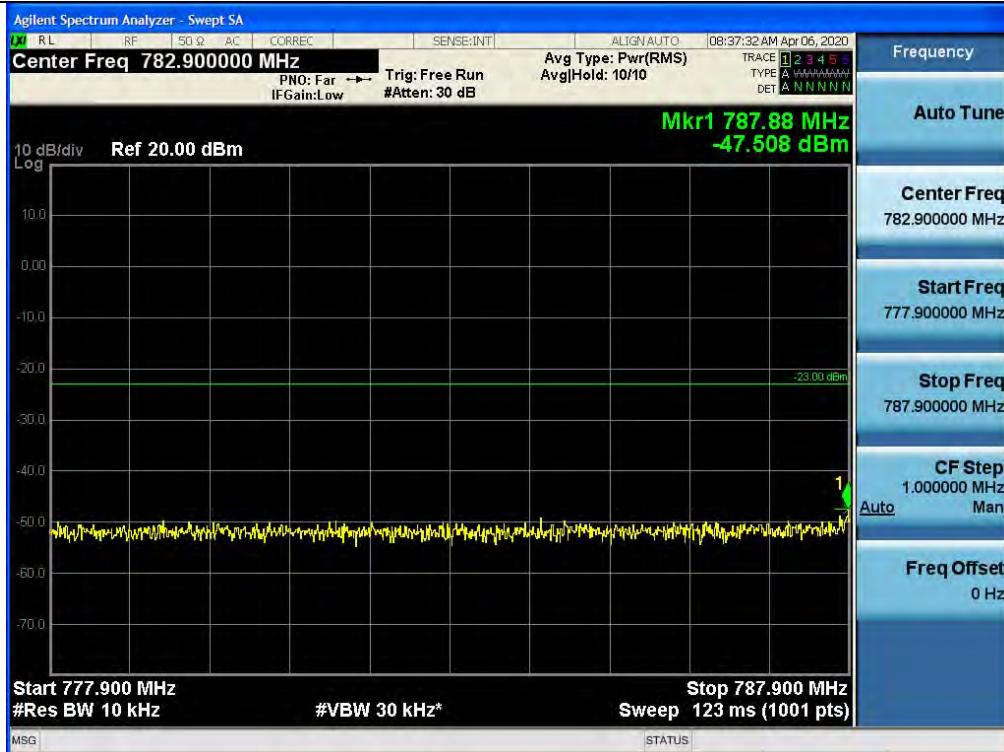




## Spurious / FirstNet / Uplink / LTE 5 MHz / High / High Edge ~ High Edge+10







## Spurious / FirstNet / Uplink / LTE 5 MHz / High / High Edge+10 ~ 2 GHz


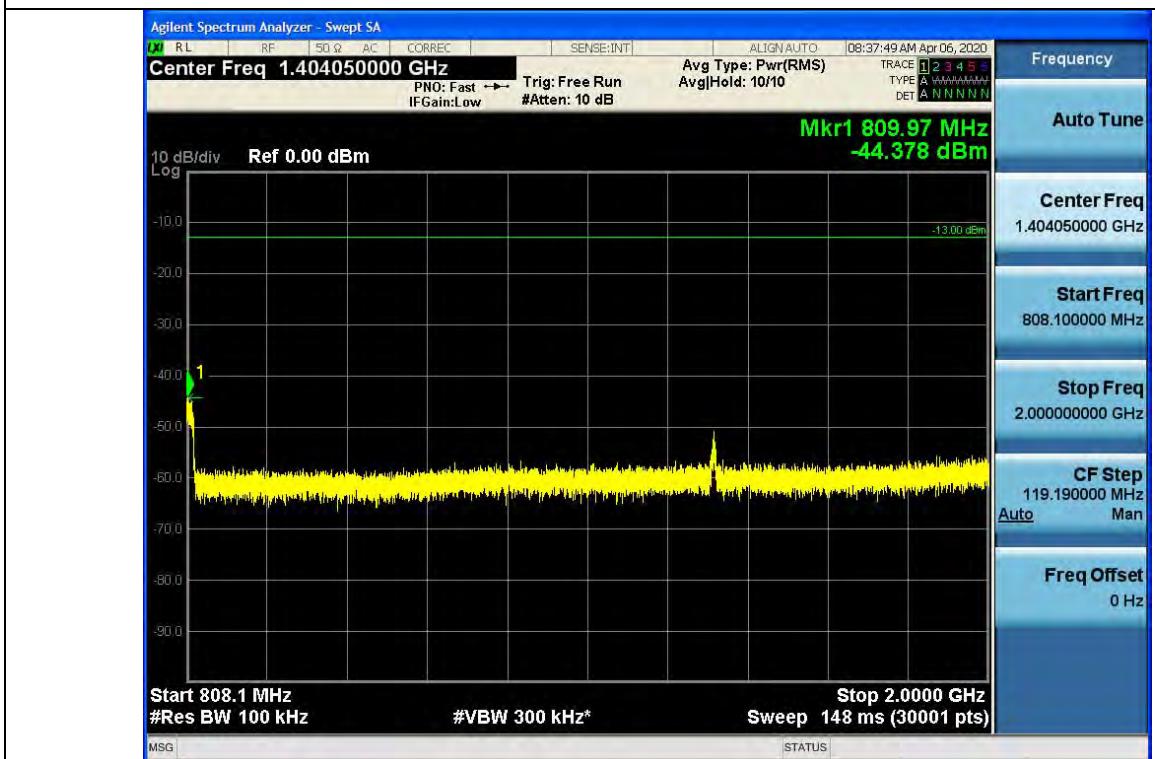


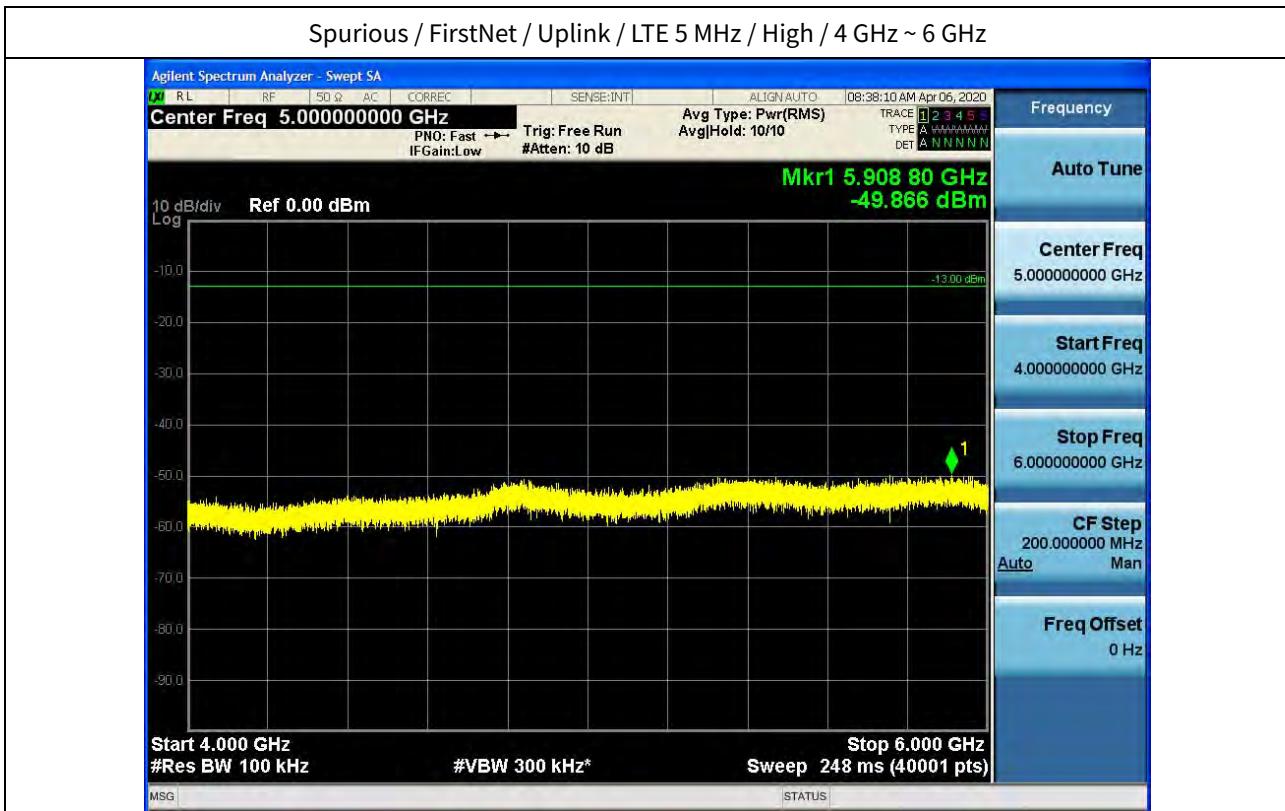
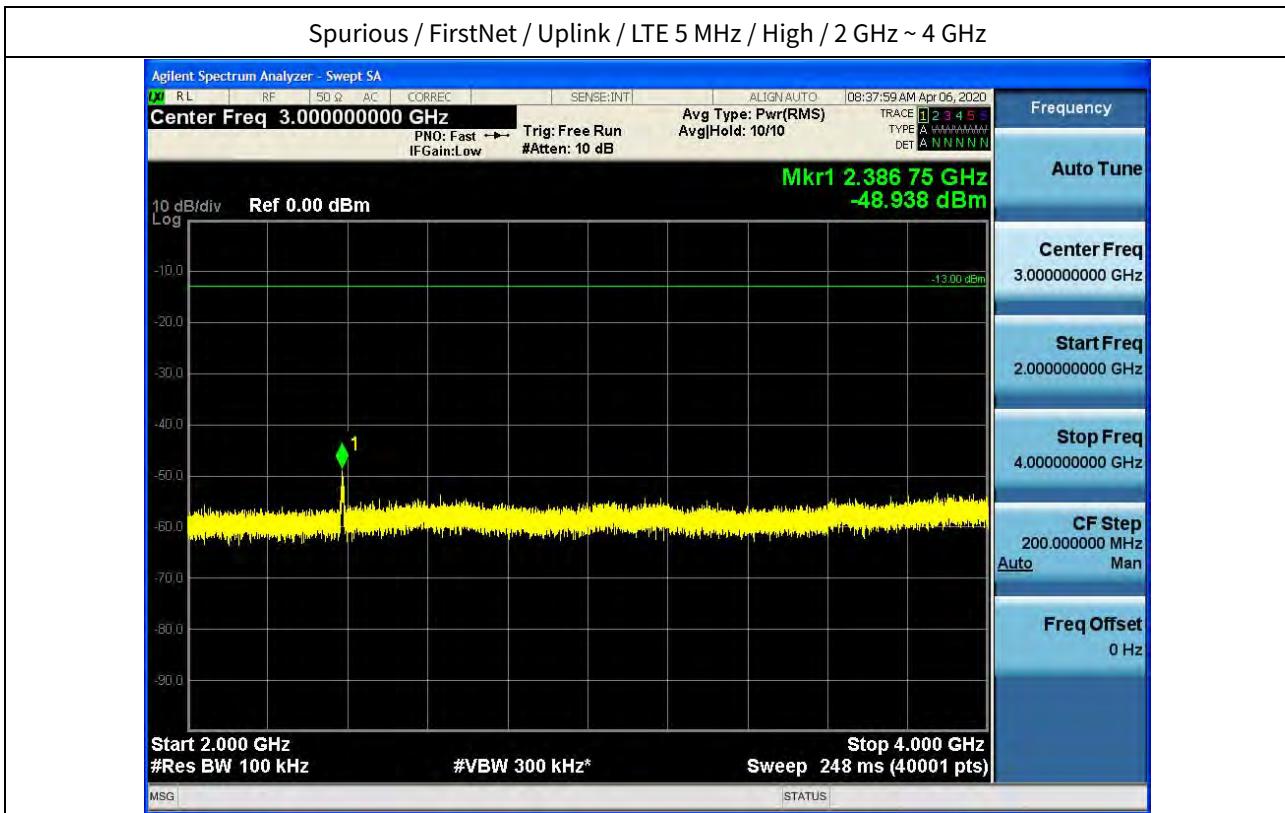


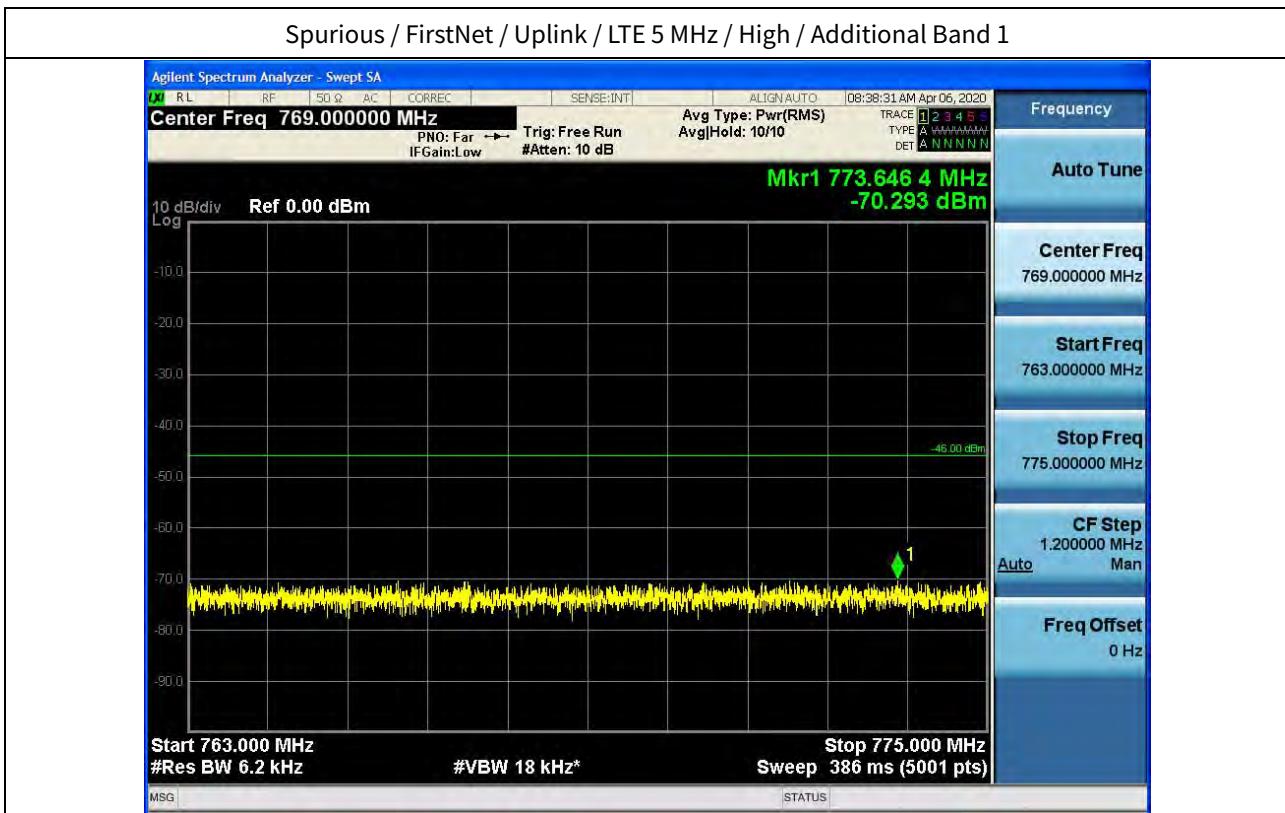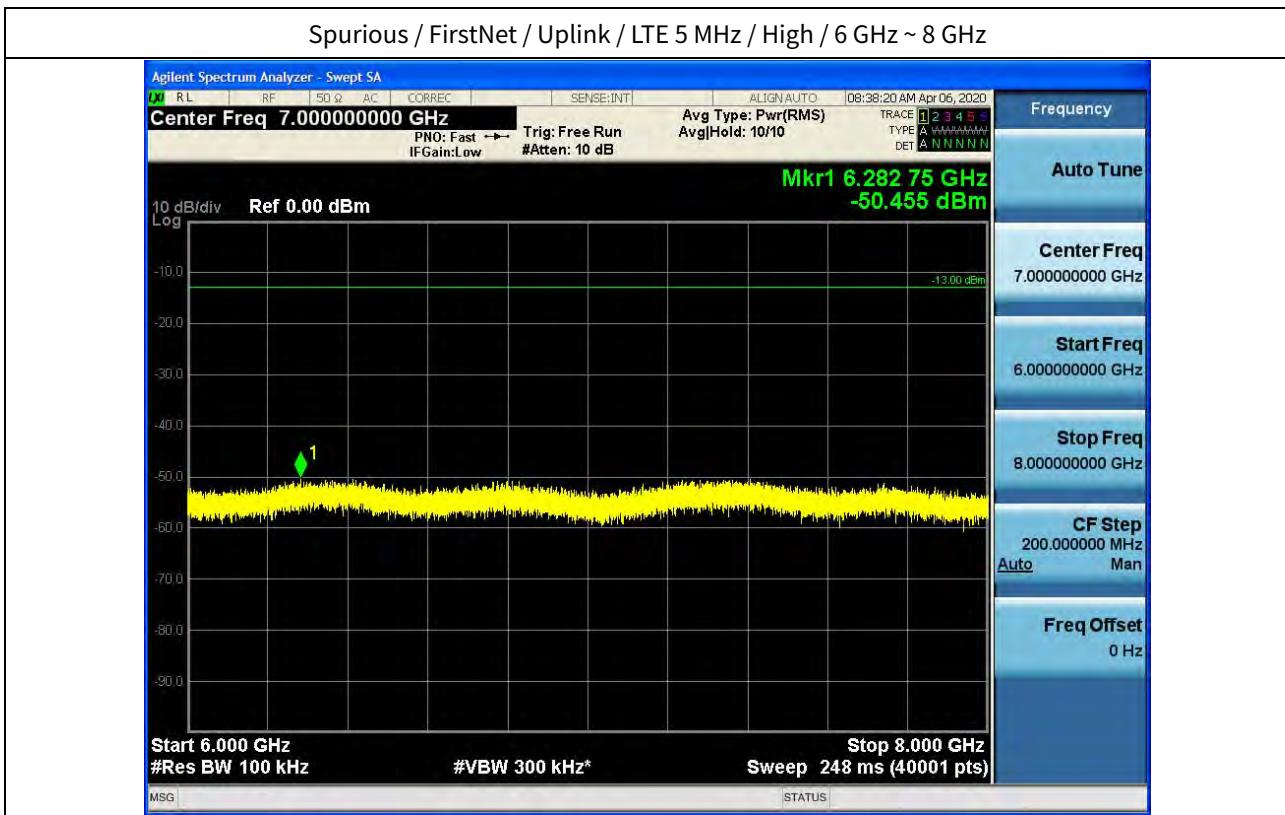

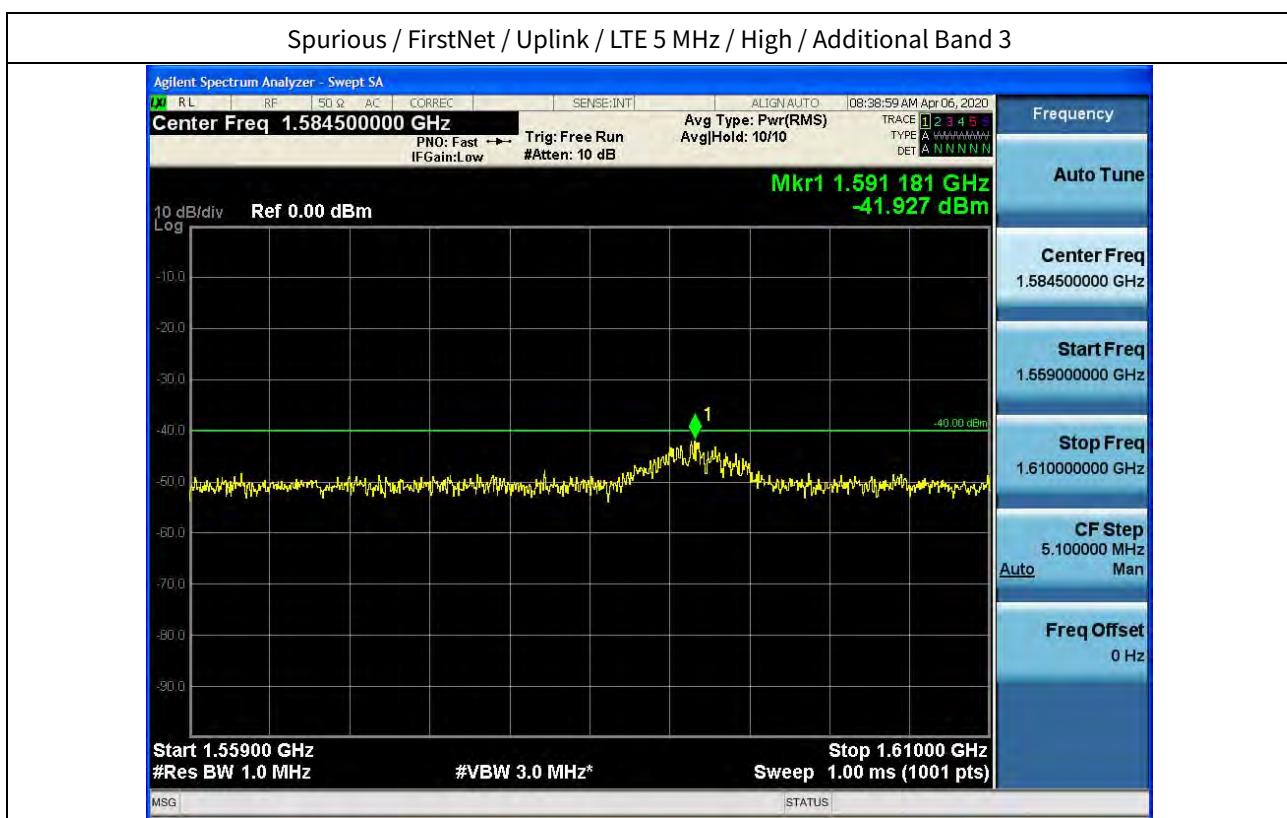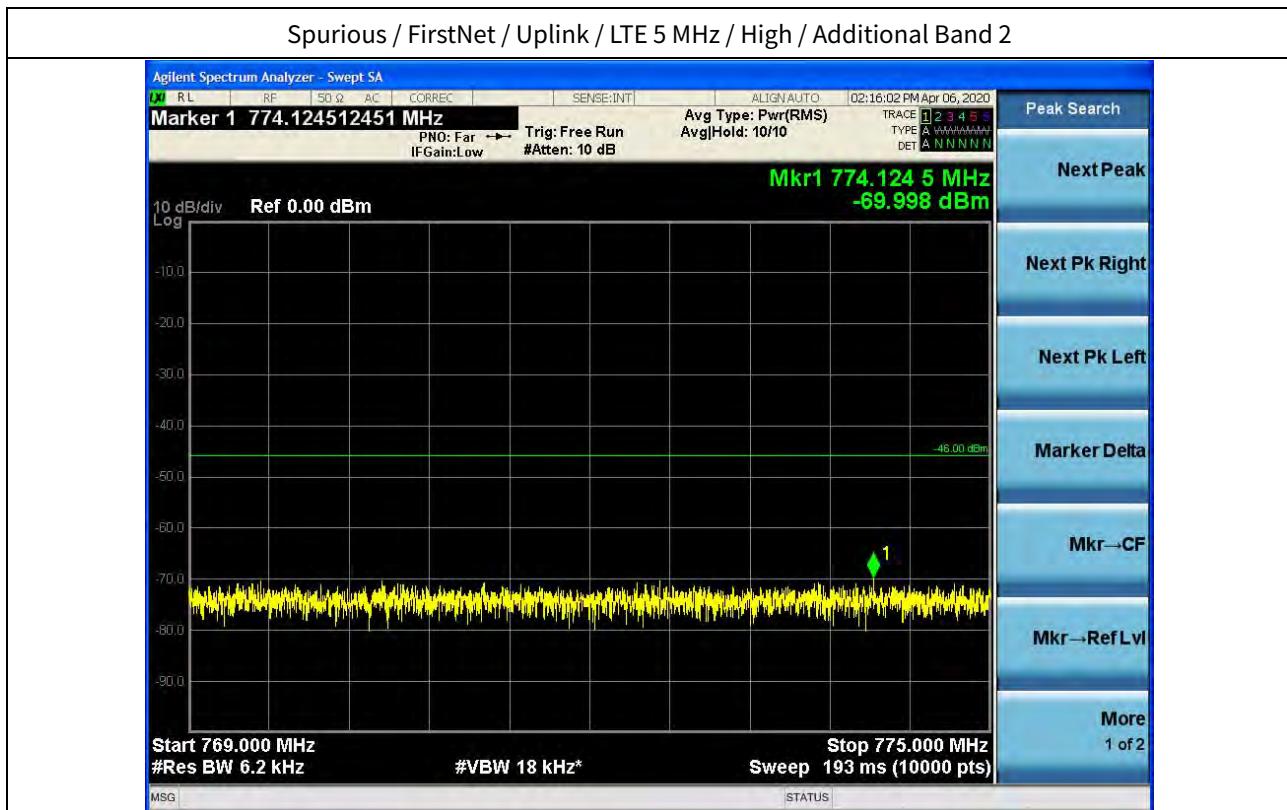


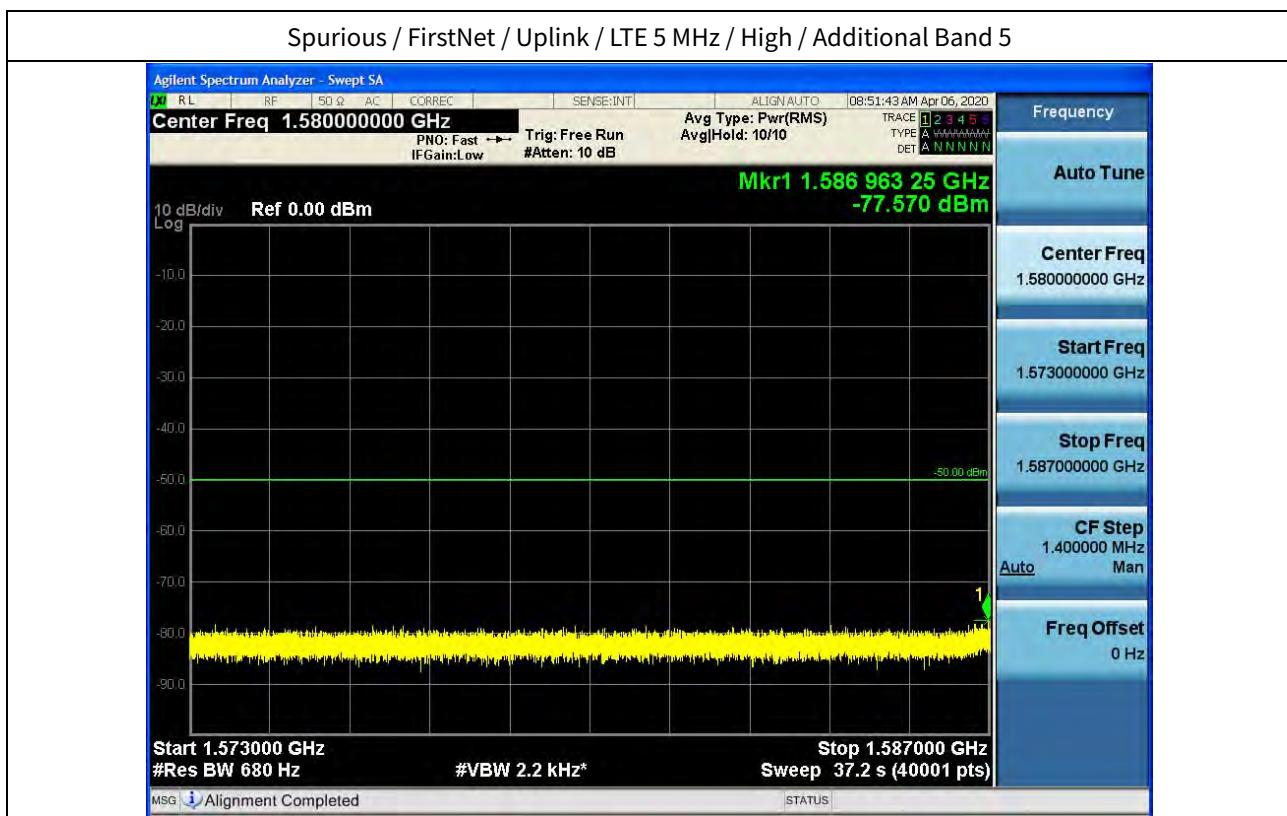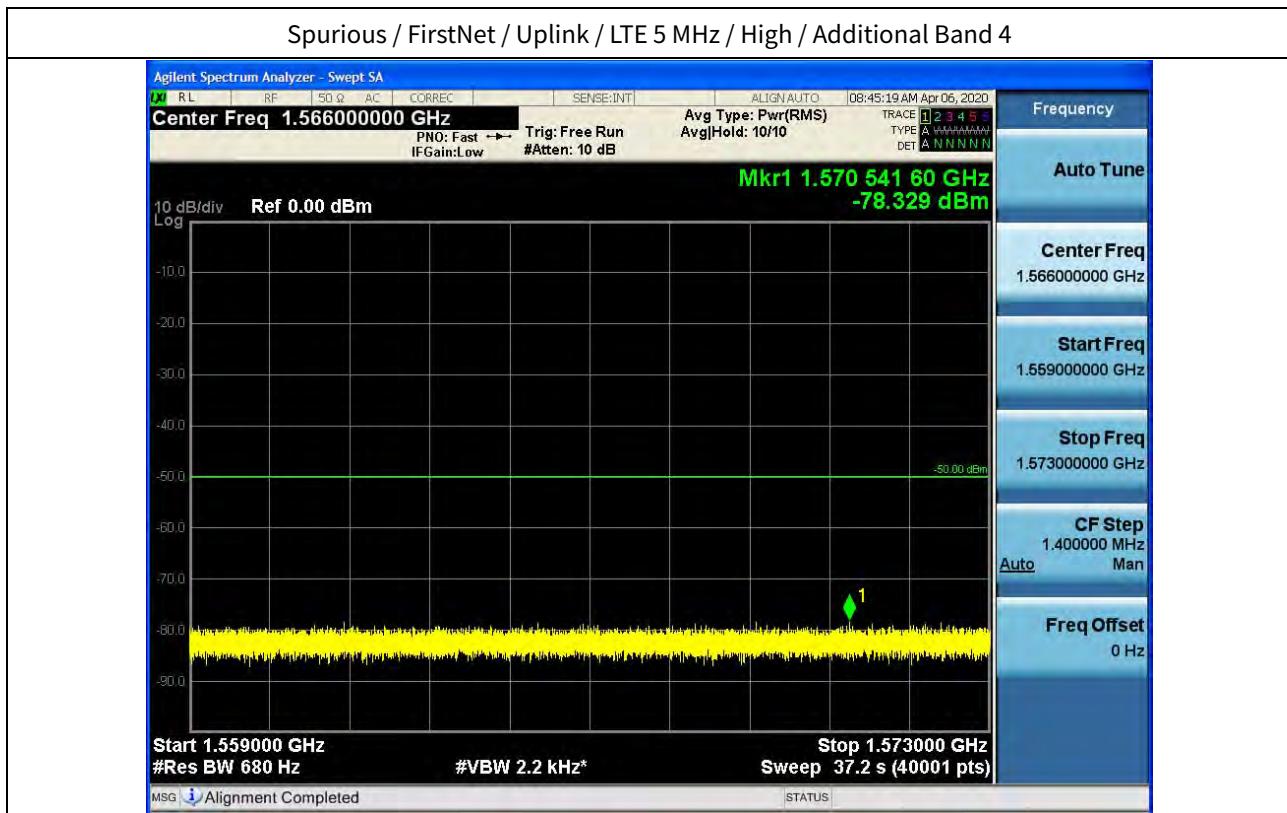

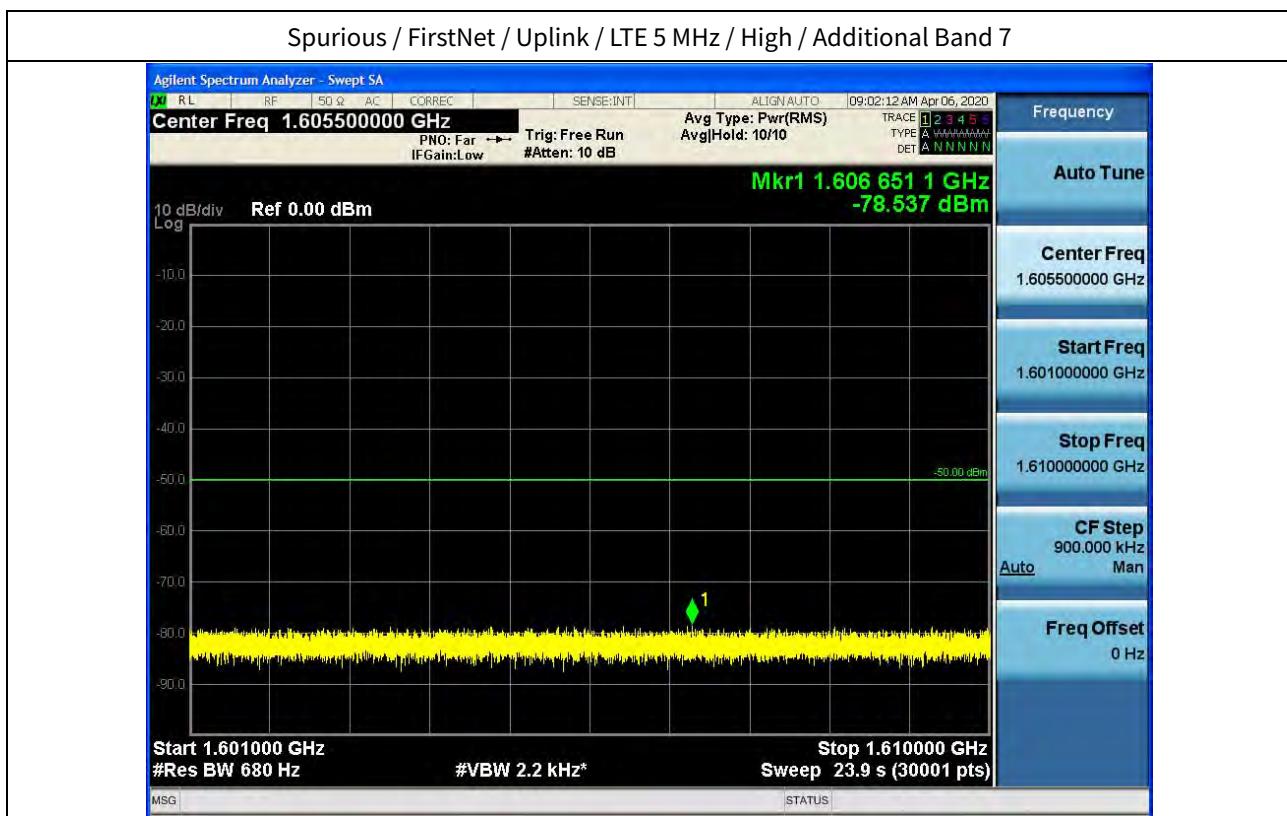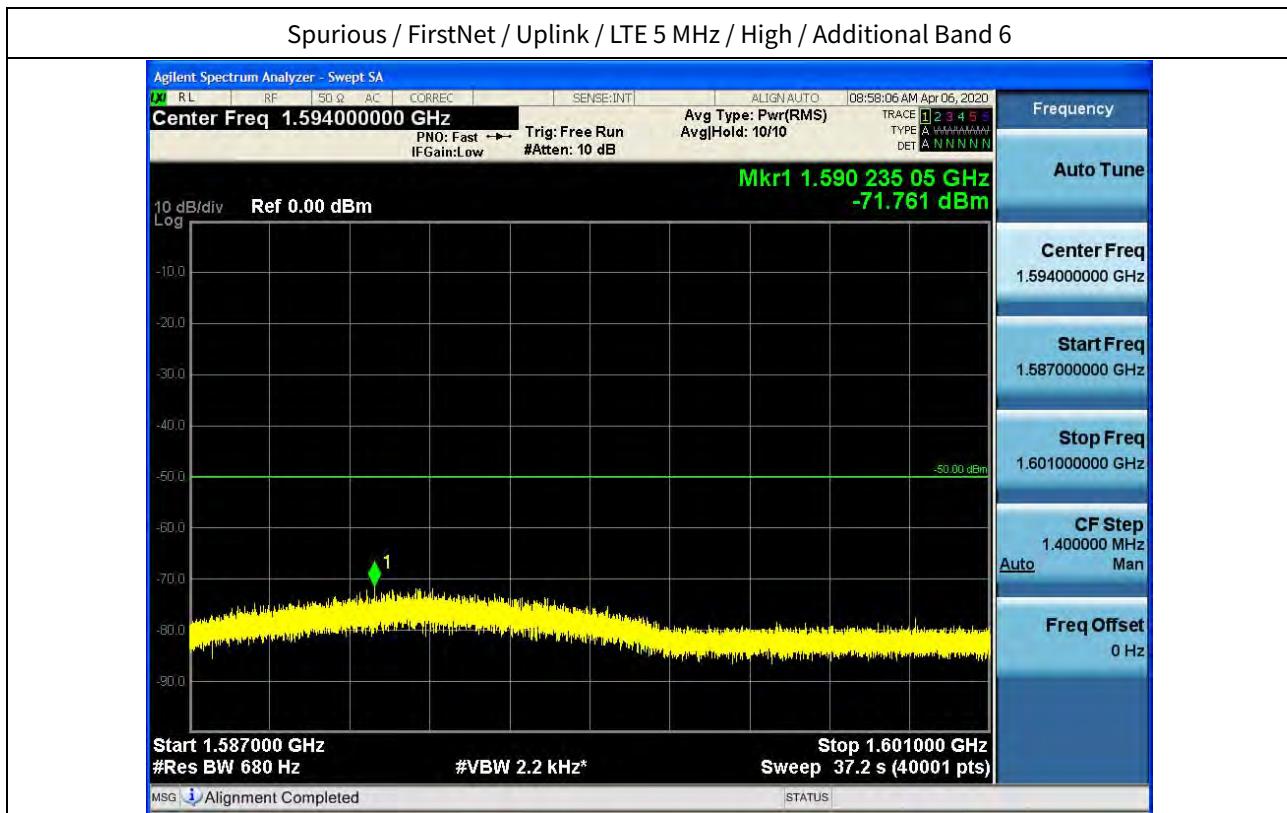


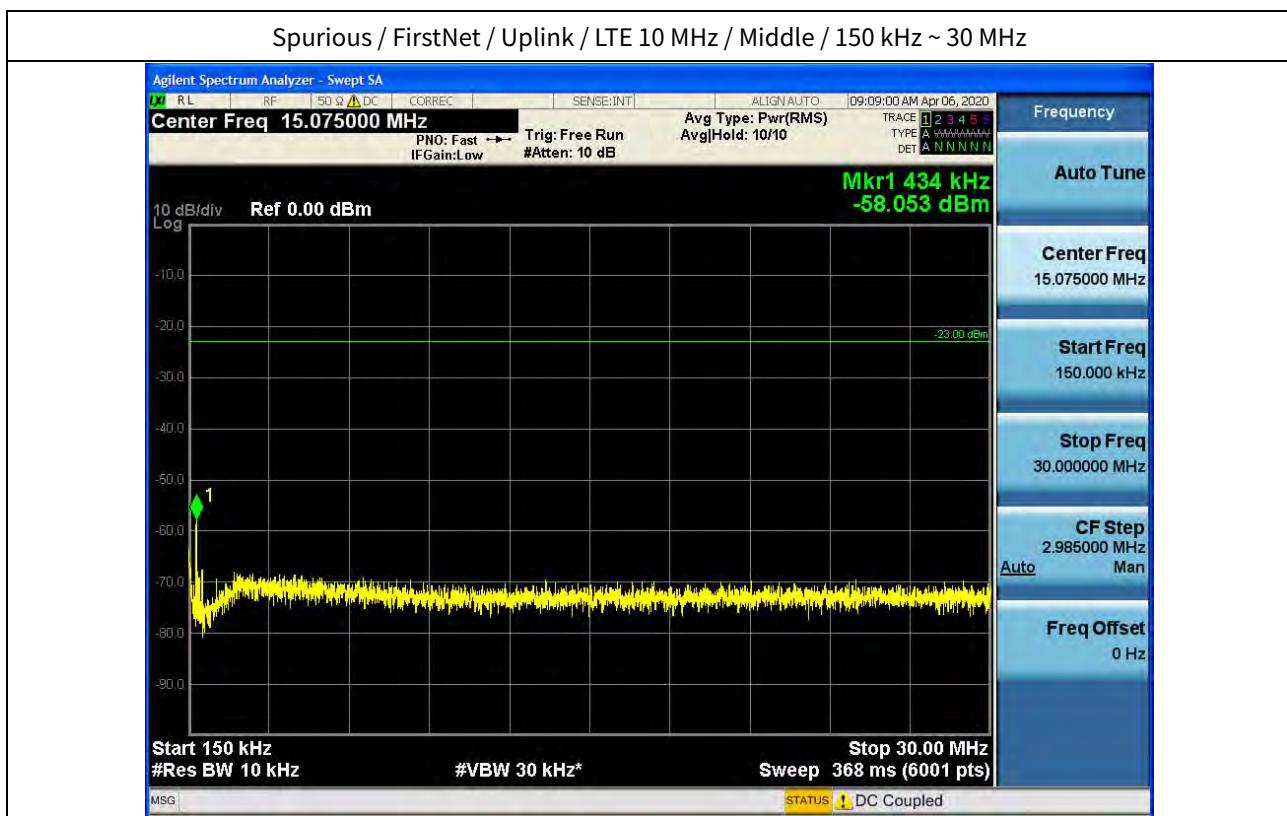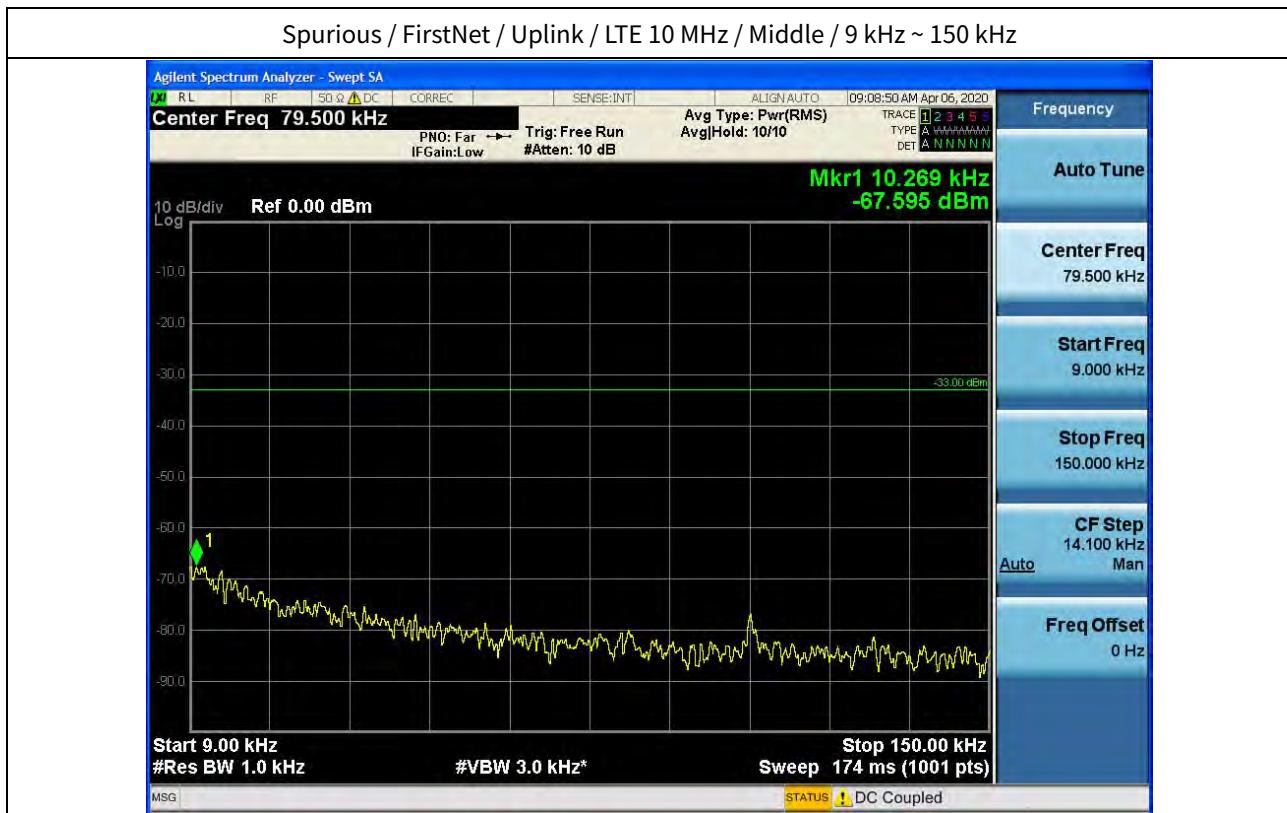


## Spurious / FirstNet / Uplink / LTE 10 MHz / Middle / 30 MHz ~ Low Edge-10

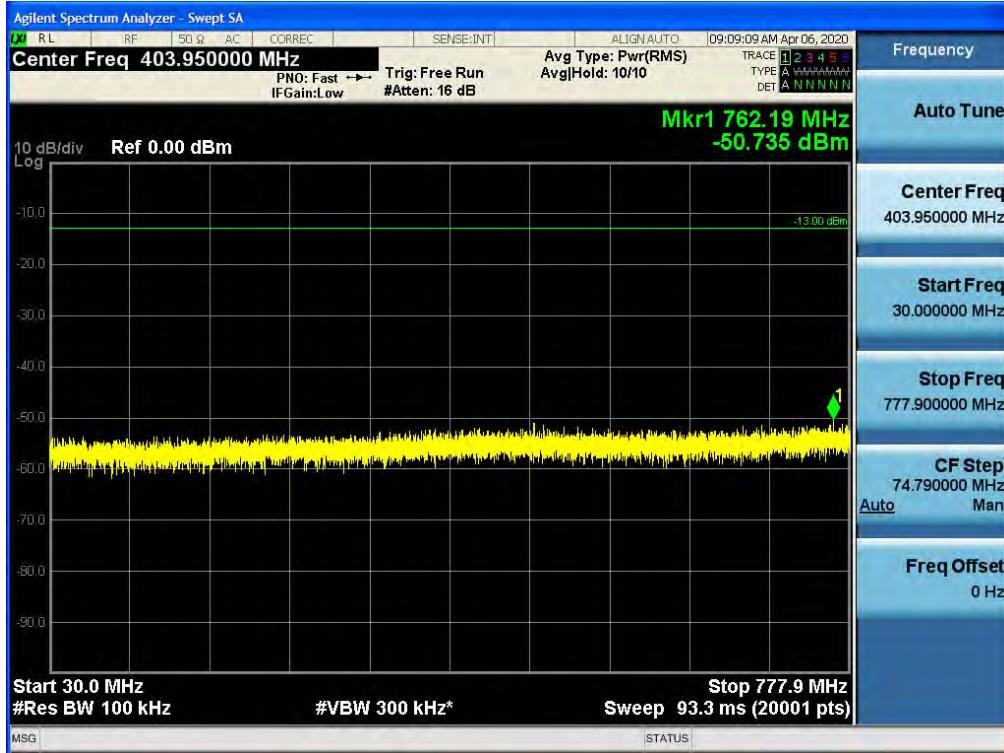

## Spurious / FirstNet / Uplink / LTE 10 MHz / Middle / Low Edge-10 ~ Low Edge

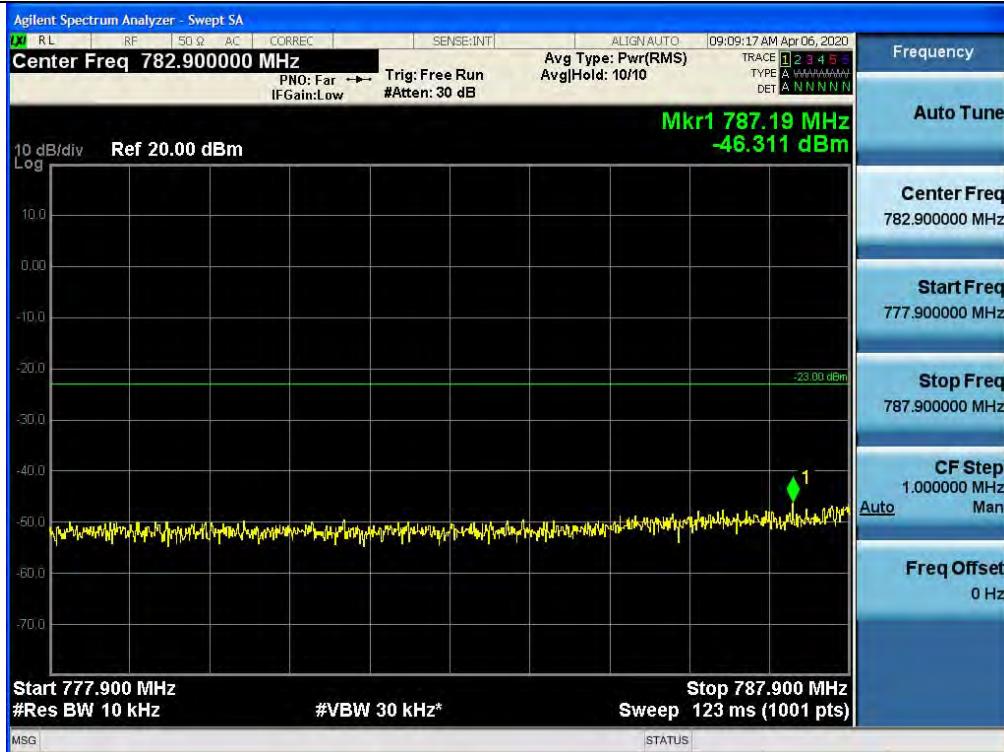

## Spurious / FirstNet / Uplink / LTE 10 MHz / Middle / High Edge ~ High Edge+10

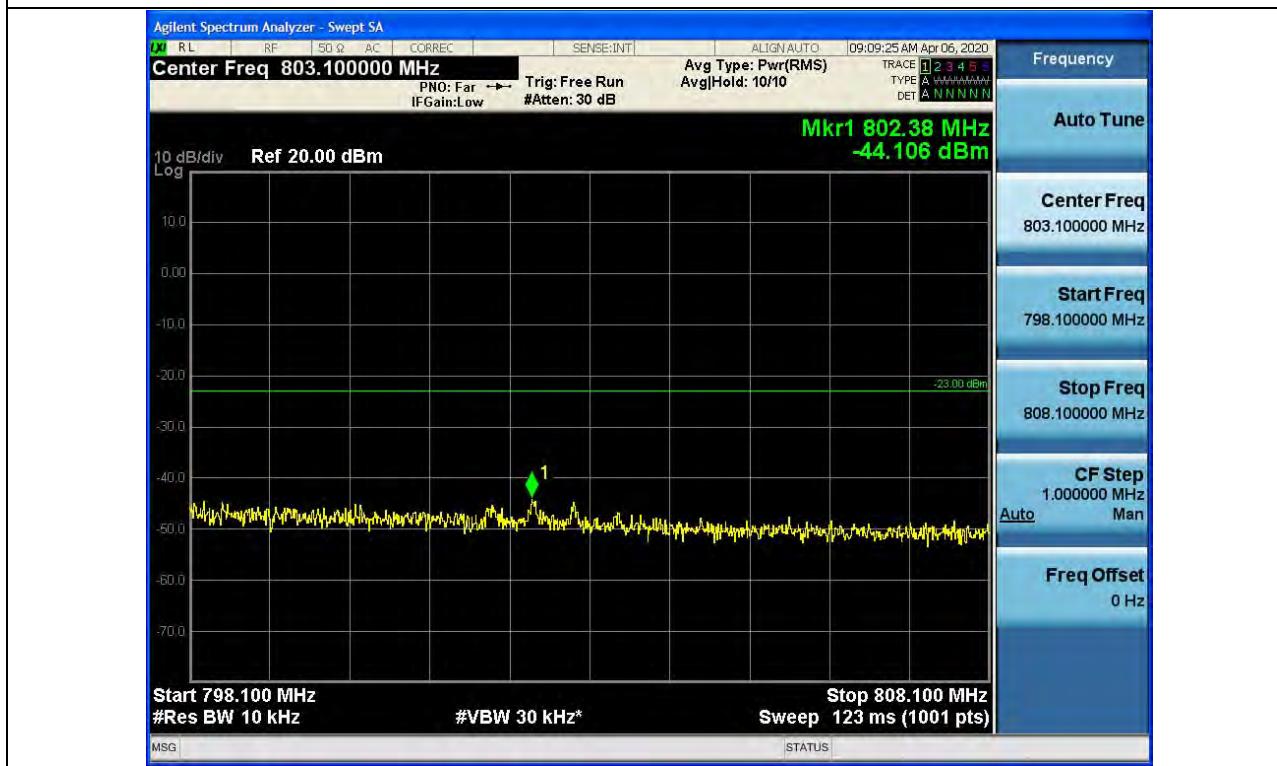

Spurious / FirstNet / Uplink / LTE 10 MHz / Middle / High Edge+10 ~ 2 GHz

