


3.5 Occupied and 26 dB Bandwidth

3.5.1 Test Procedures


1. Set RBW = 20 / 50 / 100 / 200 / 200 / 300 kHz, VBW = 100 / 200 / 300 / 1000 / 1000 / 1000 kHz for channel bandwidth 1.4 / 3 / 5 / 10 / 15 / 20 MHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Using occupied bandwidth measurement function of spectrum analyzer to measure occupied bandwidth.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 26dB relative to the maximum level measured in the fundamental emission.

3.5.2 Test Setup

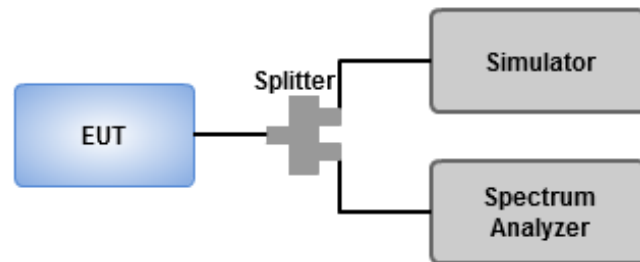


3.5.3 Test Result of Occupied Bandwidth


Mode	CB (MHz)	Modulation	Channel	Frequency (MHz)	26dB BW (MHz)	99% OBW (MHz)
LTE Band 4	1.4	QPSK	19957	1710.7	1.32609	1.0897
LTE Band 4	1.4	QPSK	20175	1732.5	1.36957	1.0941
LTE Band 4	1.4	QPSK	20393	1754.3	1.39565	1.0897
LTE Band 4	1.4	16QAM	19957	1710.7	1.33913	1.0941
LTE Band 4	1.4	16QAM	20175	1732.5	1.33913	1.0897
LTE Band 4	1.4	16QAM	20393	1754.3	1.36522	1.0941

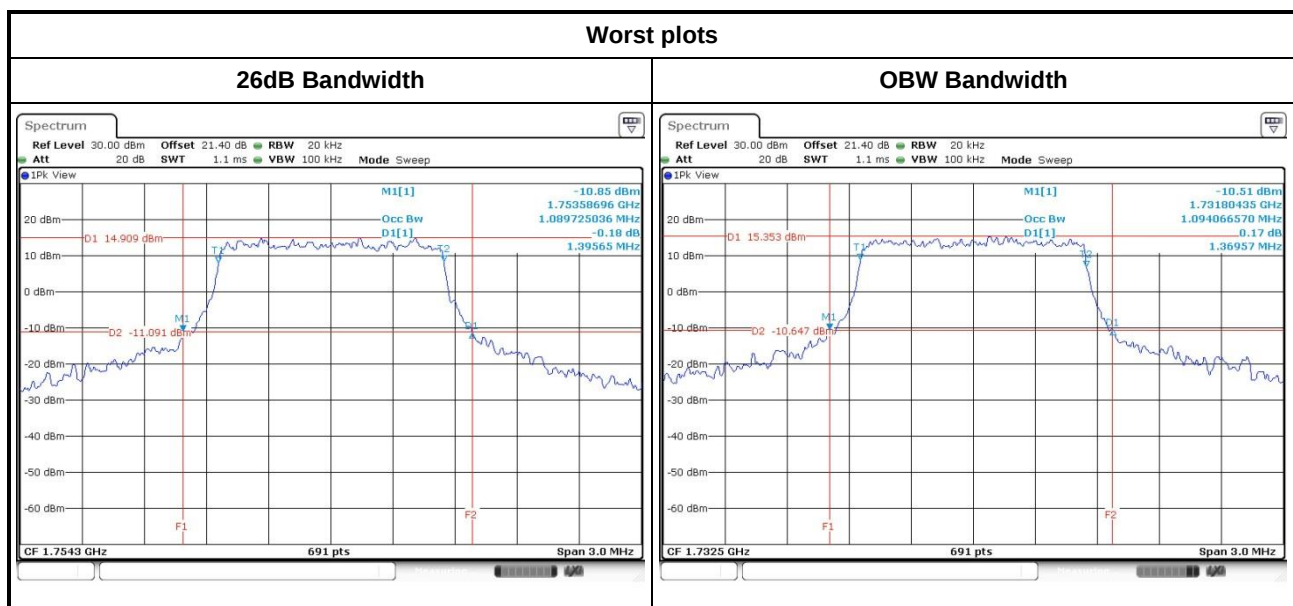


Mode	CB (MHz)	Modulation	Channel	Frequency (MHz)	26dB BW (MHz)	99% OBW (MHz)
LTE Band 4	3	QPSK	19965	1711.5	2.9739	2.6918
LTE Band 4	3	QPSK	20175	1732.5	2.9565	2.6918
LTE Band 4	3	QPSK	20385	1753.5	3.0000	2.6918
LTE Band 4	3	16QAM	19965	1711.5	2.9826	2.7004
LTE Band 4	3	16QAM	20175	1732.5	2.9913	2.7004
LTE Band 4	3	16QAM	20385	1753.5	3.0000	2.6918

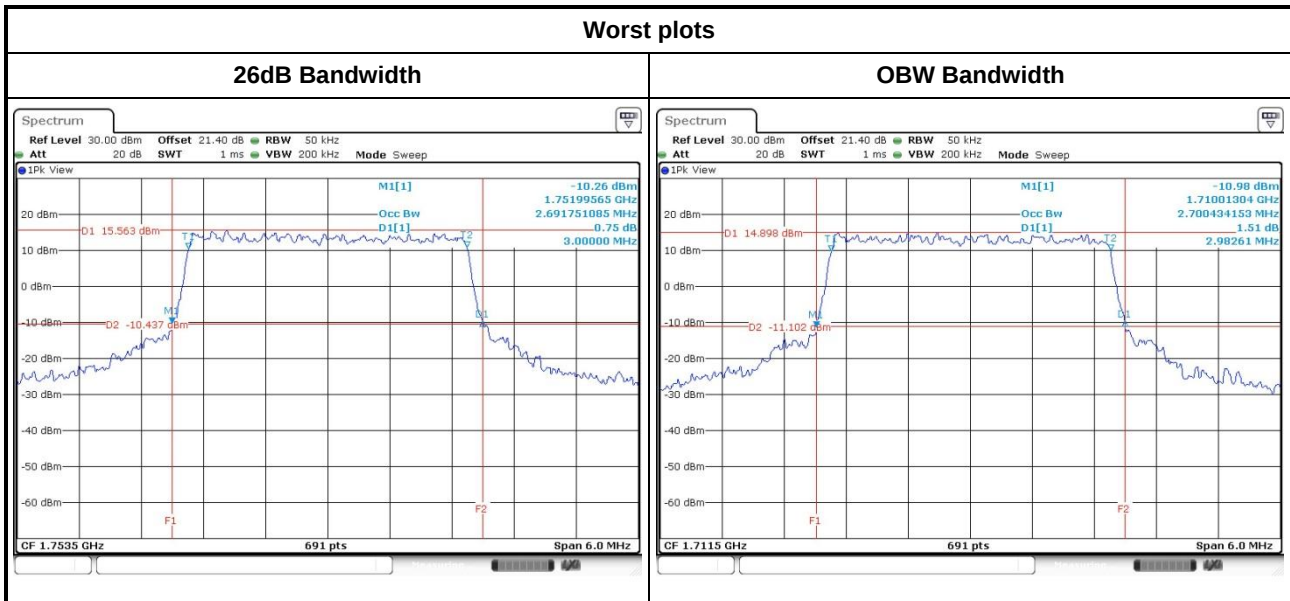


Mode	CB (MHz)	Modulation	Channel	Frequency (MHz)	26dB BW (MHz)	99% OBW (MHz)
LTE Band 4	5	QPSK	19975	1712.5	5.0435	4.5007
LTE Band 4	5	QPSK	20175	1732.5	5.0435	4.5007
LTE Band 4	5	QPSK	20375	1752.5	5.0435	4.4862
LTE Band 4	5	16QAM	19975	1712.5	5.0580	4.5007
LTE Band 4	5	16QAM	20175	1732.5	5.0580	4.5007
LTE Band 4	5	16QAM	20375	1752.5	5.0435	4.5007

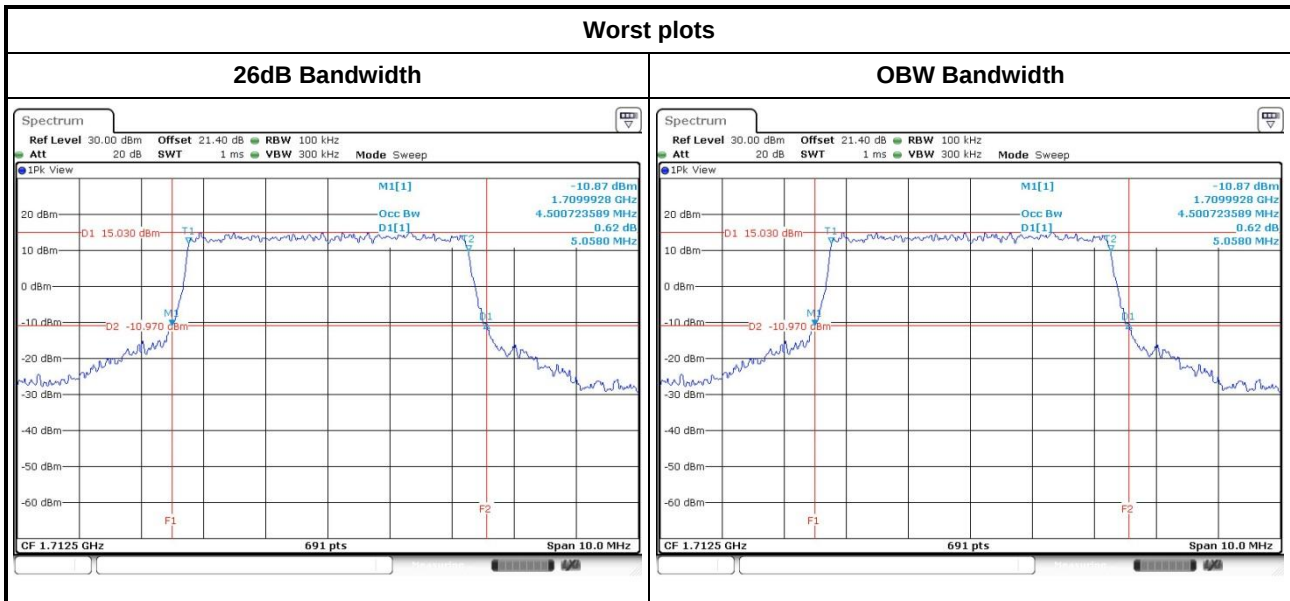


Mode	CB (MHz)	Modulation	Channel	Frequency (MHz)	26dB BW (MHz)	99% OBW (MHz)
LTE Band 4	10	QPSK	20000	1715.0	10.2319	9.0014
LTE Band 4	10	QPSK	20175	1732.5	10.1739	9.0303
LTE Band 4	10	QPSK	20350	1750.0	10.2899	9.0014
LTE Band 4	10	16QAM	20000	1715.0	10.2029	9.0014
LTE Band 4	10	16QAM	20175	1732.5	9.9710	9.0014
LTE Band 4	10	16QAM	20350	1750.0	10.1739	8.9725

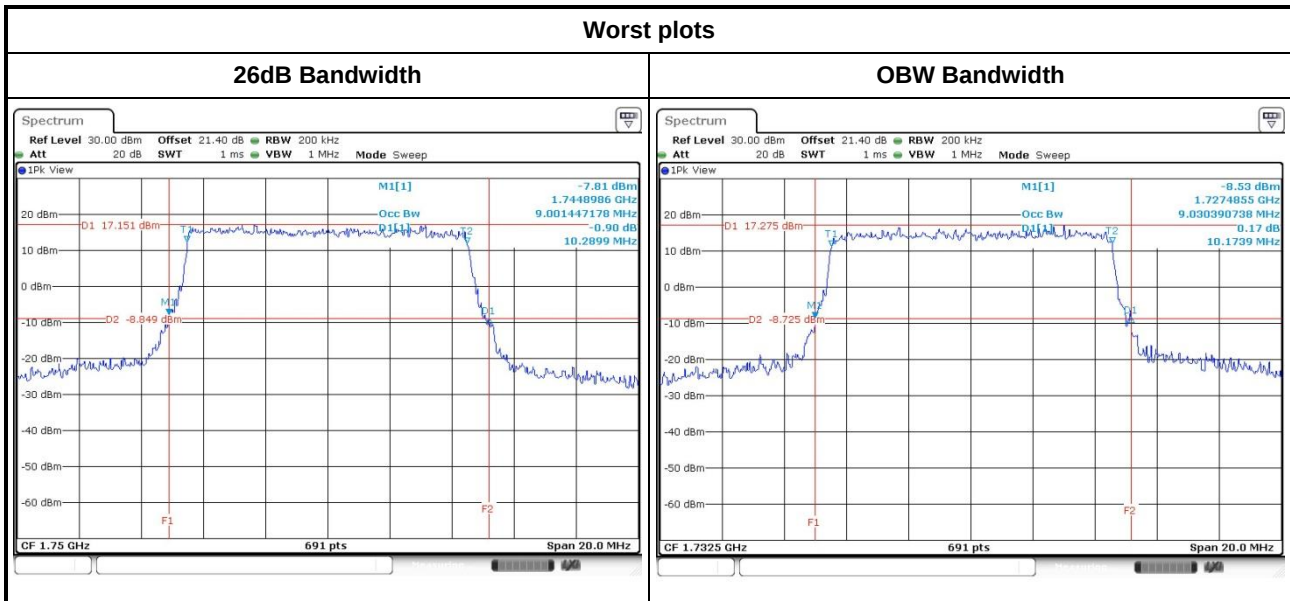

Mode	CB (MHz)	Modulation	Channel	Frequency (MHz)	26dB BW (MHz)	99% OBW (MHz)
LTE Band 4	15	QPSK	20025	1717.5	15.3478	13.4153
LTE Band 4	15	QPSK	20175	1732.5	15.2174	13.4153
LTE Band 4	15	QPSK	20325	1747.5	15.3043	13.4587
LTE Band 4	15	16QAM	20025	1717.5	15.3043	13.4587
LTE Band 4	15	16QAM	20175	1732.5	15.5652	13.4587
LTE Band 4	15	16QAM	20325	1747.5	15.3478	13.4153

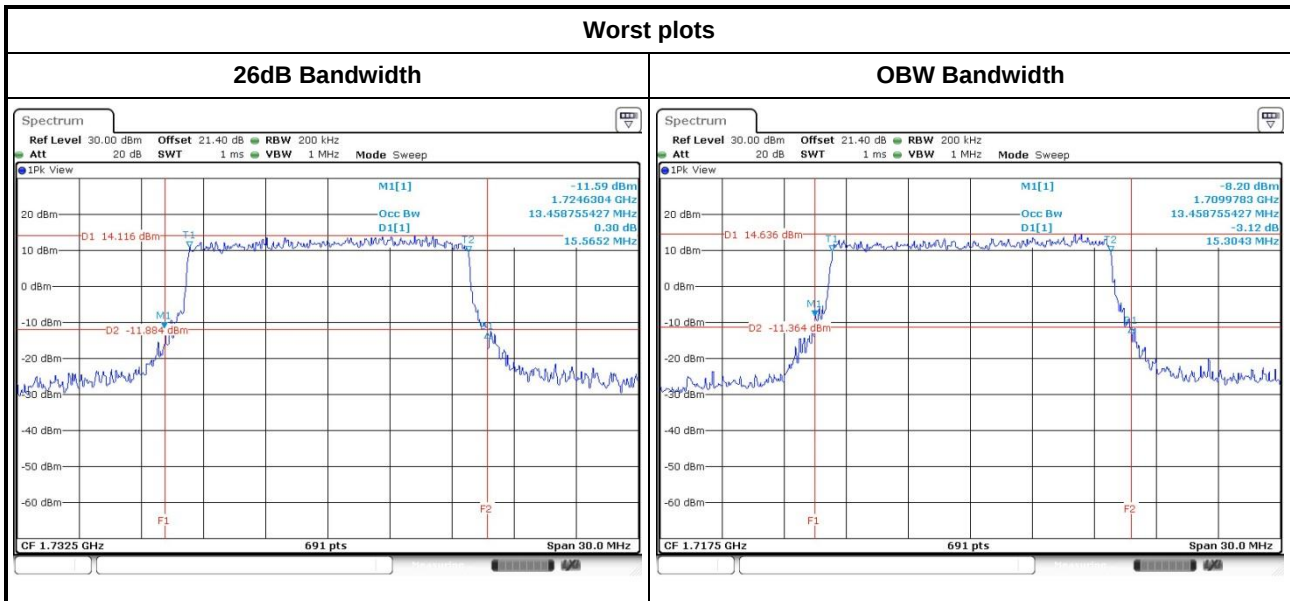

Mode	CB (MHz)	Modulation	Channel	Frequency (MHz)	26dB BW (MHz)	99% OBW (MHz)
LTE Band 4	20	QPSK	20050	1720.0	20.1739	17.9450
LTE Band 4	20	QPSK	20175	1732.5	20.1739	17.9450
LTE Band 4	20	QPSK	20300	1745.0	20.0000	17.9450
LTE Band 4	20	16QAM	20050	1720.0	20.1739	18.0029
LTE Band 4	20	16QAM	20175	1732.5	20.0580	17.8871
LTE Band 4	20	16QAM	20300	1745.0	19.8841	18.0028

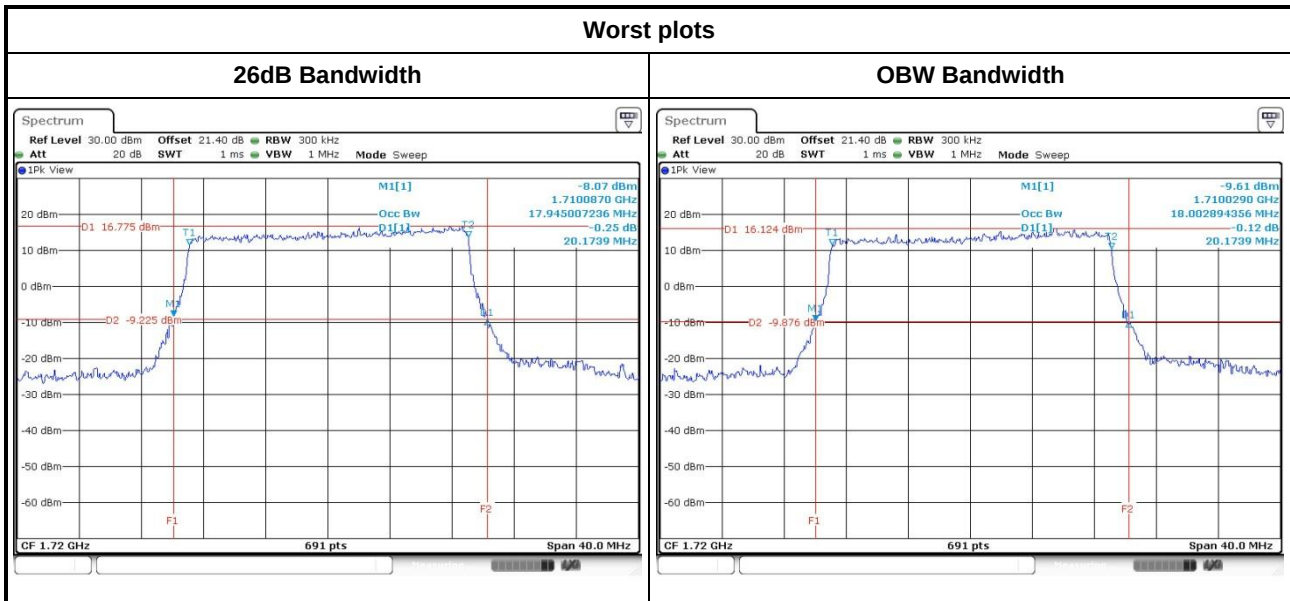

3.6 Peak to Average Ratio


3.6.1 Limit of Peak to Average Ratio

The Peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.6.2 Test Procedures


1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth.
2. Set the number of counts to a value that stabilizes the measured CCDF curve.
3. Set the measurement interval to 1 ms.
4. Record the maximum PAPR level associated with a probability of 0.1%.

3.6.3 Test Setup

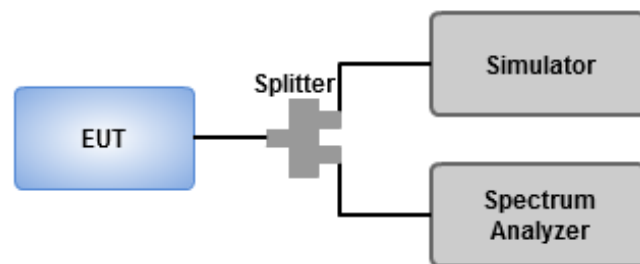


3.6.4 Test Result of Peak to Average Ratio


Mode	CB (MHz)	Modulation	Channel	Frequency (MHz)	Peak to Average ratio (dB)
LTE Band 4	1.4	QPSK	19957	1710.7	5.80
LTE Band 4	1.4	QPSK	20175	1732.5	5.28
LTE Band 4	1.4	QPSK	20393	1754.3	5.77
LTE Band 4	1.4	16QAM	19957	1710.7	6.87
LTE Band 4	1.4	16QAM	20175	1732.5	6.17
LTE Band 4	1.4	16QAM	20393	1754.3	6.64

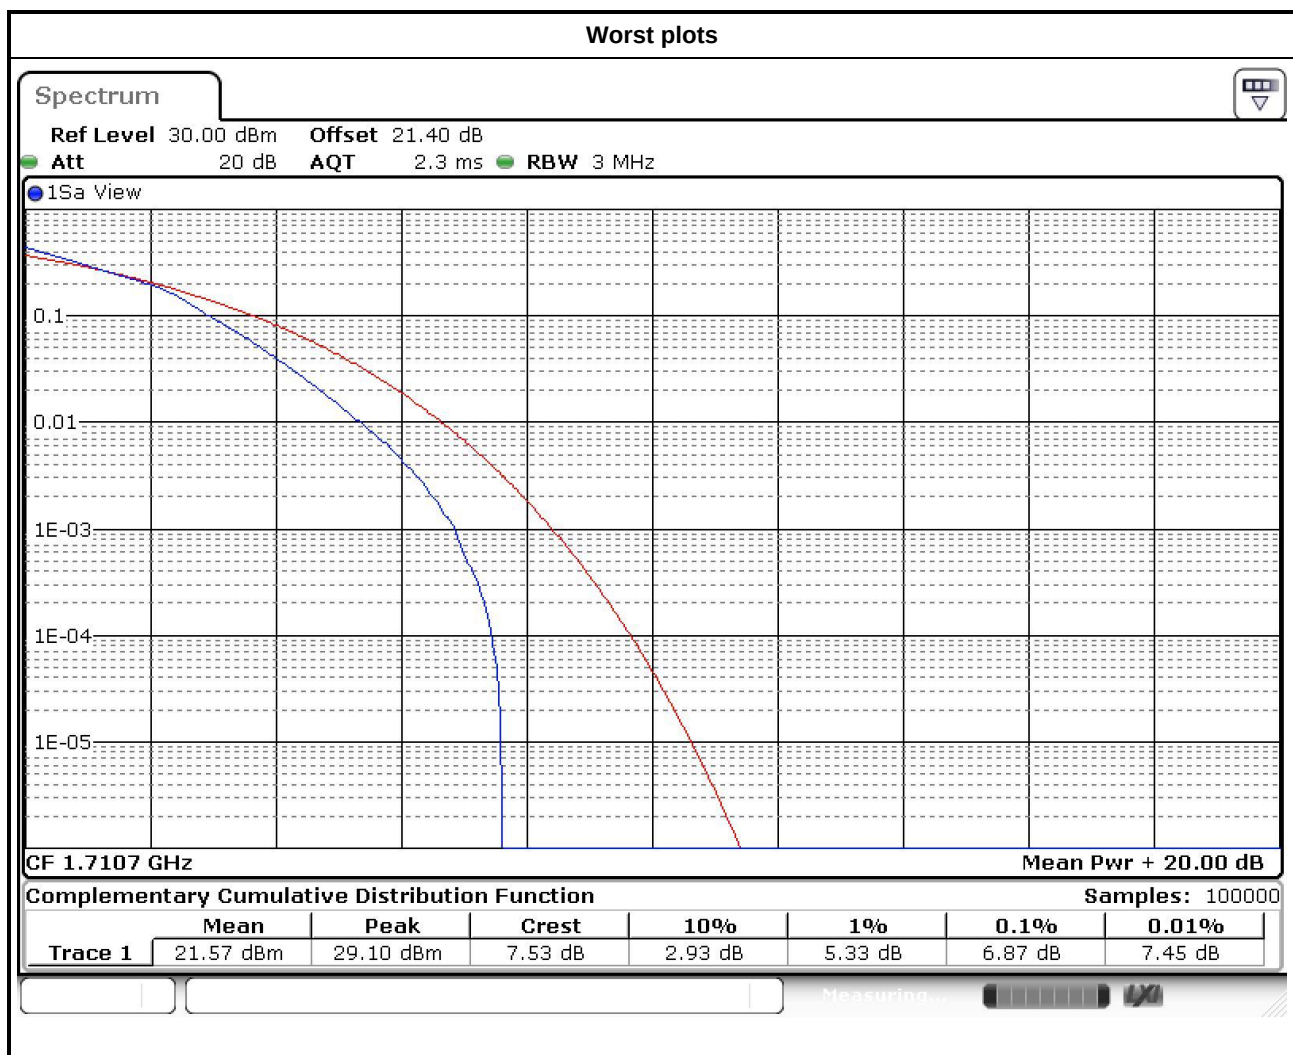


Mode	CB (MHz)	Modulation	Channel	Frequency (MHz)	Peak to Average ratio (dB)
LTE Band 4	3	QPSK	19965	1711.5	5.74
LTE Band 4	3	QPSK	20175	1732.5	5.36
LTE Band 4	3	QPSK	20385	1753.5	5.57
LTE Band 4	3	16QAM	19965	1711.5	6.52
LTE Band 4	3	16QAM	20175	1732.5	6.20
LTE Band 4	3	16QAM	20385	1753.5	6.52

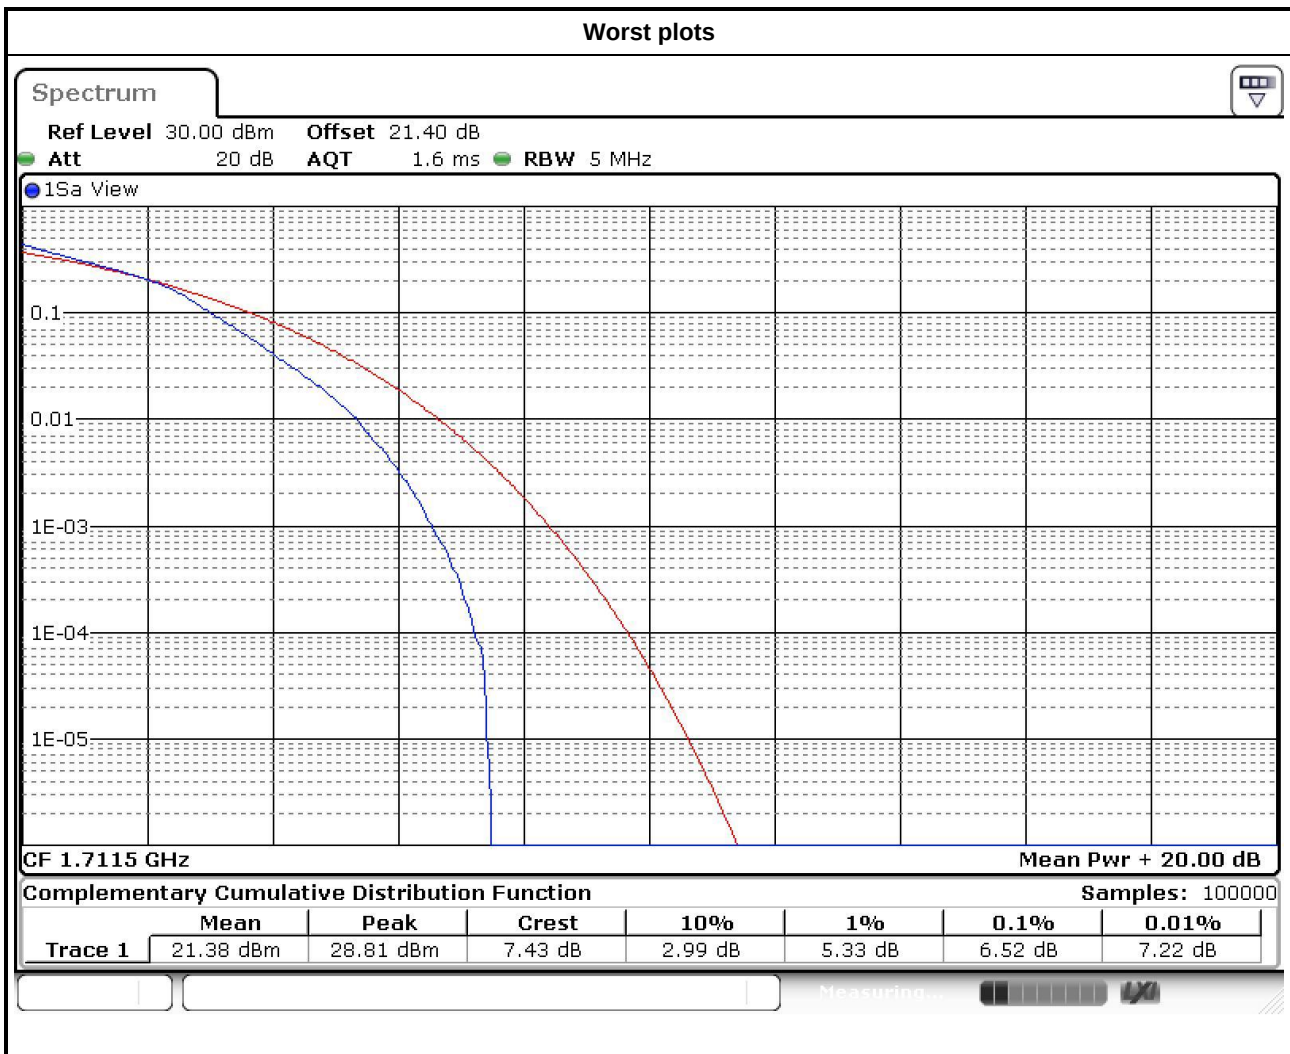


Mode	CB (MHz)	Modulation	Channel	Frequency (MHz)	Peak to Average ratio (dB)
LTE Band 4	5	QPSK	19975	1712.5	5.8
LTE Band 4	5	QPSK	20175	1732.5	5.28
LTE Band 4	5	QPSK	20375	1752.5	5.68
LTE Band 4	5	16QAM	19975	1712.5	6.61
LTE Band 4	5	16QAM	20175	1732.5	6.03
LTE Band 4	5	16QAM	20375	1752.5	6.38

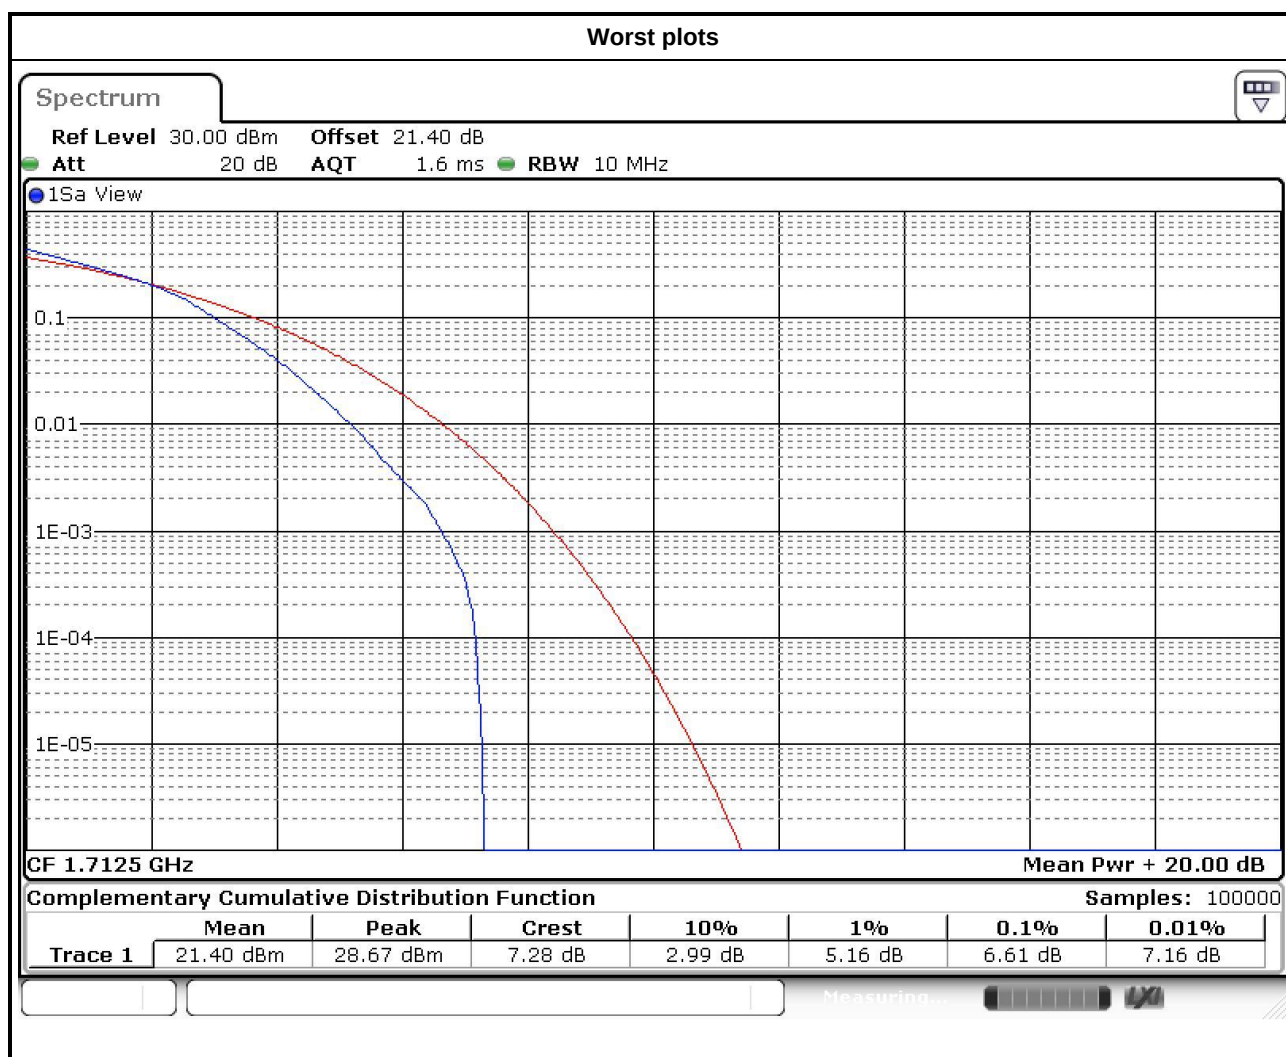


Mode	CB (MHz)	Modulation	Channel	Frequency (MHz)	Peak to Average ratio (dB)
LTE Band 4	10	QPSK	20000	1715.0	5.86
LTE Band 4	10	QPSK	20175	1732.5	5.30
LTE Band 4	10	QPSK	20350	1750.0	5.80
LTE Band 4	10	16QAM	20000	1715.0	6.35
LTE Band 4	10	16QAM	20175	1732.5	6.00
LTE Band 4	10	16QAM	20350	1750.0	6.35

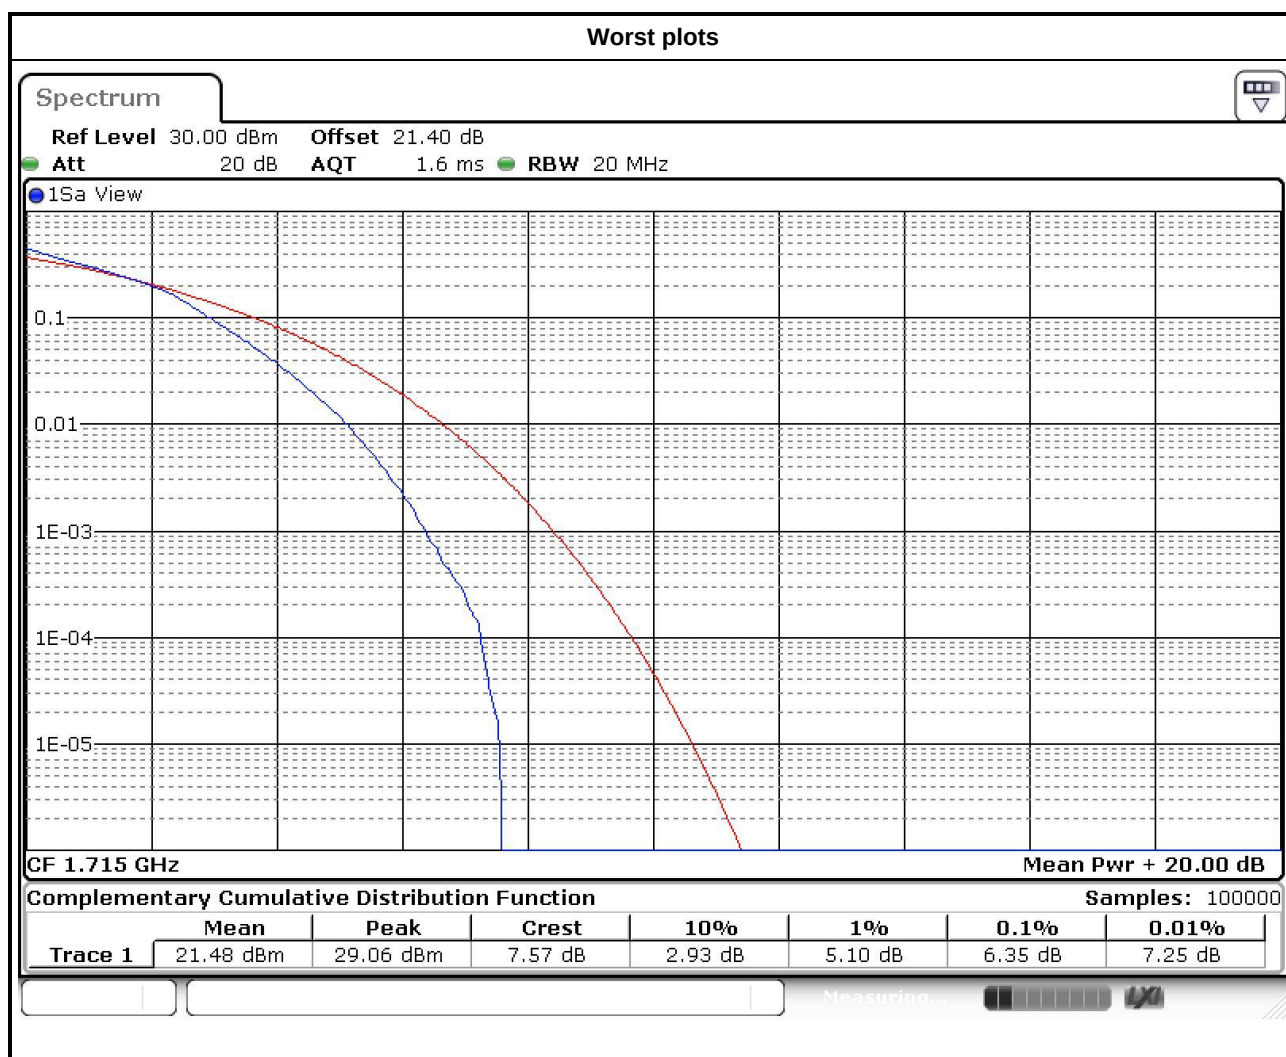

Mode	CB (MHz)	Modulation	Channel	Frequency (MHz)	Peak to Average ratio (dB)
LTE Band 4	15	QPSK	20025	1717.5	5.62
LTE Band 4	15	QPSK	20175	1732.5	5.16
LTE Band 4	15	QPSK	20325	1747.5	5.48
LTE Band 4	15	16QAM	20025	1717.5	6.41
LTE Band 4	15	16QAM	20175	1732.5	6.03
LTE Band 4	15	16QAM	20325	1747.5	6.29

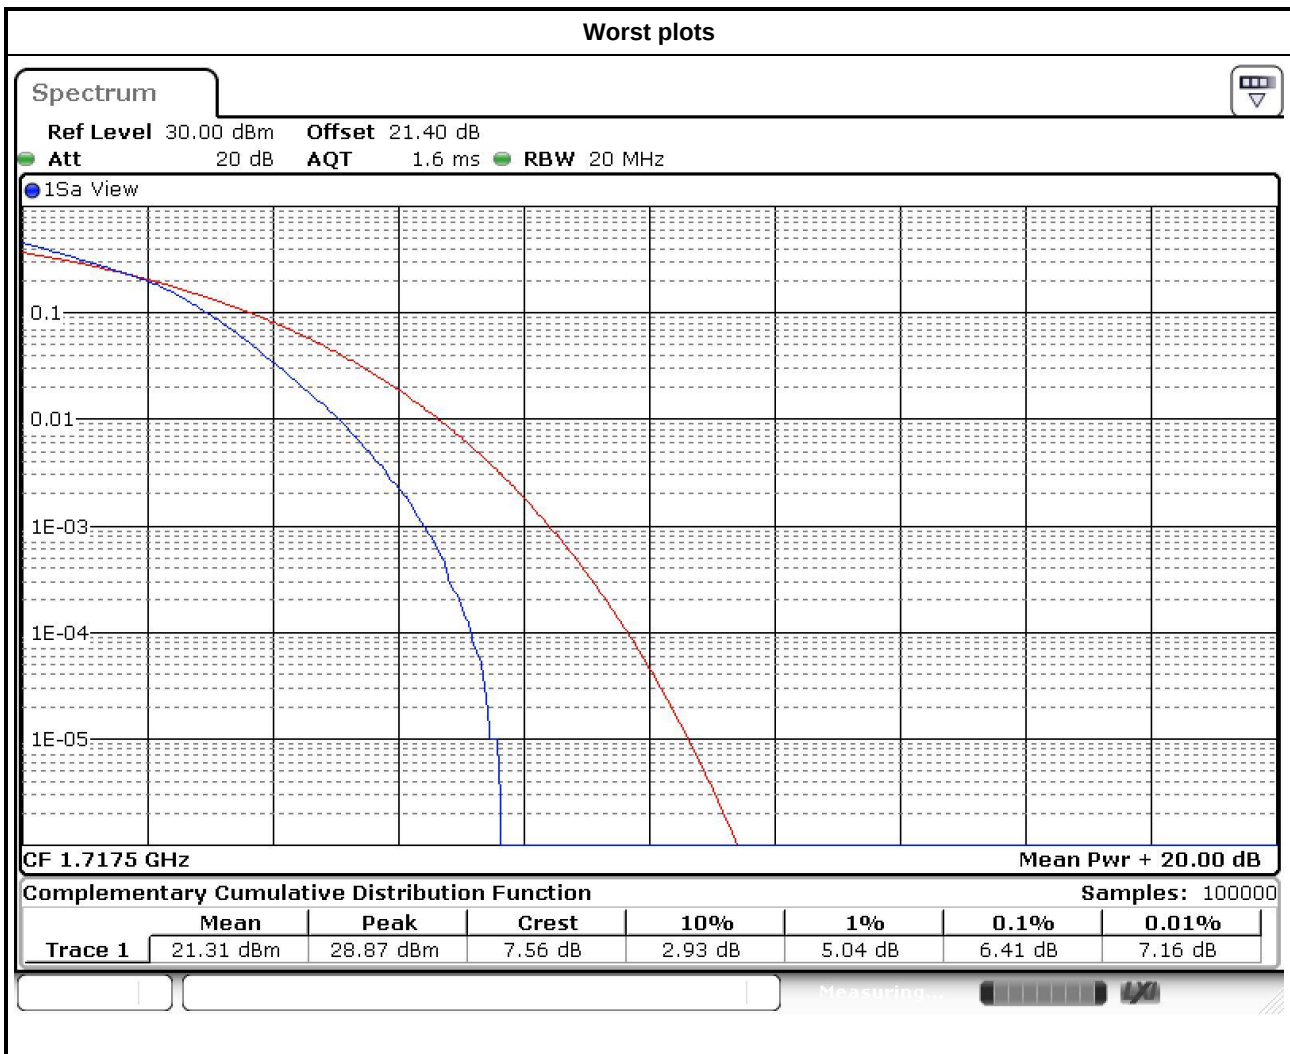

Mode	CB (MHz)	Modulation	Channel	Frequency (MHz)	Peak to Average ratio (dB)
LTE Band 4	20	QPSK	20050	1720.0	5.48
LTE Band 4	20	QPSK	20175	1732.5	5.16
LTE Band 4	20	QPSK	20300	1745.0	5.25
LTE Band 4	20	16QAM	20050	1720.0	6.41
LTE Band 4	20	16QAM	20175	1732.5	6.17
LTE Band 4	20	16QAM	20300	1745.0	6.23

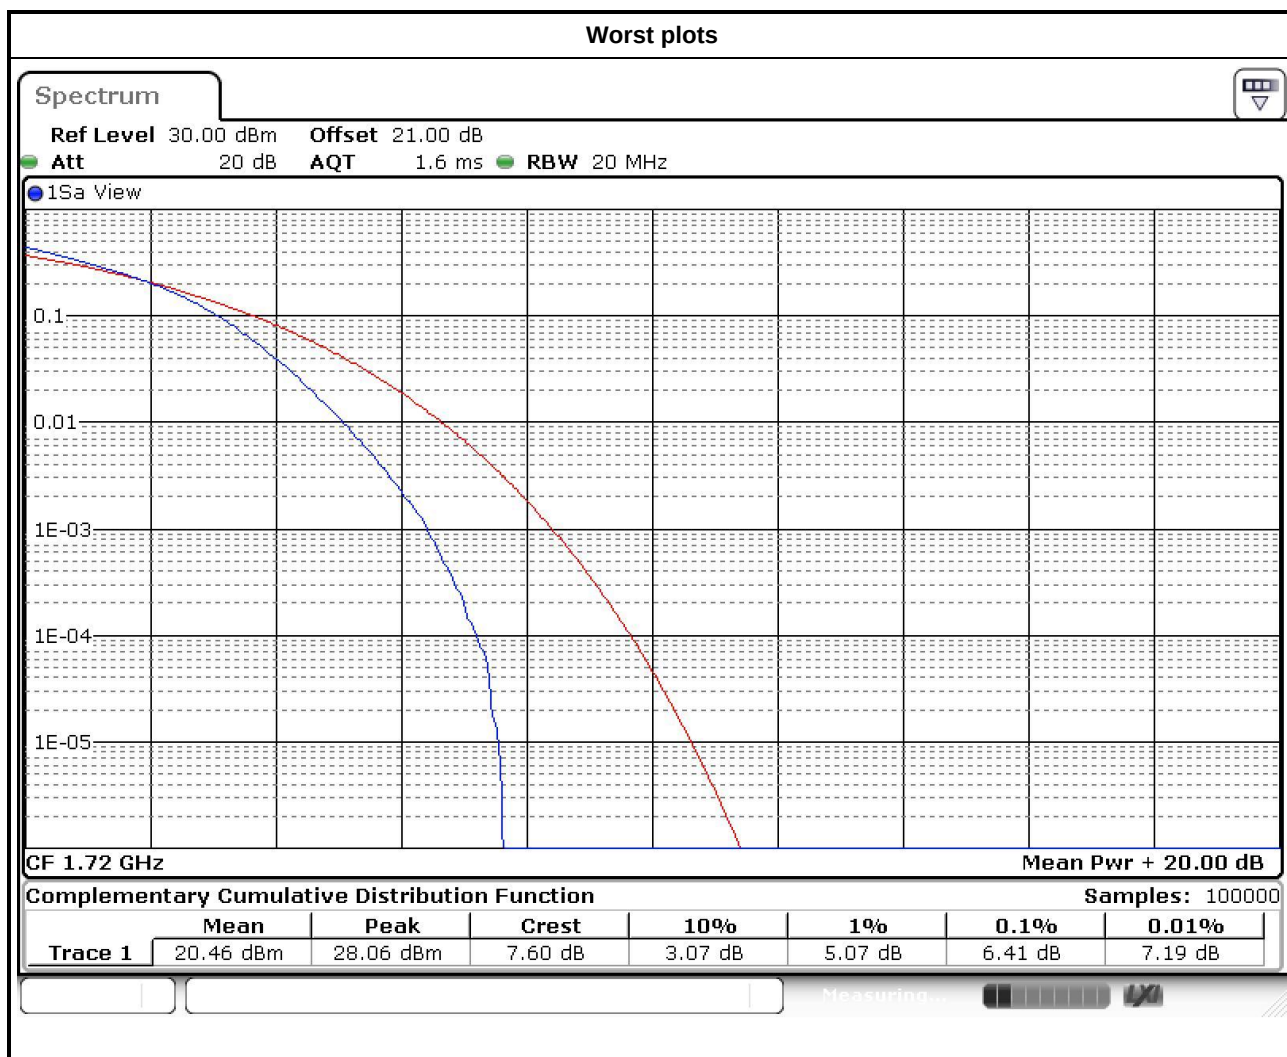

3.7 Frequency Stability


3.7.1 Limit of Frequency Stability

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

3.7.2 Test Procedures

1. EUT was placed at temperature chamber and connected to an external power supply.
2. Temperature and voltage condition shall be tested to confirm frequency stability.
3. Temperature range is from -30~55°C and voltage range is from lowest to highest working voltage.
4. Tem Link up EUT and simulator. Confirm frequency drift value of simulator and record it.

3.7.3 Test Setup

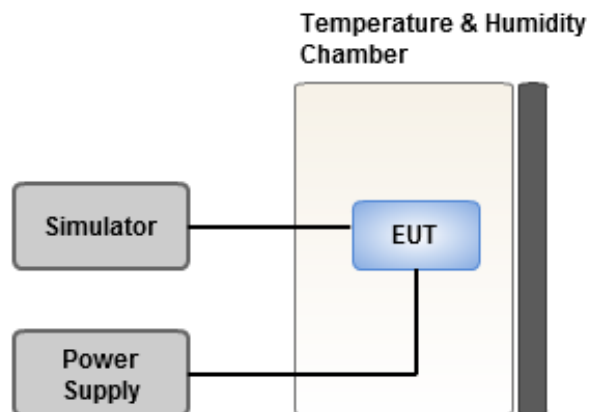

3.7.4 Test Result of Frequency Stability

Temperature (°C)	Voltage (Vdc)	Frequency Drift (ppm)					
		CB:1.4MHz	CB:3MHz	CB:5MHz	CB:10MHz	CB:15MHz	CB:20MHz
55	3.7	0.012	0.013	0.013	0.015	0.014	0.015
50	3.7	0.011	0.012	0.014	0.013	0.012	0.013
40	3.7	0.009	0.012	0.013	0.012	0.012	0.013
30	3.7	0.010	0.011	0.012	0.012	0.011	0.012
20	3.7	0.012	0.013	0.011	0.009	0.010	0.011
10	3.7	0.013	0.010	0.012	0.010	0.010	0.012
0	3.7	0.013	0.012	0.010	0.011	0.012	0.010
-10	3.7	0.012	0.012	0.012	0.013	0.013	0.013
-20	3.7	0.010	0.011	0.012	0.010	0.011	0.012
-30	3.7	0.011	0.013	0.013	0.012	0.012	0.012
20	4.5	0.014	0.013	0.013	0.014	0.014	0.013
20	3.2	0.012	0.013	0.013	0.012	0.013	0.012

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan,
R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd
St., Kwei Shan Hsiang, Tao
Yuan Hsien 333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan Hsiang, Tao
Yuan Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==