



Inter**Lab**[®]

FCC Measurement/Technical Report on

GSM/UMTS PCMCIA Card
GlobeTrotter Express HSUPA E
GE0301

Report Reference: MDE_Opti_0702_FCCx

Test Laboratory:

7 layers AG
Borsigstrasse 11
40880 Ratingen
Germany
email: info@7Layers.de



DAT-P-192/99-01



Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the testing laboratory.

7 layers AG
Borsigstrasse 11
40880 Ratingen, Germany
Phone: +49 (0) 2102 749 0
Fax: +49 (0) 2102 749 350
www.7Layers.com

Aufsichtsratsvorsitzender •
Chairman of the Supervisory Board:
Markus Becker
Vorstand • Board:
Dr. Hans-Jürgen Meckelburg
René Schildknecht

Registergericht • registered in:
Düsseldorf, HRB 44096
USt-IdNr • VAT Nr:
DE 203159652

InterLab[®] is a registered trademark of 7 layers AG



Table of Contents

0	Summary	3
0.1	Technical Report Summary	3
0.2	Measurement Summary	4
1	Administrative Data	5
1.1	Testing Laboratory	5
1.2	Project Data	5
1.3	Applicant Data	5
1.4	Manufacturer Data	5
2	Testobject Data	6
2.1	General EUT Description	6
2.2	EUT Main components	7
2.3	Ancillary Equipment	7
2.4	EUT Setups	7
2.5	Operating Modes	8
3	Test Results	9
3.1	RF Power Output	9
4	Test Equipment	12
5	Photo Report	15
6	Setup Drawings	18



0 Summary

0.1 Technical Report Summary

Type of Authorization

Certification for a GSM cellular radiotelephone device

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 0 to 19 and Parts 20 to 69 (10-1-06 Edition). The following subparts are applicable to the results in this test report.

Part 2

Subpart J - Equipment Authorization Procedures, Certification

§ 2.1046 Measurement required: RF power output

§ 2.1049 Measurement required: Occupied bandwidth

§ 2.1051 Measurement required: Spurious emissions at antenna terminals

§ 2.1053 Measurement required: Field strength of spurious radiation

§ 2.1055 Measurement required: Frequency stability

§ 2.1057 Frequency spectrum to be investigated

Part 22

Subpart C – Operational and Technical Requirements

§ 22.355 Frequency tolerance

Subpart H – Cellular Radiotelephone Service

§ 22.913 Effective radiated power limits

§ 22.917 Emission limitations for cellular equipment

Summary Test

The EUT complied with all performed tests as listed in chapter 0.2 Measurement Summary.

0.2 Measurement Summary

RF Power Output

The measurement was performed according to FCC §2.1046			10-1-06
OP-Mode	Setup	Port	Final Result
op-mode 1-12	Setup_a01	enclosure	passed
op-mode 1-12	Setup_b01	enclosure	passed
op-mode 1-12	Setup_c01	enclosure	passed

Frequency stability

The measurement was performed according to FCC §2.1055			10-1-06
OP-Mode	Setup	Port	Final Result
			N/P

Spurious emissions at antenna terminals

The measurement was performed according to FCC §2.1051			10-1-06
OP-Mode	Setup	Port	Final Result
			N/P

Field strength of spurious radiation

The measurement was performed according to FCC §2.1053			10-1-06
OP-Mode	Setup	Port	Final Result
			N/P

Emission and Occupied Bandwidth


The measurement was performed according to FCC §2.1049			10-1-06
OP-Mode	Setup	Port	Final Result
			N/P

Band edge compliance

The measurement was performed according to FCC §2.1053			10-1-06
OP-Mode	Setup	Port	Final Result
			N/P

N/P: not performed

As a signalling unit a CMU200 by R&S was used for carrying out the tests. The HSUPA settings of the CMU200 were provided by the customer. The HSUPA software on the CMU200 is a beta version by R&S, version 4x50.



7 layers AG, Borsigstr. 11
40880 Ratingen, Germany
Phone +49 (0)2102 749 0

Responsible for
Accreditation Scope:

J. Luch

Responsible
for Test Report:

A. Pelt



1 Administrative Data

1.1 Testing Laboratory

Company Name: 7 Layers AG
Address Borsigstr. 11
40880 Ratingen
Germany

This facility has been fully described in a report submitted to the FCC and accepted under the registration number 96716 .

The test facility is also accredited by the following accreditation organisation:
- Deutscher Akkreditierungs Rat DAR-Registration no. DAT-P-192/99-01

Responsible for Accreditation Scope: Dipl.-Ing. Bernhard Retka
Dipl.-Ing. Robert Machulec
Dipl.-Ing. Thomas Hoell

Report Template Version: 2006-12-18

1.2 Project Data

Responsible for testing and report: Dipl.-Ing. Andreas Petz
Receipt of EUT: See chapter 2.2
Date of Test(s): 2007-07-02 to 2007-07-11
Date of Report: 2007-07-11

1.3 Applicant Data

Company Name: Option NV
Address: Gaston Geenslaan 14
3001 Leuven
Belgium
Contact Person: Mr. Lodeweyckx

1.4 Manufacturer Data

Company Name: please see applicant data
Address:
Contact Person:

2 Testobject Data

2.1 General EUT Description

Equipment under Test:	GSM/UMTS PCMCIA Card
Type Designation:	GlobeTrotter Express HSUPA E, GE0301
Kind of Device: (optional)	GSM 850/900/1800/1900 + UTRA FDD I/II/V including HSDPA + HSUPA
Voltage Type:	DC
Nominal Voltage:	3.5 V
Maximum Voltage:	3.5 V
Minimum Voltage:	3.15 V

General product description:

The Equipment under Test (EUT) is a data card that supports GSM/EDGE 850/900/1800/1900 and FDD I, II and V with HSDPA and HSUPA. The manufacturer declared that nominal voltage is equal to high voltage.

In GSM 850 mode the EUT operates in channel blocks A and B from 824.2 MHz (lowest channel = 128) to 848.8 MHz (highest channel = 251).

The EUT provides the following ports:

Ports

antenna connector
enclosure

The main components of the EUT are listed and described in Chapter 2.2



2.2 EUT Main components

Type, S/N, Short Descriptions etc. used in this Test Report

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status	Date of Receipt
EUT A (Code: 37230s14) Remark: EUT is equipped with an integral antenna (gain= -2.11 dBD = 0.03 dBi -2.14) and a permanent antenna connector	GlobeTrotter Express HSUPA E	GE0301	EE4473E070	4.0	2.6.1	2007-07-02

NOTE: The short description is used to simplify the identification of the EUT in this test report.

2.3 Ancillary Equipment

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	HW Status	SW Status	Serial no.	FCC ID
AE1	Laptop, Fujitsu Siemens	LifeBook C1410	-	-	YK5T053779	-
AE2	Laptop, Maxdata	Eco 4200x	-	-	G06621200 08	-
AS3	Laptop, IBM	T 40	-	-	99-CYLXA 03/07	-

2.4 EUT Setups

This chapter describes the combination of EUT's and ancillary equipment used for testing.

Setup No.	Combination of EUTs	Description
setup_a01	EUT A + AE1	PC card inserted into the laptop
setup_b01	EUT A + AE2	PC card inserted into the laptop
setup_c01	EUT A + AE3	PC card inserted into the laptop

2.5 Operating Modes

This chapter describes the operating modes of the EUT's used for testing.

Op. Mode	Description of Operating Modes	Remarks
PCS data call		
op-mode 1	Call established on Traffic Channel (TCH) 128, Carrier Frequency 824.2 MHz	128 is the lowest channel PCS data call
op-mode 2	Call established on Traffic Channel (TCH) 190, Carrier Frequency 836.6 MHz	190 is a mid channel PCS data call
op-mode 3	Call established on Traffic Channel (TCH) 251, Carrier Frequency 848.8 MHz	251 is the highest channel PCS data call
EDGE data call		
op-mode 4	Call established on Traffic Channel (TCH) 128, Carrier Frequency 824.2 MHz	128 is the lowest channel EDGE data call
op-mode 5	Call established on Traffic Channel (TCH) 190, Carrier Frequency 836.6 MHz	190 is a mid channel EDGE data call
op-mode 6	Call established on Traffic Channel (TCH) 251, Carrier Frequency 848.8 MHz	251 is the highest channel EDGE data call
FDD V data call CS mode		
op-mode 7	Call established on Traffic Channel (TCH) 4132, Carrier Frequency 826.4 MHz	4132 is the lowest channel FDD V data call
op-mode 8	Call established on Traffic Channel (TCH) 4183, Carrier Frequency 836.6 MHz	4183 is a mid channel FDD V data call
op-mode 9	Call established on Traffic Channel (TCH) 4233, Carrier Frequency 846.6 MHz	4233 is the highest channel FDD V data call
FDD V data call HSUPA		
op-mode 10	Call established on Traffic Channel (TCH) 4132, Carrier Frequency 826.4 MHz	4132 is the lowest channel FDD V data call HSUPA
op-mode 11	Call established on Traffic Channel (TCH) 4183, Carrier Frequency 836.6 MHz	4183 is a mid channel FDD V data call HSUPA
op-mode 12	Call established on Traffic Channel (TCH) 4233, Carrier Frequency 846.6 MHz	4233 is the highest channel FDD V data call HSUPA

The following parameter sets were provided by the customer:

Parameter set	Mode	Loopback Mode	Rel99 RMC	HSDPA FRC	HSUPA Test	Number of E-DPDCH Channels
For FDD V data call CS mode	Rel99	Test Mode 1	12.2kbps RMC	-	-	-
For FDD V data call HSUPA mode	Rel6 HSUPA	Test Mode 1	12.2kbps RMC	H-Set1	HSUPA Loopback	1

Parameter set	Max UL Data Rate (kb/s)	β_c/β_d	β_{hs}	β_{ed}	CM	Power Class 3 limit
For FDD V data call CS mode	-	8/15	-	-	-	24 (+1.7/-3.7 dB)
For FDD V data call HSUPA mode	242.1	11/15	22/15	1309/225	1	24 (+1.7/-3.7 dB)

3 Test Results

3.1 RF Power Output

Standard FCC Part 22, 10-1-06
Subpart H

The test was performed according to: FCC §2.1046, 10-1-06

3.1.1 Test Description

- 1) The mobile station was placed inside the fully anechoic chamber on a positioning system. The mobile station was coupled via air link to a Digital Communication Tester (R&S CMU200 Digital Communication Tester/base station simulator) which was located outside the chamber for signalling. The measurement distance between the measurement antenna and the mobile station was 3m.
- 2) A call was established on a Traffic Channel (TCH) between the mobile station and the base station simulator.
- 3) A pre-calibration procedure is used so that the readings from the spectrum analyser are corrected and represent directly the equivalent radiated power (related to a half wave dipole) ERP.
- 4) All measurements were performed with a spectrum analyser and the appropriate calibrated antennas
- 5) Important Analyser Settings:
 - Detector: Peak - Maxhold
 - Frequency span: 15 MHz
 - RBW: 5 MHz
 - VBW: 5 MHz
 - Measuring time: coupled
- 6) The measurement was performed in steps:
 - The EUT was rotated in order to find the position of maximum radiated output power. This was performed for both polarisations of the measurement antenna (Vertical + Horizontal) as well as for a horizontal and vertical position of the EUT.
 - At the position of maximum radiated output power the ERP is measured. The measurement time was chosen long enough to allow the trace to stabilize.
- 7) The steps described above were repeated for the different operating modes. The corrected value of the maximum output power (EIRP) is recorded in this test report.

3.1.2 Test Requirements / Limits

§2.1046 Measurements Required: RF Power Output

(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical



characteristics of the output terminals when this test is made shall be stated.

§22.913 Effective radiated power limits

(a) Maximum ERP. ... The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.



3.1.3 Test Protocol

Temperature: 24 °C
Air Pressure: 1015 hPa
Humidity: 39 %

Op. Mode	Setup	Port
see table below	see table below	enclosure

setup	max. output power ERP/dBm	max. power found at operating mode
a01	26.38	1
b01	23.28	3
c01	30.90	1

Remark: none

3.1.4 Test result: RF Power Output

FCC Part 22, Subpart H	Test Setup	Result
	a01	passed
	b01	passed
	c01	passed

4 Test Equipment

EUT Digital Signalling System

Equipment	Type	Serial No.	Manufacturer
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz
Signalling Unit for Bluetooth Spurious Emissions	PTW60	100004	Rohde & Schwarz
Universal Radio Communication Tester	CMU 200	103785	Rohde & Schwarz
Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz

EMI Test System

Equipment	Type	Serial No.	Manufacturer
Comparison Noise Emitter	CNE III	99/016	York
EMI Analyzer	ESI 26	830482/004	Rohde & Schwarz
Signal Generator	SMR 20	846834/008	Rohde & Schwarz

EMI Radiated Auxiliary Equipment

Equipment	Type	Serial No.	Manufacturer
Antenna mast 4m	MA 240	240/492	HD GmbH H. Deisel
Biconical dipole	VUBA 9117	9117108	Schwarzbeck
Broadband Amplifier 18MHz-26GHz	JS4-18002600-32	849785	Miteq
Broadband Amplifier 30MHz-18GHz	JS4-00101800-35	896037	Miteq
Broadband Amplifier 45MHz-27GHz	JS4-00102600-42	619368	Miteq
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01-2 + W38.01-2	Kabel Kusch
Cable "ESI to Horn Antenna"	UFB311A + UFB293C	W18.02-2 + W38.02-2	Rosenberger-Microcoax
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz
Double-ridged horn	HF 906	357357/001	Rohde & Schwarz
High Pass Filter	5HC3500/12750-1.2-KK	200035008	Trilithic
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic
KUEP pre amplifier	Kuep 00304000	001	7layers
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz
Pyramidal Horn Antenna 26.5 GHz	Model 3160-09	9910-1184	EMCO

EMI Conducted Auxiliary Equipment

Equipment	Type	Serial No.	Manufacturer
Cable "LISN to ESI"	RG214	W18.03+W48.03	Huber+Suhner
Two-Line V-Network	ESH 3-Z5	828304/029	Rohde & Schwarz
Two-Line V-Network	ESH 3-Z5	829996/002	Rohde & Schwarz

Auxiliary Test Equipment

Equipment	Type	Serial No.	Manufacturer
Broadband Resist. Power Divider N	1506A / 93459	LM390	Weinschel
Broadband Resist. Power Divider SMA	1515 / 93459	LN673	Weinschel
Digital Multimeter 01	Voltcraft M-3860M	IJ096055	Conrad
Digital Multimeter 02	Voltcraft M-3860M	IJ095955	Conrad
Digital Oscilloscope	TDS 784C	B021311	Tektronix
Fibre optic link Satellite	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver	FO RS232 Link	182-018	Pontis
I/Q Modulation Generator	AMIQ-B1	832085/018	Rohde & Schwarz
Notch Filter ultra stable	WRCA800/960-6E	24	Wainwright
Spectrum Analyzer 9 kHz to 3 GHz	FSP3	838164/004	Rohde & Schwarz
Temperature Chamber	VT 4002	58566002150010	Vötsch
Temperature Chamber	KWP 120/70	59226012190010	Weiss
ThermoHygro Datalogger 03	Opus10 THI (8152.00)	7482	Lufft Mess- und Regeltechnik GmbH

Anechoic Chamber

Equipment	Type	Serial No.	Manufacturer
Air Compressor (pneumatic)			Atlas Copco
Controller	CO 2000	CO2000/328/12470406 /L	Innco innovative constructions GmbH
EMC Camera	CE-CAM/1		CE-SYS
EMC Camera for observation of EUT	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter telephone systems / modem	B84312-C40-B1		Siemens&Matsushita
Filter Universal 1A	B84312-C30-H3		Siemens&Matsushita
Fully/Semi AE Chamber	10.58x6.38x6		Frankonia
Turntable	DS 420S	420/573/99	HD GmbH, H. Deisel
Valve Control Unit (pneum.)	VE 615P	615/348/99	HD GmbH, H. Deisel



*7 layers Bluetooth™ Full RF Test
Solution*

*Bluetooth RF Conformance
Test System TS8960*

Equipment	Type	Serial No.	Manufacturer
10 MHz Reference	MFS	5489/001	Efratom
Power Meter 832025/059	NRVD	832025/059	Rohde & Schwarz
Power Sensor A 832279/013	NRV-Z1	832279/013	Rohde & Schwarz
Power Sensor B 832279/015	NRV-Z1	832279/015	Rohde & Schwarz
Power Supply	E3632A	MY40003776	Agilent
Power Supply	PS-2403D	-	Conrad
RF Step Attenuator 833695/001	RSP	833695/001	Rohde & Schwarz
Rubidium Frequency Normal	MFS	002	Efratom
Signal Analyzer FSIQ26 832695/007	FSIQ26	832695/007	Rohde & Schwarz
Signal Generator 833680/003	SMP 03	833680/003	Rohde & Schwarz
Signal Generator A 834344/002	SMIQ03B	834344/002	Rohde & Schwarz
Signal Generator B 832870/017	SMIQ03B	832870/017	Rohde & Schwarz
Signal Switching and Conditioning Unit	SSCU	338826/005	Rohde & Schwarz
Signalling Unit PTW60 838312/014	PTW60 for TS8960	838312/014	Rohde & Schwarz
System Controller 829323/008	PSM12	829323/008	Rohde & Schwarz

5 Photo Report



Photo 1: EUT (top side)



Photo 2: EUT (bottom side)



Photo 3: EUT (view to antenna connector)

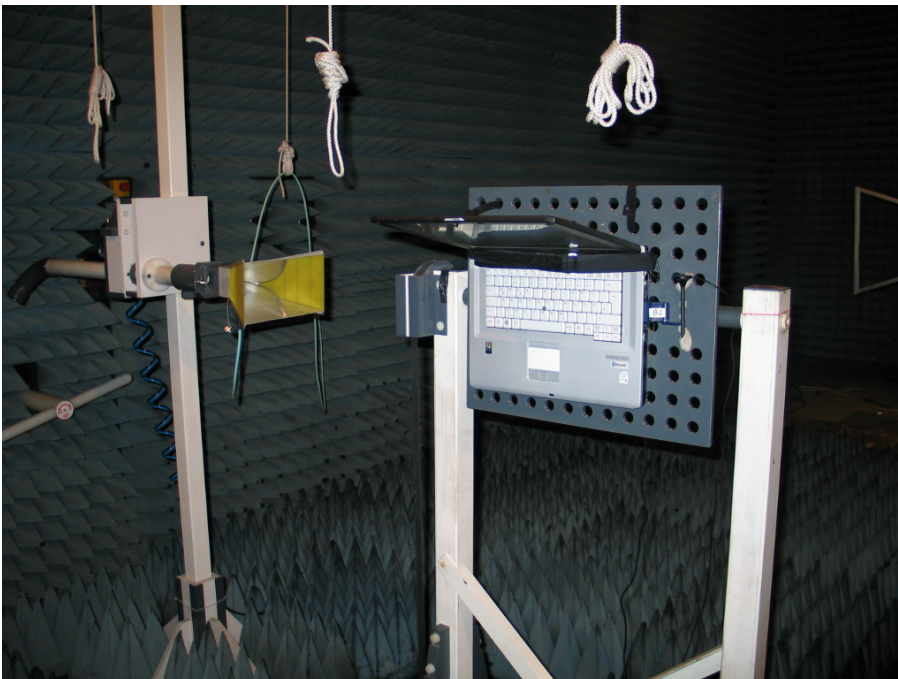


Photo 4: Test setup a01 in the anechoic chamber

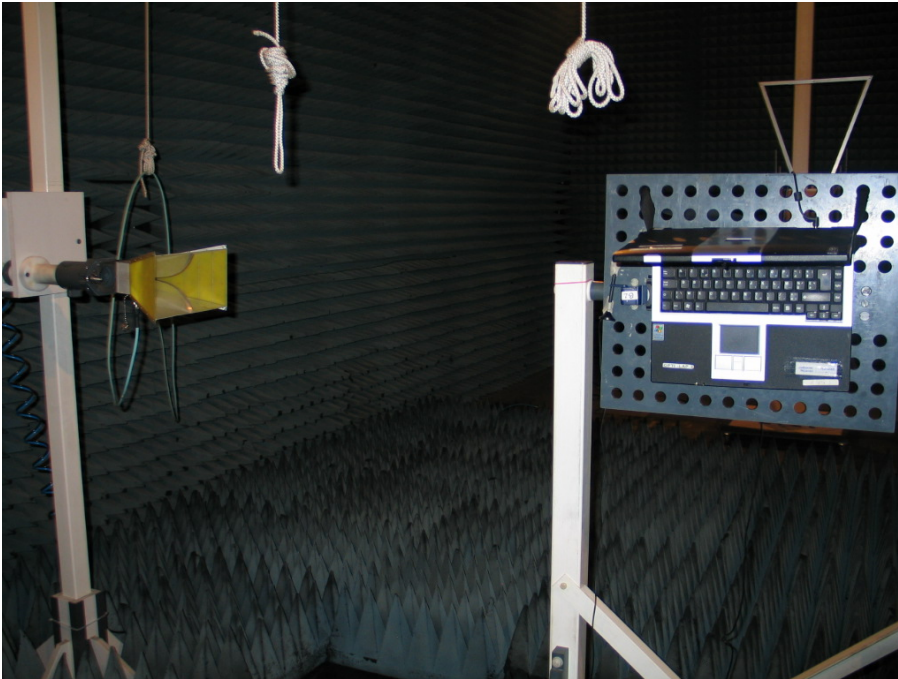


Photo 5: Test setup b01 in the anechoic chamber


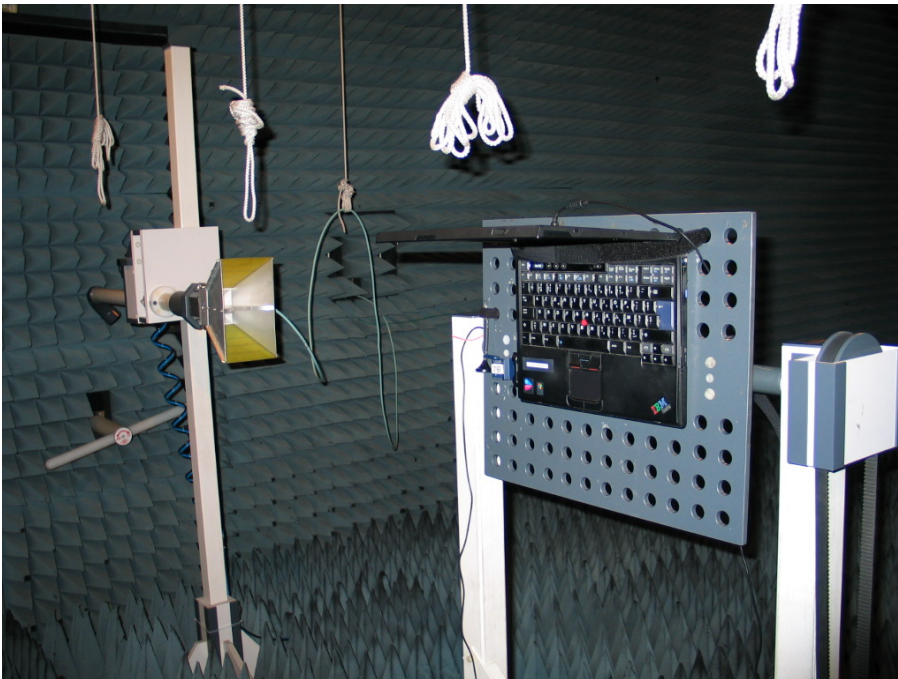


Photo 6: Test setup c01 in the anechoic chamber

6 Setup Drawings

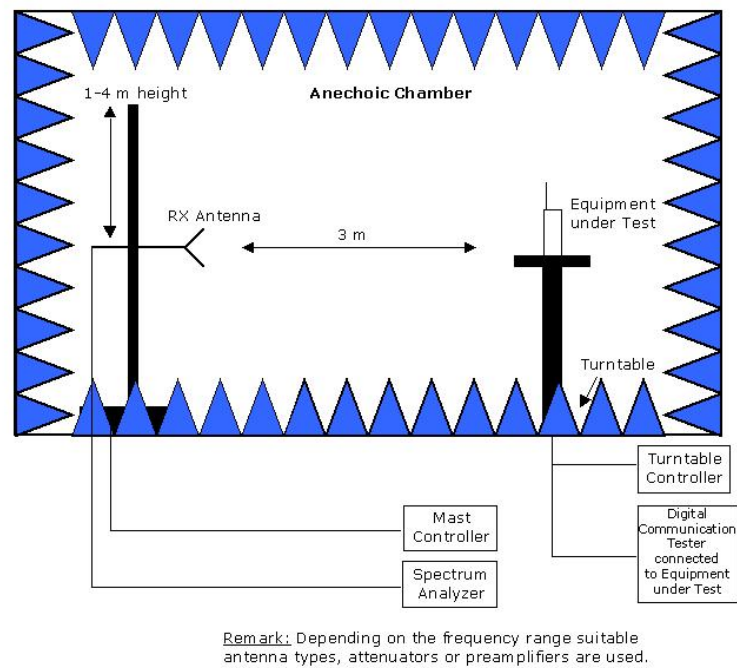

Drawing 1: Principle setup for radiated measurements.