

FCC TEST REPORT

for

47 CFR, Part 15, Subpart C

Equipment : Industrial Radio Remote Controller

Model No. : SAGA1-L8

FCC ID : NCTSAGA1-L8

Filing Type : Certification

Applicant : **GAIN ELECTRONIC CO., LTD.**
4F-1, No. 288-5, Hsin Ya Rd., Chien Chen Zone,
KaoHsiung, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Table of Contents

History of this test report.....	ii
CERTIFICATE OF COMPLIANCE.....	1
1. General Description of Equipment under Test.....	2
1.1. Applicant.....	2
1.2. Manufacturer.....	2
1.3. Basic Description of Equipment under Test.....	2
1.4. Feature of Equipment under Test.....	2
2. Test Configuration of Equipment under Test	3
2.1. Test Manner.....	3
2.2. Description of Test System.....	3
2.3. Connection Diagram of Test System.....	4
2.4. A plot shows the EUT meet the requirement of 15.231(c).....	5
3. Test Software	6
4. General Information of Test	7
4.1. Test Facility	7
4.2. Standard for Methods of Measurement.....	7
4.3. Test in Compliance with.....	7
4.4. Frequency Range Investigated.....	7
4.5. Test Distance.....	7
5. Test of Conducted Powerline.....	8
6. Test of Radiated Emission	9
6.1. Major Measuring Instruments.....	9
6.2. Test Procedures	10
6.3. Typical Test Setup Layout of Radiated Emission	11
6.4. Test Result of Radiated Emission	12
7. Antenna Factor & Cable Loss	24
8. EMI Suppression Component List.....	25
9. List of Measuring Equipments Used	26
10. Uncertainty of Test Site.....	27

History of this test report

Original Report Issue Date: Aug. 06, 2002

☒ No additional attachment.

☐ Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

CERTIFICATE OF COMPLIANCE

for

47 CFR, Part 15, Subpart C

Equipment : Industrial Radio Remote Controller
Model No. : SAGA1-L8
FCC ID : NCTSAGA1-L8
Applicant : **GAIN ELECTRONIC CO., LTD.**
4F-1, No. 288-5, Hsin Ya Rd., Chien Chen Zone,
KaoHsiung, Taiwan, R.O.C.

I **HEREBY** CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 1992** and the energy emitted by this equipment was **passed** both radiated and conducted emission limits. Testing was carried out on Jul. 24, 2002 at **SPORTON International Inc.** LAB.



K. J. Lin
Manager

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1. General Description of Equipment under Test

1.1. Applicant

GAIN ELECTRONIC CO., LTD.
4F-1, No. 288-5, Hsin Ya Rd., Chien Chen Zone,
KaoHsiung, Taiwan, R.O.C.

1.2. Manufacturer

Same as 1.1.

1.3. Basic Description of Equipment under Test

Equipment	: Industrial Radio Remote Controller
Model No.	: SAGA1-L8
FCC ID	: NCTSAGA1-L8
Trade Name	: GAIN ELECTRONIC CO., LTD.
Power Supply Type	: From Battery
Power Cord	: N/A

1.4. Feature of Equipment under Test

- L x W x H: 120 x 55 x 25mm
- Weight: 155g (w/batteries)
- 2 AA size alkaline batteries
- Low power indicator (LED flash red)
- Pushbutton jammed detector
- Shock resistance
- 8pushbuttons with 1-step (Start, Stop, Up, DW, East, West, South, North)
- Normal power consumption: 10mA
- Sleep mode consumption: less 1μA
- Modulation: FM
- Frequency Range: 310MHz ~320MHz

2. Test Configuration of Equipment under Test

2.1. Test Manner

- a. The EUT has been associated with peripherals pursuant to ANSI C63.4-1992 and configuration operated in a manner which tended to maximize its emission characteristics in a typical application.
- b. Frequency range investigated: conduction 450 KHz to 30 MHz, radiation 30 MHz to 3200MHz.
- c. The radiated emissions testing was made by rotating three orthogonal axes.
- d. The EUT employs a switch that will automatically deactivate the transmitter within no more than 5 seconds of being released.
- e. The EUT has no periodic transmission at regular predetermined interval.
- f. According to 15.31 (m) of Part 15, 10MHz frequency range, two locations, one near top (310MHz) and one near bottom (320MHz), were measured.
- g. Pursuant to 15.231(c) of Part 15. Subpart C, the bandwidth of the emission at the 20dB point shall be no wider than 0.25% of the center frequency for EUT.

The carrier frequency of EUT is 310.33MHz

$310.33\text{MHz} * 0.25\% = 775.825\text{KHz}$.

The test result is 620KHz (as shown in section 2.4 of this test report), which is less than 775.825KHz.

The EUT meet the 20dB point bandwidth requirement.

- h. Pursuant to 15.231(c) of Part 15. Subpart C, the bandwidth of the emission at the 20dB point shall be no wider than 0.25% of the center frequency for EUT.

The carrier frequency of EUT is 318.89MHz

$318.89\text{MHz} * 0.25\% = 797.23\text{KHz}$.

The test result is 610KHz (as shown in section 2.4 of this test report), which is less than 797.23KHz.

The EUT meet the 20dB point bandwidth requirement.

2.2. Description of Test System

The EUT was tested alone. No support devices is needed for testing.

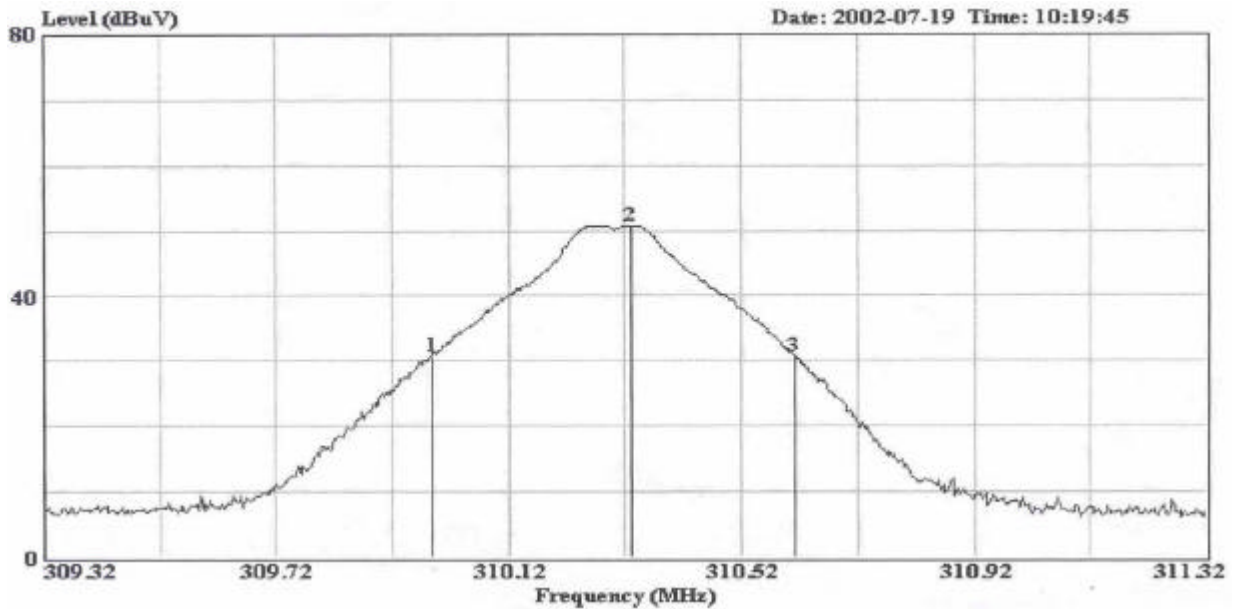
2.3. Connection Diagram of Test System



EUT

2.4. A plot shows the EUT meet the requirement of 15.231(c)

<310.330MHz>



RBW: 120KHz VBW: 300KHz

Mark 1: 309.990MHz

Mark 3: 310.610MHz

20dB bandwidth=310.610-309.990=0.62MHz

<318.890MHz>



RBW: 120KHz VBW: 300KHz

Mark 1: 318.540MHz

Mark 3: 319.150MHz

20dB bandwidth=319.150-318.540=0.61MHz

3. Test Software

No test software was used during testing.

4. General Information of Test

4.1. Test Facility

Test Site Location : No. 52, Hwa Ya 1St Road, Hwa Ya Technology Park,
Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.
TEL : 886-3-3273456
FAX : 886-3-3180055
Test Site No. : SH03

4.2. Standard for Methods of Measurement

ANSI C63.4-1992

4.3. Test in Compliance with

FCC Part 15, Subpart C

4.4. Frequency Range Investigated

- a. Conduction: from 450 kHz to 30 MHz
- b. Radiation: from 30 MHz to 3200 MHz

4.5. Test Distance

The test distance of radiated emission from antenna to EUT is 3 M.

5. Test of Conducted Powerline

The power supply of EUT is from DC voltage.

Conduction Powerline tests is not applicable for this EUT.

6. Test of Radiated Emission

Radiated emissions from 30 MHz to 3200 MHz were measured with a bandwidth of 120 kHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in section 6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

6.1. Major Measuring Instruments

6.1.1. from 30MHz to 1GHz

- Amplifier (ADVANTEST BB525C)
 - Attenuation 10 dB
 - RF Gain 30 dB
 - Signal Input 9KHz – 3GHz
- Spectrum Analyzer (RAHDE&SCHEARZ & FSP7)
 - Attenuation 10 dB
 - Start Frequency 30 MHz
 - Stop Frequency 1000 MHz
 - Resolution Bandwidth 120 kHz
 - Signal Input 9KHz – 7GHz

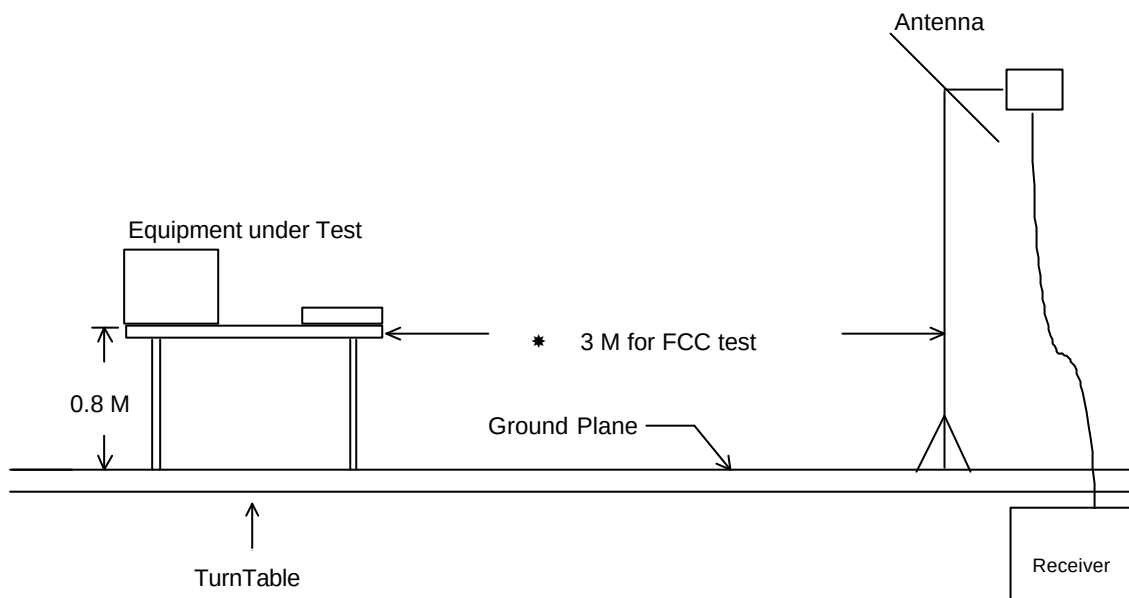
6.1.2. from 1GHz to 3.2GHz

- Horn Antenna (COM-POWER AH-118)
 - Attenuation 10 dB
 - Start Frequency 1000 MHz
 - Stop Frequency 3200 MHz
 - Resolution Bandwidth 1 MHz
 - Video Bandwidth 1 MHz
 - Signal Input 1GHz to 18GHz

6.2. Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was more 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

6.3. Typical Test Setup Layout of Radiated Emission



6.4. Test Result of Radiated Emission

6.4.1. Orthogonal axes: X (310.330MHz)

- Frequency range: 30 ~ 3200MHz
- Test Distance : 3 M
- Temperature : 27.6°C
- Relative Humidity : 57 %
- Test Date : Jul. 19, 2002
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

310.330MHz / 67.03 dBuV (HORIZONTAL) Antenna Height 2 Meter, Turntable Degree 220 °.

- **Spurious Emission**

Remark: The emission emitted by the EUT is too low to be measured

- Field strength of fundamental and harmonics

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits (dBuV/m)	(uV/m)	Emission Level (dBuV/m)	(uV/m)	Margin (dB)	Detect Mode
310.330	H	13.22	3.14	50.67	75.22	5768	67.03	2246.47	-8.19	Peak
621.700	H	18.81	4.54	14.94	55.22	577	38.29	82.13	-16.93	Peak
932.100	H	20.37	5.43	16.53	55.22	577	42.33	130.77	-12.89	Peak
1242.430	H									Peak, A.V.
1550.000	H	27.12	4.10	4.73	54.00	501	35.95	62.73	-18.05	Peak
1860.000	H	28.86	4.52	6.93	55.22	577	40.31	103.63	-14.91	Peak
2170.330	H						-			Peak, A.V.
2484.000	H	30.01	5.28	5.69	54.00	501	40.98	111.94	-13.02	Peak
310.330	V	13.22	3.14	36.35	75.22	5768	52.71	432.02	-22.51	Peak
618.790	V	18.78	4.52	16.59	55.22	577	39.89	98.74	-15.33	Peak
932.100	V	20.37	5.43	12.94	55.22	577	38.74	86.50	-16.48	Peak
1242.330	V						-			Peak, A.V.
1550.000	V	27.12	4.10	7.38	54.00	501	38.60	85.11	-15.40	Peak
1860.000	V	28.86	4.52	7.03	55.22	577	40.41	104.83	-14.81	Peak
2172.000	V	30.71	4.92	3.10	55.22	577	38.73	86.40	-16.49	Peak
2484.000	V	30.01	5.28	5.37	54.00	501	40.66	107.89	-13.34	Peak
2794.330	H/V						-			Peak, A.V.
3104.660	H/V						-			Peak, A.V.

Remark " - ": The emission emitted by the EUT is too low to be measured except the emission listed above,

Test Engineer : Wayne Hsu
Wayue Hsu

6.4.2. Orthogonal axes: Y (310.330MHz)

- Frequency range: 30 ~ 3200MHz
- Test Distance : 3 M
- Temperature : 27.6°C
- Relative Humidity : 57%
- Test Date : Jul. 19, 2002
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

310.330MHz / 66.61 dBuV (HORIZONTAL) Antenna Height 1.1 Meter, Turntable Degree 360 °.

- **Spurious Emission**


Remark: The emission emitted by the EUT is too low to be measured

- Field strength of fundamental and harmonics

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits (dBuV/m)	(uV/m)	Emission Level (dBuV/m)	(uV/m)	Margin (dB)	Detect Mode
310.330	H	13.22	3.14	50.25	75.22	5768	66.61	2140.42	-8.61	Peak
618.790	H	18.78	4.52	17.54	55.22	577	40.84	110.15	-14.38	Peak
932.100	H	20.37	5.43	18.38	55.22	577	44.18	161.81	-11.04	Peak
1242.430	H									Peak, A.V.
1550.000	H	27.12	4.10	5.33	54.00	501	36.55	67.22	-17.45	Peak
1860.000	H	28.86	4.52	7.46	55.22	577	40.84	110.15	-14.38	Peak
2170.330	H						-			Peak, A.V.
2484.000	H	30.01	5.28	10.78	54.00	501	46.07	201.14	-7.93	Peak
2794.330	H						-			Peak, A.V.
310.330	V	13.22	3.14	39.07	75.22	5768	55.43	590.88	-19.79	Peak
621.700	V	18.81	4.54	16.15	55.22	577	39.50	94.41	-15.72	Peak
932.100	V	20.37	5.43	10.92	55.22	577	36.72	68.55	-18.50	Peak
1242.430	V						-			Peak, A.V.
1550.000	V	27.12	4.10	10.85	54.00	501	42.07	126.91	-11.93	Peak
1860.000	V	28.86	4.52	11.85	55.22	577	45.23	182.60	-9.99	Peak
2172.000	V	30.71	4.92	5.48	55.22	577	41.11	113.63	-14.11	Peak
2484.000	V	30.01	5.28	4.11	54.00	501	39.40	93.33	-14.60	Peak
2796.000	V	29.76	5.64	4.19	54.00	501	39.59	95.39	-14.41	Peak
3106.330	H/V						-			Peak, A.V.

Remark " - ": The emission emitted by the EUT is too low to be measured except the emission listed above,

Test Engineer :


Wayue Hsu

6.4.3. Orthogonal axes: Z (310.330MHz)

- Frequency range: 30 ~ 3200MHz
- Test Distance : 3 M
- Temperature : 27.6°C
- Relative Humidity : 57 %
- Test Date : Jul. 19, 2002
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

310.330MHz / 64.75 dBuV (VERTICAL) Antenna Height 1.1 Meter, Turntable Degree 360 °.

- **Spurious Emission**

Remark: The emission emitted by the EUT is too low to be measured

- Field strength of fundamental and harmonics

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits (dBuV/m)	(uV/m)	Emission Level (dBuV/m)	(uV/m)	Margin (dB)	Detect Mode
310.330	H	13.22	3.14	37.13	75.22	5768	53.49	472.61	-21.73	Peak
618.790	H	18.78	4.52	12.04	55.22	577	35.34	58.48	-19.88	Peak
932.100	H	20.37	5.43	12.58	55.22	577	38.38	82.99	-16.84	Peak
1242.430	H						-			Peak, A.V.
1550.000	H	27.12	4.10	8.80	54.00	501	40.02	100.23	-13.98	Peak
1860.000	H	28.86	4.52	8.14	55.22	577	41.52	119.12	-13.70	Peak
2172.000	H	30.71	4.92	3.19	55.22	577	38.82	87.30	-16.40	Peak
2484.000	H	30.01	5.28	4.39	54.00	501	39.68	96.38	-14.32	Peak
310.330	V	13.22	3.14	48.39	75.22	5768	64.75	1727.83	-10.47	Peak
621.700	V	18.81	4.54	20.82	55.22	577	44.17	161.62	-11.05	Peak
932.100	V	20.37	5.43	15.46	55.22	577	41.26	115.61	-13.96	Peak
1242.430	V						-			Peak, A.V.
1550.000	V	27.12	4.10	5.39	54.00	501	36.61	67.69	-17.39	Peak
1860.000	V	28.86	4.52	7.05	55.22	577	40.43	105.08	-14.79	Peak
2172.000	V	30.71	4.92	3.63	55.22	577	39.26	91.83	-15.96	Peak
2484.000	V	30.01	5.28	7.87	54.00	501	43.16	143.88	-10.84	Peak
2794.330	H/V						-			Peak, A.V.
3104.660	H/V						-			Peak, A.V.

Remark " - ": The emission emitted by the EUT is too low to be measured except the emission listed above,

Test Engineer : Wayue Hsu
Wayue Hsu

6.4.4. Orthogonal axes: X (318.890MHz)

- Frequency range: 30 ~ 3200MHz
- Test Distance : 3 M
- Temperature : 27.6°C
- Relative Humidity : 57 %
- Test Date : Jul. 23, 2002
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

318.890MHz / 65.12 dBuV (HORIZONTAL) Antenna Height 2.5 Meter, Turntable Degree 190 °.


- **Spurious Emission**

Remark: The emission emitted by the EUT is too low to be measured

- Field strength of fundamental and harmonics

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits (dBuV/m) (uV/m)	Emission Level (dBuV/m) (uV/m)	Margin (dB)	Detect Mode
318.890	H	13.47	3.19	48.46	75.85 6202	65.12 1803.02	-10.73	Peak
637.220	H	18.97	4.65	13.98	55.85 620	37.60 75.86	-18.25	Peak
956.350	H	20.49	5.58	18.68	55.85 620	44.75 172.78	-11.10	Peak
1276.000	H	26.41	3.70	3.99	55.85 620	34.10 50.70	-21.75	Peak
1590.000	H	27.08	4.15	3.37	54.00 501	34.60 53.70	-19.40	Peak
1910.000	H	29.70	4.59	6.52	55.85 620	40.81 109.77	-15.04	Peak
2231.910	H					-		Peak, A.V.
2550.000	H	29.95	5.35	3.75	54.00 501	39.05 89.64	-14.95	Peak
2868.890	H					-		Peak, A.V.
3179.780	H					-		Peak, A.V.
318.890	V	13.47	3.19	35.49	75.85 6202	52.15 405.04	-23.70	Peak
637.220	V	18.97	4.65	15.97	55.85 620	39.59 95.39	-16.26	Peak
956.350	V	20.49	5.58	13.82	55.85 620	39.89 98.74	-15.96	Peak
1275.240	V					-		Peak, A.V.
1590.000	V	27.08	4.15	5.36	54.00 501	36.59 67.53	-17.41	Peak
1910.000	V	29.70	4.59	5.81	55.85 620	40.10 101.16	-15.75	Peak
1871.660	V					-		Peak, A.V.
2228.890	V					-		Peak, A.V.
2547.780	V					-		Peak, A.V.
2866.670	V					-		Peak, A.V.

Remark " - ": The emission emitted by the EUT is too low to be measured except the emission listed above,

Test Engineer : 
Wayue Hsu

6.4.5. Orthogonal axes: Y (318.890MHz)

- Frequency range: 30 ~ 3200MHz
- Test Distance : 3 M
- Temperature : 27.6°C
- Relative Humidity : 57%
- Test Date : Jul. 23, 2002
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

637.220 MHz / 44.06 dBuV (VERTICAL) Antenna Height 1.5 Meter, Turntable Degree 180 °.

- **Spurious Emission**

Remark: The emission emitted by the EUT is too low to be measured

- Field strength of fundamental and harmonics

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits (dBuV/m) (uV/m)	Emission Level (dBuV/m) (uV/m)	Margin (dB)	Detect Mode
318.890	H	13.47	3.19	32.20	75.85 6202	48.86 277.33	-26.99	Peak
637.220	H	18.97	4.65	11.64	55.85 620	35.26 57.94	-20.59	Peak
956.350	H	20.49	5.58	11.28	55.85 620	37.35 73.71	-18.50	Peak
1275.240	H					-		Peak, A.V.
1590.000	H	27.08	4.15	3.52	54.00 501	34.75 54.64	-19.25	Peak
1910.000	H	29.70	4.59	6.24	55.85 620	40.53 106.29	-15.32	Peak
2230.000	H	30.58	4.98	3.12	54.00 501	38.68 85.90	-15.32	Peak
2550.000	H	29.95	5.35	7.71	55.85 620	43.01 141.42	-12.84	Peak
318.890	V	13.47	3.19	46.00	75.85 6202	62.66 1358.31	-13.19	Peak
637.220	V	18.97	4.65	20.44	55.85 620	44.06 159.59	-11.79	Peak
956.350	V	20.49	5.58	17.02	55.85 620	43.09 142.72	-12.76	Peak
1270.000	V	26.39	3.69	4.09	55.85 620	34.17 51.11	-21.68	Peak
1590.000	V	27.08	4.15	5.18	54.00 501	36.41 66.15	-17.59	Peak
1910.000	V	29.70	4.59	6.38	55.85 620	40.67 108.02	-15.18	Peak
2230.000	V	30.58	4.98	2.66	54.00 501	38.22 81.47	-15.78	Peak
2548.890	V					-		Peak, A.V.
2868.890	H/V					-		Peak, A.V.
3187.780	H/V					-		Peak, A.V.

Remark " - ": The emission emitted by the EUT is too low to be measured except the emission listed above,

Test Engineer : Wayue Hsu
Wayue Hsu

6.4.6. Orthogonal axes: Z (318.900MHz)

- Frequency range: 30 ~ 3200MHz
- Test Distance : 3 M
- Temperature : 27.6°C
- Relative Humidity : 57 %
- Test Date : Jul. 23, 2002
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

318.890MHz / 65.38 dBuV (HORIZONTAL) Antenna Height 3.2 Meter, Turntable Degree 360 °.


- **Spurious Emission**

Remark: The emission emitted by the EUT is too low to be measured

- Field strength of fundamental and harmonics

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits (dBuV/m)	(uV/m)	Emission Level (dBuV/m)	(uV/m)	Margin (dB)	Detect Mode
318.890	H	13.47	3.19	48.72	75.85	6202	65.38	1857.80	-10.47	Peak
637.220	H	18.97	4.65	16.63	55.85	620	40.25	102.92	-15.60	Peak
956.350	H	20.49	5.58	18.57	55.85	620	44.64	170.61	-11.21	Peak
1276.000	H	26.41	3.70	2.59	55.85	620	32.70	43.15	-23.15	Peak
1590.000	H	27.08	4.15	6.77	54.00	501	38.00	79.43	-16.00	Peak
1910.000	H	29.70	4.59	4.58	55.85	620	38.87	87.80	-16.98	Peak
2230.000	H	30.58	4.98	4.60	54.00	501	40.16	101.86	-13.84	Peak
2548.890	H						-			Peak, A.V.
2867.780	H						-			Peak, A.V.
318.890	V	13.47	3.19	39.13	75.85	6202	55.79	615.89	-20.06	Peak
637.220	V	18.97	4.65	18.66	55.85	620	42.28	130.02	-13.57	Peak
956.350	V	20.49	5.58	13.82	55.85	620	39.89	98.74	-15.96	Peak
1275.240	V						-			Peak, A.V.
1590.000	V	27.08	4.15	5.63	54.00	501	36.86	69.66	-17.14	Peak
1910.000	V	29.70	4.59	10.04	55.85	620	44.33	164.63	-11.52	Peak
2230.000	V	30.58	4.98	2.88	54.00	501	38.44	83.56	-15.56	Peak
2550.000	V	29.95	5.35	4.09	55.85	620	39.39	93.22	-16.46	Peak
2870.000	V	29.70	5.72	2.91	54.00	501	38.33	82.51	-15.67	Peak
3188.890	H/V						-			Peak, A.V.

Remark " - " : The emission emitted by the EUT is too low to be measured except the emission listed above,

Test Engineer : 

Wayue Hsu

7. Antenna Factor & Cable Loss

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30	18.10	0.99
35	16.00	1.07
40	13.29	1.13
45	10.75	1.20
50	8.10	1.26
55	6.40	1.32
60	5.36	1.40
65	4.94	1.41
70	5.19	1.51
75	6.05	1.57
80	6.96	1.60
85	8.04	1.70
90	8.76	1.70
95	9.70	1.75
100	10.30	1.79
110	11.17	1.93
120	11.60	1.95
130	11.23	2.01
140	10.61	2.12
150	10.10	2.20
160	9.20	2.26
170	9.01	2.33
180	8.71	2.40
190	8.80	2.52
200	8.24	2.55
220	8.80	2.64
240	10.72	2.78
260	13.20	2.89
280	12.50	2.98
300	12.96	3.11
320	13.50	3.20
340	13.93	3.25
360	14.39	3.44
380	14.70	3.63
400	15.76	3.50
450	16.35	3.82
500	17.29	4.01
550	18.50	4.16
600	18.43	4.39
650	18.85	4.72
700	18.93	4.71
750	19.75	4.83
800	19.92	5.27
850	20.24	5.22
900	20.30	5.22
950	20.46	5.54
1000	20.80	5.81
1000	24.30	3.28
2000	31.10	4.69
3000	29.60	5.84

8. EMI Suppression Component List

No EMI suppression components.

9. List of Measuring Equipments Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	RAHDE & SCHEARZ	FSP7	838858/039	9KHz – 7GHz	Jan. 07, 2002	Radiation (SH03)
Amplifier	ADVANTEST	BB525C	CH300001	9KHz – 3GHz	Nov. 15, 2001	Radiation (SH03)
Bilog Antenna	SCHAFFNER	CBL61128	2681	30MHz –2GHz	Dec. 23, 2001	Radiation (SH03)
Turn Table	HD	DS 420	420/649/00	0 ~ 360 degree	N/A	Radiation (SH03)
Antenna Mast	HD	MA 240	240/559/00	1 m - 4 m	N/A	Radiation (SH03)
Half-wave dipole antenna	Schwarzbeck	UHAP VHAP	995+99 1024+1024	30MHz - 1GHz	Sep. 27, 2001	Radiation (SH03)
Horn Antenna	COM-POWER	AH-118	10094	1GHz – 18GHz	Apr. 09, 2002	Radiation (SH03)

Calibration Interval of instruments listed above is one year.

10. Uncertainty of Test Site

Uncertainty of Radiated Emission Measurement

Contribution	Probability Distribution	3m
Antenna factor calibration	normal(k=2)	± 1
cable loss calibration	normal(k=2)	± 0.3
RCV/SPA specification	rectangular	± 2
Antenna Directivity	rectangular	± 3
Antenna Factor V.S. Height	rectangular	± 2
Antenna Factor Interpolation for Frequency	rectangular	± 0.25
site imperfection	rectangular	± 2
Mismatch Receiver VSWR $\Gamma_1=0.09$ Antenna VSWR $\Gamma_2=0.67$ Uncertainty= $20\log(1-\Gamma_1*\Gamma_2)$	U-shaped	± 0.54
combined standard uncertainty $U_e(y)$	normal	± 2.7
Measuring uncertainty for a level of confidence of 95% $U=2U_e(y)$	normal (k=2)	± 5.4

$$U = \sqrt{\{(1/2)^2 + (0.3/2)^2 + (2^2 + 0.5^2 + 2^2 + 0.25^2 + 2^2)/3 + (0.54)^2/2\}} = 2.2 \text{ for 10m test distance}$$

$$U = \sqrt{\{(1/2)^2 + (0.3/2)^2 + (2^2 + 3^2 + 2^2 + 0.25^2 + 2^2)/3 + (0.54)^2/2\}} = 2.7 \text{ for 3m test distance}$$

Uncertainty of Conducted Emission Measurement

Contribution	Probability Distribution	150KHz – 30MHz
Cable and I/P attenuator calibration	normal(k=2)	± 0.3
RCV/SPA specification	rectangular	± 2
LISN coupling specification	rectangular	± 1.5
Transducer factor frequency interpolation	rectangular	± 0.2
Mismatch Receiver VSWR $\Gamma_1=0.09$ LISN VSWR $\Gamma_2=0.33$ Uncertainty= $20\log(1-\Gamma_1*\Gamma_2)$	U-shaped	0.2
combined standard uncertainty $U_e(y)$	normal	± 1.66
Measuring uncertainty for a level of confidence of 95% $U=2U_e(y)$	normal (k=2)	± 3.32

$$U = \sqrt{\{(0.3/2)^2 + (2^2 + 1.5^2 + 0.2^2)/3 + (0.2)^2/2\}} = 1.66$$