

FCC RADIO TEST REPORT

according to

47 CFR FCC Part 15 Subpart C § 15.247

Equipment : 802.11g Wireless LAN USB 2.0 Print Server
Model No. : PS-1208UWg / PS-1208MFg / GP-108Ug / GP-08MFg
Brand Name : EDIMAX
Filing Type : New Application
Applicant : EDIMAX TECHNOLOGY CO., LTD.
NO. 3, Wu Chuan 3rd Road, Wu-Ku Industrial Park Taipei
Hsien, Taiwan
FCC ID : NDD9512080801
Manufacturer : EDIMAX TECHNOLOGY CO., LTD.
NO. 3, Wu Chuan 3rd Road, Wu-Ku Industrial Park Taipei
Hsien, Taiwan
Received Date : Jan. 03, 2008
Final Test Date : Feb. 01, 2008
Multiple Listing : Please refer to section 2.7

Statement

Test result included is only for the 802.11b/g part of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



SPORTON International Inc.

6F, No. 106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Table of Contents

1. SUMMARY OF THE TEST RESULT	2
2. GENERAL INFORMATION.....	3
2.1. Product Details	3
2.2. Accessories	3
2.3. Table for Filed Antenna	3
2.4. Table for Carrier Frequencies	3
2.5. Table for Test Modes	4
2.6. Table for Testing Locations	4
2.7. Table for Multiple Listing	4
2.8. Table for Supporting Units.....	5
2.9. Table for Parameters of Test Software Setting	5
2.10. EUT Operation during Test	5
2.11. Test Configurations	6
3. TEST RESULT	8
3.1. AC Power Line Conducted Emissions Measurement.....	8
3.2. Maximum Peak Output Power Measurement.....	14
3.3. Power Spectral Density Measurement.....	16
3.4. 6dB Spectrum Bandwidth Measurement.....	21
3.5. Radiated Emissions Measurement.....	26
3.6. Band Edge Emissions Measurement	46
3.7. Antenna Requirements.....	51
4. LIST OF MEASURING EQUIPMENTS	52
5. TEST LOCATION.....	53
6. TAF CERTIFICATE OF ACCREDITATION	54
APPENDIX A. MAXIMUM PERMISSIBLE EXPOSURE.....	A1 ~ A3
APPENDIX B. TEST PHOTOS	B1 ~ B8
APPENDIX C. PHOTOGRAPHS OF EUT	C1 ~ C11

History of This Test Report

Original Issue Date: Feb. 12, 2008

Report No.: FR810202

☒ No additional attachment.

☐ Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

CERTIFICATE OF COMPLIANCE

according to

47 CFR FCC Part 15 Subpart C § 15.247

Equipment : 802.11g Wireless LAN USB 2.0 Print Server
Model No. : PS-1208UWg / PS-1208MFg /
GP-108Ug / GP-08MFg
Brand Name : EDIMAX
Applicant : EDIMAX TECHNOLOGY CO., LTD.
NO. 3, Wu Chuan 3rd Road, Wu-Ku Industrial Park Taipei
Hsien, Taiwan

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jan. 03, 2008 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.


Wayne Hsu

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
3.1	15.207	AC Power Line Conducted Emissions	Complies	9.74 dB
3.2	15.247(b)(3)	Maximum Peak Conducted Output Power	Complies	11.70 dB
3.3	15.247(e)	Power Spectral Density	Complies	19.47 dB
3.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
3.5	15.247(d)	Radiated Emissions	Complies	1.47 dB
3.6	15.247(d)	Band Edge Emissions	Complies	7.68 dB
3.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	$\pm 2.3\text{dB}$	Confidence levels of 95%
Maximum Peak Conducted Output Power	$\pm 0.8\text{dB}$	Confidence levels of 95%
Power Spectral Density	$\pm 0.5\text{dB}$	Confidence levels of 95%
6dB Spectrum Bandwidth	$\pm 8.5 \times 10^{-8}$	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	$\pm 0.8\text{dB}$	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	$\pm 1.9\text{dB}$	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	$\pm 1.9\text{dB}$	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	$\pm 1.9\text{dB}$	Confidence levels of 95%
Temperature	$\pm 0.7^{\circ}\text{C}$	Confidence levels of 95%
Humidity	$\pm 3.2\%$	Confidence levels of 95%
DC / AC Power Source	$\pm 1.4\%$	Confidence levels of 95%

2. GENERAL INFORMATION

2.1. Product Details

EUT is an 802.11g Wireless LAN USB 2.0 Print Server with IEEE 802.11b/g radio functions. Only the radio detail of WLAN is shown in the table below. For more detailed features description, please refer to the manufacturer's specifications or user's manual.

Items	Description
Power Type	5V from adapter
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11
Channel Band Width (99%)	11b: 11.80 MHz ; 11g: 16.40 MHz
Conducted Output Power	11b: 18.30 dBm ; 11g: 15.13 dBm

2.2. Accessories

Power	Brand	Model	Rating
TAMURA POWER AC Adapter	TPT	JHA050100UU	INPUT: 100-240V~ 300Ma 50-60Hz OUTPUT: 5V 1A
Others			
N/A			

2.3. Table for Filed Antenna

Ant.	Antenna Type	Connector	Gain (dBi)
1	Dipole Antenna	Reversed-SMA	5.00

2.4. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz		

2.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
AC Power Line Conducted Emissions	LAN Mode / Wireless Mode	Auto	-
Maximum Peak Conducted Output Power	11b/CCK	11 Mbps	1/6/11
Power Spectral Density	11g/BPSK	6 Mbps	1/6/11
6dB Spectrum Bandwidth			
Radiated Emissions 9kHz~1GHz	LAN Mode / Wireless Mode	Auto	-
Radiated Emissions 1GHz~10 th Harmonic	11b/CCK	11 Mbps	1/6/11
	11g/BPSK	6 Mbps	1/6/11
Band Edge Emissions	11b/CCK	11 Mbps	1/6/11
	11g/BPSK	6 Mbps	1/6/11

2.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH02-HY	SAC	Hwa Ya	101377	IC 4086B-1	-
CO01-HY	Conduction	Hwa Ya	101377	IC 4086B-1	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

2.7. Table for Multiple Listing

The brand/model names in the following table are all refer to the identical product.

No.	Brand Name	Model Name
1	Edimax	PS-1208UWg, GP-108Ug PS-1208MFg, GP-08MFg
2	Micronet	SP756W, SP781W
3	Planet	FPS-1010MGV2
4	Sitecom	WL-201, WL-202
5	PCI	Mini-102MG6

2.8. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	D400	DoC
Printer	HP	HP LASERJET 1010	N/A
Mouse	Microsoft	1004	DoC
Modem	ACEEX	DM-1414	IFAXDM1414
AP (Remote Workstation)	D-Link	DNS-G120	DoC
Notebook (Remote Workstation)	DELL	D400	DoC

2.9. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of IEEE 802.11b/g

Test Software Version	IE		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	60	60	60
IEEE 802.11g	55	55	55

2.10. EUT Operation during Test

An executive program, EMCTEST.EXE under WIN XP, which generates a complete line of continuously repeating “H” pattern was used as the test software.

The NB sends “H” messages to the panel, and the panel displays “H” patterns on the screen.

The NB sends “H” messages to the modem.

Executed "ping.exe" to link with the remote workstation to receive and transmit data by LAN and WLAN.


Executed “IE” to keep transmitting signals at fixed frequency.


Executed the MFP Manager program. The “MFP Manager” can automatically find the MFP server in the network and show it in the MFP Server List. Users can select a MFP and click “Connect” to connect the MFP just like you have directly connected the MFP to your computer through USB cable. It also displays the information of the connection status.

2.11. Test Configurations

2.11.1. Radiation Emissions Test Configuration

For radiated emissions 9kHz~1GHz

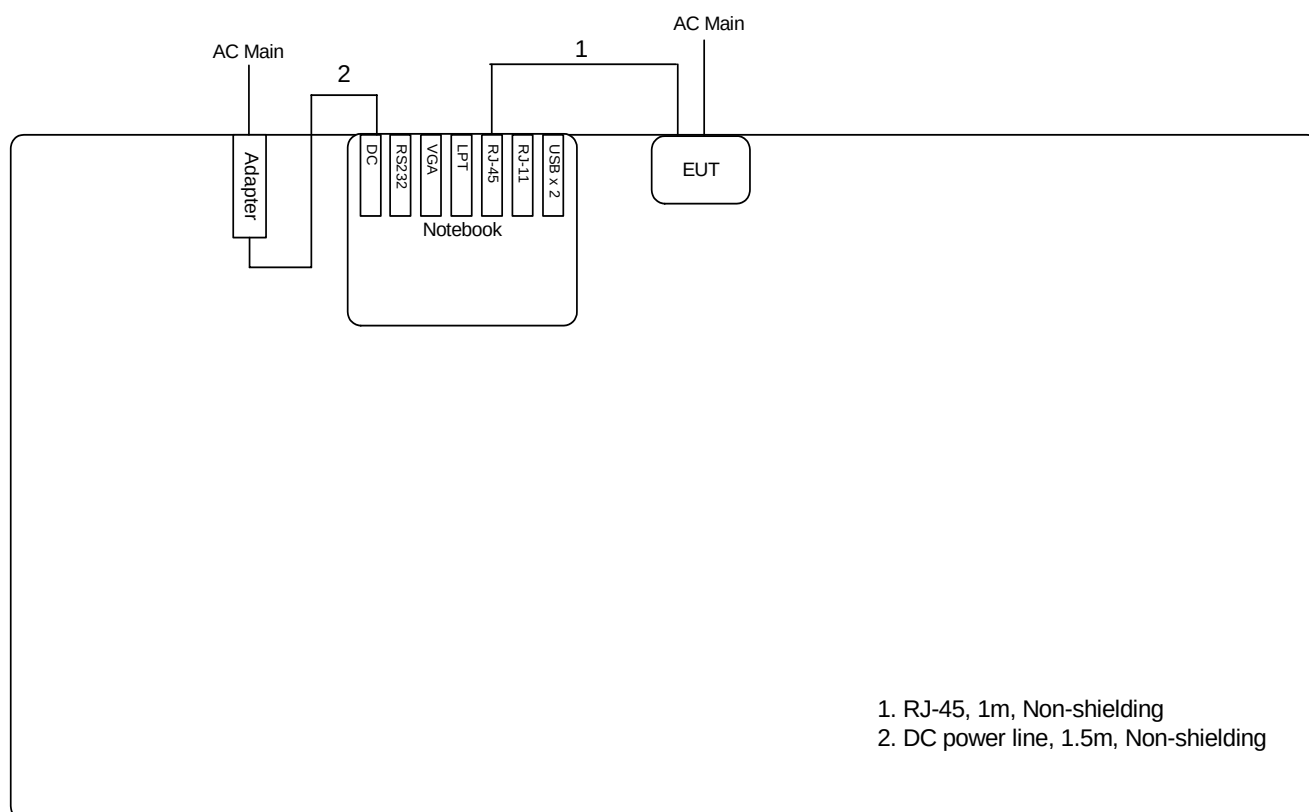

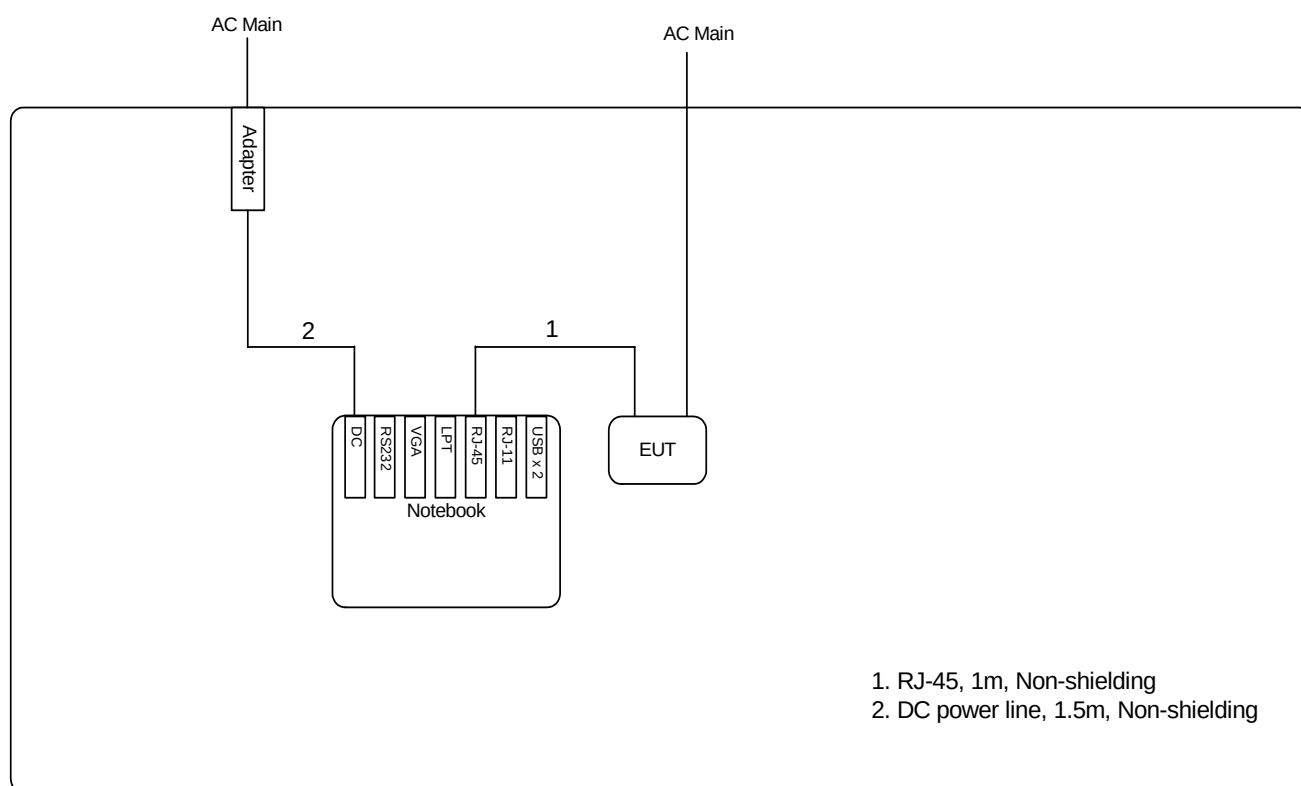For radiated emissions above 1GHz

3. TEST RESULT

3.1. AC Power Line Conducted Emissions Measurement

3.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

3.1.2. Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

3.1.5. Test Deviation


There is no deviation with the original standard.

3.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


3.1.7. Results of AC Power Line Conducted Emissions Measurement

Test date	Feb. 01, 2008	Test Site No.	CO01-HY
Temperature	25°C	Humidity	55%
Test Engineer	Chris	Phase	Line
Configuration	LAN Mode		

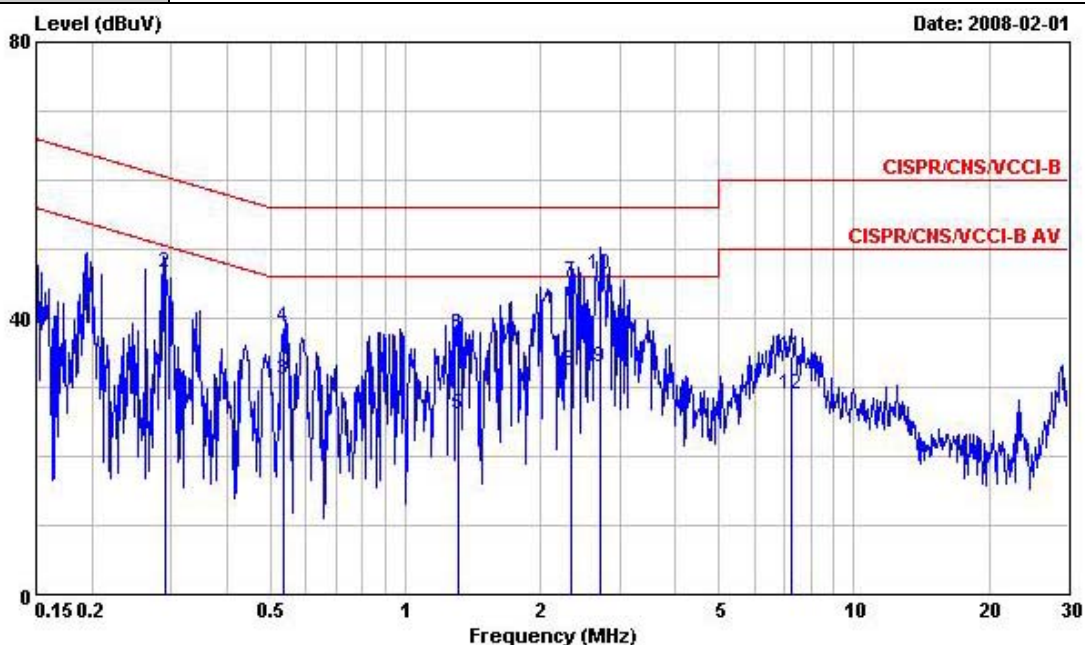

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.2908570	37.12	-13.38	50.50	36.56	0.10	0.46	Average
2	0.2908570	46.57	-13.93	60.50	46.01	0.10	0.46	QP
3	0.5364430	31.16	-14.84	46.00	30.42	0.10	0.64	Average
4	0.5364430	38.58	-17.42	56.00	37.84	0.10	0.64	QP
5	1.310	26.18	-19.82	46.00	25.64	0.10	0.44	Average
6	1.310	37.67	-18.33	56.00	37.13	0.10	0.44	QP
7	2.349	45.14	-10.86	56.00	44.64	0.10	0.40	QP
8	2.349	32.45	-13.55	46.00	31.95	0.10	0.40	Average
9	2.721	33.01	-12.99	46.00	32.53	0.10	0.38	Average
10	2.721	46.26	-9.74	56.00	45.78	0.10	0.38	QP
11	7.250	34.35	-25.65	60.00	33.92	0.17	0.26	QP
12	7.250	28.92	-21.08	50.00	28.49	0.17	0.26	Average

Test date	Feb. 01, 2008	Test Site No.	CO01-HY
Temperature	25°C	Humidity	55%
Test Engineer	Chris	Phase	Neutral
Configuration	LAN Mode		

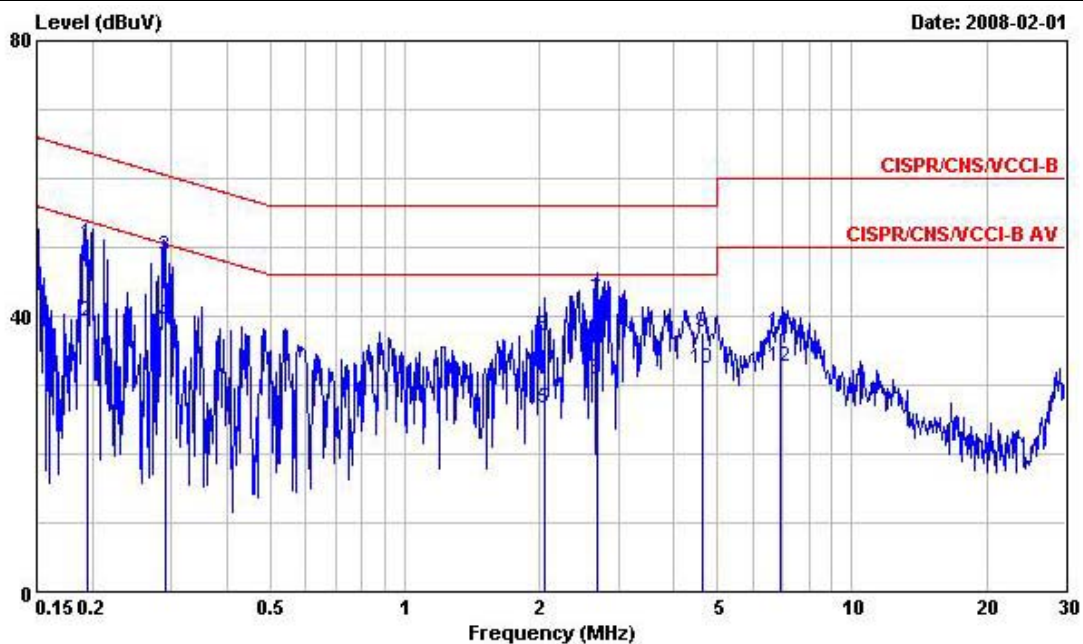


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1956460	50.43	-13.36	63.79	50.19	0.10	0.14	QP
2	0.1956460	39.21	-14.58	53.79	38.97	0.10	0.14	Average
3	0.2910680	48.56	-11.93	60.49	48.00	0.10	0.46	QP
4	0.2910680	38.98	-11.51	50.49	38.42	0.10	0.46	Average
5	2.047	26.69	-19.31	46.00	26.16	0.10	0.43	Average
6	2.047	37.13	-18.87	56.00	36.60	0.10	0.43	QP
7	2.690	42.43	-13.57	56.00	41.91	0.14	0.38	QP
8	2.690	30.67	-15.33	46.00	30.15	0.14	0.38	Average
9	4.650	37.65	-18.35	56.00	37.13	0.22	0.30	QP
10	4.650	32.36	-13.64	46.00	31.84	0.22	0.30	Average
11	6.950	37.74	-22.26	60.00	37.22	0.26	0.26	QP
12	6.950	32.71	-17.29	50.00	32.19	0.26	0.26	Average

Note:


Level = Read Level + LISN Factor + Cable Loss.

Test date	Feb. 01, 2008	Test Site No.	CO01-HY
Temperature	25°C	Humidity	55%
Test Engineer	Chris	Phase	Line
Configuration	Wireless Mode		

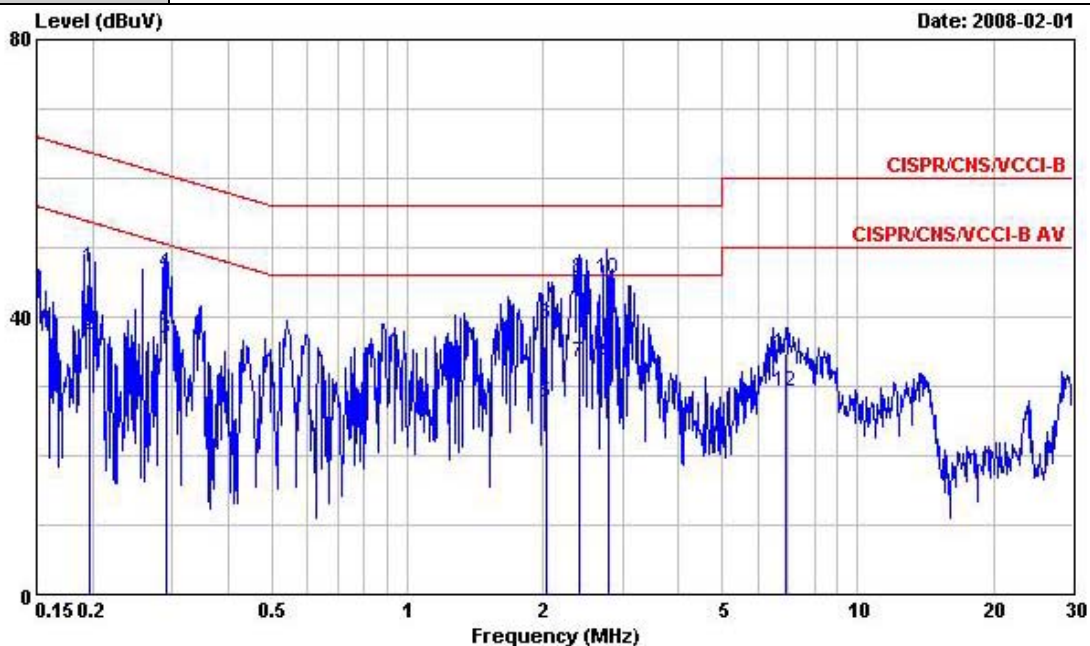

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.1961310	47.21	-16.56	63.77	46.97	0.10	0.14	QP
2	0.1961310	37.35	-16.42	53.77	37.11	0.10	0.14	Average
3	0.2919070	36.85	-13.62	50.47	36.29	0.10	0.46	Average
4	0.2919070	46.35	-14.12	60.47	45.79	0.10	0.46	QP
5	2.039	27.64	-18.36	46.00	27.11	0.10	0.43	Average
6	2.039	39.01	-16.99	56.00	38.48	0.10	0.43	QP
7	2.407	33.33	-12.67	46.00	32.83	0.10	0.40	Average
8	2.407	45.41	-10.59	56.00	44.91	0.10	0.40	QP
9	2.784	33.35	-12.65	46.00	32.87	0.10	0.38	Average
10	2.784	45.64	-10.36	56.00	45.16	0.10	0.38	QP
11	6.910	34.80	-25.20	60.00	34.38	0.16	0.26	QP
12	6.910	29.29	-20.71	50.00	28.87	0.16	0.26	Average

Test date	Feb. 01, 2008	Test Site No.	CO01-HY
Temperature	25°C	Humidity	55%
Test Engineer	Chris	Phase	Neutral
Configuration	Wireless Mode		

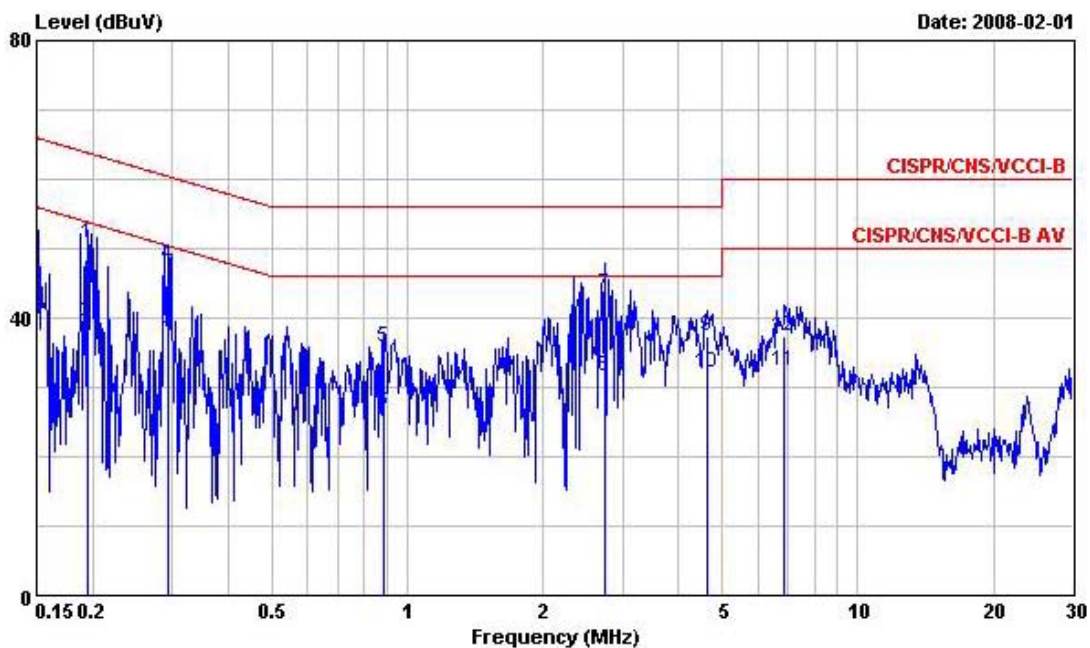

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1954980	50.77	-13.03	63.80	50.53	0.10	0.14	QP
2	0.1954980	39.46	-14.34	53.80	39.22	0.10	0.14	Average
3	0.2937680	38.53	-11.89	50.42	37.96	0.10	0.47	Average
4	0.2937680	47.52	-12.90	60.42	46.95	0.10	0.47	QP
5	0.8837060	35.70	-20.30	56.00	35.12	0.10	0.48	QP
6	0.8837060	26.49	-19.51	46.00	25.91	0.10	0.48	Average
7	2.743	43.34	-12.66	56.00	42.81	0.15	0.38	QP
8	2.743	31.70	-14.30	46.00	31.17	0.15	0.38	Average
9	4.620	37.48	-18.52	56.00	36.96	0.22	0.30	QP
10	4.620	32.23	-13.77	46.00	31.71	0.22	0.30	Average
11	6.880	32.37	-17.63	50.00	31.85	0.26	0.26	Average
12	6.880	37.42	-22.58	60.00	36.90	0.26	0.26	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

3.2. Maximum Peak Output Power Measurement

3.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

3.2.2. Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Filter No.	Auto
Measurement time	0.135 s ~ 26 s
Used Peak Sensor	NRV-Z32 (model 04)

3.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the peak power value.
3. Repeat above procedures on all channels needed to be tested.

3.2.4. Test Setup Layout

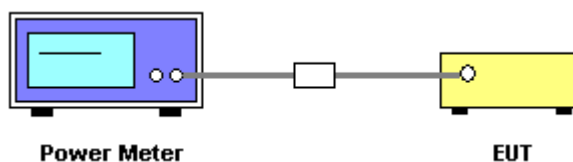

3.2.5. Test Deviation

There is no deviation with the original standard.

3.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.2.7. Test Result of Maximum Peak Output Power

Test date	Jan. 03, 2008	Test Site No.	TH01-HY
Temperature	28°C	Humidity	58%
Test Engineer	Nan	Configurations	802.11b/g

Configuration IEEE 802.11b

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	18.30	30.00	Complies
6	2437 MHz	18.21	30.00	Complies
11	2462 MHz	18.19	30.00	Complies

Configuration IEEE 802.11g

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	15.13	30.00	Complies
6	2437 MHz	15.11	30.00	Complies
11	2462 MHz	15.06	30.00	Complies

3.3. Power Spectral Density Measurement

3.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

3.3.2. Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	1.5MHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	500s

3.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.

3.3.4. Test Setup Layout

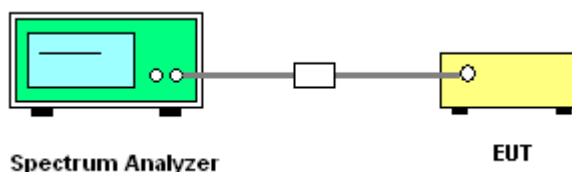

3.3.5. Test Deviation

There is no deviation with the original standard.

3.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.3.7. Test Result of Power Spectral Density

Test date	Jan. 03, 2008	Test Site No.	TH01-HY
Temperature	28°C	Humidity	58%
Test Engineer	Nan	Configurations	802.11b/g


Configuration IEEE 802.11b

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-11.87	8.00	Complies
6	2437 MHz	-11.47	8.00	Complies
11	2462 MHz	-11.85	8.00	Complies

Configuration IEEE 802.11g


Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-18.61	8.00	Complies
6	2437 MHz	-18.19	8.00	Complies
11	2462 MHz	-17.40	8.00	Complies

Power Density Plot on Configuration IEEE 802.11b / 2412 MHz

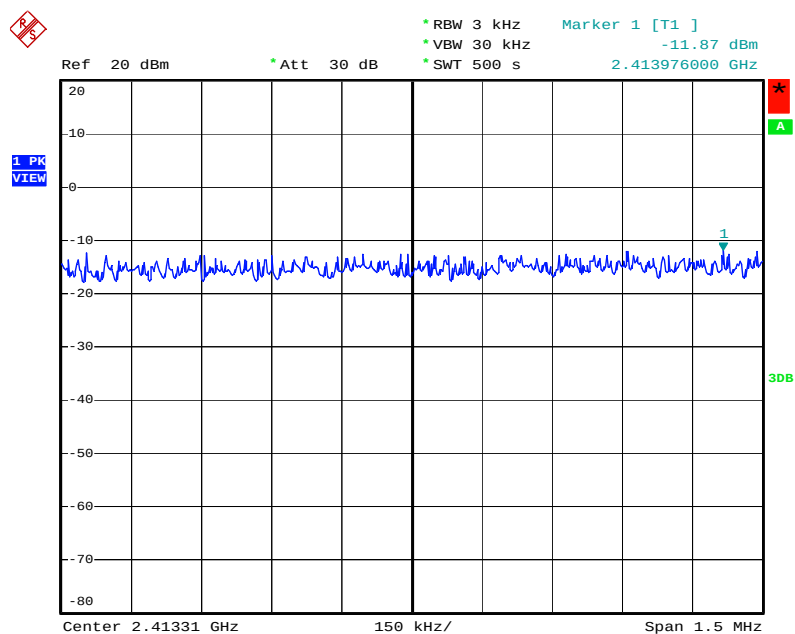


Date: 3.JAN.2008 15:30:34

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz

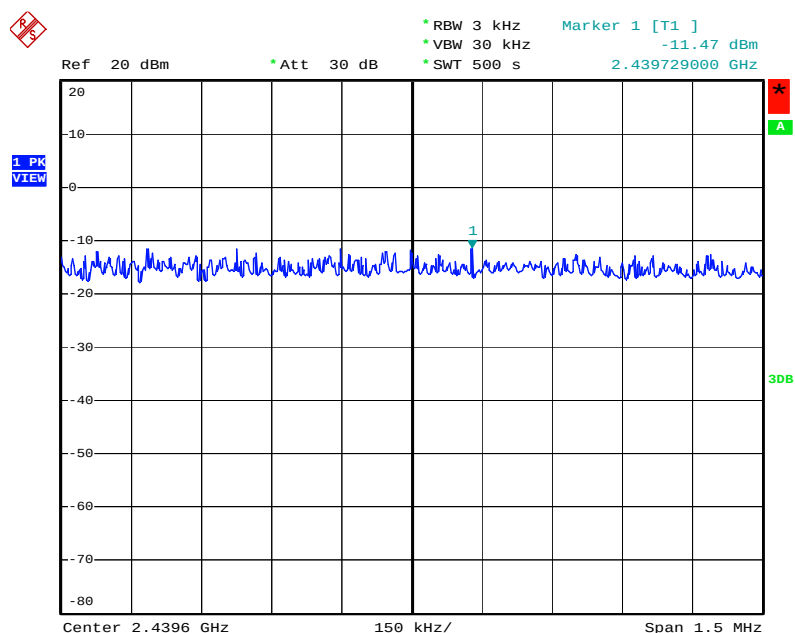


Date: 3.JAN.2008 15:31:26

Power Density Plot on Configuration IEEE 802.11b / 2462 MHz

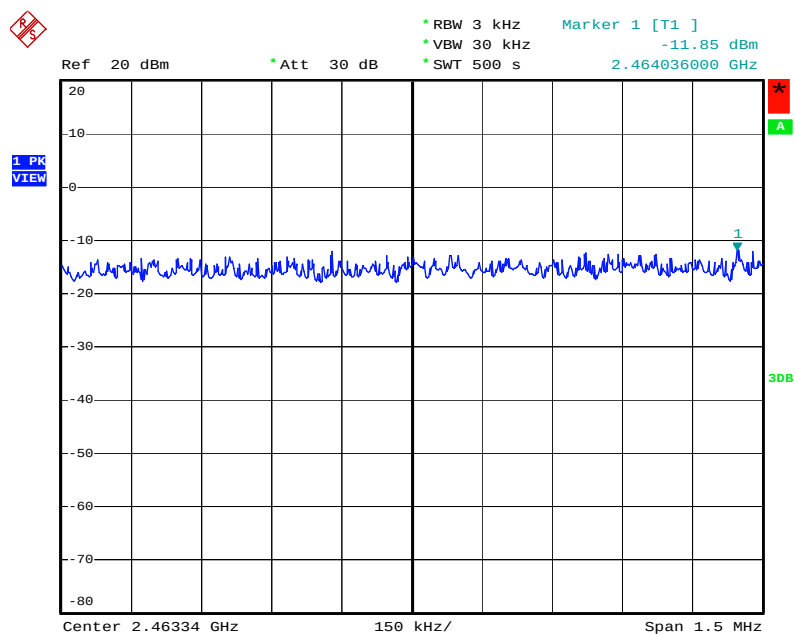


Date: 3.JAN.2008 15:32:12

Power Density Plot on Configuration IEEE 802.11g / 2412 MHz

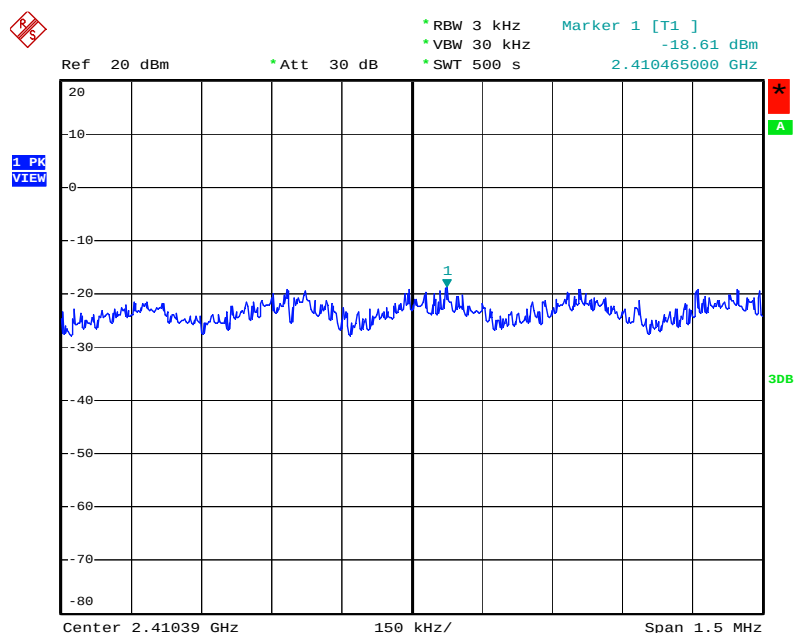


Date: 3.JAN.2008 15:32:57

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz

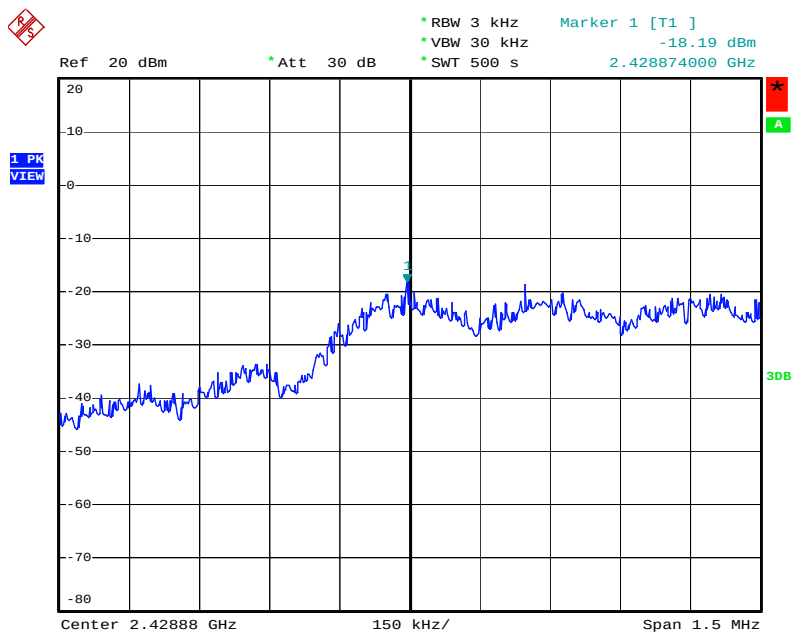

Date: 3.JAN.2008 15:33:43

Power Density Plot on Configuration IEEE 802.11g / 2462 MHz

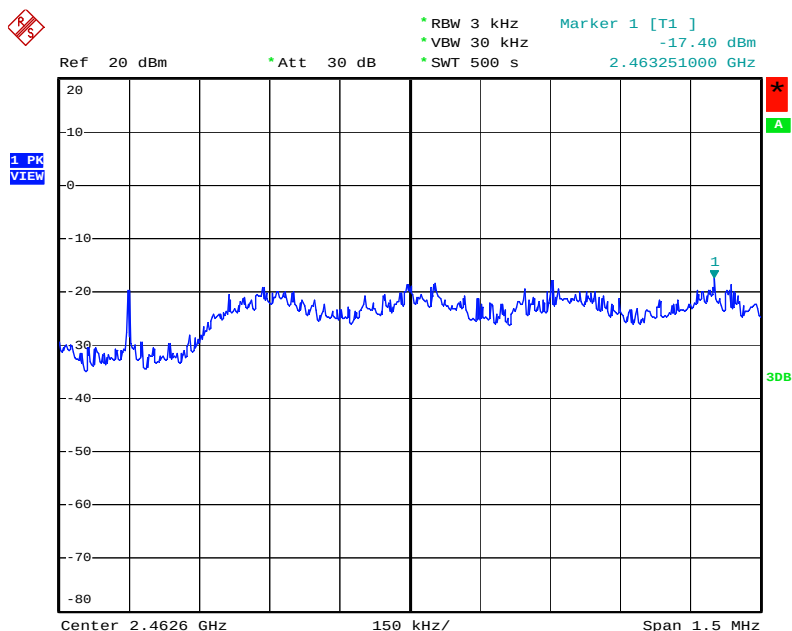

Date: 3.JAN.2008 15:34:30

3.4. 6dB Spectrum Bandwidth Measurement

3.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

3.4.2. Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

3.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.

3.4.4. Test Setup Layout

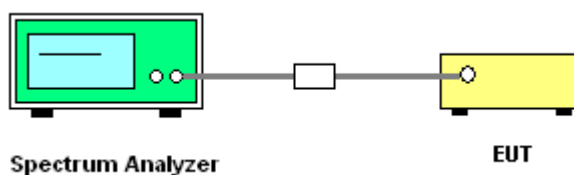

3.4.5. Test Deviation

There is no deviation with the original standard.

3.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.4.7. Test Result of 6dB Spectrum Bandwidth

Test date	Jan. 03, 2008	Test Site No.	TH01-HY
Temperature	28°C	Humidity	58%
Test Engineer	Nan	Configurations	802.11b/g


Configuration IEEE 802.11b

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	10.64	11.80	500	Complies
6	2437 MHz	10.68	11.76	500	Complies
11	2462 MHz	10.68	11.80	500	Complies

Configuration IEEE 802.11g


Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.44	16.40	500	Complies
6	2437 MHz	16.44	16.40	500	Complies
11	2462 MHz	16.44	16.40	500	Complies

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz

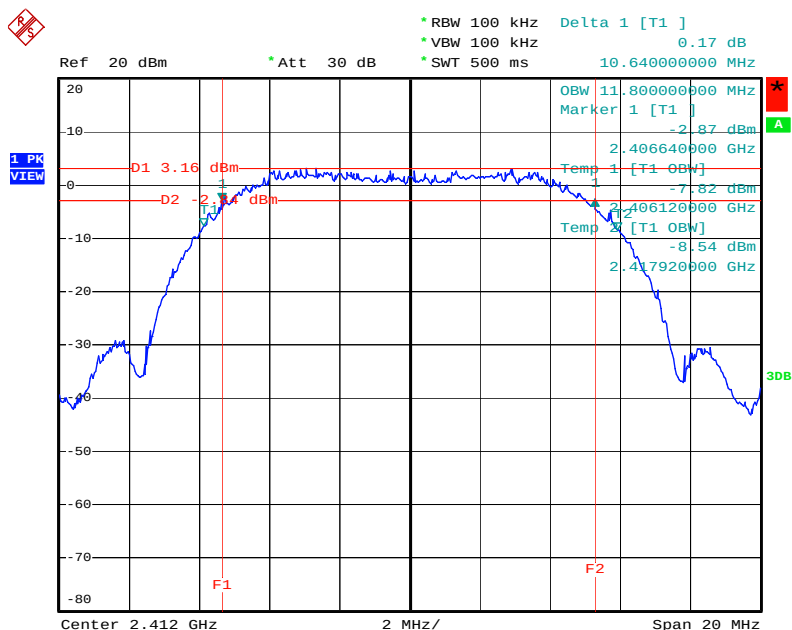


Date: 3.JAN.2008 15:19:12

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz

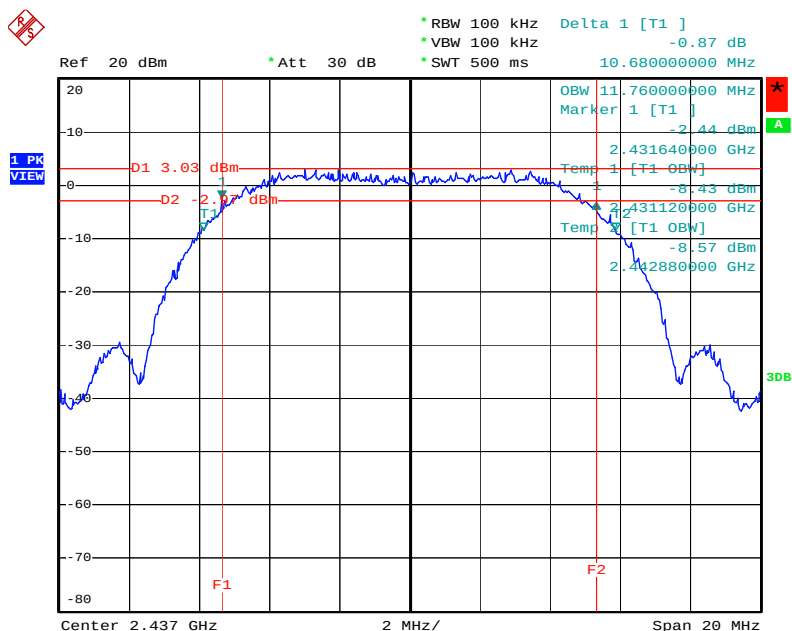


Date: 3.JAN.2008 15:20:44

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz

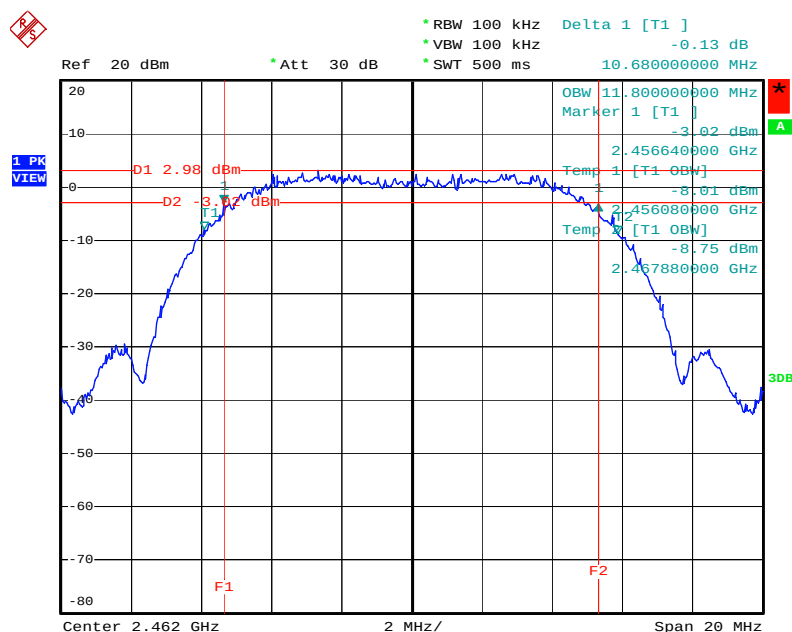


Date: 3.JAN.2008 15:22:00

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz

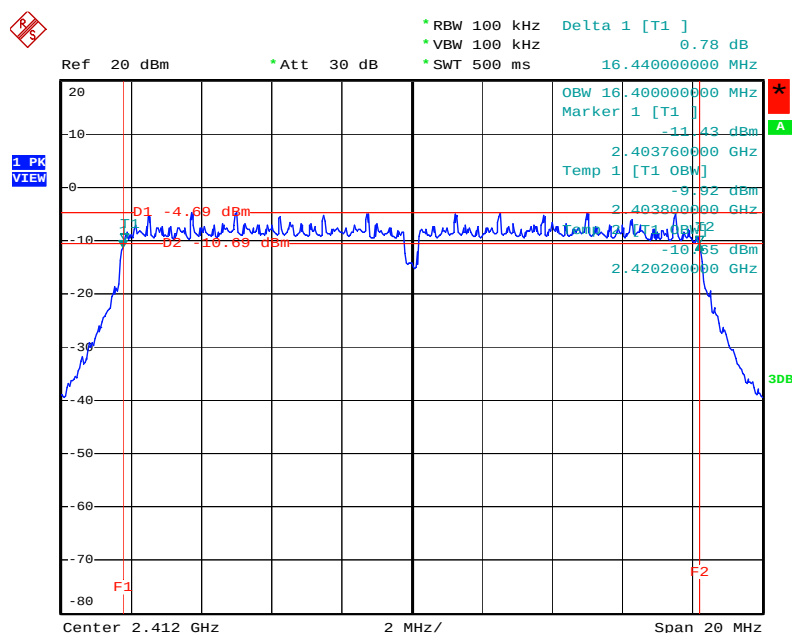


Date: 3.JAN.2008 15:22:55

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz

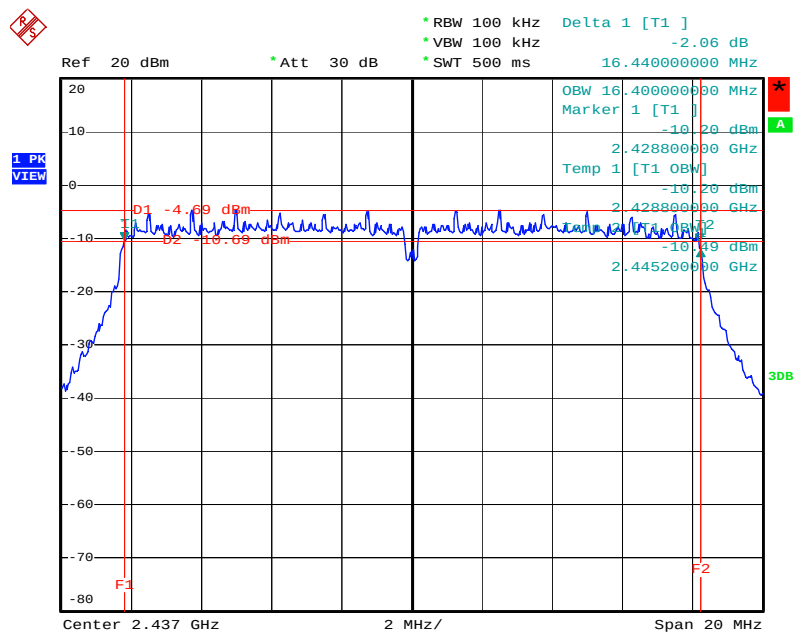

Date: 3.JAN.2008 15:24:07

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2462 MHz

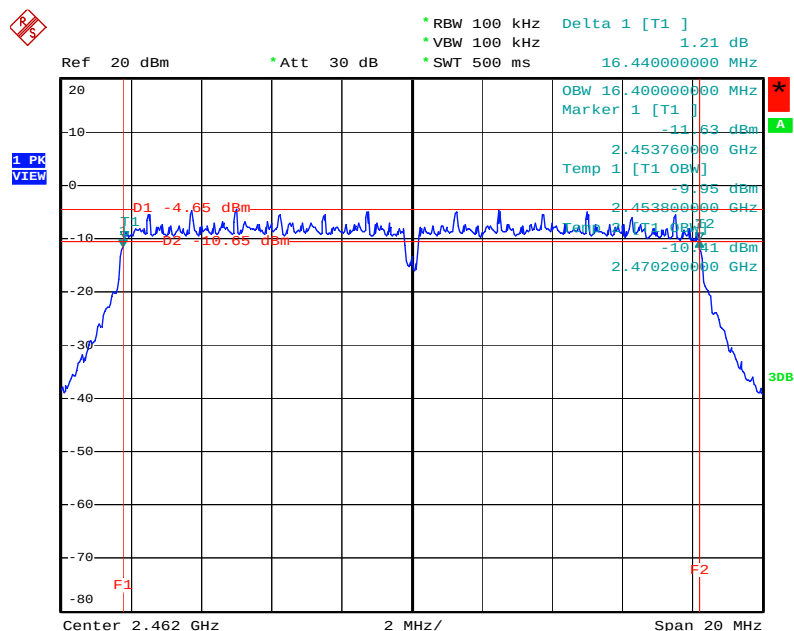

Date: 3.JAN.2008 15:25:00

3.5. Radiated Emissions Measurement

3.5.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.5.2. Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100KHz / 100KHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

3.5.4. Test Setup Layout

For radiated emissions below 30MHz

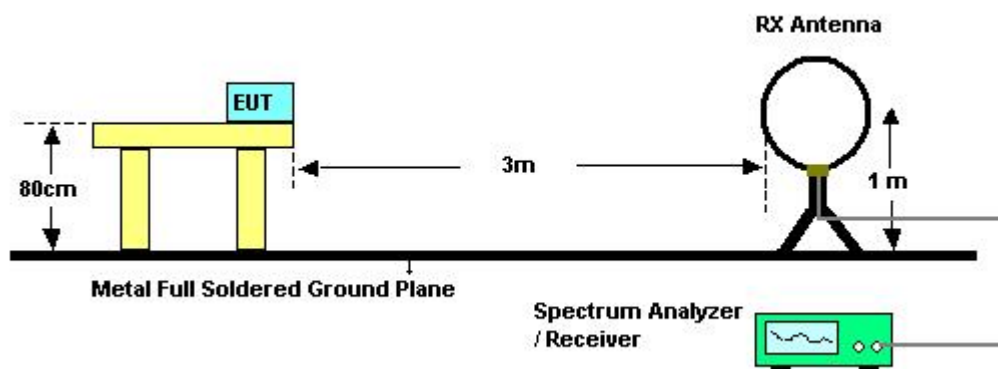

For radiated emissions above 30MHz

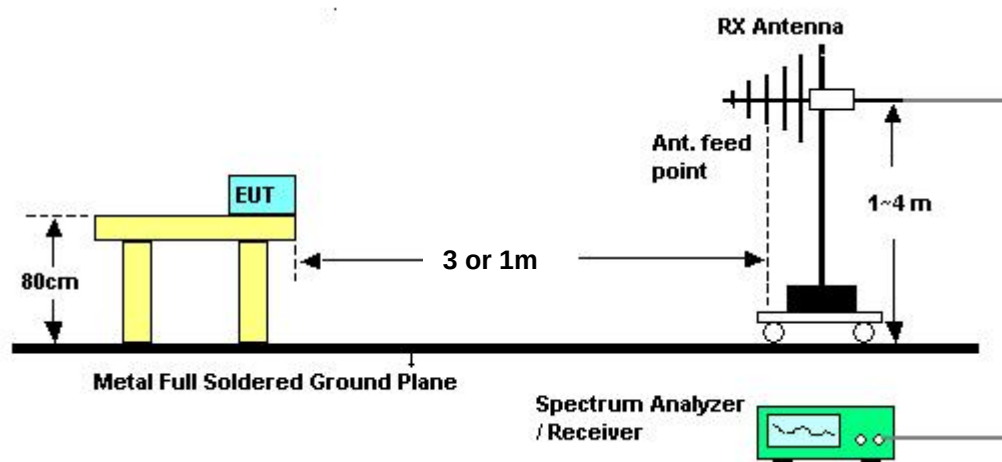

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

3.5.5. Test Deviation

There is no deviation with the original standard.

3.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.5.7. Results of Radiated Emissions (9kHz~30MHz)

Test date	Jan. 18, 2008	Test Site No.	03CH02-HY
Temperature	26.1℃	Humidity	54%
Test Engineer	Murphy		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

3.5.8. Results of Radiated Emissions (30MHz~1GHz)


Test date	Jan. 18, 2008	Test Site No.	03CH02-HY
Temperature	26.1℃	Humidity	54%
Test Engineer	Murphy	Configurations	LAN Mode

Horizontal

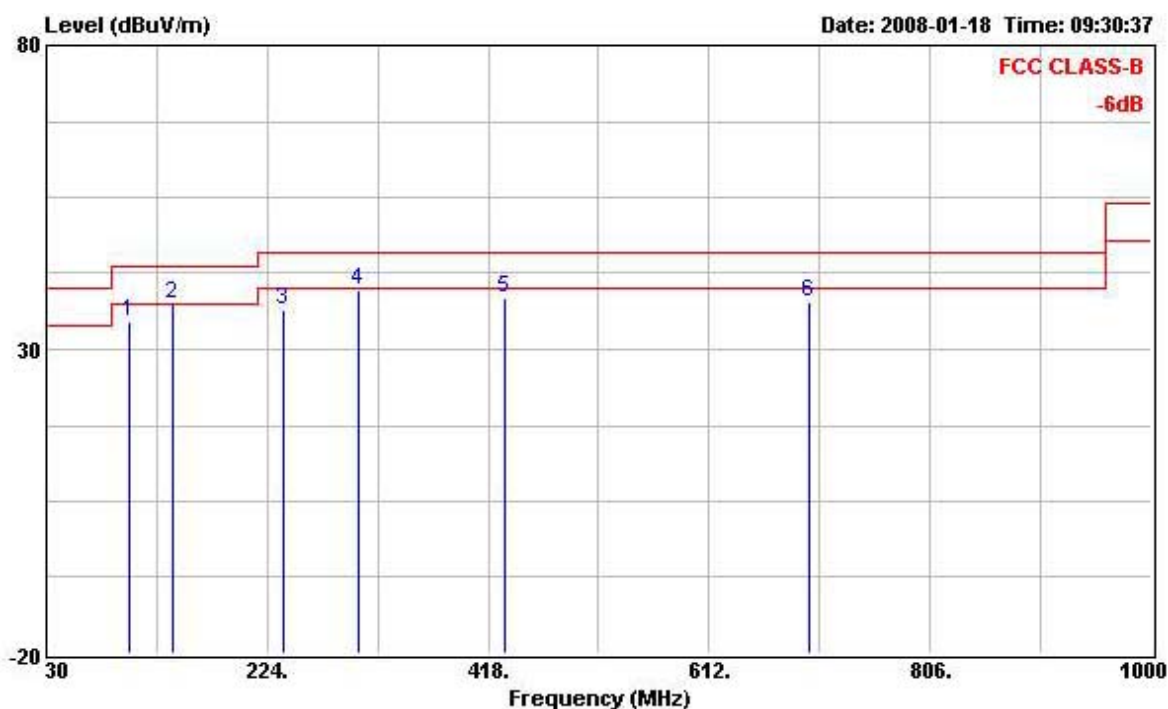

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	102.750	34.39	-9.11	43.50	51.58	11.53	30.79	2.07	Peak	---	---
2	141.550	37.43	-6.07	43.50	53.98	11.78	30.72	2.39	Peak	---	---
3	238.550	36.36	-9.64	46.00	51.26	12.62	30.52	3.00	Peak	---	---
4	304.510	39.69	-6.31	46.00	52.84	13.78	30.39	3.46	Peak	---	---
5	432.550	38.42	-7.58	46.00	48.60	15.92	30.10	4.00	Peak	---	---
6	700.270	37.94	-8.06	46.00	43.17	18.86	29.20	5.11	Peak	---	---

Vertical

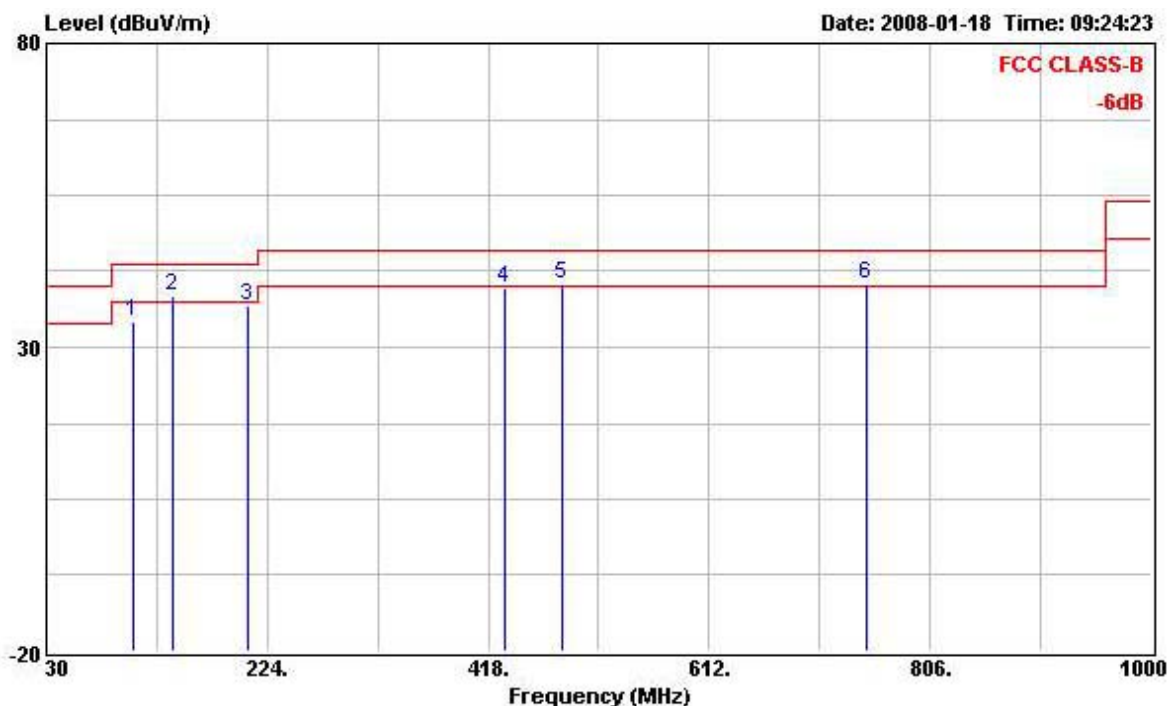

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	105.660	34.08	-9.42	43.50	50.90	11.88	30.79	2.09	Peak	---	---
2 !	140.580	38.48	-5.02	43.50	54.92	11.90	30.72	2.38	Peak	---	---
3	206.540	36.84	-6.66	43.50	52.98	11.57	30.59	2.88	Peak	---	---
4	432.550	39.72	-6.28	46.00	49.90	15.92	30.10	4.00	Peak	---	---
5 !	482.990	40.45	-5.55	46.00	49.22	16.94	29.95	4.24	Peak	---	---
6 !	750.710	40.42	-5.58	46.00	44.62	19.57	29.10	5.33	Peak	---	---


Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test date	Jan. 18, 2008	Test Site No.	03CH02-HY
Temperature	26.1℃	Humidity	54%
Test Engineer	Murphy	Configurations	Wireless Mode

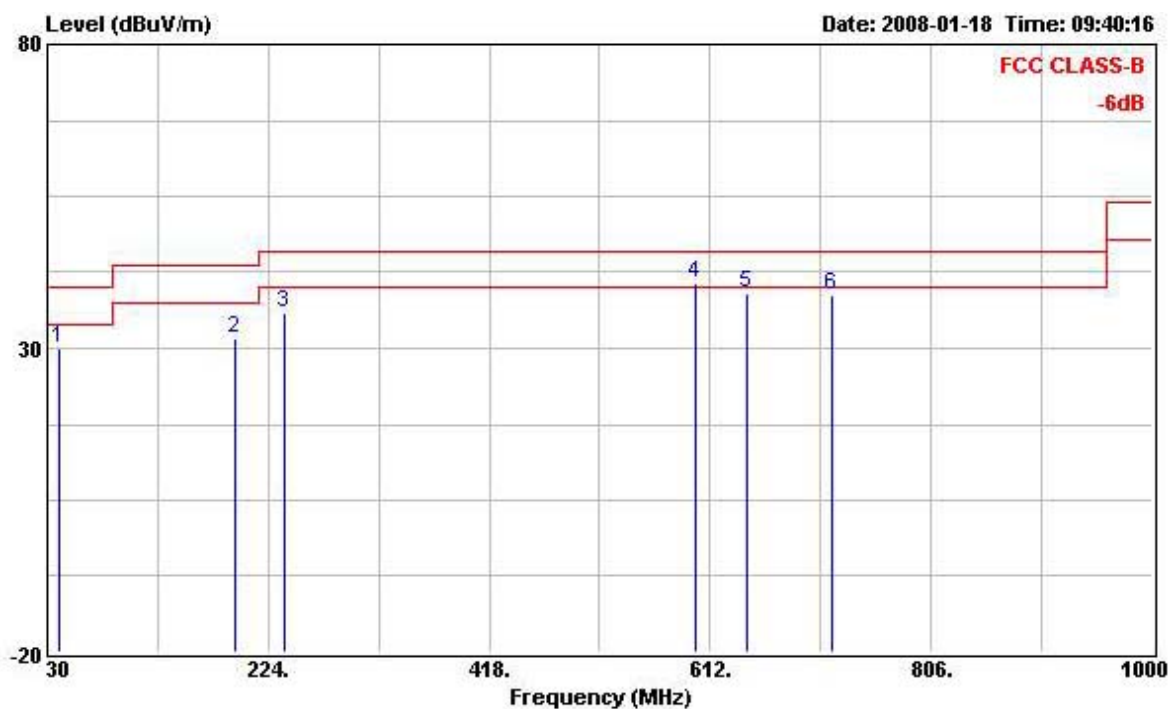Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dBUV	dB	dB	dB		cm	deg
1	39.700	30.13	-9.87	40.00	46.35	13.25	30.84	1.37	Peak	---	---
2	194.900	31.66	-11.84	43.50	48.49	10.99	30.61	2.79	Peak	---	---
3	238.550	35.95	-10.05	46.00	50.85	12.62	30.52	3.00	Peak	---	---
4	599.390	40.73	-5.27	46.00	45.38	20.15	29.60	4.80	Peak	---	---
5	644.980	39.12	-6.88	46.00	43.84	19.58	29.42	5.12	Peak	---	---
6	719.670	38.76	-7.24	46.00	43.59	19.13	29.16	5.20	Peak	---	---

Vertical

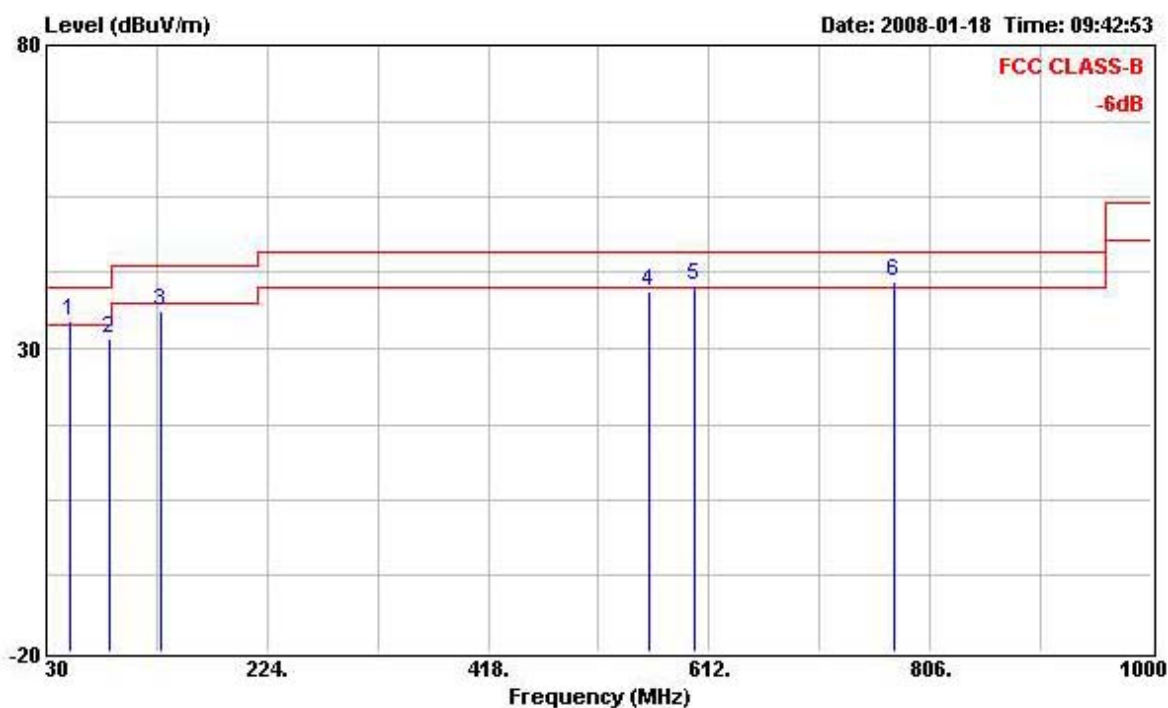

	Freq	Level	Over	Limit	Read	Probe	Preamp	Cable		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Factor	Loss	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1 !	51.340	34.48	-5.52	40.00	54.61	9.16	30.80	1.51	Peak	---	---
2	86.260	31.51	-8.49	40.00	51.72	8.73	30.80	1.86	Peak	---	---
3	129.910	36.06	-7.44	43.50	51.74	12.80	30.74	2.26	Peak	---	---
4	559.620	39.37	-6.63	46.00	45.54	19.00	29.72	4.55	Peak	---	---
5 !	599.390	40.40	-5.60	46.00	45.05	20.15	29.60	4.80	Peak	---	---
6 !	773.990	41.03	-4.97	46.00	44.77	19.90	29.05	5.41	Peak	---	---

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)


Test date	Jan. 03, 2008	Test Site No.	03CH02-HY
Temperature	26.1℃	Humidity	54%
Test Engineer	Murphy	Configurations	802.11b CH 1

Horizontal

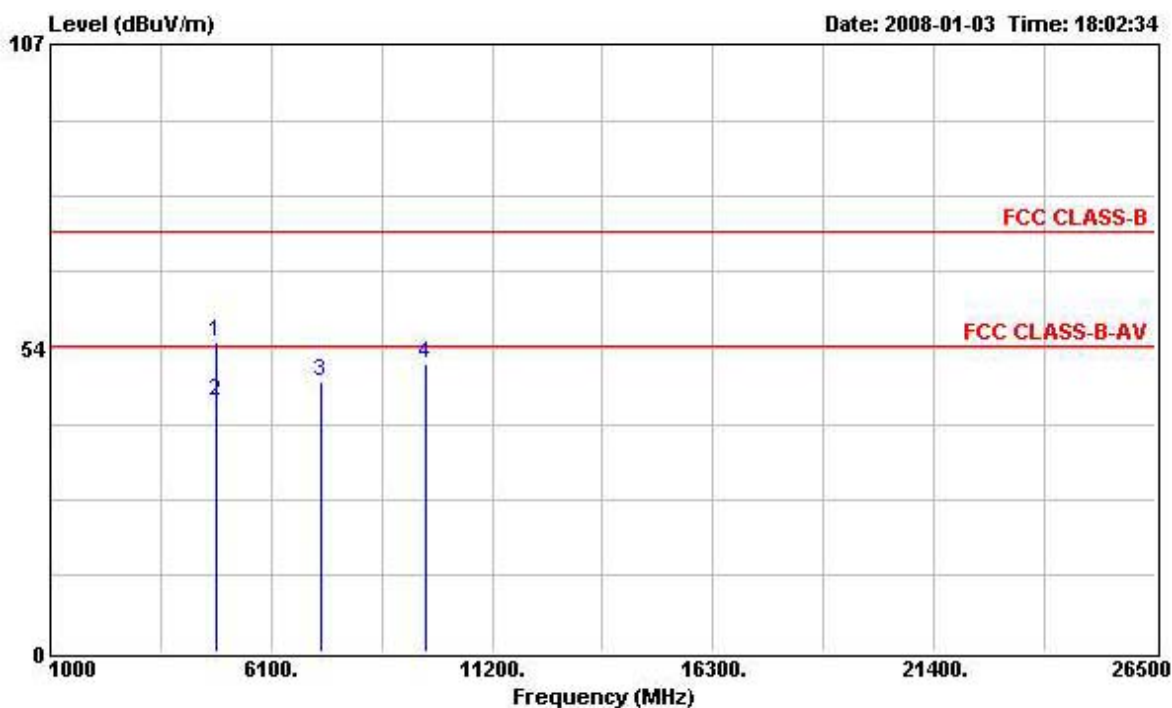


	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	4824.000	54.52	-19.48	74.00	51.85	33.02	34.94	4.59	Peak	---	---
2	4824.000	44.19	-9.81	54.00	41.52	33.02	34.94	4.59	Average	---	---
3	7240.000	47.67	-6.33	54.00	41.26	36.03	35.25	5.63	Peak	---	---
4	9648.000	50.55	-3.45	54.00	41.95	37.96	35.70	6.34	Peak	---	---

Vertical

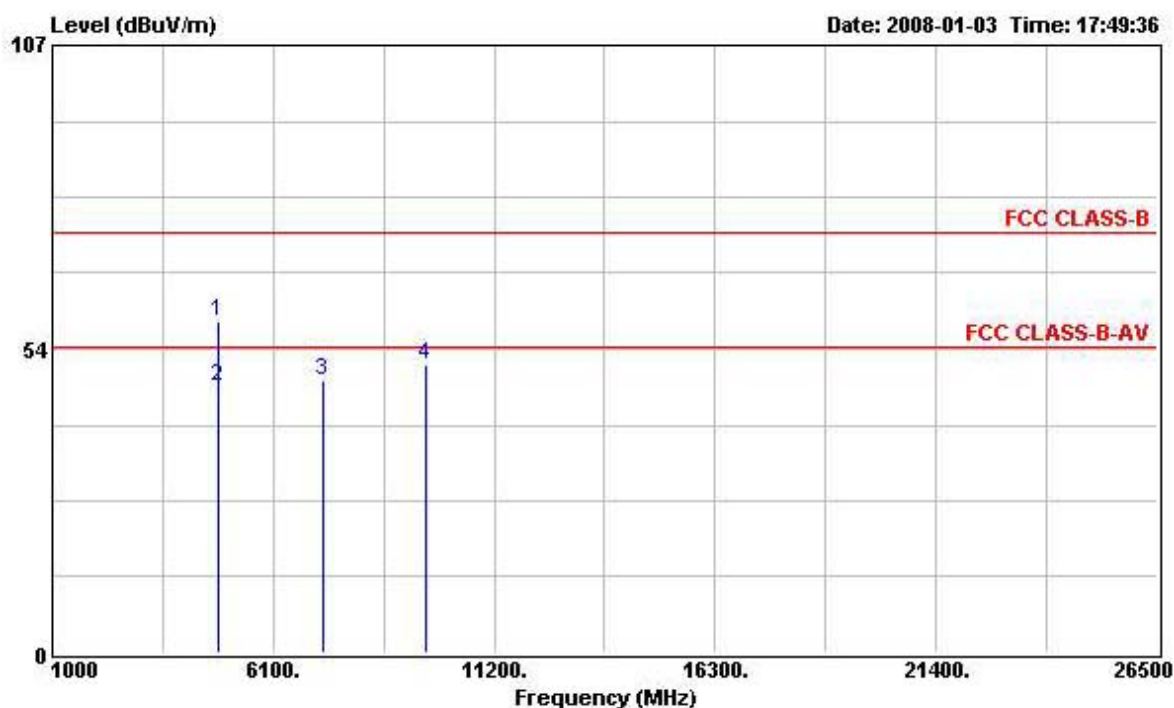


	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	4824.000	58.32	-15.68	74.00	55.65	33.02	34.94	4.59	Peak	---	---
2	4824.000	46.73	-7.27	54.00	44.06	33.02	34.94	4.59	Average	---	---
3	7232.000	47.96	-6.04	54.00	41.54	36.03	35.24	5.63	Peak	---	---
4	9644.000	50.60	-3.40	54.00	42.00	37.96	35.70	6.34	Peak	---	---

Test date	Jan. 03, 2008	Test Site No.	03CH02-HY
Temperature	26.1°C	Humidity	54%
Test Engineer	Murphy	Configurations	802.11b CH 6

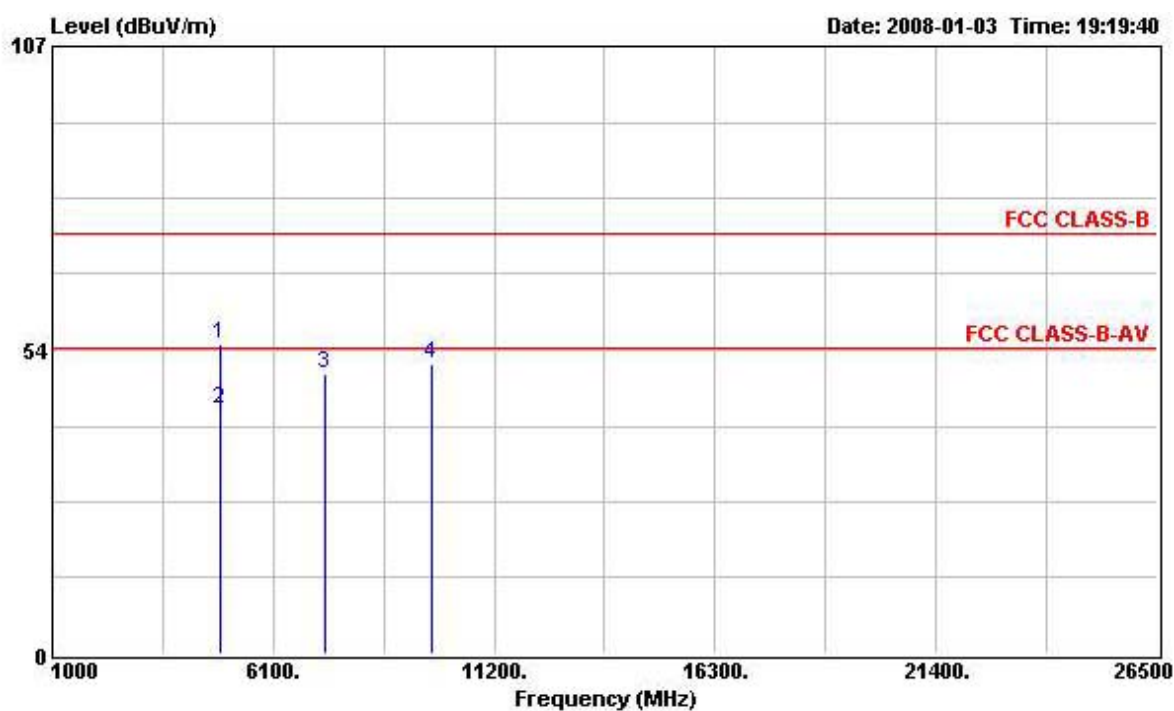Horizontal


	Freq	Level	Over	Limit	Read	Probe	Preamp	Cable		Ant	Table
	MHz	dBUV/m	Limit	Line	Level	Factor	Factor	Loss	Remark	Pos	Pos
			dB	dBUV/m	dBUV	dB	dB	dB		cm	deg
1	4874.000	54.50	-19.50	74.00	51.68	33.11	34.93	4.64	Peak	---	---
2	4874.000	43.13	-10.87	54.00	40.31	33.11	34.93	4.64	Average	---	---
3	7307.000	49.27	-4.73	54.00	42.68	36.21	35.26	5.64	Peak	---	---
4	9746.000	51.13	-2.87	54.00	42.47	38.00	35.70	6.36	Peak	---	---

Vertical

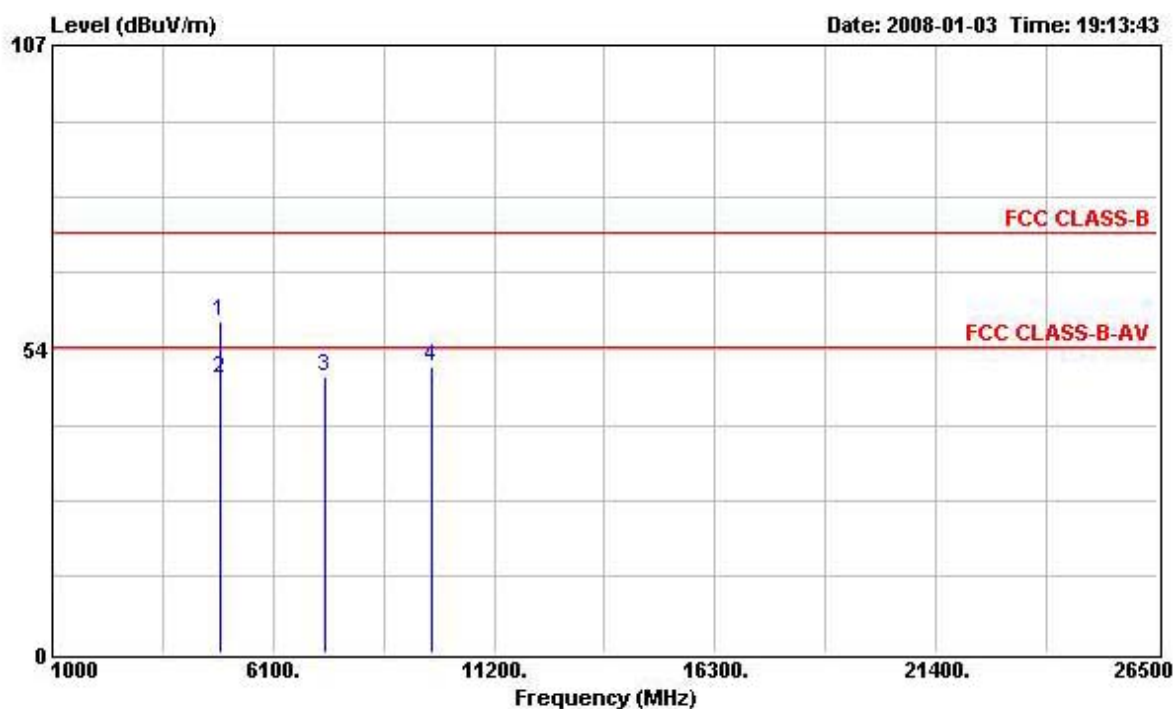


	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	4876.000	58.33	-15.67	74.00	55.51	33.11	34.93	4.64	Peak	---	---
2	4876.000	48.31	-5.69	54.00	45.49	33.11	34.93	4.64	Average	---	---
3	7305.000	48.77	-5.23	54.00	42.18	36.21	35.26	5.64	Peak	---	---
4	9748.000	50.52	-3.48	54.00	41.86	38.00	35.70	6.36	Peak	---	---

Test date	Jan. 03, 2008	Test Site No.	03CH02-HY
Temperature	26.1°C	Humidity	54%
Test Engineer	Murphy	Configurations	802.11b CH 11

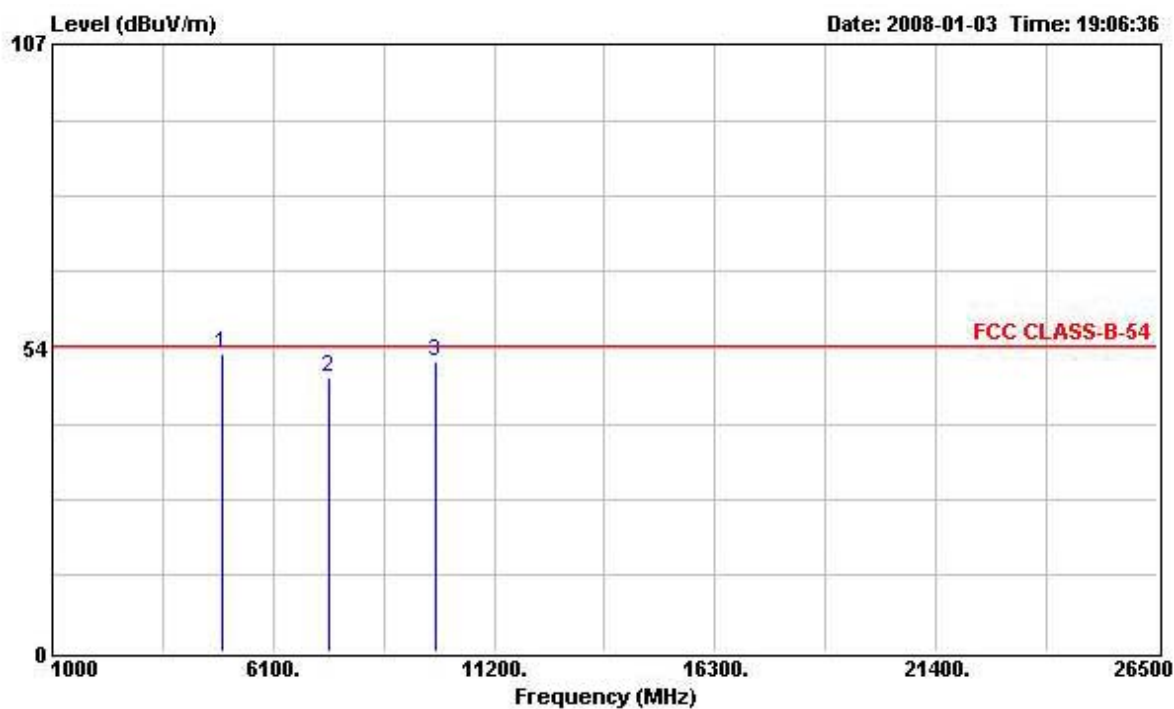Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	4924.000	52.53	-1.47	54.00	49.59	33.19	34.92	4.67	Peak	---	---
2	7384.000	48.28	-5.72	54.00	41.48	36.43	35.28	5.65	Peak	---	---
3	9848.000	51.01	-2.99	54.00	42.29	38.04	35.70	6.38	Peak	---	---

Vertical

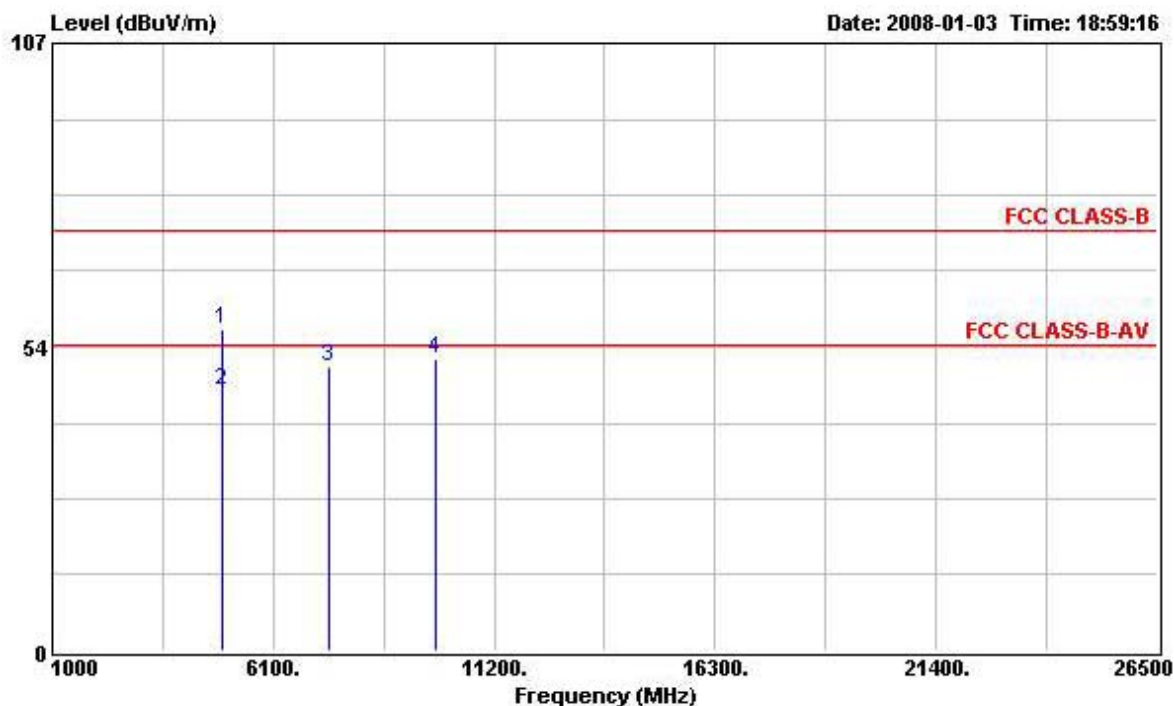

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	4928.000	56.61	-17.39	74.00	53.67	33.19	34.92	4.67	Peak	---	---
2	4928.000	46.03	-7.97	54.00	43.09	33.19	34.92	4.67	Average	---	---
3	7382.000	50.15	-3.85	54.00	43.39	36.39	35.28	5.65	Peak	---	---
4	9848.000	51.48	-2.52	54.00	42.76	38.04	35.70	6.38	Peak	---	---

Test date	Jan. 03, 2008	Test Site No.	03CH02-HY
Temperature	26.1°C	Humidity	54%
Test Engineer	Murphy	Configurations	802.11g CH 1


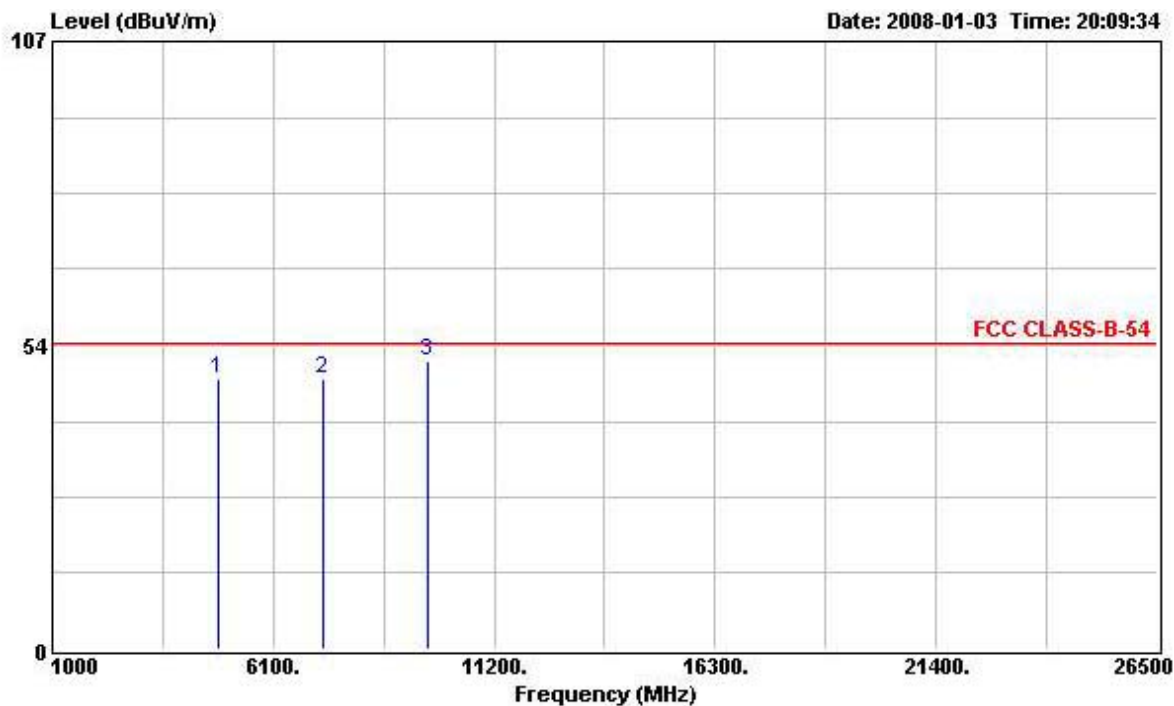
Horizontal

TABLE 1: Horizontal


	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	4824.000	47.70	-6.30	54.00	45.03	33.02	34.94	4.59	Peak	---	---
2	7234.000	47.47	-6.53	54.00	41.05	36.03	35.24	5.63	Peak	---	---
3	9650.000	50.79	-3.21	54.00	42.19	37.96	35.70	6.34	Peak	---	---

Vertical

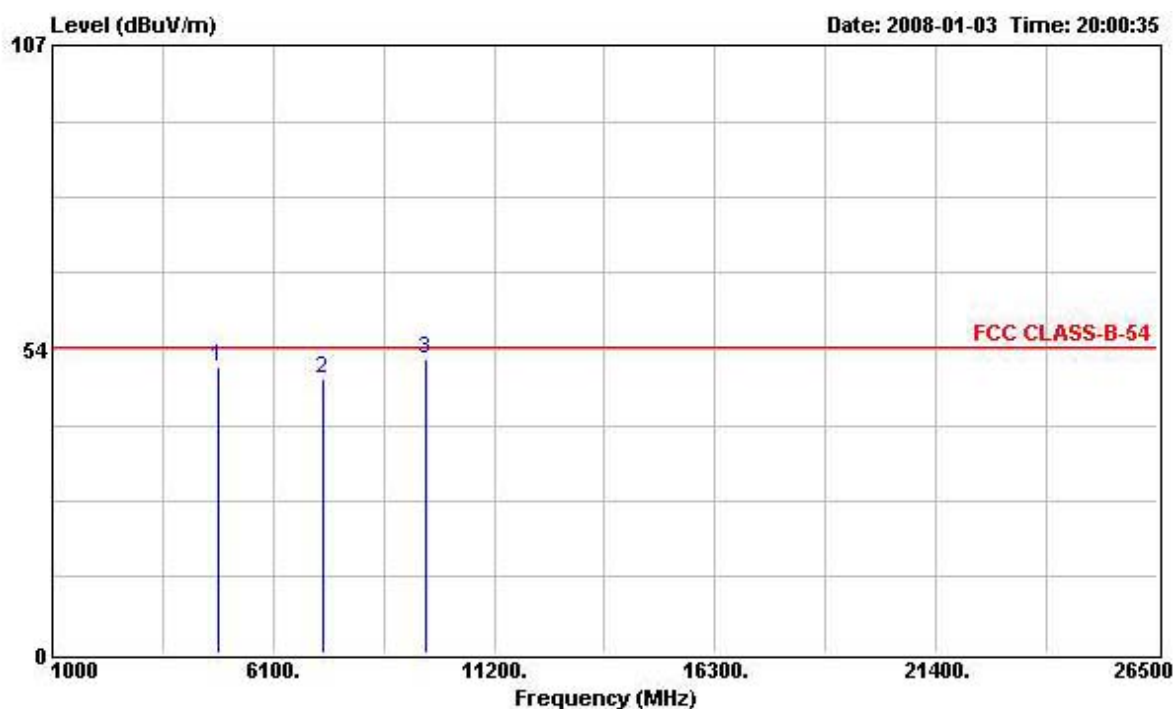


	Freq	Level	Over	Limit	Read	Probe	Preamp	Cable		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Factor	Loss	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	4826.000	50.29	-3.71	54.00	47.62	33.02	34.94	4.59	Peak	---	---
2	7238.000	48.43	-5.57	54.00	42.02	36.03	35.25	5.63	Peak	---	---
3	9644.000	51.69	-2.31	54.00	43.09	37.96	35.70	6.34	Peak	---	---

Test date	Jan. 03, 2008	Test Site No.	03CH02-HY
Temperature	26.1°C	Humidity	54%
Test Engineer	Murphy	Configurations	802.11g CH 6

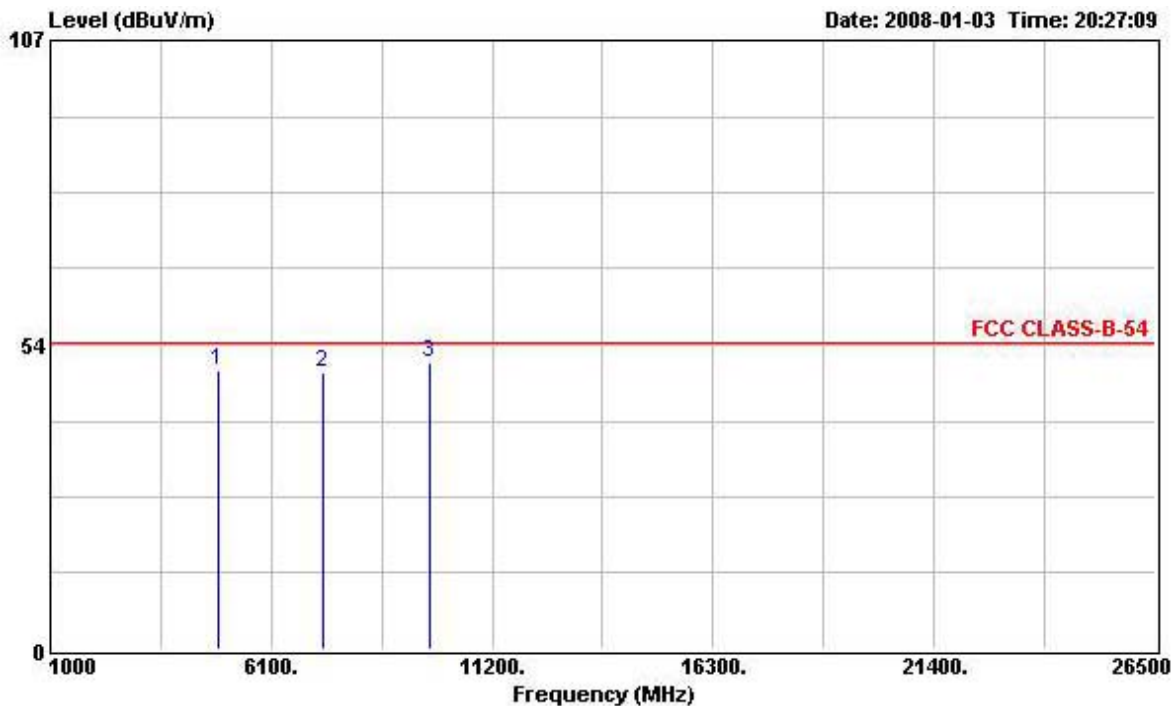Horizontal


	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	4874.000	49.07	-4.93	54.00	46.25	33.11	34.93	4.64	Peak	---	---
2	7311.000	48.77	-5.23	54.00	42.18	36.21	35.26	5.64	Peak	---	---
3	9748.000	50.26	-3.74	54.00	41.60	38.00	35.70	6.36	Peak	---	---

Vertical

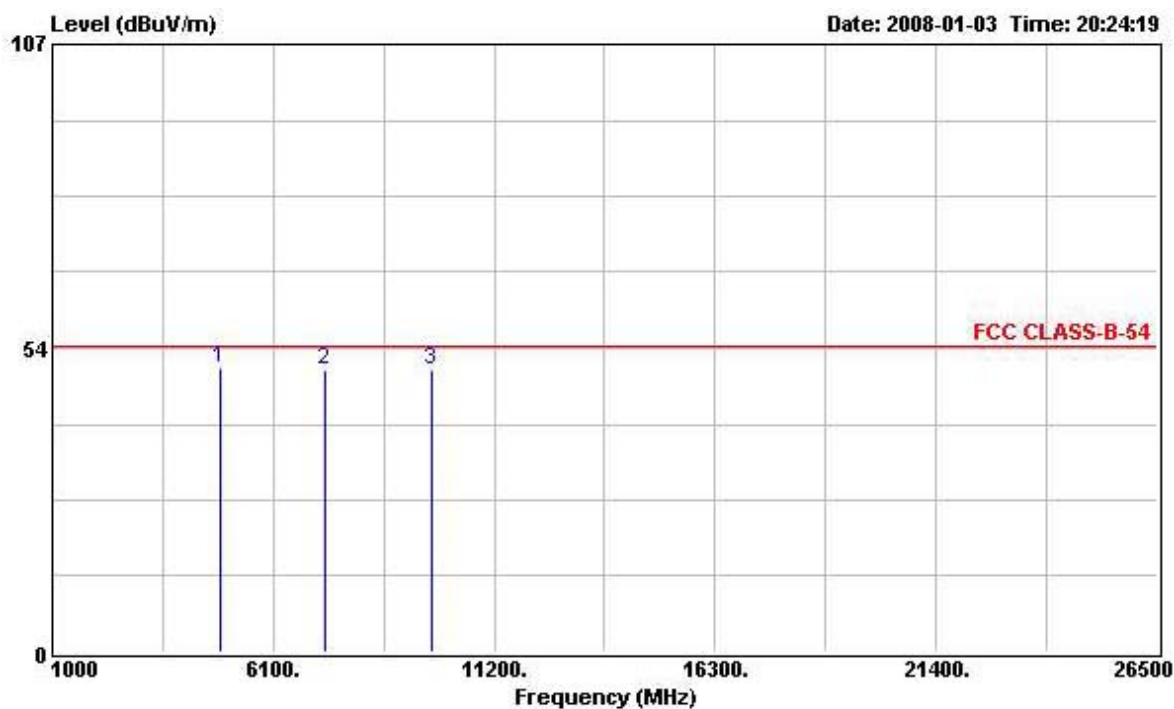


	Freq	Level	Over	Limit	Read	Probe	Preamp	Cable		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Factor	Loss	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	4874.000	50.07	-3.93	54.00	47.25	33.11	34.93	4.64	Peak	---	---
2	7311.000	49.85	-4.15	54.00	43.26	36.21	35.26	5.64	Peak	---	---
3	9748.000	49.82	-4.18	54.00	41.16	38.00	35.70	6.36	Peak	---	---

Test date	Jan. 03, 2008	Test Site No.	03CH02-HY
Temperature	26.1℃	Humidity	54%
Test Engineer	Murphy	Configurations	802.11g CH 11

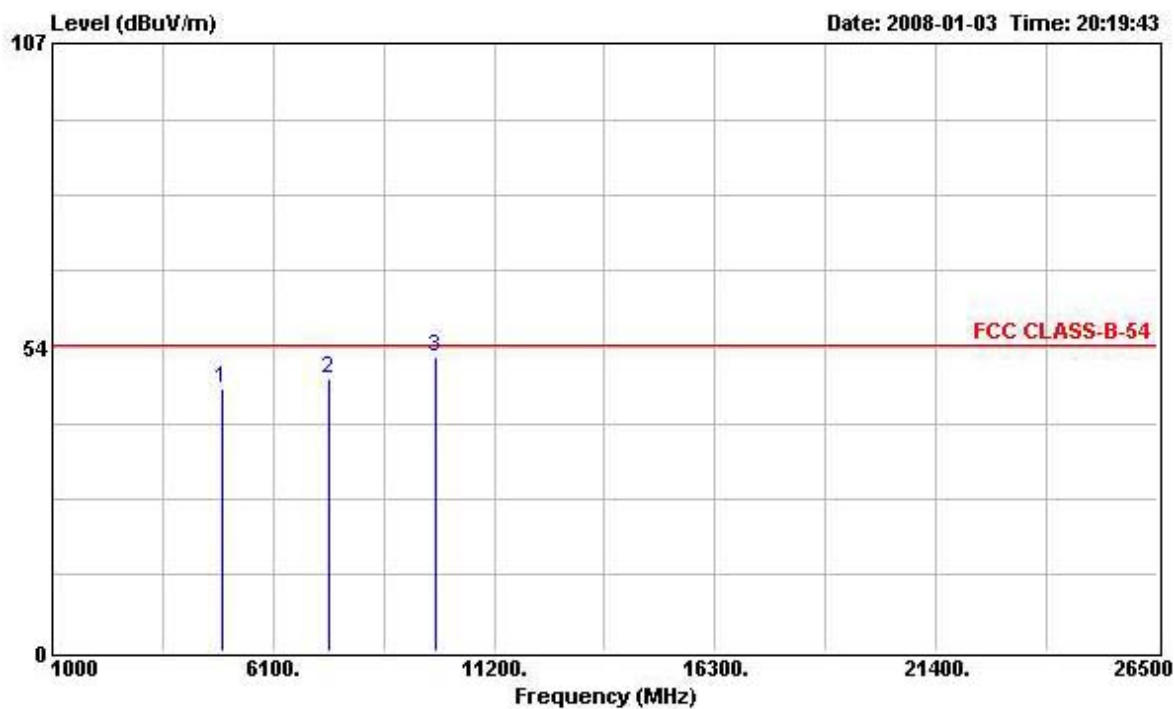Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	4926.000	46.08	-7.92	54.00	43.14	33.19	34.92	4.67	Peak	---	---
2	7384.000	47.81	-6.19	54.00	41.01	36.43	35.28	5.65	Peak	---	---
3	9848.000	51.65	-2.35	54.00	42.93	38.04	35.70	6.38	Peak	---	---

Vertical

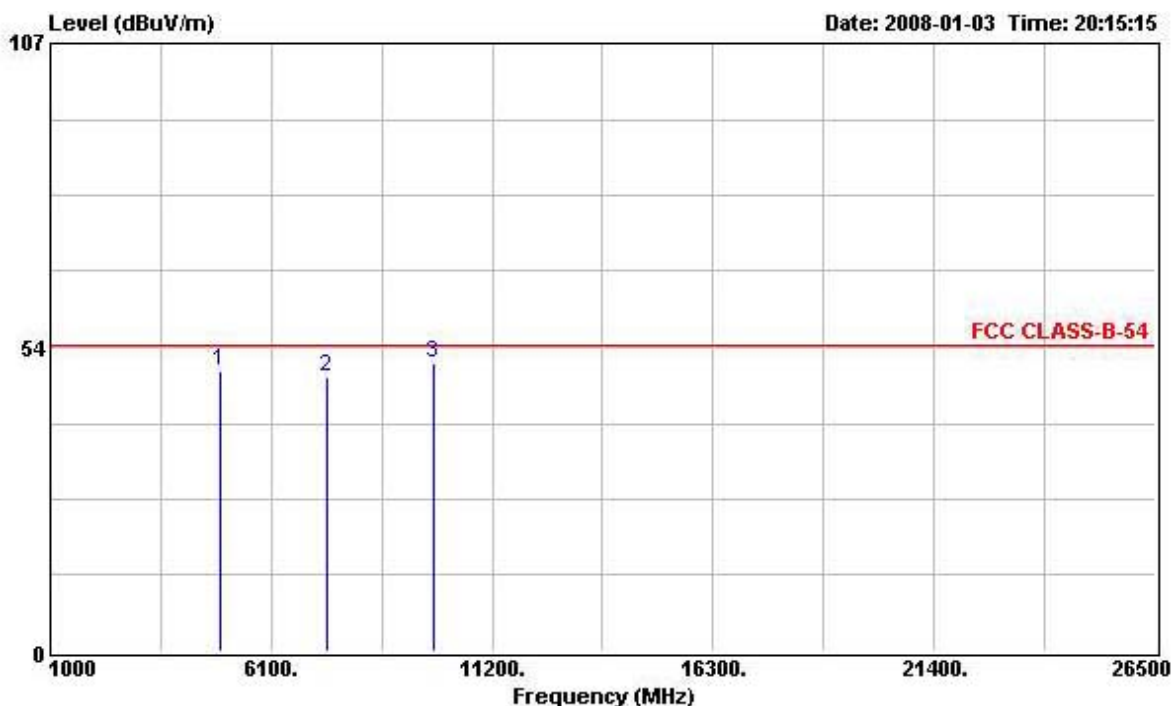

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	4926.000	49.43	-4.57	54.00	46.49	33.19	34.92	4.67	Peak	---	---
2	7384.000	48.16	-5.84	54.00	41.36	36.43	35.28	5.65	Peak	---	---
3	9848.000	50.65	-3.35	54.00	41.93	38.04	35.70	6.38	Peak	---	---

Note: The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.6. Band Edge Emissions Measurement

3.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.6.2. Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 KHz /100 KHz for Peak

3.6.3. Test Procedures

1. The test procedure is the same as section 3.5.3; only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

3.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 3.5.4.

3.6.5. Test Deviation

There is no deviation with the original standard.

3.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.6.7. Test Result of Band Edge and Fundamental Emissions

Test date	Jan. 03, 2008	Test Site No.	03CH02-HY
Temperature	26.1℃	Humidity	54%
Test Engineer	Murphy	Configurations	802.11b CH 1, 6, 11

Channel 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2387.330	57.74	-16.26	74.00	26.53	28.21	0.00	3.00	Peak	---	---
2 X	2413.170	109.58			78.30	28.26	0.00	3.02	Peak	---	---
1	2389.800	45.97	-8.03	54.00	14.76	28.21	0.00	3.00	Average	---	---
2 X	2414.500	101.29			70.01	28.26	0.00	3.02	Average	---	---

The item 2 is fundamental CH 1 2412MHz.

Channel 6

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1 X	2436.730	110.78			79.38	28.36	0.00	3.04	Peak	---	---
1 X	2434.450	101.72			70.39	28.31	0.00	3.02	Average	---	---

The item 1 is fundamental CH 6 2437MHz.

Channel 11

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1 X	2459.530	110.35			78.91	28.40	0.00	3.04	Peak	---	---
2	2486.700	58.91	-15.09	74.00	27.40	28.45	0.00	3.06	Peak	---	---
1 X	2459.340	101.69			70.25	28.40	0.00	3.04	Average	---	---
2	2485.940	46.32	-7.68	54.00	14.81	28.45	0.00	3.06	Average	---	---

The item 1 is fundamental CH 11 2462MHz.

Test date	Jan. 03, 2008	Test Site No.	03CH02-HY
Temperature	26.1°C	Humidity	54%
Test Engineer	Murphy	Configurations	802.11g CH 1, 6, 11

Channel 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2389.610	58.15	-15.85	74.00	26.94	28.21	0.00	3.00	Peak	---	---
2 X	2408.610	104.65			73.37	28.26	0.00	3.02	Peak	---	---
1	2389.800	45.55	-8.45	54.00	14.34	28.21	0.00	3.00	Average	---	---
2 X	2412.980	93.36			62.08	28.26	0.00	3.02	Average	---	---

The item 2 is fundamental CH 1 2412MHz.

Channel 6

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1 X	2434.260	104.27			72.94	28.31	0.00	3.02	Peak	---	---
1 X	2441.860	94.00			62.60	28.36	0.00	3.04	Average	---	---

The item 1 is fundamental CH 6 2437MHz.

Channel 11

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1 X	2458.770	105.85			74.41	28.40	0.00	3.04	Peak	---	---
2	2483.660	59.89	-14.11	74.00	28.38	28.45	0.00	3.06	Peak	---	---
1 X	2459.340	94.52			63.08	28.40	0.00	3.04	Average	---	---
2	2483.660	45.97	-8.03	54.00	14.46	28.45	0.00	3.06	Average	---	---

The item 1 is fundamental CH 11 2462MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


For Emission not in Restricted Band

Low Band Edge Plot on Configuration IEEE 802.11b / 2412 MHz

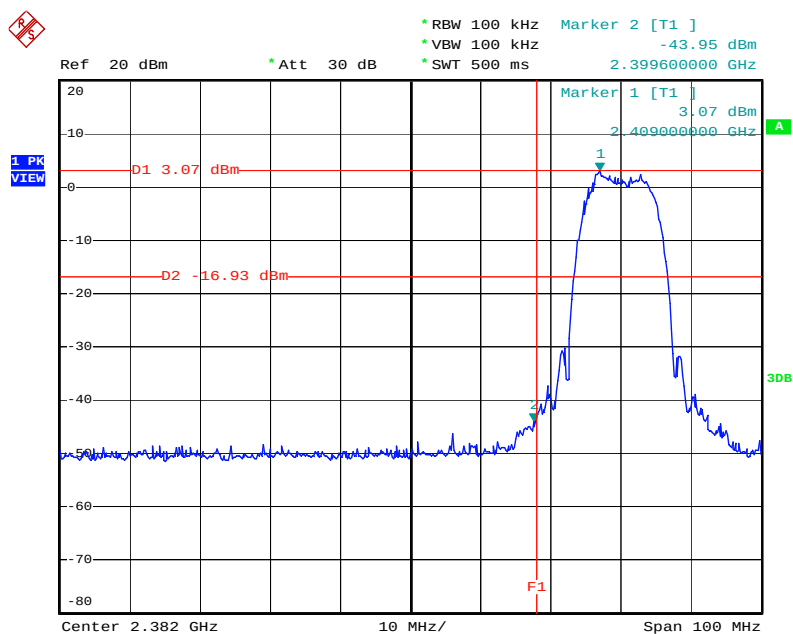


Date: 3.JAN.2008 15:26:10

High Band Edge Plot on Configuration IEEE 802.11b / 2462 MHz

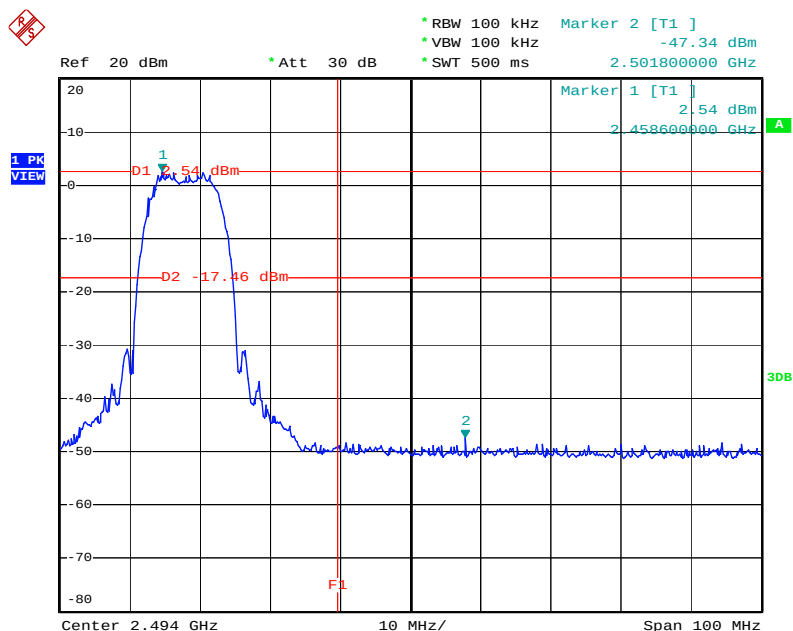


Date: 3.JAN.2008 15:26:58

Low Band Edge Plot on Configuration IEEE 802.11g / 2412 MHz

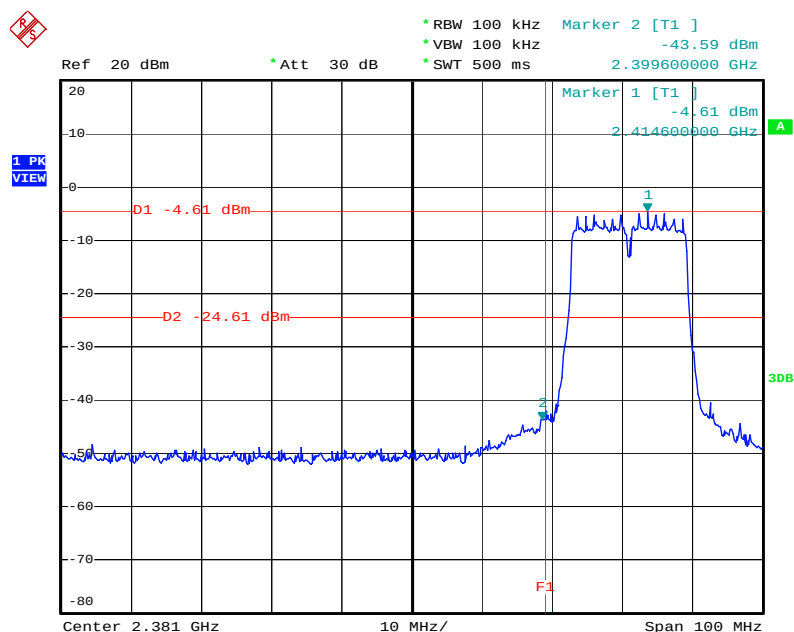

Date: 3.JAN.2008 15:28:32

High Band Edge Plot on Configuration IEEE 802.11g / 2462 MHz

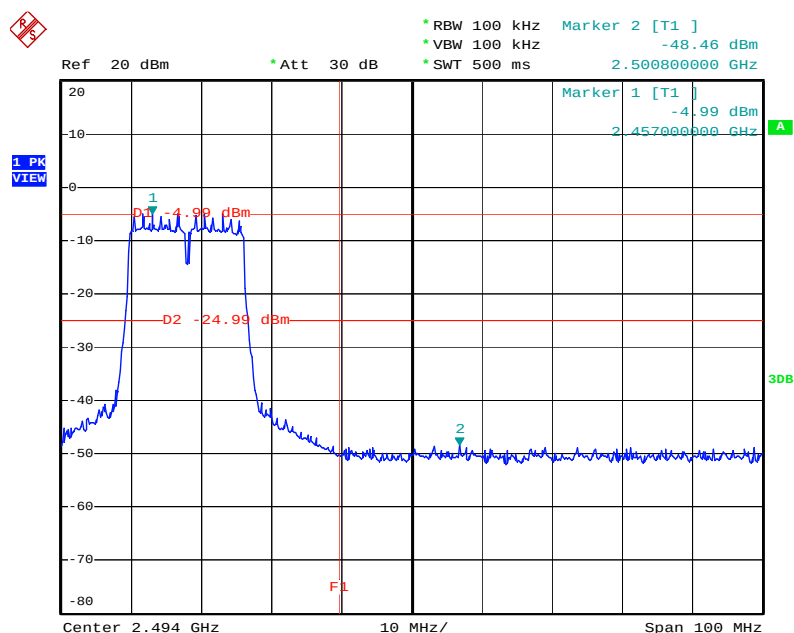

Date: 3.JAN.2008 15:27:41

3.7. Antenna Requirements

3.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

3.7.2. Antenna Connector Construction

Please refer to section 2.3 in this test report; antenna connector complied with the requirements.

4. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100132	9kHz – 2.75GHz	Jul. 14, 2007	Conduction (CO01-HY)
LISN	MessTec	NNB-2/16Z	2001/004	9kHz – 30MHz	Mar. 30, 2007	Conduction (CO01-HY)
LISN (Support Unit)	MessTec	NNB-2/16Z	2001/009	9kHz – 30MHz	Mar. 30, 2007	Conduction (CO01-HY)
EMI Filter	LINDGREN	LRE-2060	1004	< 450Hz	N/A	Conduction (CO01-HY)
EMI Filter	LINDGREN	N6006	201052	0 – 60Hz	N/A	Conduction (CO01-HY)
RF Cable-CON	Suhner Switzerland	RG223/U	CB029	9kHz – 30MHz	Dec. 03, 2007	Conduction (CO01-HY)
Isolation Transformer	Erika Fiedler OHG	D-65396 Walluf	58	45MHz-2.15GHz	N/A	Conduction (CO01-HY)
Impedance Stabilization Network	SCHAFFNER	ST08	22589	150kHz – 230MHz	Feb. 15, 2007	Conduction (CO01-HY)
Impedance Stabilization Network	SCHAFFNER	T400	21653	150kHz – 230MHz	May 09, 2007	Conduction (CO01-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30 MHz - 1 GHz 3m	May 14, 2007	Radiation (03CH02-HY)
Amplifier	ADVANTEST	BB525C	CH300001	9 kHz - 2 GHz	Dec. 05, 2007	Radiation (03CH02-HY)
Spectrum Analyzer	R&S	FSP40	100305/040	9 kHz - 40GHz	Jan. 10, 2008	Radiation (03CH02-HY)
Receiver	SCHAFFNER	SCR3501	416	9 kHz - 1 GHz	Feb. 15, 2007	Radiation (03CH02-HY)
Bilog Antenna	SCHAFFNER	CBL61128	2723	30 MHz - 2 GHz	Dec. 22, 2007	Radiation (03CH02-HY)
Turn Table	HD	DS 420	420/649/00	0 - 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	HD	MA 240	240/559/00	1 m - 4 m	N/A	Radiation (03CH02-HY)
RF Cable-R03m	Jye Bao	RG142	CB020	30 MHz - 1 GHz	Dec. 08, 2007	Radiation (03CH02-HY)
Amplifier	Agilent	8449B	3008A20373	1GHz – 26.5 GHz	Jul. 09, 2007	Radiation (03CH02-HY)
Spectrum Analyzer	R&S	FSP30	100023	9kHz ~ 30GHz	Dec. 17, 2007	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jun. 27, 2007	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100458	DC ~ 30GHz	Jun. 27, 2007	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jun. 27, 2007	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 03, 2007	Conducted (TH01-HY)
Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 01, 2007	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 01, 2007	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 01, 2007	Conducted (TH01-HY)
Vector Signal Generator	R&S	SMU200A	102098	100kHz ~ 6GHz	Nov. 14, 2007	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 07, 2007	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	May 04, 2007*	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.

5. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

6. TAF CERTIFICATE OF ACCREDITATION


財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate No.: L1190-070110

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2007 to January 09, 2010
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory


Jay-San Chen
President, Taiwan Accreditation Foundation
Date : January 10, 2007

PI, total 9 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when used without the Appendix.