



FCC Test Report

Equipment : 150N Wireless LAN Broadband Router
Brand Name : EDIMAX
Model No. : BR-6228GNS,GR-228GNS,BR-6228nS,
BR-6228nC,BR-6228nS V2, BR-6228nC V2
FCC ID : NDD9562281205
Standard : 47 CFR FCC Part 15.247
Operating Band : 2400 MHz – 2483.5 MHz
FCC Classification : DTS
Applicant : EDIMAX TECHNOLOGY CO., LTD.
Manufacturer : No.3,Wu-Chuan 3rd Road,Wu-Ku Industrial Park,
New Taipei City, Taiwan
Multiple Listing : Please refer to section 1.2

The product sample received on May 10, 2012 and completely tested on Jun. 26, 2013. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

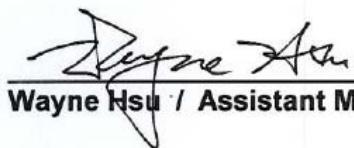

Wayne Hsu / Assistant Manager





Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Table for Multiple Listing	7
1.3	Accessories	7
1.4	Support Equipment.....	7
1.5	Testing Applied Standards	8
1.6	Testing Location Information.....	8
1.7	Measurement Uncertainty	9
2	TEST CONFIGURATION OF EUT	10
2.1	The Worst Case Measurement Configuration.....	10
2.2	Test Channel Frequencies Configuration.....	10
2.3	The Worst Case Power Setting Parameter	10
2.4	The Worst Case Measurement Configuration.....	11
2.5	Test Setup Diagram	12
3	TRANSMITTER TEST RESULT	14
3.1	AC Power-line Conducted Emissions	14
3.2	6dB Bandwidth	17
3.3	RF Output Power.....	21
3.4	Power Spectral Density	29
3.5	Transmitter Bandedge Emissions	34
3.6	Transmitter Unwanted Emissions.....	40
4	TEST EQUIPMENT AND CALIBRATION DATA	69

APPENDIX A. TEST PHOTOS

APPENDIX B. PHOTOGRAPHS OF EUT



Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
0	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 19.707MHz 39.40 (Margin 10.60dB) - AV 45.01 (Margin 14.99dB) - QP	FCC 15.207	Complied
3.2	15.247(a)	6dB Bandwidth	6dB Bandwidth Unit [MHz] 20M: 17.00 / 40M: 34.96	$\geq 500\text{kHz}$	Complied
3.3	15.247(b)	RF Output Power (Maximum Peak Conducted Output Power)	Power [dBm]: 20.74	Power [dBm] 2412-2462MHz: 30 2422-2452MHz: 30	Complied
3.4	15.247(d)	Power Spectral Density	PSD [dBm/100kHz]: -10.62	PSD [dBm/3kHz] 2412-2462MHz: 8 2422-2452MHz: 8	Complied
3.2	15.247(c)	Transmitter Radiated Bandedge Emissions	Non-Restricted Bands: 2398.440MHz: 30.34dB Restricted Bands [dBuV/m at 3m]: 2483.720MHz 65.22 (Margin 8.78dB) - PK 52.25 (Margin 1.75dB) - AV	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied
3.6	15.247(c)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 3m]: 4874.000MHz 53.24 (Margin 20.76dB) - PK 51.60 (Margin 2.40dB) - AV	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied



Revision History



1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information				
Frequency Range (MHz)	IEEE Std. 802.11 Protocol	Ch. Frequency (MHz)	Channel Number	RF Output Power (dBm)
2400-2483.5	b	2412-2462	1-11 [11]	18.82
2400-2483.5	g	2412-2462	1-11 [11]	20.74
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	19.99
2400-2483.5	n (HT40)	2422-2452	3-9 [7]	20.63

Note 1: IEEE Std. 802.11-2007 modulation consists of IEEE Std. 802.11g-2003 and IEEE Std. 802.11b-1999.
Note 2: IEEE Std. 802.11n-2009 modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT support HT20 and HT40.
Note 3: RF output power specifies that Maximum Peak Conducted Output Power.

1.1.2 Antenna Information

Antenna Category	
<input type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	Temporary RF connector provided
<input type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
<input checked="" type="checkbox"/>	External antenna (dedicated antennas)
	<input checked="" type="checkbox"/> Single power level with corresponding antenna(s).
	<input type="checkbox"/> Multiple power level and corresponding antenna(s).
	<input checked="" type="checkbox"/> RF connector provided
	<input checked="" type="checkbox"/> Unique antenna connector. (e.g., MMCX, U.FL, IPX, and RP-SMA, RP-N type...)
	<input type="checkbox"/> Standard antenna connector. (e.g., SMA, N, BNC, and TNC type...)

Antenna General Information			
No.	Ant. Cat.	Ant. Type	Gain (dBi)
1	External	Dipole	7.00



1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input type="checkbox"/> Production ; <input checked="" type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/> Stand-alone	
<input type="checkbox"/> Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.:	
<input type="checkbox"/> Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.:	
<input type="checkbox"/> Other:	

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle		
<input type="checkbox"/> Operated normally mode for worst duty cycle		
<input checked="" type="checkbox"/> Operated test mode for worst duty cycle		
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – ($10 \log 1/x$)	Voltage Duty Factor [dB] – ($20 \log 1/x$)
<input checked="" type="checkbox"/> 100% - IEEE 802.11b	0	0
<input checked="" type="checkbox"/> 100% - IEEE 802.11g	0	0
<input checked="" type="checkbox"/> 100% - IEEE 802.11n (HT20)	0	0
<input checked="" type="checkbox"/> 100% - IEEE 802.11n (HT40)	0	0

1.1.5 EUT Operational Condition

Supply Voltage	<input checked="" type="checkbox"/> AC mains	<input type="checkbox"/> DC	
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input checked="" type="checkbox"/> External DC adapter	<input type="checkbox"/> Battery



1.2 Table for Multiple Listing

The models are exactly same in both physical and electrical. The different in model number for marketing purpose.

No.	Brand Name	Model Name
1	EDIMAX	BR-6228GNS,GR-228GNS,BR-6228nS,BR-6228nC, BR-6228nS V2, BR-6228nC V2

1.3 Accessories

Accessories Information				
Switching Adaptor	Brand Name	DVE	Model Name	DSC-6PFA-05 FUS
	Power Rating	I/P: 100-240Vac ~50/60Hz 0.2A ; O/P: +5V---1A		

Note: Regarding to more detail and other information, please refer to user manual.

1.4 Support Equipment

Support Equipment - Conducted Emissions				
No.	Equipment	Brand Name	Model Name	Serial No.
1	Notebook	DELL	VOSTRO 3350	DoC
2	(USB) Mouse	Microsoft	1113	DoC
3	(USB) Printer	EPSON	STYLUS C61	DoC
4	Dummy Load	-	-	-
5	Notebook (Remote Workstation)	DELL	PP32LB	DoC
6	PC (Remote Workstation)	HP	d330uT	DoC
7	LCD Monitor (Remote Workstation)	DELL	2408WFPb	DoC
8	(PS2) Keyboard (Remote Workstation)	HP	KB-0133	DoC
9	(PS2) Mouse (Remote Workstation)	HP	M-S69	DoC

Support Equipment - Radiated Emissions				
No.	Equipment	Brand Name	Model Name	Serial No.
1	Notebook	DELL	E5520	DoC
2	(USB) Mouse	Microsoft	1004	DoC
3	(USB) Printer	HP	C61	DoC
4	Dummy Load	-	-	-
5	Notebook (Remote Workstation)	DELL	E5520	DoC



1.5 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR FCC Part 15
- ANSI C63.10-2009
- FCC KDB 558074 v03r01
- FCC KDB 662911 v02
- FCC KDB 412172

1.6 Testing Location Information

Testing Location				
	HWA YA	ADD	: No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.	
		TEL	: 886-3-327-3456	FAX : 886-3-327-0973
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO04-HY	Zeus	23.9°C / 49%	Jun. 26, 2013
RF Conducted	TH01-HY	Ian	23.9°C / 36%	May 29, 2012~ Jul. 13, 2013
Radiated Emission	03CH02-HY	Hsiao	24.5°C / 61%	Jun. 24, 2013~Jun. 25, 2013



1.7 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty			
Test Item	Uncertainty	Limit	
AC power-line conducted emissions	±2.26 dB	N/A	
Emission bandwidth, 6dB bandwidth	±1.42 %	N/A	
RF output power, conducted	±0.63 dB	N/A	
Power density, conducted	±0.81 dB	N/A	
Unwanted emissions, conducted	30 – 1000 MHz	±0.51 dB	N/A
	1 – 18 GHz	±0.67 dB	N/A
	18 – 40 GHz	±0.83 dB	N/A
	40 – 200 GHz	N/A	N/A
All emissions, radiated	30 – 1000 MHz	±2.56 dB	N/A
	1 – 18 GHz	±3.59 dB	N/A
	18 – 40 GHz	±3.82 dB	N/A
	40 – 200 GHz	N/A	N/A
Temperature	±0.8 °C	N/A	
Humidity	±3 %	N/A	
DC and low frequency voltages	±3 %	N/A	
Time	±1.42 %	N/A	
Duty Cycle	±1.42 %	N/A	



2 Test Configuration of EUT

2.1 The Worst Case Measurement Configuration

Worst Modulation Used for Conformance Testing			
Modulation Mode	Transmit Chains (N _{TX})	Data Rate / MCS	Worst Data Rate / MCS
11b, 1-11Mbps	1	1-11 Mbps	11 Mbps
11g, 6-54Mbps	1	6-54 Mbps	6 Mbps
HT20, M0-7	1	MCS0-7	MCS 0
HT40, M0-7	1	MCS0-7	MCS 0

2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration	
IEEE 802.11 Protocol	Test Channel Frequencies (MHz) – FX (Frequencies Abbreviations)
b	2412-(F1), 2437-(F2), 2462-(F3)
g	2412-(F1), 2437-(F2), 2462-(F3)
n (HT20)	2412-(F1), 2437-(F2), 2462-(F3)
n (HT40)	2422-(F4), 2437-(F5), 2452-(F6)

2.3 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter				
Test Software Version		MP N Test*		
Worst Modulation Mode	Number of Transmit Chains (N _{TX})	Frequency (MHz)	Power Setting	Worst Data Rate / MCS
11b	1	2412	42	11 Mbps
11b	1	2437	45	11 Mbps
11b	1	2462	40	11 Mbps
11g	1	2412	48	6 Mbps
11g	1	2437	51	6 Mbps
11g	1	2462	46	6 Mbps
HT-20	1	2412	46	MCS 0
HT-20	1	2437	49	MCS 0
HT-20	1	2462	46	MCS 0
HT-40	1	2422	45	MCS 0
HT-40	1	2437	50	MCS 0
HT-40	1	2452	47	MCS 0




2.4 The Worst Case Measurement Configuration



The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
1	AC Power & Radio link

The Worst Case Mode for Following Conformance Tests	
Tests Item	RF Output Power, Power Spectral Density, 6 dB Bandwidth
Test Condition	Conducted measurement at transmit chains
Modulation Mode	11b, 11g, HT20, HT40

The Worst Case Mode for Following Conformance Tests							
Tests Item	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions						
Test Condition	Radiated measurement						
User Position	<input checked="" type="checkbox"/> EUT will be placed in fixed position. The worst planes is X. <input type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two orthogonal planes. <input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes.						
Operating Mode < 1GHz	<input checked="" type="checkbox"/> 1. AC Power & Radio Link						
Modulation Mode	11b, 11g, HT20, HT40						
Orthogonal Planes of EUT	<table border="1"><thead><tr><th>X Plane</th><th>Y Plane</th><th>Z Plane</th></tr></thead><tbody><tr><td></td><td></td><td></td></tr></tbody></table>	X Plane	Y Plane	Z Plane			
X Plane	Y Plane	Z Plane					

2.5 Test Setup Diagram

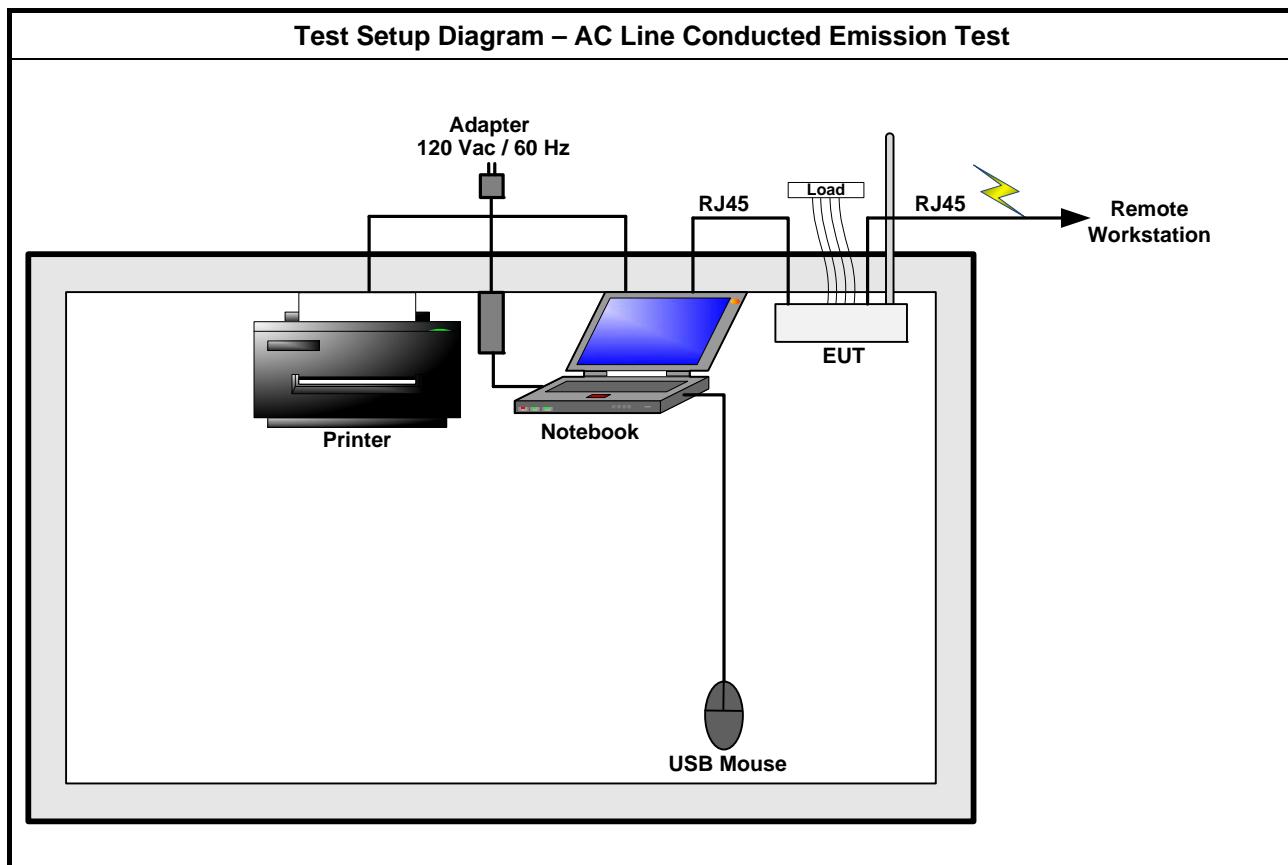

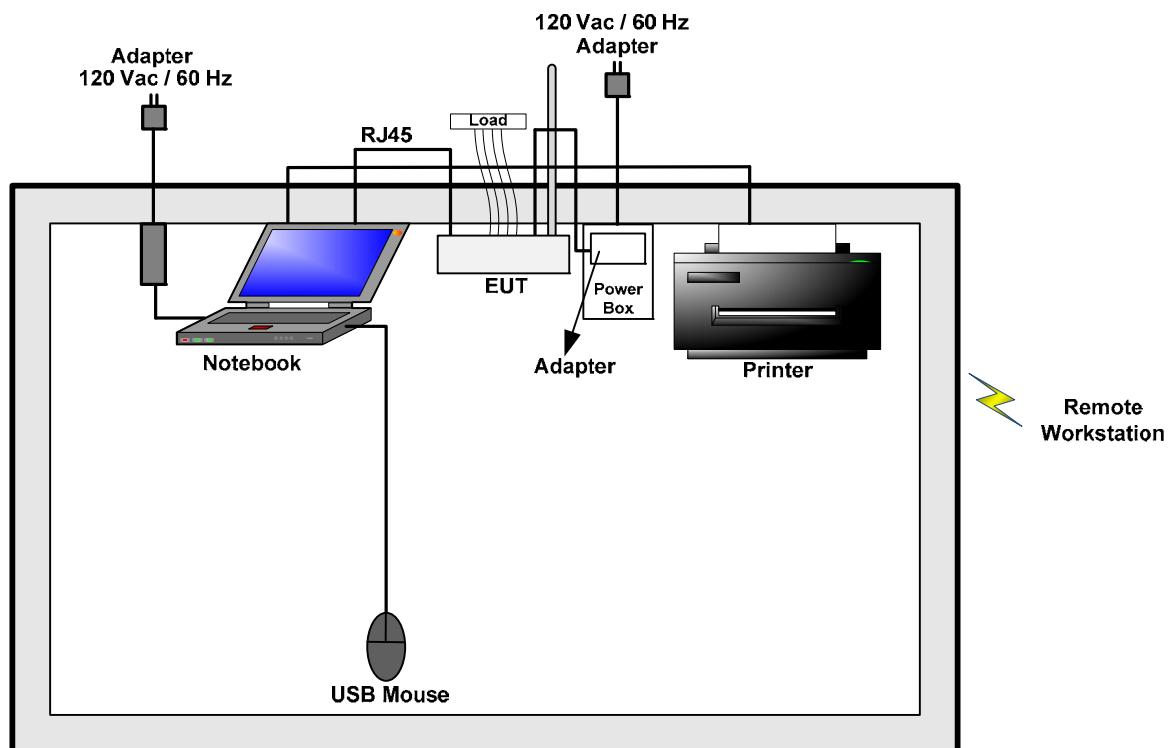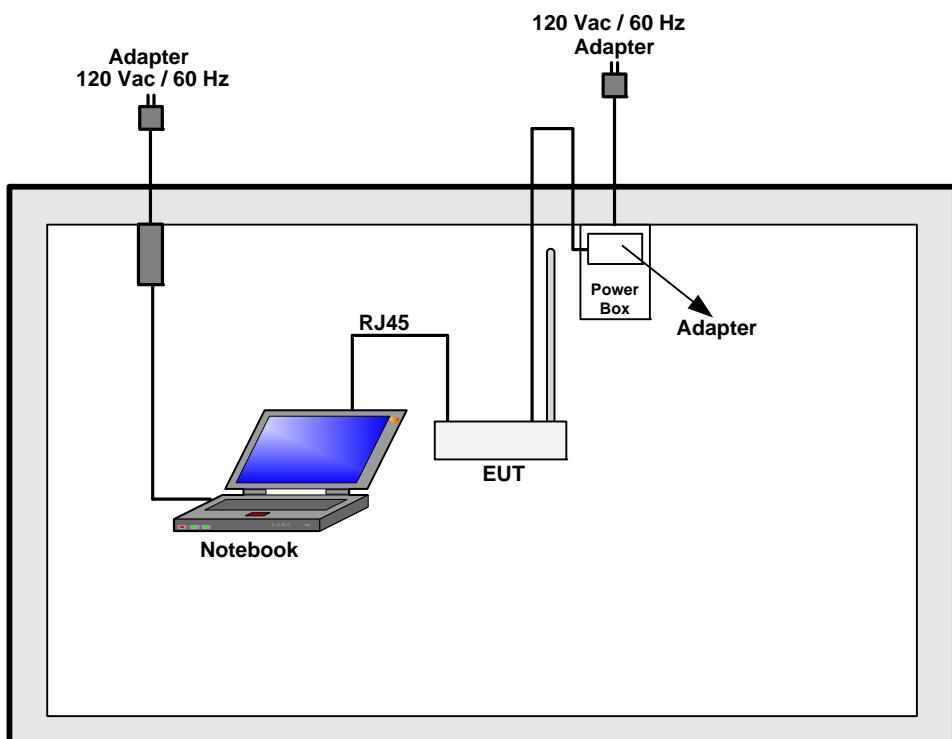Test Setup Diagram - Radiated Test (Below 1GHz)
Operating Mode **AC Power & Radio link**

Test Setup Diagram - Radiated Test (Above 1GHz)
Operating Mode **Transmission Mode**


3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures


Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.


3.1.4 Test Setup

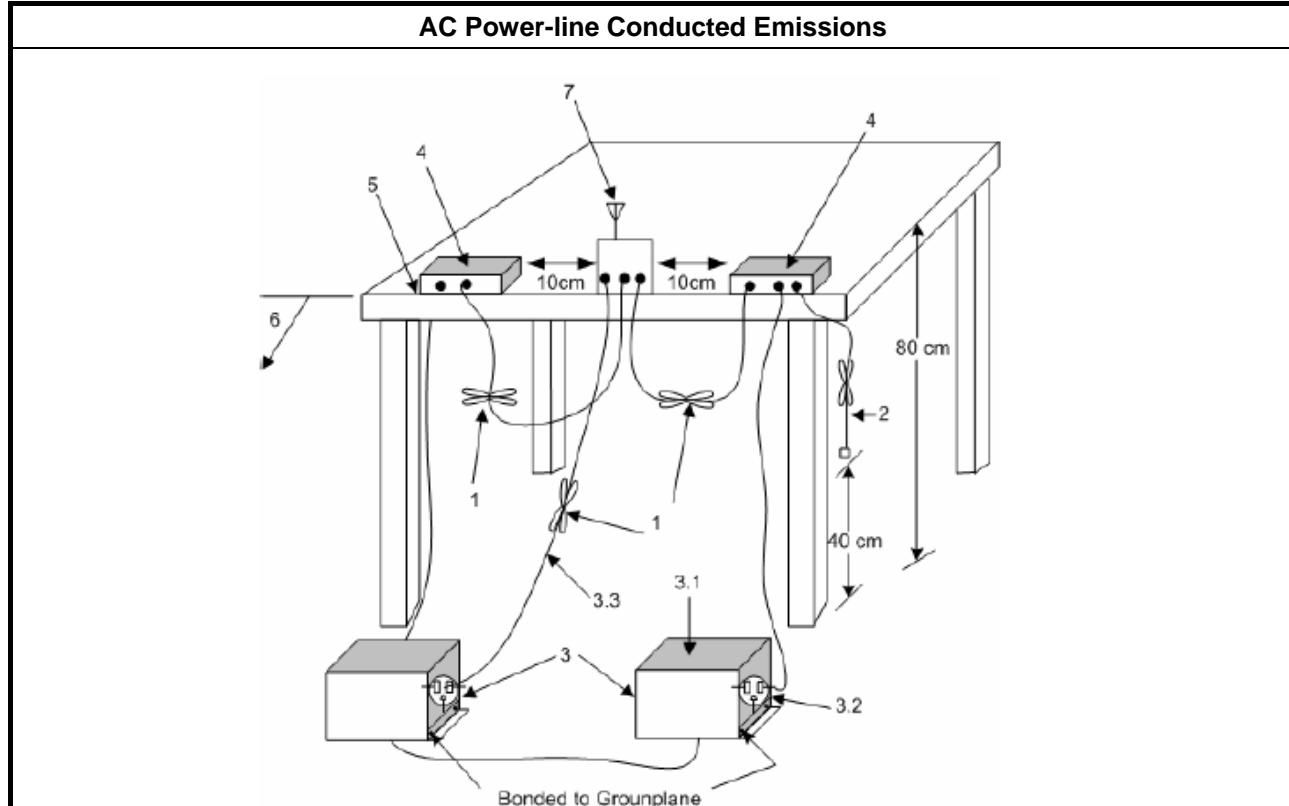



3.1.5 Test Result of AC Power-line Conducted Emissions

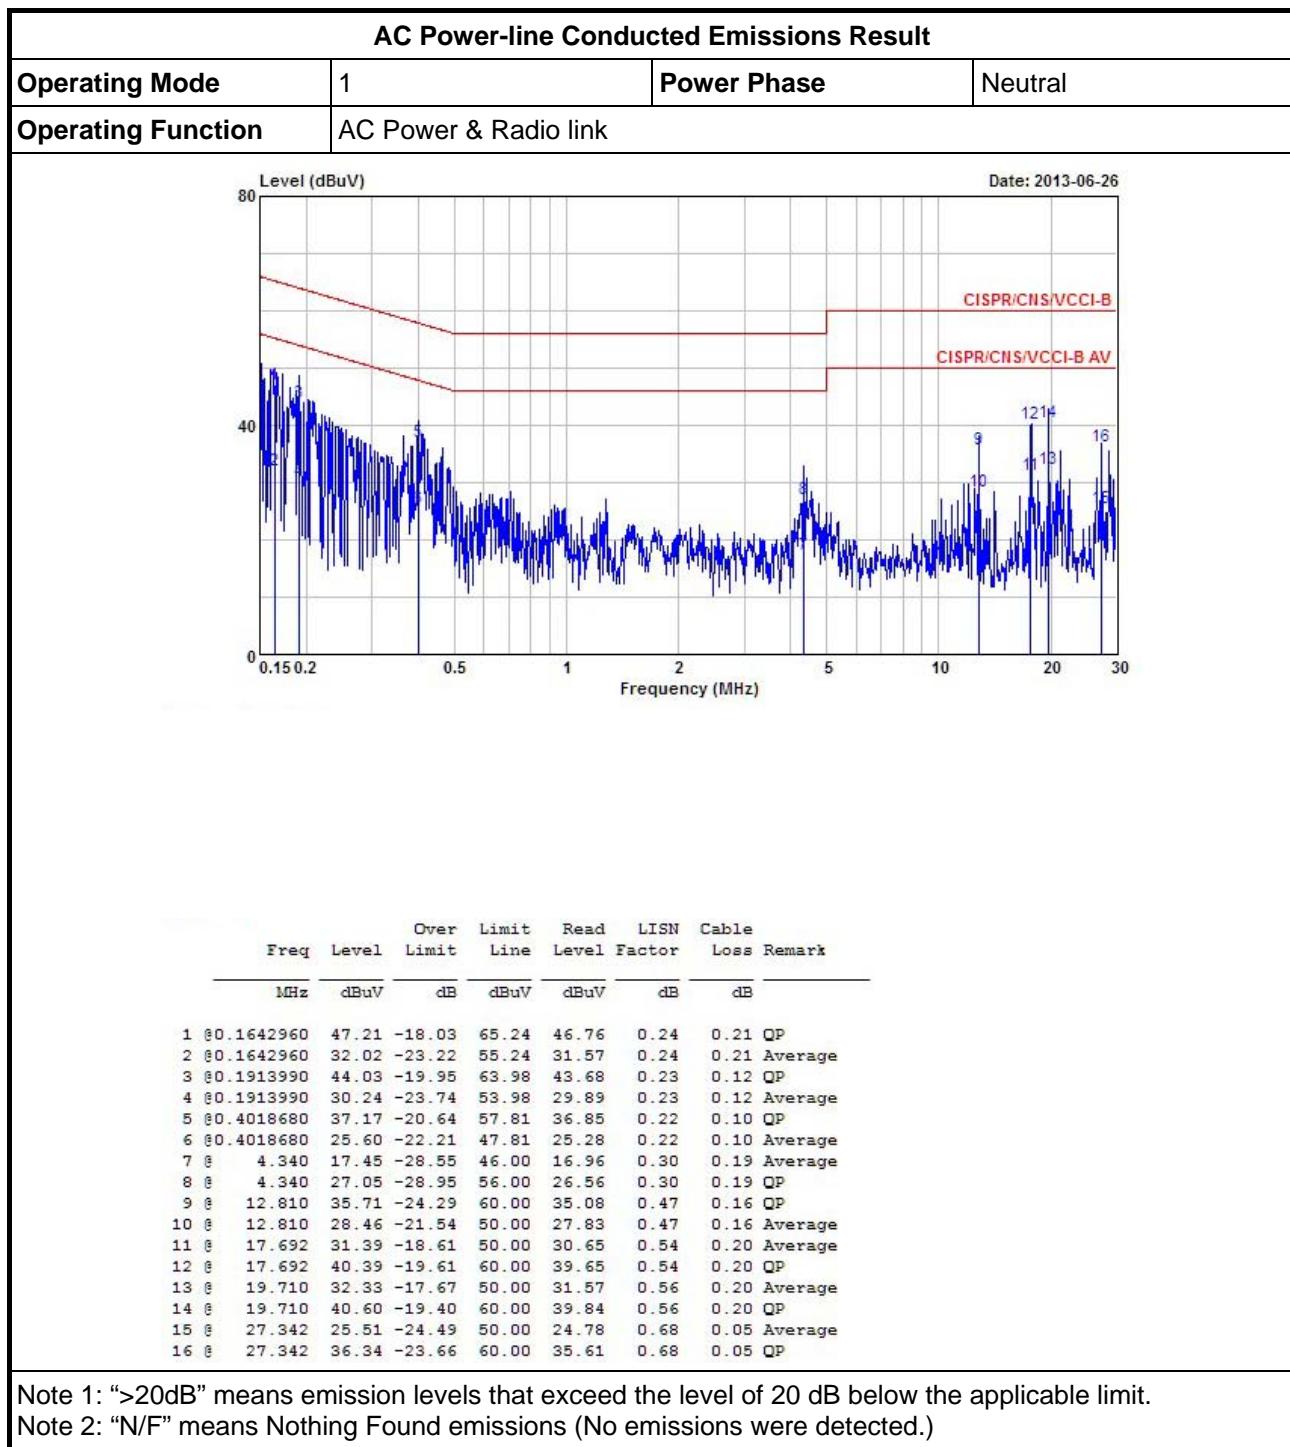

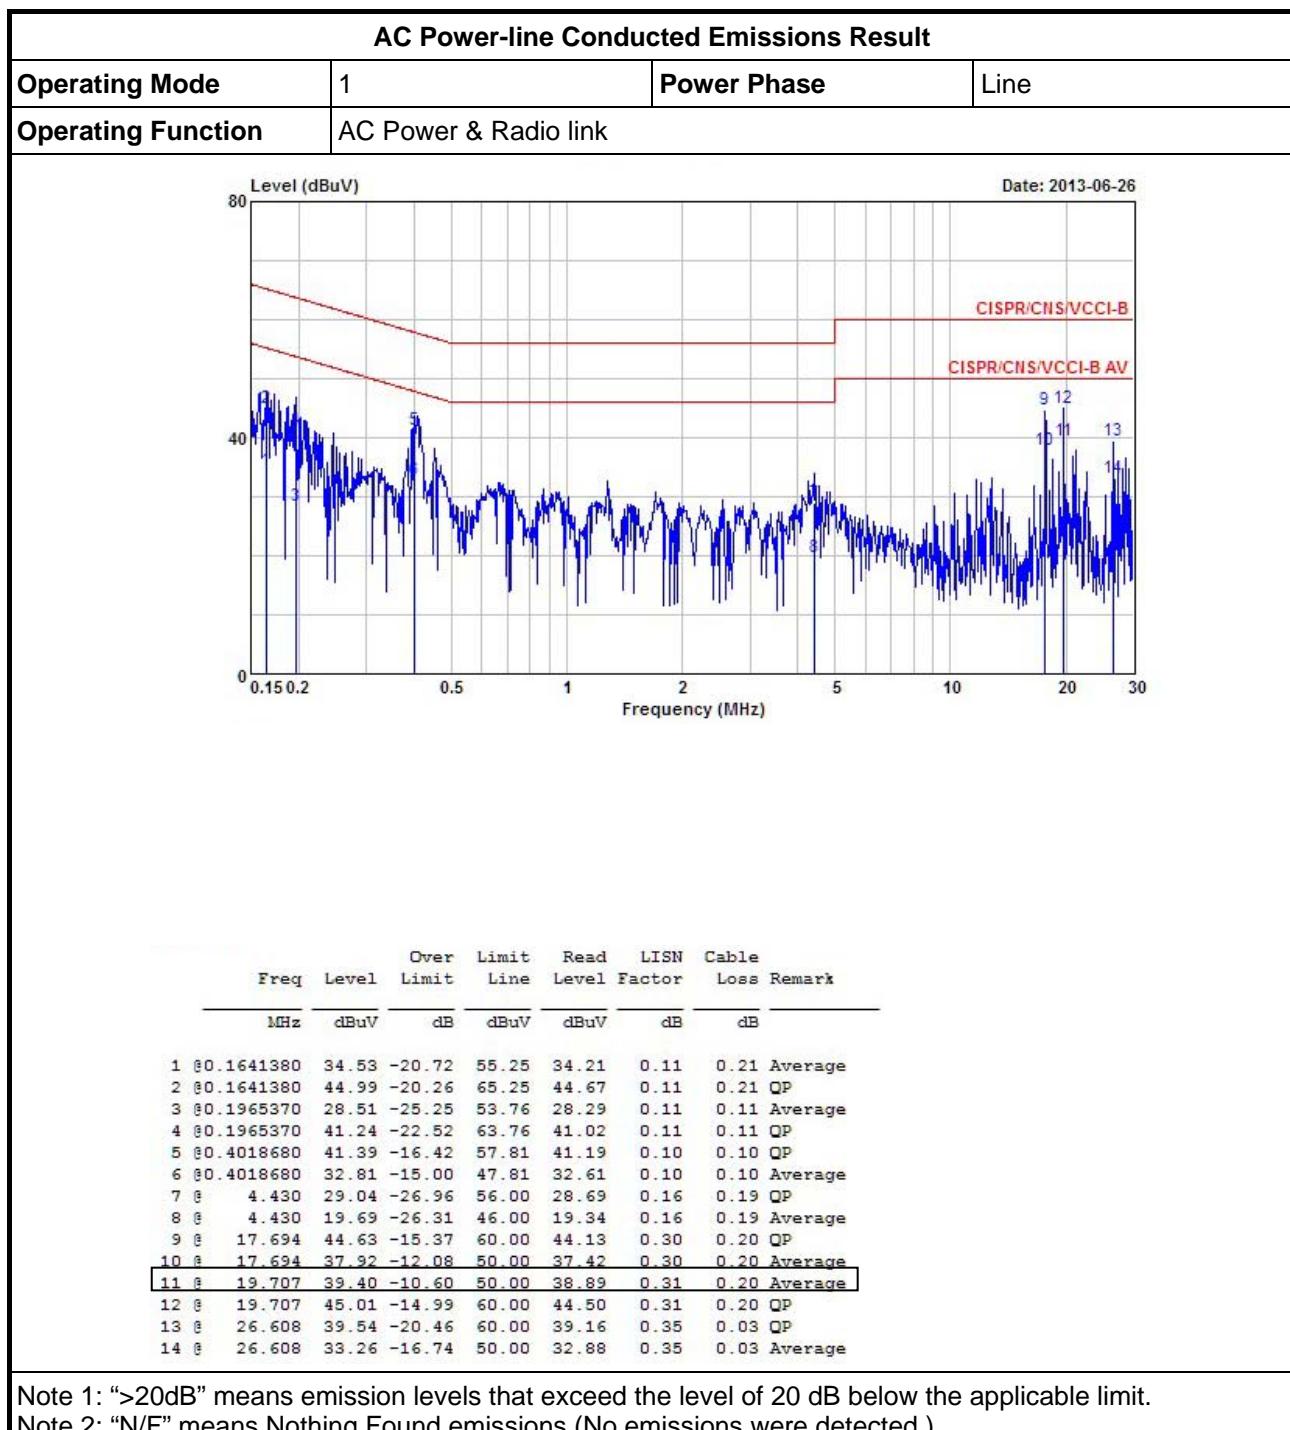

3.2 6dB Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
<input checked="" type="checkbox"/> 6 dB bandwidth \geq 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.1 Option 1 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.2 Option 2 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
<input checked="" type="checkbox"/> For conducted measurement.
<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input type="checkbox"/> The EUT supports multiple transmit chains using options given below:
<input type="checkbox"/> Option 1: Multiple transmit chains measurements need to be performed on one of the active transmit chains (antenna outputs). All measurement had be performed on transmit chains 1.
<input type="checkbox"/> Option 2: Multiple transmit chains measurements need to be performed on each transmit chains individually (antenna outputs). All measurement had be performed on all transmit chains.

3.2.4 Test Setup

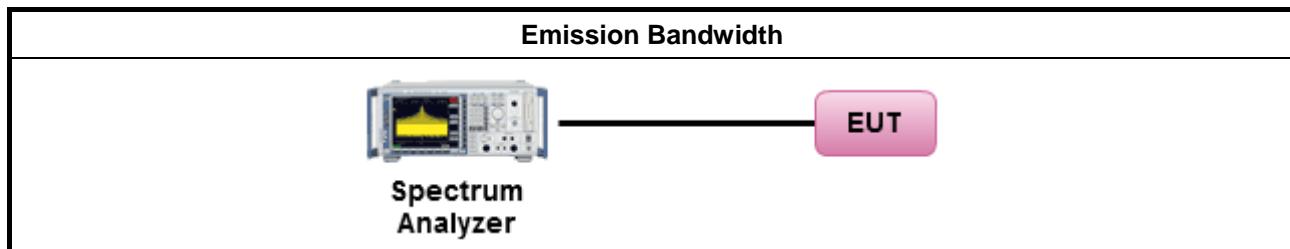



3.2.5 Test Result of Emission Bandwidth


Emission Bandwidth Result				
Power Level	1		Emission Bandwidth (MHz)	
Modulation Mode	N _{TX}	Freq. (MHz)	99% Bandwidth	6dB Bandwidth
			Chain- Port 1	Chain- Port 1
11b	1	2412	14.75	10.14
11b	1	2437	14.85	9.30
11b	1	2462	14.57	10.14
11g	1	2412	16.45	16.24
11g	1	2437	16.75	16.40
11g	1	2462	16.43	16.28
HT20	1	2412	17.85	17.56
HT20	1	2437	17.57	17.16
HT20	1	2462	17.79	17.00
HT40	1	2412	35.78	34.96
HT40	1	2437	35.90	35.56
HT40	1	2462	35.66	35.28
Limit			N/A	≥500 kHz
Result			Complied	

Note 1: N_{TX} = Number of Transmit Chains




Emission Bandwidth Plots


11b – F1 [Port 1]

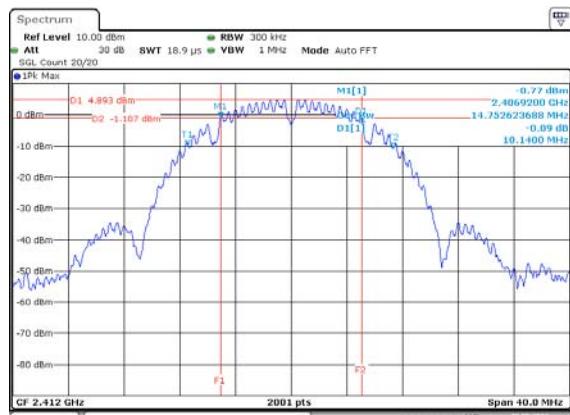


11g – F1 [Port 1]

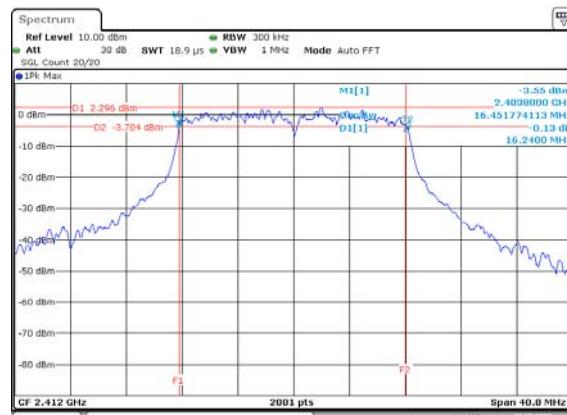


11b – F2 [Port 1]

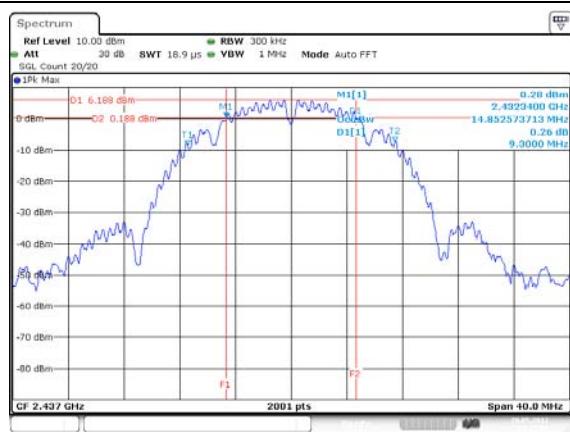


11g – F2 [Port 1]

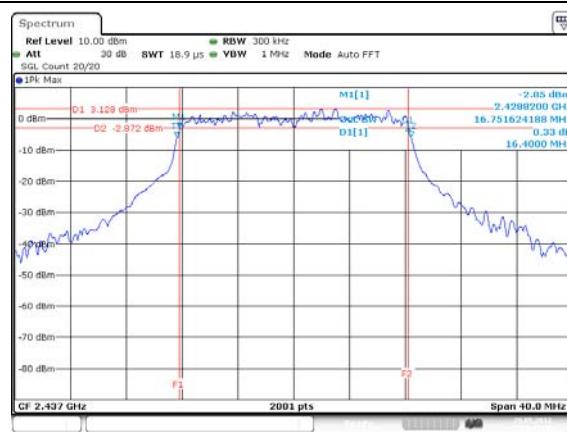

11b – F3 [Port 1]

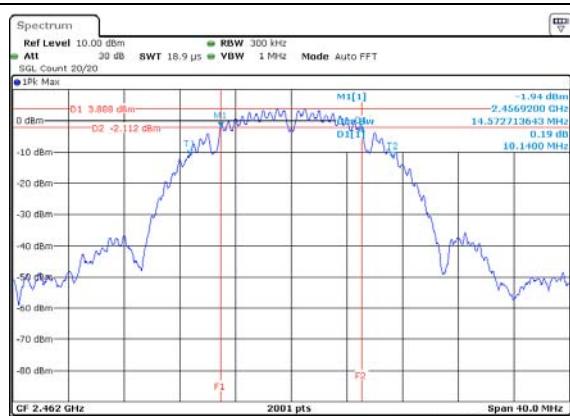


11g – F3 [Port 1]

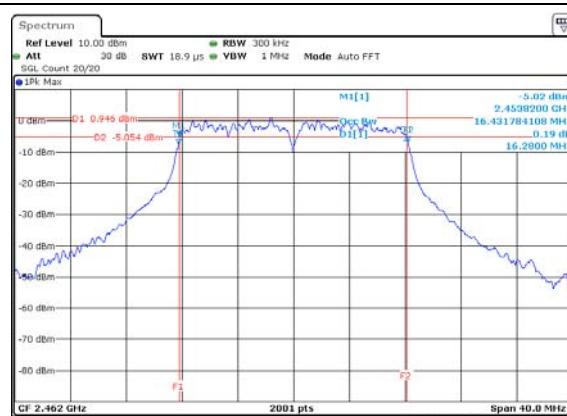




Emission Bandwidth Plots

HT20 – F1 [Port 1]

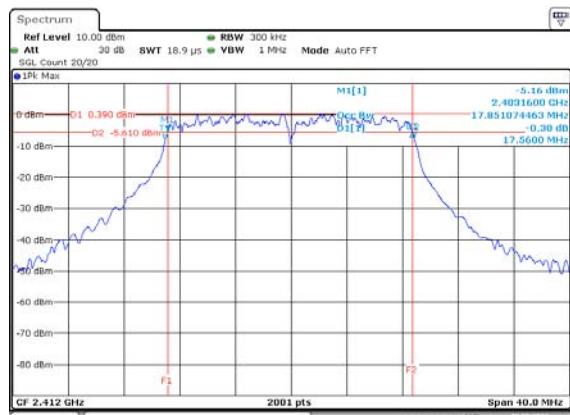


Date: 29.MAY.2012 11:57:42

HT40 – F1 [Port 1]

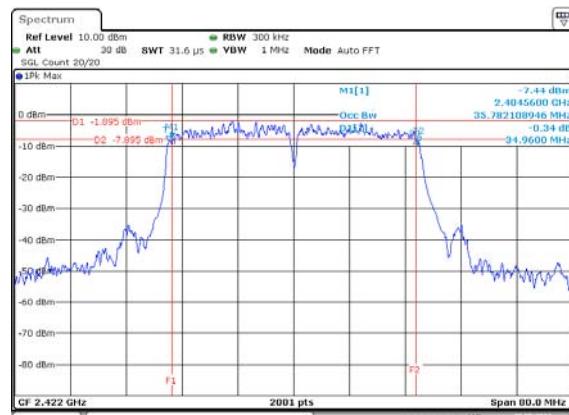


Date: 29.MAY.2012 12:09:09

HT20 – F2 [Port 1]

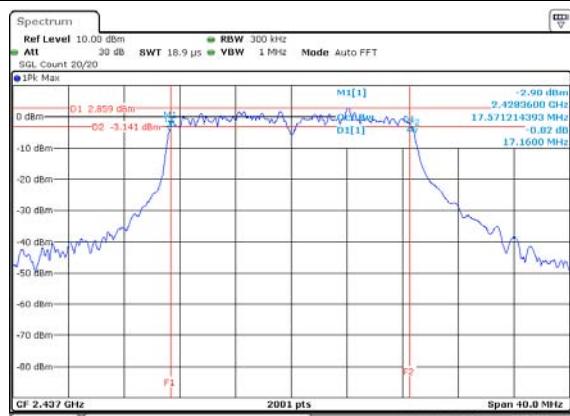


Date: 29.MAY.2012 11:58:32

HT40 – F5 [Port 1]

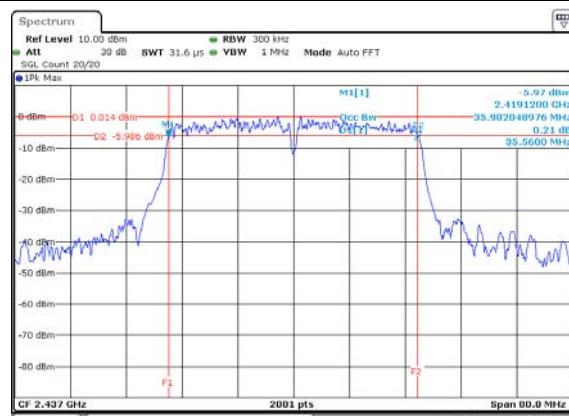


Date: 29.MAY.2012 12:13:47

HT20 – F3 [Port 1]

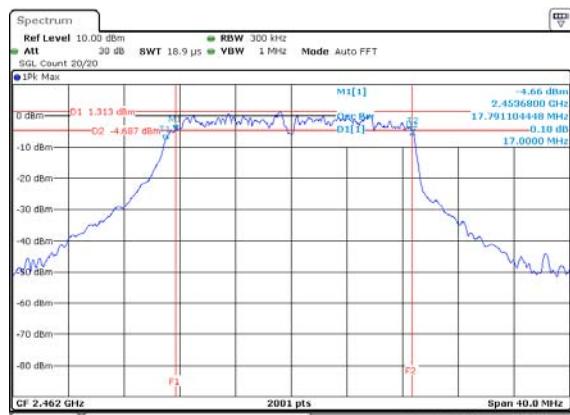

Date: 29.MAY.2012 11:56:47

HT40 – F6 [Port 1]

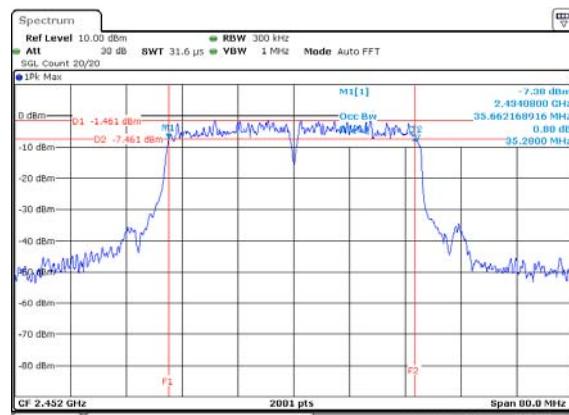

Date: 29.MAY.2012 12:16:51



3.3 RF Output Power

3.3.1 RF Output Power Limit

RF Output Power Limit	
Maximum Peak Conducted Output Power or Maximum Conducted Output Power Limit	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band:	
<input checked="" type="checkbox"/> If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)	
<input checked="" type="checkbox"/> Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm	
<input type="checkbox"/> Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm	
<input type="checkbox"/> Smart antenna system (SAS):	
	<input type="checkbox"/> Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<input type="checkbox"/> Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<input type="checkbox"/> Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
e.i.r.p. Power Limit:	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band	
<input checked="" type="checkbox"/> Point-to-multipoint systems (P2M): $P_{eirp} \leq 36$ dBm (4 W)	
<input type="checkbox"/> Point-to-point systems (P2P): $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX}])$ dBm	
<input type="checkbox"/> Smart antenna system (SAS)	
	<input type="checkbox"/> Single beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	<input type="checkbox"/> Overlap beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	<input type="checkbox"/> Aggregate power on all beams: $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX} + 8])$ dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi. P_{eirp} = e.i.r.p. Power in dBm.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/> Maximum Peak Conducted Output Power	<input type="checkbox"/> Refer as FCC KDB 558074, clause 9.1.1 Option 1 (RBW \geq EBW method). <input type="checkbox"/> Refer as FCC KDB 558074, clause 9.1.2 Option 2 (integrated band power method). <input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 9.1.3 Option 2 (peak power meter for VBW \geq DTS BW)
<input checked="" type="checkbox"/> Maximum Conducted Output Power	[duty cycle \geq 98% or external video / power trigger] <input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 9.2.2.2 Method AVGSA-1 (spectral trace averaging). <input type="checkbox"/> Refer as FCC KDB 558074, clause 9.2.2.3 Method AVGSA-1 Alt. (slow sweep speed) duty cycle < 98% and average over on/off periods with duty factor <input type="checkbox"/> Refer as FCC KDB 558074, clause 9.2.2.4 Method AVGSA-2 (spectral trace averaging). <input type="checkbox"/> Refer as FCC KDB 558074, clause 9.2.2.5 Method AVGSA-2 Alt. (slow sweep speed) RF power meter and average over on/off periods with duty factor or gated trigger <input type="checkbox"/> Refer as FCC KDB 558074, clause 9.2.3 Method AVGPM (using an RF average power meter).
<input checked="" type="checkbox"/> For conducted measurement.	<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain. <input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case. <input type="checkbox"/> The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them. <input type="checkbox"/> If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$

3.3.4 Test Setup

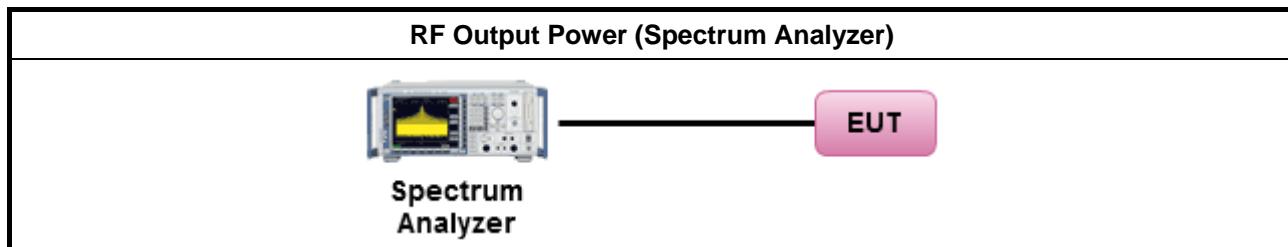



3.3.5 Test Result of Maximum Peak Conducted Output Power

Maximum Peak Conducted Output Power Result							
Power Level		1	RF Output Power (dBm)				
Directional Gain (dBi)		5					
Modulation Mode	N _{TX}	Freq. (MHz)	Chain-Port 1	Sum Chain	Power Limit	EIRP Power	EIRP Limit
11b	1	2412	17.68	17.68	30.0	22.68	36.0
11b	1	2437	18.82	18.82	30.0	23.82	36.0
11b	1	2462	16.68	16.68	30.0	21.68	36.0
Result		Complied					

Note 1: N_{TX} = Number of Transmit Chains

Maximum Peak Conducted Output Power Result							
Power Level		1	RF Output Power (dBm)				
Directional Gain (dBi)		5					
Modulation Mode	N _{TX}	Freq. (MHz)	Chain-Port 1	Sum Chain	Power Limit	EIRP Power	EIRP Limit
11g	1	2412	19.46	19.46	30.0	24.46	36.0
11g	1	2437	20.74	20.74	30.0	25.74	36.0
11g	1	2462	18.28	18.28	30.0	23.28	36.0
Result		Complied					

Note 1: N_{TX} = Number of Transmit Chains



Maximum Peak Conducted Output Power Result							
Power Level		1	RF Output Power (dBm)				
Directional Gain (dBi)		5					
Modulation Mode	N _{TX}	Freq. (MHz)	Chain-Port 1	Sum Chain	Power Limit	EIRP Power	EIRP Limit
HT20	1	2412	18.88	18.88	30.0	23.88	36.0
HT20	1	2437	19.99	19.99	30.0	24.99	36.0
HT20	1	2462	18.54	18.54	30.0	23.54	36.0
Result		Complied					

Note 1: N_{TX} = Number of Transmit Chains

Maximum Peak Conducted Output Power Result							
Power Level		1	RF Output Power (dBm)				
Directional Gain (dBi)		5					
Modulation Mode	N _{TX}	Freq. (MHz)	Chain-Port 1	Sum Chain	Power Limit	EIRP Power	EIRP Limit
HT40	1	2422	18.12	18.12	30.0	23.12	36.0
HT40	1	2437	20.63	20.63	30.0	25.63	36.0
HT40	1	2452	18.89	18.89	30.0	23.89	36.0
Result		Complied					

Note 1: N_{TX} = Number of Transmit Chains



3.3.6 Test Result of Maximum Conducted Output Power

Maximum Conducted Output Power Result							
Power Level		1	RF Output Power (dBm)				
Directional Gain (dBi)		5					
Modulation Mode	N _{TX}	Freq. (MHz)	Chain-Port 1	Sum Chain	Power Limit	EIRP Power	EIRP Limit
11b	1	2412	14.59	14.59	30.0	19.59	36.0
11b	1	2437	15.71	15.71	30.0	20.71	36.0
11b	1	2462	13.58	13.58	30.0	18.58	36.0
Result		Complied					

Note 1: N_{TX} = Number of Transmit Chains

Maximum Conducted Output Power Result							
Power Level		1	RF Output Power (dBm)				
Directional Gain (dBi)		5					
Modulation Mode	N _{TX}	Freq. (MHz)	Chain-Port 1	Sum Chain	Power Limit	EIRP Power	EIRP Limit
11g	1	2412	12.33	12.33	30.0	17.33	36.0
11g	1	2437	13.64	13.64	30.0	18.64	36.0
11g	1	2462	11.10	11.10	30.0	16.10	36.0
Result		Complied					

Note 1: N_{TX} = Number of Transmit Chains



Maximum Conducted Output Power Result							
Power Level		1	RF Output Power (dBm)				
Directional Gain (dBi)		5					
Modulation Mode	N _{TX}	Freq. (MHz)	Chain-Port 1	Sum Chain	Power Limit	EIRP Power	EIRP Limit
HT20	1	2412	11.41	11.41	30.0	16.41	36.0
HT20	1	2437	12.53	12.53	30.0	17.53	36.0
HT20	1	2462	11.08	11.08	30.0	16.08	36.0
Result		Complied					

Note 1: N_{TX} = Number of Transmit Chains


Maximum Conducted Output Power Result							
Power Level		1	RF Output Power (dBm)				
Directional Gain (dBi)		5					
Modulation Mode	N _{TX}	Freq. (MHz)	Chain-Port 1	Sum Chain	Power Limit	EIRP Power	EIRP Limit
HT40	1	2422	10.97	10.97	30.0	15.97	36.0
HT40	1	2437	13.47	13.47	30.0	18.47	36.0
HT40	1	2452	11.70	11.70	30.0	16.70	36.0
Result		Complied					

Note 1: N_{TX} = Number of Transmit Chains




Maximum Peak Conducted Output Power Plots and Maximum Conducted Output Power


11b – F1 [Port 1]

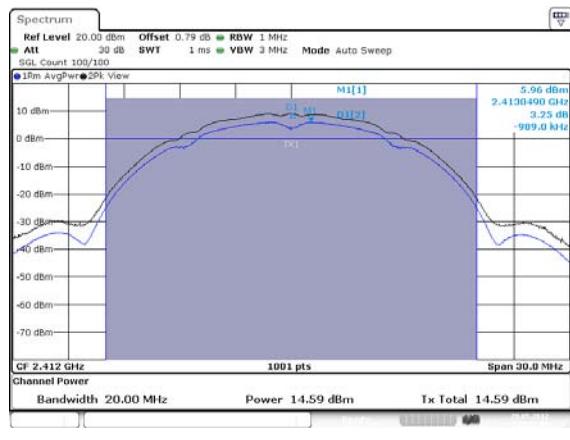


11g – F1 [Port 1]

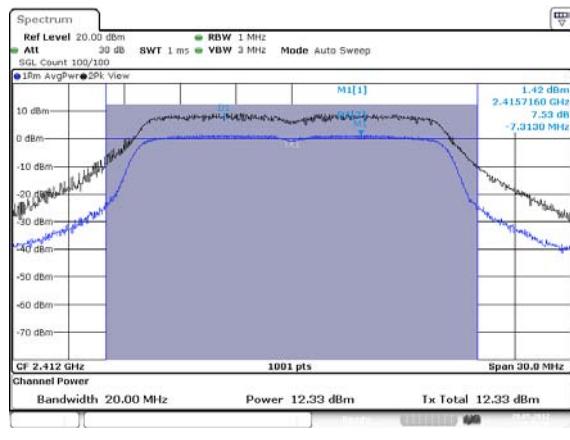


11b – F2 [Port 1]

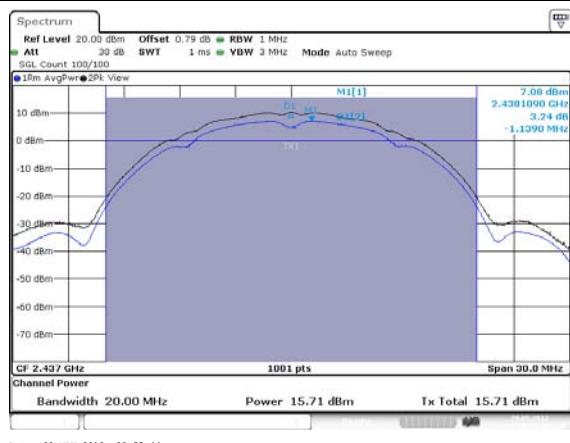


11g – F2 [Port 1]






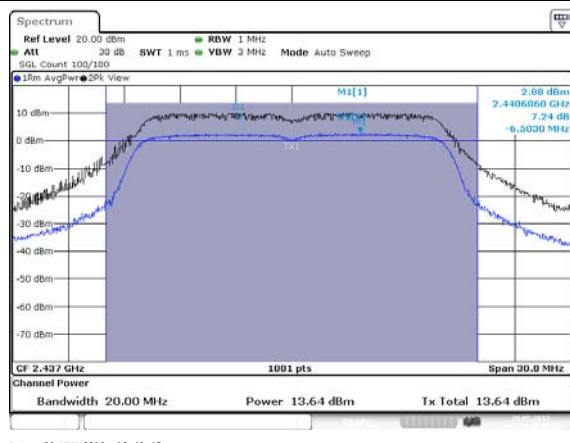


11b – F3 [Port 1]

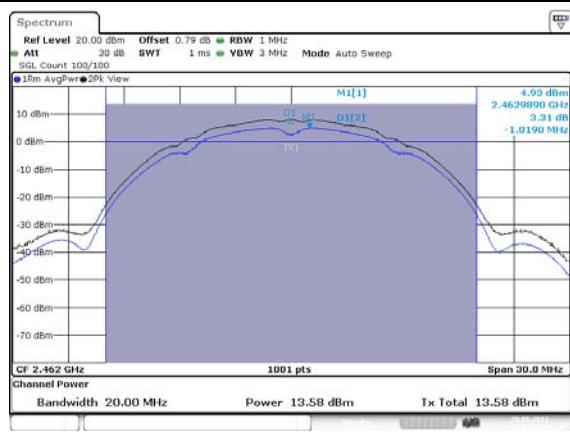

11G-20M – F3 [Port 1]

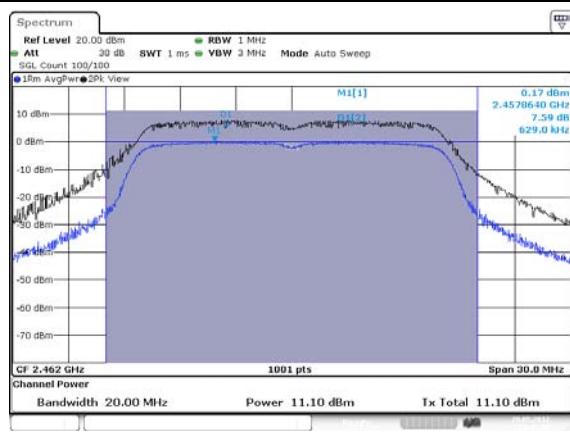

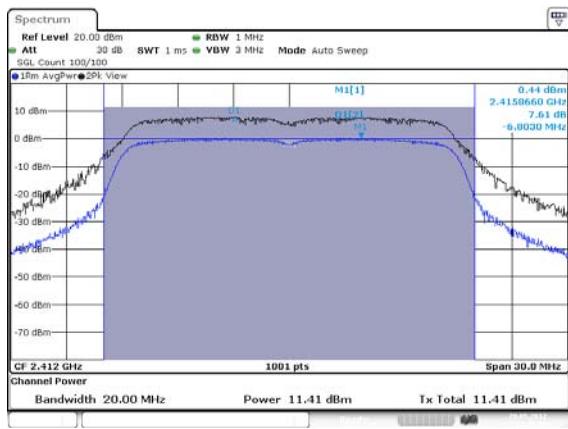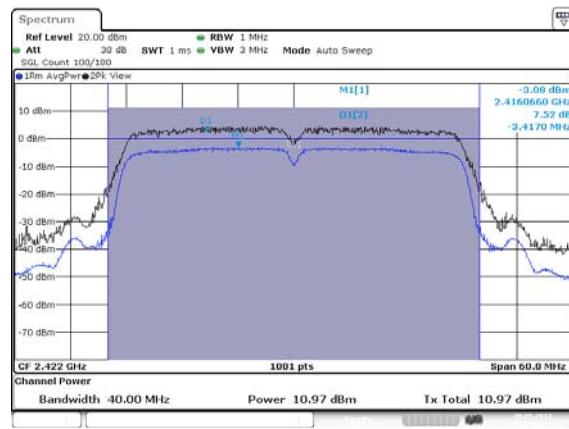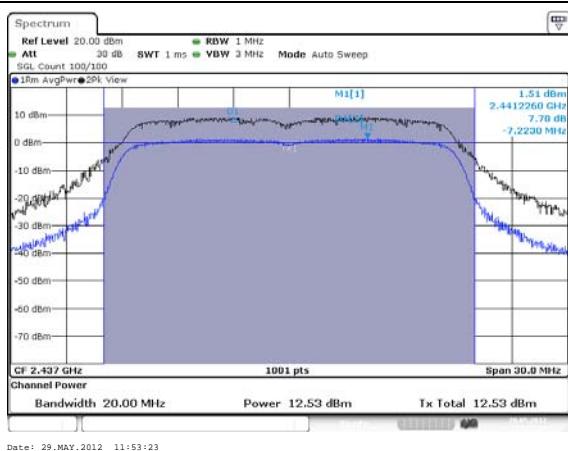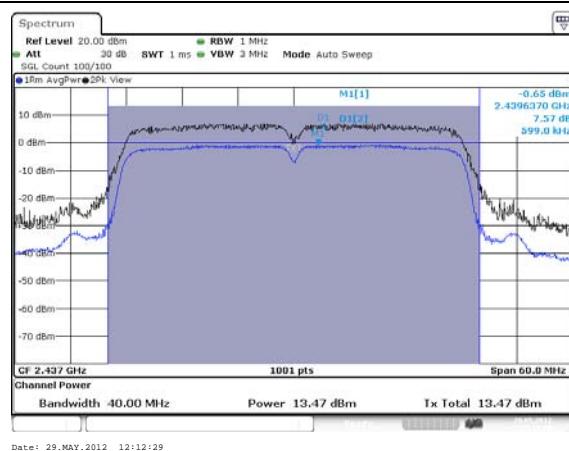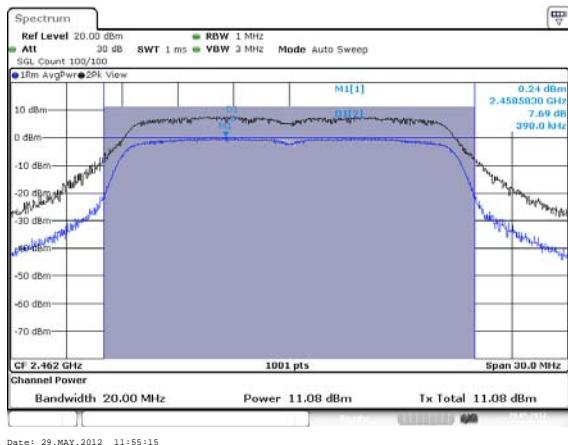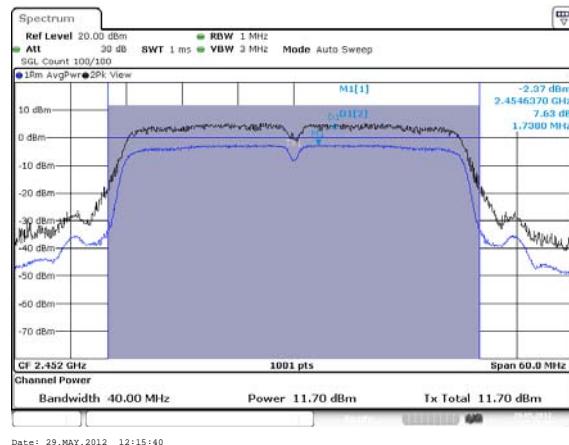Maximum Peak Conducted Output Power Plots and Maximum Conducted Output Power
HT20 – F1 [Port 1]

HT40 – F1 [Port 1]

HT20 – F2 [Port 1]

HT40 – F2 [Port 1]

HT20 – F3 [Port 1]

HT40 – F3 [Port 1]




3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
<input checked="" type="checkbox"/> Power Spectral Density (PSD) $\leq 8 \text{ dBm/3kHz}$

3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 10.2 Method PKPSD (RBW=3-100kHz;detector=peak).. [duty cycle $\geq 98\%$ or external video / power trigger]
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.3 Method AVGPSD-1 (spectral trace averaging).
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.4 Method AVGPSD-1 Alt. (slow sweep speed)
duty cycle $< 98\%$ and average over on/off periods with duty factor
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.5 Method AVGPSD-2 (spectral trace averaging).
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.6 Method AVGPSD-2 Alt. (slow sweep speed)
<input checked="" type="checkbox"/> For conducted measurement.
<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input type="checkbox"/> The EUT supports multiple transmit chains using options given below:
<input type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the N_{TX} output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
<input type="checkbox"/> Option 2: Measure and add $10 \log(N)$ dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with $10 \log(N)$. Or each transmit chains shall be add $10 \log(N)$ to compared with the limit.



3.4.4 Test Setup

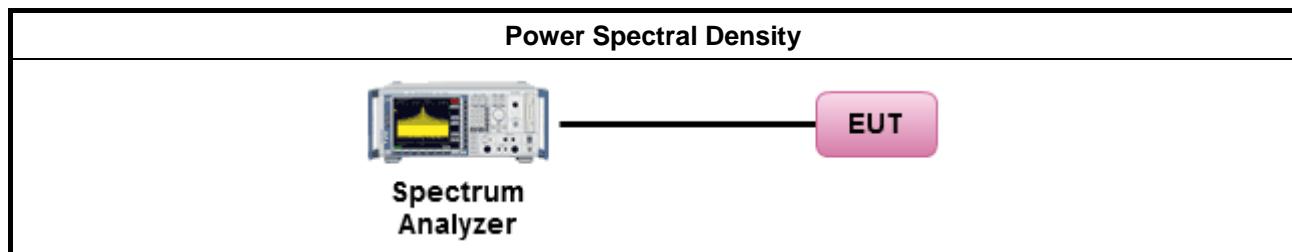

3.4.5 Test Result of Power Spectral Density

Power Spectral Density Result				
Power Level		1	Power Spectral Density	
Directional Gain (dBi)		5		
Modulation Mode	N _{TX}	Freq. (MHz)	Sum All Chains	Power Limit (dBm/3kHz)
11b	1	2412	-12.50	8.0
11b	1	2437	-10.62	8.0
11b	1	2462	-13.74	8.0
Result		Complied		

Note 1: N_{TX} = Number of Transmit Chains

Note 2: PSD [dBm/3kHz] = sum each transmit chains by bin-to-bin PSD [dBm/100kHz] + BWFC [-15.2 dB]

Power Spectral Density Result				
Power Level		1	Power Spectral Density	
Directional Gain (dBi)		5		
Modulation Mode	N _{TX}	Freq. (MHz)	Sum All Chains	Power Limit (dBm/3kHz)
11g	1	2412	-17.15	8.0
11g	1	2437	-16.35	8.0
11g	1	2462	-18.30	8.0
Result		Complied		

Note 1: N_{TX} = Number of Transmit Chains

Note 2: PSD [dBm/3kHz] = sum each transmit chains by bin-to-bin PSD [dBm/100kHz] + BWFC [-15.2 dB]



Power Spectral Density Result				
Power Level		1	Power Spectral Density	
Directional Gain (dBi)		5		
Modulation Mode	N _{TX}	Freq. (MHz)	Sum All Chains	Power Limit (dBm/3kHz)
HT20	1	2412	-17.41	8.0
HT20	1	2437	-17.57	8.0
HT20	1	2462	-17.64	8.0
Result		Complied		


Note 1: N_{TX} = Number of Transmit Chains

Note 2: PSD [dBm/3kHz] = sum each transmit chains by bin-to-bin PSD [dBm/100kHz] + BWFC [-15.2 dB]

Power Spectral Density Result				
Power Level		1	Power Spectral Density	
Directional Gain (dBi)		5		
Modulation Mode	N _{TX}	Freq. (MHz)	Sum All Chains	Power Limit (dBm/3kHz)
HT40	1	2422	-21.71	8.0
HT40	1	2437	-19.59	8.0
HT40	1	2452	-20.86	8.0
Result		Complied		

Note 1: N_{TX} = Number of Transmit Chains


Note 2: PSD [dBm/3kHz] = sum each transmit chains by bin-to-bin PSD [dBm/100kHz] + BWFC [-15.2 dB]

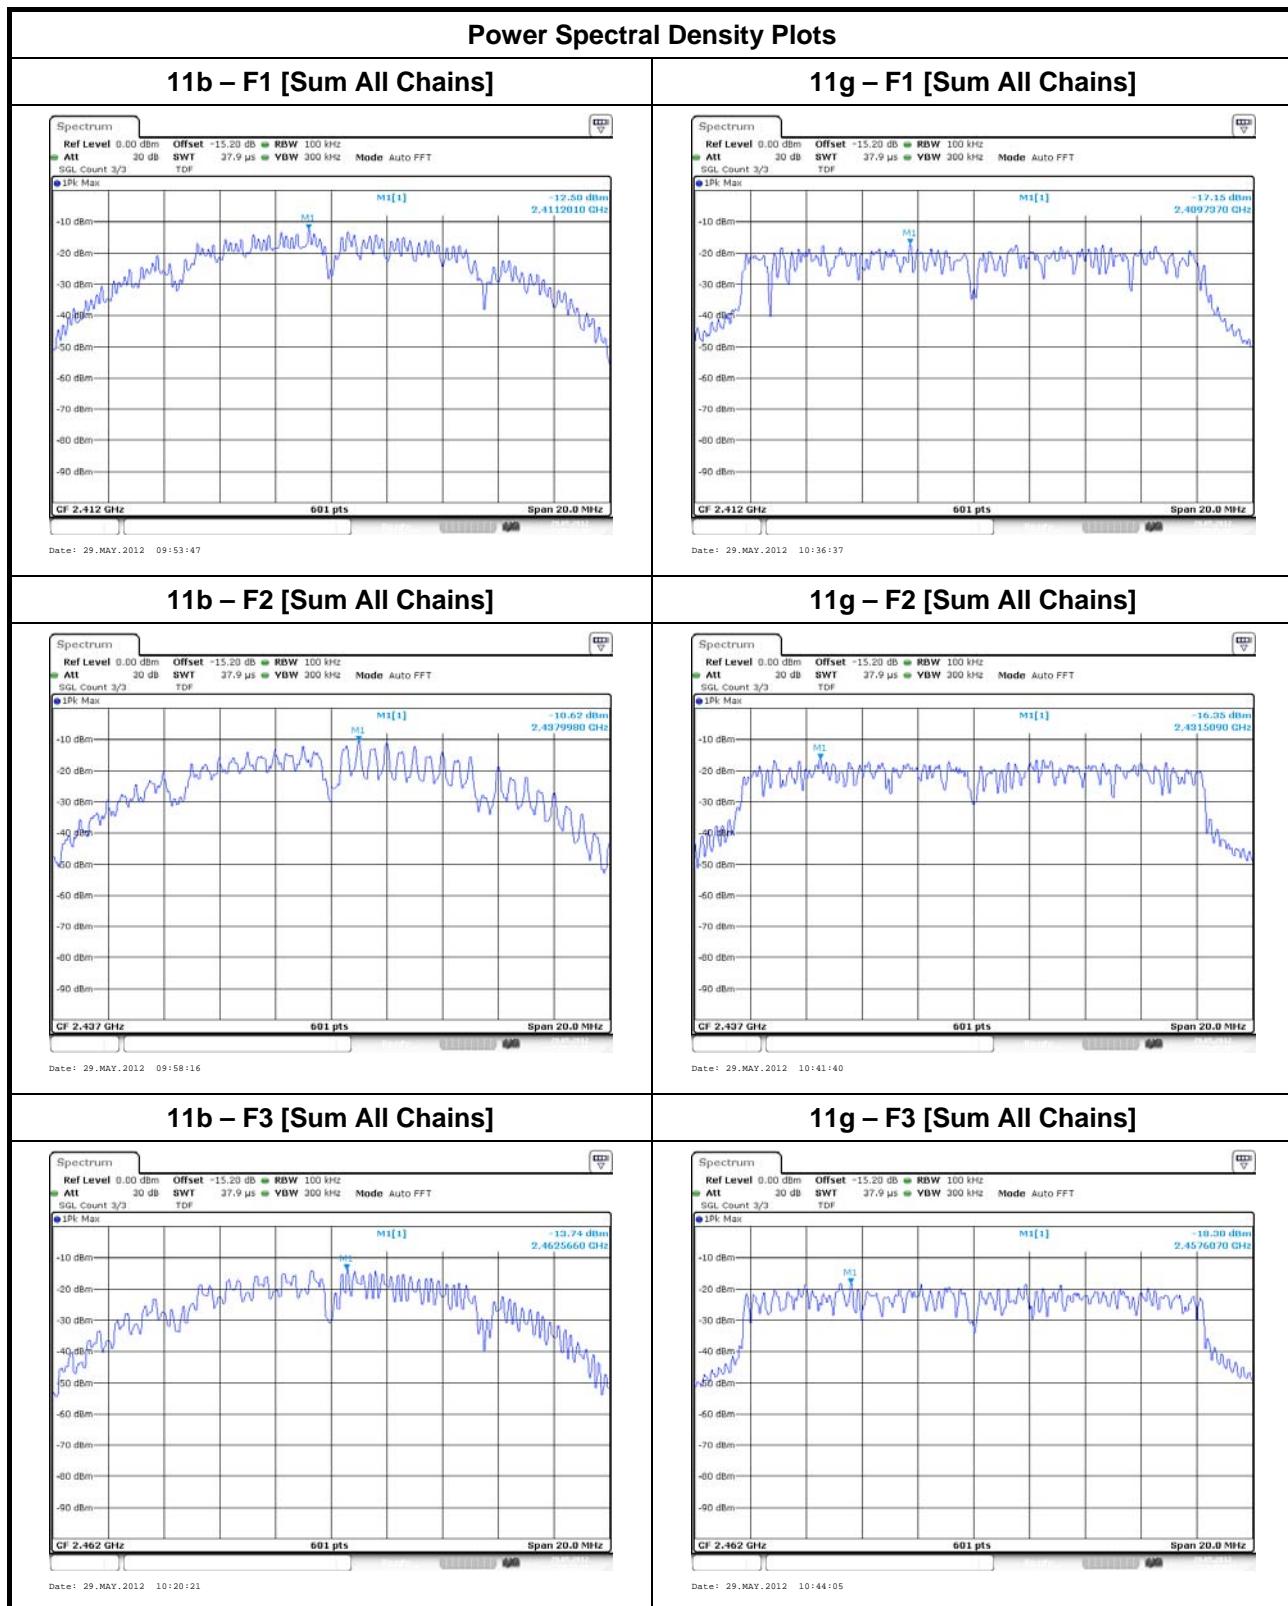




Power Spectral Density Plots


HT20 – F1 [Sum All Chains]

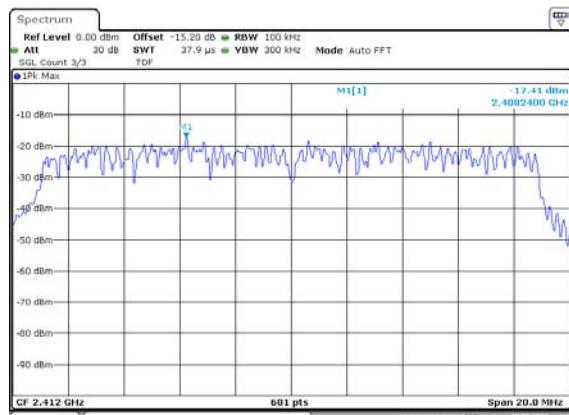


HT40 – F4 [Sum All Chains]

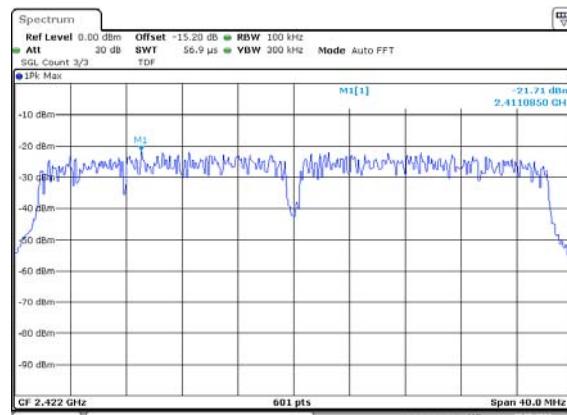


HT20 – F2 [Sum All Chains]

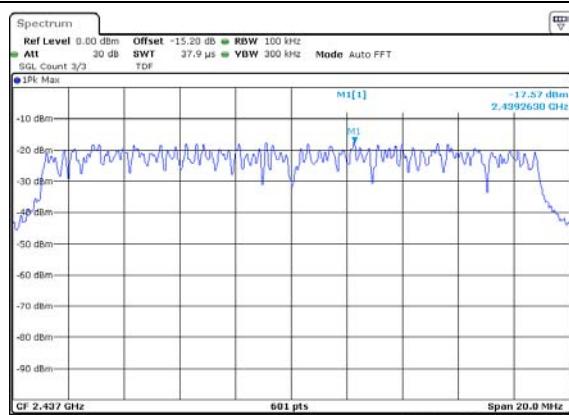


HT40 – F5 [Sum All Chains]

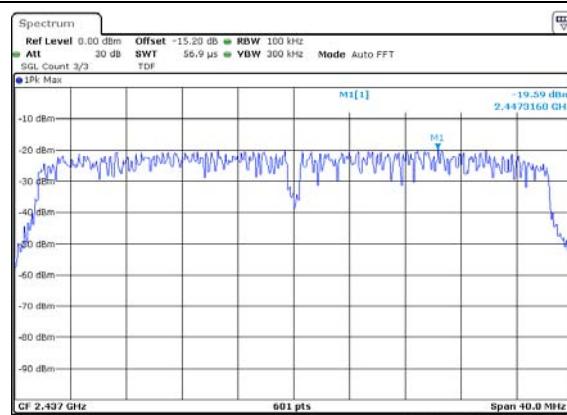

HT20 – F3 [Sum All Chains]

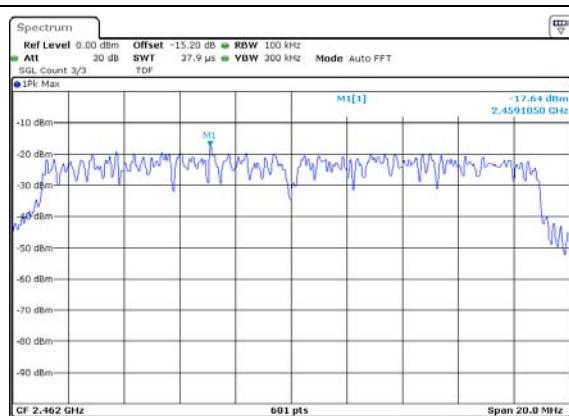


HT40 – F6 [Sum All Chains]

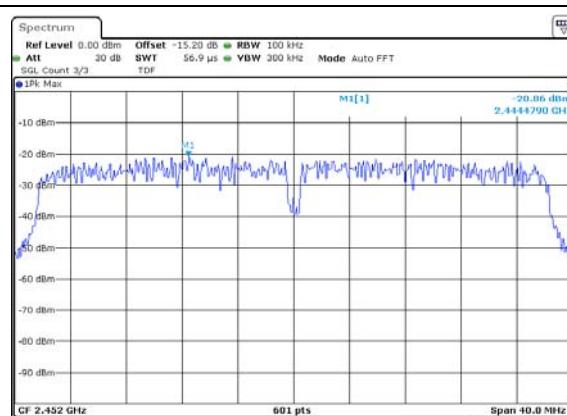

3.5 Transmitter Bandedge Emissions

3.5.1 Transmitter Radiated Bandedge Emissions Limit

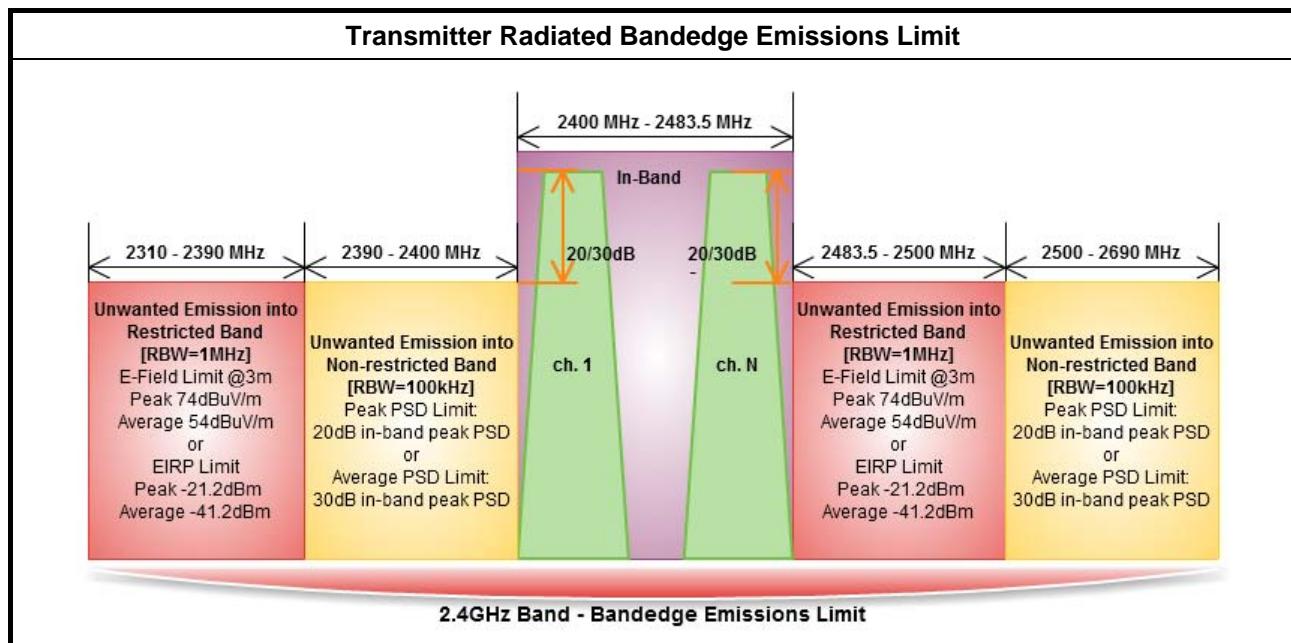

3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.




3.5.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
<input checked="" type="checkbox"/> For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 11 for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 12 for unwanted emissions into restricted bands.
<input type="checkbox"/> Refer as FCC KDB 558074, clause 12.2.5.1 Option 1 (trace averaging for duty cycle $\geq 98\%$)
<input type="checkbox"/> Refer as FCC KDB 558074, clause 12.2.5.2 Option 2 (trace averaging + duty factor).
<input type="checkbox"/> Refer as FCC KDB 558074, clause 12.2.5.3 Option 3 (Reduced VBW $\geq 1/T$).
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 11.3 and 12.2.4 measurement procedure peak limit.
<input checked="" type="checkbox"/> For the transmitter bandedge emissions shall be measured using following options below:
<input type="checkbox"/> Refer as FCC KDB 558074, clause 13.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.
<input checked="" type="checkbox"/> For radiated measurement, refer as FCC KDB 558074, clause 12.2.7.

Test Method
<input type="checkbox"/> For conducted and cabinet radiation measurement, refer as FCC KDB 558074, clause 12.2.2.
<input type="checkbox"/> For conducted unwanted emissions into non-restricted bands (relative emission limits). Devices with multiple transmit chains: Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding 10 log(N) if the measurements are made relative to the in-band emissions on the individual outputs.
<input type="checkbox"/> For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
<input type="checkbox"/> For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.5.4 Test Setup

Transmitter Radiated Bandedge Emissions

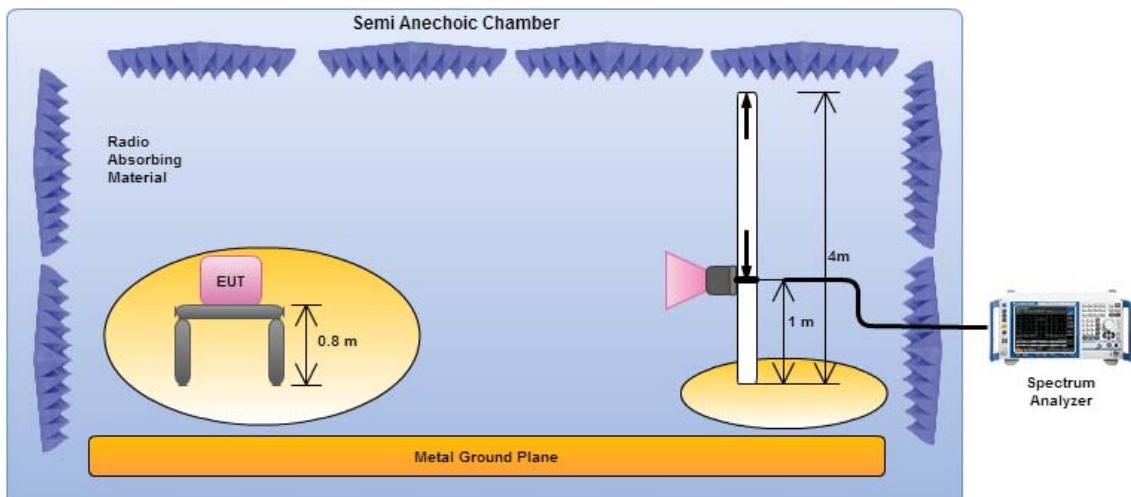

Electric field tests shall be performed in transmitter bandedge emissions using a calibrated horn antenna.




3.5.5 Transmitter Radiated Bandedge Emissions


2400-2483.5MHz Transmitter Radiated Bandedge Emissions (Non-restricted Band)								
Modulation	N _{TX}	Test Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Pol.
11b	1	2412	105.96	2399.490	68.65	37.31	20	V
11b	1	2462	105.20	2519.800	63.73	41.47	20	V
11g	1	2412	99.81	2400.000	69.46	30.35	20	V
11g	1	2462	99.21	2512.700	64.38	34.83	20	V
HT20,M0-7	1	2412	100.17	2400.000	68.89	31.28	20	V
HT20,M0-7	1	2462	100.07	2512.300	63.80	36.27	20	V
HT40,M0-7	1	2422	96.21	2398.440	65.87	30.34	20	V
HT40,M0-7	1	2452	97.70	2520.080	62.80	34.90	20	V

Note 1: Measurement worst emissions of receive antenna polarization.

2400-2483.5MHz Transmitter Radiated Bandedge Emissions (Restricted Band)										
Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
11b	1	2412	3	2386.500	61.75	74	2386.830	50.34	54	V
11b	1	2462	3	2488.200	61.96	74	2487.800	51.17	54	V
11g	1	2412	3	2388.180	60.94	74	2389.630	49.15	54	V
11g	1	2462	3	2485.400	60.95	74	2483.500	49.98	54	V
HT20,M0-7	1	2412	3	2389.630	60.42	74	2390.000	49.25	54	V
HT20,M0-7	1	2462	3	2483.900	61.67	74	2483.800	49.52	54	V
HT40,M0-7	1	2422	3	2388.410	62.41	74	2389.070	50.01	54	V
HT40,M0-7	1	2452	3	2487.560	65.22	74	2483.720	52.25	54	V

Note 1: Measurement worst emissions of receive antenna polarization.

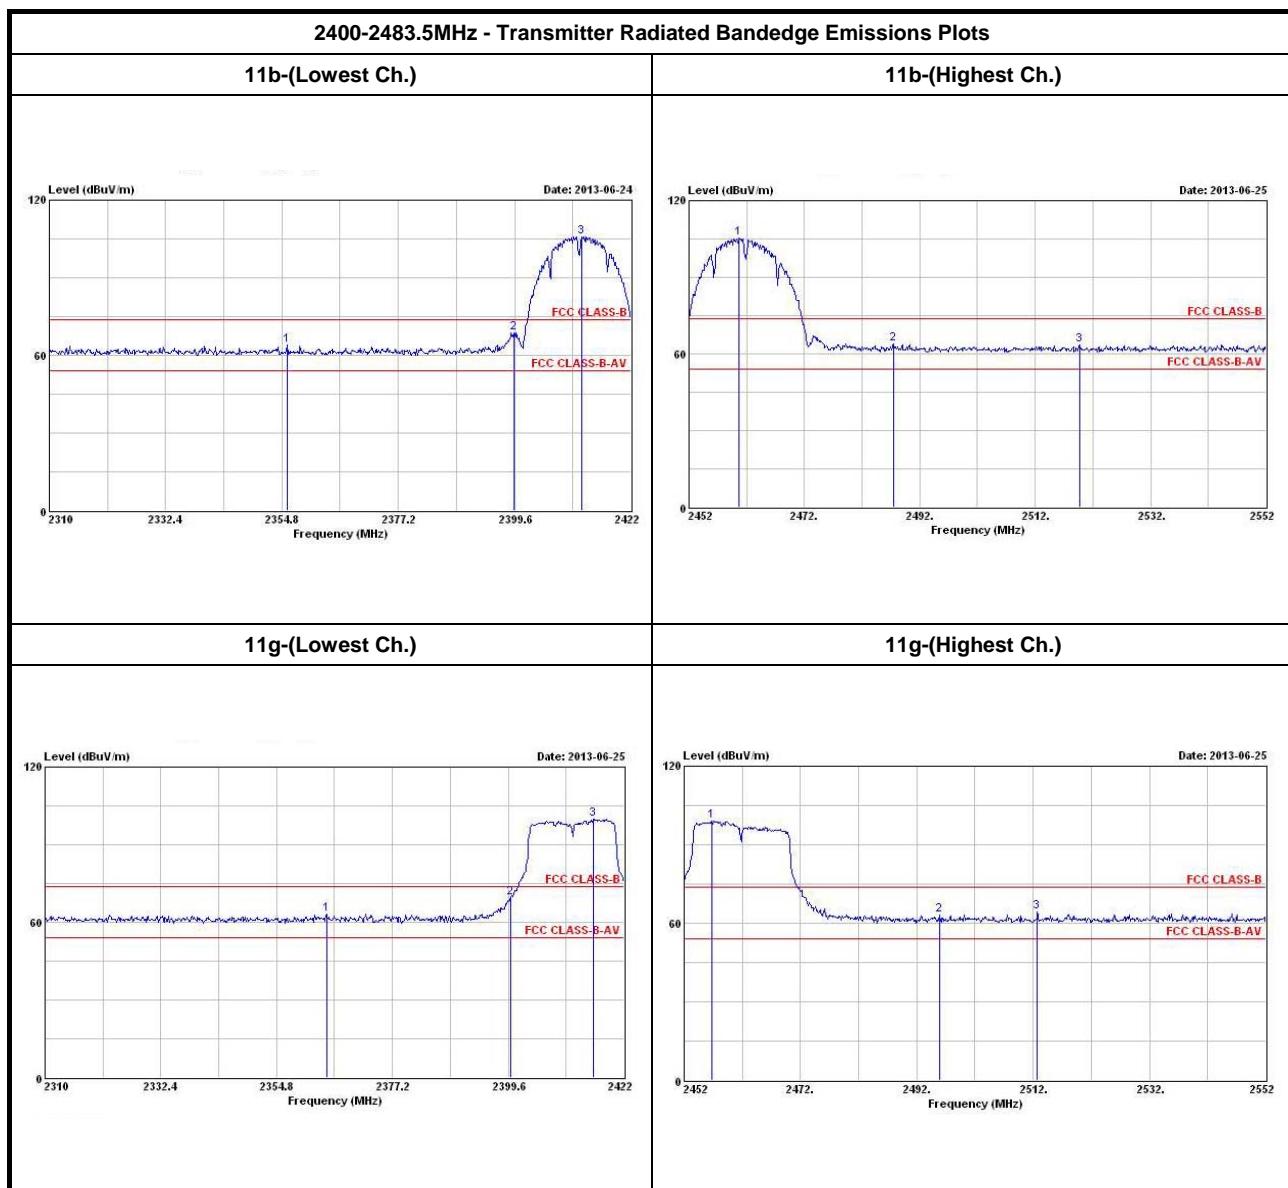

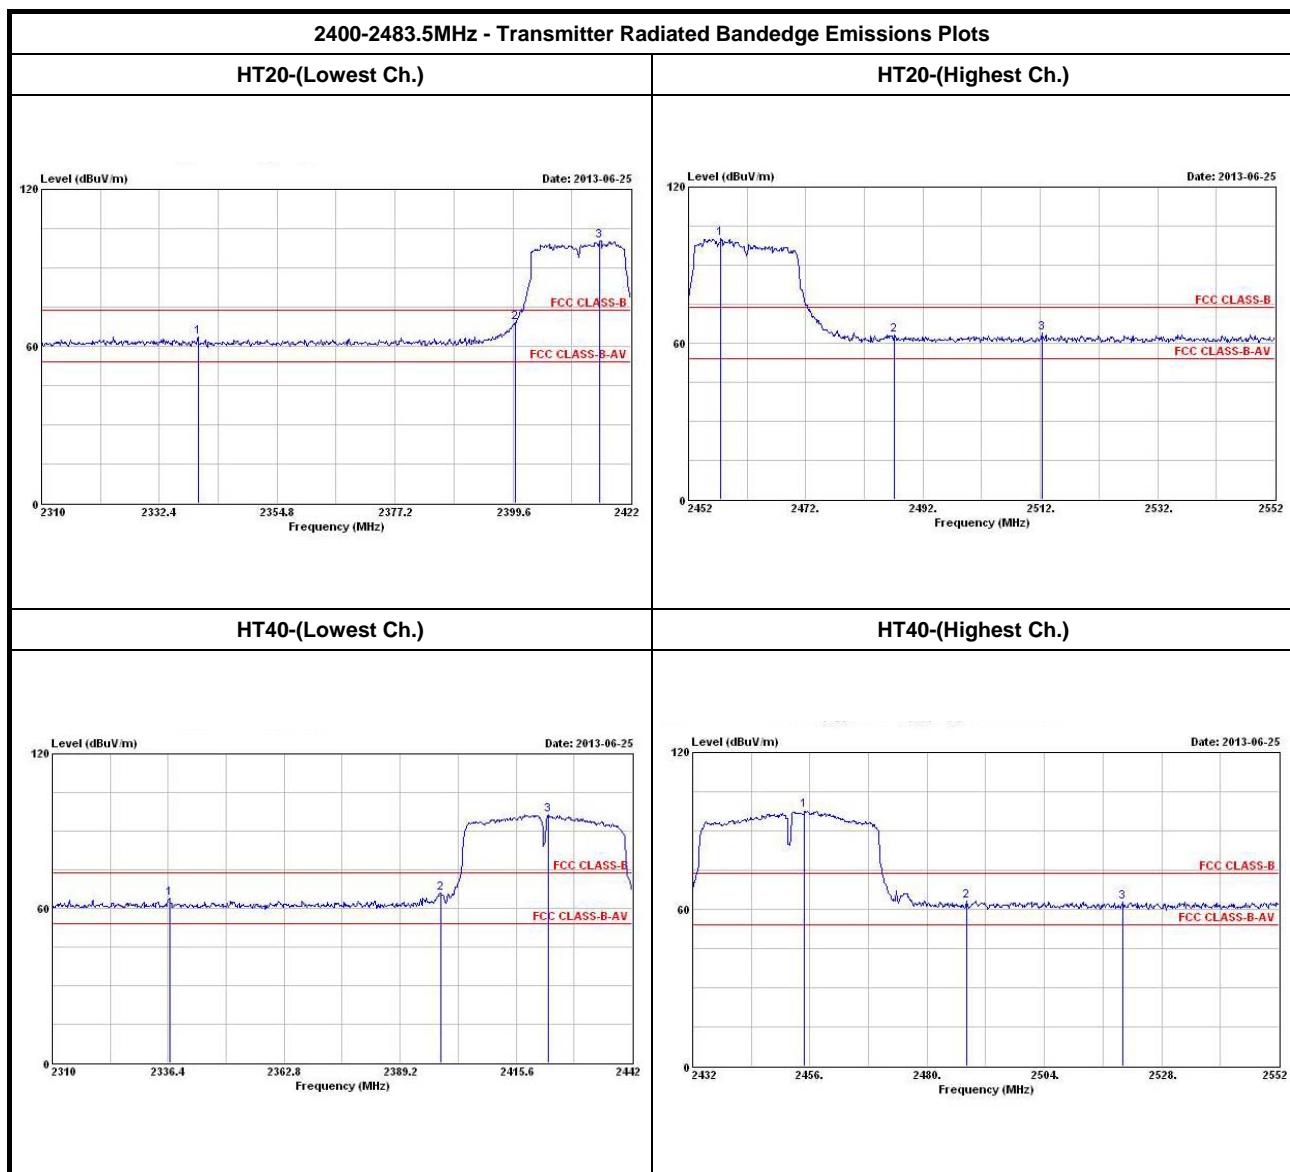



3.6 Transmitter Unwanted Emissions

3.6.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.




3.6.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	Measurements in the frequency range 10 GHz - 18GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	Measurements in the frequency range above 18 GHz - 25GHz are typically made at a closer distance 0.5m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 11 for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 12 for unwanted emissions into restricted bands.
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 12.2.5.1 Option 1 (trace averaging for duty cycle \geq 98%)
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 12.2.5.2 Option 2 (trace averaging + duty factor).
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 12.2.5.3 Option 3 (Reduced VBW \geq 1/T).
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW \geq 1/T, where T is pulse time.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 11.3 and 12.2.4 measurement procedure peak limit.
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 12.2.3 measurement procedure Quasi-Peak limit.
<input checked="" type="checkbox"/>	For radiated measurement, refer as FCC KDB 558074, clause 12.2.7.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.

Test Method	
<input type="checkbox"/>	For conducted and cabinet radiation measurement, refer as FCC KDB 558074, clause 12.2.2.
<input type="checkbox"/>	For conducted unwanted emissions into non-restricted bands (relative emission limits). Devices with multiple transmit chains: Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding $10 \log(N)$ if the measurements are made relative to the in-band emissions on the individual outputs.
<input type="checkbox"/>	For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add $10 \log(N)$ dB
<input type="checkbox"/>	For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.6.4 Test Setup

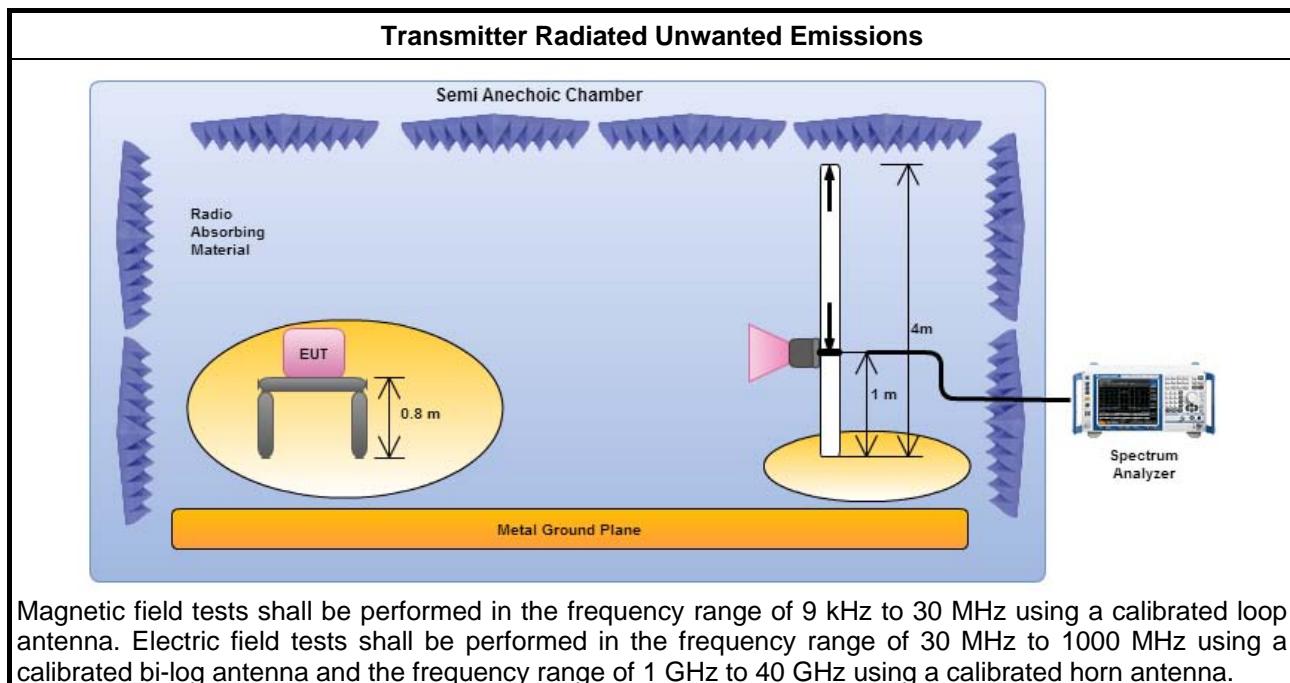



3.6.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.




3.6.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

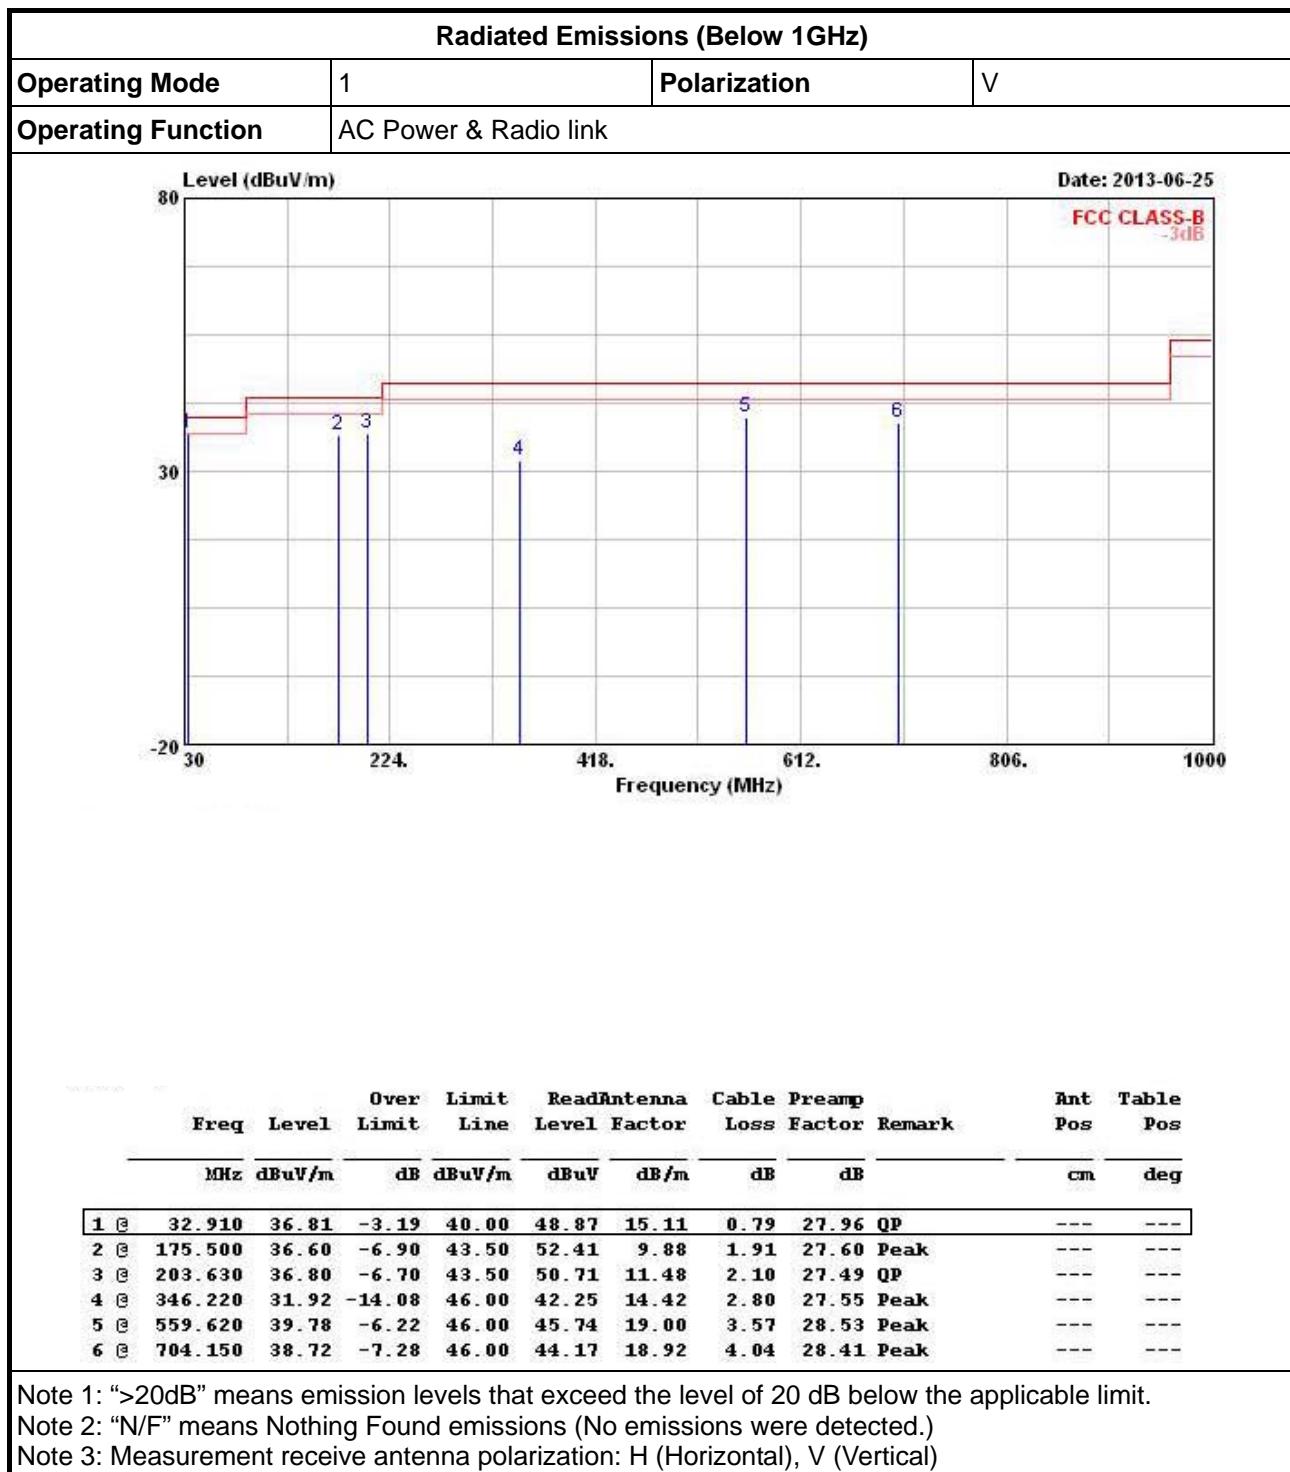


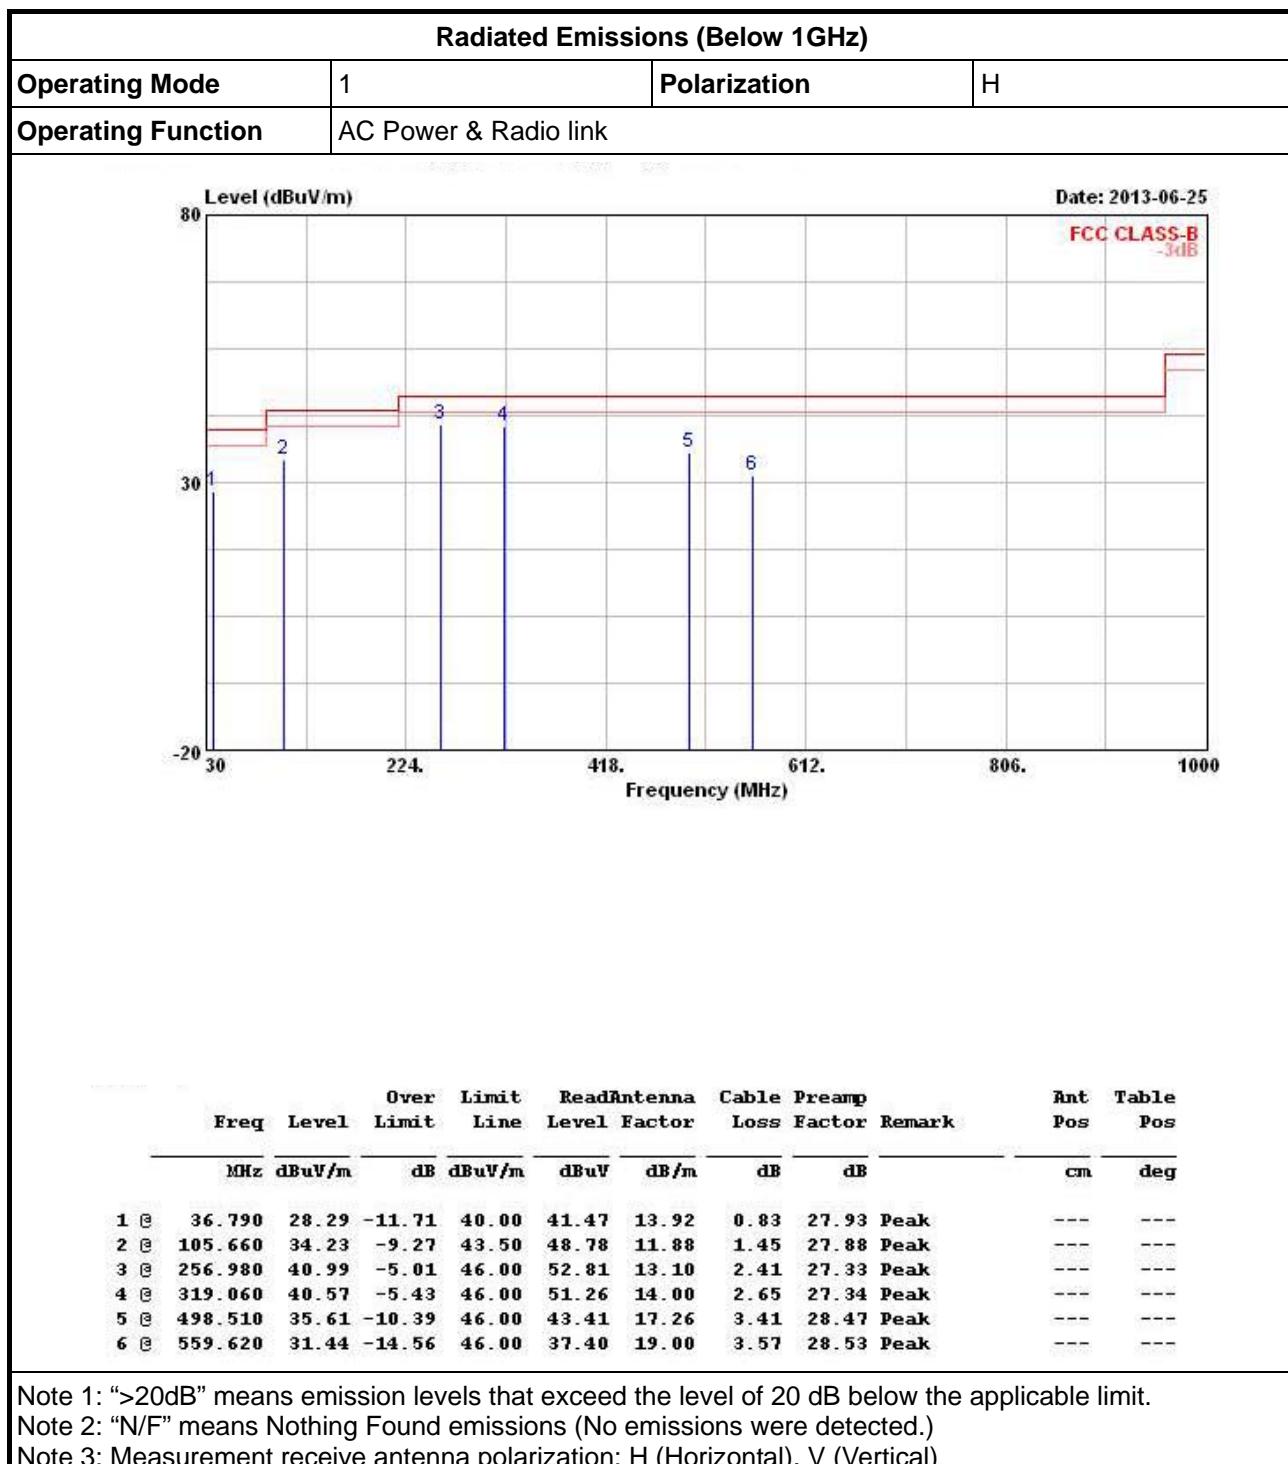






3.6.7 Transmitter Radiated Unwanted Emissions (Above 1GHz)

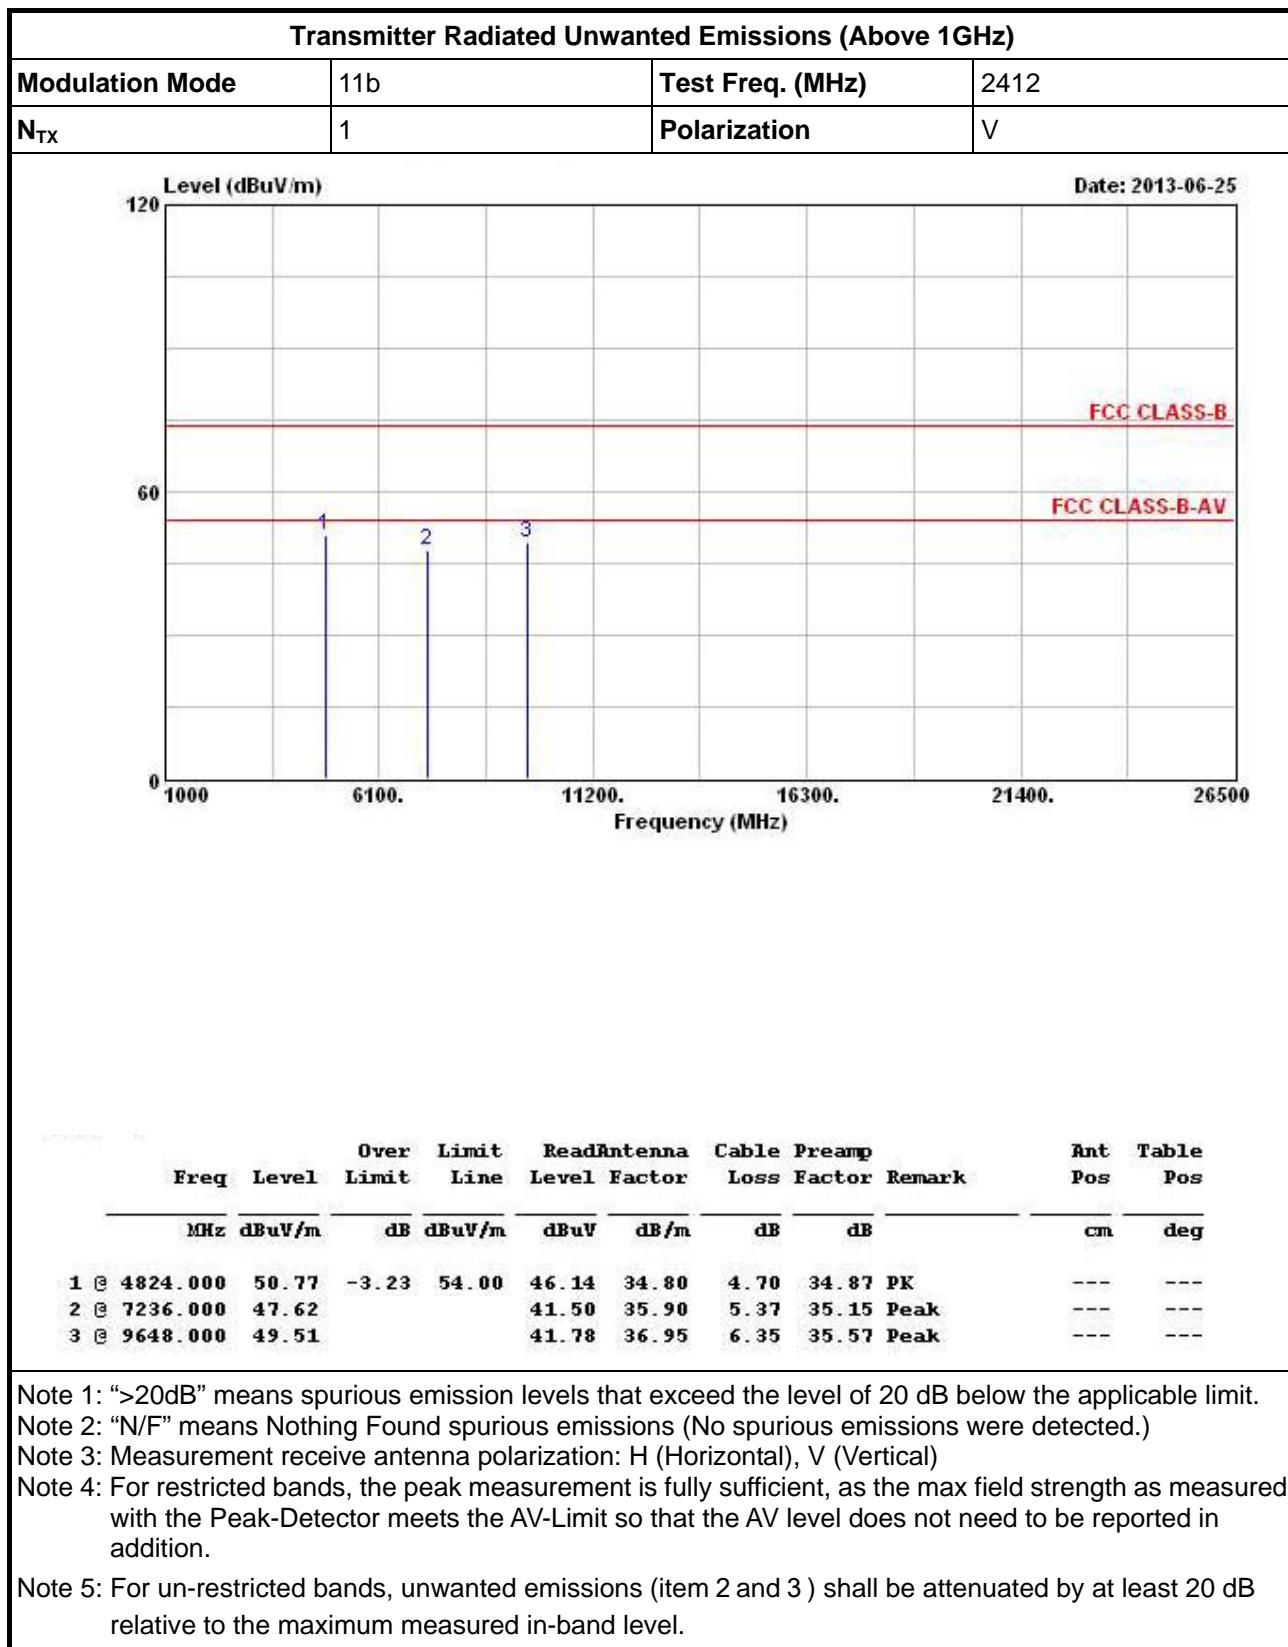


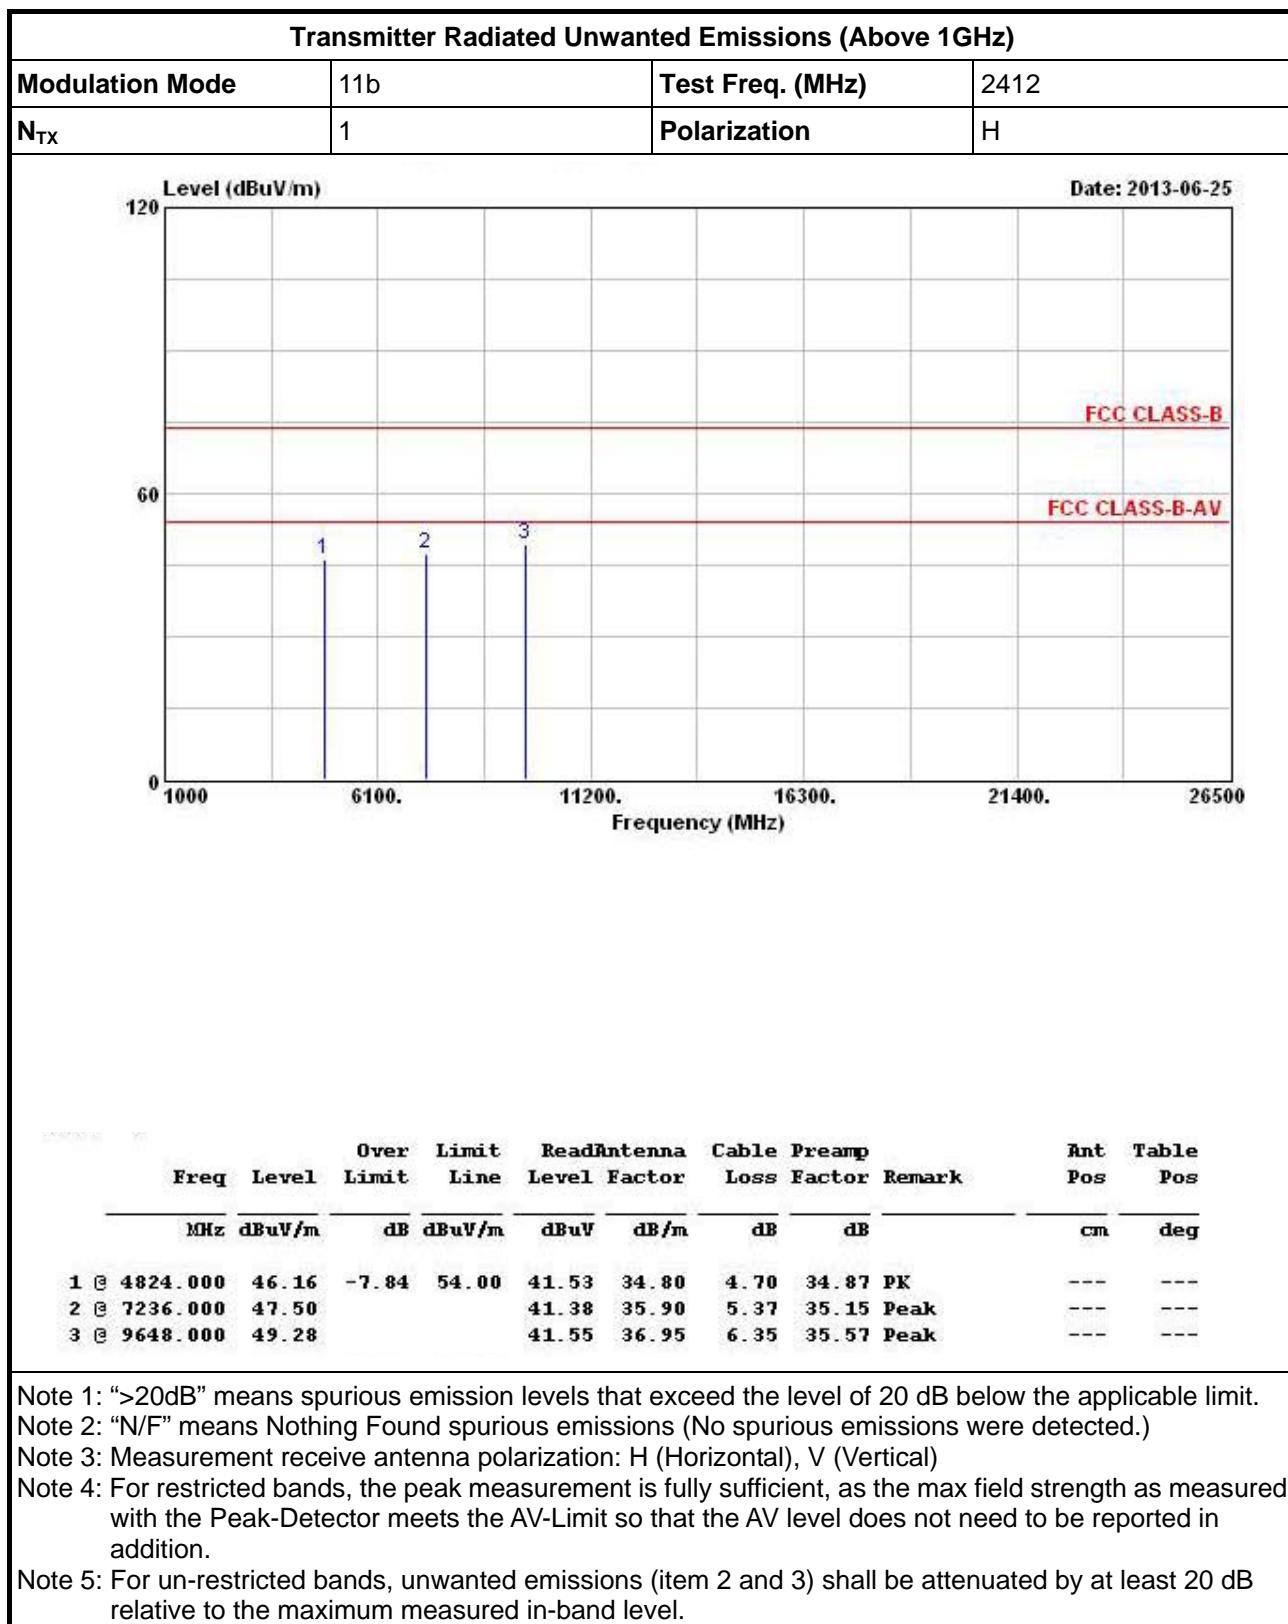


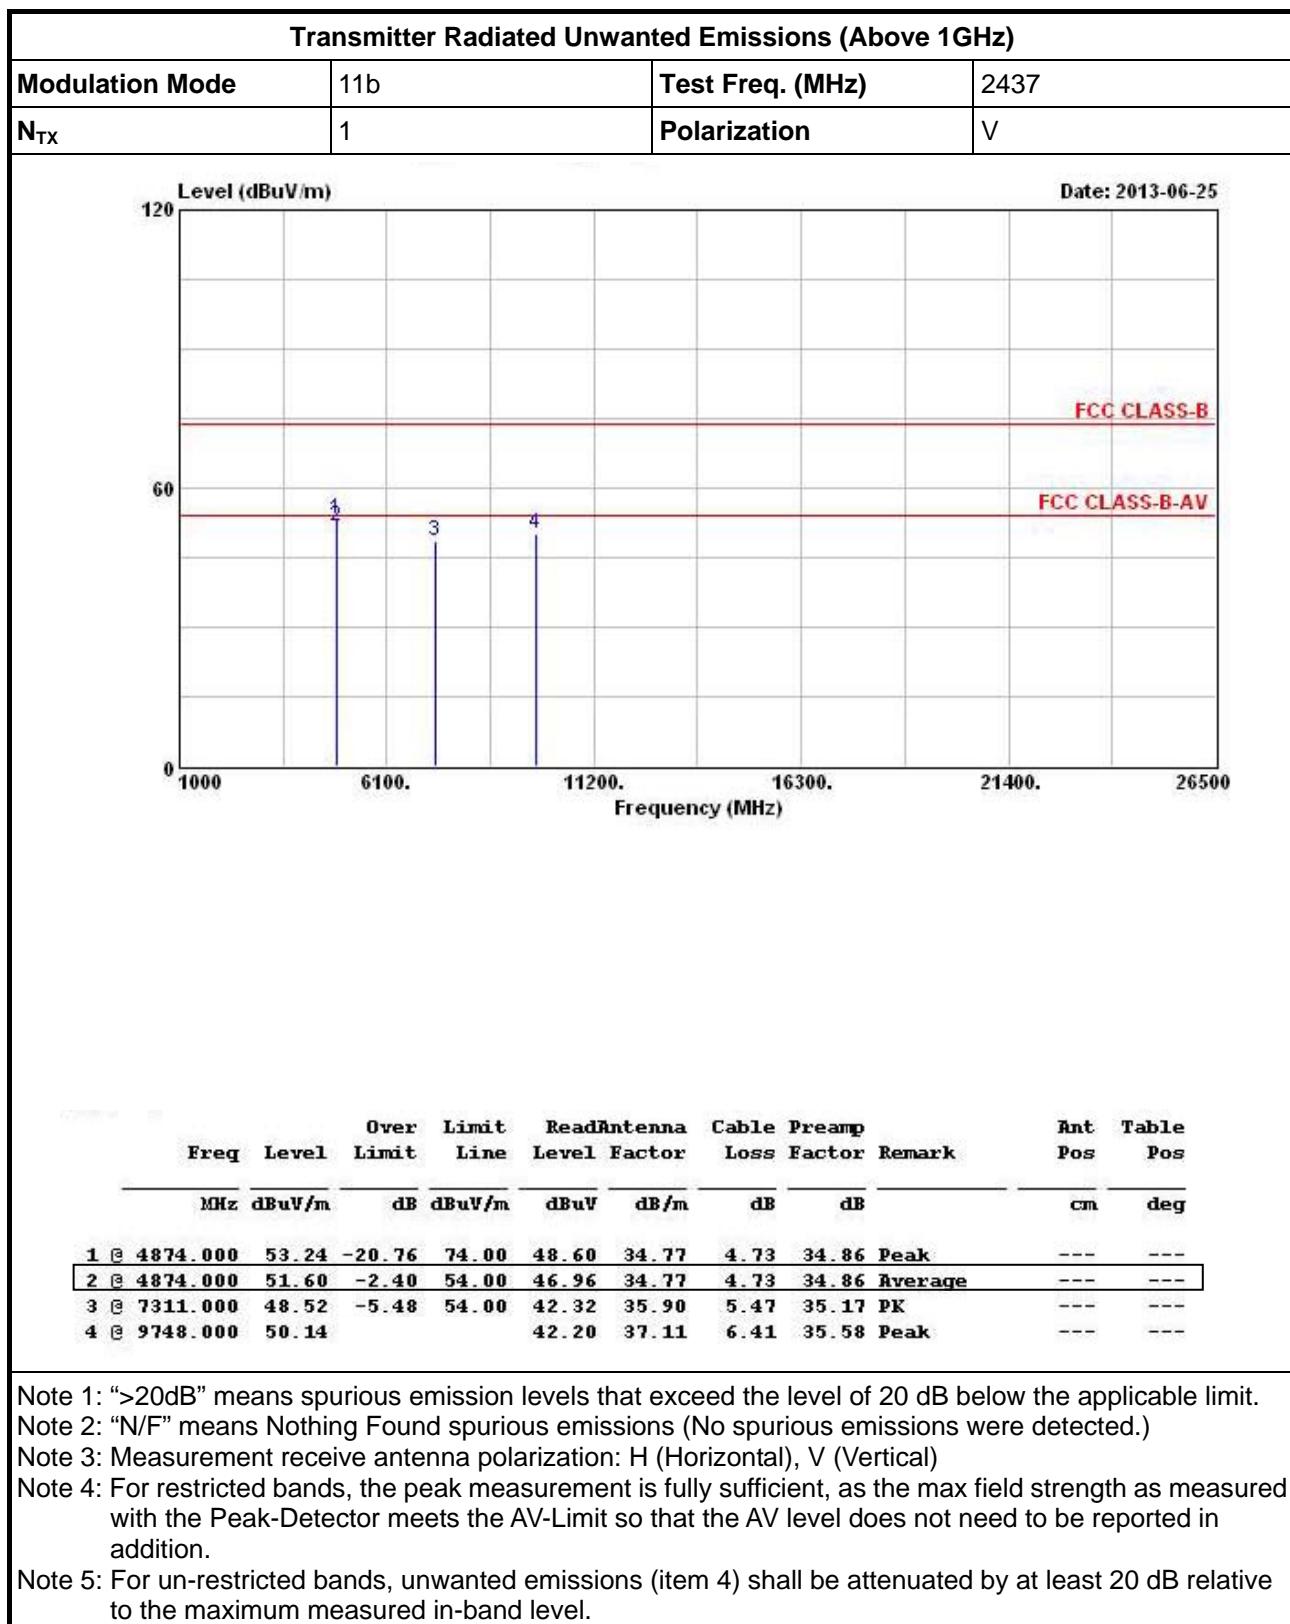

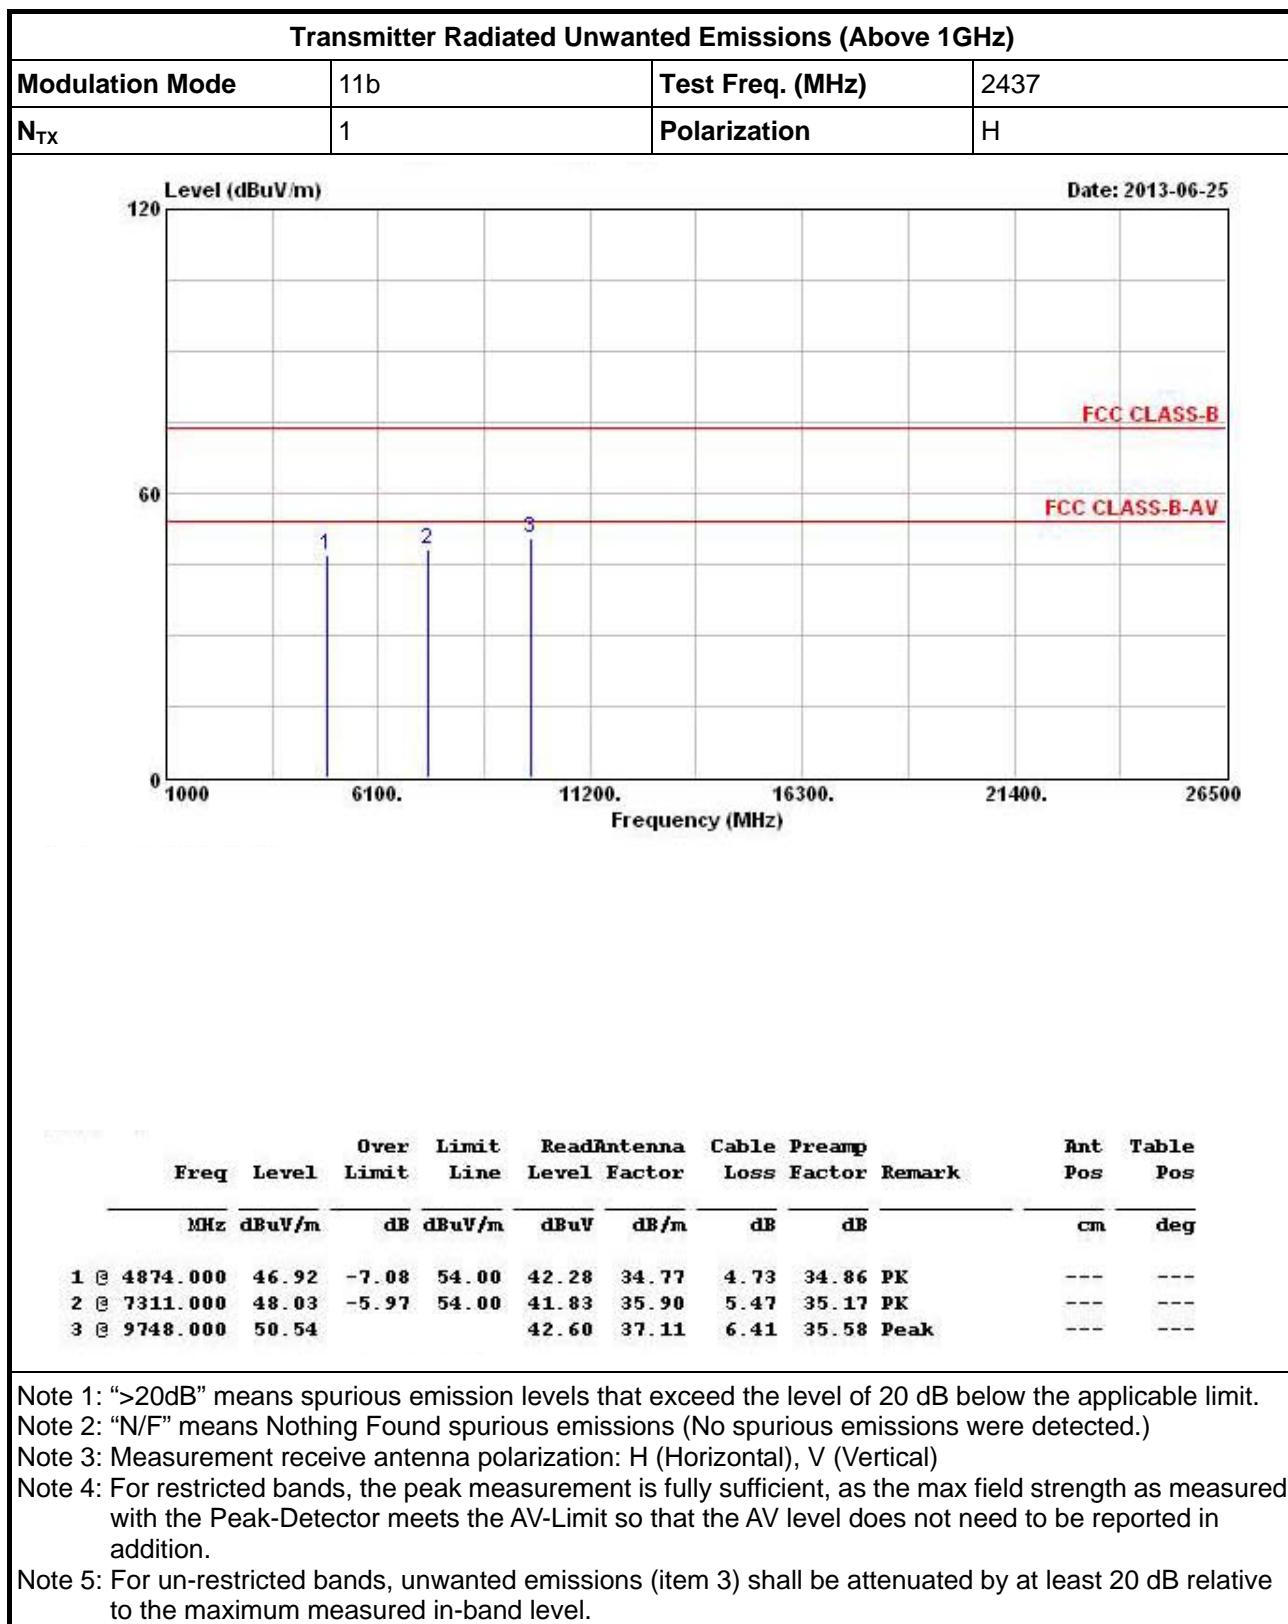

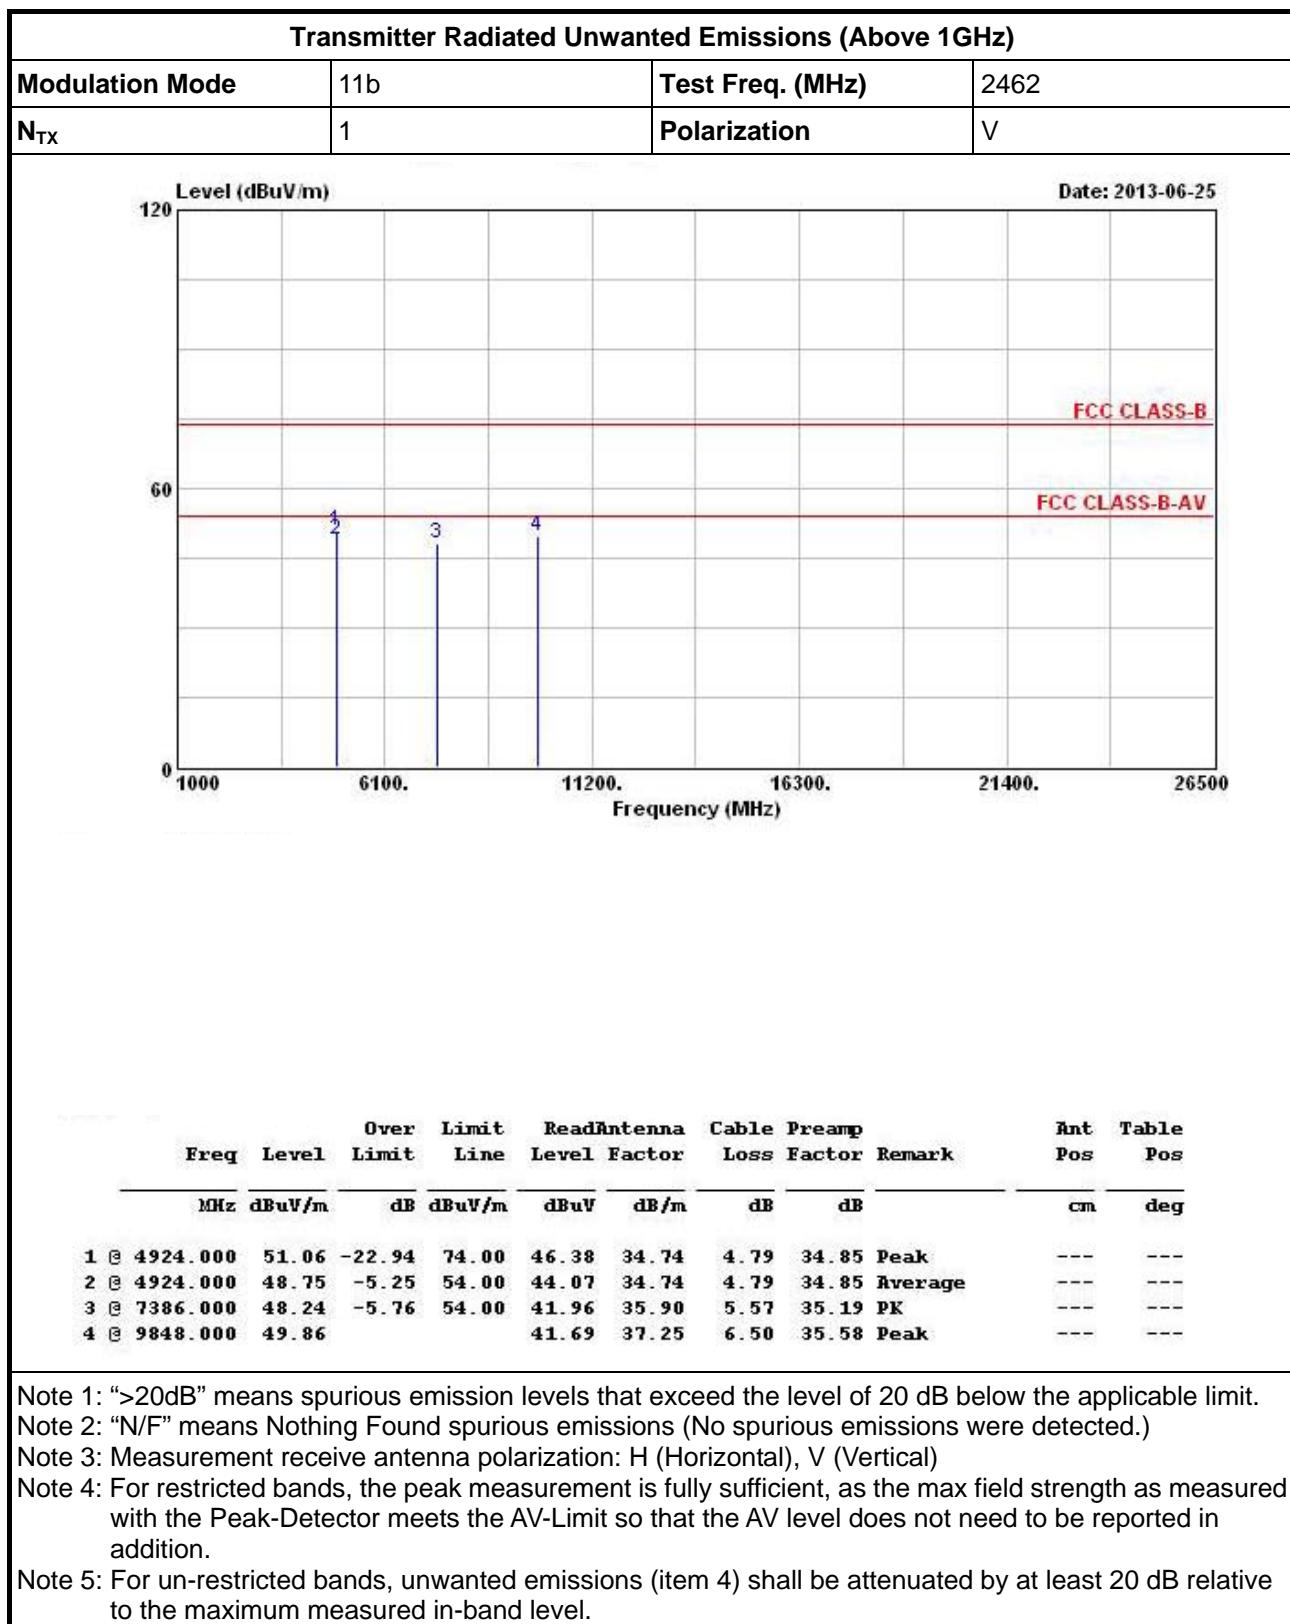

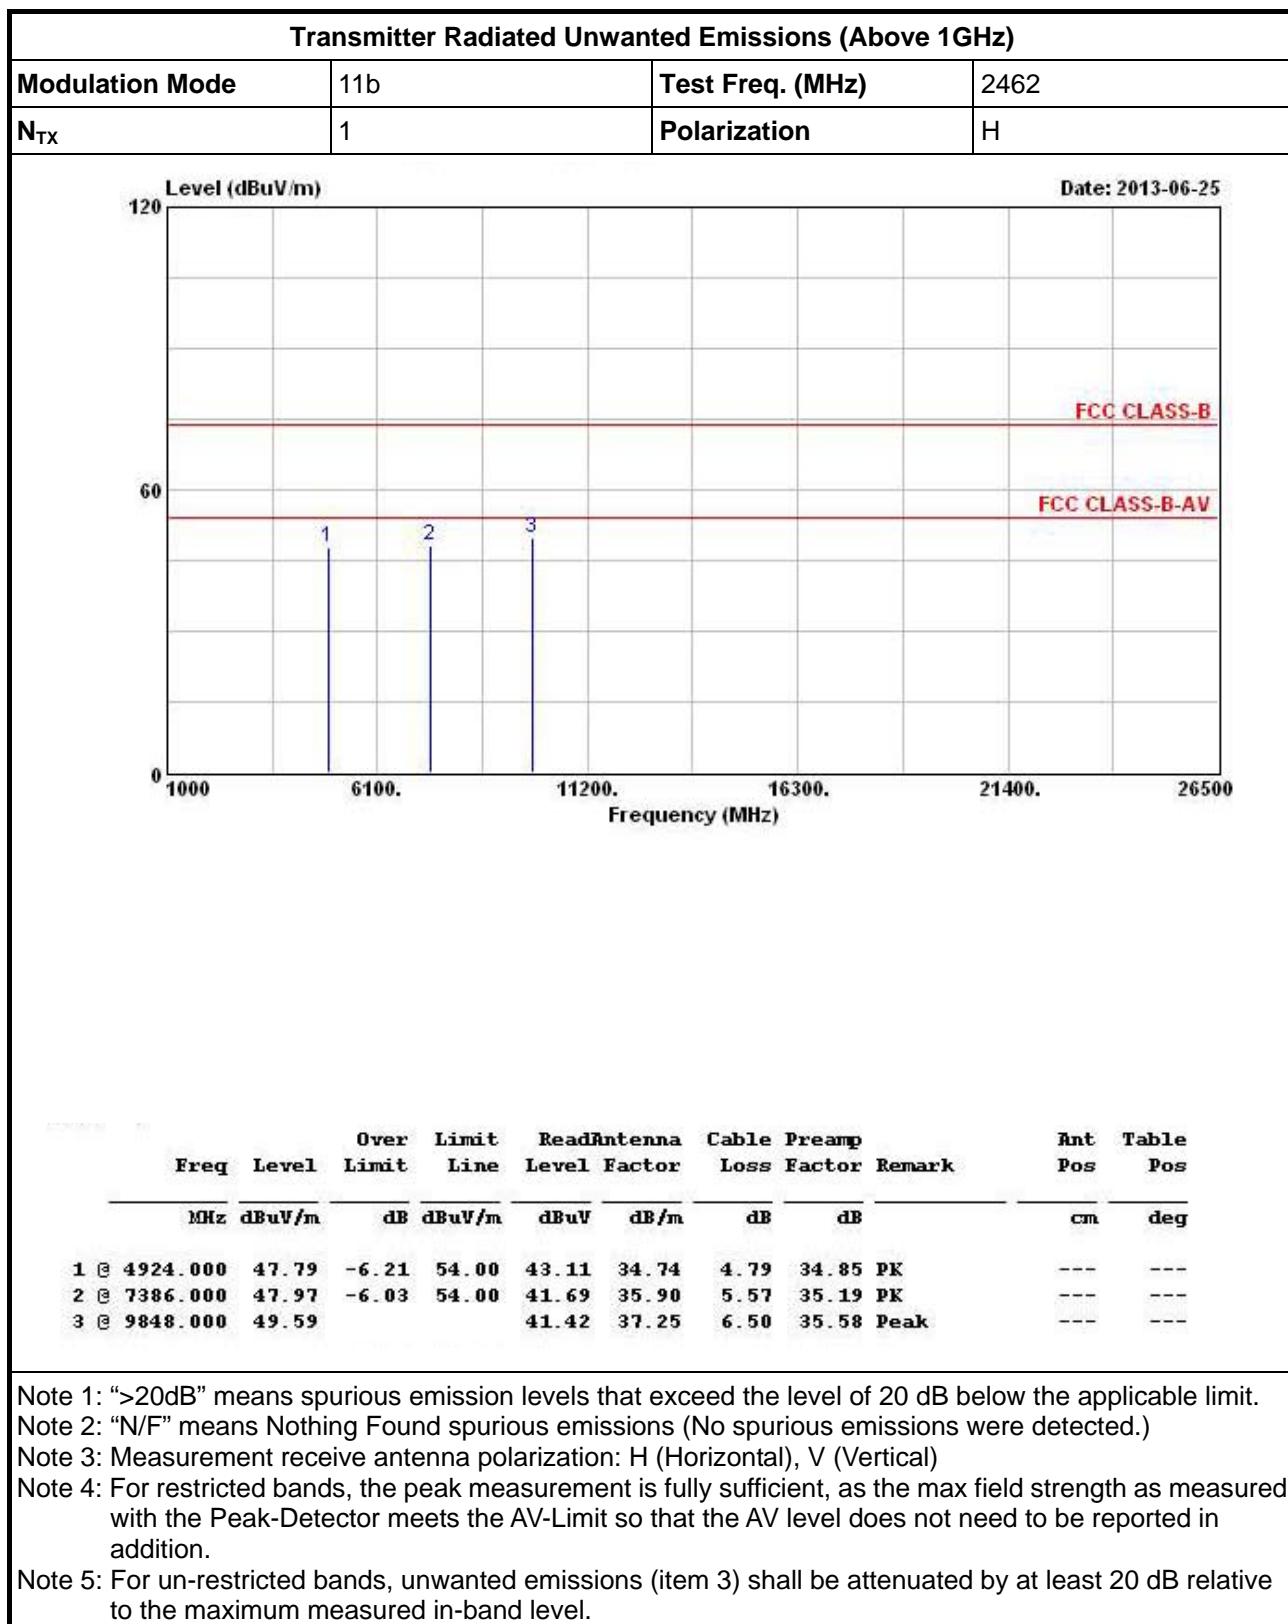


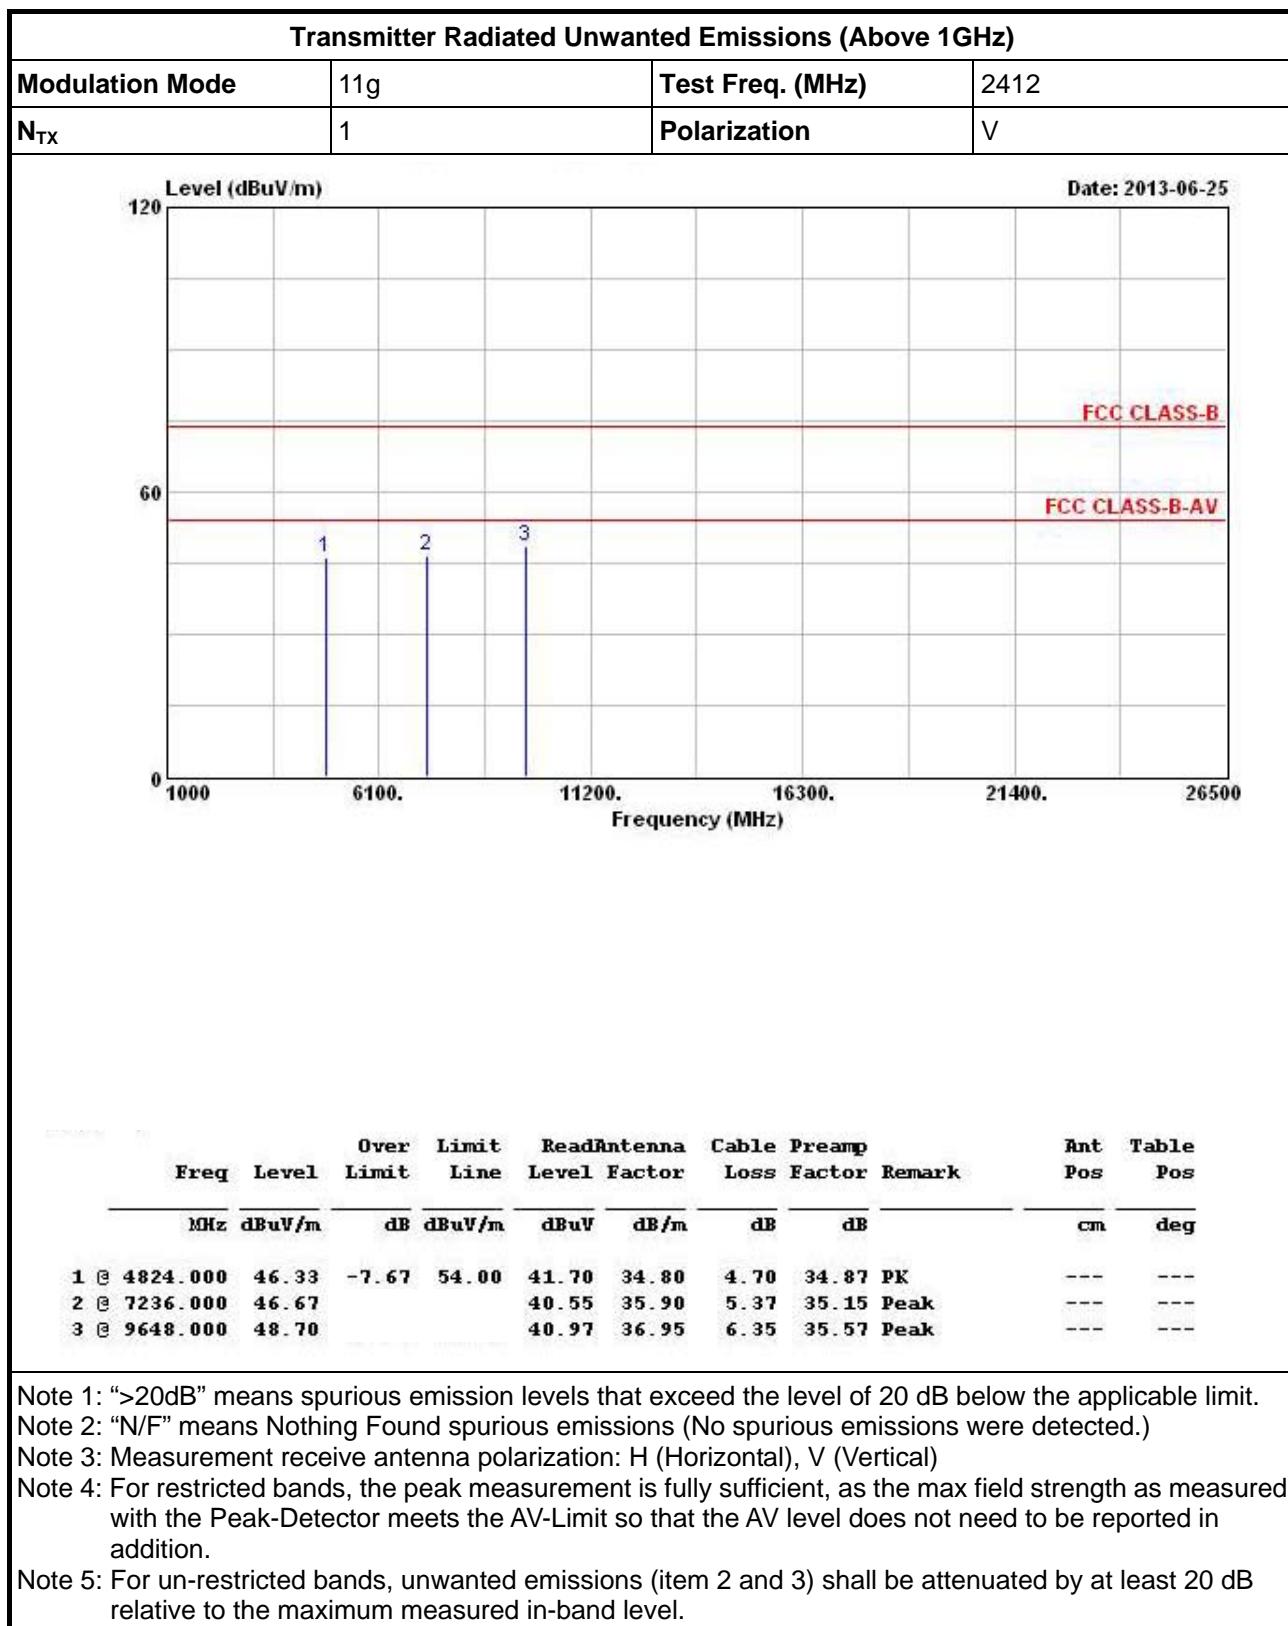



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11g	Test Freq. (MHz)	2412
N _{TX}	1	Polarization	H

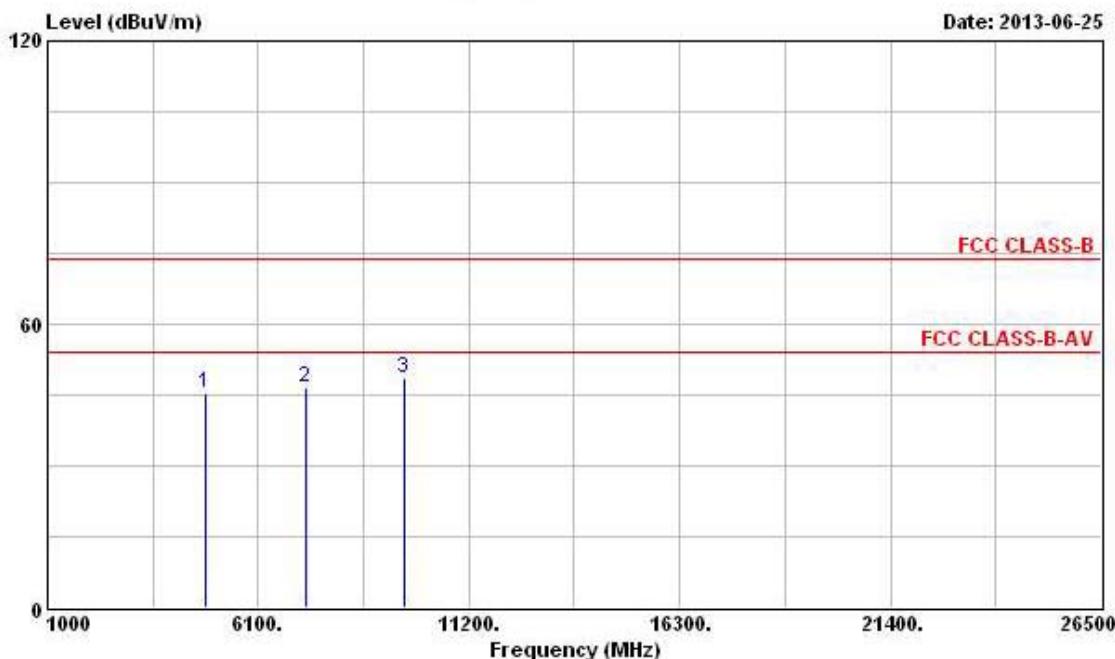

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
		Limit	Line	Antenna	Cable	Preamp	Pos			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 0 4824.000	45.21	-8.79	54.00	40.58	34.80	4.70	34.87	PK	---	---
2 0 7236.000	46.60			40.48	35.90	5.37	35.15	Peak	---	---
3 0 9648.000	48.71			40.98	36.95	6.35	35.57	Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 2 and 3) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

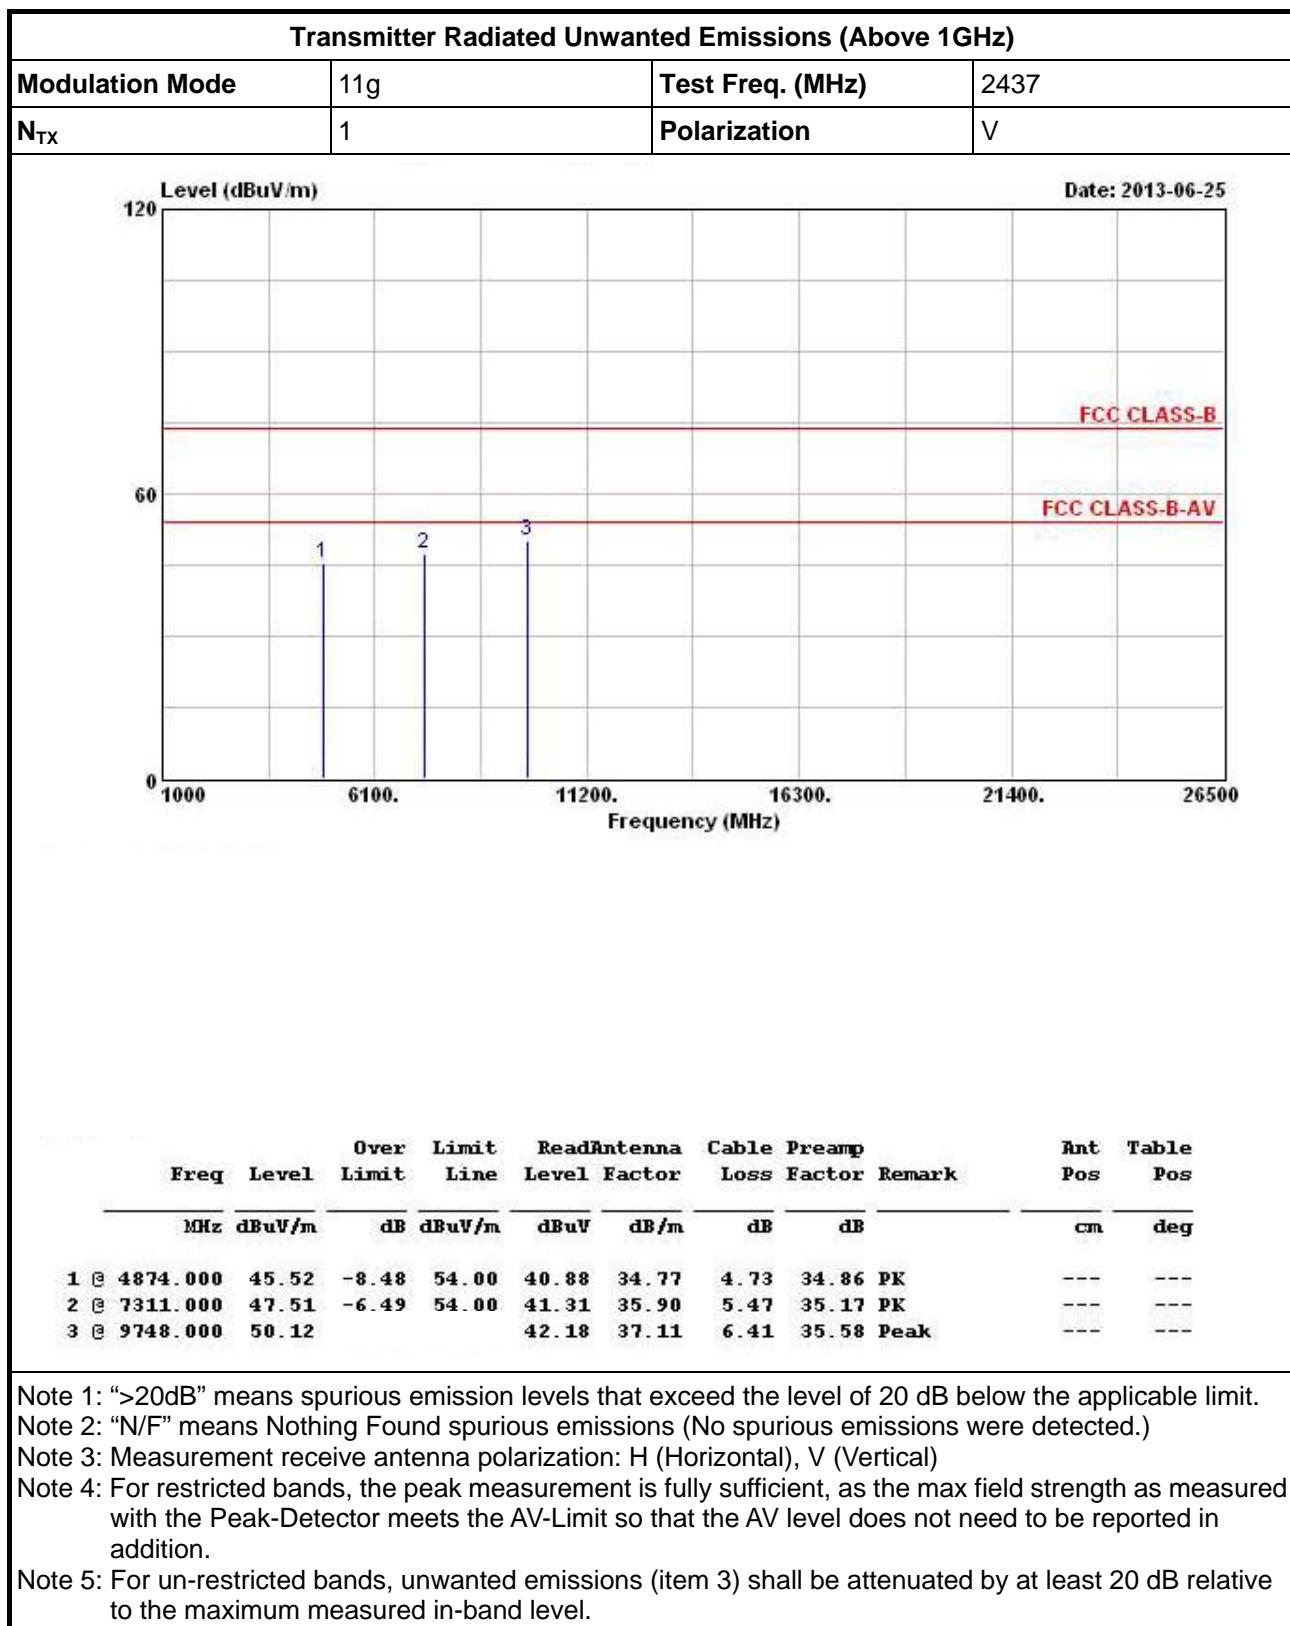

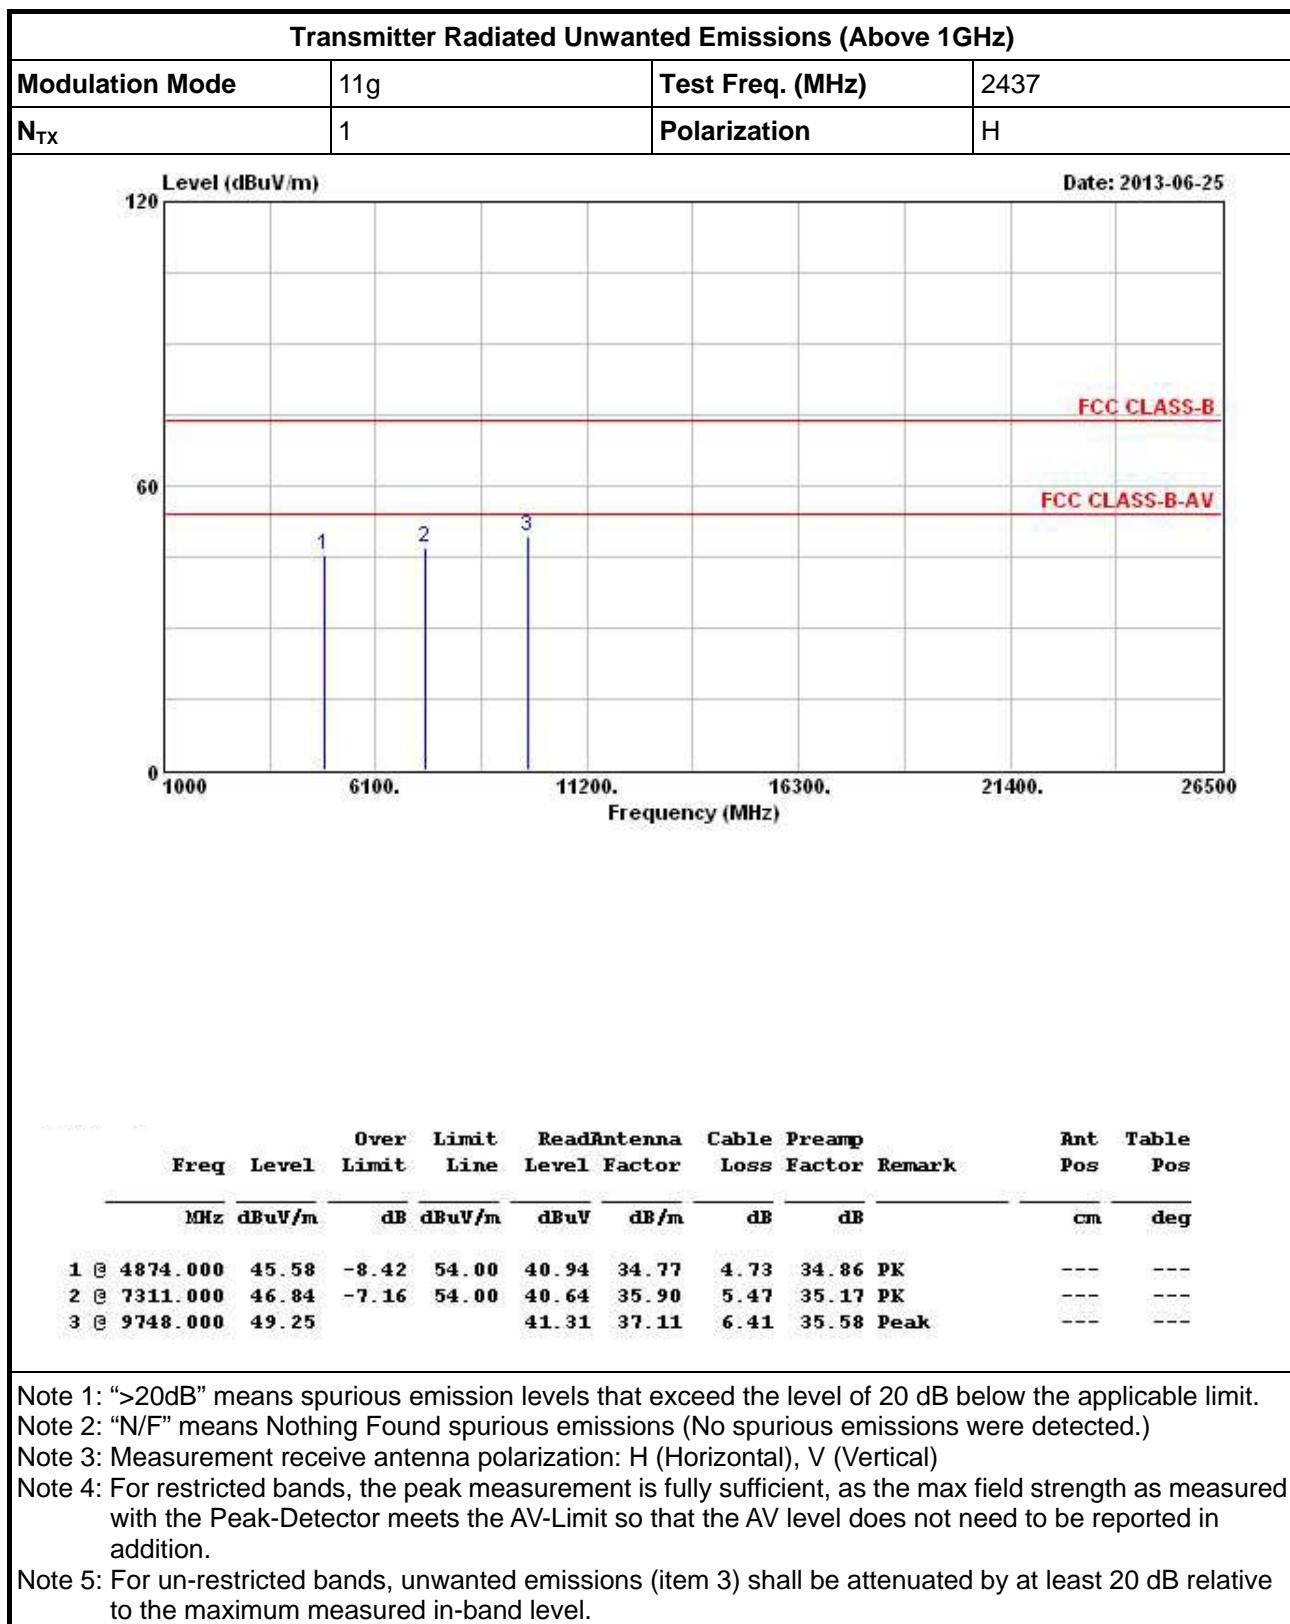


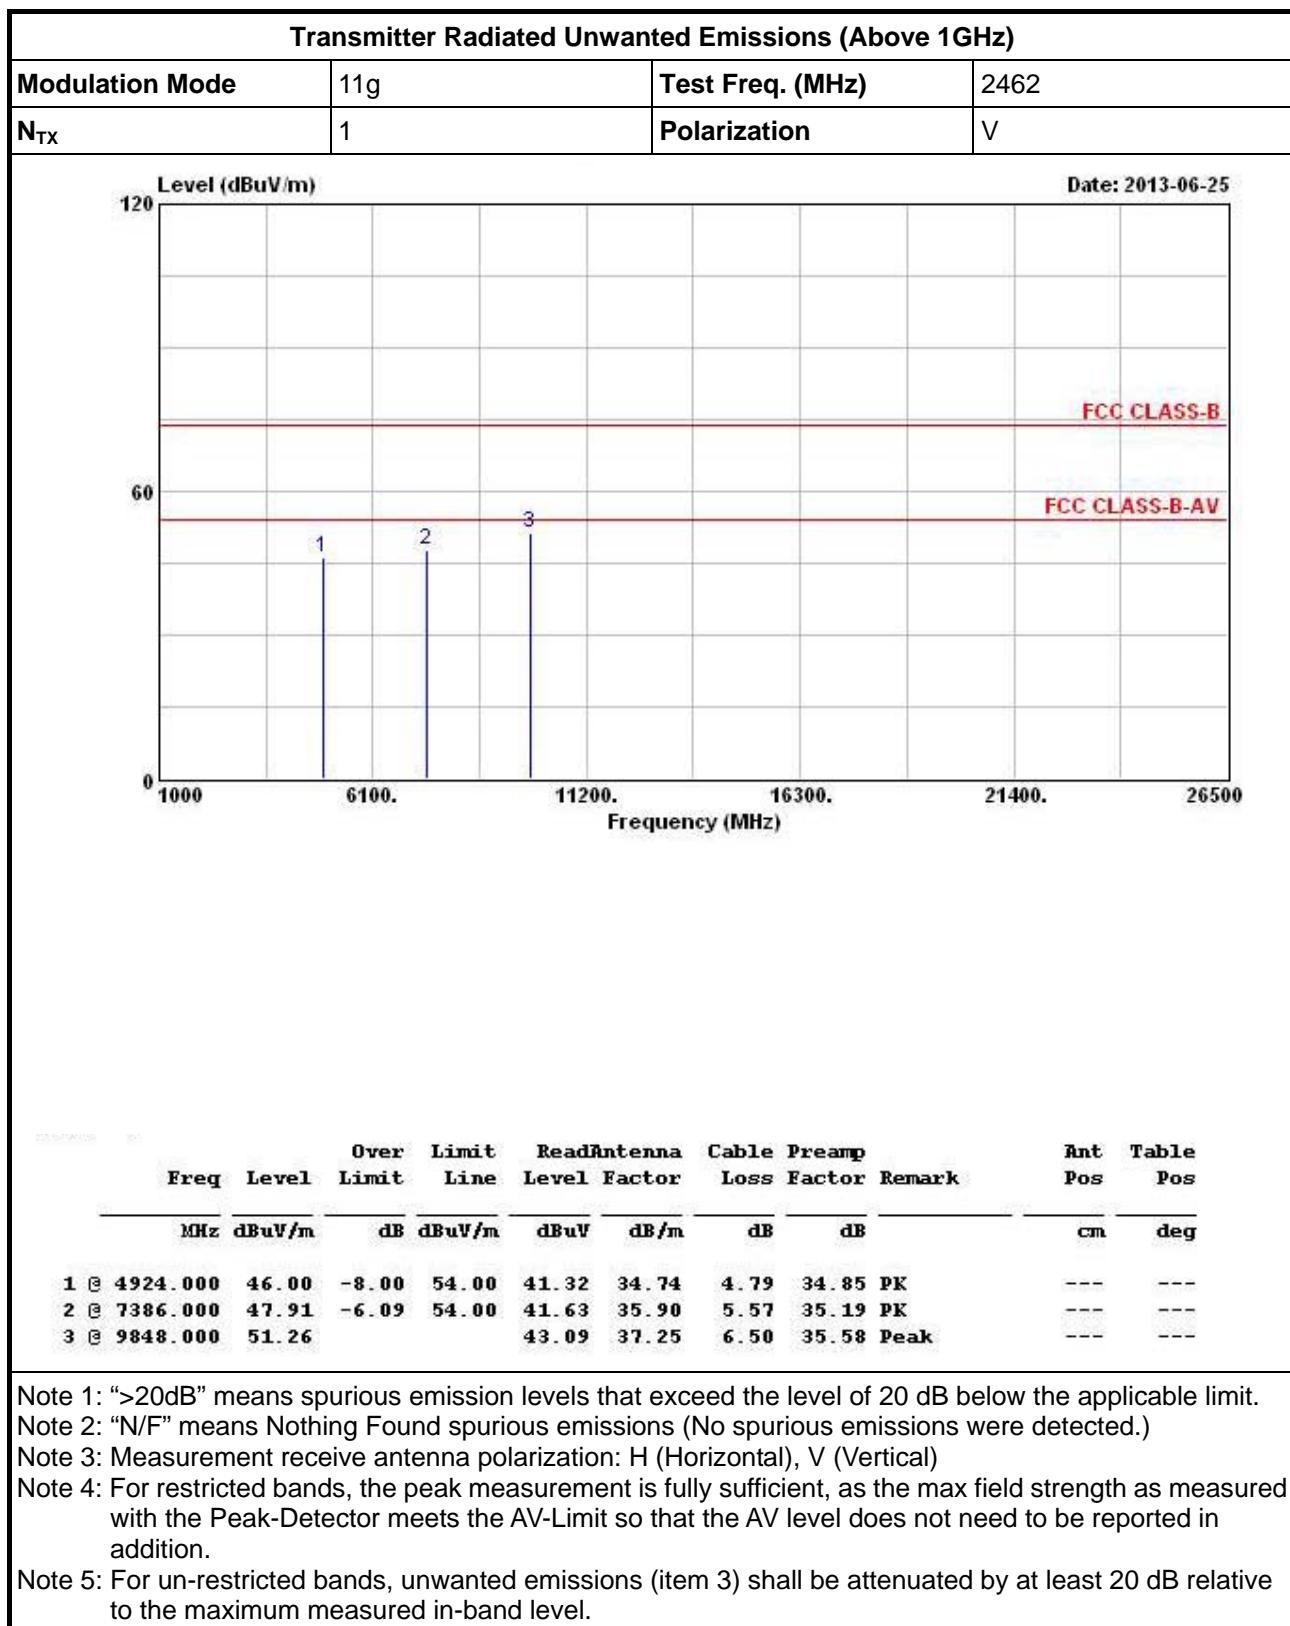



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11g	Test Freq. (MHz)	2462
N _{TX}	1	Polarization	H

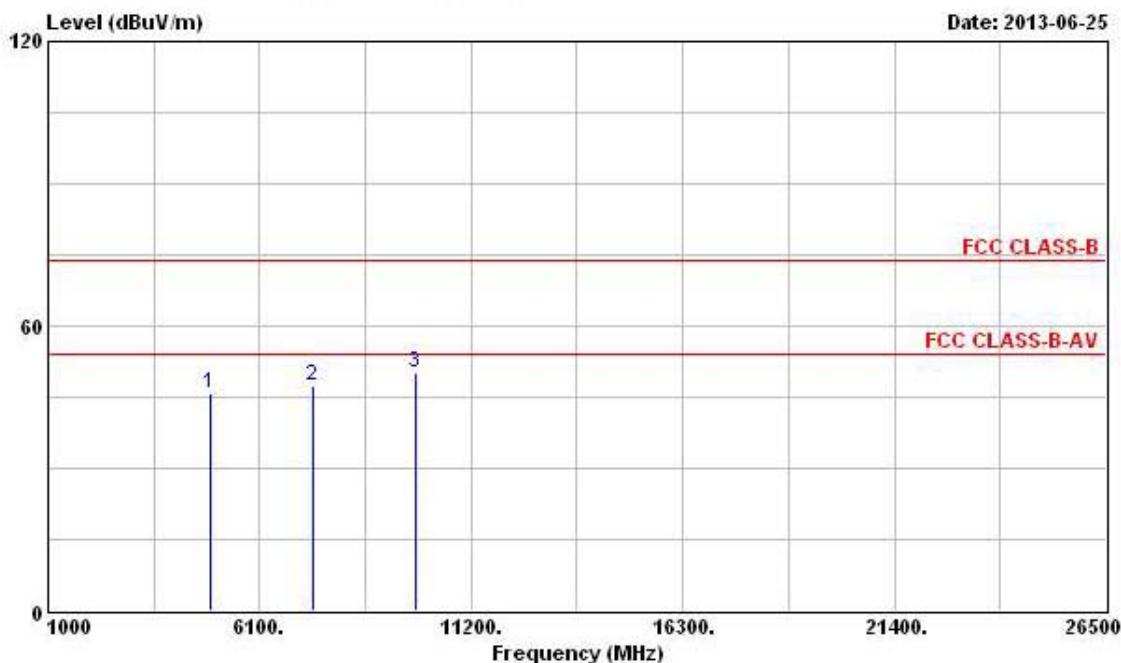

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant Pos	Table Pos
		Limit	Line	Level	Factor	Loss	Factor		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @ 4924.000	45.75	-8.25	54.00	41.07	34.74	4.79	34.85 PK	---	---
2 @ 7386.000	47.54	-6.46	54.00	41.26	35.90	5.57	35.19 PK	---	---
3 @ 9848.000	49.94			41.77	37.25	6.50	35.58 Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands, unwanted emissions (item 3) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

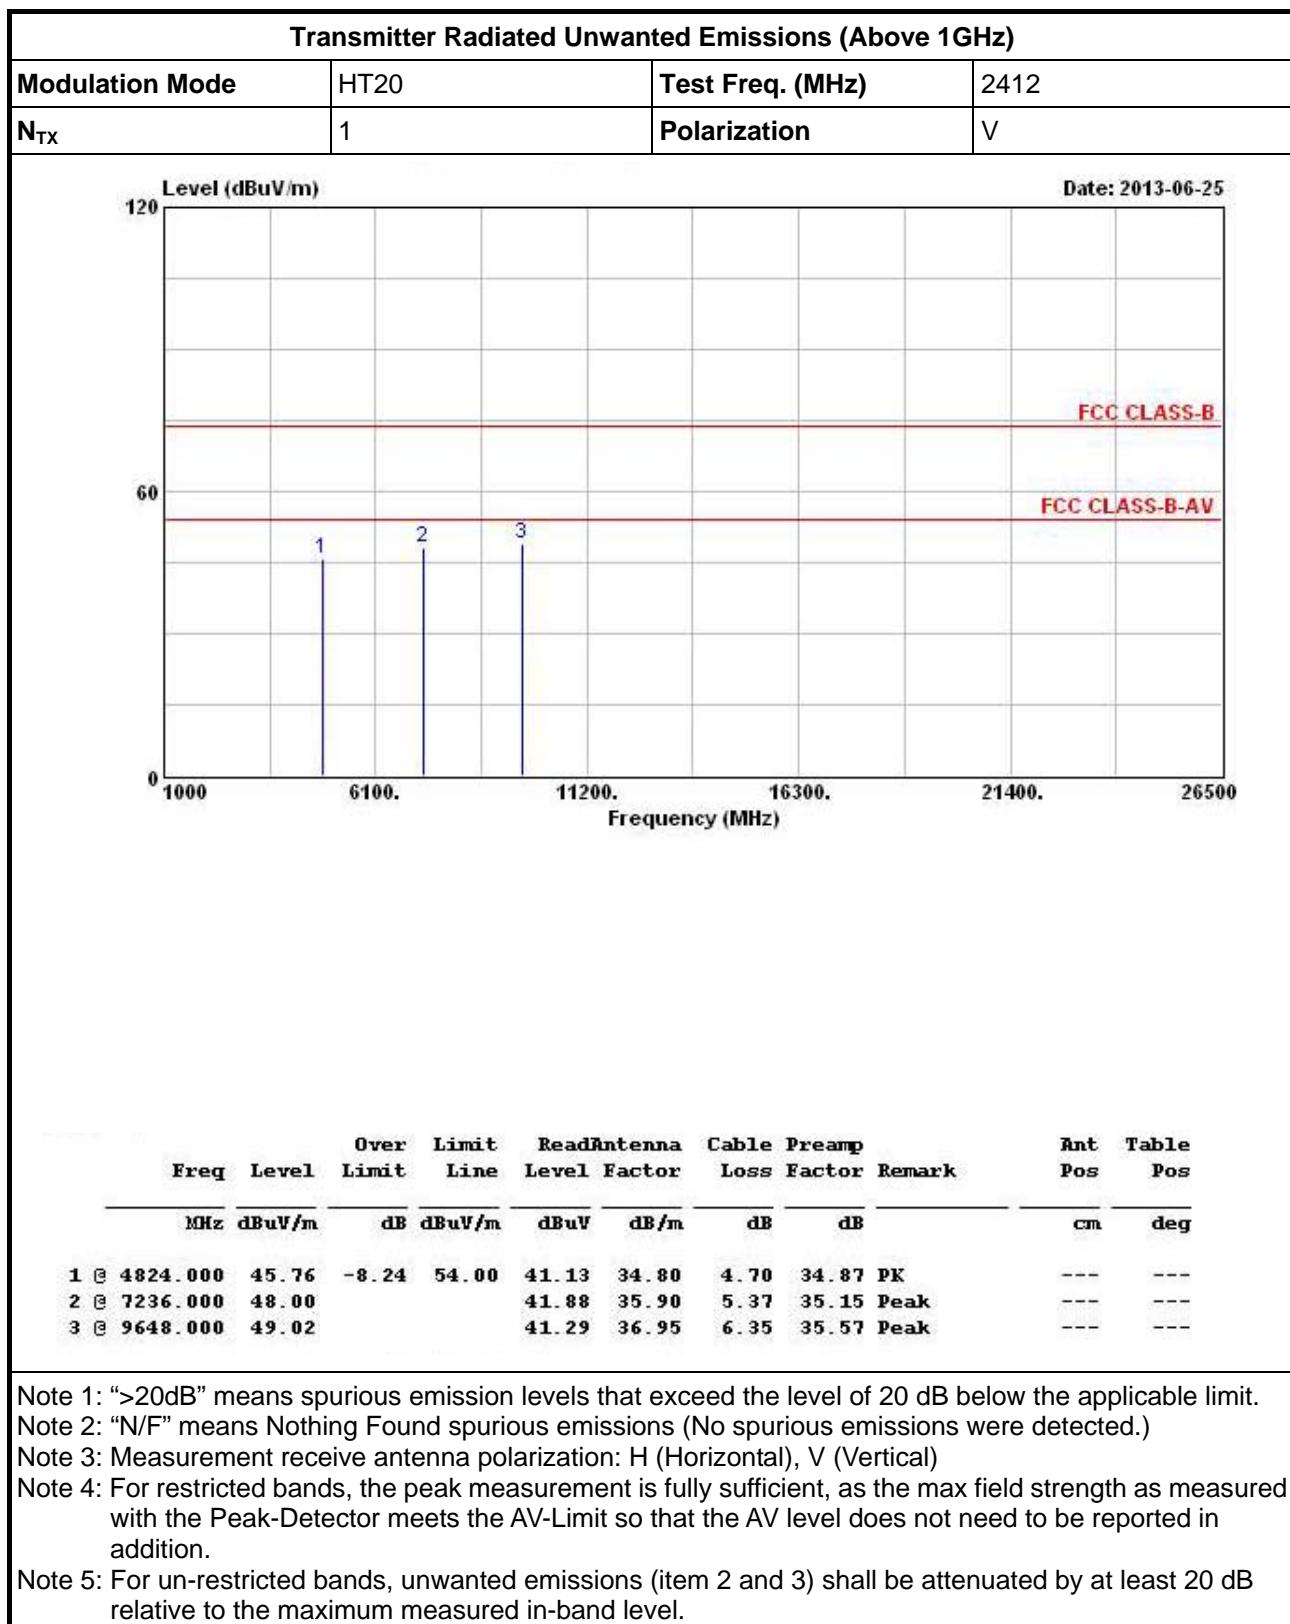


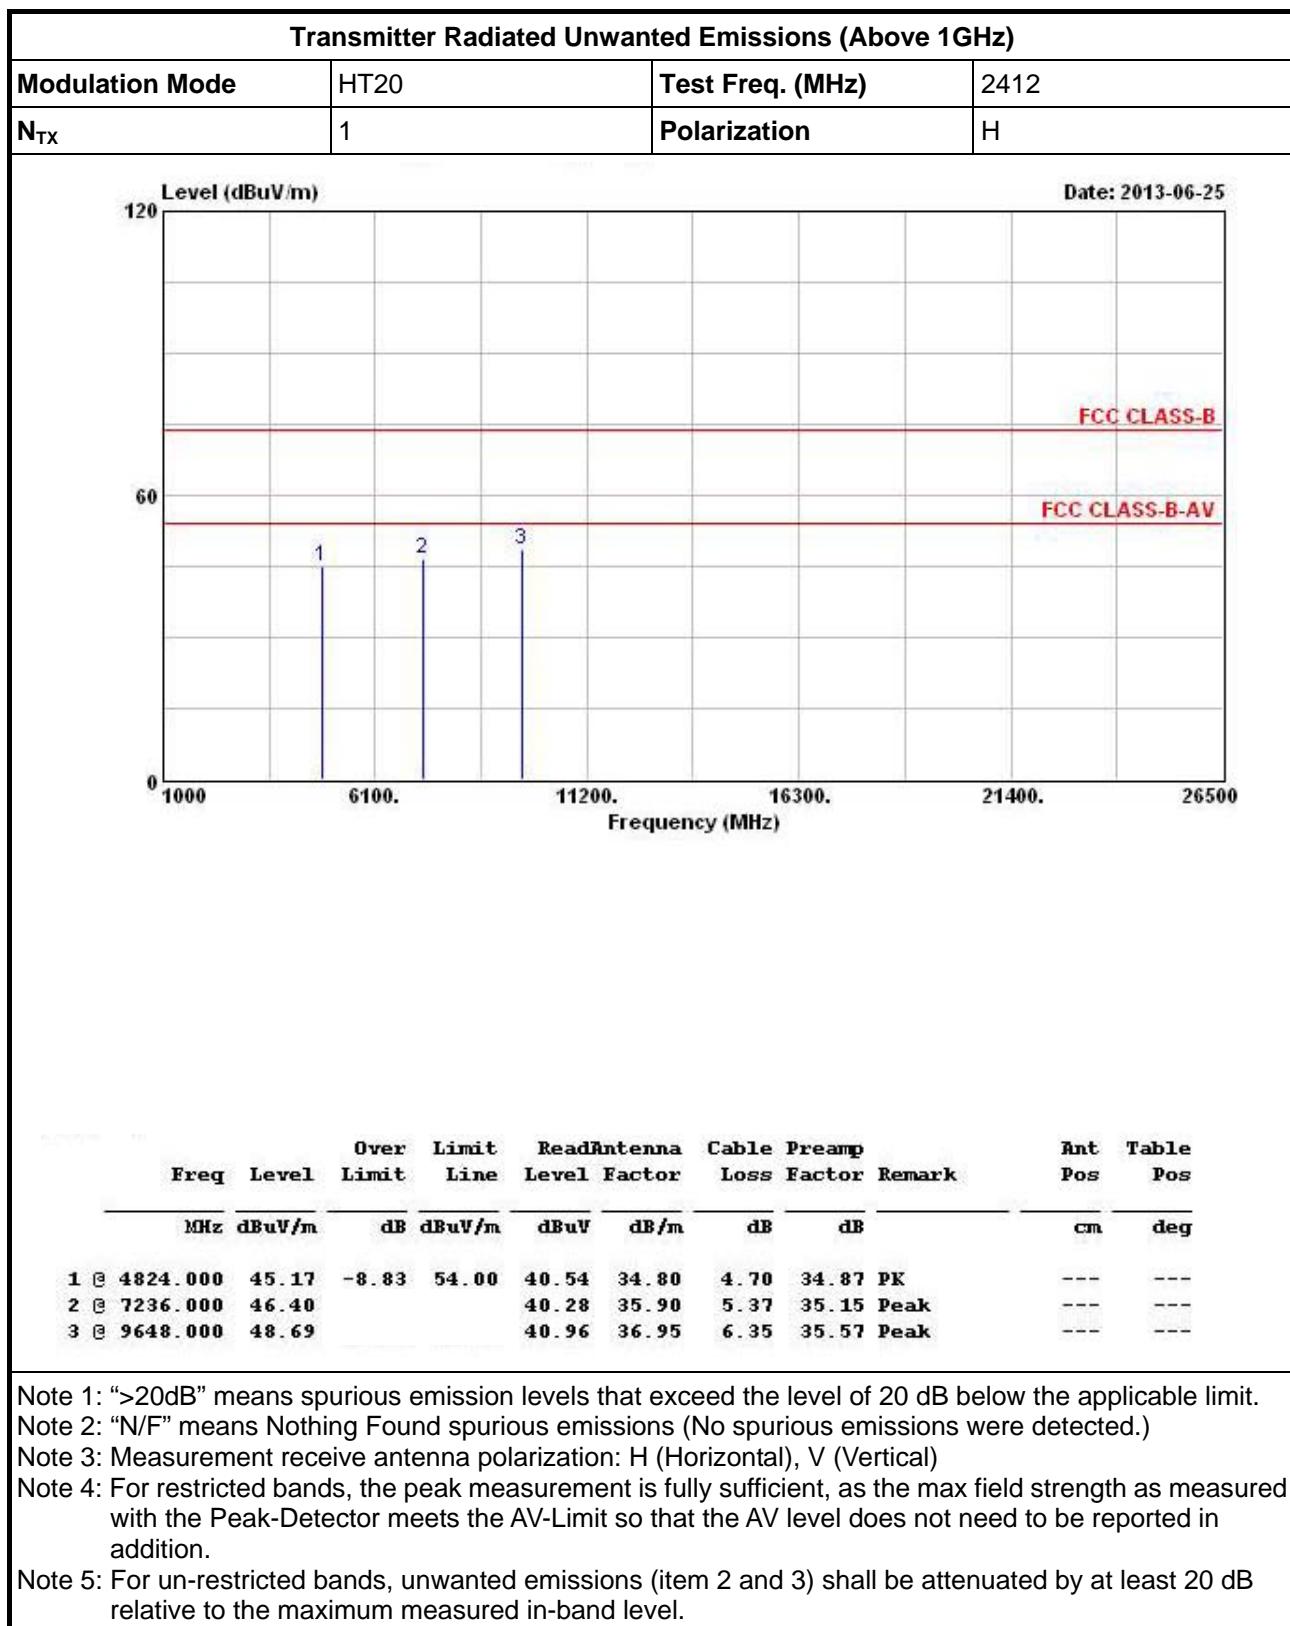

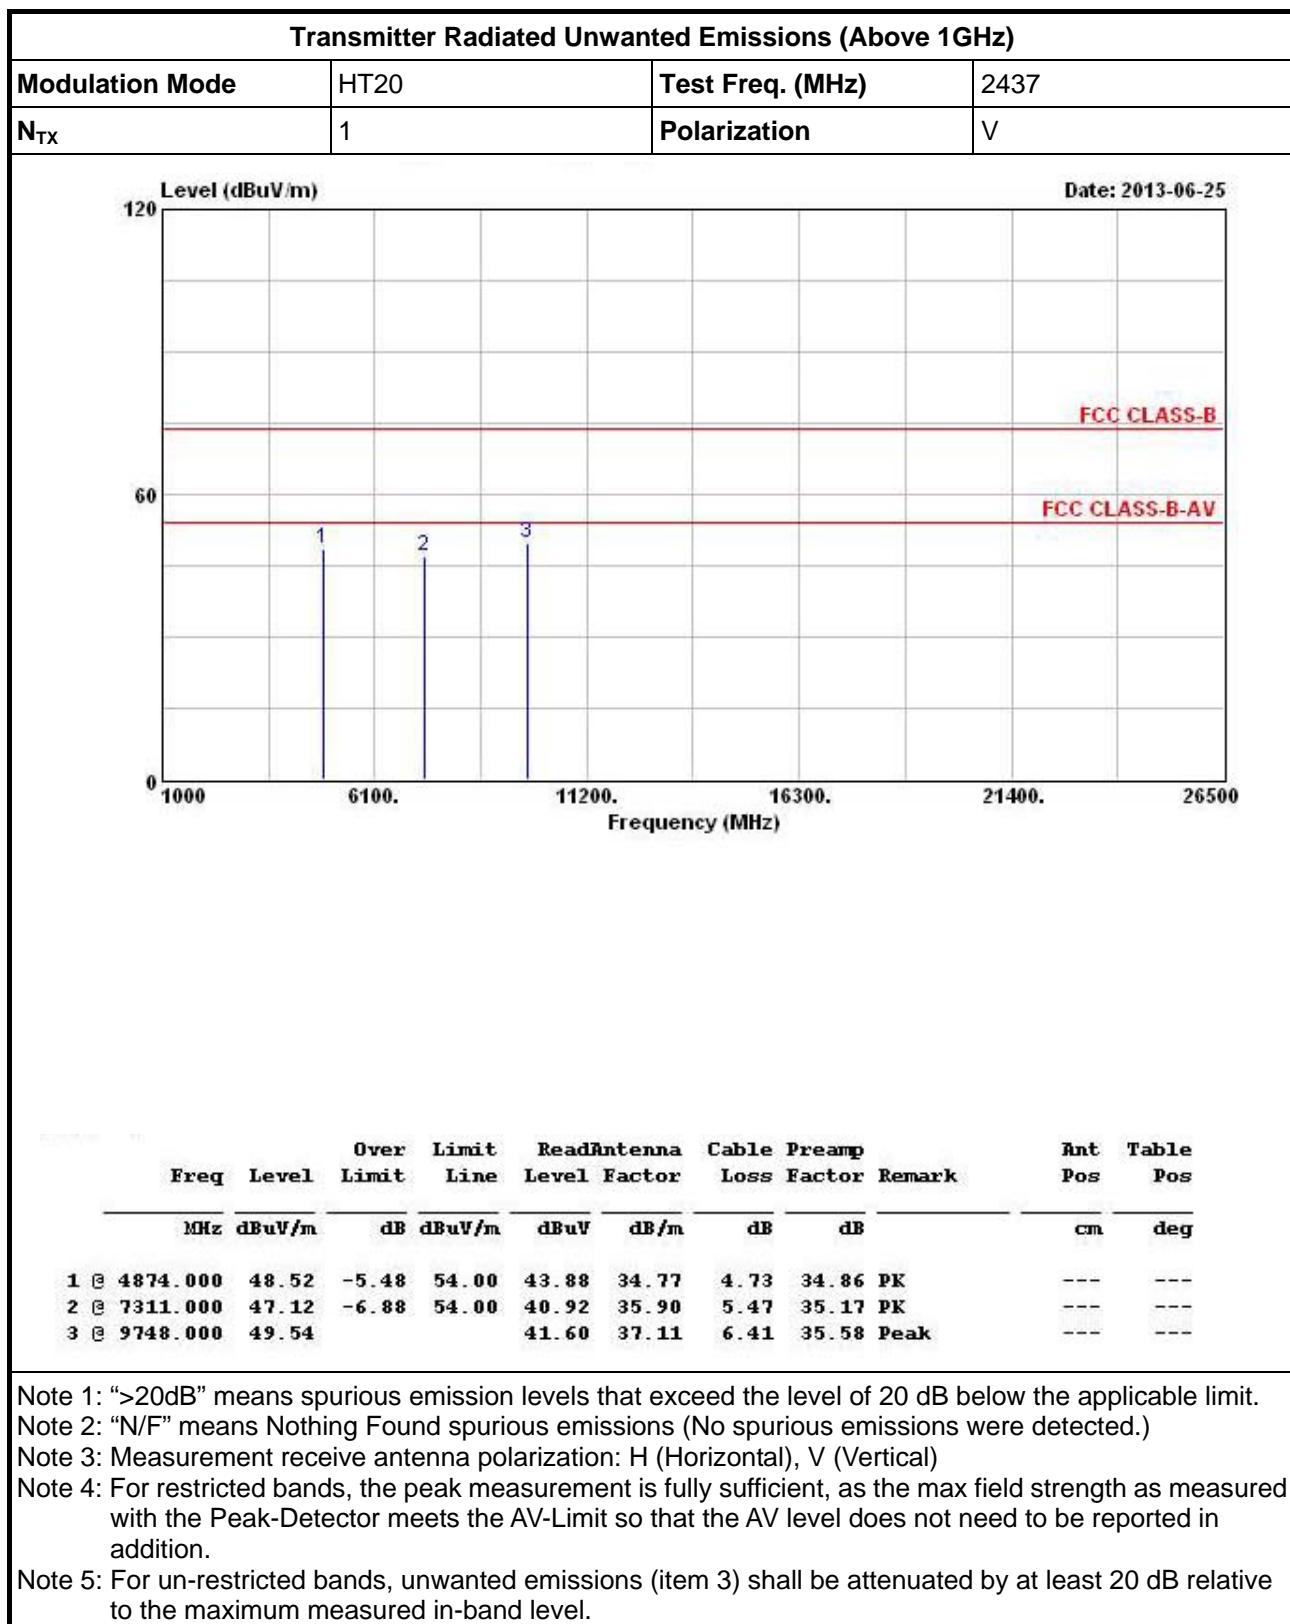

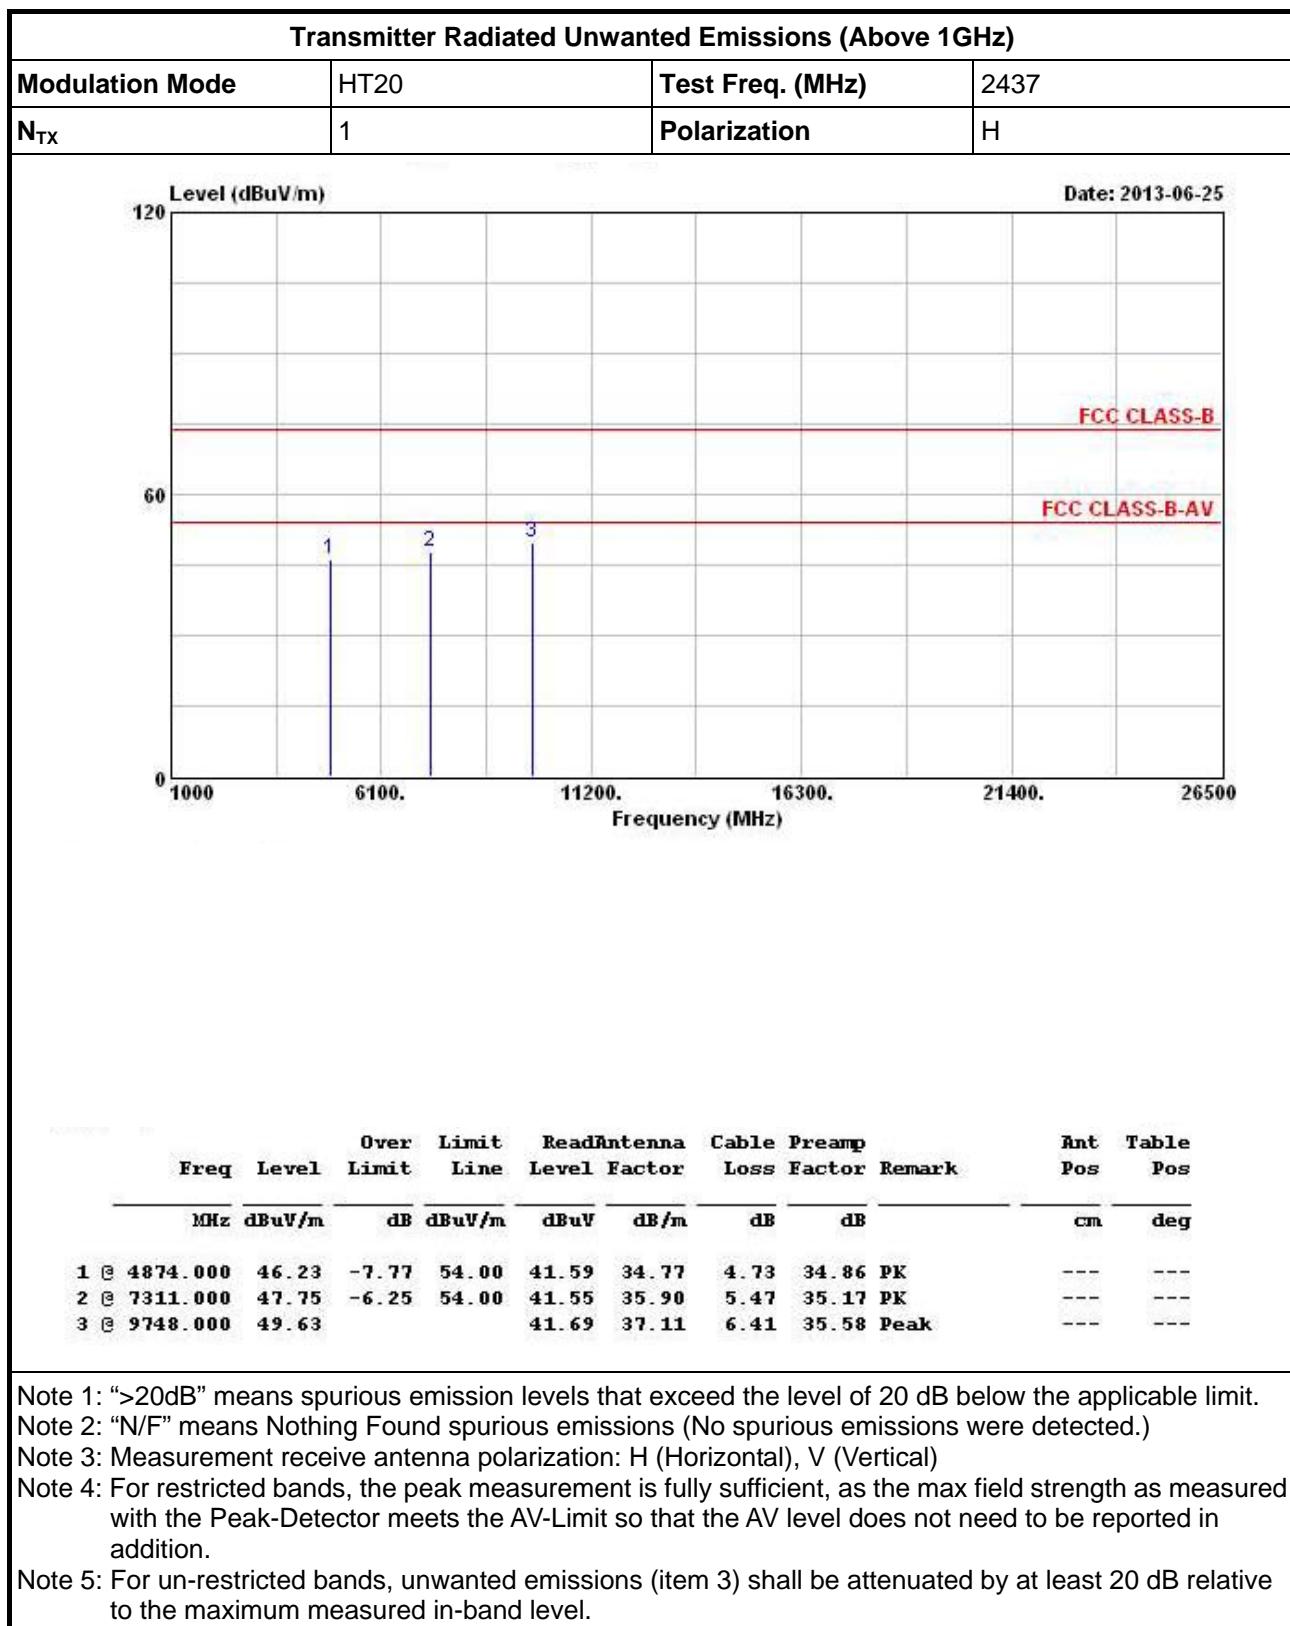

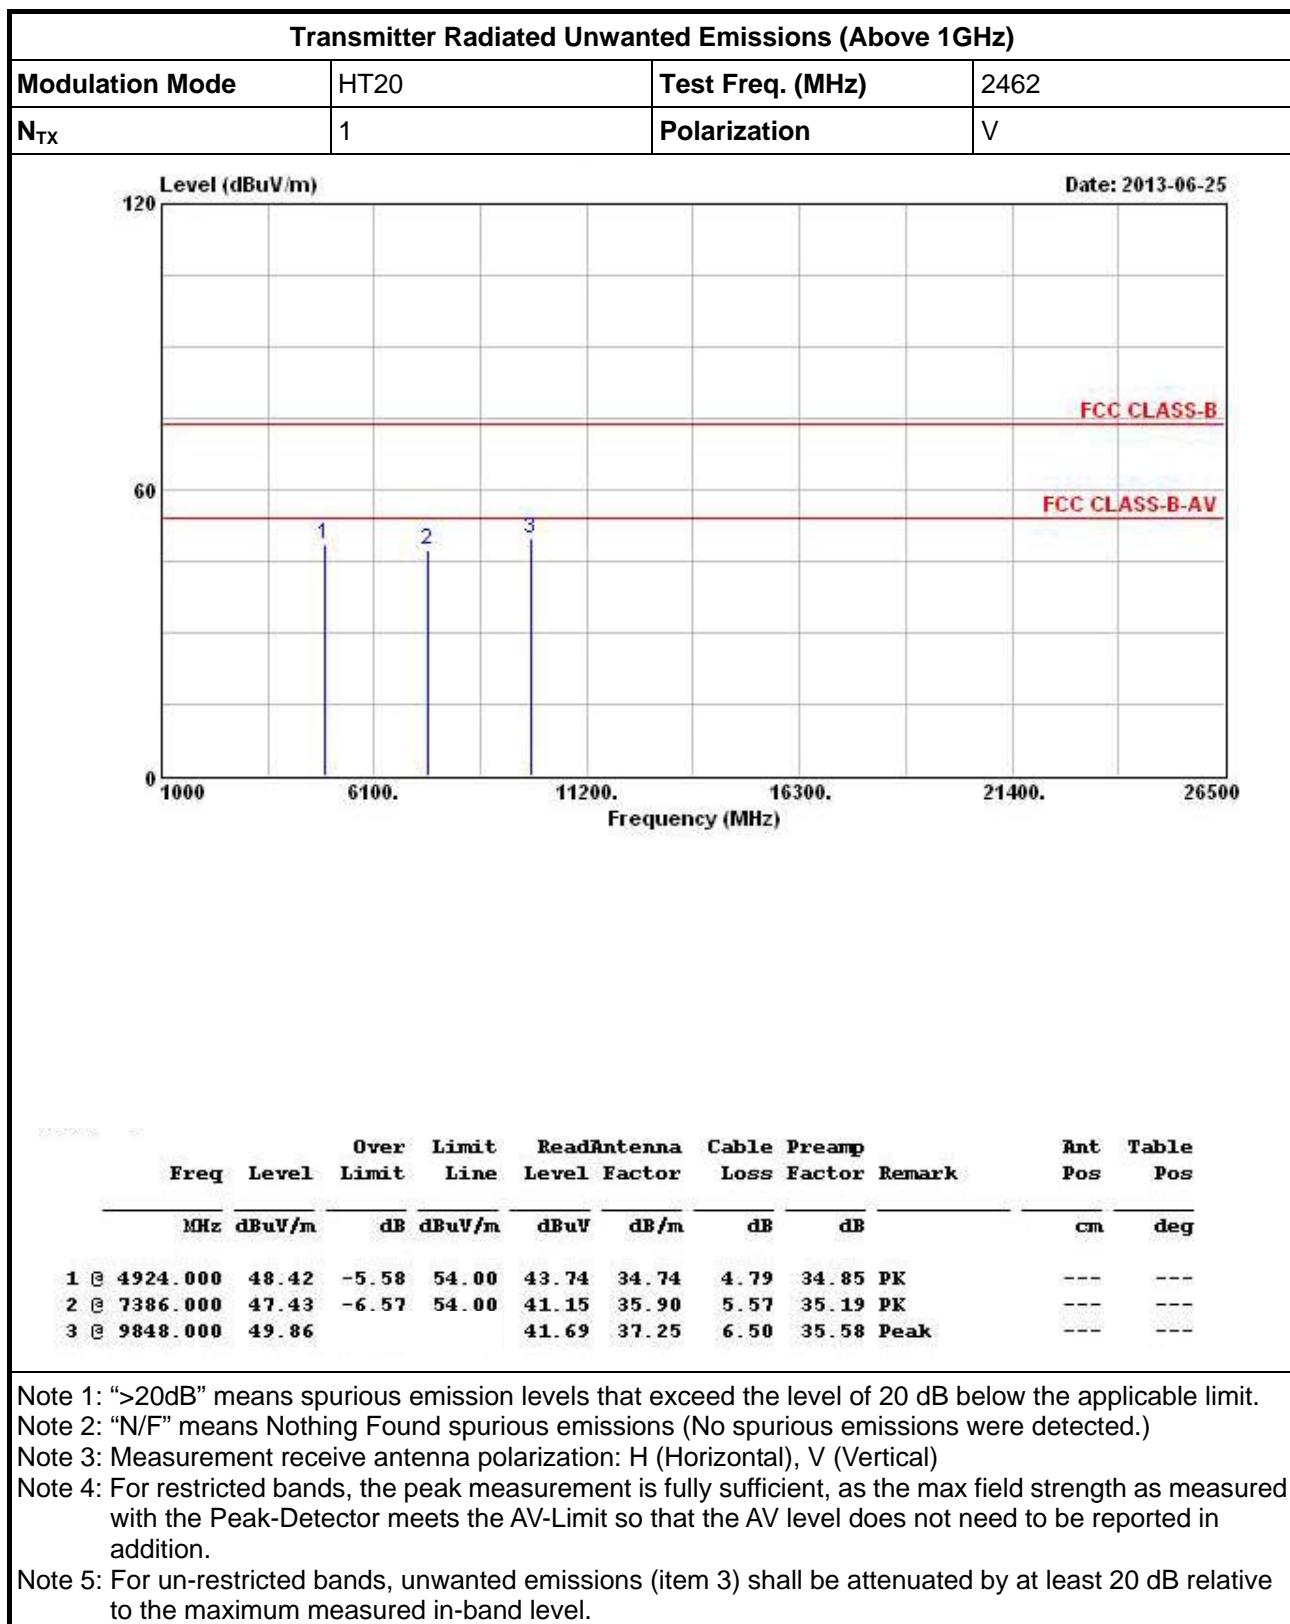


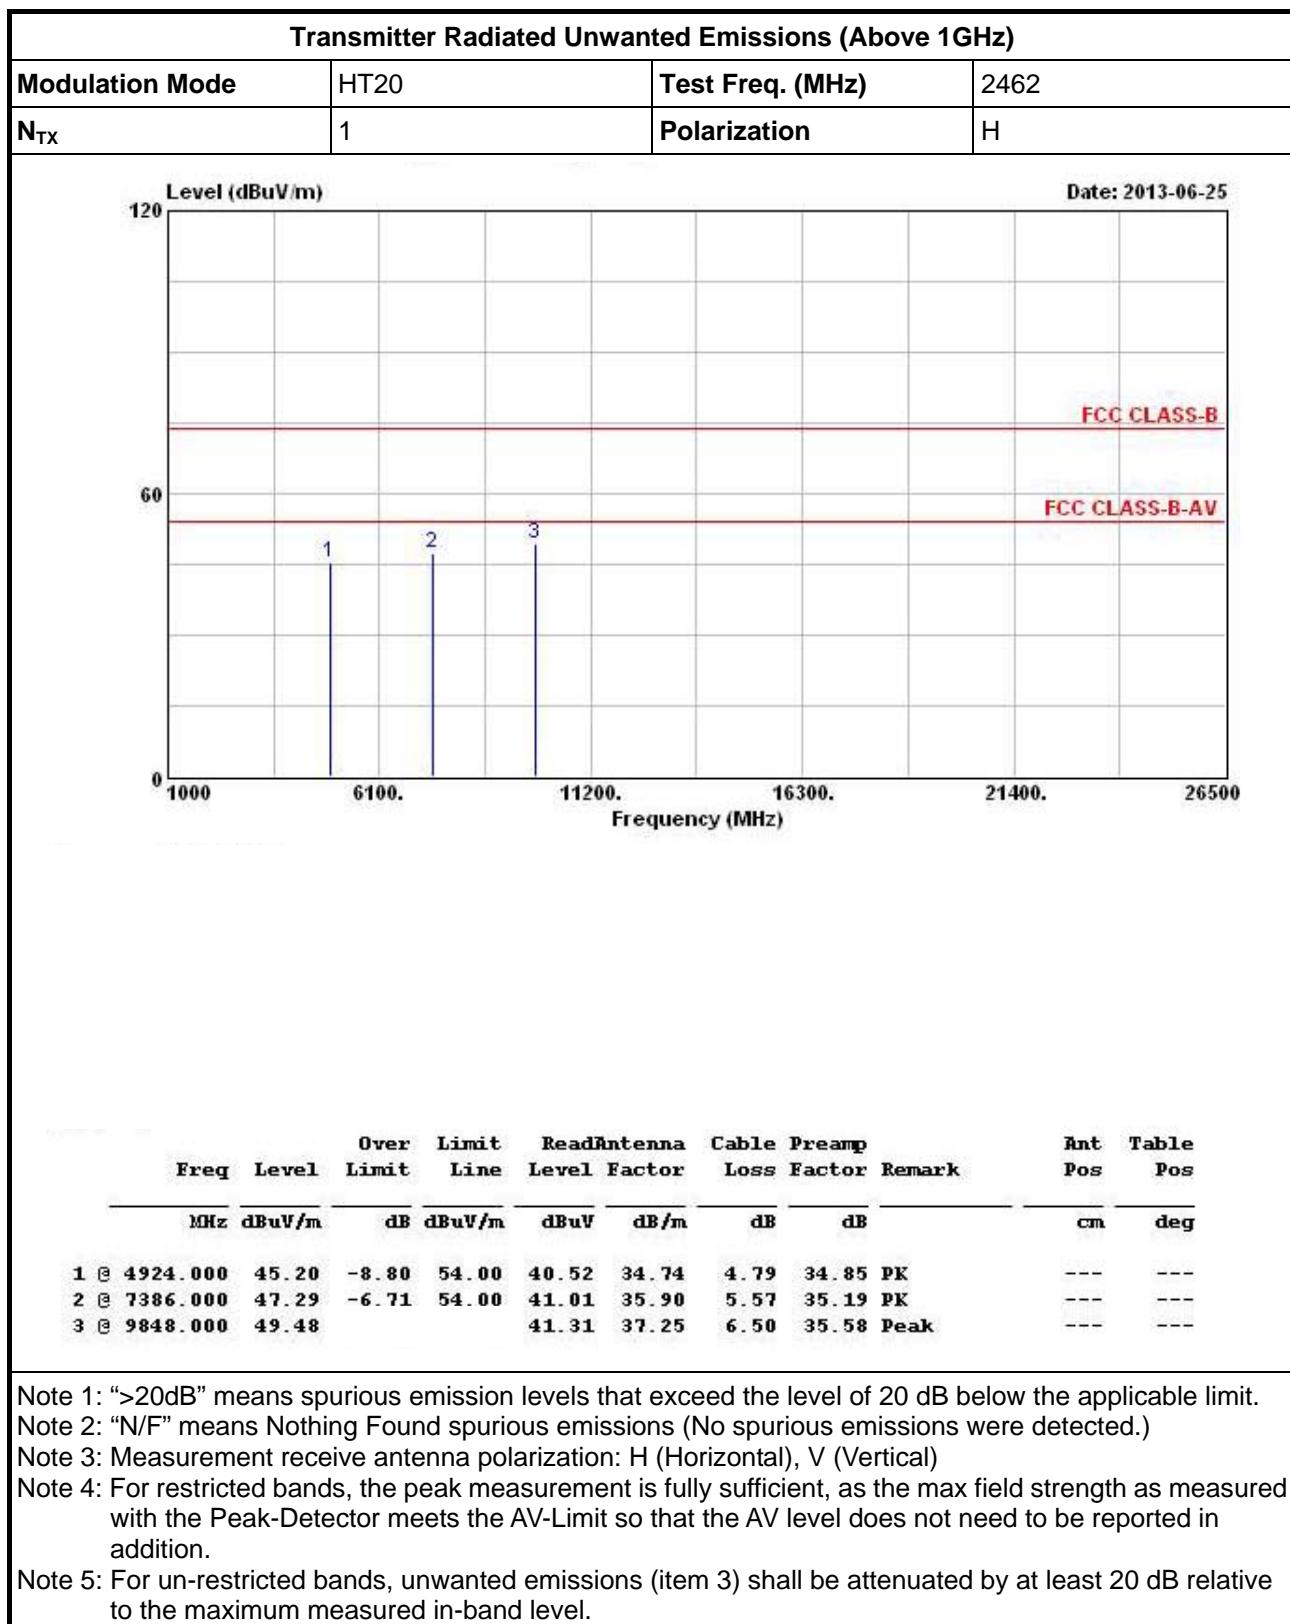



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	2422
N _{TX}	1	Polarization	V

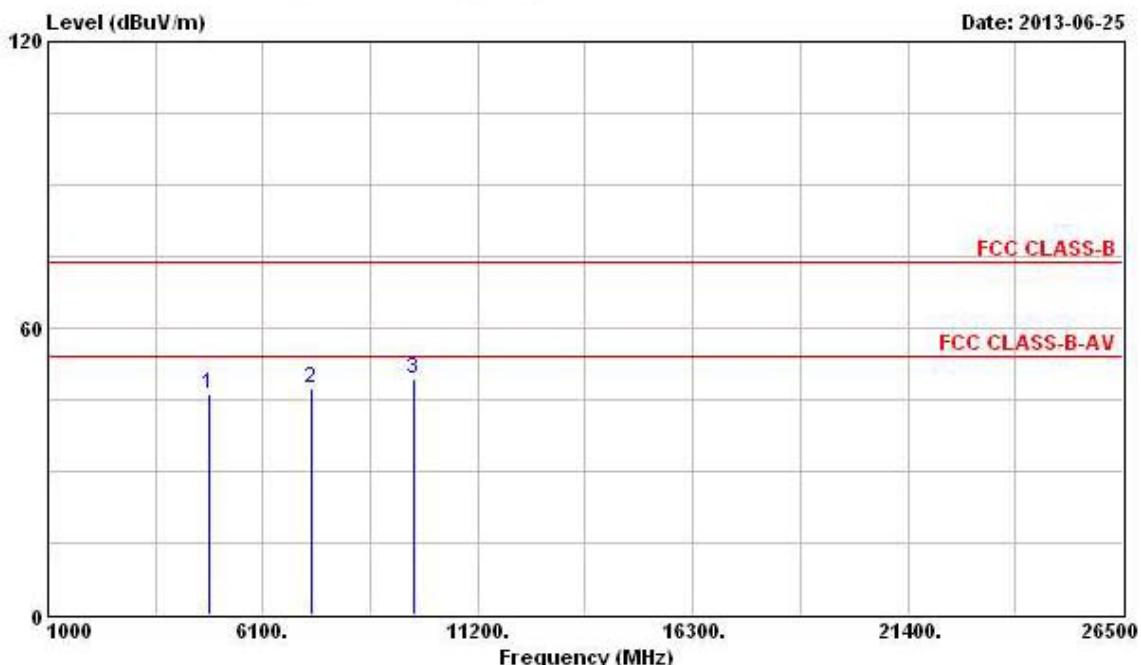

Freq	Level	Over Limit	Line	Read Antenna		Cable Preamp			Ant Pos	Table Pos
				Level	Factor	Loss	Factor	Remark		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @ 4844.000	46.15	-7.85	54.00	41.50	34.79	4.73	34.87	PK	---	---
2 @ 7266.000	47.49	-6.51	54.00	41.33	35.90	5.42	35.16	PK	---	---
3 @ 9688.000	49.20			41.39	37.00	6.38	35.57	Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands, unwanted emissions (item 3) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

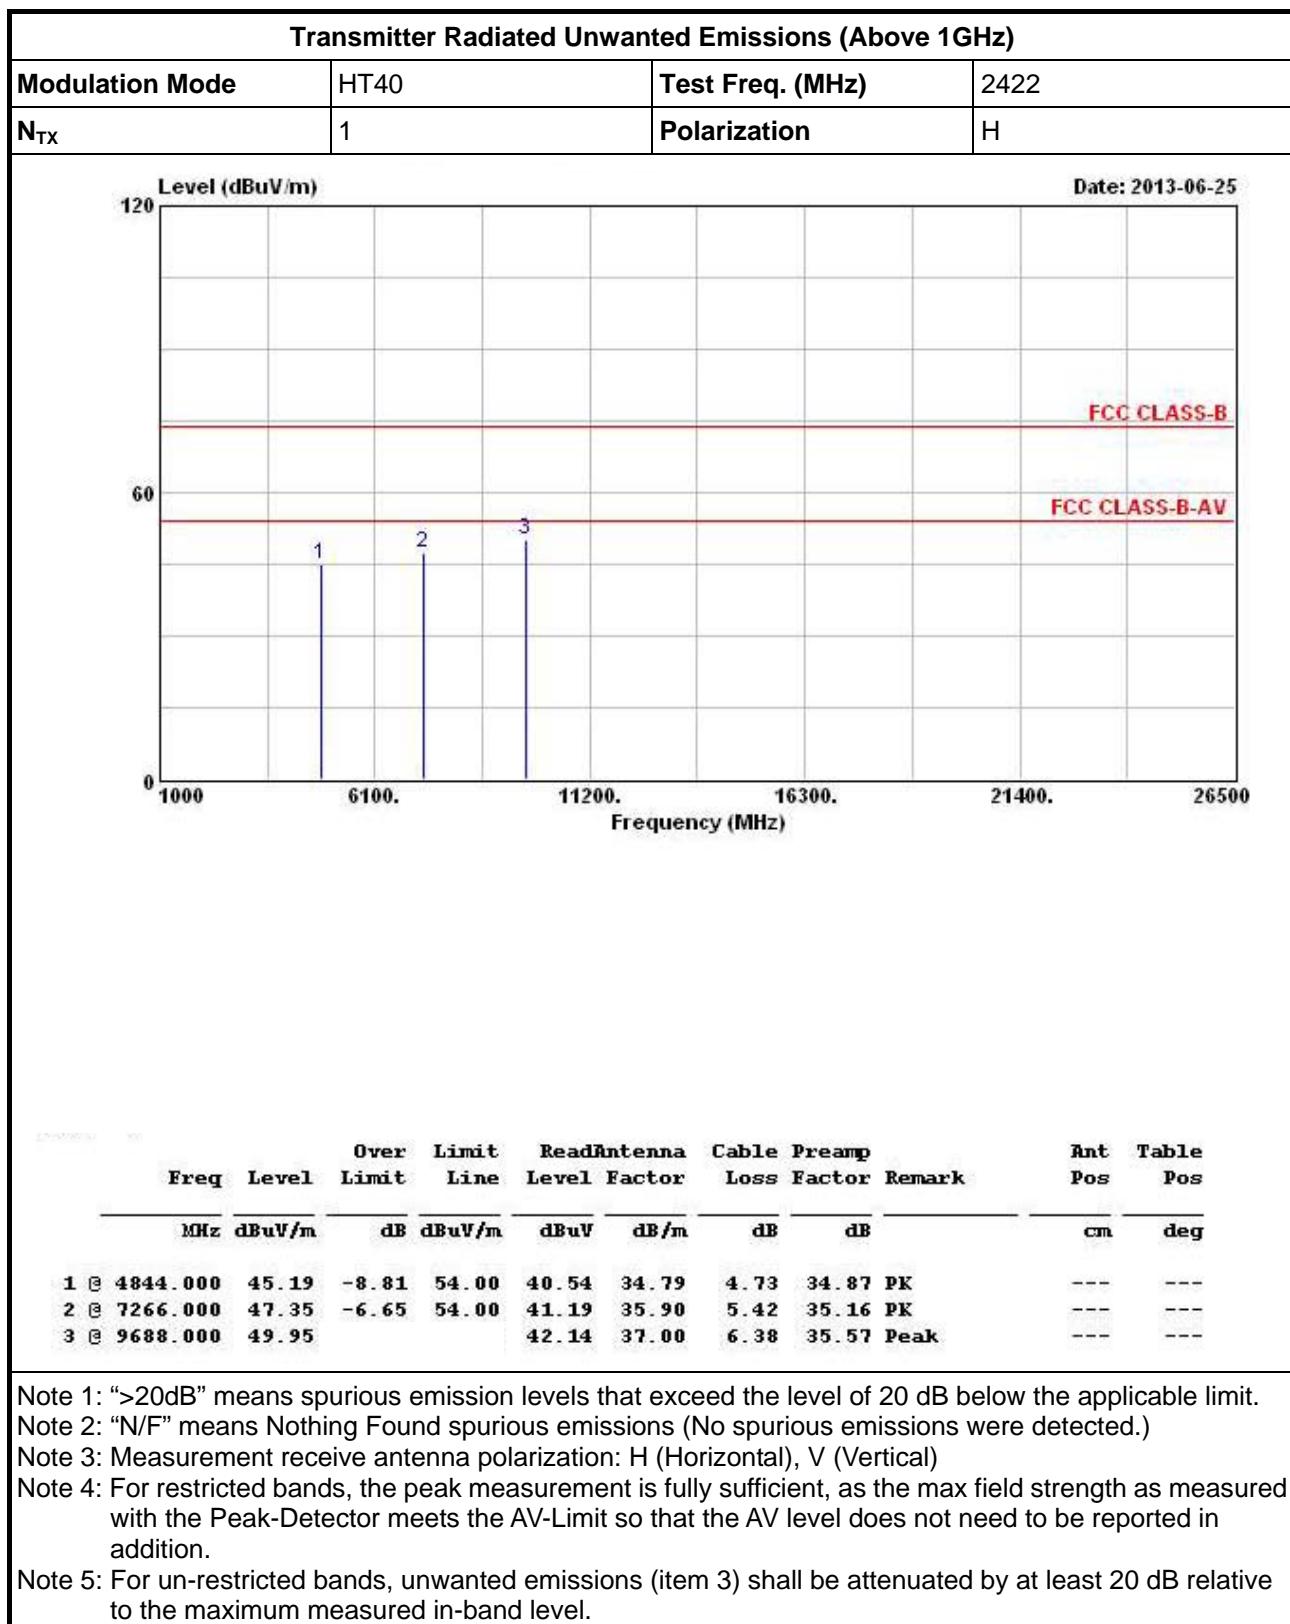

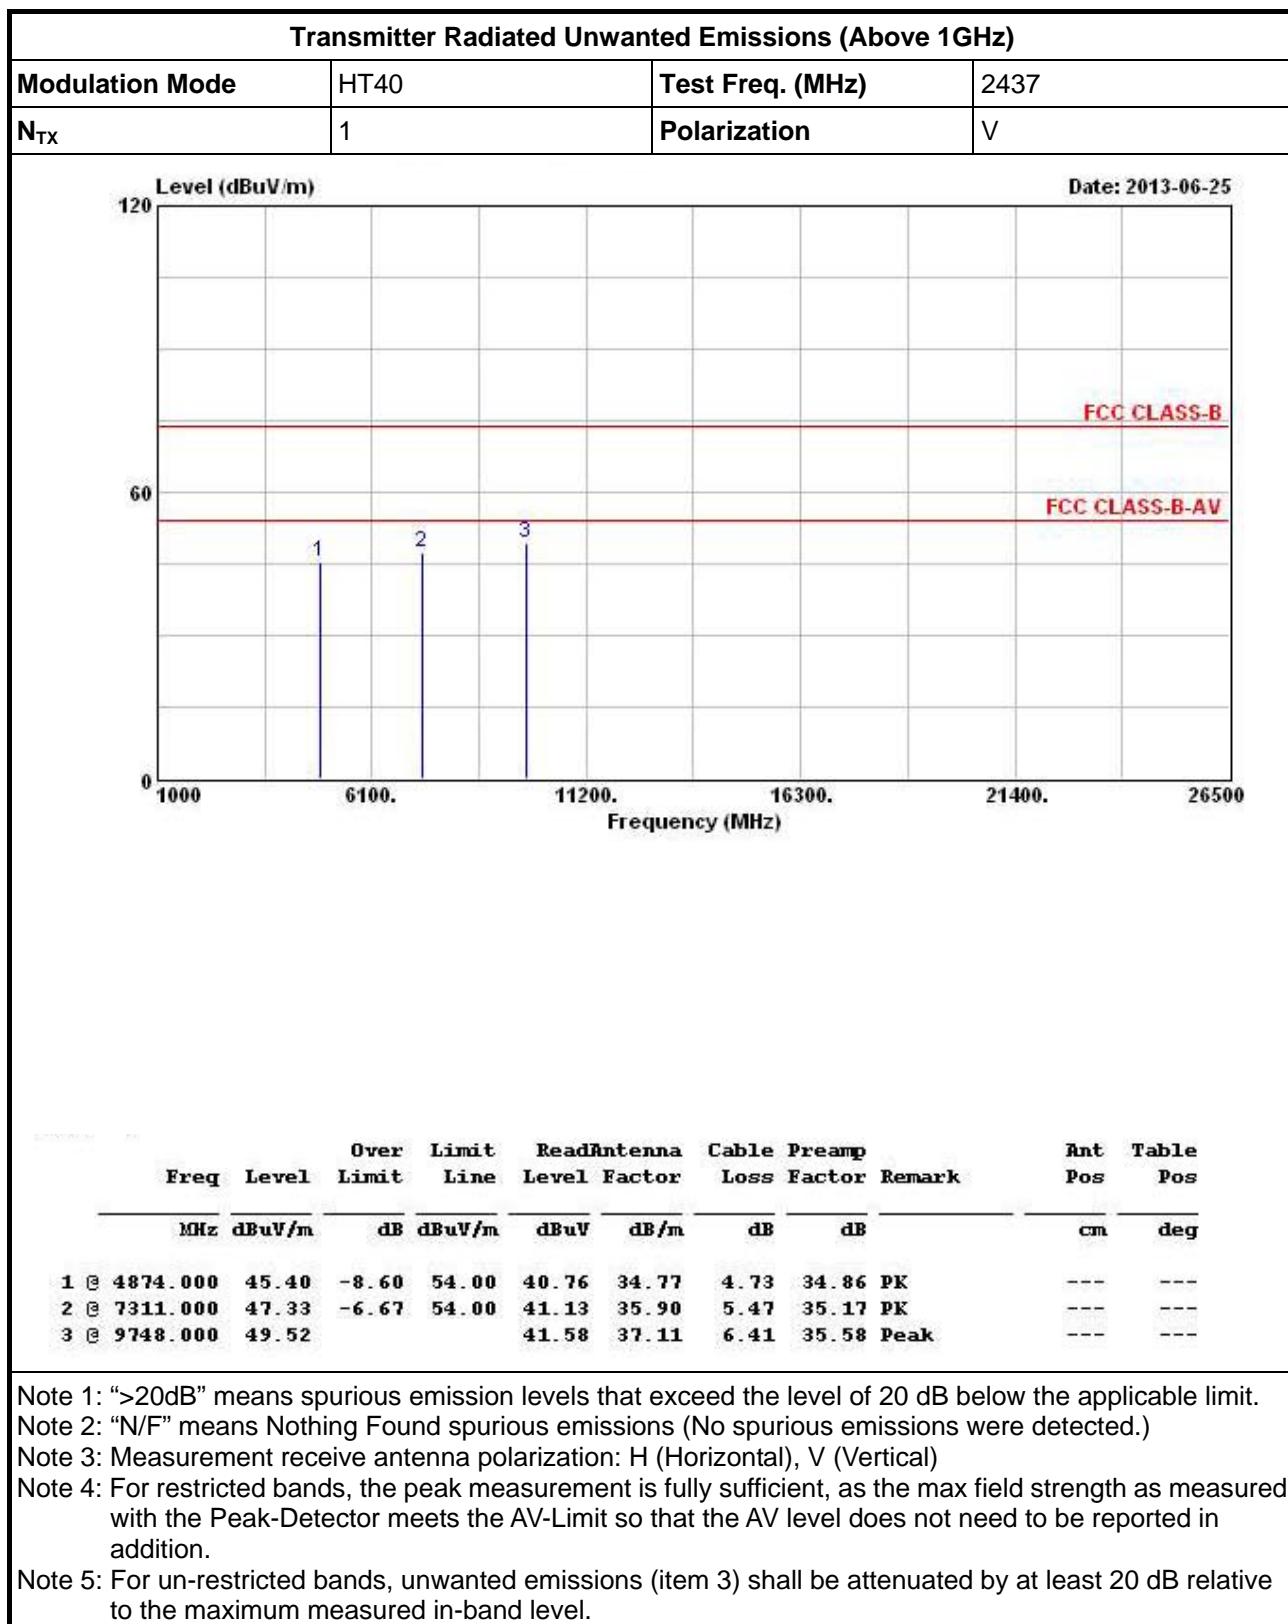

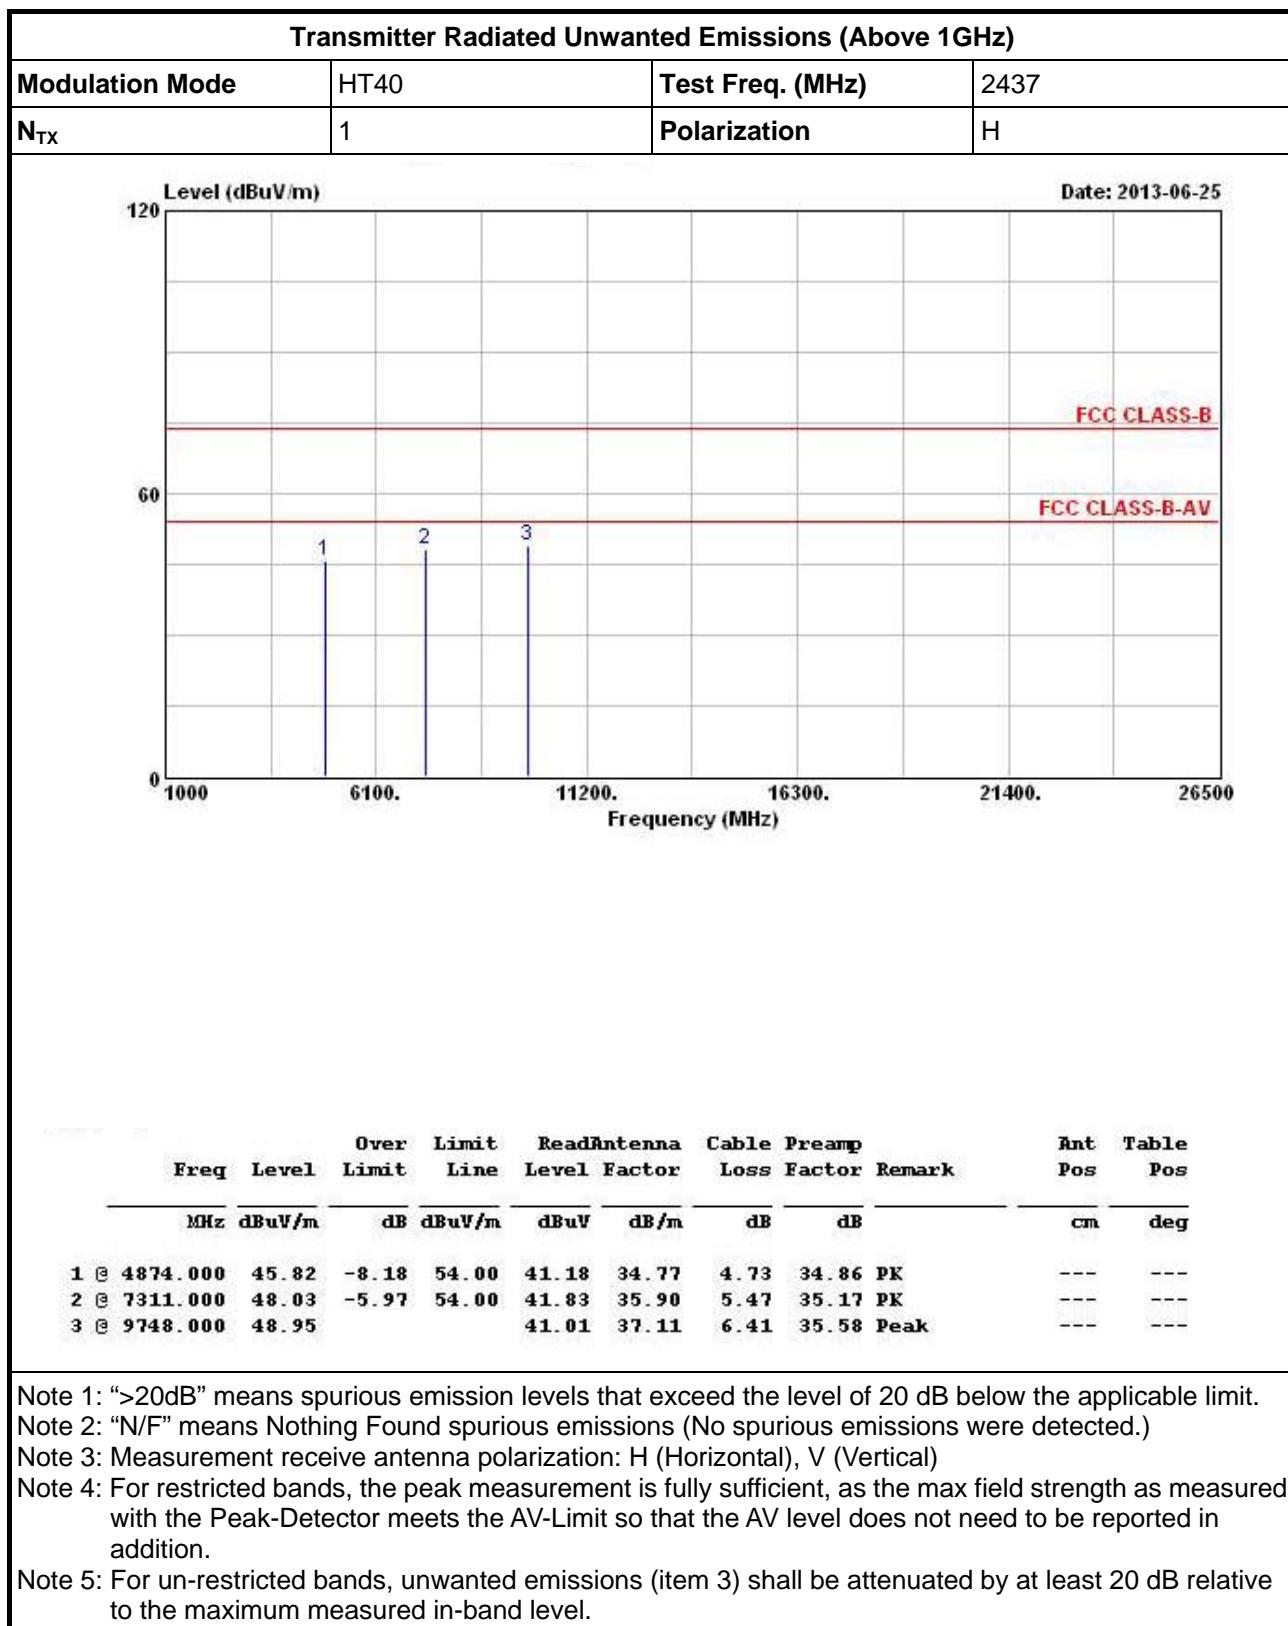

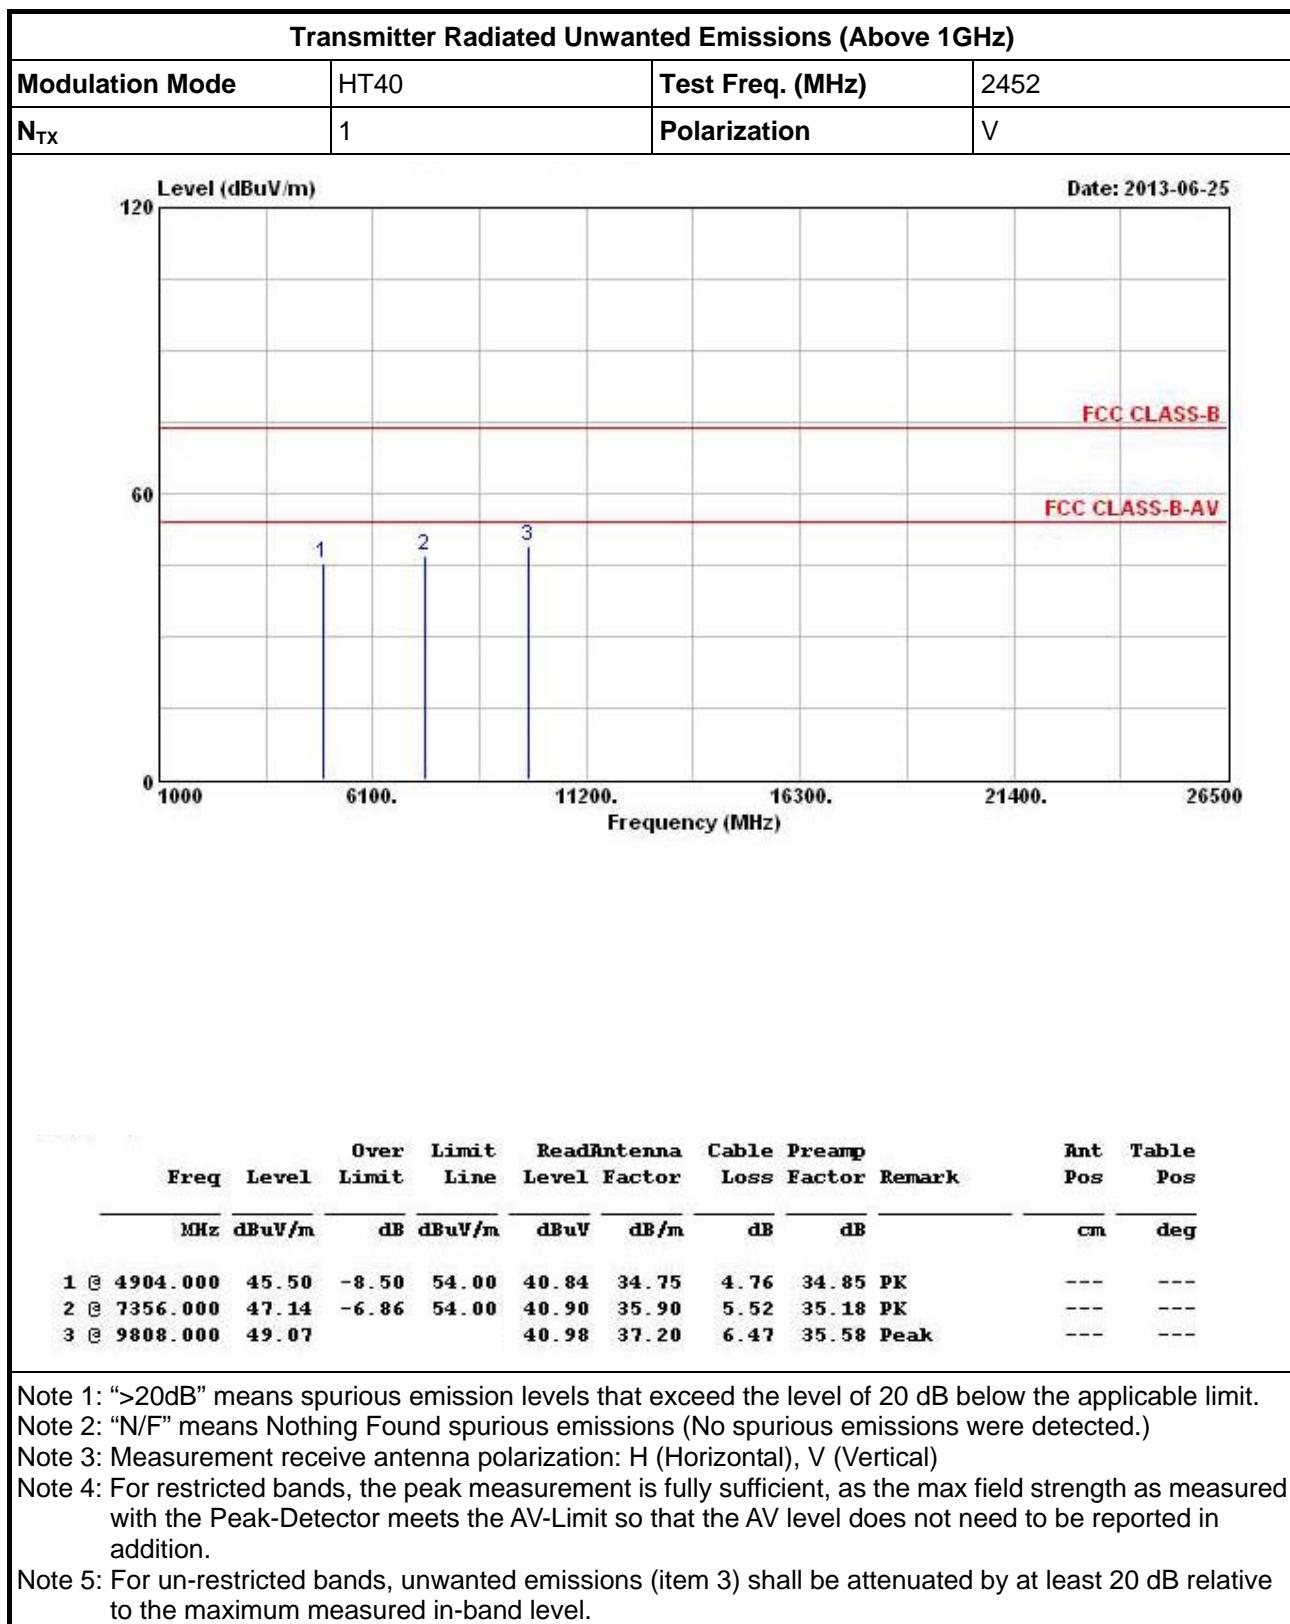

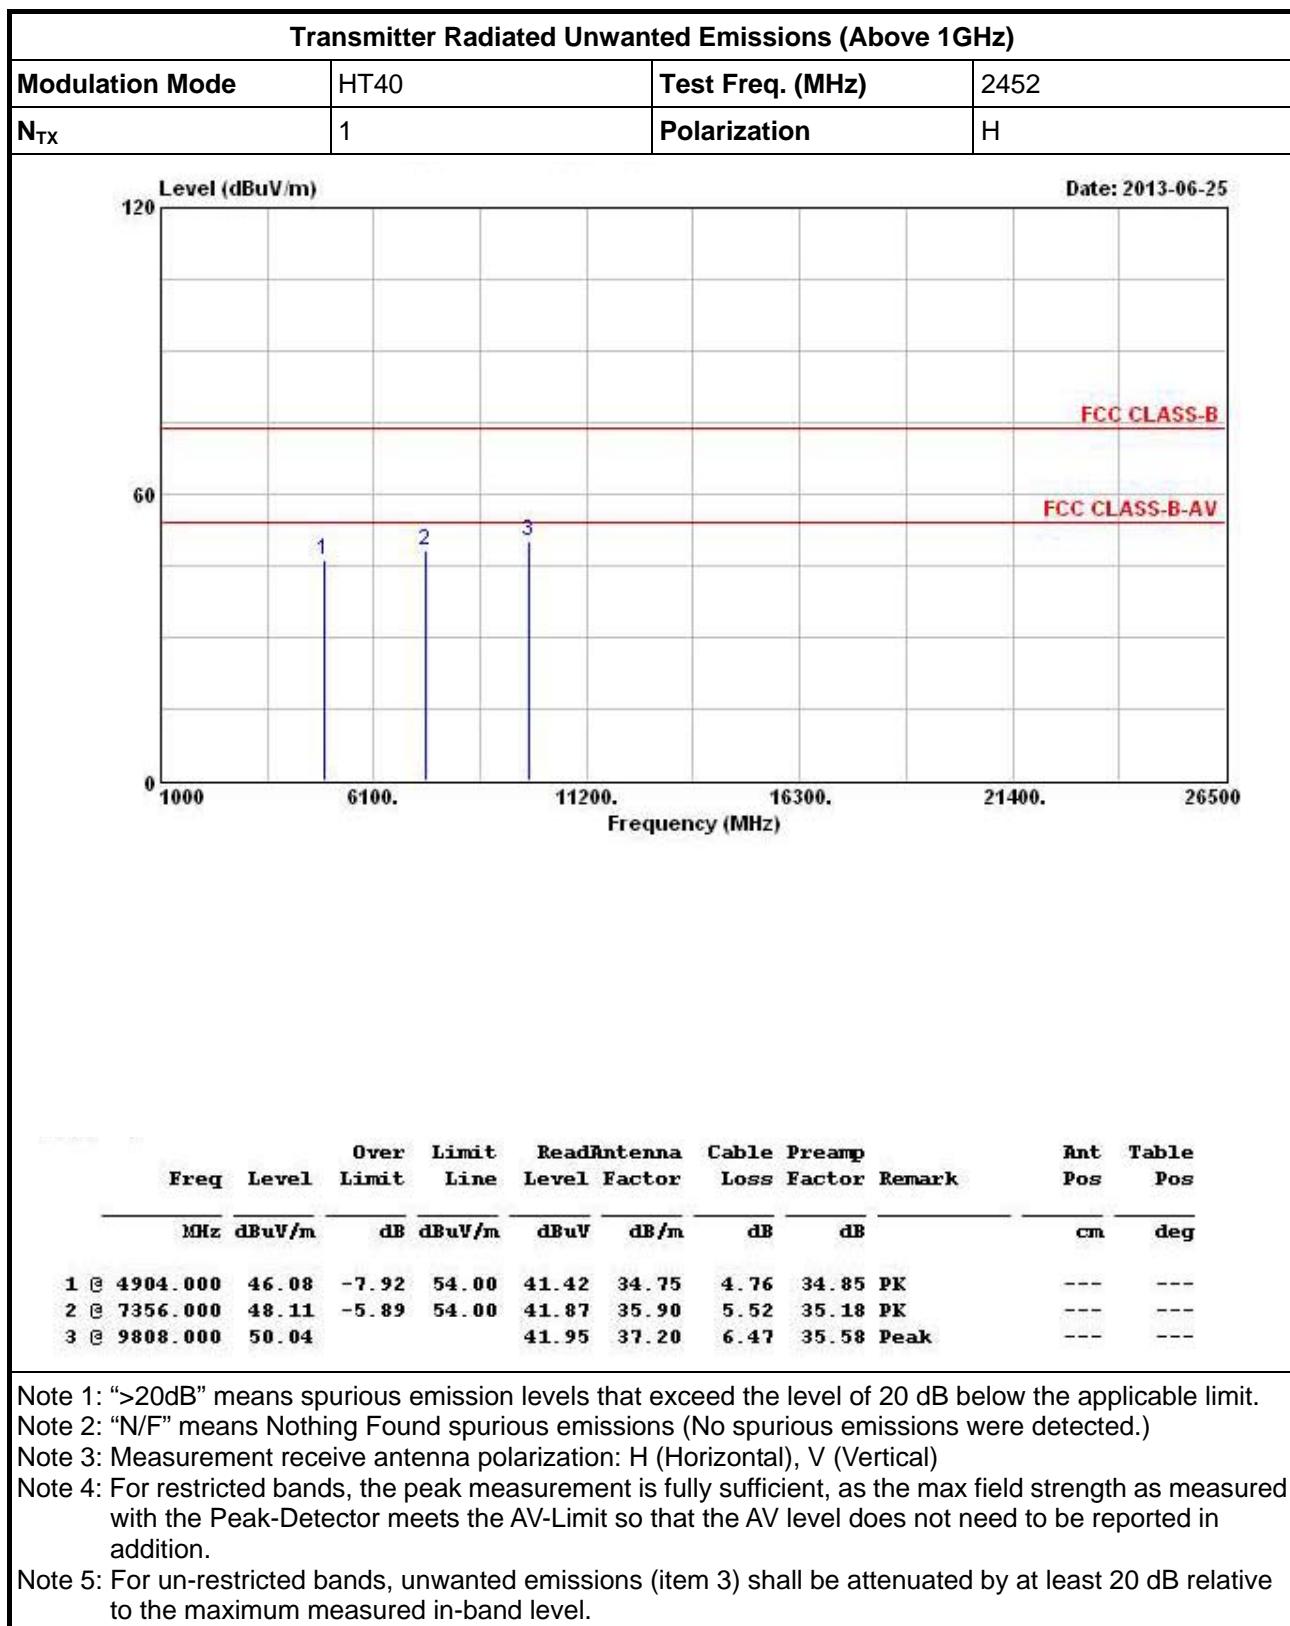



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Mar. 26, 2013	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 21, 2013	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz ~ 30MHz	Apr. 18, 2013	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	7.61183201e+012	9kHz ~ 30MHz	Nov. 09, 2012	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP 40	100305	9KHz~40GHz	Feb. 21, 2012	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	-20 ~ 100°C	Dec. 07, 2011	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jun. 07, 2011	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	1027452	300MHz ~ 40GHz	Jan. 12, 2012	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	1124009	300MHz ~ 40GHz	Jan. 12, 2012	Conducted (TH01-HY)
RF Cable-2m	HUBER+SUHNER	SUCOFLEX_104	SN 345672/4	1GHz ~ 26.5GHz	Dec. 03, 2011	Conducted (TH01-HY)
RF Cable-3m	HUBER+SUHNER	SUCOFLEX_104	SN 345668/4	1GHz ~ 26.5GHz	Dec. 03, 2011	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Jun. 09, 2011*	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP40	100593	9kHz ~ 40GHz	Sep. 14, 2012	Radiation (03CH02-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz ~ 1GHz 3m	May 11, 2013	Radiation (03CH02-HY)
Amplifier	Agilent	8447D	2944A11146	100kHz ~ 1.3GHz	Jul. 23, 2012	Radiation (03CH02-HY)
Amplifier	Agilent	8449B	3008A02373	1GHz ~ 26.5GHz	Aug. 10, 2012	Radiation (03CH02-HY)
Horn Antenna	ETS-LINDGREN	3117	00091920	1GHz ~ 18GHz	Nov. 16, 2012	Radiation (03CH02-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz ~ 40GHz	Jan. 08, 2013	Radiation (03CH02-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 10, 2012	Radiation (03CH02-HY)
RF Cable-high	SUHNER	SUCOFLEX106	03CH02-HY	1GHz ~ 40GHz	Mar. 05, 2013	Radiation (03CH02-HY)
Bilog Antenna	SCHAFFNER	CBL61128	2723	30MHz ~ 2GHz	Oct. 22, 2012	Radiation (03CH02-HY)
Turn Table	HD	DS 420	420/649/00	0~ 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	HD	MA 240	240/559/00	1 ~ 4 m	N/A	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	R&S	HFH2-Z2	860004/0001	9 kHz - 30 MHz	Jul. 03, 2012	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is two year.