


Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Vertical

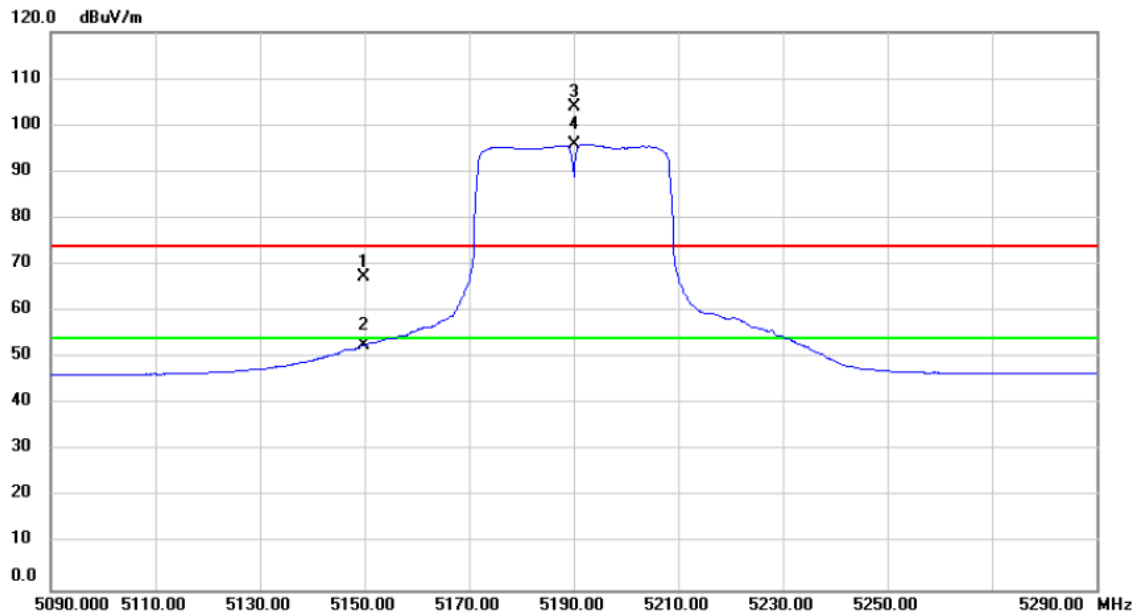

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5149.820	29.78	37.54	67.32	74.00	-6.68	peak	
2		5149.820	15.12	37.54	52.66	54.00	-1.34	AVG	
3	X	5190.000	66.23	37.58	103.81	74.00	29.81	peak	No Limit
4	*	5190.000	58.31	37.58	95.89	54.00	41.89	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Vertical

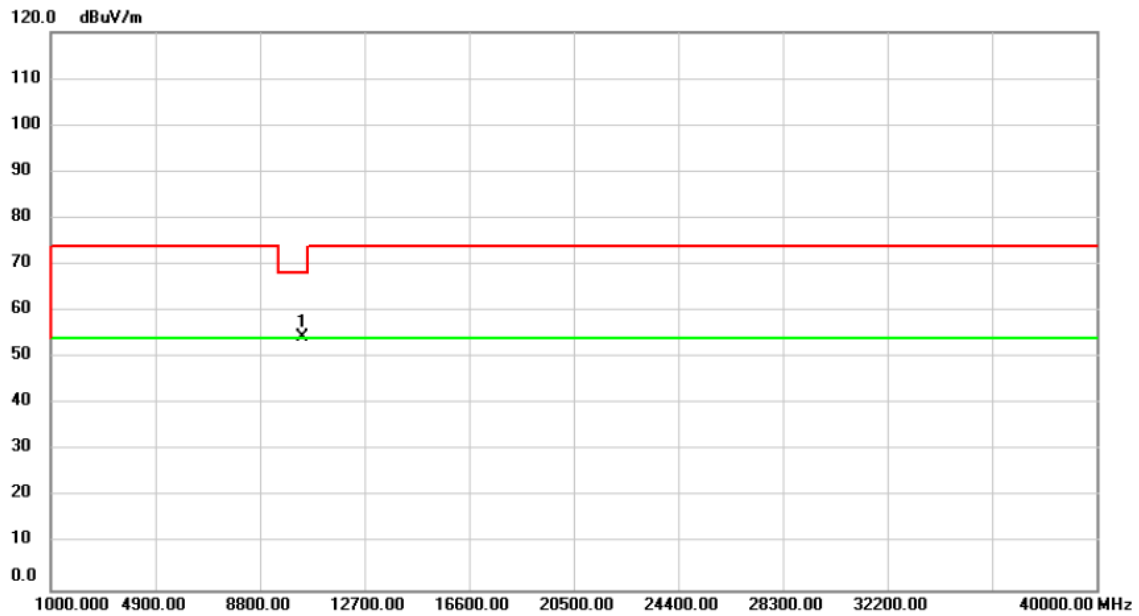

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10380.00	52.52	1.94	54.46	68.20	-13.74	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Horizontal

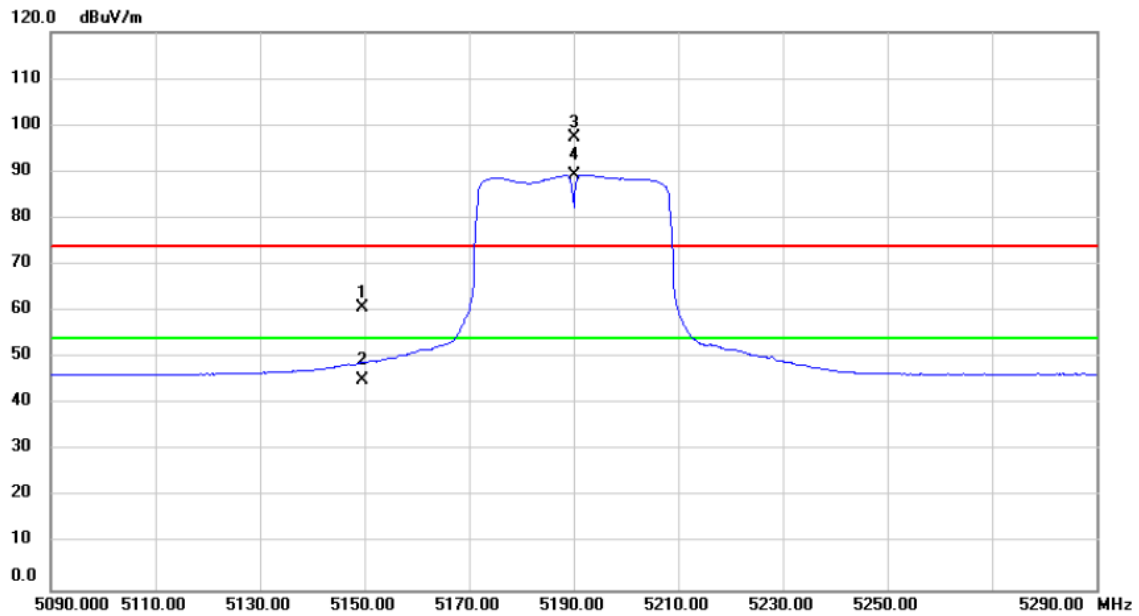

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5149.640	23.11	37.54	60.65	74.00	-13.35	peak	
2		5149.640	7.73	37.54	45.27	54.00	-8.73	AVG	
3	X	5190.000	59.78	37.58	97.36	74.00	23.36	peak	No Limit
4	*	5190.000	51.74	37.58	89.32	54.00	35.32	AVG	No Limit


Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Horizontal

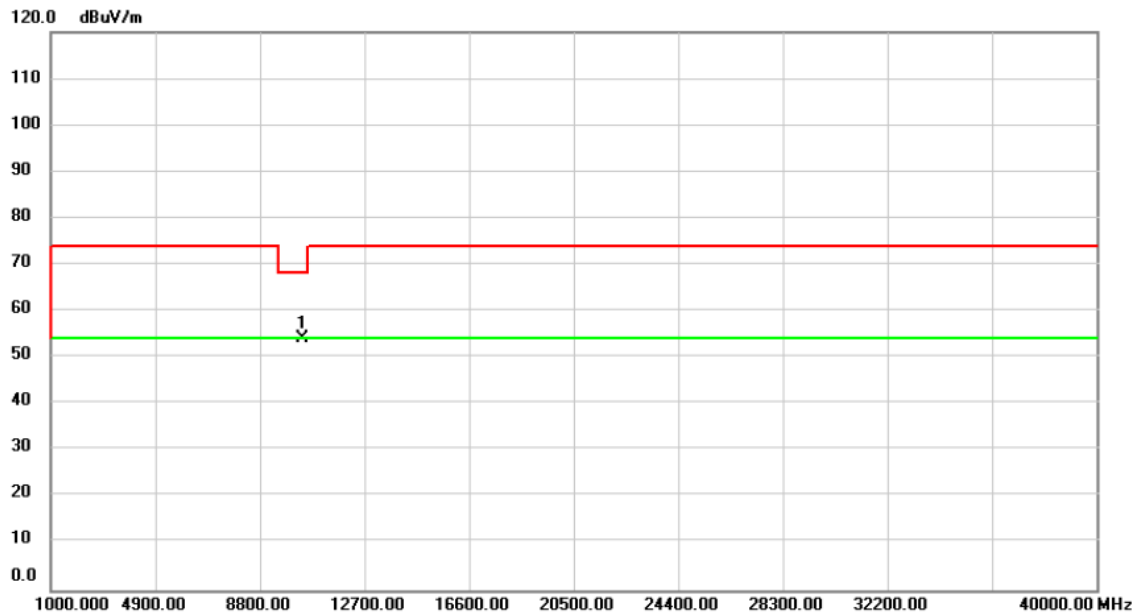


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10380.00	52.30	1.94	54.24	68.20	-13.96	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

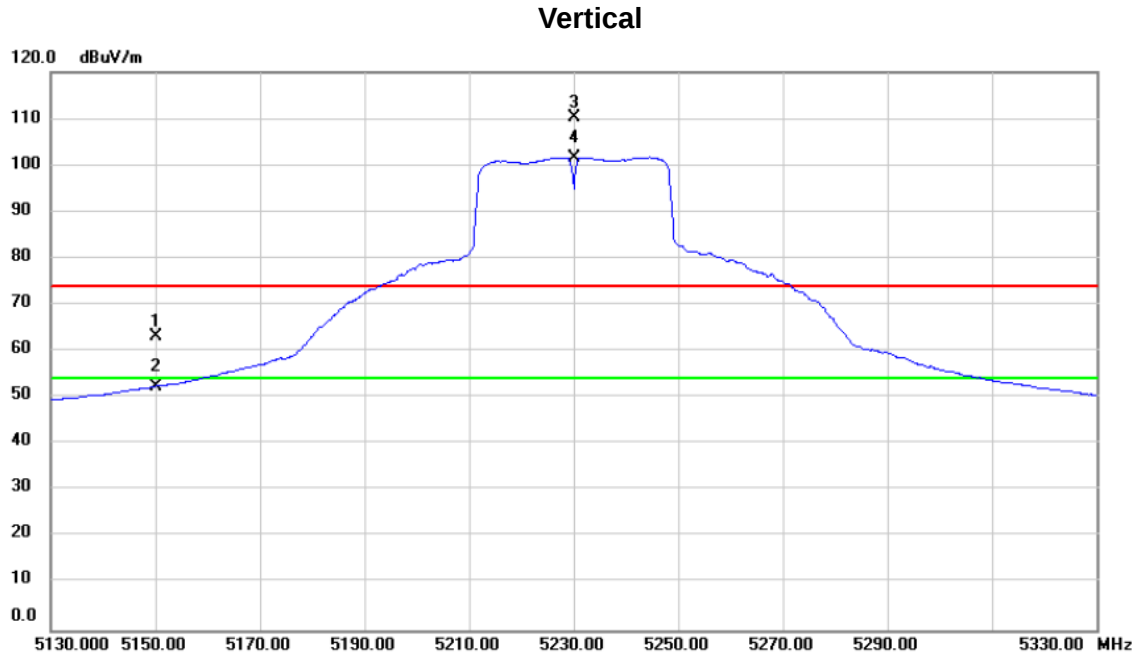

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	25.72	37.54	63.26	74.00	-10.74	peak	
2		5150.000	14.72	37.54	52.26	54.00	-1.74	AVG	
3	X	5230.000	72.57	37.63	110.20	74.00	36.20	peak	No Limit
4	*	5230.000	64.07	37.63	101.70	54.00	47.70	AVG	No Limit


Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

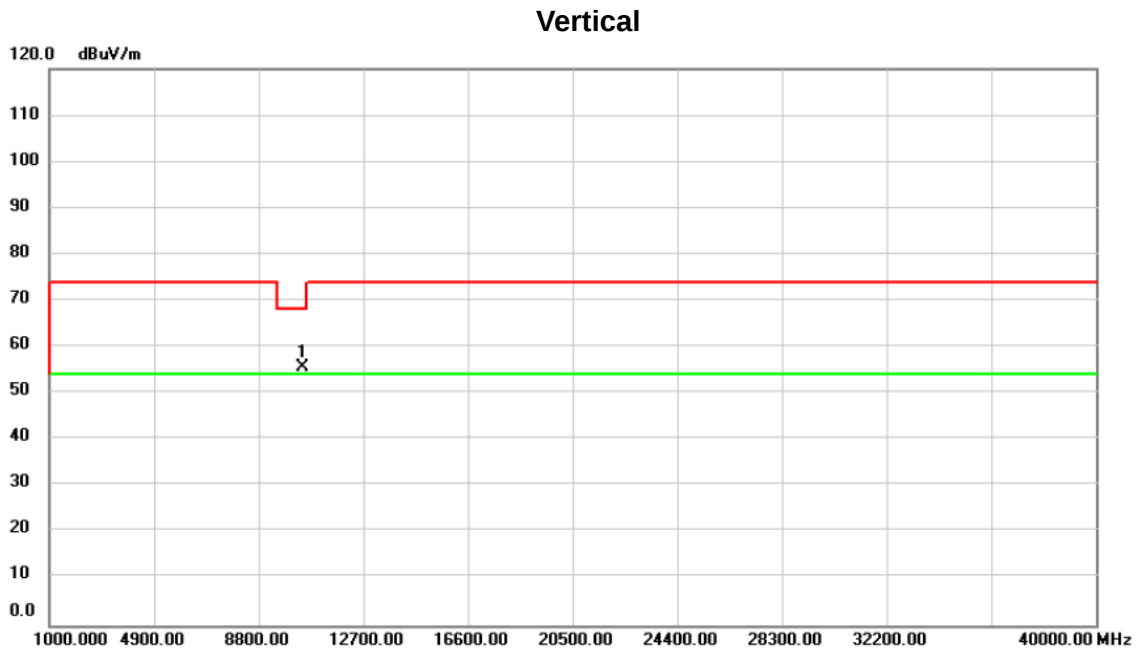

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.00	53.69	1.96	55.65	68.20	-12.55	peak	


Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Horizontal

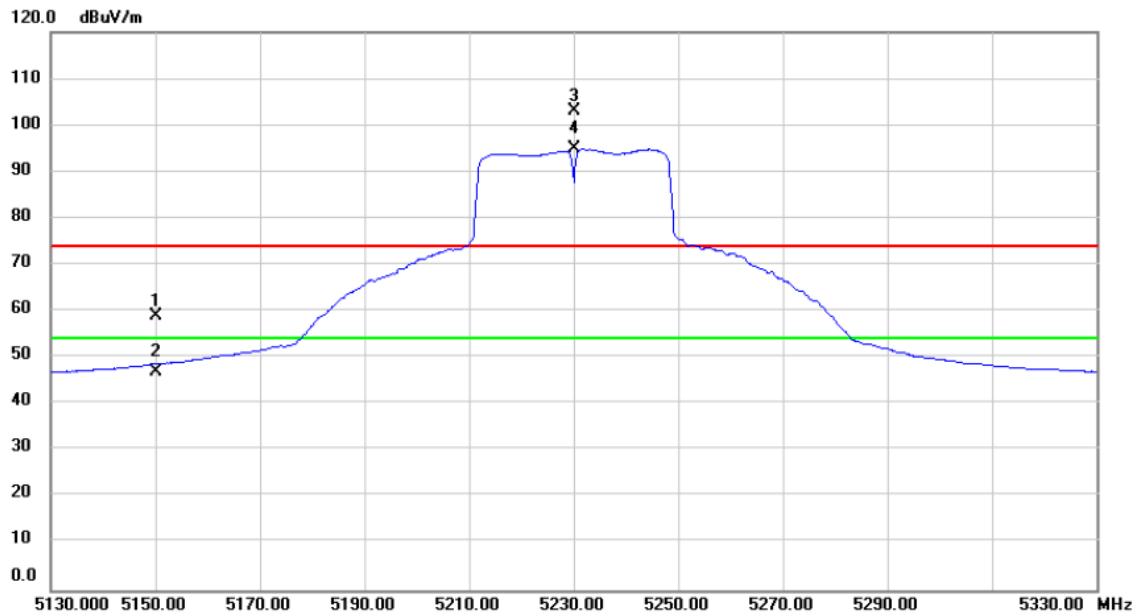


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	21.56	37.54	59.10	74.00	-14.90	peak	
2		5150.000	9.29	37.54	46.83	54.00	-7.17	AVG	
3	X	5230.000	65.33	37.63	102.96	74.00	28.96	peak	No Limit
4	*	5230.000	57.22	37.63	94.85	54.00	40.85	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

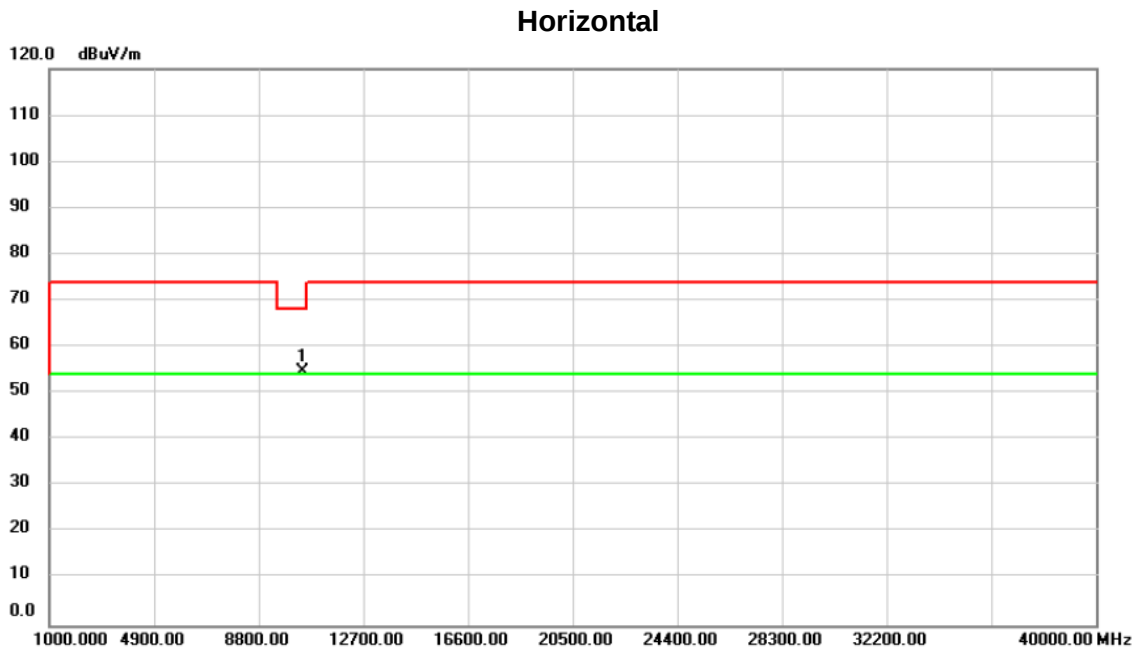

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.00	52.78	1.96	54.74	68.20	-13.46	peak	


Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz

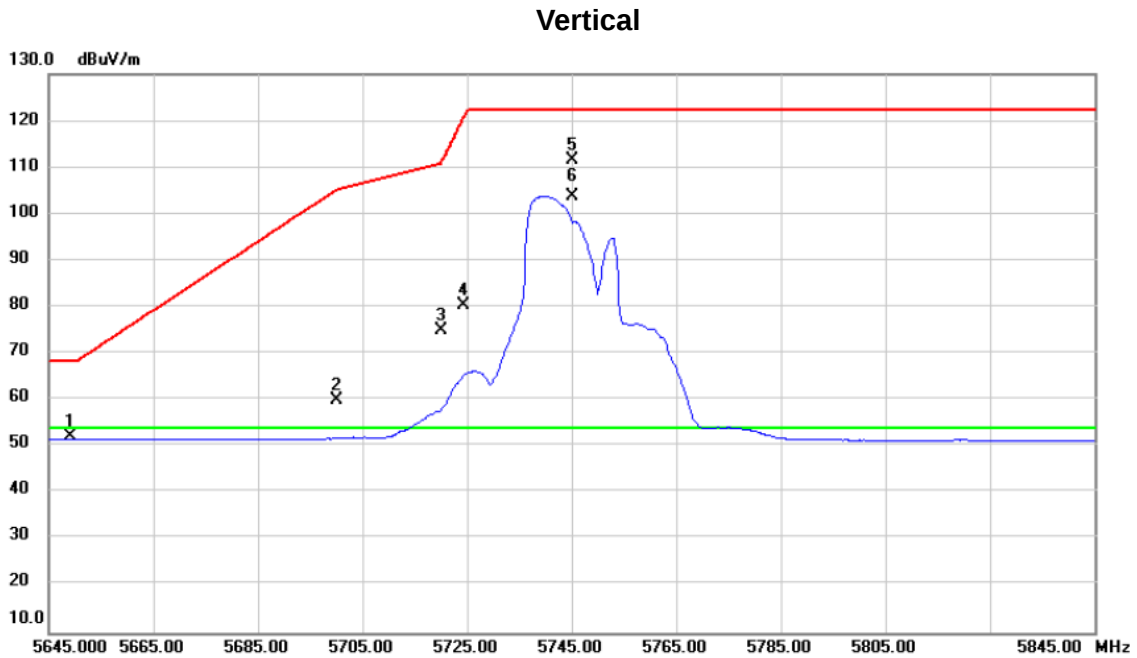

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5649.075	13.92	38.33	52.25	68.20	-15.95	peak	
2		5700.000	21.44	38.46	59.90	105.20	-45.30	peak	
3		5719.980	36.29	38.52	74.81	110.79	-35.98	peak	
4		5724.460	41.76	38.53	80.29	120.97	-40.68	peak	
5		5745.000	72.95	38.58	111.53	122.20	-10.67	peak	No Limit
6	*	5745.000	65.28	38.58	103.86	54.00	49.86	AVG	No Limit


Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz

Vertical

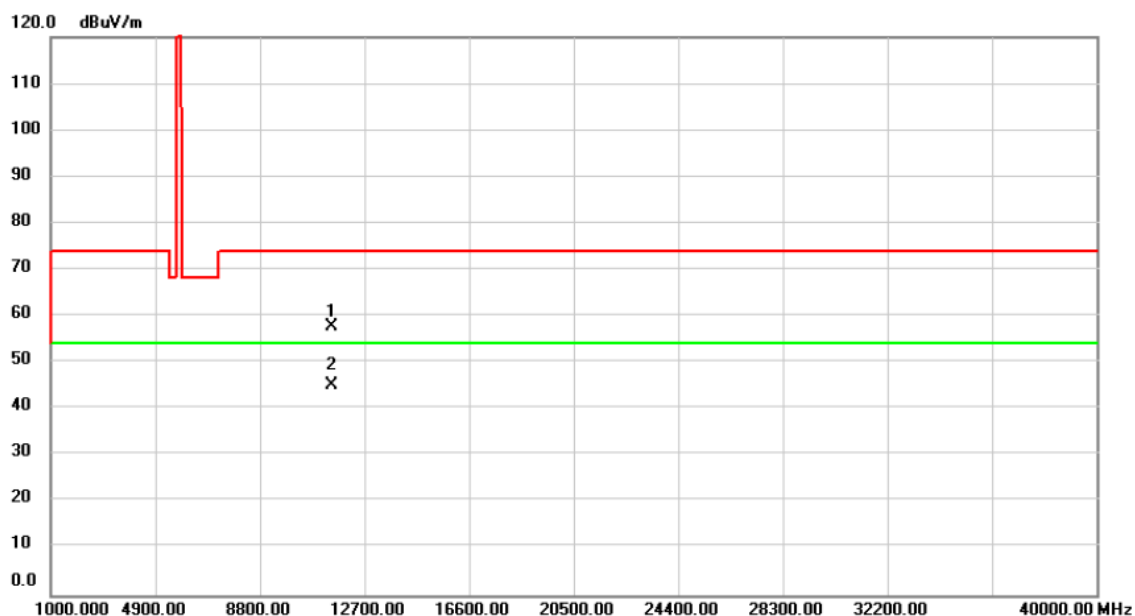

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	54.37	3.40	57.77	74.00	-16.23	peak	
2	*	11490.00	41.88	3.40	45.28	54.00	-8.72	AVG	


Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz

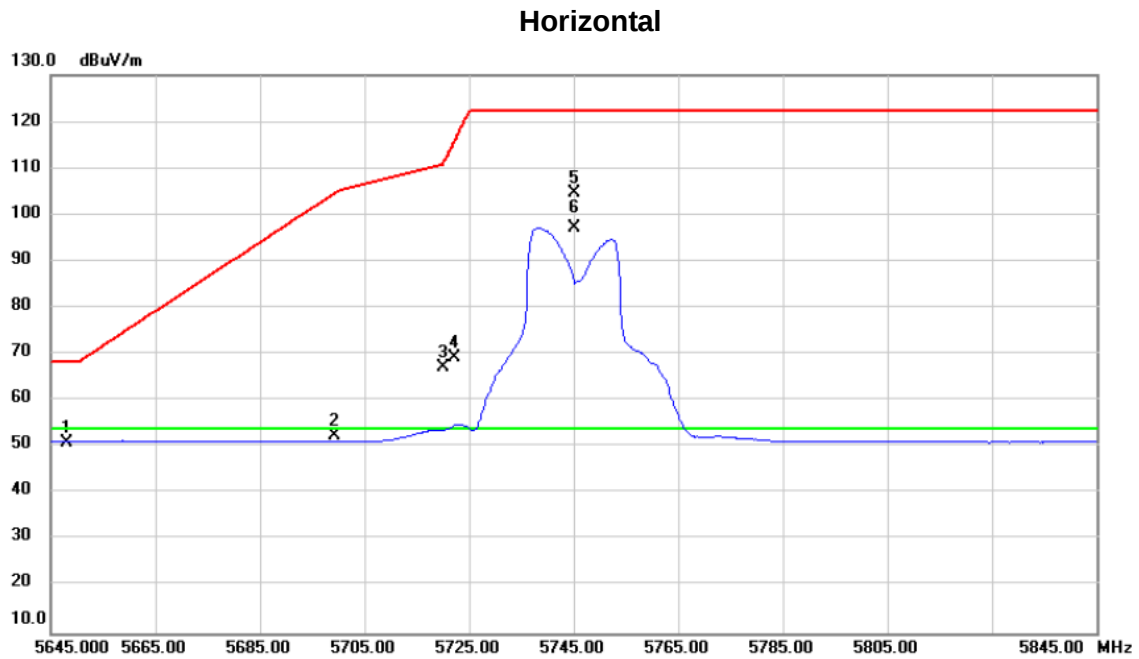

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5648.170	12.58	38.33	50.91	68.20	-17.29	peak	
2		5699.350	14.03	38.46	52.49	104.72	-52.23	peak	
3		5720.000	28.72	38.52	67.24	110.80	-43.56	peak	
4		5722.175	30.69	38.53	69.22	115.76	-46.54	peak	
5		5745.000	66.20	38.58	104.78	122.20	-17.42	peak	No Limit
6	*	5745.000	58.52	38.58	97.10	54.00	43.10	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz


Horizontal

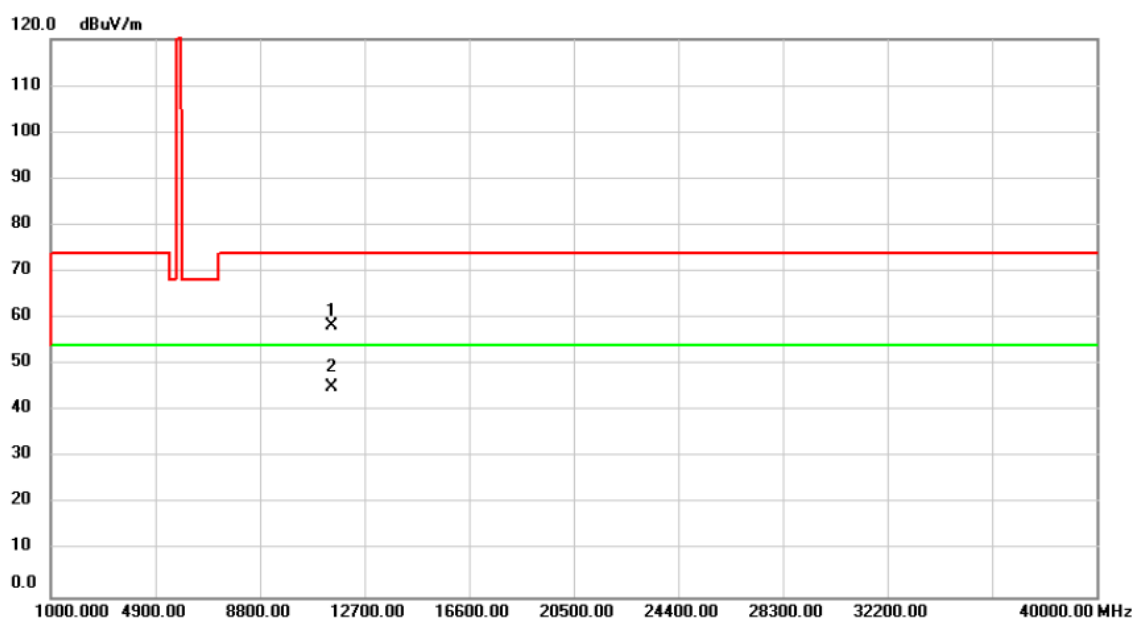

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	54.89	3.40	58.29	74.00	-15.71	peak	
2	*	11490.00	41.80	3.40	45.20	54.00	-8.80	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz


Vertical

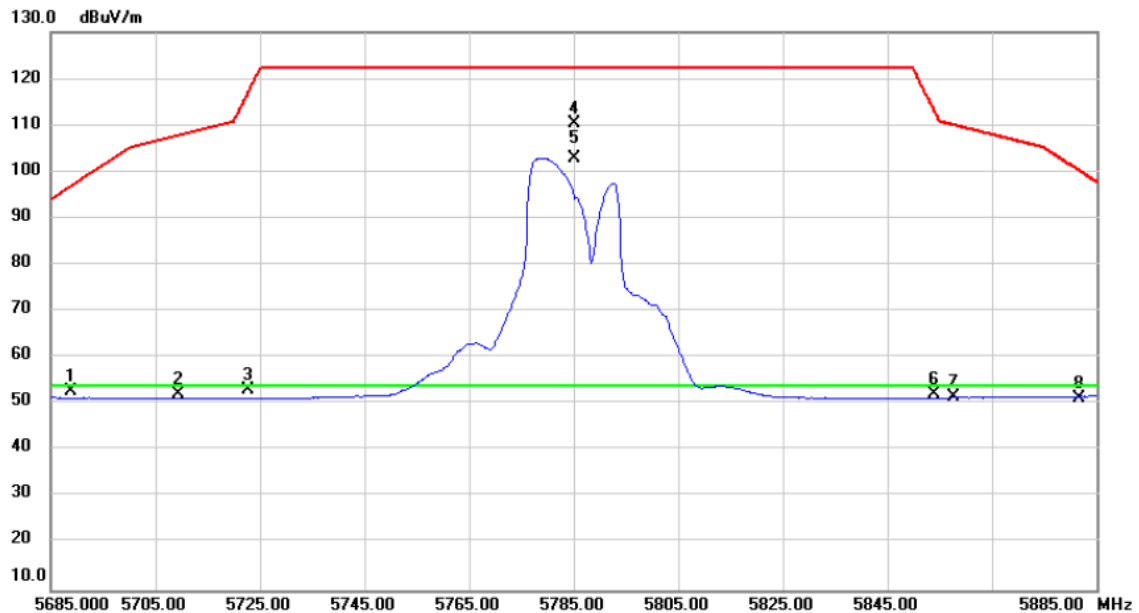

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5688.855	14.27	38.43	52.70	96.95	-44.25	peak	
2		5709.380	13.70	38.49	52.19	107.83	-55.64	peak	
3		5722.770	14.49	38.53	53.02	117.12	-64.10	peak	
4		5785.000	71.75	38.70	110.45	122.20	-11.75	peak	No Limit
5	*	5785.000	64.26	38.70	102.96	54.00	48.96	A/VG	No Limit
6		5854.020	13.33	38.89	52.22	113.03	-60.81	peak	
7		5857.600	12.72	38.89	51.61	110.07	-58.46	peak	
8		5881.750	12.40	38.96	51.36	100.20	-48.84	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz


Vertical

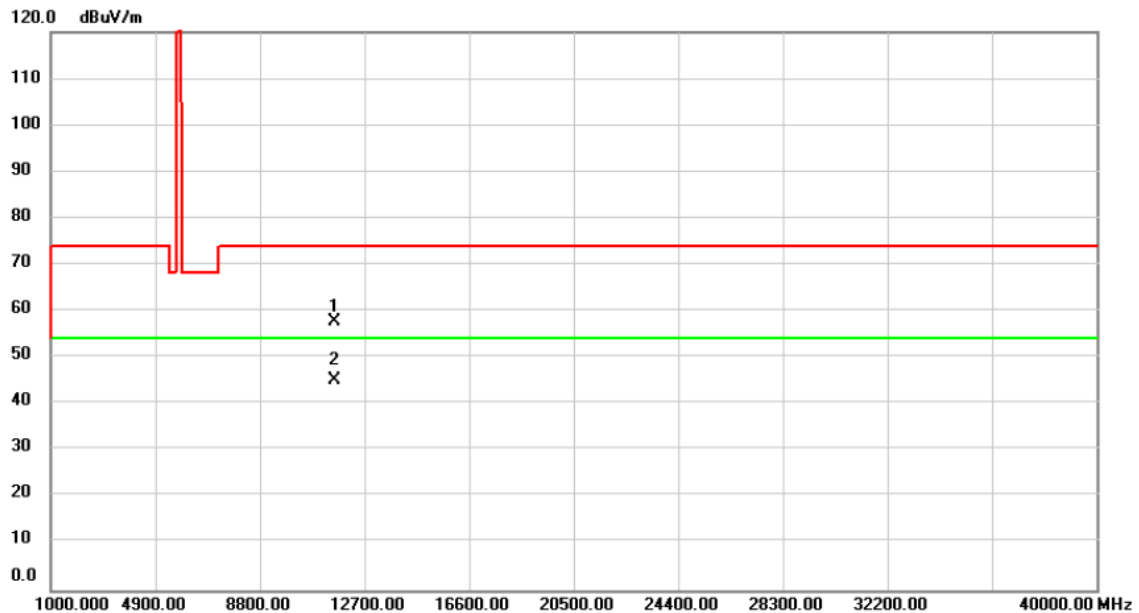

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.00	54.34	3.28	57.62	74.00	-16.38	peak	
2	*	11570.00	42.02	3.28	45.30	54.00	-8.70	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz


Horizontal

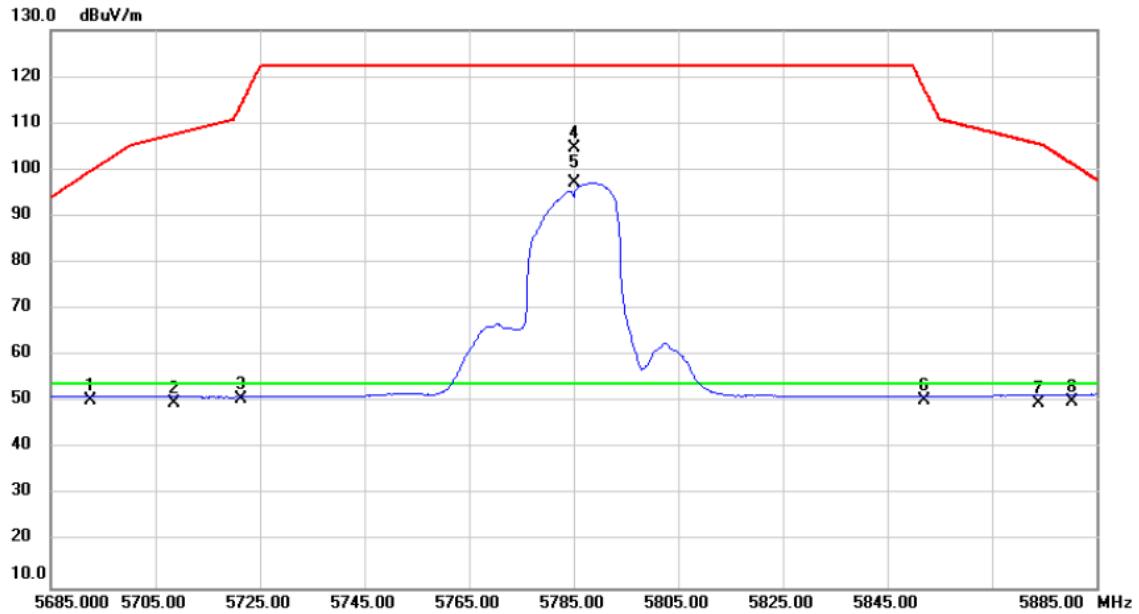

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5692.680	11.84	38.45	50.29	99.78	-49.49	peak	
2		5708.660	11.24	38.48	49.72	107.62	-57.90	peak	
3		5721.330	12.02	38.52	50.54	113.83	-63.29	peak	
4		5785.000	65.82	38.70	104.52	122.20	-17.68	peak	No Limit
5	*	5785.000	58.37	38.70	97.07	54.00	43.07	A/VG	No Limit
6		5852.095	11.49	38.87	50.36	117.42	-67.06	peak	
7		5873.880	10.89	38.94	49.83	105.51	-55.68	peak	
8		5880.290	10.98	38.96	49.94	101.29	-51.35	peak	


Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz

Horizontal

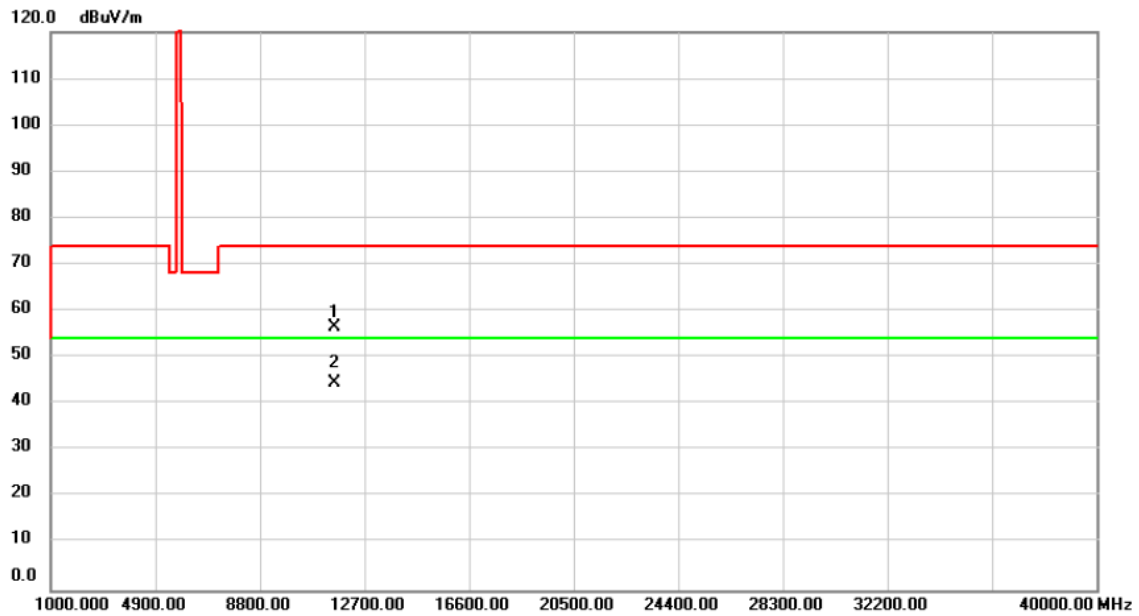

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.00	53.31	3.28	56.59	74.00	-17.41	peak	
2	*	11570.00	41.22	3.28	44.50	54.00	-9.50	AVG	


Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz

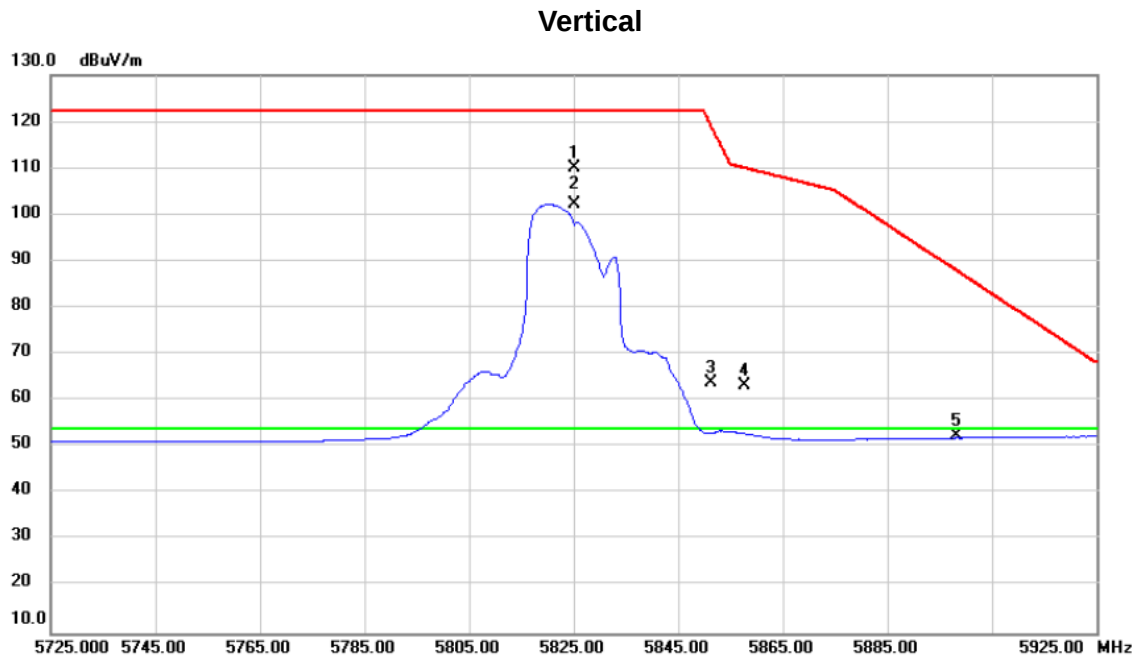

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5825.000	71.31	38.80	110.11	122.20	-12.09	peak	No Limit
2	*	5825.000	63.43	38.80	102.23	54.00	48.23	AVG	No Limit
3		5851.175	25.07	38.87	63.94	119.52	-55.58	peak	
4		5857.740	24.22	38.89	63.11	110.03	-46.92	peak	
5		5898.250	13.30	39.01	52.31	88.00	-35.69	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz


Vertical

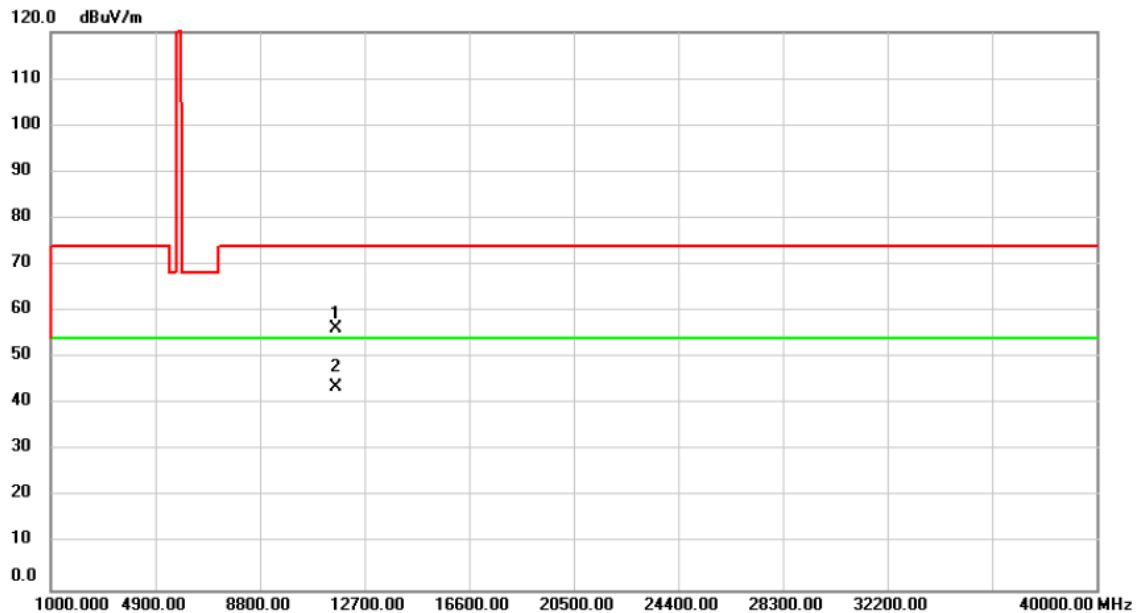

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	53.02	3.13	56.15	74.00	-17.85	peak	
2	*	11650.00	40.64	3.13	43.77	54.00	-10.23	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz


Horizontal

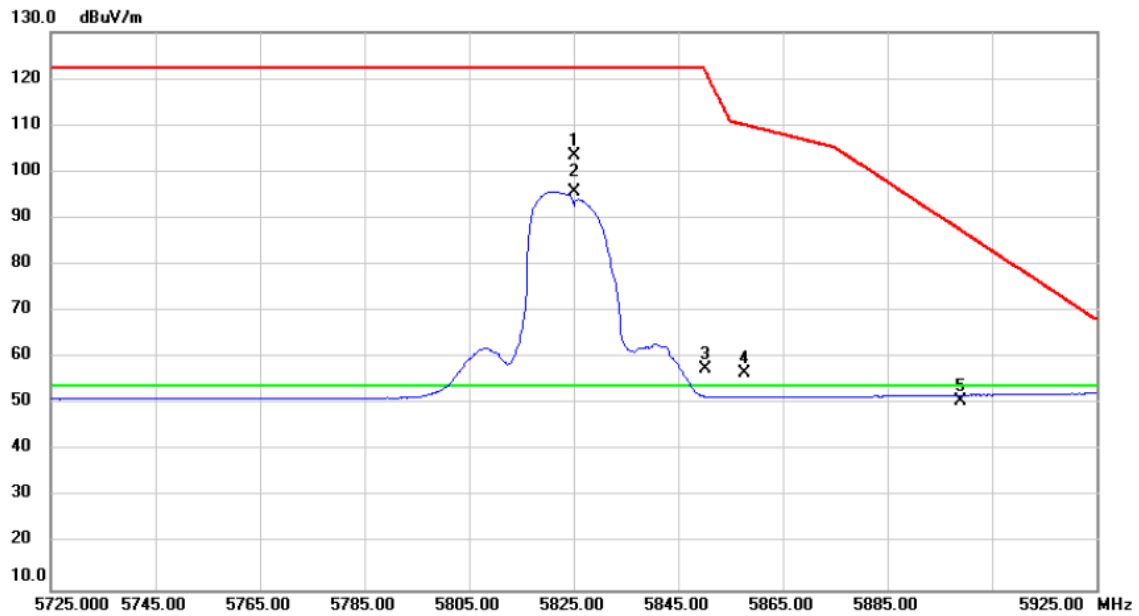

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5825.000	64.51	38.80	103.31	122.20	-18.89	peak	No Limit
2	*	5825.000	56.94	38.80	95.74	54.00	41.74	AVG	No Limit
3		5850.145	18.62	38.87	57.49	121.87	-64.38	peak	
4		5857.760	17.82	38.89	56.71	110.03	-53.32	peak	
5		5899.000	11.54	39.01	50.55	87.44	-36.89	peak	


Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz

Horizontal

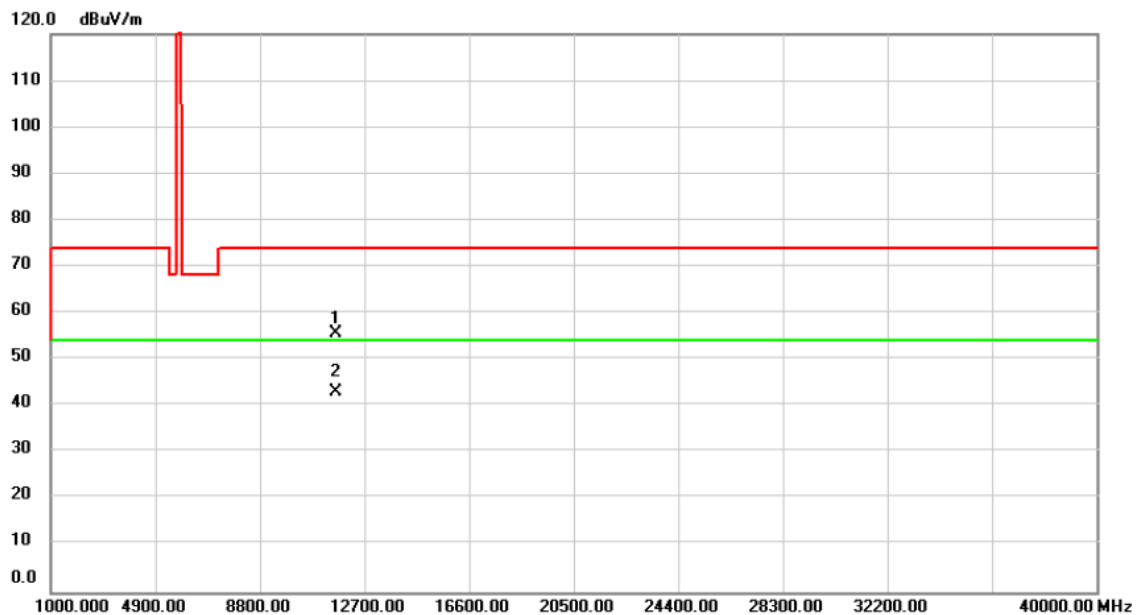

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	52.52	3.13	55.65	74.00	-18.35	peak	
2	*	11650.00	40.03	3.13	43.16	54.00	-10.84	AVG	


Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

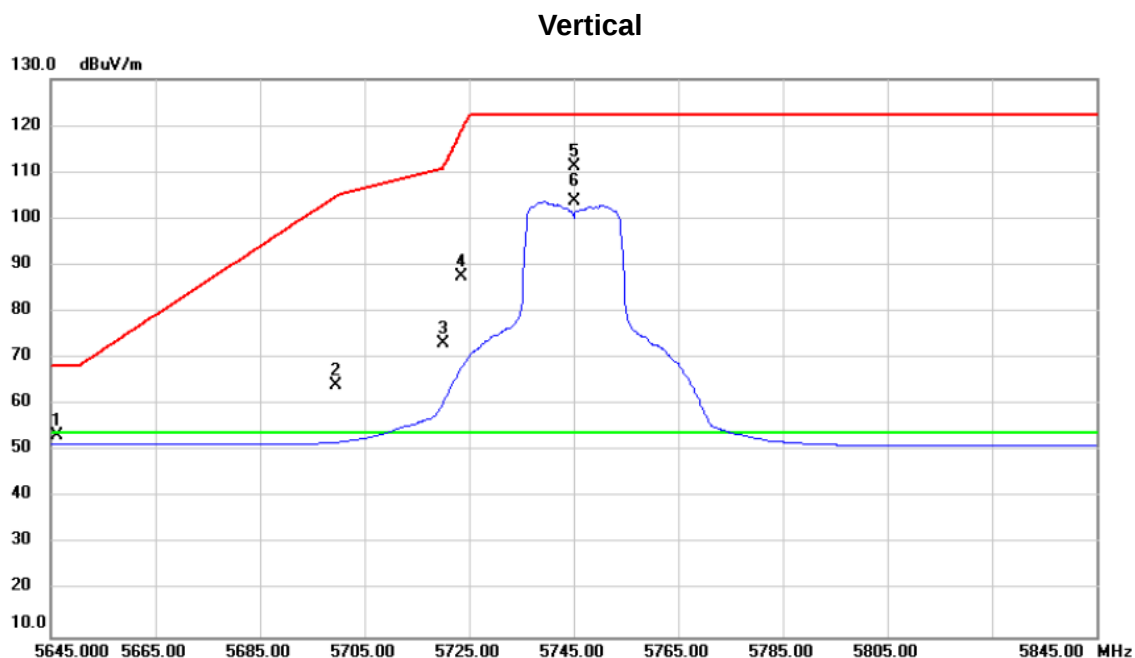

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5646.320	14.96	38.31	53.27	68.20	-14.93	peak	
2		5699.550	25.57	38.46	64.03	104.87	-40.84	peak	
3		5719.980	34.63	38.52	73.15	110.79	-37.64	peak	
4		5723.640	48.91	38.53	87.44	119.10	-31.66	peak	
5		5745.000	72.65	38.58	111.23	122.20	-10.97	peak	No Limit
6	*	5745.000	65.04	38.58	103.62	54.00	49.62	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz


Vertical

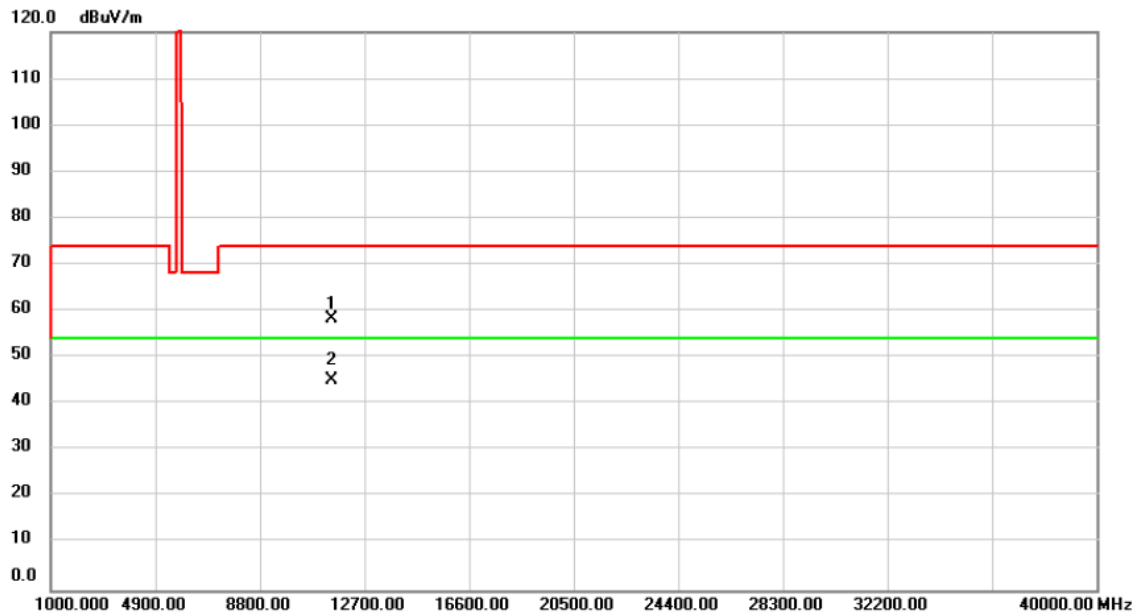

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	54.99	3.40	58.39	74.00	-15.61	peak	
2	*	11490.00	41.73	3.40	45.13	54.00	-8.87	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz


Horizontal

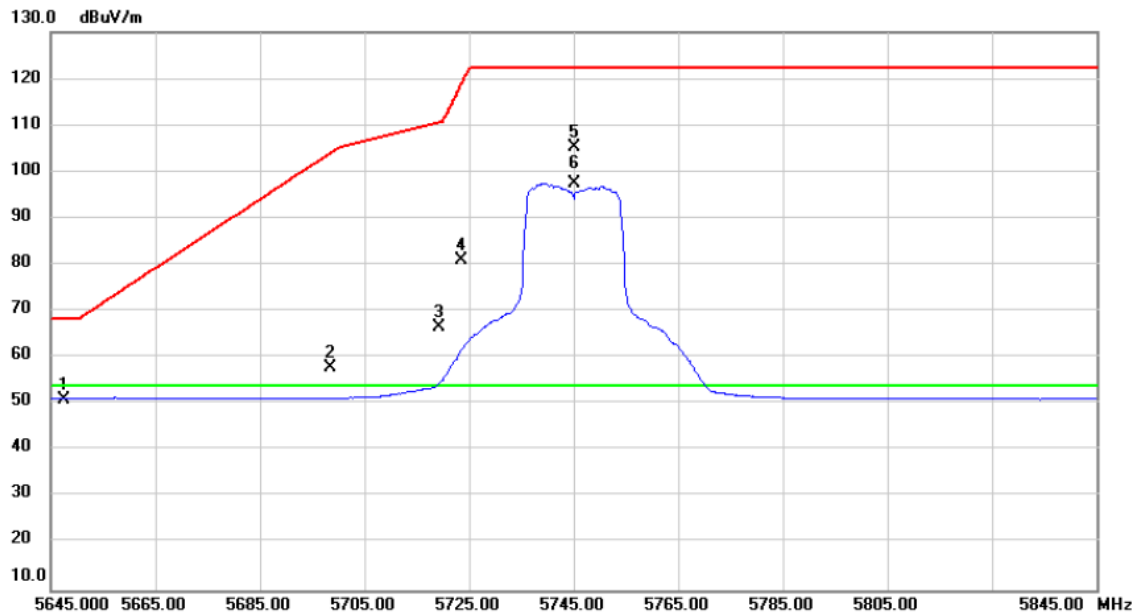

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5647.505	12.69	38.33	51.02	68.20	-17.18	peak	
2		5698.450	19.33	38.46	57.79	104.05	-46.26	peak	
3		5719.360	27.99	38.52	66.51	110.62	-44.11	peak	
4		5723.550	42.47	38.53	81.00	118.89	-37.89	peak	
5		5745.000	66.76	38.58	105.34	122.20	-16.86	peak	No Limit
6	*	5745.000	58.87	38.58	97.45	54.00	43.45	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz


Horizontal

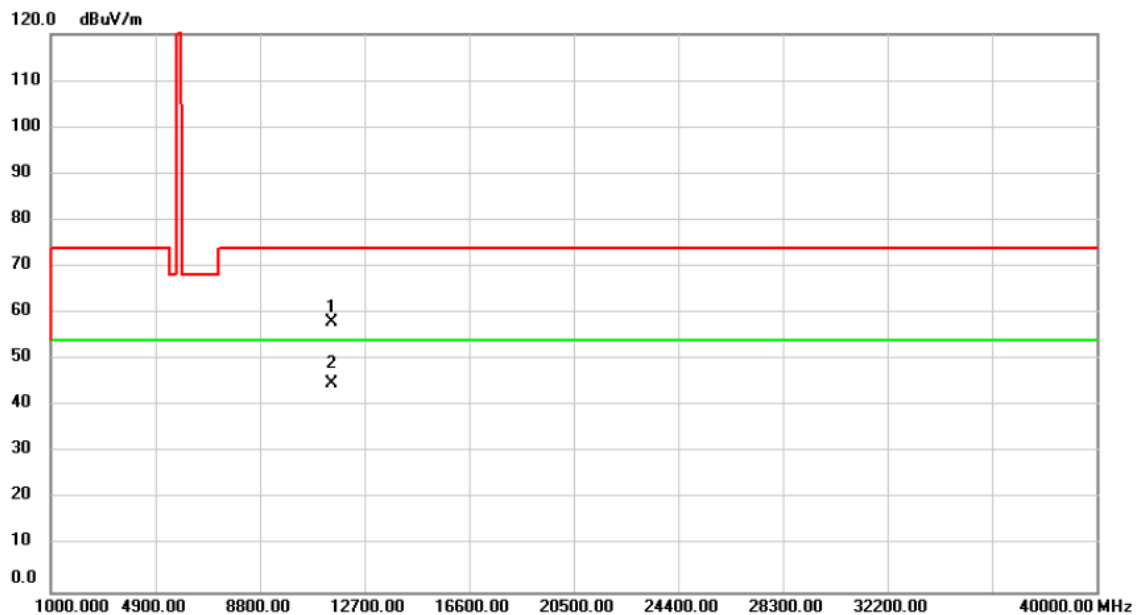

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	54.56	3.40	57.96	74.00	-16.04	peak	
2	*	11490.00	41.42	3.40	44.82	54.00	-9.18	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz


Vertical

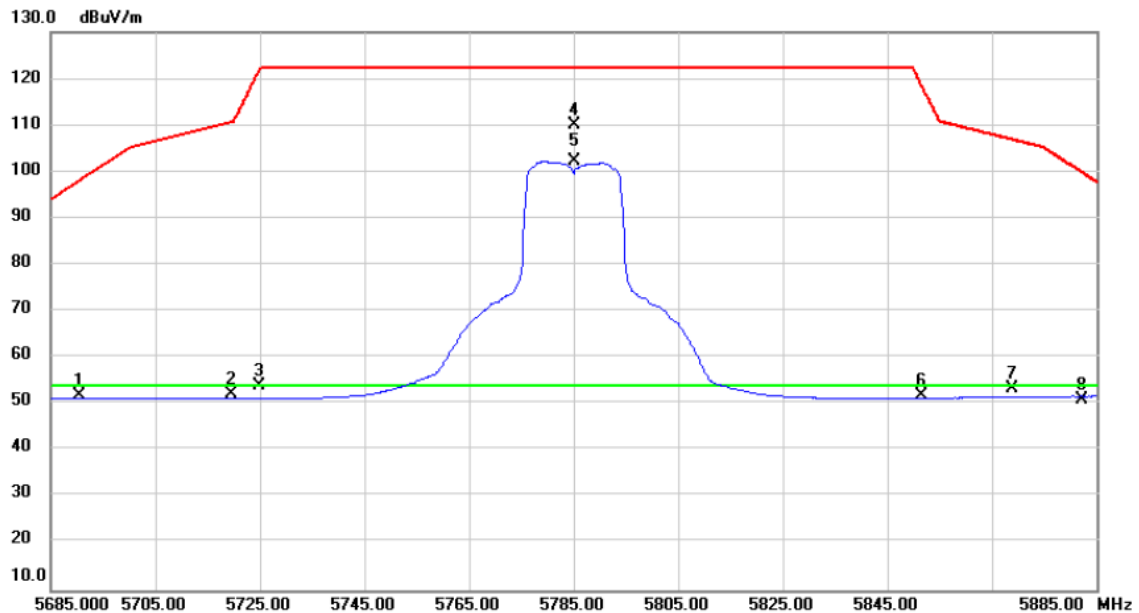

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5690.505	13.42	38.43	51.85	98.17	-46.32	peak	
2		5719.500	13.78	38.52	52.30	110.66	-58.36	peak	
3		5724.815	15.55	38.53	54.08	121.78	-67.70	peak	
4		5785.000	71.45	38.70	110.15	122.20	-12.05	peak	No Limit
5	*	5785.000	63.66	38.70	102.36	54.00	48.36	A/V/G	No Limit
6		5851.555	13.06	38.87	51.93	118.65	-66.72	peak	
7		5868.780	14.33	38.92	53.25	106.94	-53.69	peak	
8		5882.170	11.99	38.96	50.95	99.89	-48.94	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz


Vertical

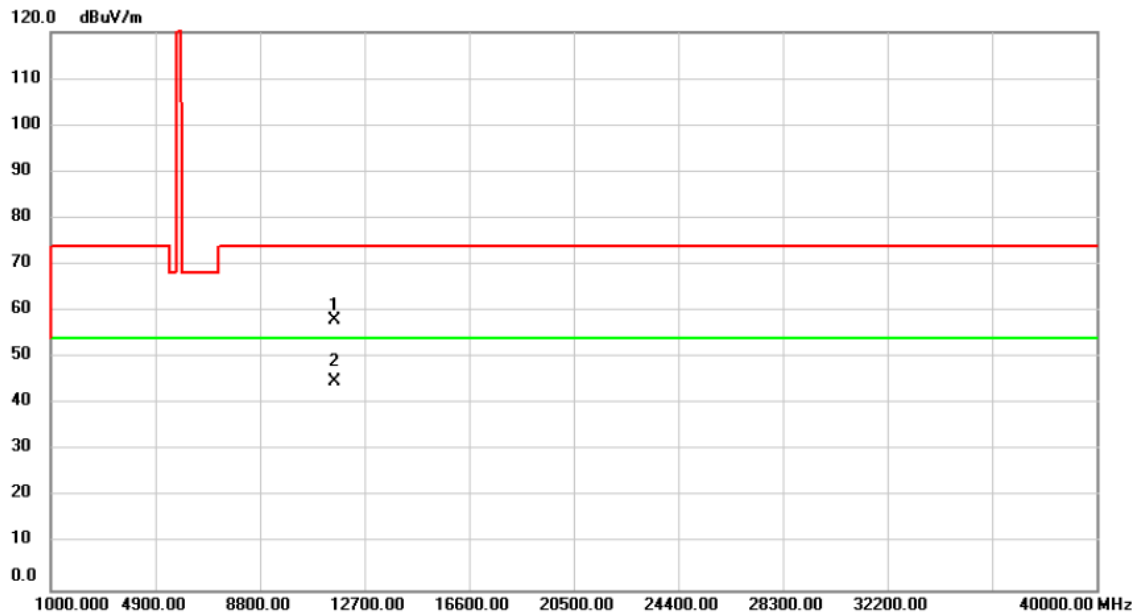

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.00	54.89	3.28	58.17	74.00	-15.83	peak	
2	*	11570.00	41.71	3.28	44.99	54.00	-9.01	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz


Horizontal

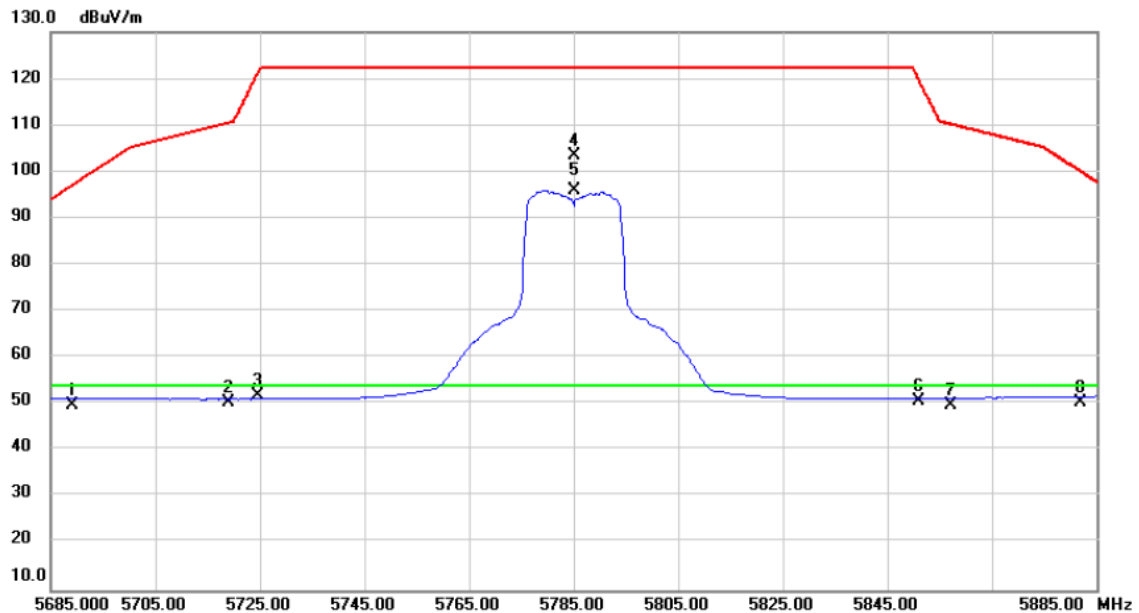

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5689.245	11.42	38.43	49.85	97.24	-47.39	peak	
2		5718.940	11.69	38.52	50.21	110.50	-60.29	peak	
3		5724.470	13.41	38.53	51.94	120.99	-69.05	peak	
4		5785.000	64.79	38.70	103.49	122.20	-18.71	peak	No Limit
5	*	5785.000	57.26	38.70	95.96	54.00	41.96	A/VG	No Limit
6		5851.065	11.83	38.87	50.70	119.77	-69.07	peak	
7		5857.120	10.91	38.89	49.80	110.21	-60.41	peak	
8		5881.810	11.32	38.96	50.28	100.16	-49.88	peak	


Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz

Horizontal

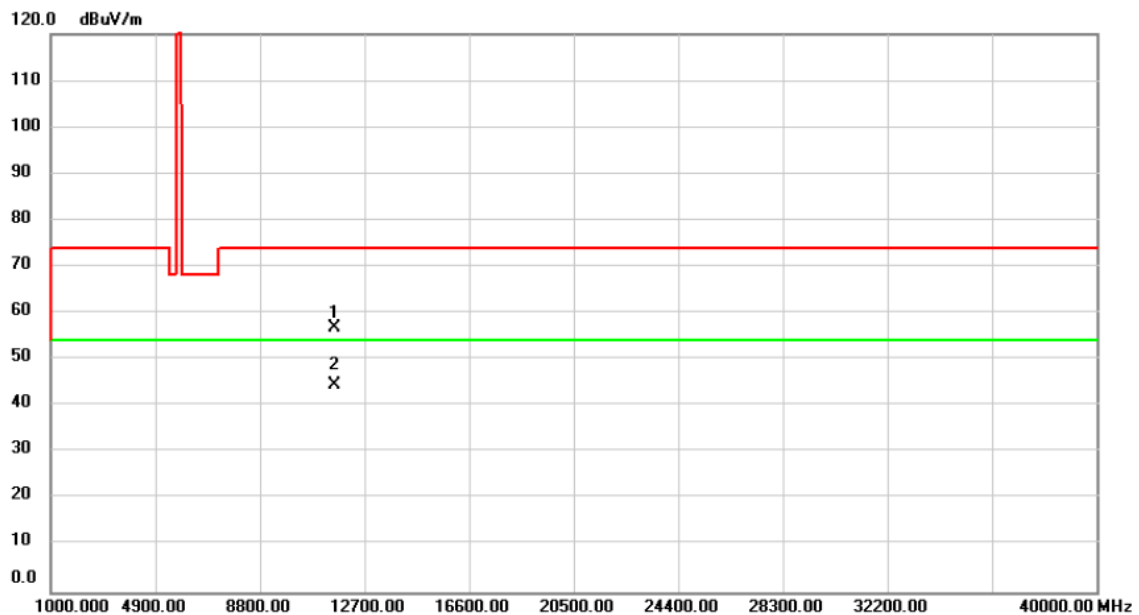

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.00	53.50	3.28	56.78	74.00	-17.22	peak	
2	*	11570.00	41.22	3.28	44.50	54.00	-9.50	AVG	


Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz

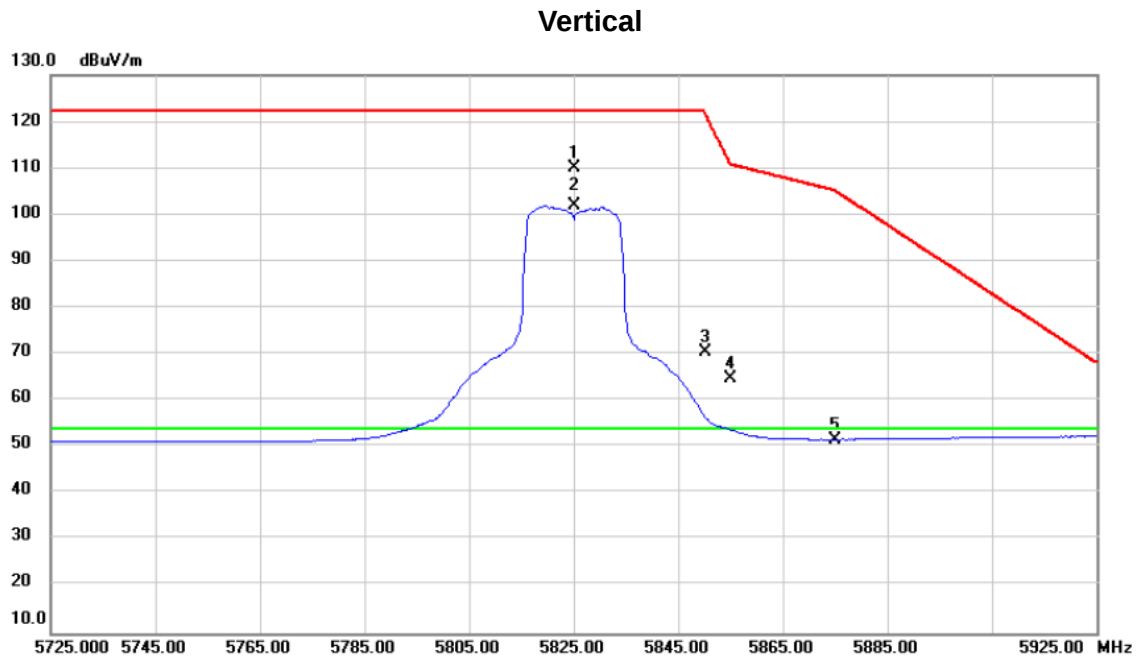

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5825.000	71.33	38.80	110.13	122.20	-12.07	peak	No Limit
2	*	5825.000	63.09	38.80	101.89	54.00	47.89	AVG	No Limit
3		5850.100	31.52	38.87	70.39	121.97	-51.58	peak	
4		5855.080	25.94	38.89	64.83	110.78	-45.95	peak	
5		5875.050	12.47	38.94	51.41	105.16	-53.75	peak	


Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz

Vertical

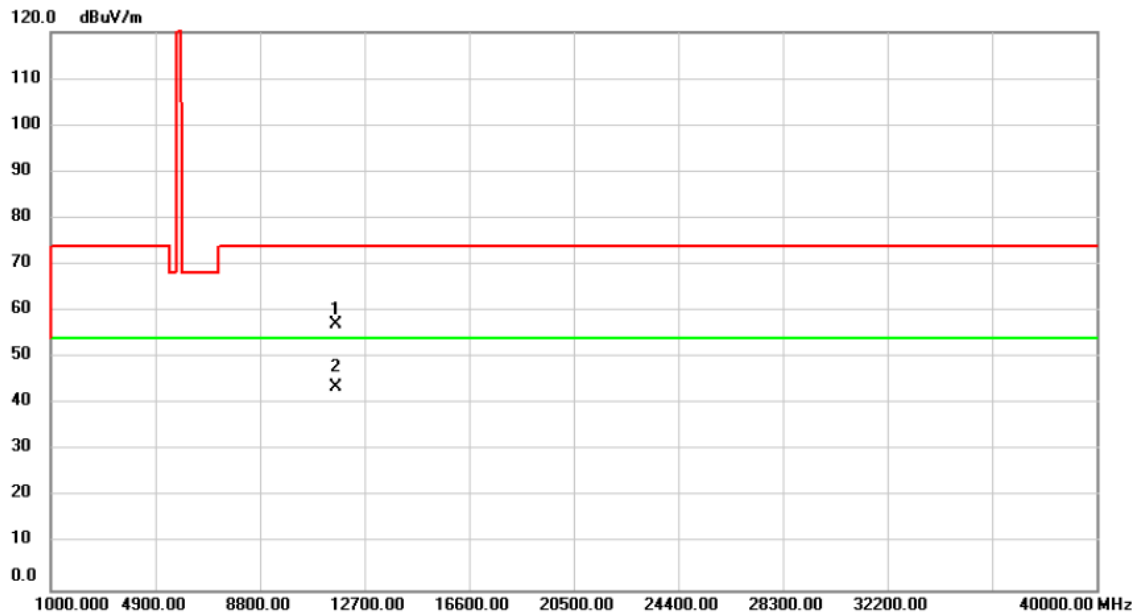

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	53.88	3.13	57.01	74.00	-16.99	peak	
2	*	11650.00	40.64	3.13	43.77	54.00	-10.23	AVG	


Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz

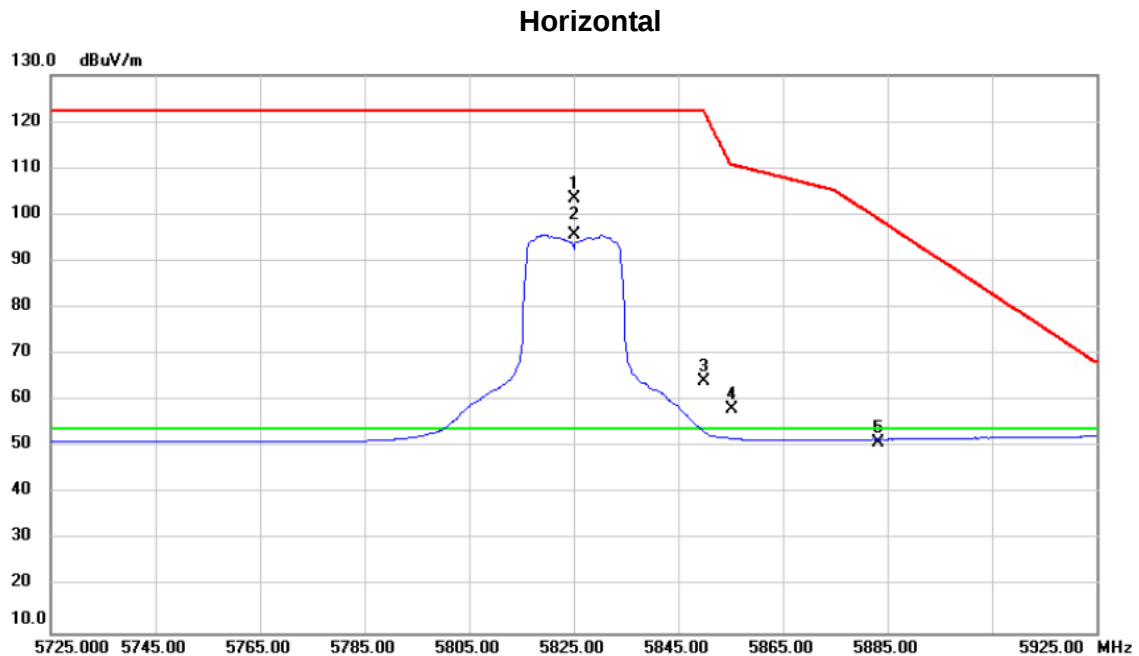

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5825.000	64.64	38.80	103.44	122.20	-18.76	peak	No Limit
2	*	5825.000	56.90	38.80	95.70	54.00	41.70	AVG	No Limit
3		5850.055	25.33	38.87	64.20	122.07	-57.87	peak	
4		5855.140	19.31	38.89	58.20	110.76	-52.56	peak	
5		5883.250	12.05	38.96	51.01	99.09	-48.08	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz


Horizontal

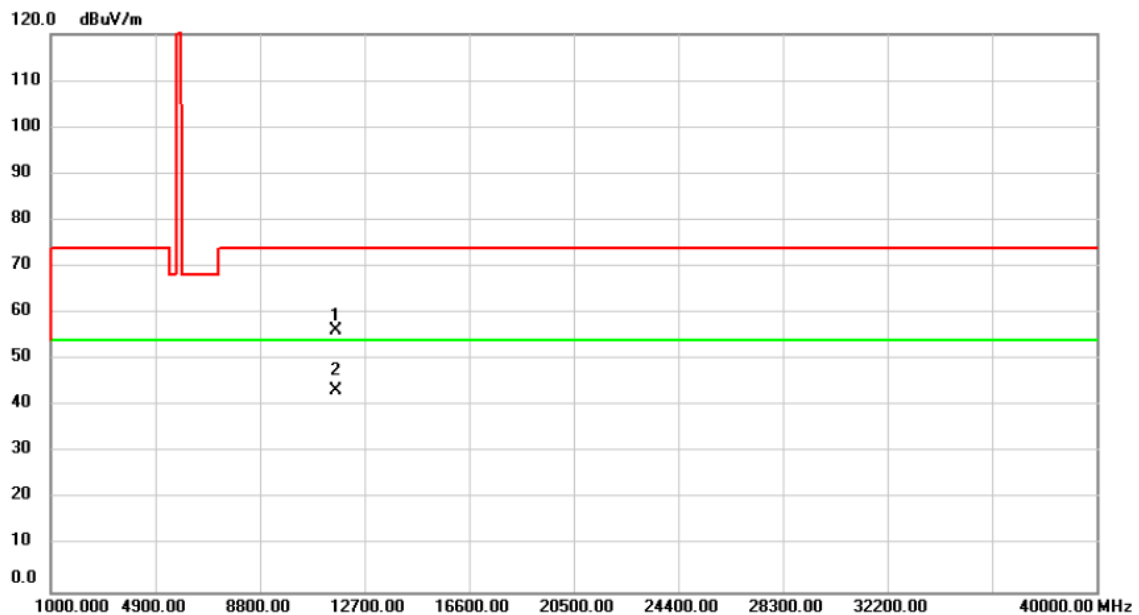

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	53.10	3.13	56.23	74.00	-17.77	peak	
2	*	11650.00	40.16	3.13	43.29	54.00	-10.71	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Vertical

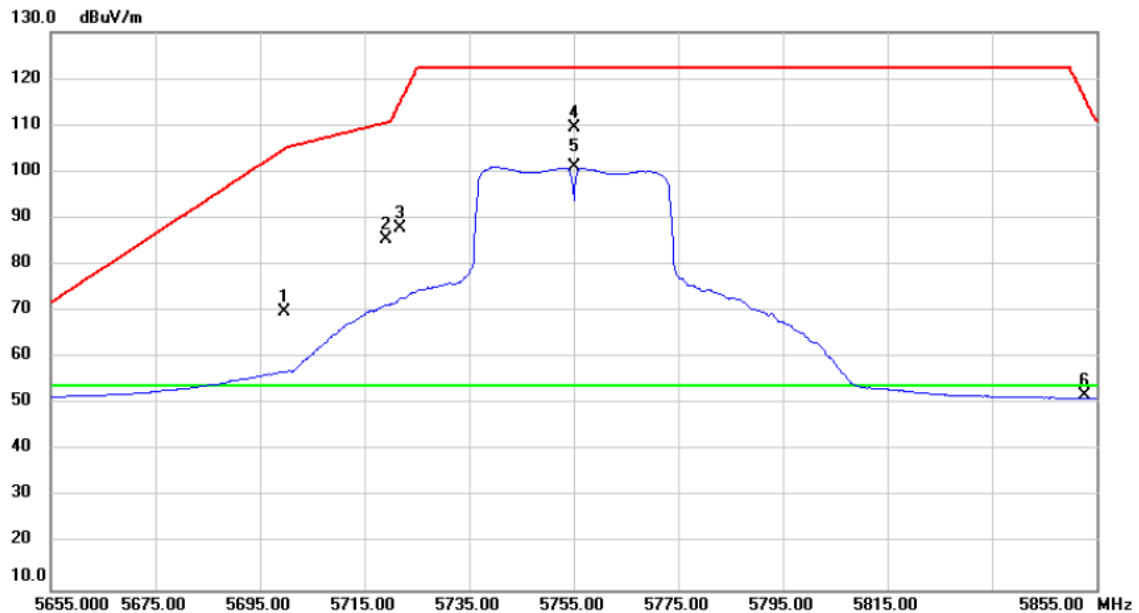

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5699.685	31.49	38.46	69.95	104.97	-35.02	peak	
2		5719.040	46.98	38.52	85.50	110.53	-25.03	peak	
3		5721.760	49.24	38.52	87.76	114.81	-27.05	peak	
4		5755.000	70.77	38.62	109.39	122.20	-12.81	peak	No Limit
5	*	5755.000	62.34	38.62	100.96	54.00	46.96	A/VG	No Limit
6		5852.650	13.00	38.87	51.87	116.16	-64.29	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Vertical

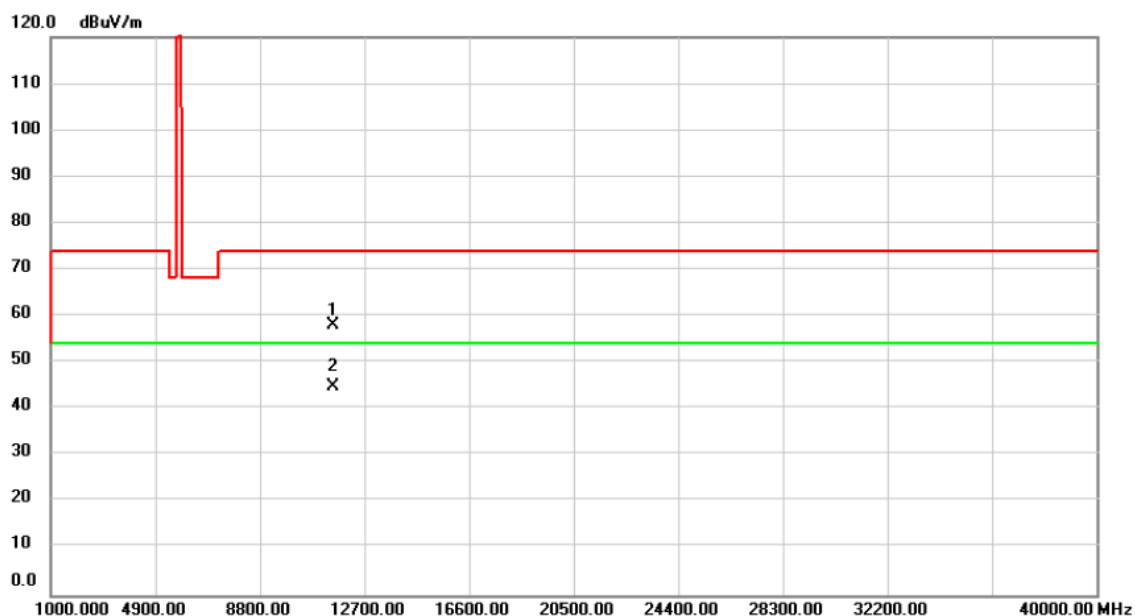

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11510.00	54.55	3.40	57.95	74.00	-16.05	peak	
2	*	11510.00	41.50	3.40	44.90	54.00	-9.10	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Horizontal

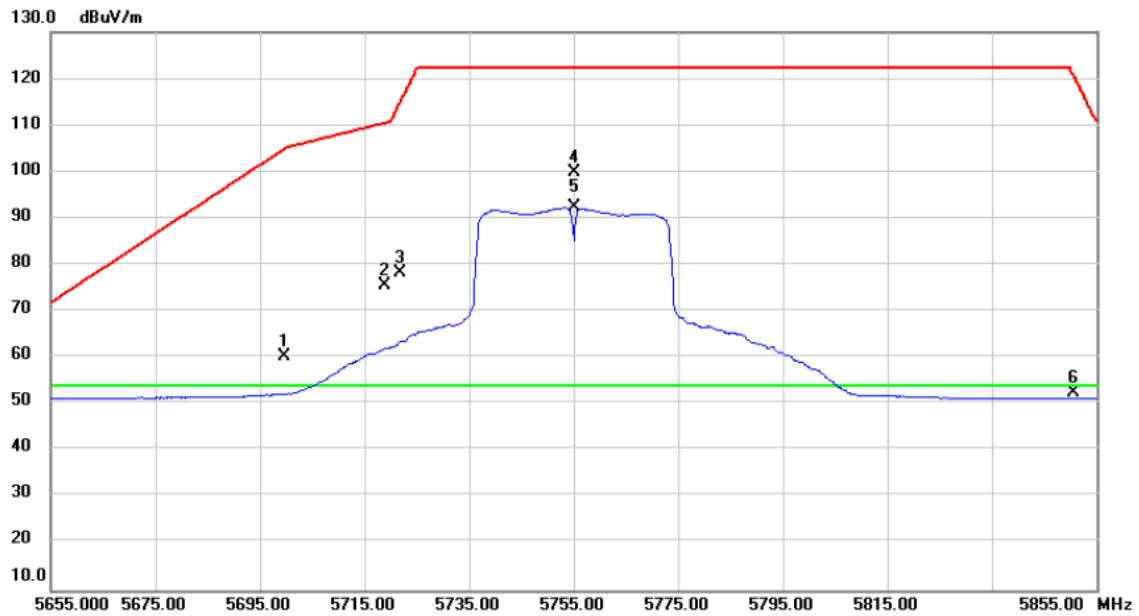

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5699.550	21.76	38.46	60.22	104.87	-44.65	peak	
2		5718.900	36.89	38.52	75.41	110.49	-35.08	peak	
3		5721.720	39.67	38.52	78.19	114.72	-36.53	peak	
4		5755.000	61.25	38.62	99.87	122.20	-22.33	peak	No Limit
5	*	5755.000	53.63	38.62	92.25	54.00	38.25	A/VG	No Limit
6		5850.645	13.62	38.87	52.49	120.73	-68.24	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Horizontal

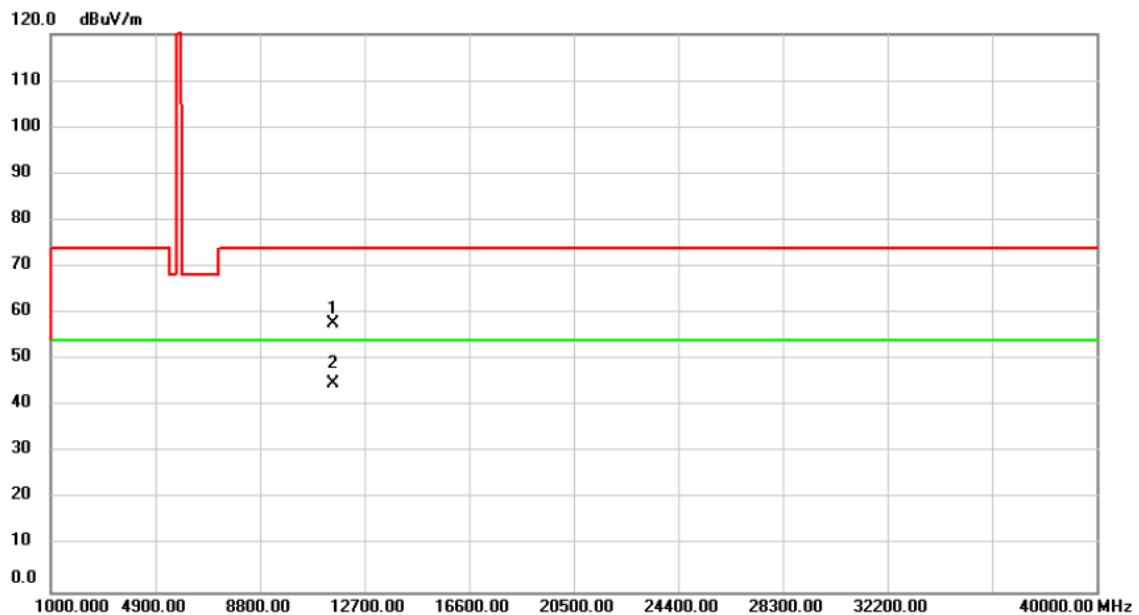

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11510.00	54.29	3.40	57.69	74.00	-16.31	peak	
2	*	11510.00	41.42	3.40	44.82	54.00	-9.18	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Vertical

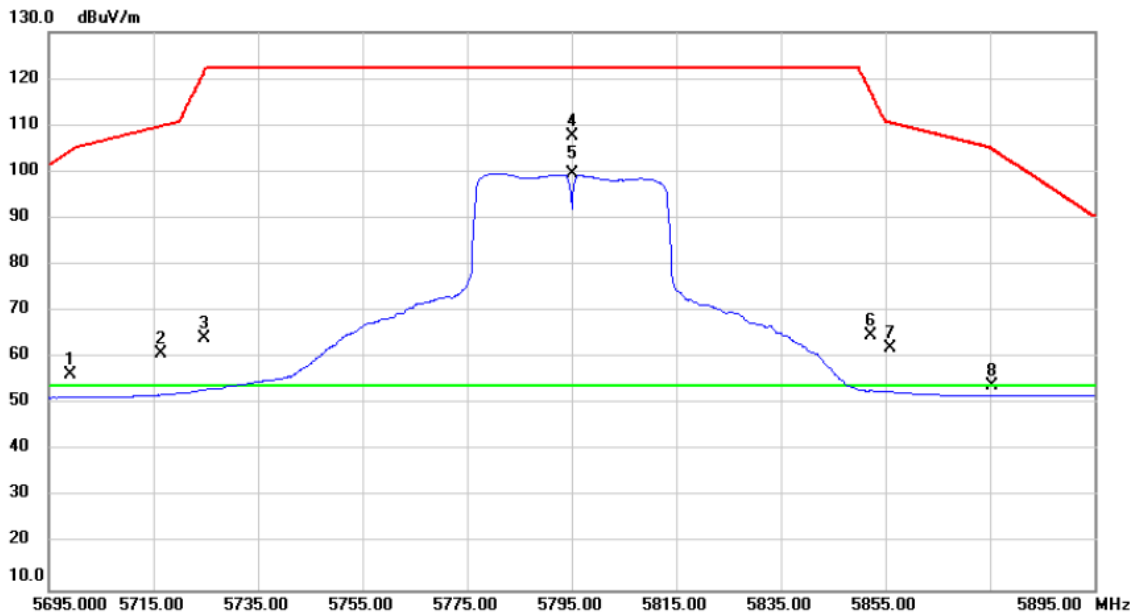

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5699.225	17.86	38.46	56.32	104.63	-48.31	peak	
2		5716.340	22.45	38.51	60.96	109.78	-48.82	peak	
3		5724.770	25.77	38.53	64.30	121.68	-57.38	peak	
4		5795.000	68.89	38.72	107.61	122.20	-14.59	peak	No Limit
5	*	5795.000	60.96	38.72	99.68	54.00	45.68	AVG	No Limit
6		5852.330	25.74	38.87	64.61	116.89	-52.28	peak	
7		5856.000	23.19	38.89	62.08	110.52	-48.44	peak	
8		5875.420	15.07	38.94	54.01	104.89	-50.88	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Vertical

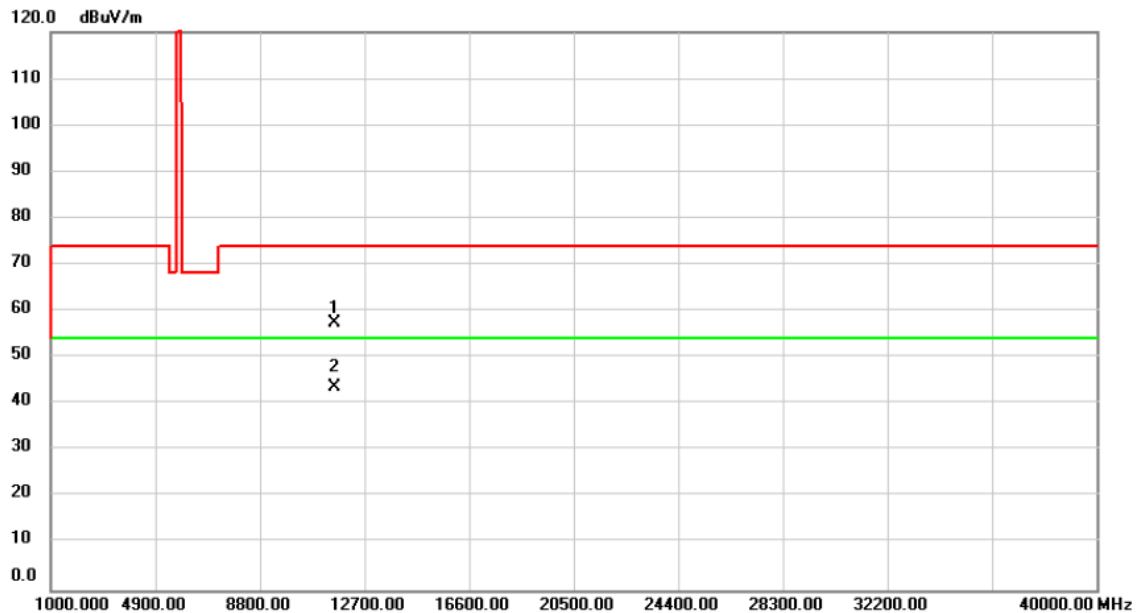

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.00	54.10	3.25	57.35	74.00	-16.65	peak	
2	*	11590.00	40.29	3.25	43.54	54.00	-10.46	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Horizontal

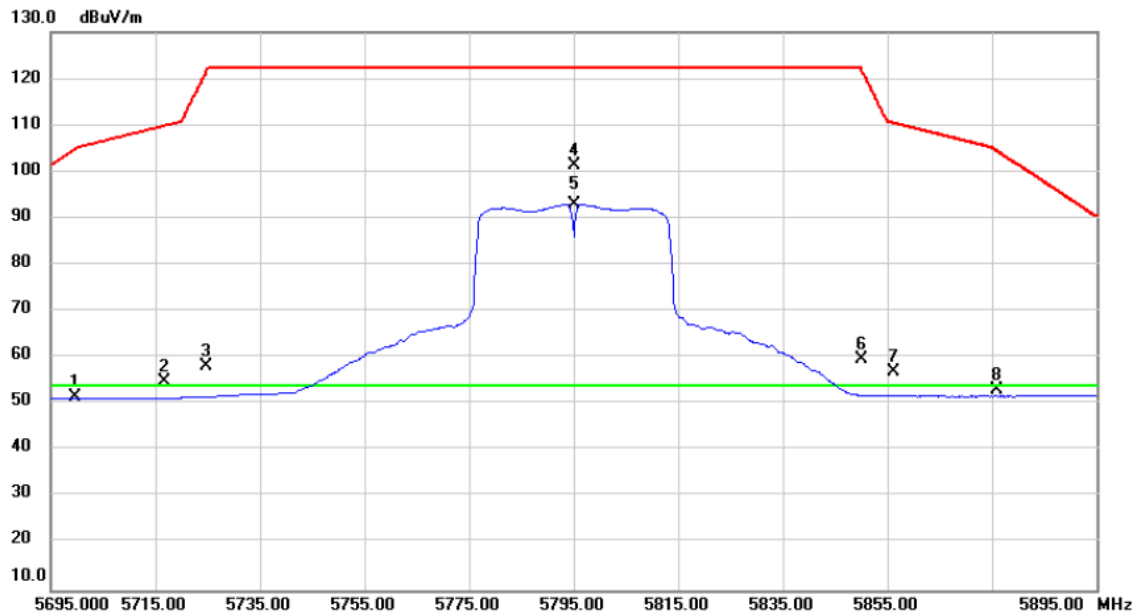

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5699.730	13.08	38.46	51.54	105.00	-53.46	peak	
2		5716.740	16.30	38.51	54.81	109.89	-55.08	peak	
3		5724.710	19.54	38.53	58.07	121.54	-63.47	peak	
4		5795.000	62.75	38.72	101.47	122.20	-20.73	peak	No Limit
5	*	5795.000	54.27	38.72	92.99	54.00	38.99	A/VG	No Limit
6		5850.080	20.66	38.87	59.53	122.02	-62.49	peak	
7		5856.140	18.00	38.89	56.89	110.48	-53.59	peak	
8		5876.060	14.25	38.94	53.19	104.42	-51.23	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Horizontal

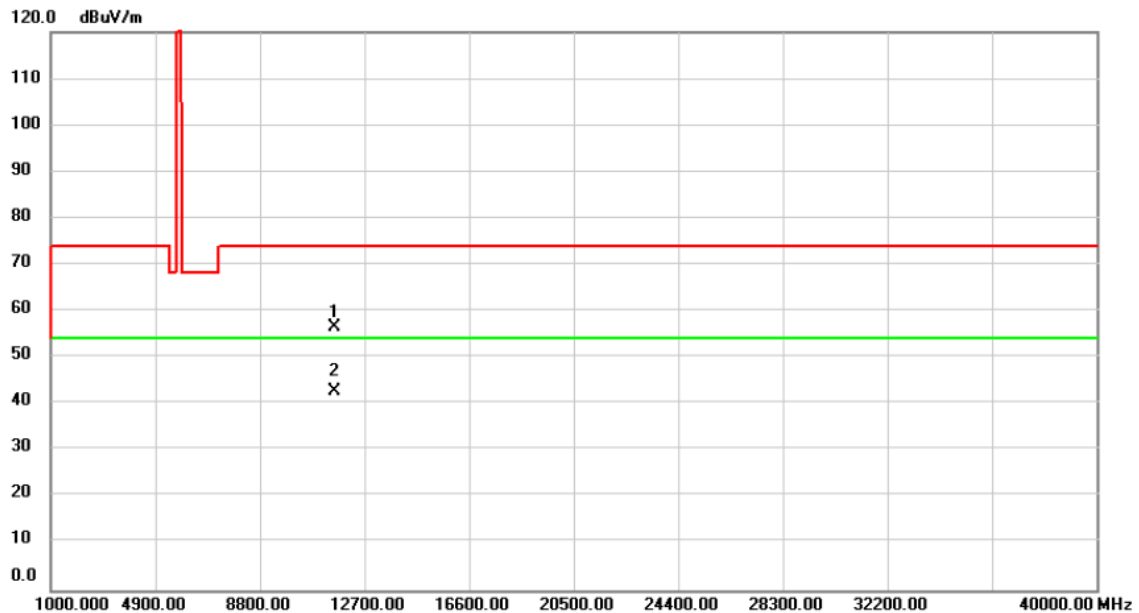

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.00	53.22	3.25	56.47	74.00	-17.53	peak	
2	*	11590.00	39.63	3.25	42.88	54.00	-11.12	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


Vertical

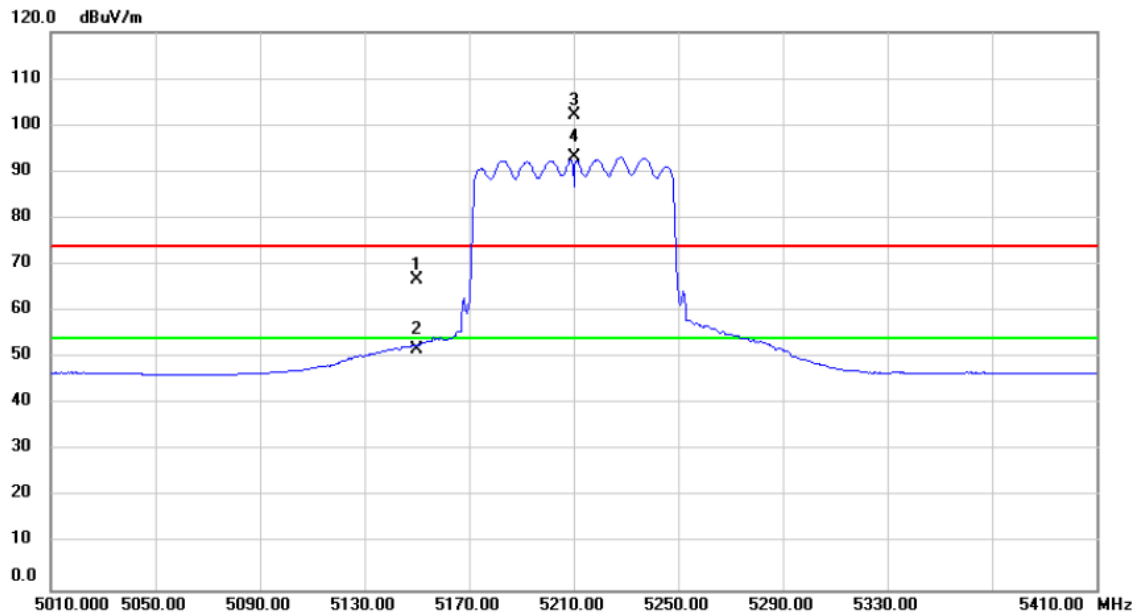

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	29.21	37.54	66.75	74.00	-7.25	peak	
2		5150.000	14.29	37.54	51.83	54.00	-2.17	AVG	
3	X	5210.000	64.45	37.61	102.06	74.00	28.06	peak	No Limit
4	*	5210.000	55.51	37.61	93.12	54.00	39.12	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


Vertical

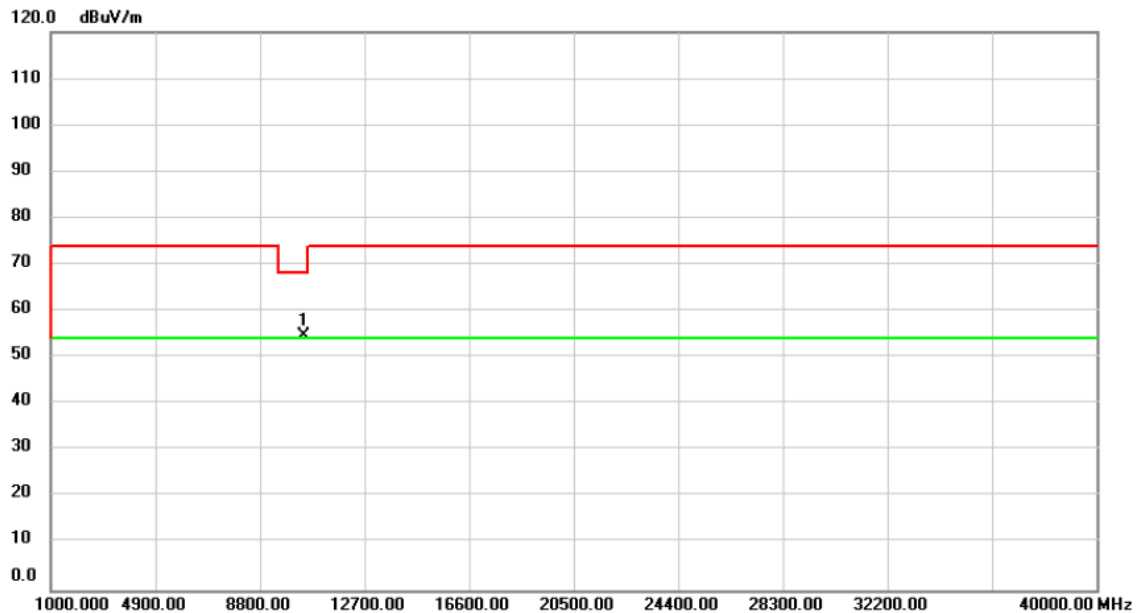

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10420.00	52.80	1.95	54.75	68.20	-13.45	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


Horizontal

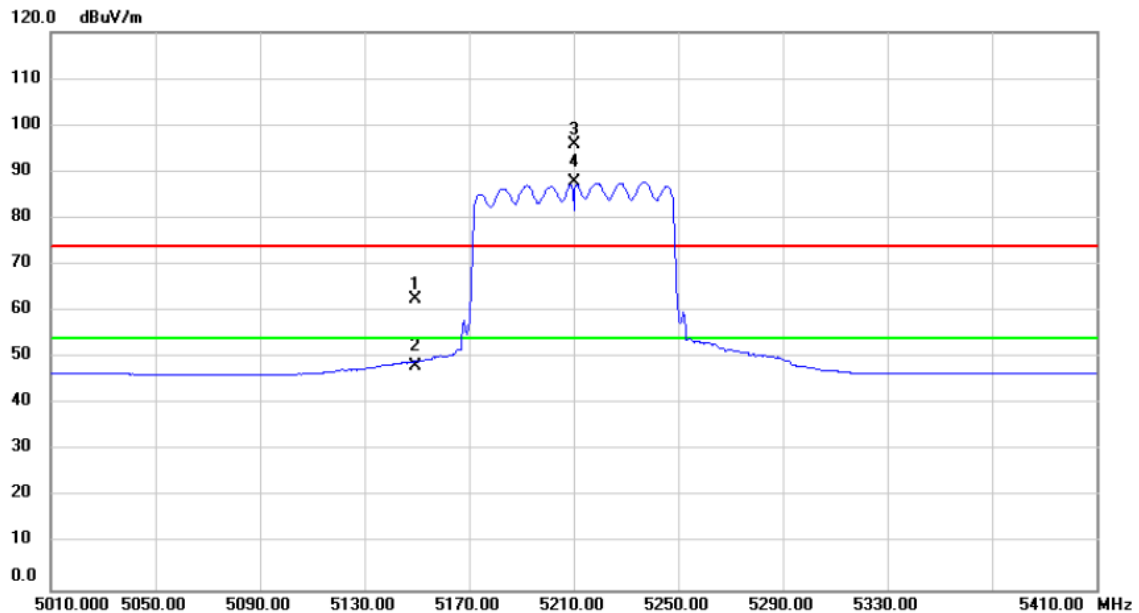

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5149.300	24.88	37.54	62.42	74.00	-11.58	peak	
2		5149.300	10.73	37.54	48.27	54.00	-5.73	AVG	
3	X	5210.000	58.35	37.61	95.96	74.00	21.96	peak	No Limit
4	*	5210.000	50.05	37.61	87.66	54.00	33.66	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


Horizontal

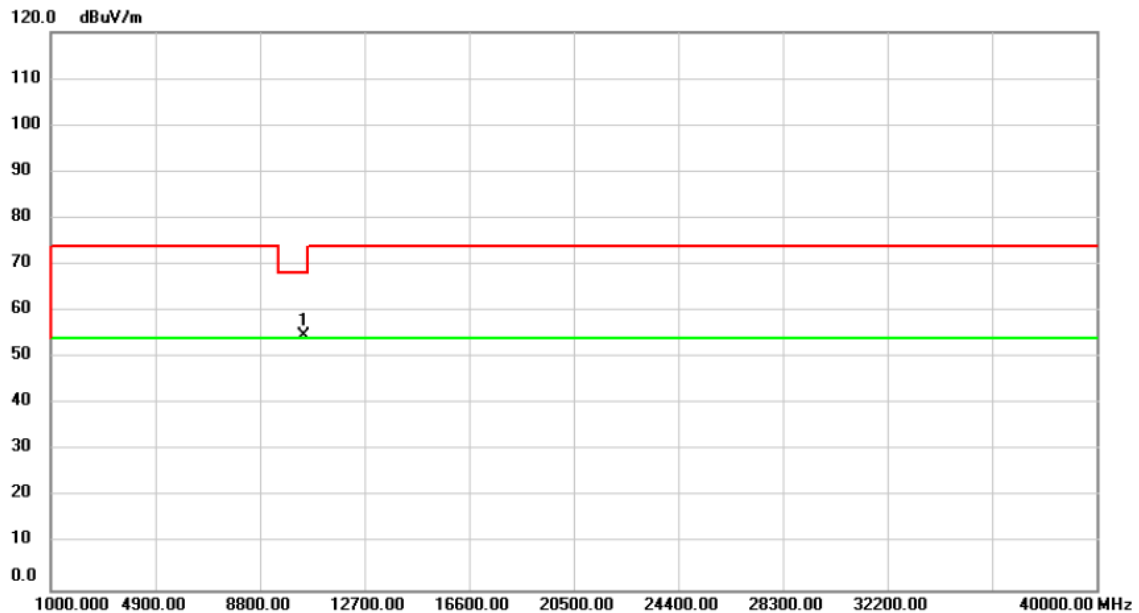

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10420.00	52.82	1.95	54.77	68.20	-13.43	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Vertical

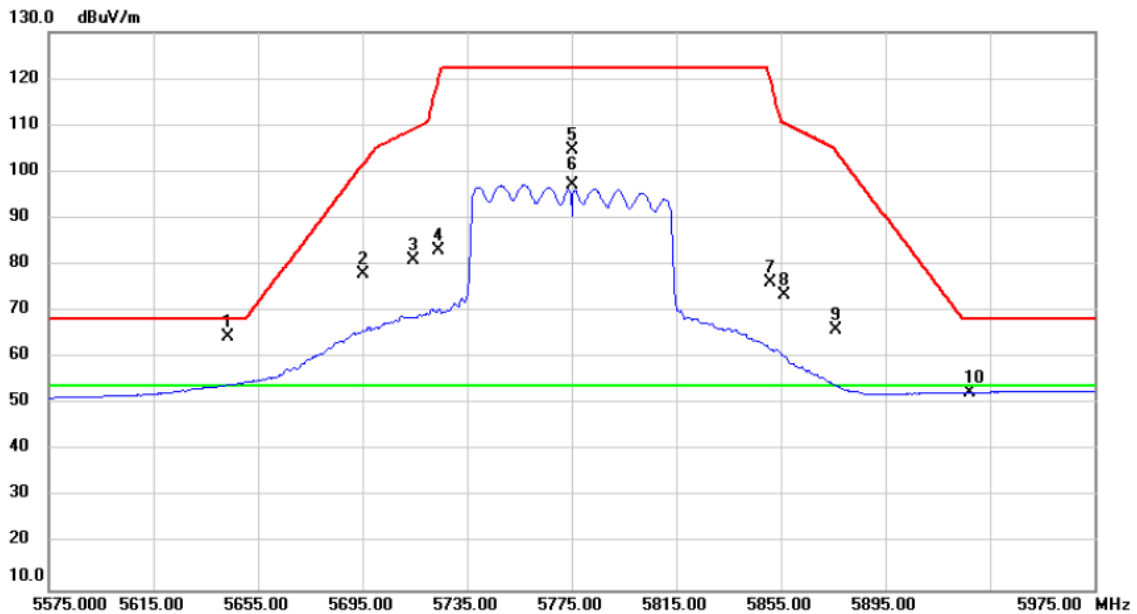

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5643.400	26.13	38.31	64.44	68.20	-3.76	peak	
2		5695.400	39.65	38.45	78.10	101.80	-23.70	peak	
3		5714.560	42.56	38.50	81.06	109.28	-28.22	peak	
4		5723.985	44.43	38.53	82.96	119.89	-36.93	peak	
5		5775.000	66.01	38.67	104.68	122.20	-17.52	peak	No Limit
6	*	5775.000	58.54	38.67	97.21	54.00	43.21	AVG	No Limit
7		5851.230	37.25	38.87	76.12	119.40	-43.28	peak	
8		5856.420	34.45	38.89	73.34	110.40	-37.06	peak	
9		5875.950	27.02	38.94	65.96	104.50	-38.54	peak	
10		5927.525	13.41	39.08	52.49	68.20	-15.71	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Vertical

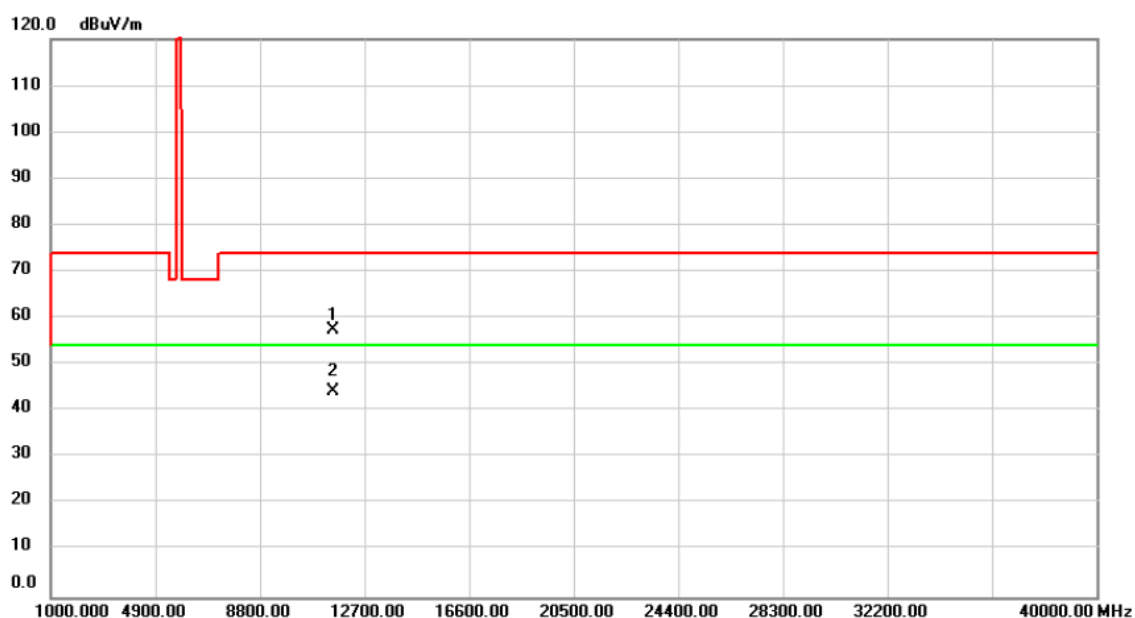

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11550.00	54.04	3.32	57.36	74.00	-16.64	peak	
2	*	11550.00	40.87	3.32	44.19	54.00	-9.81	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Horizontal

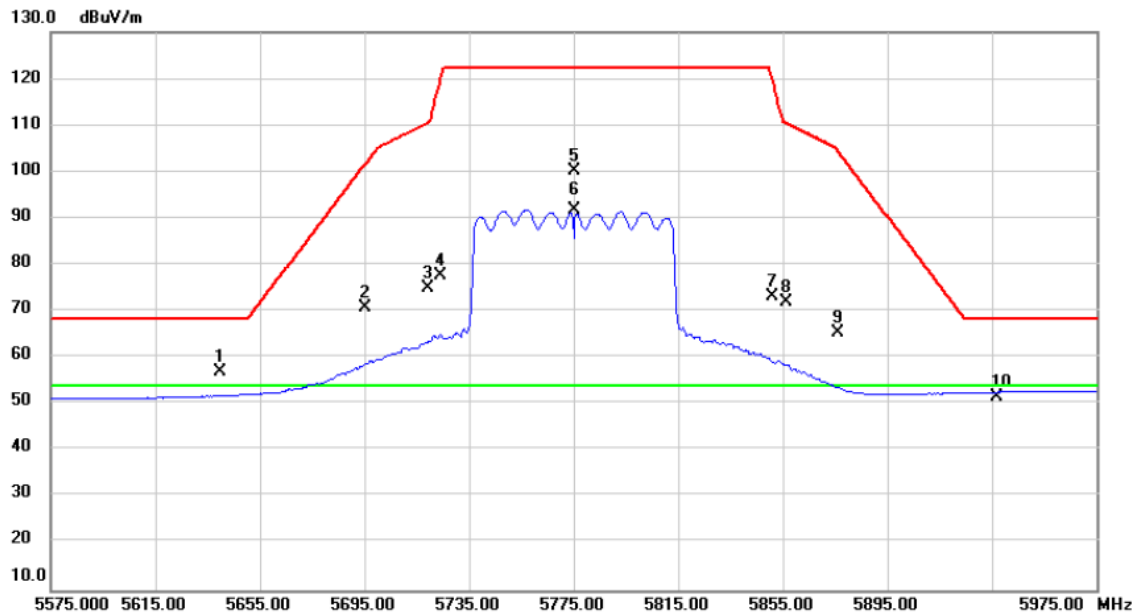

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5639.575	18.73	38.30	57.03	68.20	-11.17	peak	
2		5695.300	32.35	38.45	70.80	101.72	-30.92	peak	
3		5719.220	36.45	38.52	74.97	110.58	-35.61	peak	
4		5724.030	39.13	38.53	77.66	119.99	-42.33	peak	
5		5775.000	61.48	38.67	100.15	122.20	-22.05	peak	No Limit
6	*	5775.000	53.17	38.67	91.84	54.00	37.84	AVG	No Limit
7		5851.050	34.38	38.87	73.25	119.81	-46.56	peak	
8		5856.300	33.16	38.89	72.05	110.44	-38.39	peak	
9		5876.000	26.46	38.94	65.40	104.46	-39.06	peak	
10		5937.125	12.48	39.11	51.59	68.20	-16.61	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Horizontal

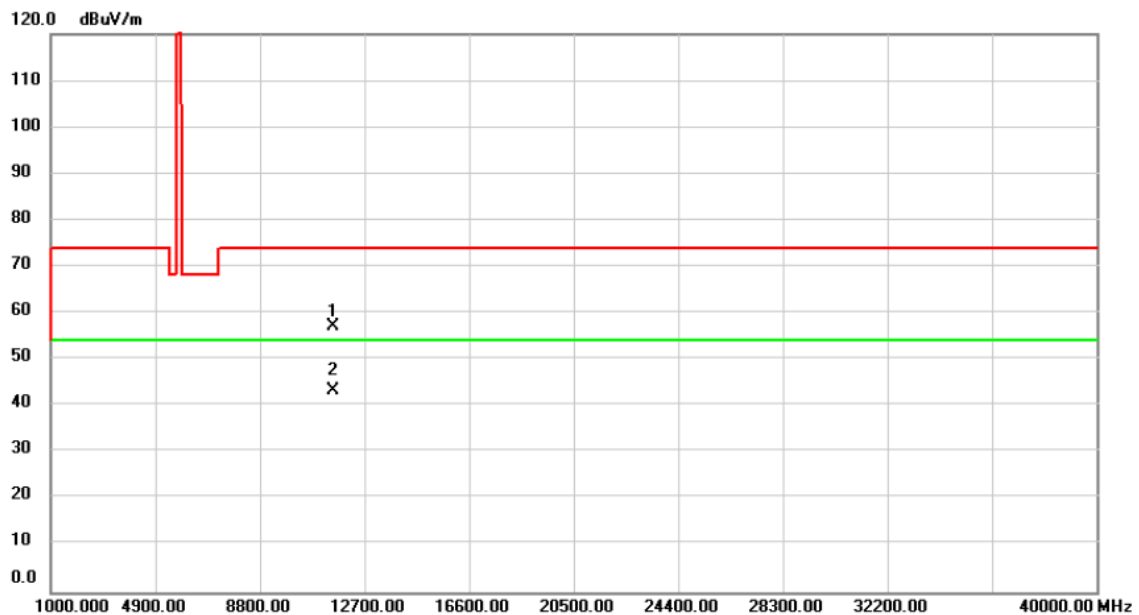


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11550.00	53.70	3.32	57.02	74.00	-16.98	peak	
2	*	11550.00	40.01	3.32	43.33	54.00	-10.67	AVG	

Beamforming

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


Vertical

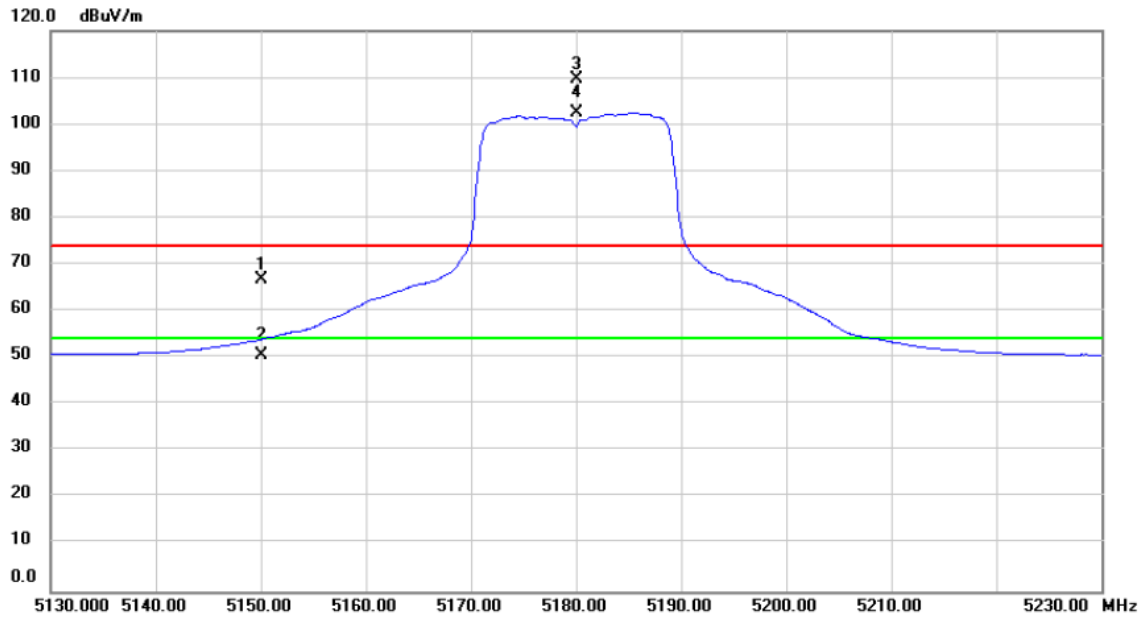

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	29.23	37.54	66.77	74.00	-7.23	peak	
2		5150.000	13.07	37.54	50.61	54.00	-3.39	AVG	
3	X	5180.000	72.18	37.58	109.76	74.00	35.76	peak	No Limit
4	*	5180.000	64.99	37.58	102.57	54.00	48.57	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


Vertical

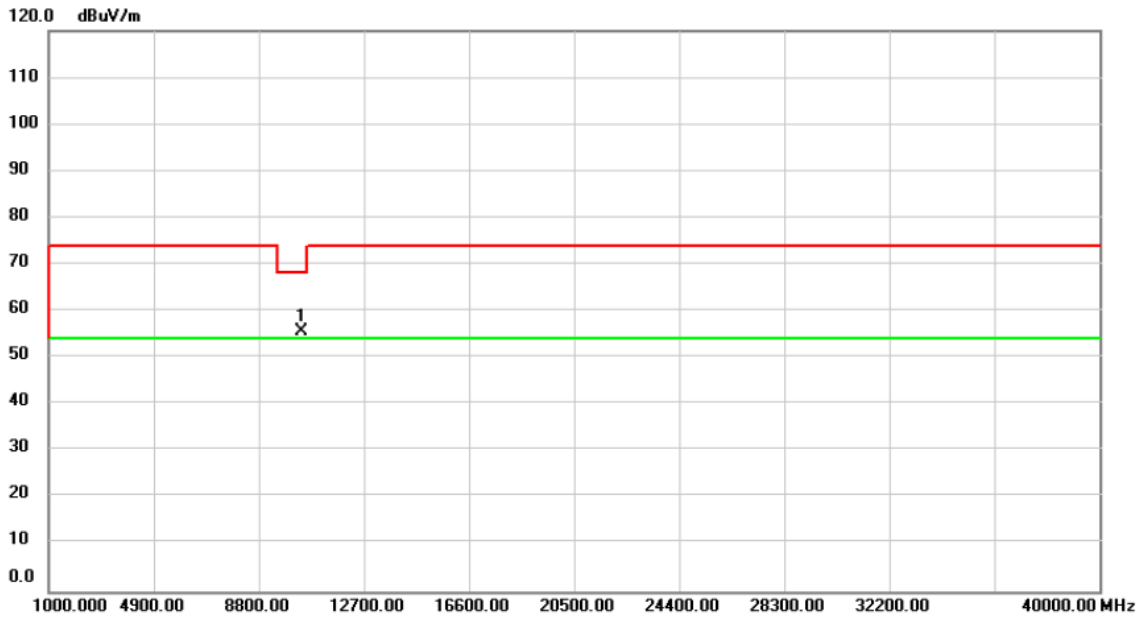

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10360.00	53.81	1.92	55.73	68.20	-12.47	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


Horizontal

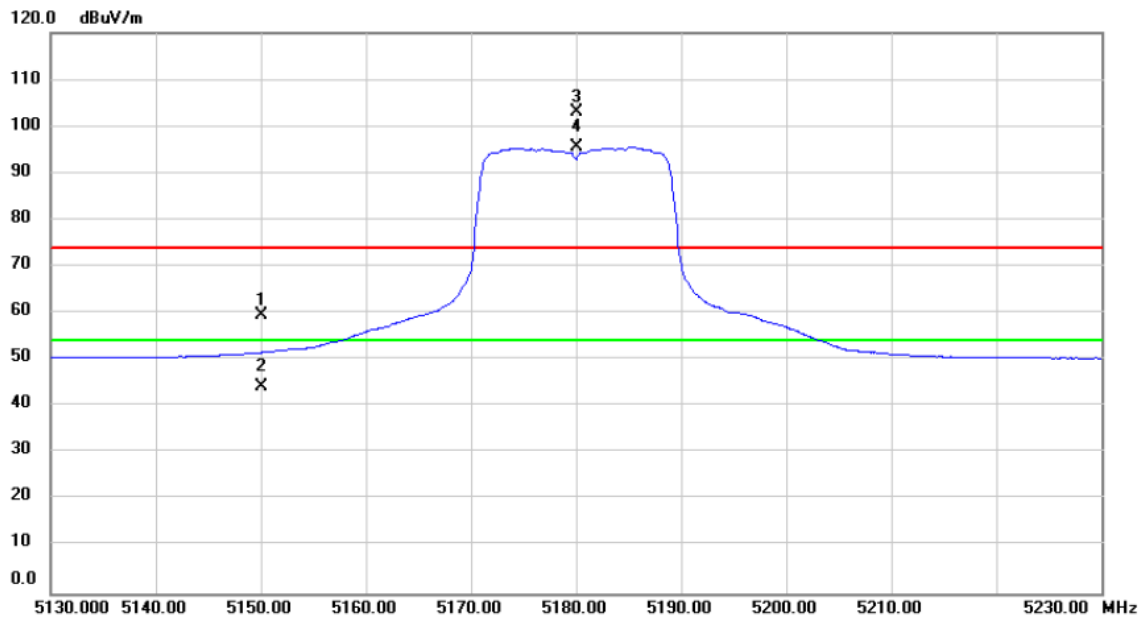

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	22.10	37.54	59.64	74.00	-14.36	peak	
2		5150.000	6.81	37.54	44.35	54.00	-9.65	AVG	
3	X	5180.000	65.56	37.58	103.14	74.00	29.14	peak	No Limit
4	*	5180.000	58.00	37.58	95.58	54.00	41.58	AVG	No Limit


Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Horizontal

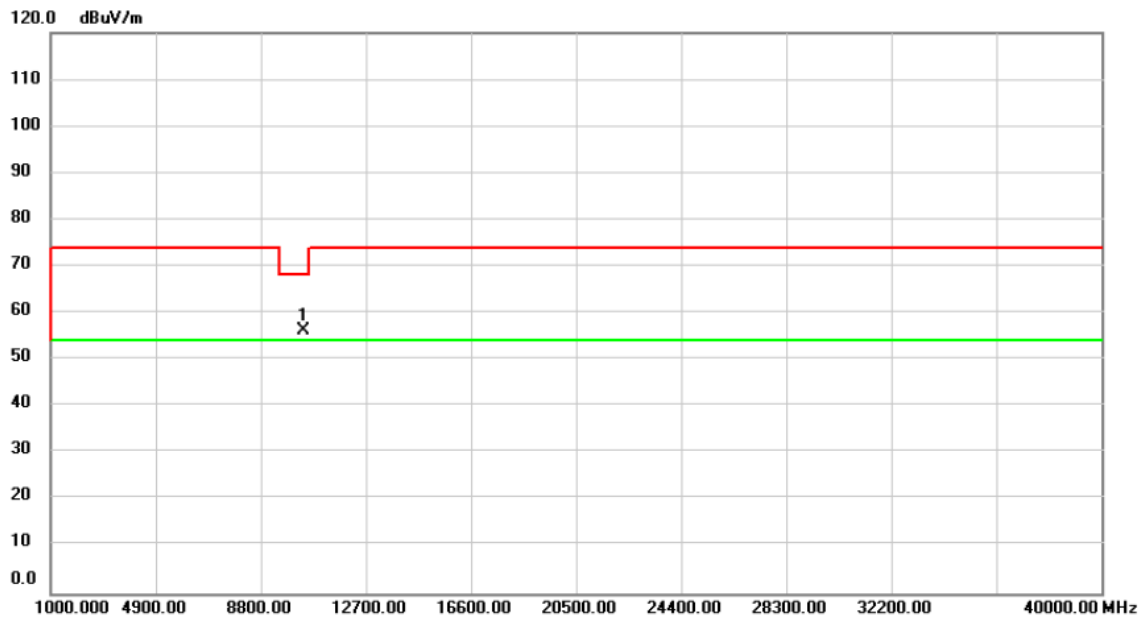

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	54.42	1.92	56.34	68.20	-11.86	peak	


Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200MHz

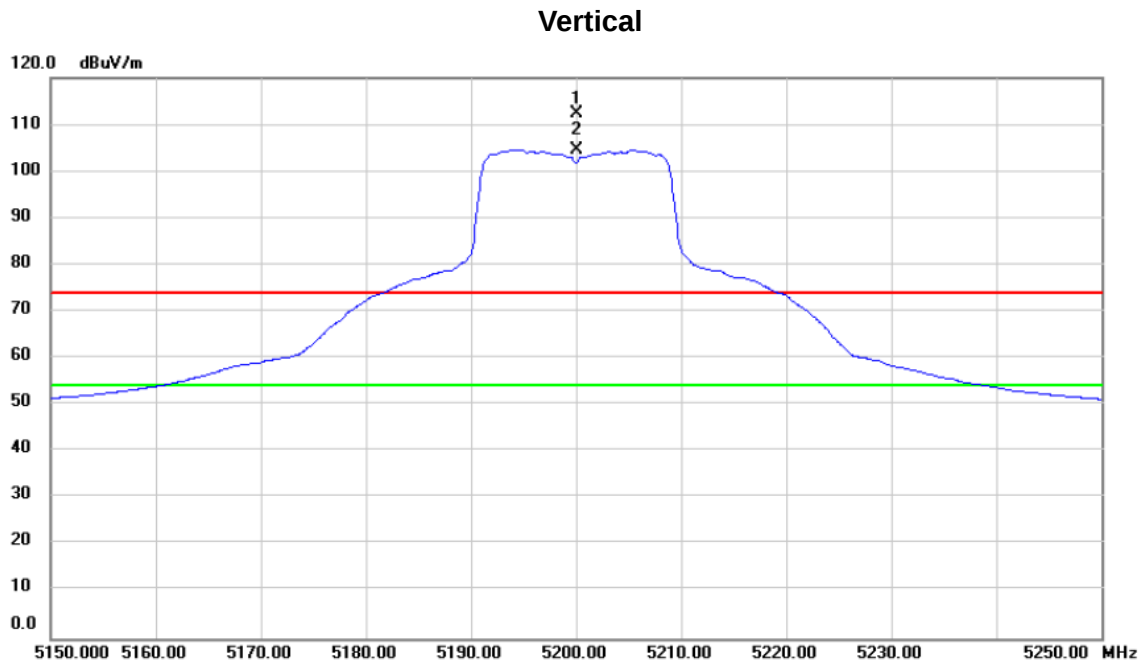

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5200.000	74.75	37.60	112.35	74.00	38.35	peak	No Limit
2	*	5200.000	67.08	37.60	104.68	54.00	50.68	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200MHz


Vertical

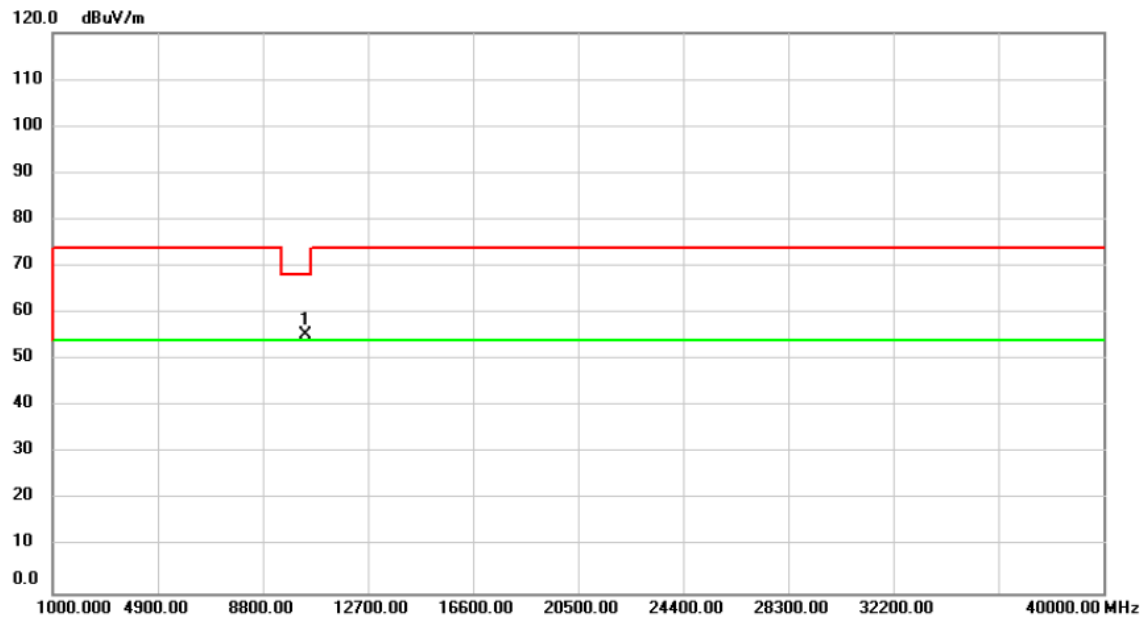

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.00	53.39	1.95	55.34	68.20	-12.86	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200MHz


Horizontal

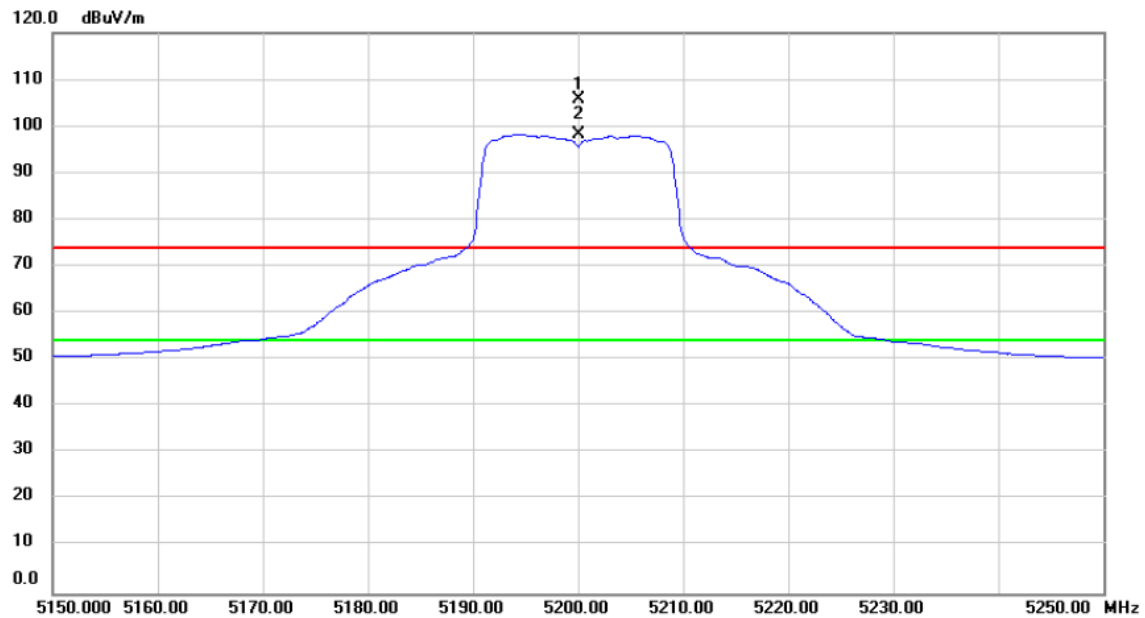

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5200.000	68.27	37.60	105.87	74.00	31.87	peak	No Limit
2	*	5200.000	60.76	37.60	98.36	54.00	44.36	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200MHz


Horizontal

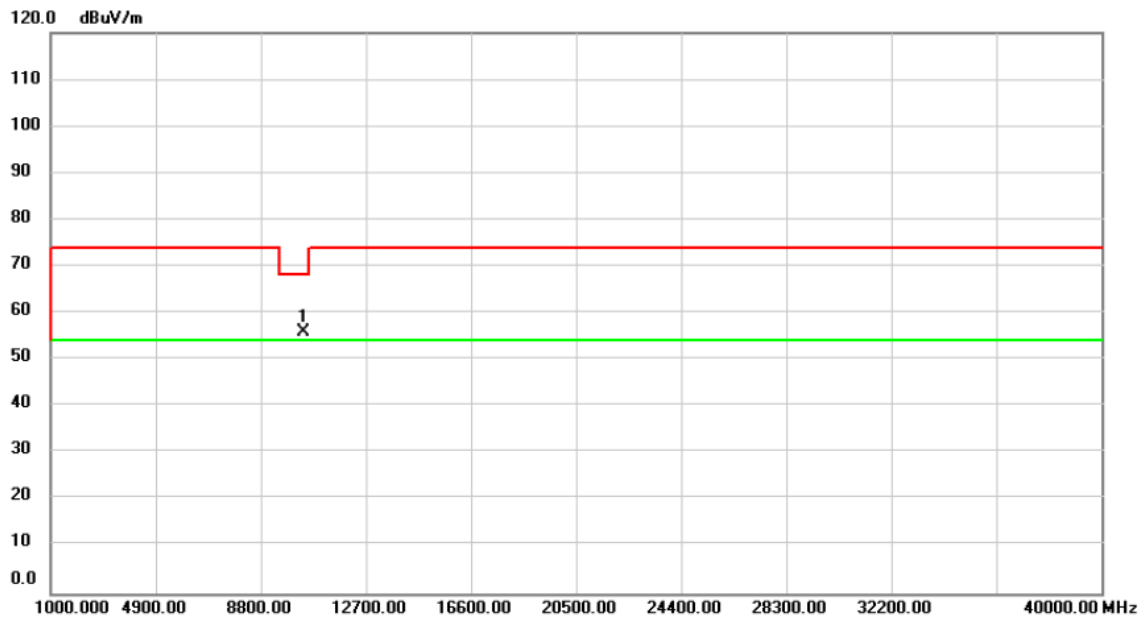

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10400.00	54.08	1.95	56.03	68.20	-12.17	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


Vertical

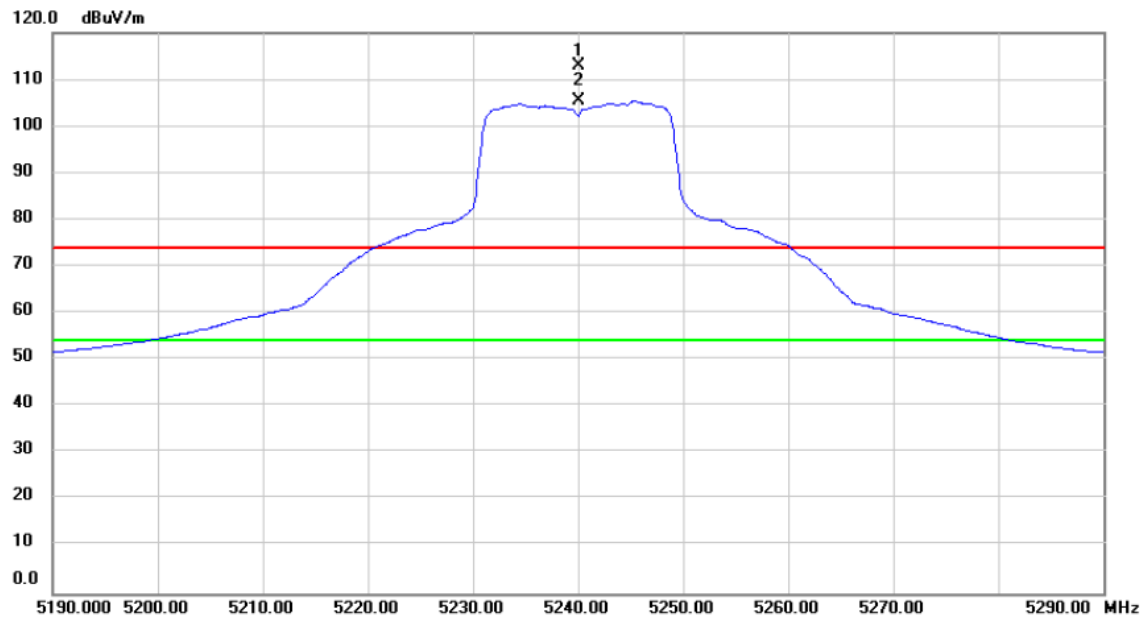

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5240.000	75.45	37.64	113.09	74.00	39.09	peak	No Limit
2	*	5240.000	67.69	37.64	105.33	54.00	51.33	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


Vertical

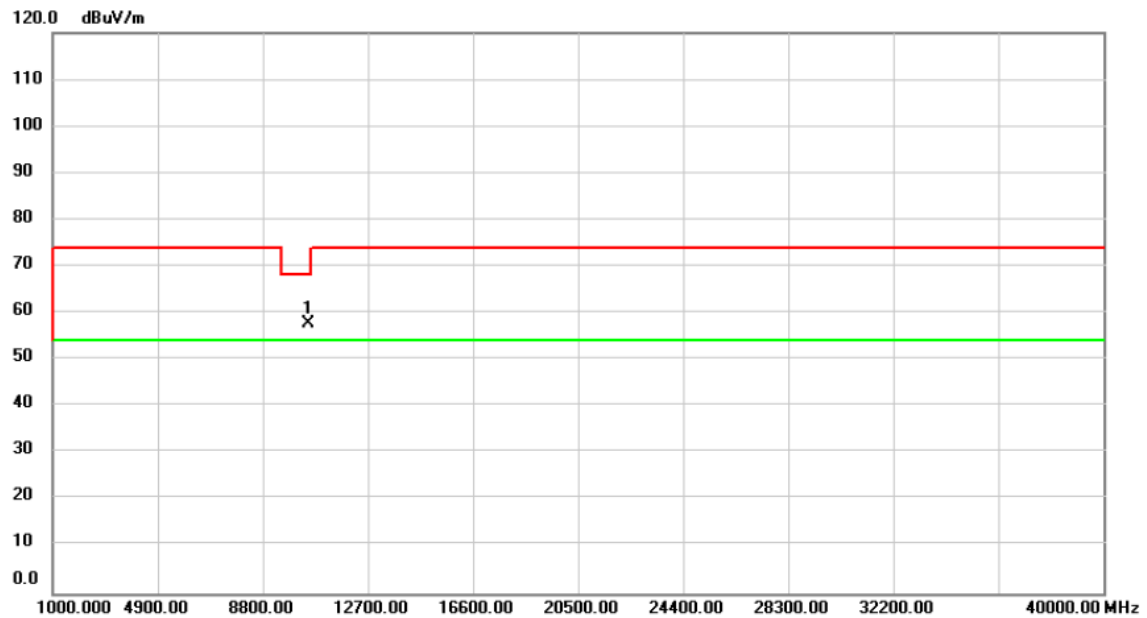

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.00	55.90	1.96	57.86	68.20	-10.34	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


Horizontal

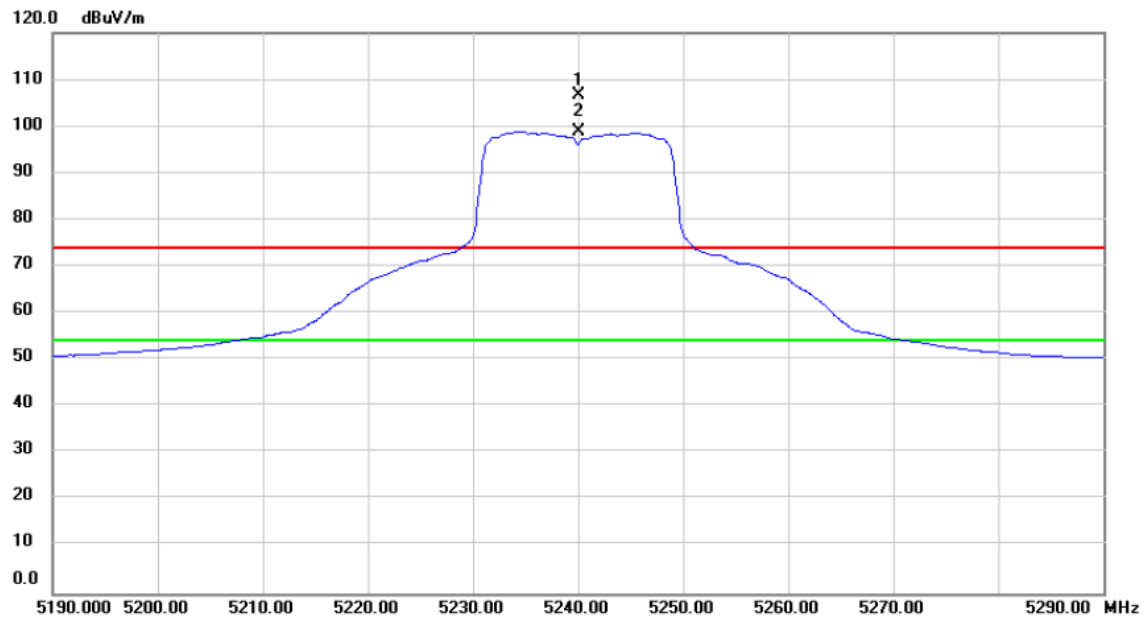

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5240.000	68.89	37.64	106.53	74.00	32.53	peak	No Limit
2	*	5240.000	61.30	37.64	98.94	54.00	44.94	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


Horizontal

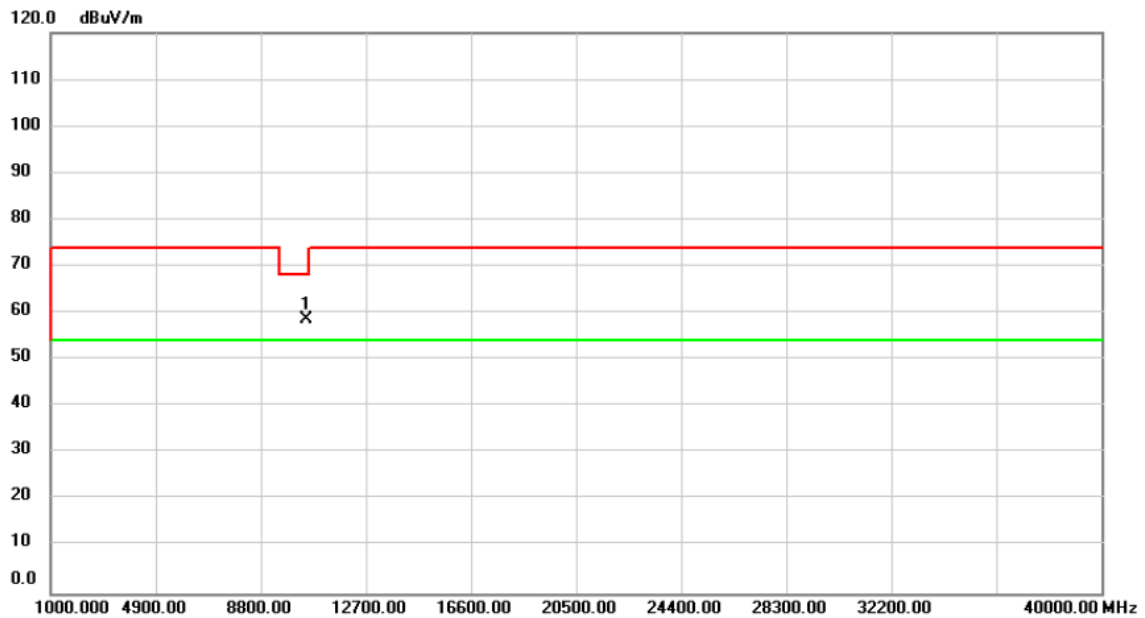

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.00	56.74	1.96	58.70	68.20	-9.50	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Vertical

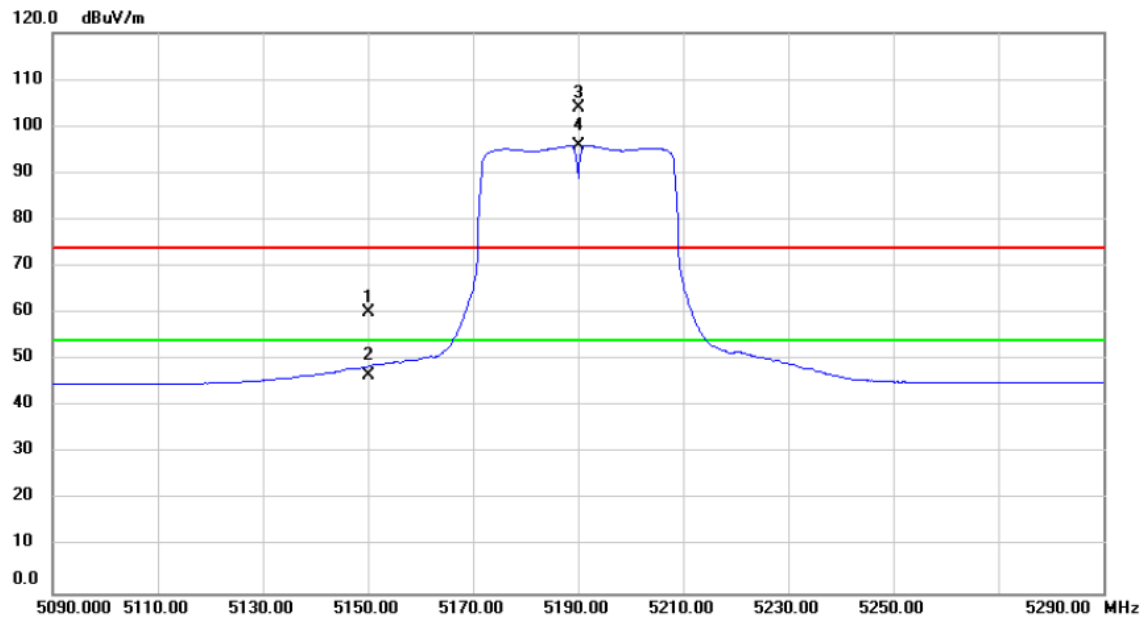

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	22.58	37.54	60.12	74.00	-13.88	peak	
2		5150.000	9.22	37.54	46.76	54.00	-7.24	AVG	
3	X	5190.000	66.47	37.58	104.05	74.00	30.05	peak	No Limit
4	*	5190.000	58.34	37.58	95.92	54.00	41.92	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Vertical

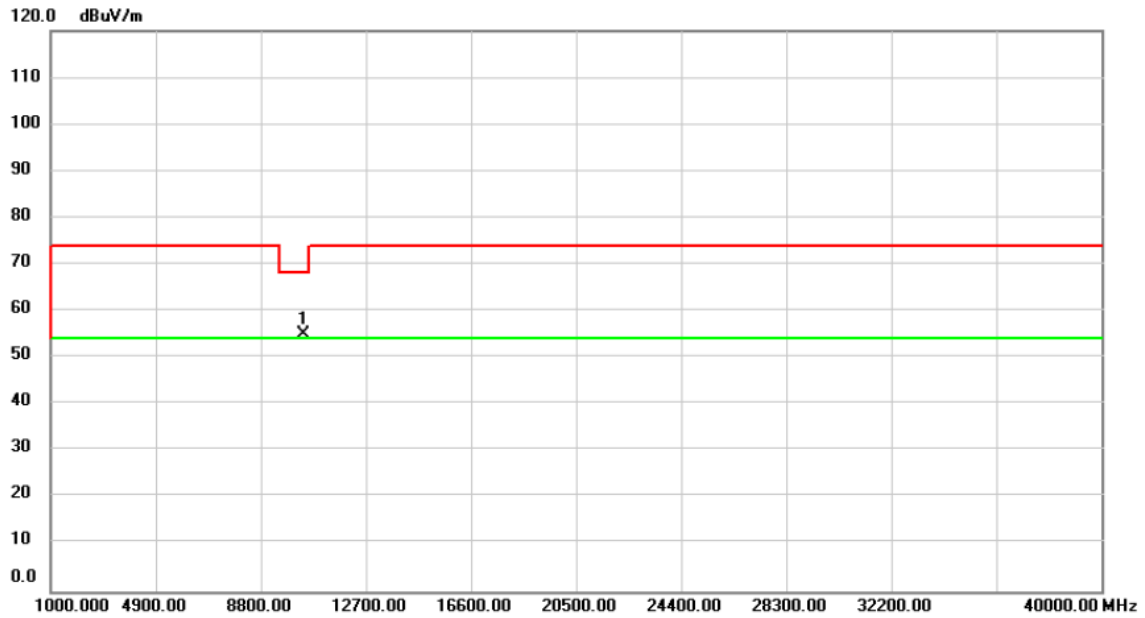

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.00	53.05	1.94	54.99	68.20	-13.21	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Horizontal

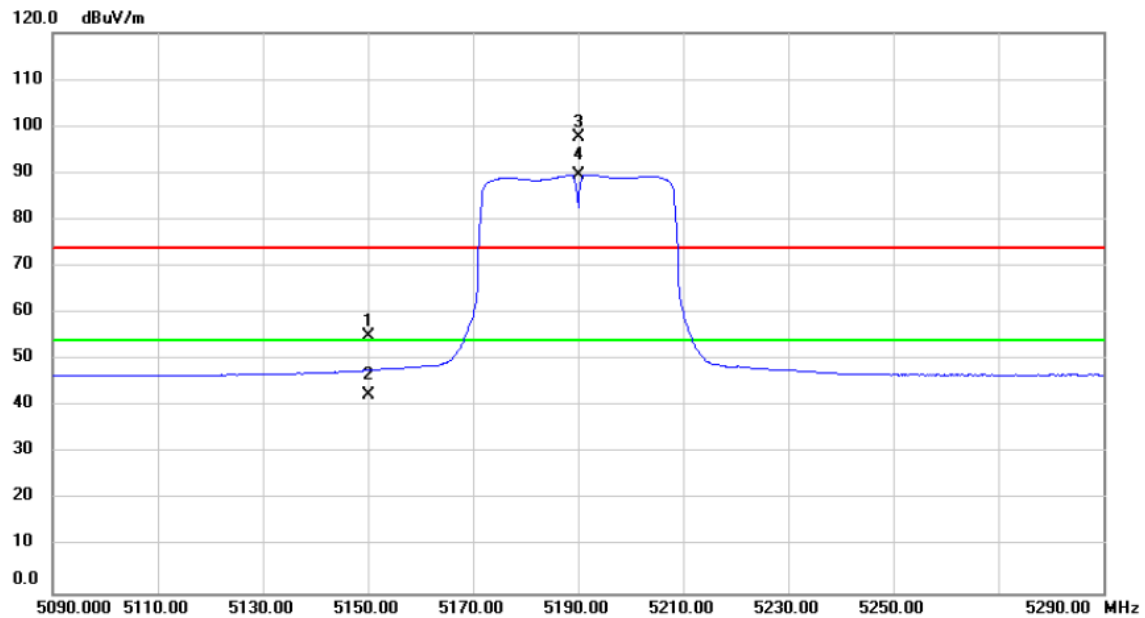

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	17.50	37.54	55.04	74.00	-18.96	peak	
2		5150.000	4.83	37.54	42.37	54.00	-11.63	AVG	
3	X	5190.000	59.99	37.58	97.57	74.00	23.57	peak	No Limit
4	*	5190.000	52.09	37.58	89.67	54.00	35.67	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Horizontal

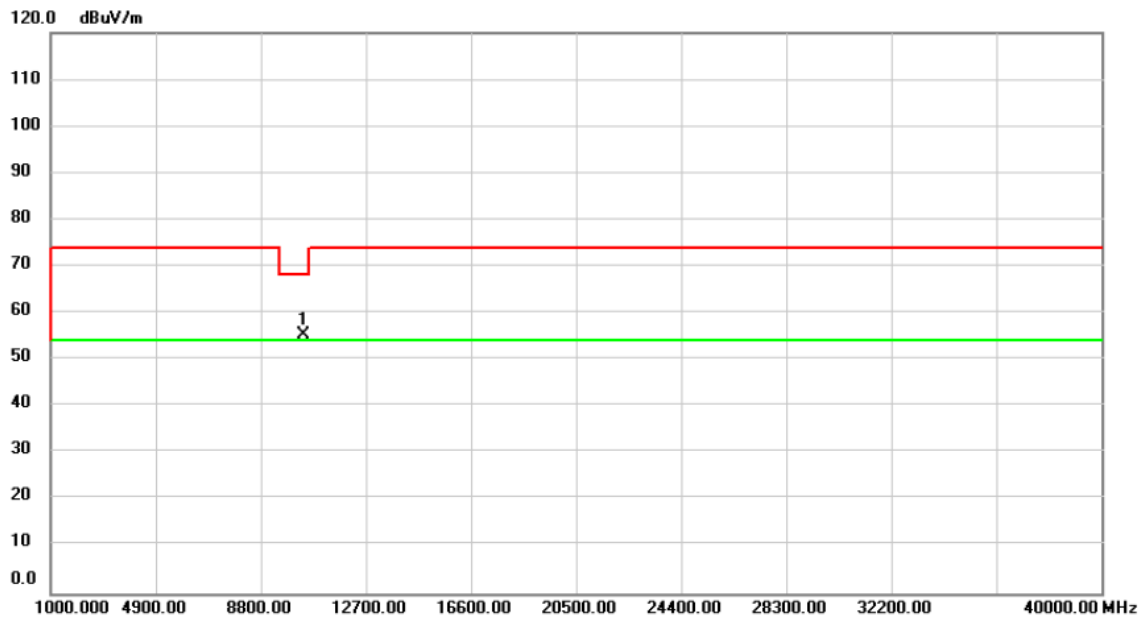

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.00	53.52	1.94	55.46	68.20	-12.74	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Vertical

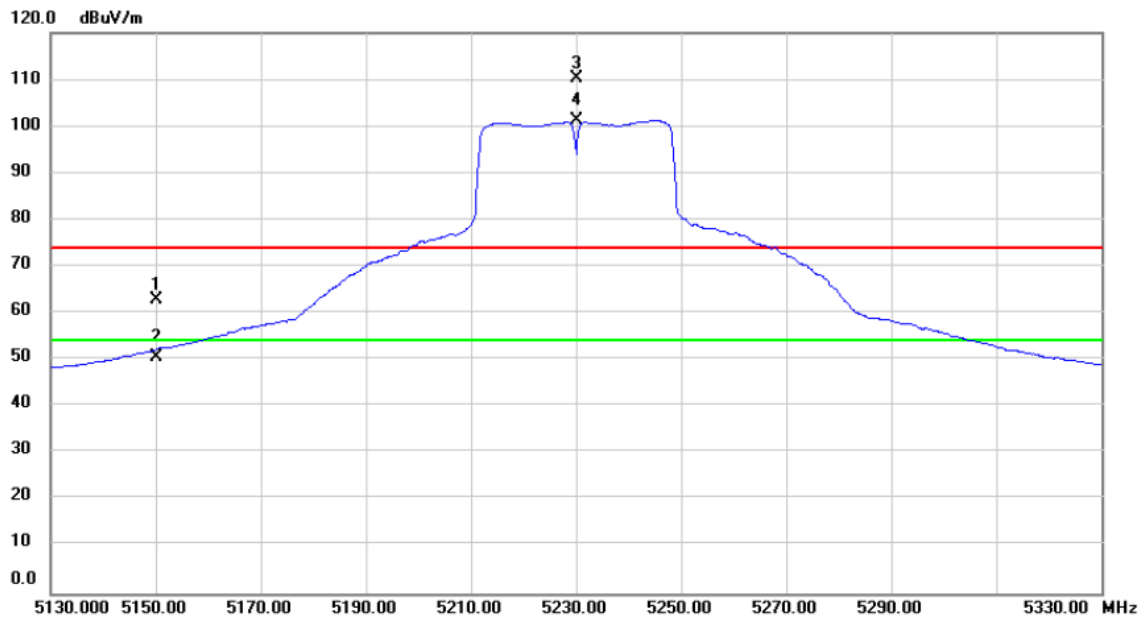

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.000	25.19	37.54	62.73	74.00	-11.27	peak	
2	5150.000	13.03	37.54	50.57	54.00	-3.43	AVG	
3 X	5230.000	72.76	37.63	110.39	74.00	36.39	peak	No Limit
4 *	5230.000	63.61	37.63	101.24	54.00	47.24	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Vertical

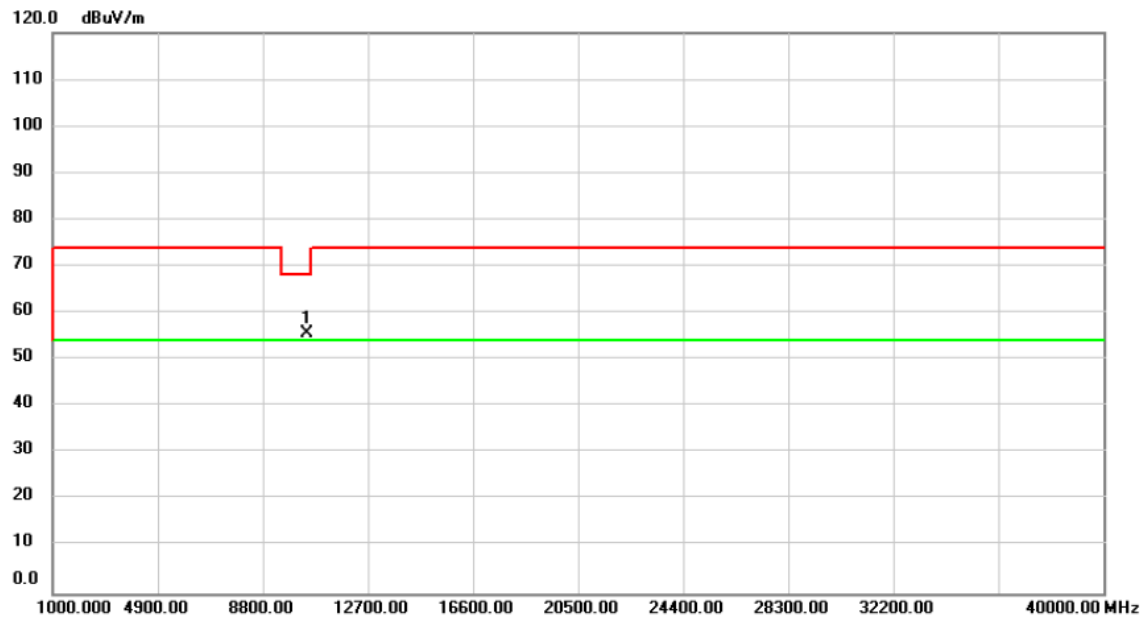

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10460.00	53.60	1.96	55.56	68.20	-12.64	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Horizontal

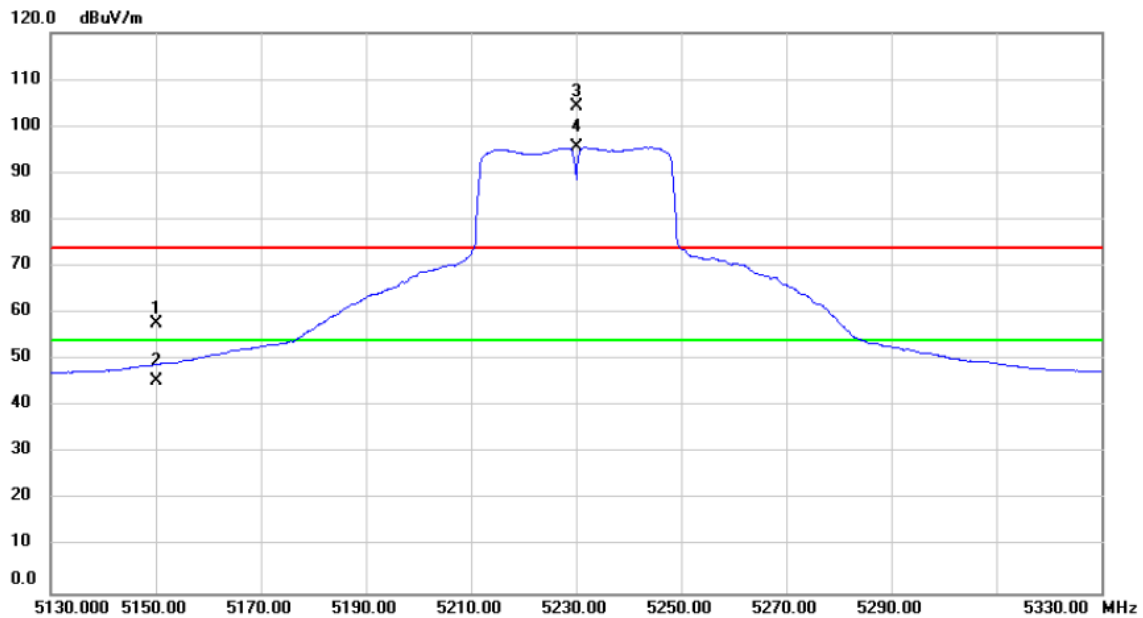

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	20.24	37.54	57.78	74.00	-16.22	peak	
2		5150.000	7.95	37.54	45.49	54.00	-8.51	AVG	
3	X	5230.000	66.73	37.63	104.36	74.00	30.36	peak	No Limit
4	*	5230.000	57.82	37.63	95.45	54.00	41.45	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Horizontal

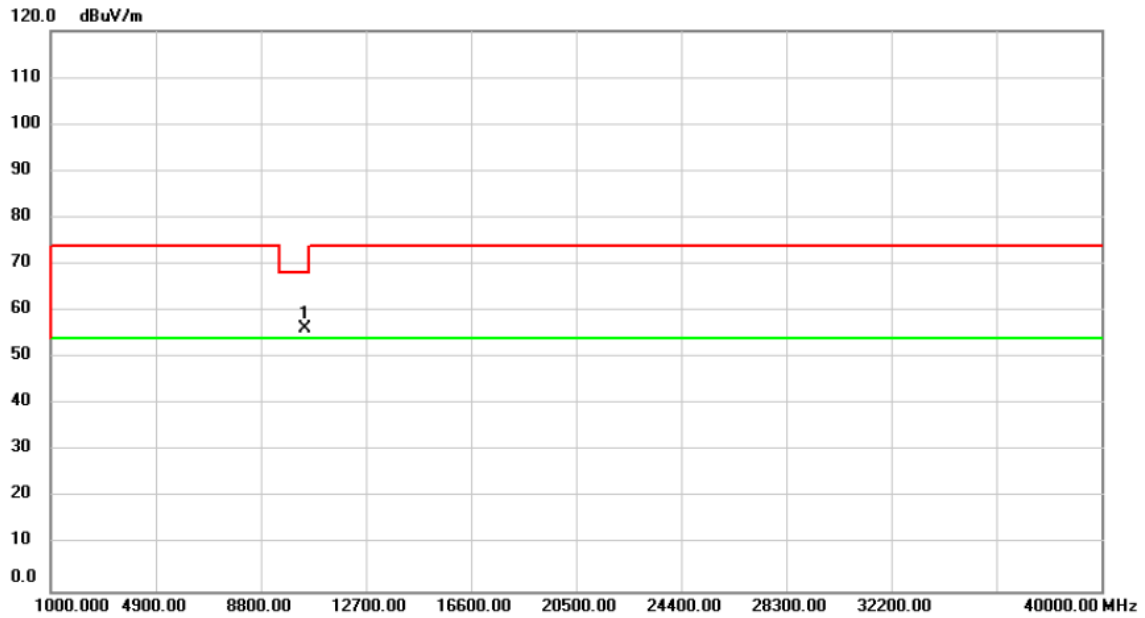

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10460.00	54.21	1.96	56.17	68.20	-12.03	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz


Vertical

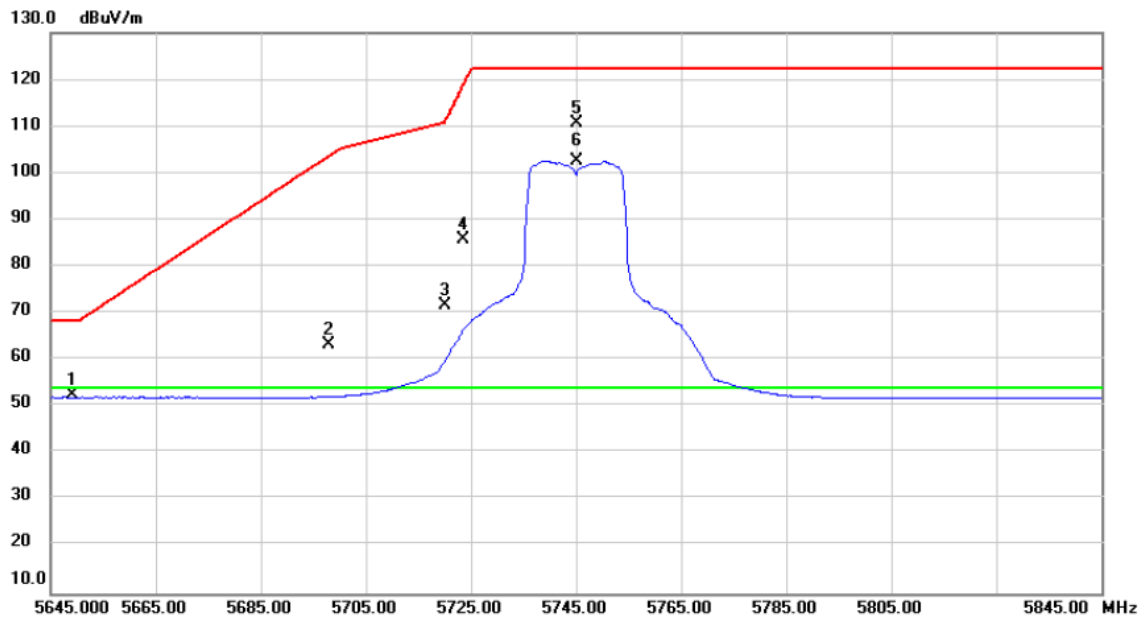

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5649.260	14.26	38.33	52.59	68.20	-15.61	peak	
2		5697.950	24.74	38.46	63.20	103.68	-40.48	peak	
3		5719.960	33.14	38.52	71.66	110.79	-39.13	peak	
4		5723.565	47.23	38.53	85.76	118.93	-33.17	peak	
5		5745.000	71.94	38.58	110.52	122.20	-11.68	peak	No Limit
6	*	5745.000	64.12	38.58	102.70	54.00	48.70	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz


Vertical

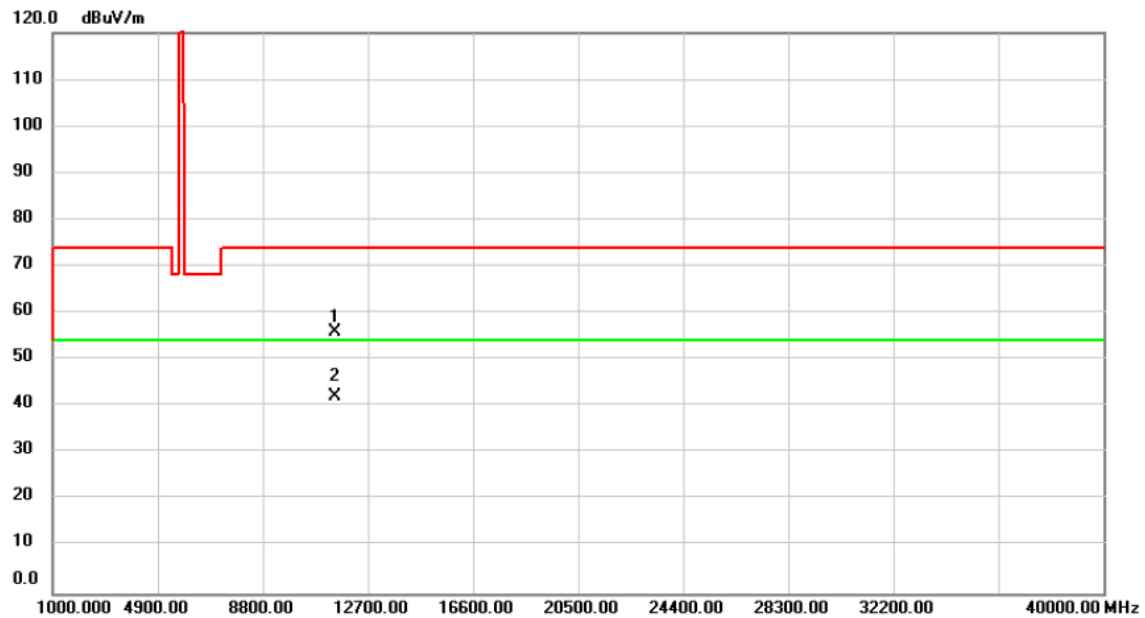

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	52.51	3.40	55.91	74.00	-18.09	peak	
2	*	11490.00	38.77	3.40	42.17	54.00	-11.83	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz


Horizontal

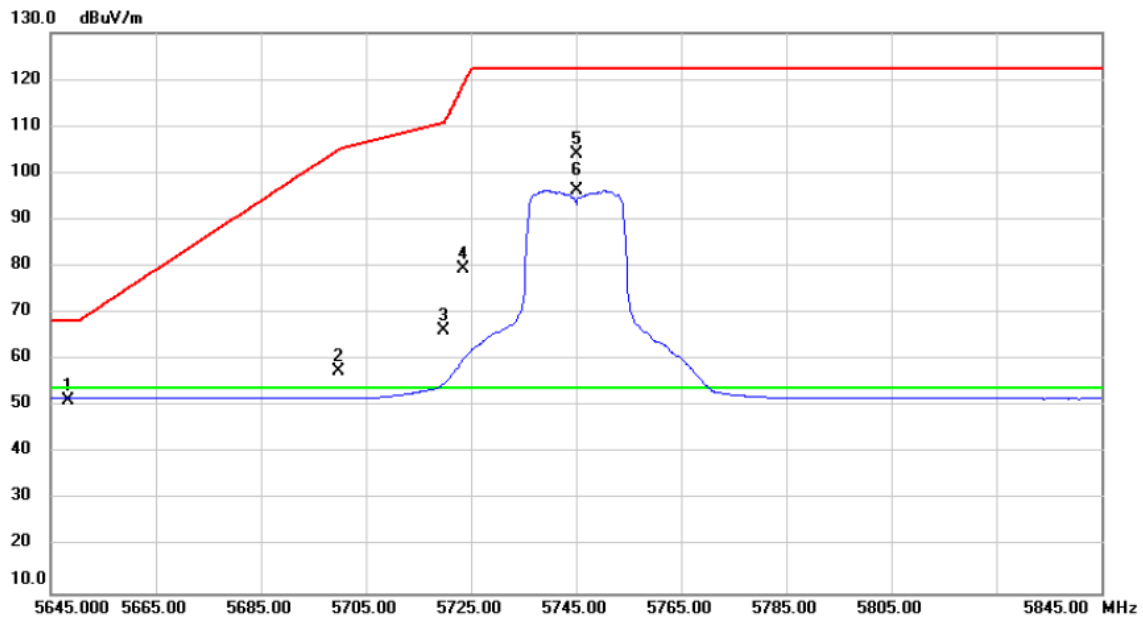

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5648.465	12.92	38.33	51.25	68.20	-16.95	peak	
2	5699.725	19.01	38.46	57.47	105.00	-47.53	peak	
3	5719.840	27.60	38.52	66.12	110.76	-44.64	peak	
4	5723.665	40.93	38.53	79.46	119.16	-39.70	peak	
5	5745.000	65.56	38.58	104.14	122.20	-18.06	peak	No Limit
6 *	5745.000	57.75	38.58	96.33	54.00	42.33	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz


Horizontal

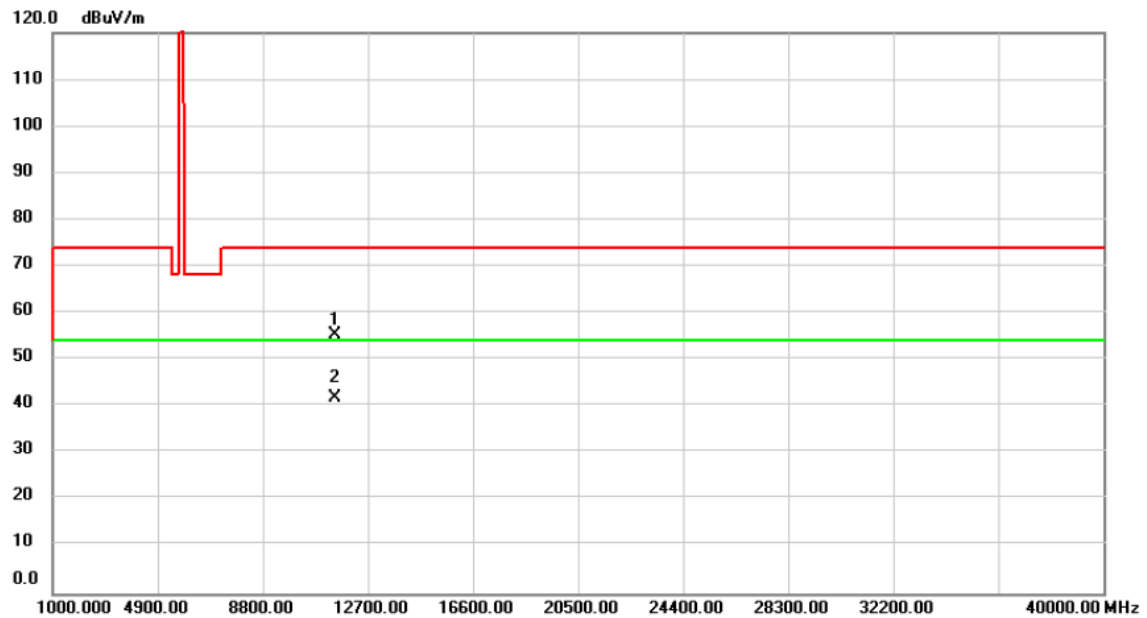

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	51.92	3.40	55.32	74.00	-18.68	peak	
2	*	11490.00	38.52	3.40	41.92	54.00	-12.08	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz


Vertical

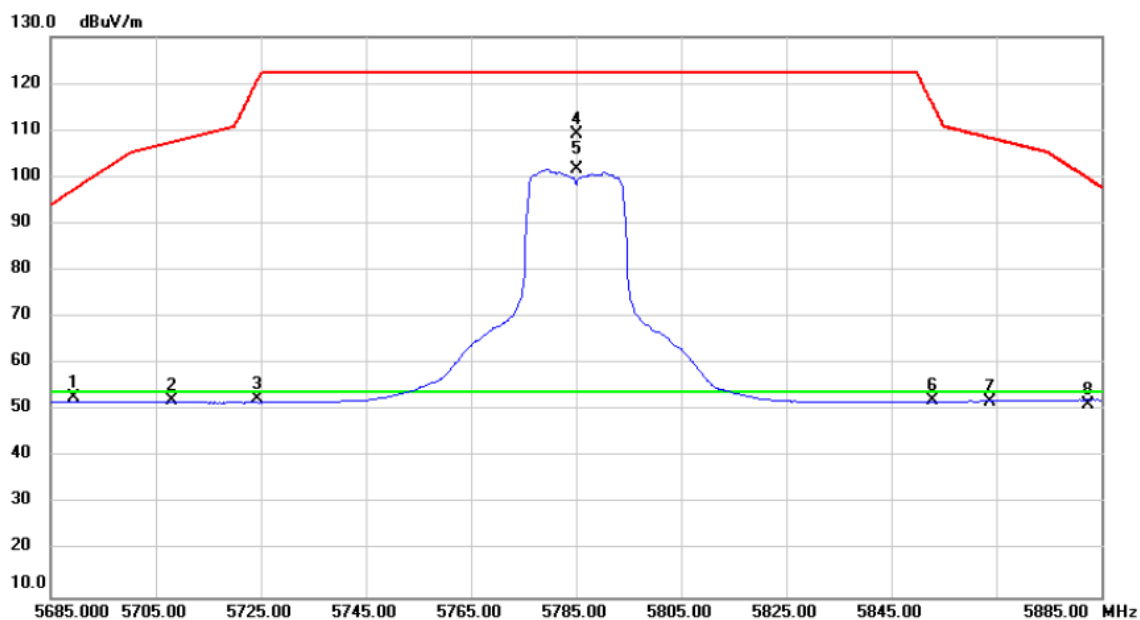

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5689.485	14.46	38.43	52.89	97.42	-44.53	peak	
2	5708.060	13.53	38.48	52.01	107.46	-55.45	peak	
3	5724.260	13.87	38.53	52.40	120.51	-68.11	peak	
4	5785.000	70.60	38.70	109.30	122.20	-12.90	peak	No Limit
5 *	5785.000	62.86	38.70	101.56	54.00	47.56	A/VG	No Limit
6	5852.915	13.30	38.88	52.18	115.55	-63.37	peak	
7	5863.900	12.96	38.91	51.87	108.31	-56.44	peak	
8	5882.350	12.41	38.96	51.37	99.76	-48.39	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz

Vertical

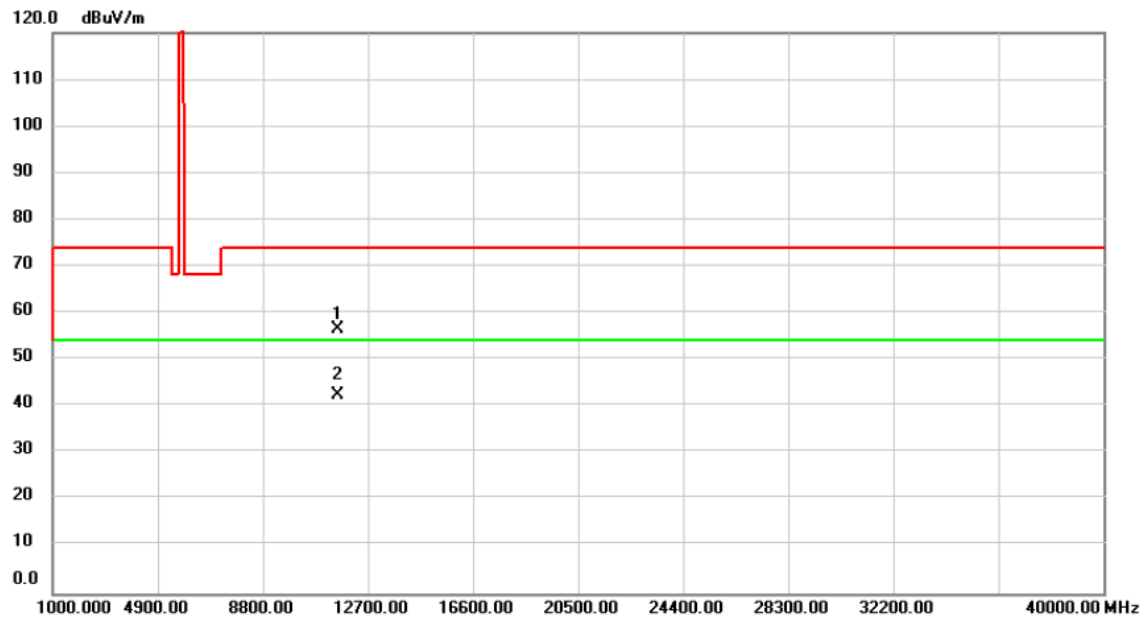

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.00	53.18	3.28	56.46	74.00	-17.54	peak	
2	*	11570.00	39.31	3.28	42.59	54.00	-11.41	AVG	