

FCC TEST REPORT

CATEGORY : Portable
PRODUCT NAME : 802.11g Wireless LAN Mini USB Adapter
FCC ID. : NDD9573160511
FILING TYPE : Certification
MODEL (BRAND) NAME : EW-7316Ug (EDIMAX) / GWU-E16G (GLP)
APPLICANT : **EDIMAX TECHNOLOGY CO., LTD.**
No. 3, Wu Chuan 3rd Road, Wu-Ku Industrial Park, Taipei
Hsien, Taiwan, R.O.C.
MANUFACTURER : Same as applicant
ISSUED BY : **SPORTON INTERNATIONAL INC.**
6F, No. 106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien,
Taiwan, R.O.C.

Statements:

Only the test result of 802.11b/g part is shown in tHsi test report.

The test result in tHsi report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

Certificate or Test Report could not be used by the applicant to claim the product endorsement by NVLAP and any agency of U.S. government.

The test equipment used to perform the test is calibrated and traceable to NML/ROC or NIST/USA.



Lab Code: 200079-0



Table of Contents

HSITORY OF THSI TEST REPORT	II
CERTIFICATE OF COMPLIANCE.....	III
1. GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST.....	1
1.1. Applicant	1
1.2. Manufacturer	1
1.3. Basic Description of Equipment under Test.....	1
1.4. Features of Equipment under Test	1
1.5. Antenna Description.....	2
1.6. Table for Carrier Frequencies	2
2. TEST CONFIGURATION OF THE EQUIPMENT UNDER TEST	3
2.1. Connection Diagram of Conducted Test System.....	3
2.2. The Test Mode Description	4
2.3. Description of Test Supporting Units	4
3. GENERAL INFORMATION OF TEST	5
3.1. Test Facility	5
3.2. Standards for Methods of Measurement.....	5
3.3. Frequency Range Investigated	5
3.4. Test Distance	5
3.5. Test Software.....	5
4. LIST OF MEASUREMENTS	6
4.1. Summary of the Test Results.....	6
5. TEST RESULT	7
5.1. Test of 6dB Spectrum Bandwidth	7
5.2. Test of Maximum Peak Conducted Output Power	12
5.3. Test of Peak Power Spectral Density	14
5.4. Test of Band Edges Emission.....	19
5.5. Test of AC Power Line Conducted Emission	27
5.6. Test of Spurious Radiated Emission.....	32
5.7. Antenna Requirements	49
6. LIST OF MEASURING EQUIPMENTS USED	50
7. COMPANY PROFILE.....	52
7.1. Certificate of Accreditation	52
7.2. Test Location	52
8. CERTIFICATE OF NVLAP ACCREDITATION.....	53
APPENDIX A. PHOTOGRAPHS OF EUT	A1 ~ A7



HSITORY OF THSI TEST REPORT

Received Date: Aug. 16, 2005

Test Date: Aug. 26, 2005

Original Report Issue Date: Aug. 29, 2005

Report No.: FR581615

☒ No additional attachment.

☐ Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

CERTIFICATE OF COMPLIANCE

with

47 CFR FCC Part 15 Subpart C

PRODUCT NAME : 802.11g Wireless LAN Mini USB Adapter

MODEL (BRAND) NAME : EW-7316Ug (EDIMAX) / GWU-E16G (GLP)


APPLICANT : **EDIMAX TECHNOLOGY CO., LTD.**

No. 3, Wu Chuan 3rd Road, Wu-Ku Industrial Park, Taipei
Hsien, Taiwan, R.O.C.

MANUFACTURER : Same as applicant

I **HEREBY** CERTIFY THAT:

The measurements shown in the test report were made in accordance with the procedures given in ANSI C63.4-2003 and all tests are performed according to 47 CFR FCC Part 15 Subpart C. Testing was carried out on Aug. 26, 2005 at SPORTON International Inc. LAB.



Wayne Hsu / Supervisor
Sporton International Inc.

1. General Description of Equipment under Test

1.1. Applicant

EDIMAX TECHNOLOGY CO., LTD.

No. 3, Wu Chuan 3rd Road, Wu-Ku Industrial Park, Taipei Hsien, Taiwan, R.O.C.

1.2. Manufacturer

Same as applicant

1.3. Basic Description of Equipment under Test

This product is a WLAN mini USB Adapter with 802.11b/g wireless solution. The technical data has been listed on section "Features of Equipment under Test".

1.4. Features of Equipment under Test

Items	Description
Type of Modulation	DSSS (CCK / DQPSK / DBPSK) OFDM (16QAM / 64QAM / DQPSK / DBPSK)
Number of Channels	11
Frequency Band	2400 MHz ~ 2483.5 MHz
Carrier Frequency	See section 1.6 details
Data Rate	1, 2, 5.5, 11 Mbps - DSSS 6, 12, 18, 24, 36, 48, 54 Mbps – OFDM
Max. Conducted Output Power	DSSS : 17.5 dBm OFDM : 16.6 dBm
Antenna Type	See section 1.5 for details
Power Rating (DC/AC, Voltage)	5.00V DC (for equipment)
Temperature Range (Operating)	0 ~ 55 °C

1.5. Antenna Description

No.	Antenna Type	Gain (dBi)
1	Printed Antenna	0.00


1.6. Table for Carrier Frequencies

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	05	2432 MHz	09	2452 MHz
02	2417 MHz	06	2437 MHz	10	2457 MHz
03	2422 MHz	07	2442 MHz	11	2462 MHz
04	2427 MHz	08	2447 MHz	-	-


2. Test Configuration of the Equipment under Test

2.1. Connection Diagram of Conducted Test System

Conduction

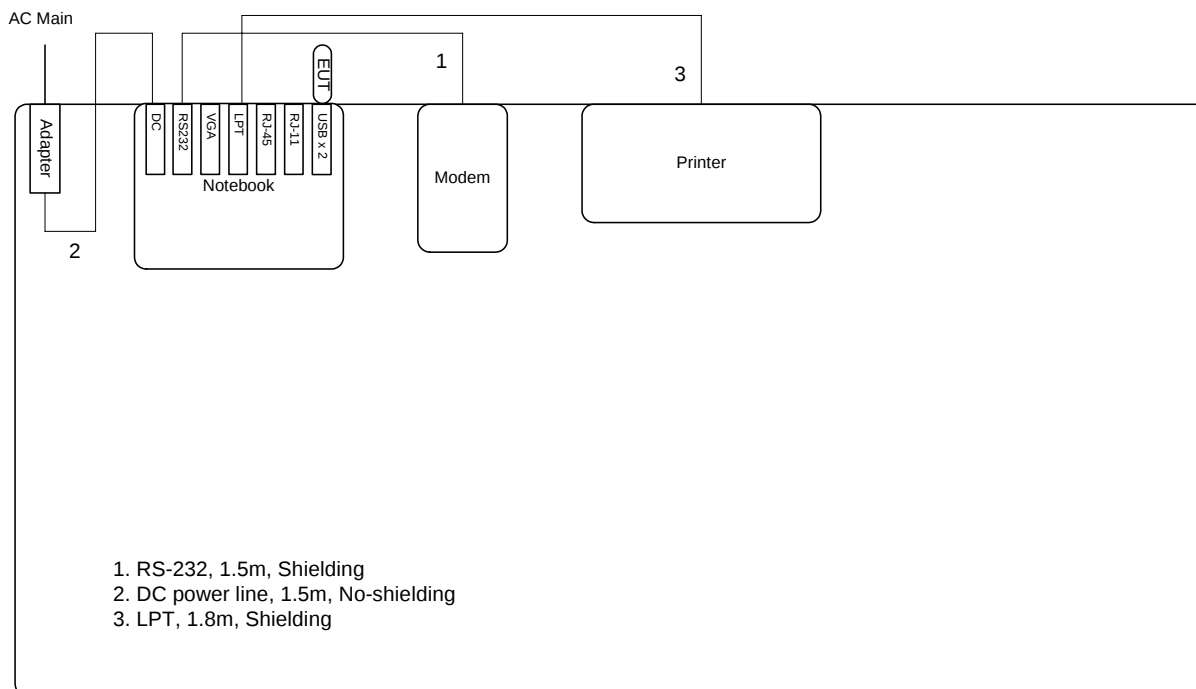

Radiation

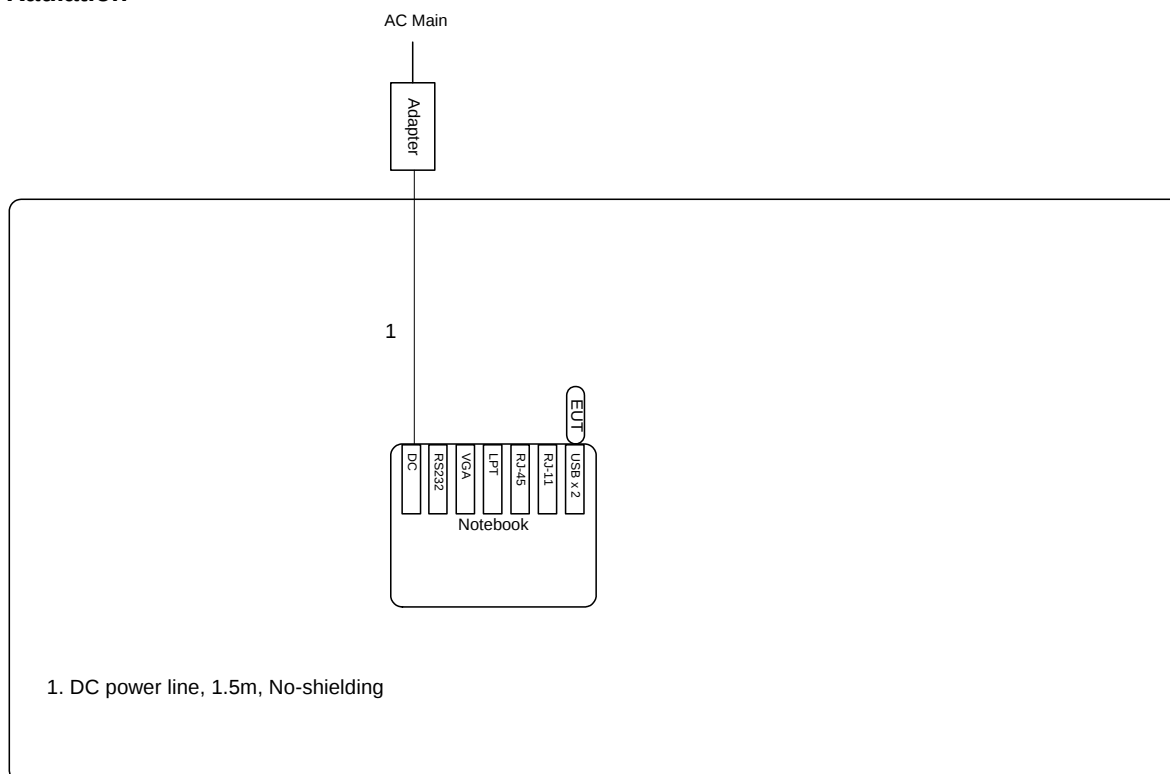

2.2. The Test Mode Description

1. For DSSS modulation, CCK (11 Mbps) is the worst case on all test items.
2. For OFDM modulation, BPSK (6 Mbps) is the worst case on all test items.
3. According to ANSI C63.4-2003: If frequency range of EUT is more than 10 MHz, we have to test the lowest, middle and highest channels of EUT.
4. Spurious emission below 1GHz is independent of channel selection and modulation types. So only channel 06 was tested.
5. For AC conduction emission, the EUT was linked with the notebook wirelessly.

2.3. Description of Test Supporting Units

Support unit	Brand	Model No.	FCC ID
Notebook	DELL	D400	DoC
Printer	EPSON	LQ-300	DoC
Modem	ACEEX	DM-1414	IFAXDM1414

3. General Information of Test

3.1. Test Facility

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiag, Tao Yuan Hsien, Taiwan, R.O.C.
: TEL 886-3-327-3456
: FAX 886-3-318-0055
Test Site No : 03CH03-HY / TH01-HY / CO04-HY

3.2. Standards for Methods of Measurement

Here is the list of the standards followed in this test report.

ANSI C63.4-2003

47 CFR FCC Part 15 Subpart C

3.3. Frequency Range Investigated

Radiated emission test: from 30 MHz to 10th carrier harmonic

3.4. Test Distance

The test distance of radiated emission (30MHz~1GHz) test from antenna to EUT is 3 M.

The test distance of radiated emission (1GHz~10th carrier harmonic) test from antenna to EUT is 3 M.

3.5. Test Software

Power Parameter Table

Test Software Version	REALTEK RTL8187			
Frequency	2412 MHz	2437 MHz	2462 MHz	Data Rate
IEEE 802.11b DSSS	13	13	13	11 Mbps
IEEE 802.11g OFDM	7	7	7	6 Mbps

4. List of Measurements

4.1. Summary of the Test Results

Applied Standard: 47 CFR FCC Part 15 Subpart C			
Paragraph	FCC Section	Description of Test	Result
5.1	15.247(a)(2)	6dB Spectrum Bandwidth	Pass
5.2	15.247(b)(3)	Maximum Peak Conducted Output Power	Pass
5.3	15.247(e)	Peak Power Spectral Density	Pass
5.4	15.247(d)	Band Edges Emission	Pass
5.5	15.207	AC Power Line Conducted Emission	Pass
5.5	15.247(d)	Spurious Radiated Emission	Pass
5.7	15.203/15.247(b)/(c)	Antenna Requirement	Pass

5. Test Result

5.1. Test of 6dB Spectrum Bandwidth

5.1.1. Applicable Standard

Section 15.247(a)(2): For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

5.1.2. Measuring Instruments

Item 20 of the table on section 6.


5.1.3. Description of Major Test Instruments Setting

- Spectrum Analyzer : R&S FSP40
- Attenuation : Auto
- Center Frequency : 2412 MHz / 2437 MHz / 2462 MHz
- Span Frequency : > 6dB Bandwidth
- RB : 100 kHz
- VB : 100 kHz
- Detector : Peak
- Trace : Max Hold
- Sweep Time : Auto

5.1.4. Test Procedures

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz. Trace to Max hold and Detector PK.
3. The 6dB bandwidth is the spectrum width with level below the peak level.
4. Repeat above 1~3 points for the lowest, middle and highest channel of the EUT.

5.1.5. Test Setup Layout

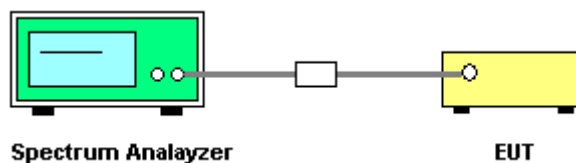

5.1.6. Test Criteria


All test results complied with the requirements of 15.247(a)(2). Measurement Uncertainty is 1×10^{-5} .

5.1.7. Test Result

- Temperature: 25°C
- Relative Humidity: 60%
- Test Engineer: Leo Hung


Modulation Type	Channel No.	Frequency (MHz)	6dB Bandwidth	99% Occupied BW	Min. Limit
DSSS	01	2412 MHz	8.76	14.72	0.5
DSSS	06	2437 MHz	8.72	14.72	0.5
DSSS	11	2462 MHz	9.44	14.72	0.5
OFDM	01	2412 MHz	16.36	16.36	0.5
OFDM	06	2437 MHz	16.32	16.32	0.5
OFDM	11	2462 MHz	16.28	16.32	0.5

Modulation Type: DSSS (Channel 01) :

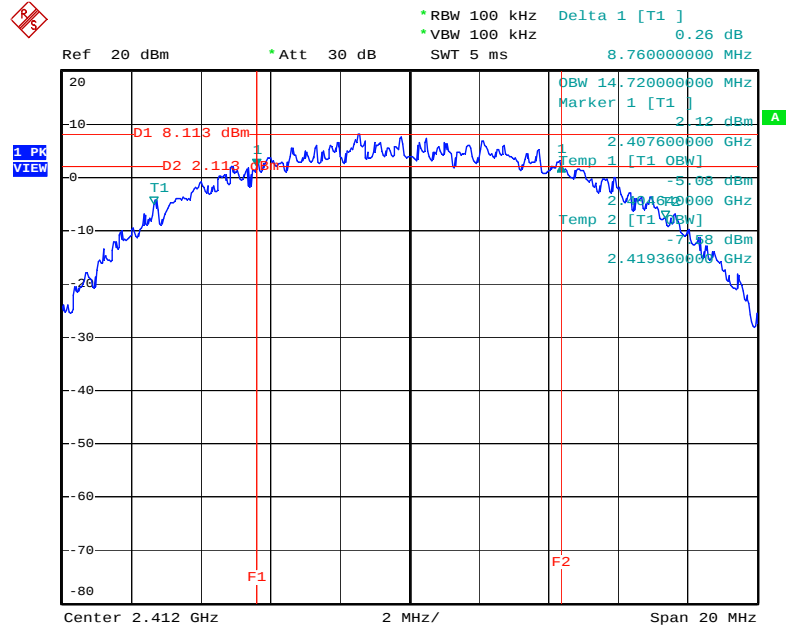


Date: 26.AUG.2005 10:09:16

Modulation Type: DSSS (Channel 06) :

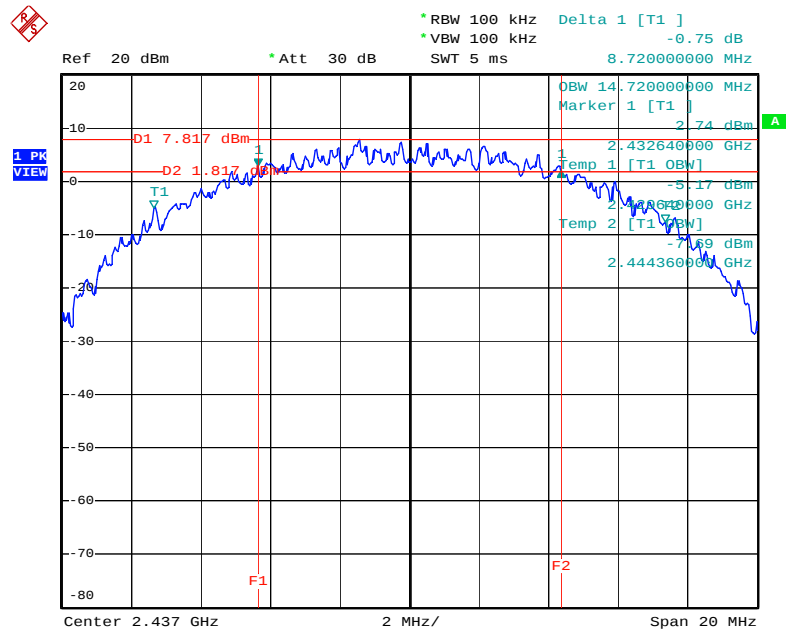


Date: 26.AUG.2005 10:11:01

Modulation Type: DSSS (Channel 11) :

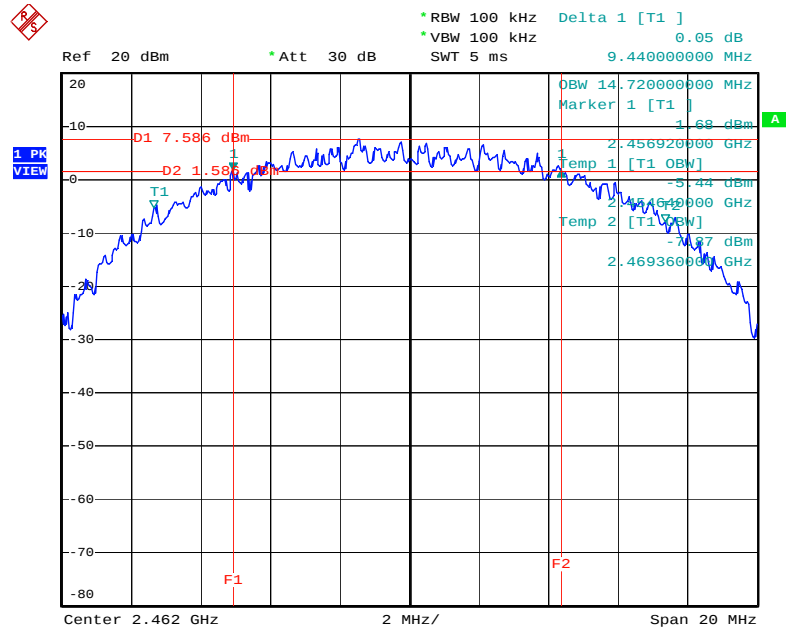


Date: 26.AUG.2005 10:11:42

Modulation Type: OFDM (Channel 01) :

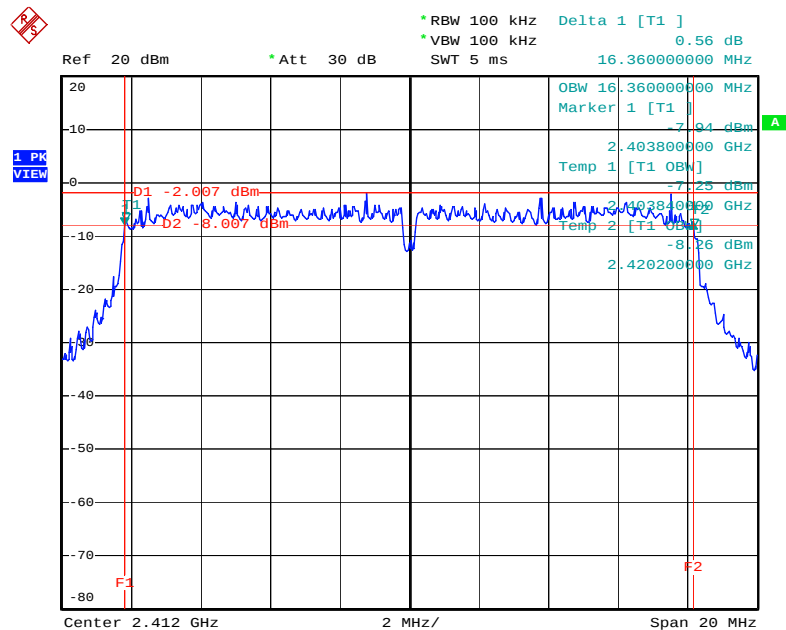


Date: 26.AUG.2005 10:13:20

Modulation Type: OFDM (Channel 06) :

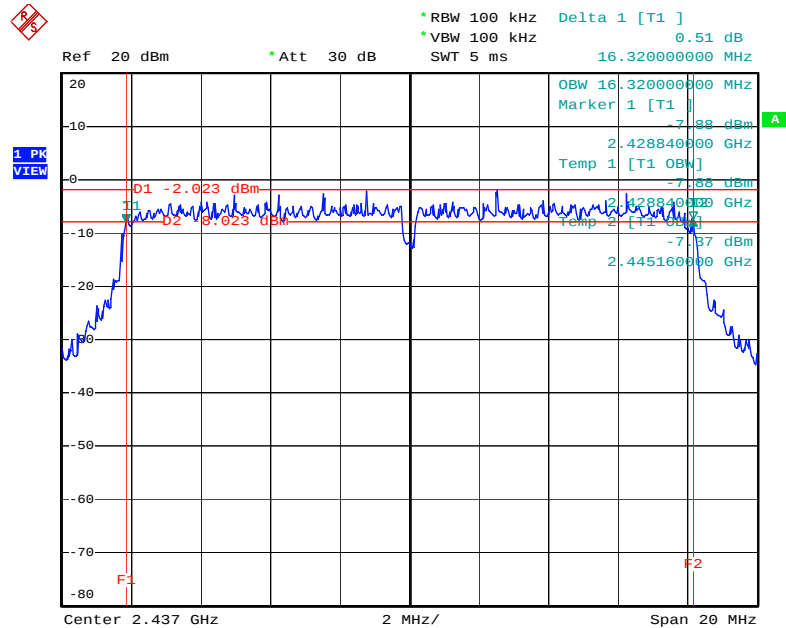

Date: 26.AUG.2005 10:14:24

Modulation Type: OFDM (Channel 11) :

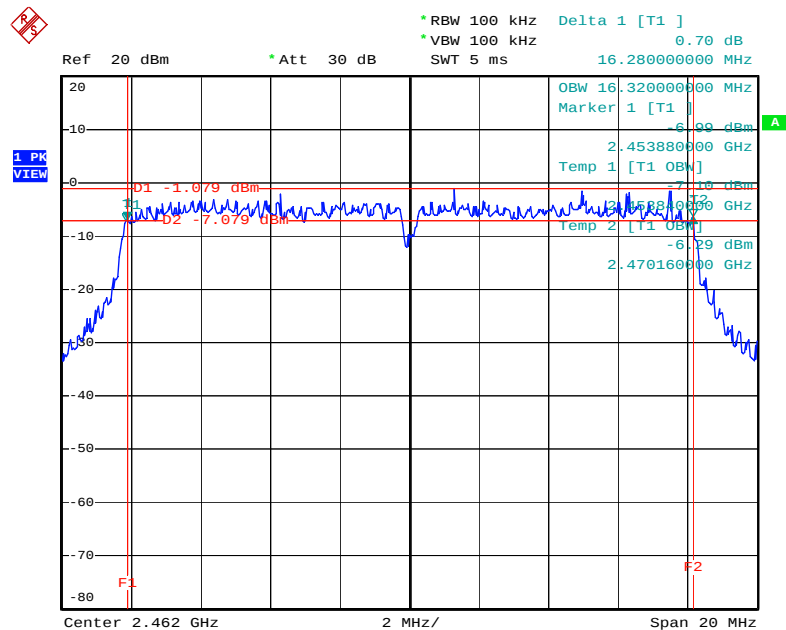

Date: 26.AUG.2005 10:16:02

5.2. Test of Maximum Peak Conducted Output Power

5.2.1. Applicable Standard

Section 15.247(b)(3): The maximum peak output power shall not exceed 1 watt (30dBm). Except as shown below, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the above stated values by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


5.2.2. Measuring Instruments

Item 21, 23 of the table on section 6.

5.2.3. Test Procedures and Test Instruments Setting

1. The transmitter output was connected to the peak power meter through an attenuator.
2. Repeated point 1 for the lowest, middle and highest channel of the EUT.

5.2.4. Test Setup Layout

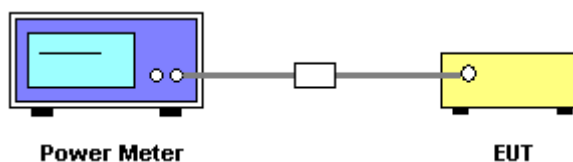

5.2.5. Test Criteria

All test results complied with the requirements of 15.247(b)(3). Measurement Uncertainty is 1.5dB.

5.2.6. Test Result of Conducted Power

- Temperature: 25°C
- Relative Humidity: 60%
- Test Engineer: Leo Hung

Modulation Type	Channel No.	Frequency (MHz)	Output Power (dBm)	Limits (dBm)
DSSS	01	2412 MHz	17.30	30
DSSS	06	2437 MHz	17.01	30
DSSS	11	2462 MHz	17.50	30
OFDM	01	2412 MHz	16.30	30
OFDM	06	2437 MHz	15.50	30
OFDM	11	2462 MHz	16.60	30

5.3. Test of Peak Power Spectral Density

5.3.1. Applicable Standard

Section 15.247(e): For digital modulation systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.3.2. Measuring Instruments

Item 20 of the table on section 6.


5.3.3. Description of Major Test Instruments Setting

- Spectrum Analyzer : R&S FSP40
- Attenuation : Auto
- Center Frequency : 2412 MHz / 2437 MHz / 2462 MHz
- Span Frequency : 1.5MHz
- RB : 3 kHz
- VB : 30 kHz
- Detector : Peak
- Trace : Max Hold
- Sweep Time : 500s

5.3.4. Test Procedures

1. The transmitter output is connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.
5. Repeated points 1~4 for the lowest, middle and highest channel of the EUT.

5.3.5. Test Setup Layout

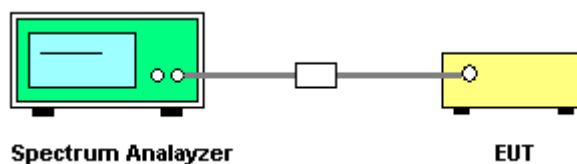

5.3.6. Test Criteria

All test results complied with the requirements of 15.247(e). Measurement Uncertainty is 1.5dB.


5.3.7. Test Result

- Temperature: 25°C
- Relative Humidity: 60%
- Test Engineer: Leo Hung


Modulation Type	Channel No.	Frequency (MHz)	Power Density (dBm)	Limits (dBm)
DSSS	01	2412 MHz	-8.22	8
DSSS	06	2437 MHz	-7.97	8
DSSS	11	2462 MHz	-8.65	8
OFDM	01	2412 MHz	-12.11	8
OFDM	06	2437 MHz	-12.87	8
OFDM	11	2462 MHz	-12.10	8



Modulation Type: DSSS (Channel 01) :

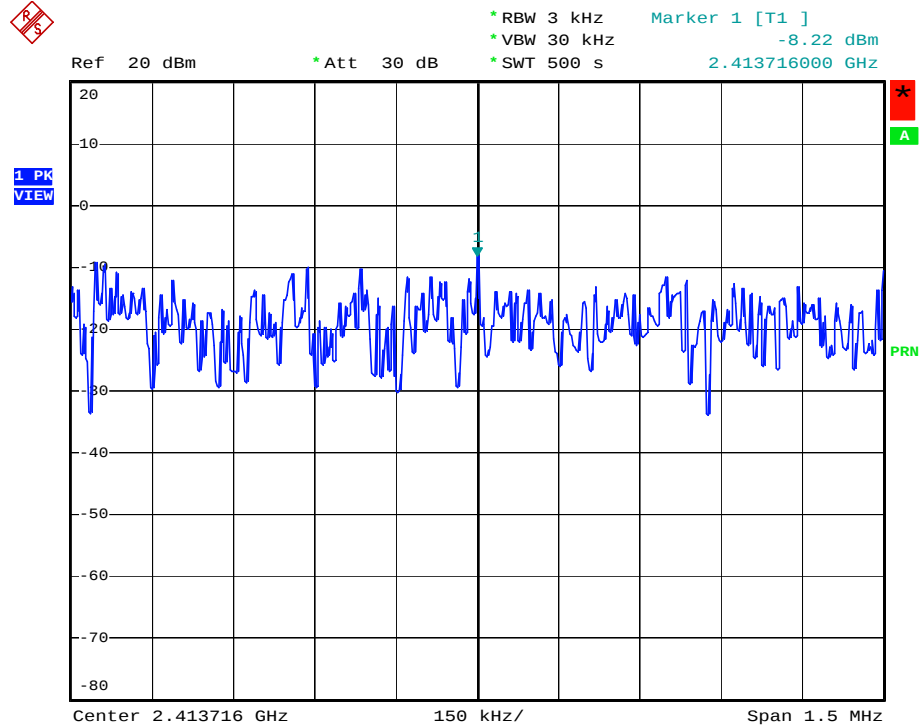


Modulation Type: DSSS (Channel 06) :

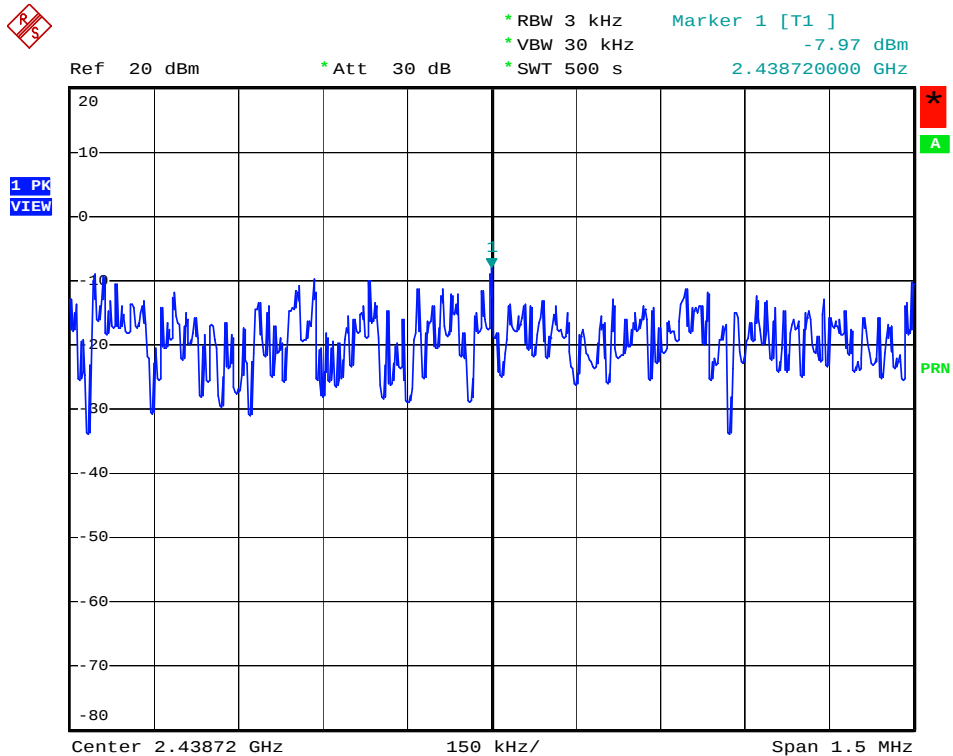





Modulation Type: DSSS (Channel 11) :

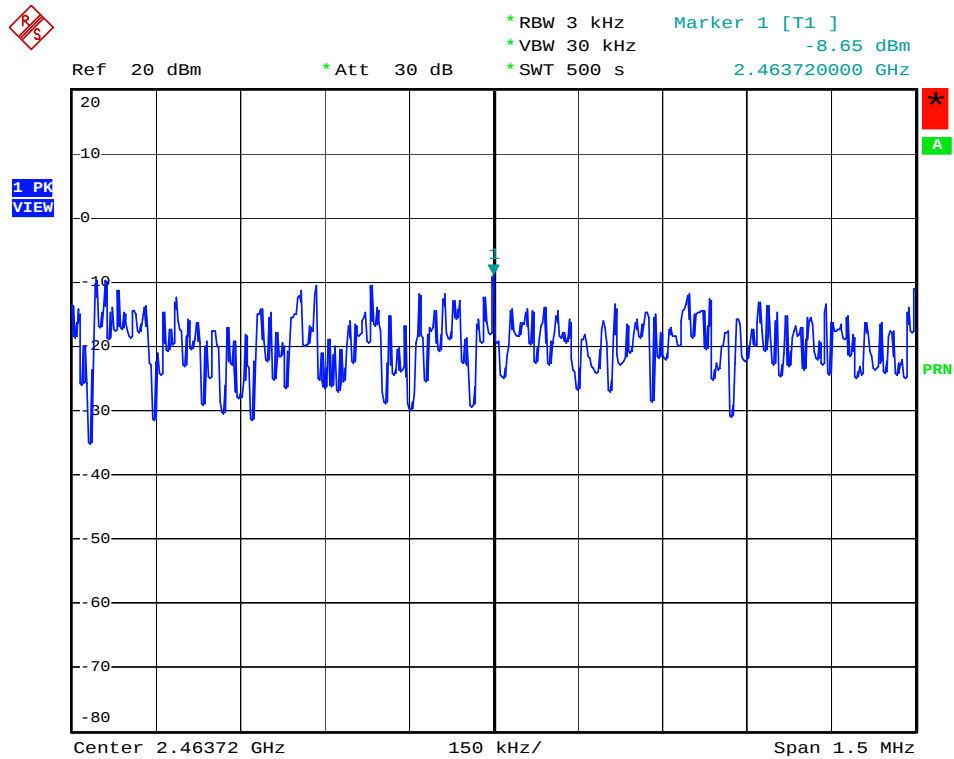


Modulation Type: OFDM (Channel 01) :

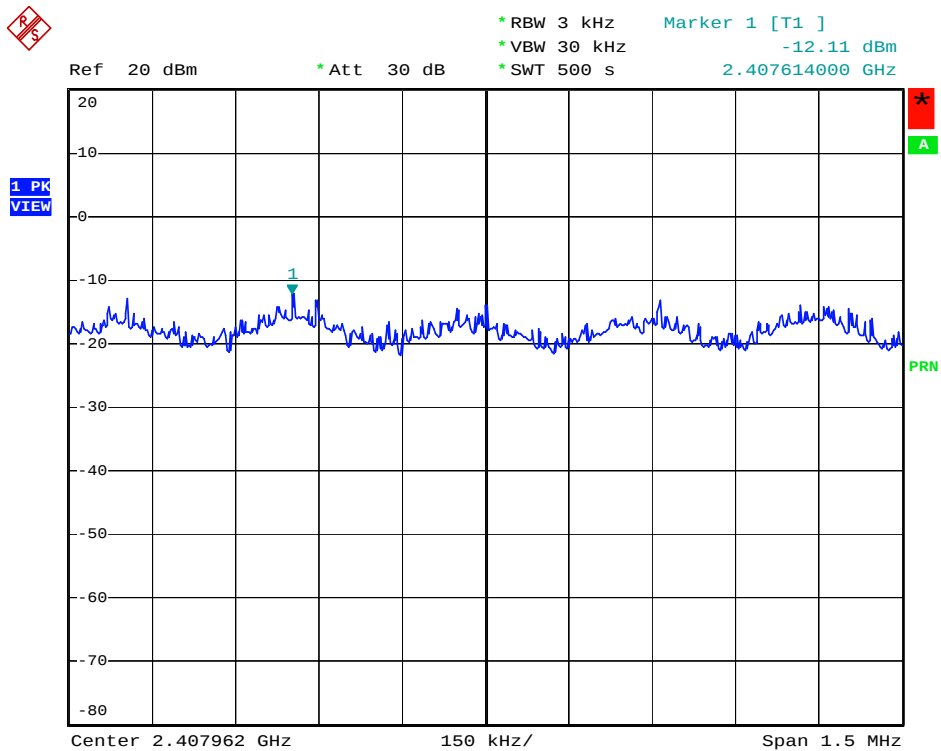

Modulation Type: OFDM (Channel 06) :

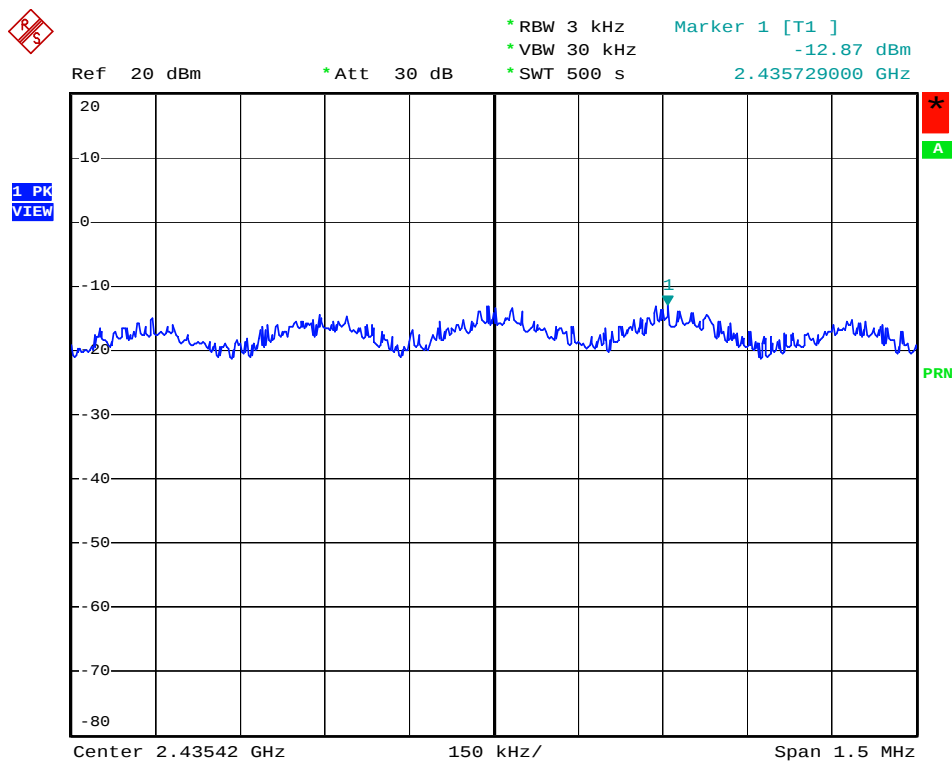

Modulation Type: OFDM (Channel 11) :

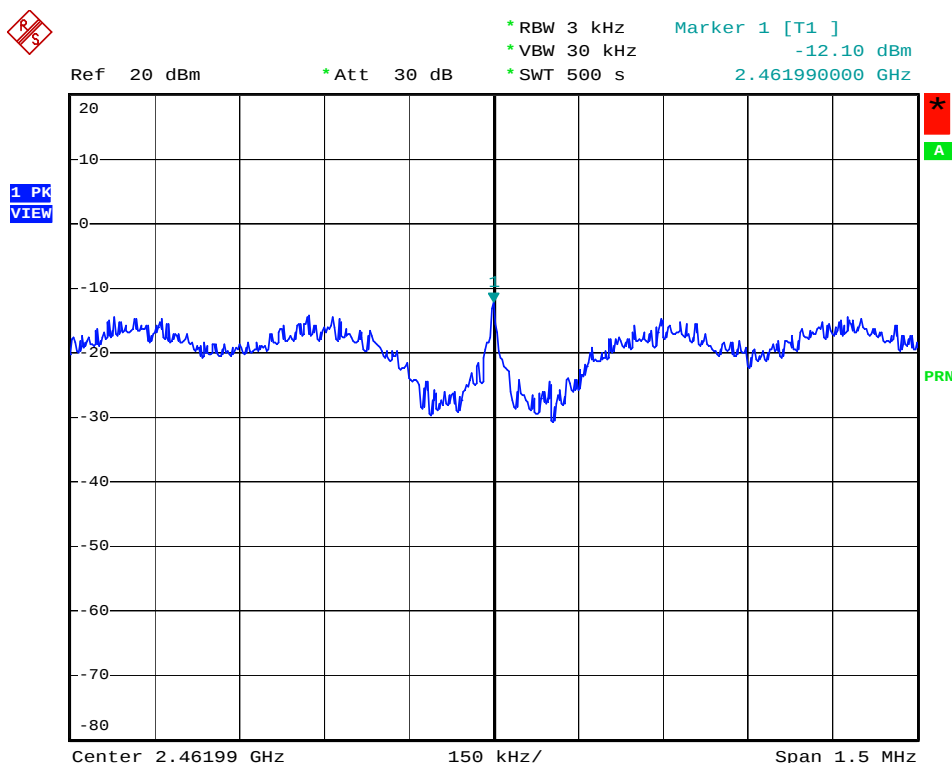

5.4. Test of Band Edges Emission

5.4.1. Applicable Standard

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

5.4.2. Measuring Instruments

Item 6~19 of the table on section 6 for radiated measurement.

Item 20 of the table on section 6 for conducted measurement.

5.4.3. Description of Major Test Instruments Setting

- Spectrum Analyzer : R&S FSP40 (Conducted Measurement)
 - Attenuation : Auto
 - Center Frequency : 2412 MHz / 2462 MHz
 - Span Frequency : 100MHz
 - RB : 100 kHz
 - VB : 100 kHz
 - Detector : Peak
 - Trace : Max Hold
 - Sweep Time : Auto
- Spectrum Analyzer : R&S FSP40 (Radiated Measurement)
 - Attenuation : Auto
 - Center Frequency : 2412 MHz / 2462 MHz
 - Span Frequency : 100MHz
 - RB : 1 MHz for PK value / 1 MHz for AV value
 - VB : 1 MHz for PK value / 10 Hz for AV value
 - Detector : Peak
 - Trace : Max Hold
 - Sweep Time : Auto

5.4.4. Test Procedures and Test Instruments Setting

Conducted Measurement

1. The transmitter is set to the lowest channel.
2. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.
3. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100MHz bandwidth from lower band edge. Then detector set to peak and max hold trace.


4. The lowest band edges emission was measured and recorded.
5. The transmitter set to the highest channel and repeated 2~4.

Radiated Measurement


1. Configure the EUT according to ANSI C63.4-2003.
2. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
4. For band edge emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. For band edge emission in restriction bands, use 10Hz VBW and 1MHz RBW for reading under AV and use 1MHz VBW and 1 MHz RBW for reading under PK.
6. The transmitter set to the highest channel and repeated 2~5.

5.4.5. Test Setup

Radiated Method

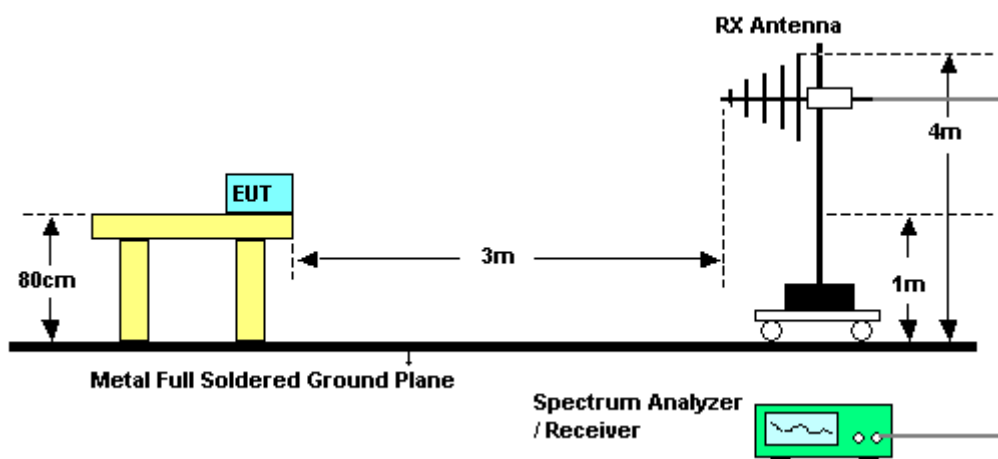

Conducted Method

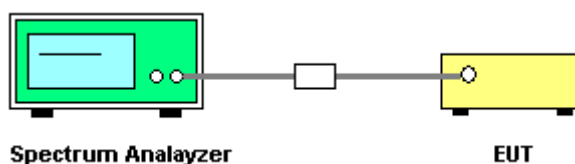


5.4.6. Test Criteria

All test results complied with the requirements of 15.247(d). Measurement Uncertainty is 1×10^{-5} .


5.4.7. Test Result of Radiated Emission

- Temperature: 25°C
- Relative Humidity: 60%
- Test Engineer: Leo Hung
- Modulation Type: DSSS
- Test Channel: CH 01 / 2412 MHz

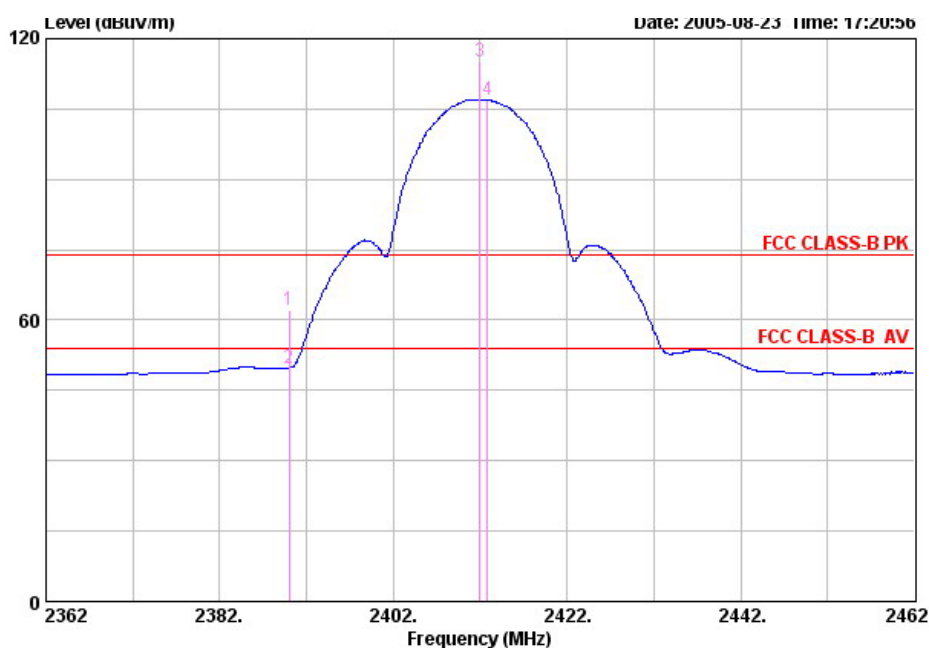


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	2390.000	62.26	-11.74	74.00	26.66	28.88	6.72	0.00	PEAK	---
2	2390.000	49.82	-4.18	54.00	14.22	28.88	6.72	0.00	AVERAGE	---

- Temperature: 25°C
- Relative Humidity: 60%
- Test Engineer: Leo Hung
- Modulation Type: DSSS
- Test Channel: CH 11 / 2462 MHz

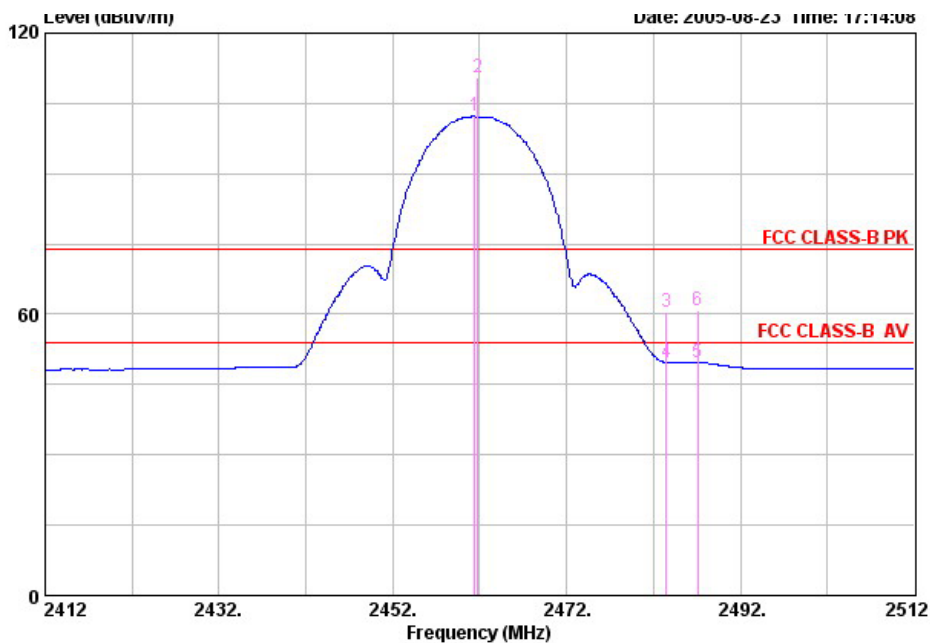


Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
2483.500	60.60	-13.40	74.00	24.68	28.98	6.94	0.00	PEAK	---	---
2483.500	49.67	-4.33	54.00	13.75	28.98	6.94	0.00	AVERAGE	---	---
2487.100	49.78	-4.22	54.00	13.86	28.98	6.94	0.00	AVERAGE	---	---
2487.100	60.97	-13.03	74.00	25.05	28.98	6.94	0.00	PEAK	---	---

- Temperature: 25°C
- Relative Humidity: 60%
- Test Engineer: Leo Hung
- Modulation Type: OFDM
- Test Channel: CH 01 / 2412 MHz

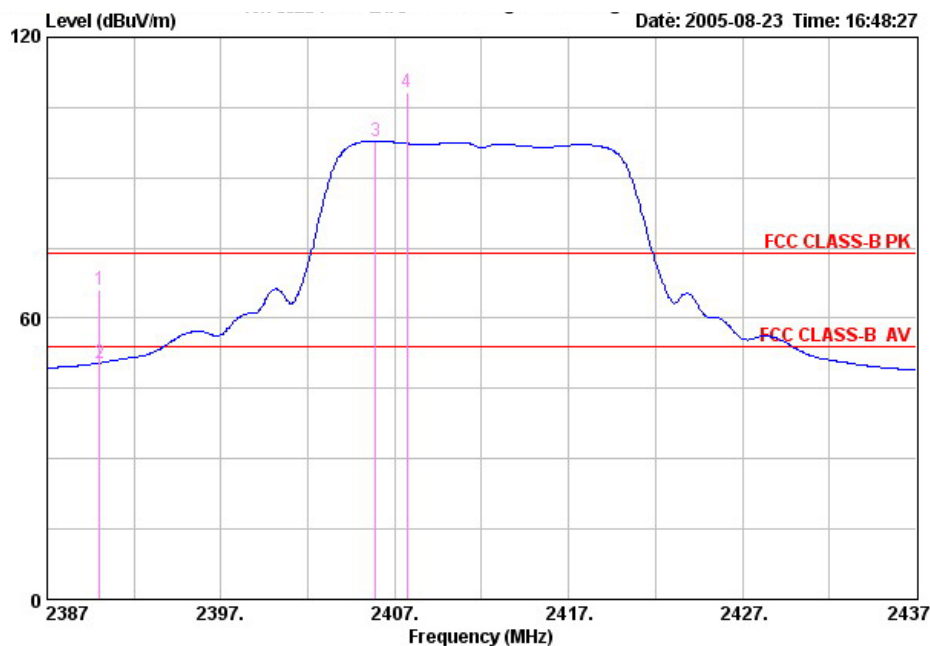

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	2390.000	66.13	-7.87	74.00	30.53	28.88	6.72	0.00	PEAK	---	---
2	2390.000	50.40	-3.60	54.00	14.80	28.88	6.72	0.00	AVERAGE	---	---


- Temperature: 25°C
- Relative Humidity: 60%
- Test Engineer: Leo Hung
- Modulation Type: OFDM
- Test Channel: CH 11 / 2462 MHz

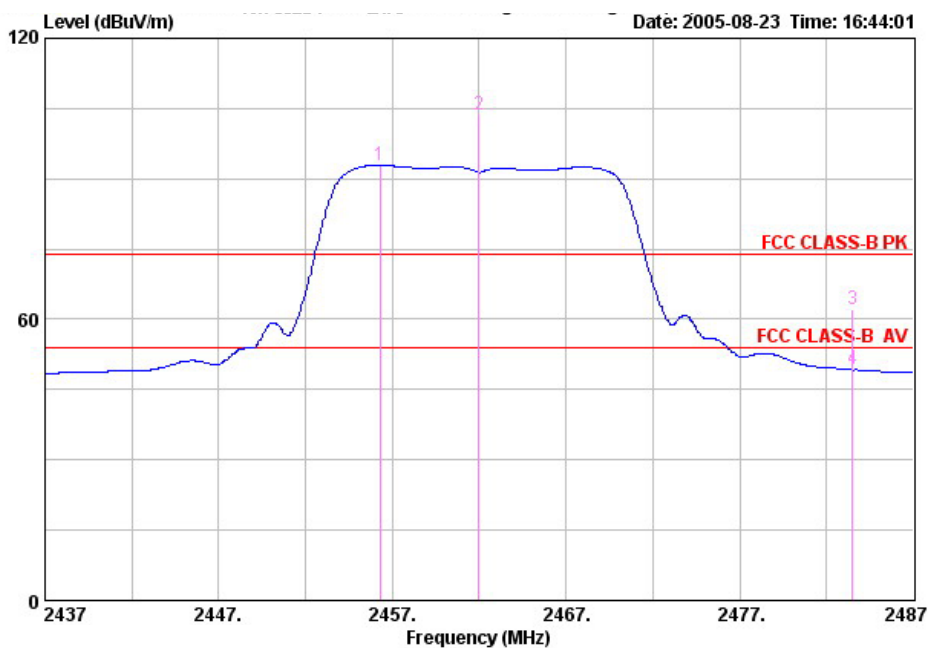

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
2483.500	62.26	-11.74	74.00	26.34	28.98	6.94	0.00	PEAK	---	---
2483.500	49.24	-4.76	54.00	13.32	28.98	6.94	0.00	AVERAGE	---	---


5.4.8. Test Result of Conducted Emission

Modulation Type: DSSS (Channel 01) :

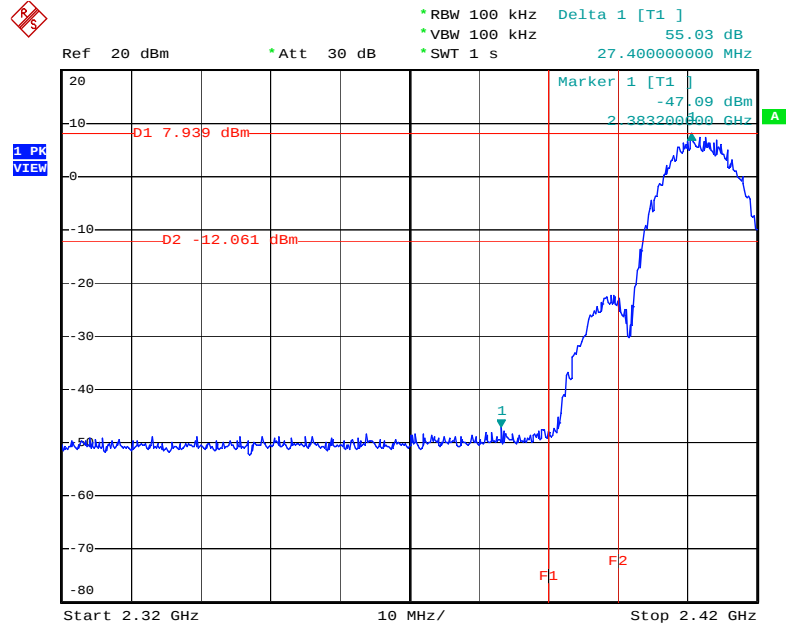


Date: 26.AUG.2005 10:09:49

Modulation Type: DSSS (Channel 11) :

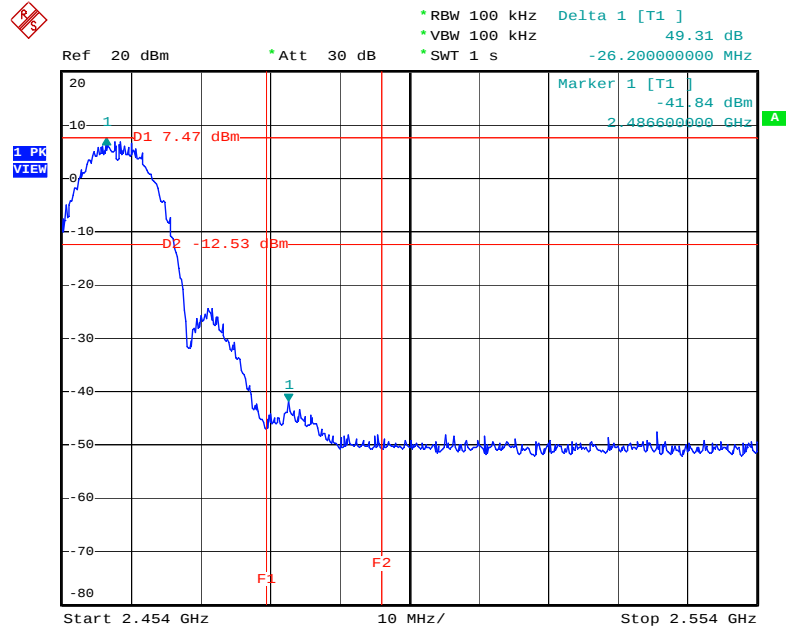


Date: 26.AUG.2005 10:12:05

Modulation Type: OFDM (Channel 01) :

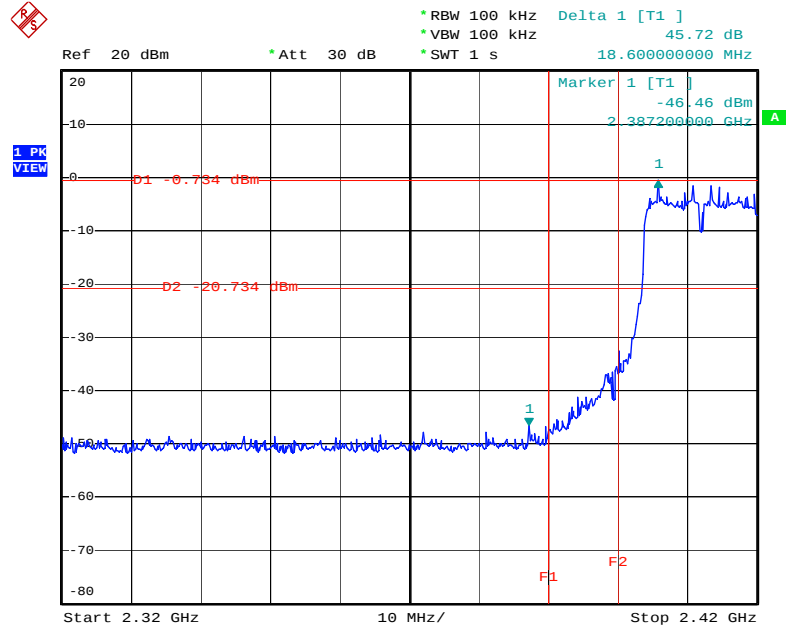

Date: 26.AUG.2005 10:13:54

Modulation Type: OFDM (Channel 11) :

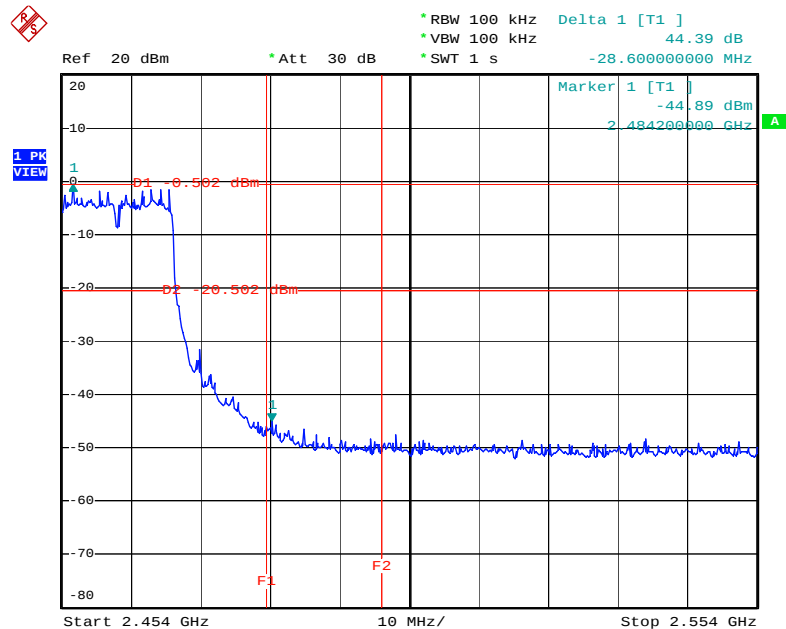

Date: 26.AUG.2005 10:16:26

5.5. Test of AC Power Line Conducted Emission

5.5.1. Applicable Standard

Section 15.207: For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

5.5.2. Measuring Instruments

Please reference item 1~5 in chapter 6 for the instruments used for testing.


5.5.3. Description of Major Test Instruments Setting

- Test Receiver : R&S ESCS 30
- Attenuation : 10 dB
- Start Frequency : 0.15 MHz
- Stop Frequency : 30 MHz
- IF Bandwidth : 9 KHz

5.5.4. Test Procedures

1. Configure the EUT according to ANSI C63.4-2003.
2. The EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN)
4. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
5. The frequency range from 150 KHz to 30 MHz was searched.
6. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
7. The measurement has to be done between each power line and ground at the power terminal for each RF channel.

5.5.5. Test Setup Layout

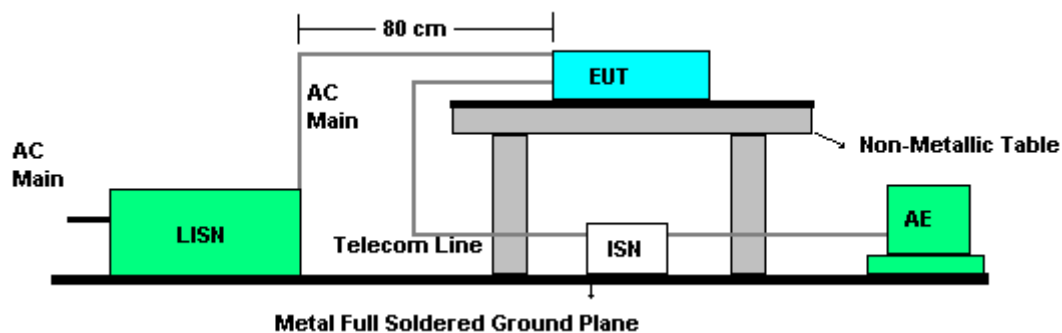


5.5.6. Test Criteria

All test results complied with the requirements of 15.207. Measurement Uncertainty is 2.54dB.

5.5.7. Test Result of Conducted Emission


- Temperature: 25°C
- Relative Humidity: 46%
- Test Engineer: Stan Peng

Line to Ground

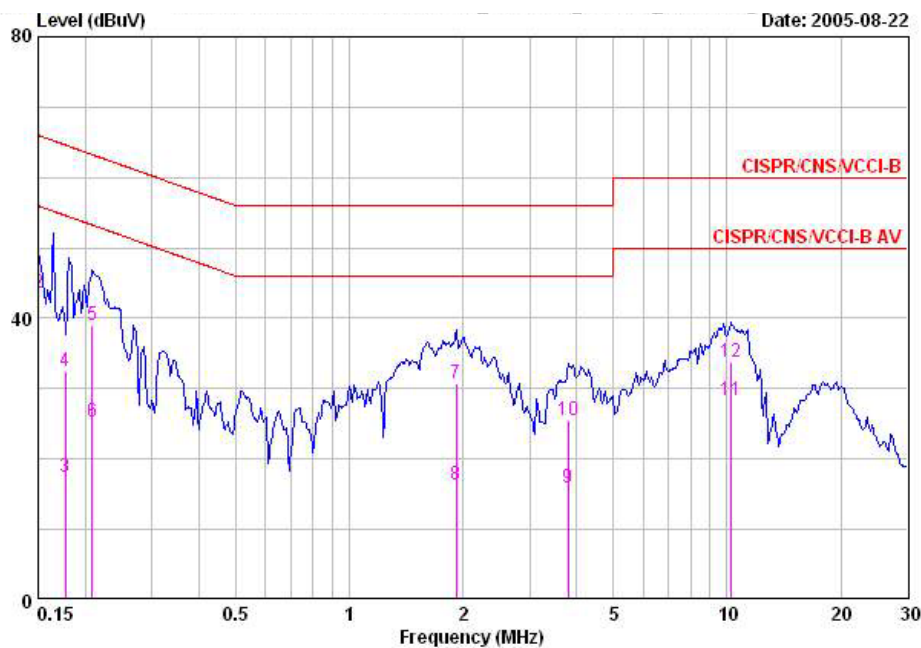

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15000	23.63	-32.37	56.00	23.23	0.20	0.20	AVERAGE
2	0.15000	43.53	-22.47	66.00	43.13	0.20	0.20	QP
3	0.17701	17.51	-37.11	54.62	17.17	0.14	0.20	AVERAGE
4	0.17701	32.49	-32.13	64.62	32.15	0.14	0.20	QP
5	0.20833	39.10	-24.17	63.27	38.81	0.09	0.20	QP
6	0.20833	25.31	-27.96	53.27	25.02	0.09	0.20	AVERAGE
7	1.918	30.68	-25.32	56.00	30.49	0.00	0.19	QP
8	1.918	16.46	-29.54	46.00	16.27	0.00	0.19	AVERAGE
9	3.799	15.90	-30.10	46.00	15.60	0.00	0.30	AVERAGE
10	3.799	25.48	-30.52	56.00	25.18	0.00	0.30	QP
11	10.288	28.24	-21.76	50.00	27.78	0.10	0.36	AVERAGE
12	10.288	33.75	-26.25	60.00	33.29	0.10	0.36	QP

Neutral to Ground

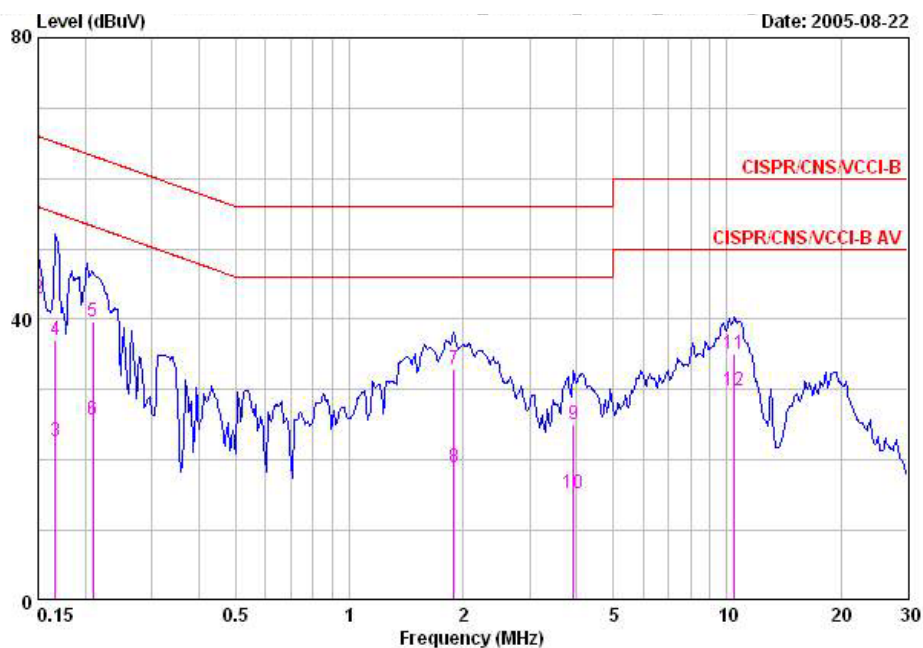

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15000	24.76	-31.24	56.00	24.36	0.20	0.20	AVERAGE
2	0.15000	42.88	-23.12	66.00	42.48	0.20	0.20	QP
3	0.16677	22.56	-32.56	55.12	22.20	0.16	0.20	AVERAGE
4	0.16677	37.14	-27.98	65.12	36.78	0.16	0.20	QP
5	0.20981	39.74	-23.47	63.21	39.44	0.10	0.20	QP
6	0.20981	25.63	-27.58	53.21	25.33	0.10	0.20	AVERAGE
7	1.888	32.90	-23.10	56.00	32.72	0.00	0.18	QP
8	1.888	18.93	-27.07	46.00	18.75	0.00	0.18	AVERAGE
9	3.922	25.12	-30.88	56.00	24.82	0.00	0.30	QP
10	3.922	15.23	-30.77	46.00	14.93	0.00	0.30	AVERAGE
11	10.464	35.04	-24.96	60.00	34.65	0.00	0.39	QP
12	10.464	29.90	-20.10	50.00	29.51	0.00	0.39	AVERAGE

5.5.8. Photographs of Conducted Emission Test Configuration

FRONT VIEW



REAR VIEW



5.6. Test of Spurious Radiated Emission

5.6.1. Applicable Standard

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

5.6.2. Measuring Instruments

Please reference item 6~19 in chapter 6 for the instruments used for testing.

5.6.3. Description of Major Test Instruments Setting


- Spectrum Analyzer : R&S FSP40
 - Attenuation : Auto
 - Start Frequency : 1000 MHz
 - Stop Frequency : 10th carrier harmonic
 - RB / VB : 1 MHz / 1MHz for Peak
 - RB / VB : 1 MHz / 10Hz for Average
- Test Receiver : R&S ESCS 30
 - Attenuation : Auto
 - Start Frequency : 30 MHz
 - Stop Frequency : 1000 MHz
 - RB : 120 KHz for QP or PK

5.6.4. Test Procedures

1. Configure the EUT according to ANSI C63.4-2003.
2. The EUT was placed on the top of the turntable 0.8 meter above ground.
3. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
4. Power on the EUT and all the supporting units.
5. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
6. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
7. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
8. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
9. For emission above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.

10. If the emission level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz and average method for above the 1GHz. the reported.
11. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB higher than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

5.6.5. Test Setup Layout

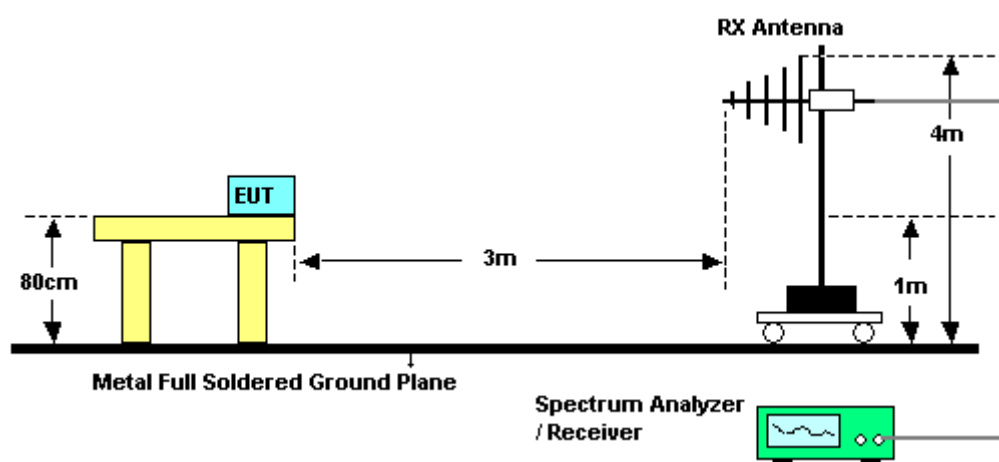


5.6.6. Test Criteria

All test results complied with the requirements of 15.247(d). Measurement Uncertainty is 2.26dB.

5.6.7. Test Results for CH 06 / 2437 MHz (for emission below 1GHz)

- Modulation Type: OFDM
- Temperature: 28°C
- Relative Humidity: 58%
- Test Engineer: Ken Tu


(A) Polarization: Horizontal

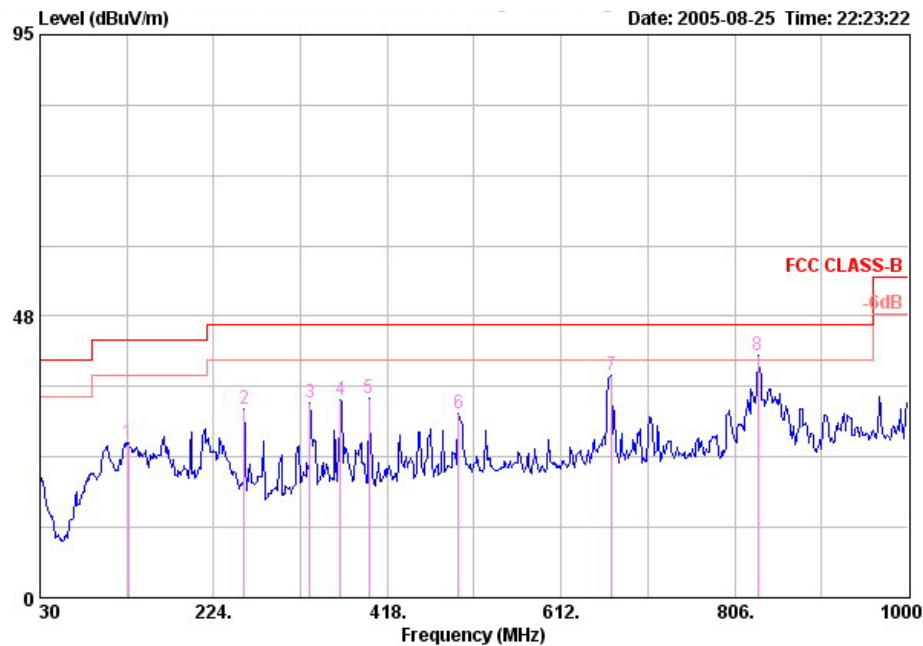

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	128.940	26.26	-17.24	43.50	44.61	11.62	1.70	31.67 Peak	---	---
2	257.950	31.97	-14.03	46.00	48.20	12.63	2.48	31.35 Peak	---	---
3	331.670	32.77	-13.23	46.00	47.83	13.88	2.33	31.27 Peak	---	---
4	365.620	33.43	-12.57	46.00	47.32	14.79	2.49	31.17 Peak	---	---
5	397.630	33.58	-12.42	46.00	46.21	15.73	2.69	31.04 Peak	---	---
6	497.540	31.04	-14.96	46.00	41.55	17.16	3.27	30.94 Peak	---	---
7	668.260	37.56	-8.44	46.00	45.66	18.74	3.54	30.38 Peak	---	---
8 @	832.190	40.87	-5.13	46.00	46.68	20.41	3.93	30.14 Peak	---	---



(B) Polarization: Vertical

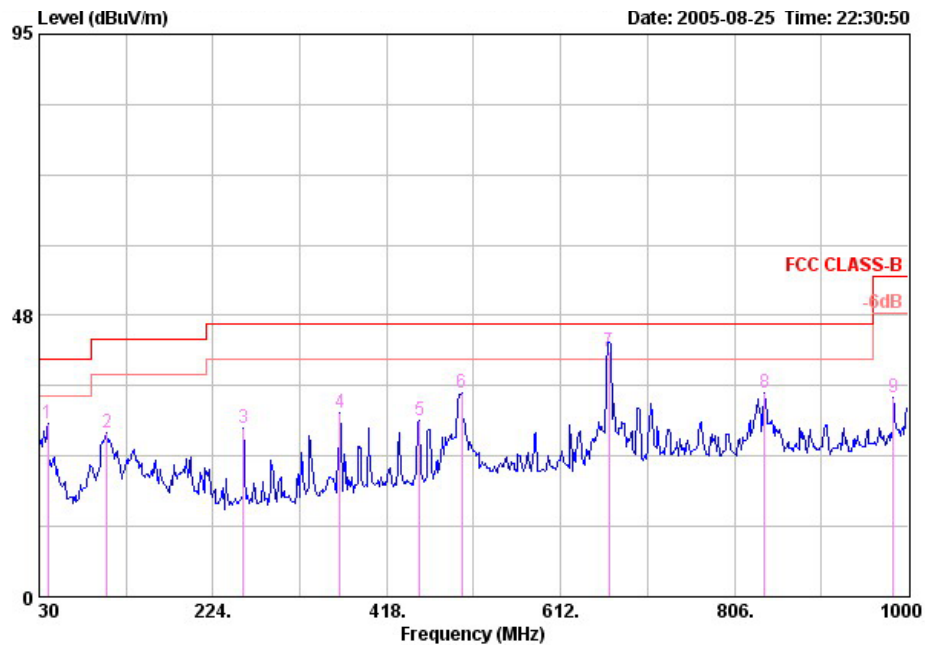

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	39.700	29.15	-10.85	40.00	47.42	12.40	1.10	31.77	Peak	---	---
2	105.660	27.58	-15.92	43.50	46.85	10.95	1.50	31.72	Peak	---	---
3	257.950	28.51	-17.49	46.00	44.74	12.63	2.48	31.35	Peak	---	---
4	365.620	31.14	-14.86	46.00	45.04	14.79	2.49	31.17	Peak	---	---
5	454.860	29.89	-16.11	46.00	41.34	16.52	2.95	30.92	Peak	---	---
6	501.420	34.39	-11.61	46.00	44.83	17.20	3.30	30.94	Peak	---	---
7	666.000	41.39	-4.61	46.00	49.50	18.73	3.53	30.37	QP	---	---
8	839.950	34.44	-11.56	46.00	40.20	20.41	3.96	30.13	Peak	---	---
9	983.510	33.61	-20.39	54.00	37.78	21.28	3.97	29.42	Peak	---	---


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level


5.6.8. Test Results for CH 01 / 2412 MHz (for emission above 1GHz)

- Modulation Type: CCK
- Temperature: 28°C
- Relative Humidity: 58%
- Test Engineer: Ken Tu

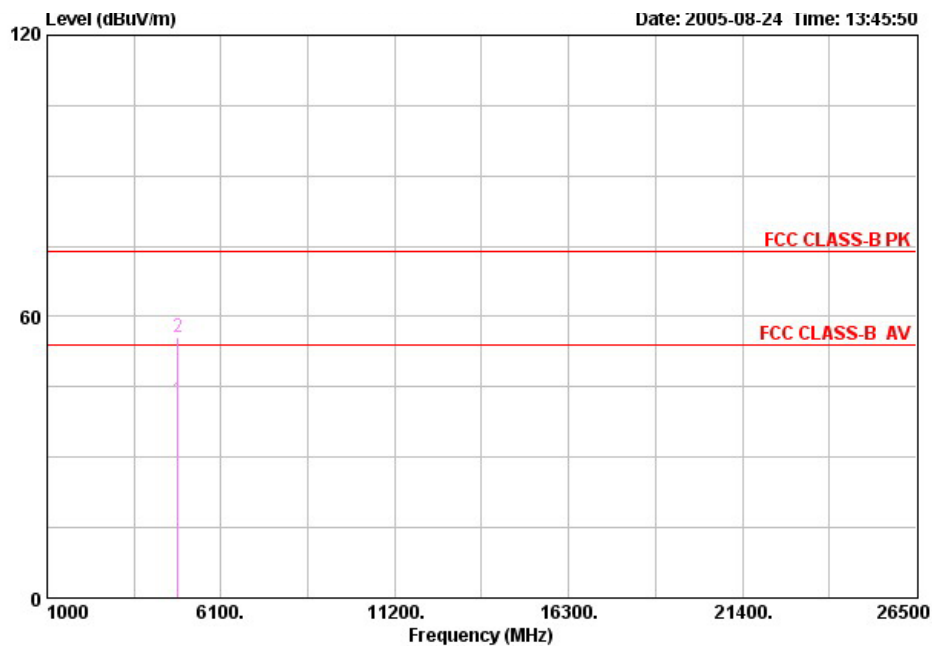(A) Polarization: Horizontal


	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	4823.200	42.25	-11.75	54.00	32.76	32.83	11.82	35.16	AVERAGE	---	---
2	4824.028	55.50	-18.50	74.00	46.01	32.83	11.82	35.16	PEAK	---	---

(B) Polarization: Vertical

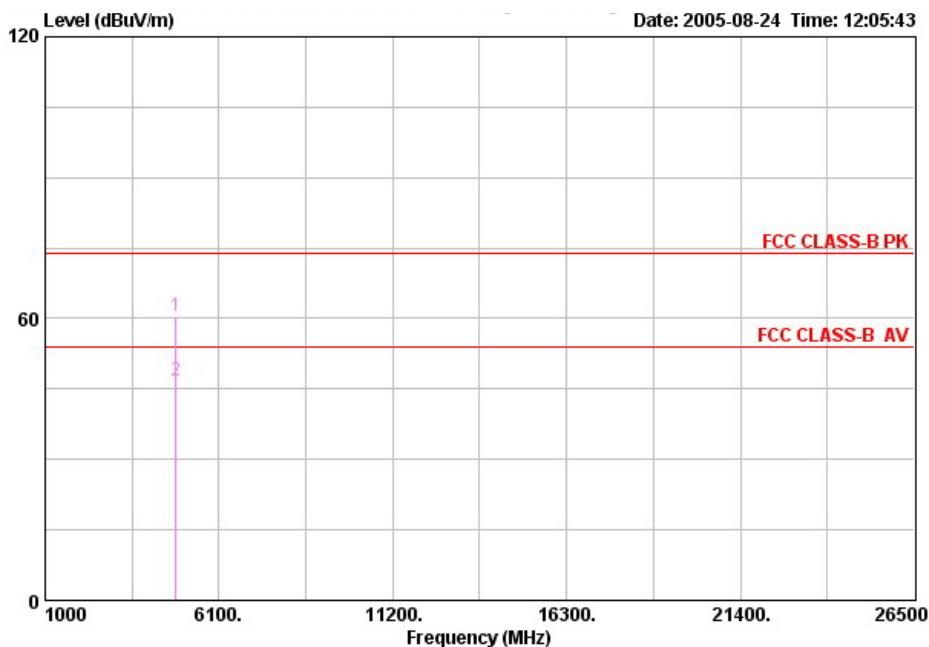

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4824.020	60.49	-13.51	74.00	51.00	32.83	11.82	35.16	PEAK	---	---
2	4825.900	46.89	-7.11	54.00	37.41	32.83	11.82	35.16	AVERAGE	---	---

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

5.6.9. Test Results for CH 06 / 2437 MHz (for emission above 1GHz)


- Modulation Type: CCK
- Temperature: 28°C
- Relative Humidity: 58%
- Test Engineer: Ken Tu

(A) Polarization: Horizontal

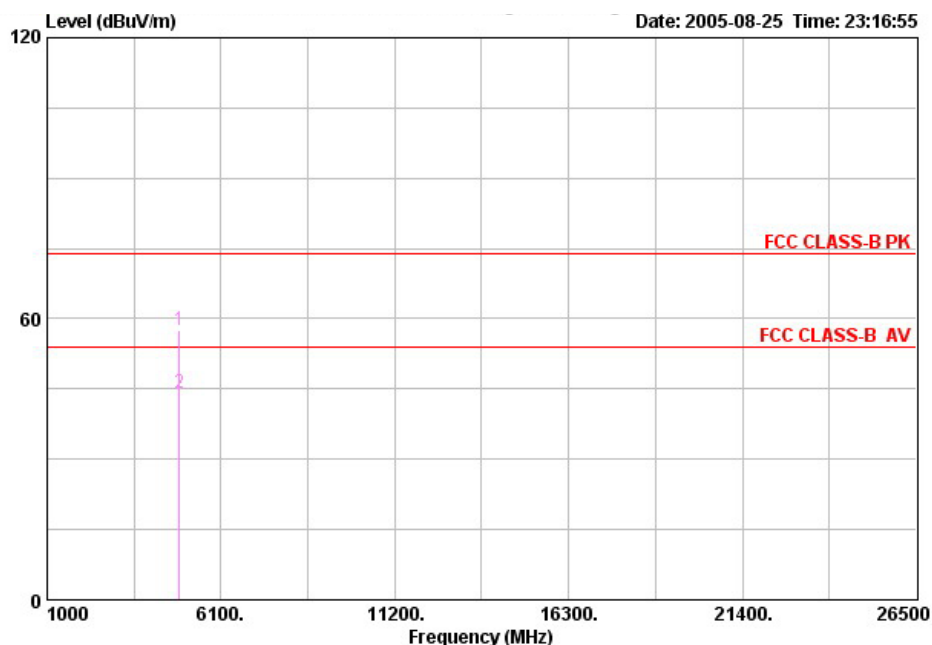

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4874.020	57.68	-16.32	74.00	48.08	32.88	11.87	35.15	PEAK	---	---
2 @	4875.900	44.25	-9.75	54.00	34.66	32.88	11.87	35.15	AVERAGE	---	---

(B) Polarization: Vertical

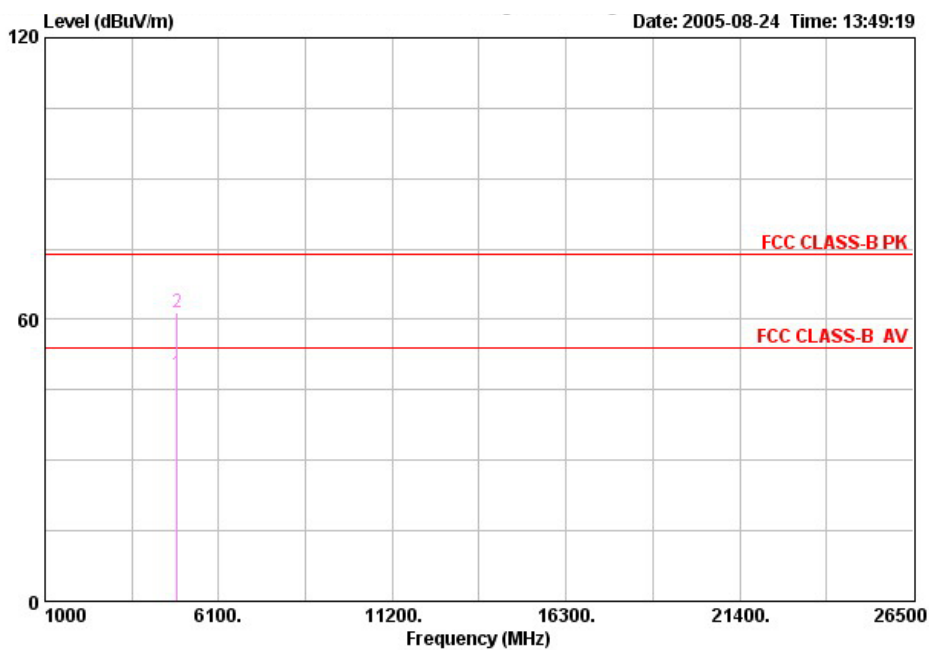

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	4872.120	48.32	-5.68	54.00	38.72	32.88	11.87	35.15	AVERAGE	---	---
2	4873.960	61.58	-12.42	74.00	51.99	32.88	11.87	35.15	PEAK	---	---

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

5.6.10. Test Results for CH 11 / 2462 MHz (for emission above 1GHz)

- Modulation Type: CCK
- Temperature: 28°C
- Relative Humidity: 58%
- Test Engineer: Ken Tu


(A) Polarization: Horizontal

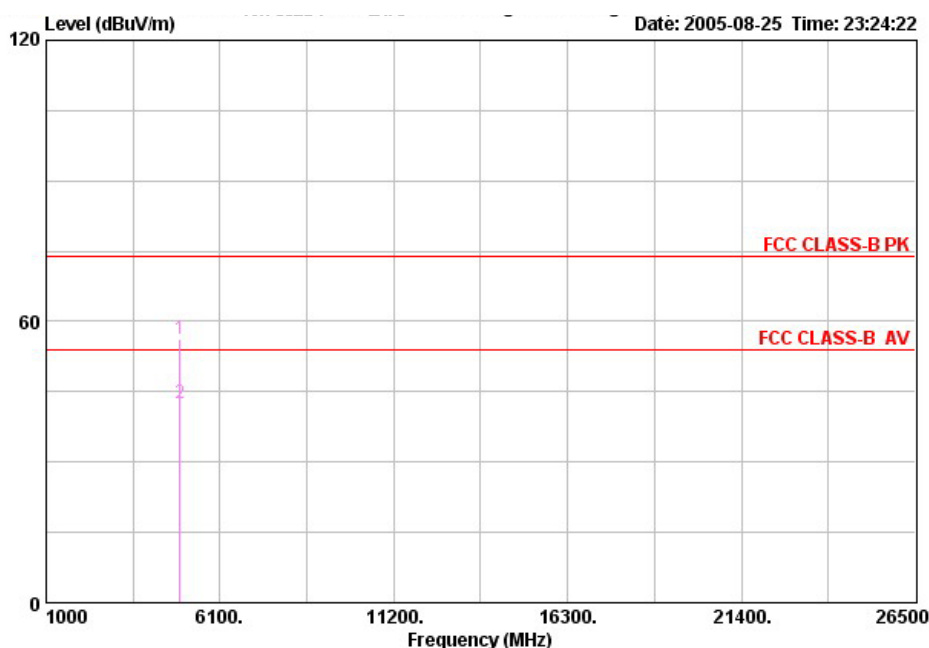

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4924.100	56.40	-17.60	74.00	46.72	32.93	11.89	35.14	PEAK	---	---
2 @	4925.960	42.54	-11.46	54.00	32.86	32.93	11.89	35.14	AVERAGE	---	---



(B) Polarization: Vertical

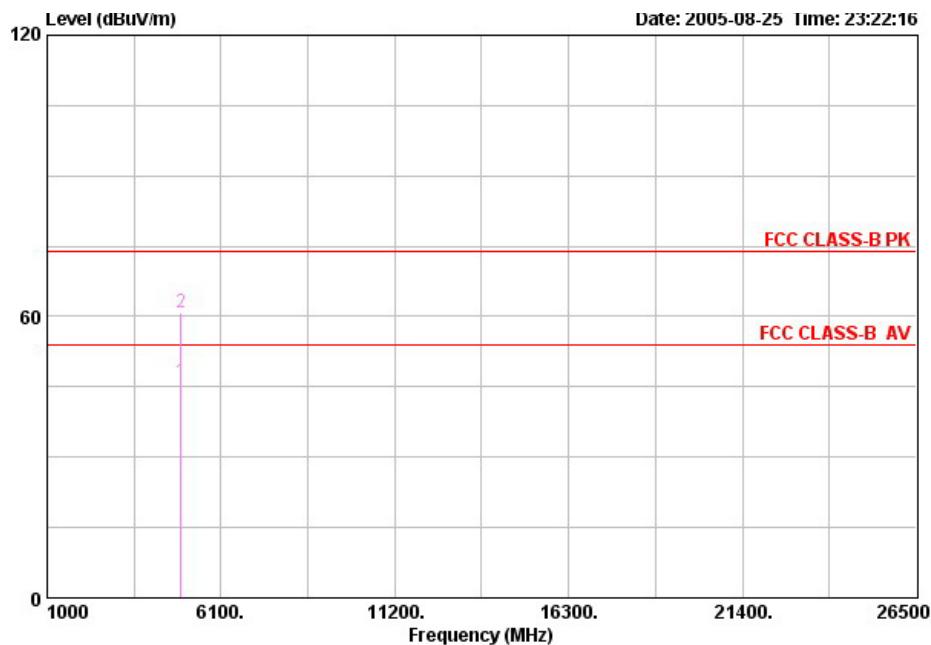

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4922.110	46.05	-7.95	54.00	36.37	32.93	11.89	35.14	AVERAGE	---	---
2	4924.180	60.83	-13.17	74.00	51.15	32.93	11.89	35.14	PEAK	---	---

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

5.6.11. Test Results for CH 01 / 2412 MHz (for emission above 1GHz)


- Modulation Type: OFDM
- Temperature: 28°C
- Relative Humidity: 58%
- Test Engineer: Ken Tu

(A) Polarization: Horizontal

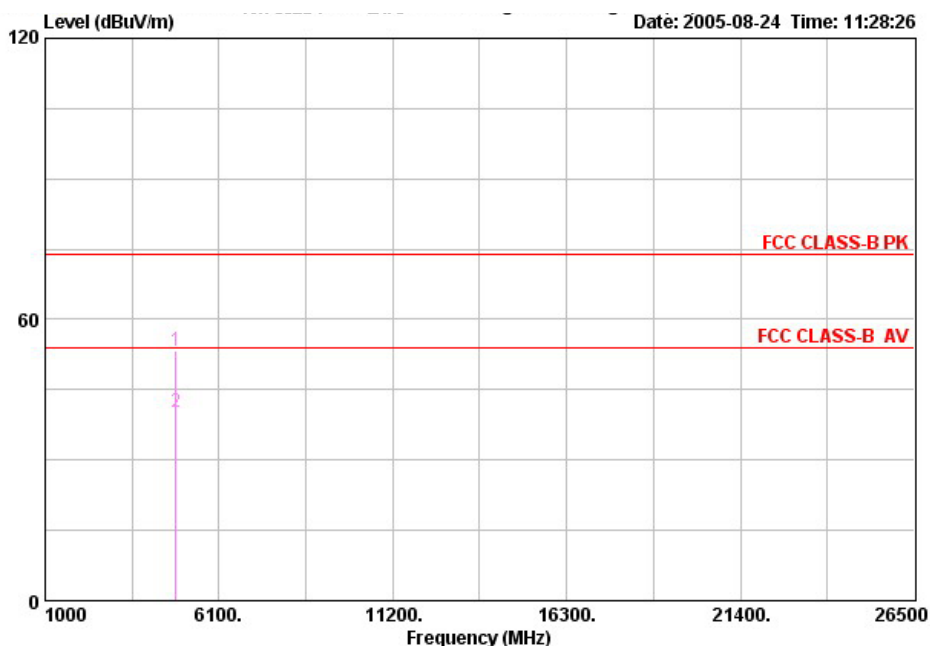

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4823.980	53.35	-20.65	74.00	43.87	32.83	11.82	35.16	Peak	0	0
2	4824.650	40.33	-13.67	54.00	30.85	32.83	11.82	35.16	Average	0	0

(B) Polarization: Vertical

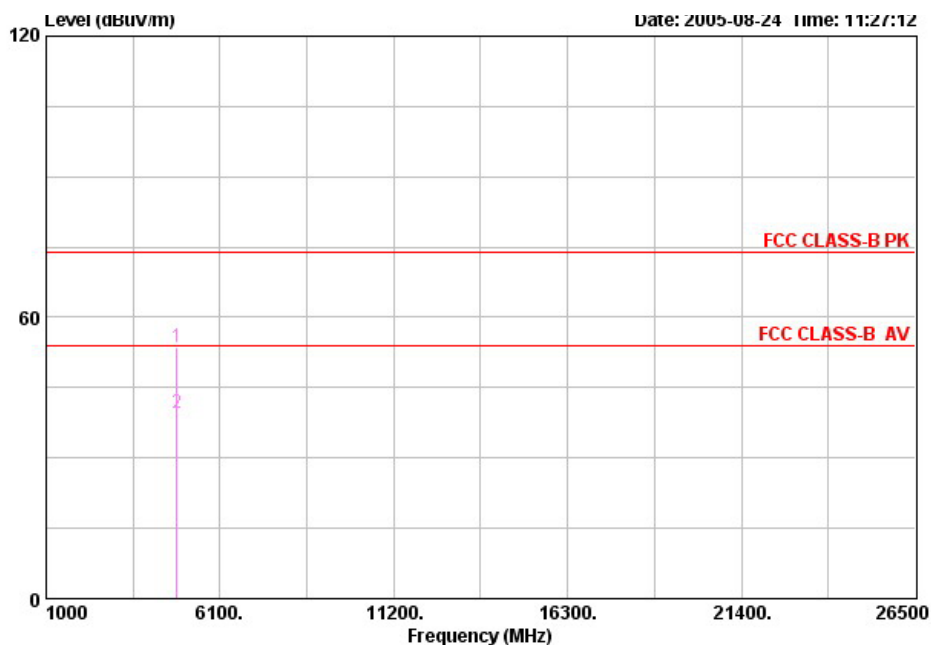

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor		Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4824.120	53.73	-20.27	74.00	44.25	32.83	11.82	35.16	Peak	0	0
2	4824.150	39.63	-14.37	54.00	30.15	32.83	11.82	35.16	Average	0	0


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

5.6.12. Test Results for CH 06 / 2437 MHz (for emission above 1GHz)


- Modulation Type: OFDM
- Temperature: 28°C
- Relative Humidity: 58%
- Test Engineer: Ken Tu

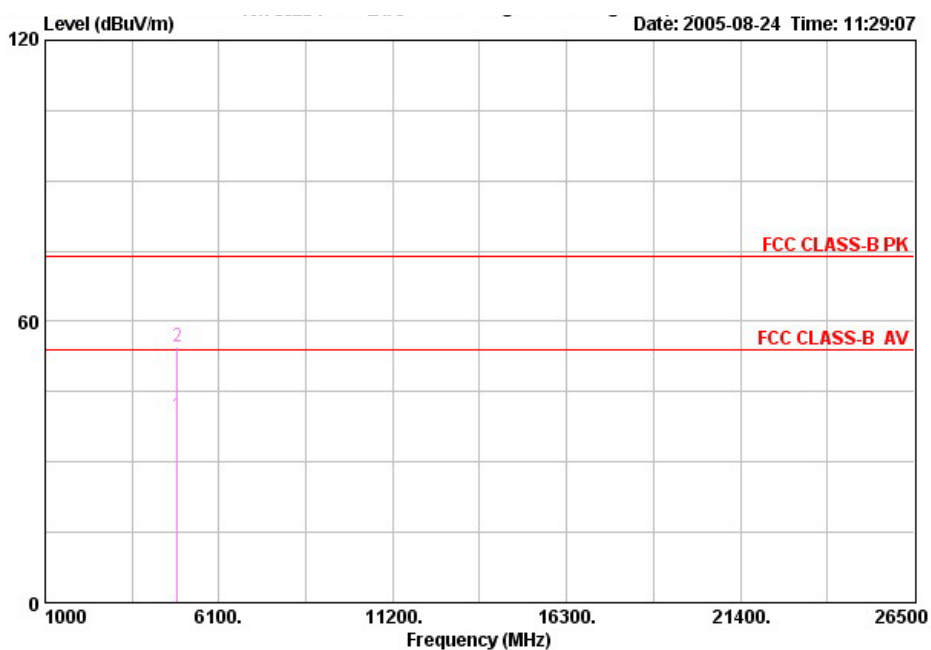(A) Polarization: Horizontal


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	4873.540	39.92	-14.08	54.00	30.33	32.88	11.87	35.15 Average	0	0
2	4874.630	54.44	-19.56	74.00	44.85	32.88	11.87	35.15 Peak	0	0



(B) Polarization: Vertical

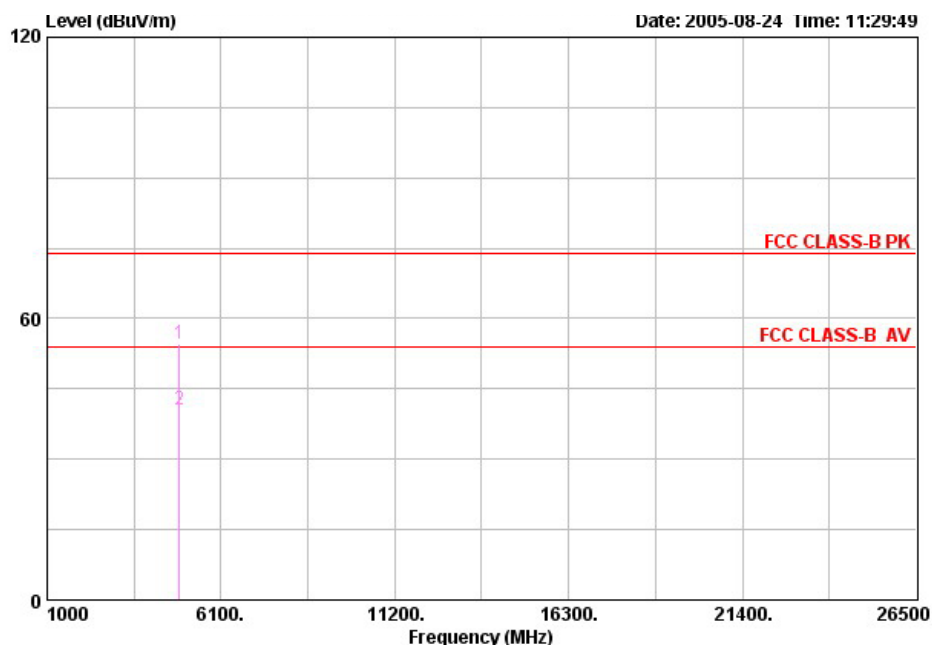

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4873.580	54.71	-19.29	74.00	45.23	32.83	11.82	35.16	Peak	0	0
2	4874.320	40.47	-13.53	54.00	30.99	32.83	11.82	35.16	Average	0	0

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

5.6.13. Test Results for CH 11 / 2462 MHz (for emission above 1GHz)


- Modulation Type: OFDM
- Temperature: 28°C
- Relative Humidity: 58%
- Test Engineer: Ken Tu

(A) Polarization: Horizontal

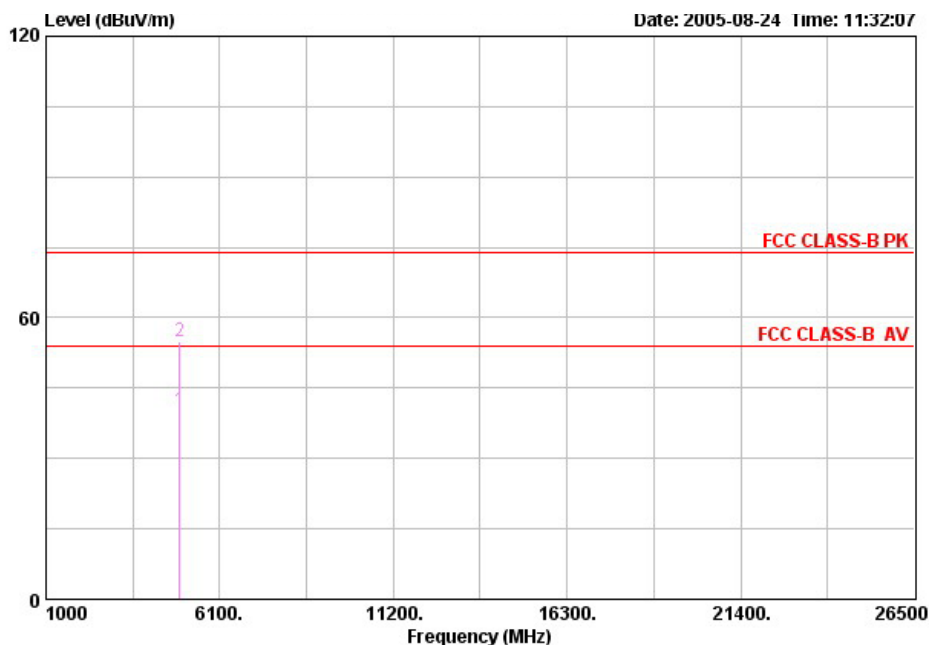

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	4923.290	40.26	-13.74	54.00	30.58	32.93	11.89	35.14	0	0
2	4924.560	54.88	-19.12	74.00	45.20	32.93	11.89	35.14	0	0

(B) Polarization: Vertical

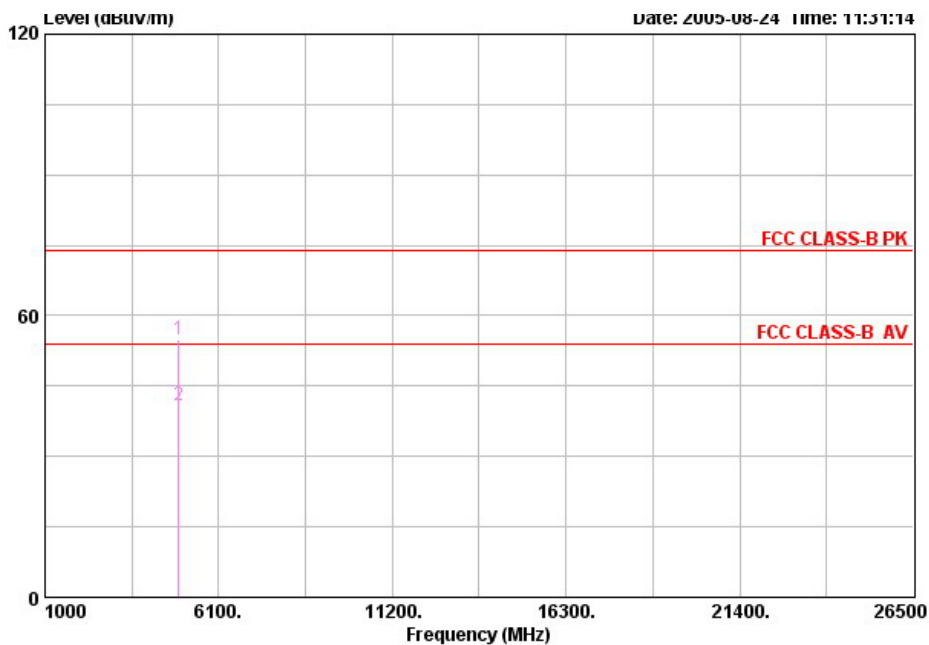

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4923.560	55.00	-19.00	74.00	45.32	32.93	11.89	35.14	Peak	0	0
2 @	4924.880	40.88	-13.12	54.00	31.20	32.93	11.89	35.14	Average	0	0

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

5.6.14. Photographs of Radiated Emission Test Configuration

FRONT VIEW



REAR VIEW





5.7. Antenna Requirements

5.7.1. Standard Applicable

Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of tHsi Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Section 15.247(b)/(c):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

5.7.2. Antenna Connected Construction

There is no connector used for Printed antenna.

5.7.3. Antenna Gain

Antenna gain of EUT is less than 6dBi. Therefore peak conducted power limit shall not be degraded any more. Antenna report of manufacturer will have more detail antenna gain or antenna pattern.

5.7.4. Test Criteria

All test results complied with the requirements of 15.203/15.247(b)/(c).

6. List of Measuring Equipments Used

Items	Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
1	EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Feb. 19, 2005	Conduction (CO04-HY)
2	LISN	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Mar. 15, 2005	Conduction (CO04-HY)
3	LISN (Support Unit)	PIC	NNB-2/16Z	2001/008	9kHz – 30MHz	May 06, 2005	Conduction (CO04-HY)
4	EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
5	RF Cable-CON	Suhner Switzerland	RG223/U	CB029	9kHz – 30MHz	Dec. 23, 2004	Conduction (CO04-HY)
6	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	Jun. 16, 2005	Radiation (03CH03-HY)
7	Spectrum analyzer	R&S	FSP40	100004	9KHZ ~ 40GHz	Aug. 31, 2004	Radiation (03CH03-HY)
8	Amplifier	SCHAFFNER	CPA9231A	18667	9KHz ~ 2GHz	Jan. 10, 2005	Radiation (03CH03-HY)
9	Amplifier	Agilent	8449B	3008A02120	1GHz ~ 26.5GHz	May 31, 2005	Radiation (03CH03-HY)
10	Amplifier	MITEQ	AMF-6F-260400	923364	26.5GHz ~ 40GHz	Jan. 05, 2004*	Radiation (03CH03-HY)
11	Loop Antenna	R&S	HFH2-Z2	860004/001	9kHz ~ 30MHz	May 24, 2004*	Radiation (03CH03-HY)
12	Biconical Antenna	SCHWARZBECK	VHBB 9124	301	30MHz ~ 200MHz	Jul. 22, 2005	Radiation (03CH03-HY)
13	Log Antenna	SCHWARZBECK	VUSLP 9111	221	200MHz ~ 1GHz	Jul. 22, 2005	Radiation (03CH03-HY)
14	Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	Apr. 22, 2005	Radiation (03CH03-HY)
15	Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz ~ 40GHz	Jun. 09, 2004*	Radiation (03CH03-HY)
16	RF Cable-R03m	Jye Bao	RG142	CB021	30MHz ~ 1GHz	Feb. 22, 2005	Radiation (03CH03-HY)
17	RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz ~ 40GHz	Dec.01, 2004	Radiation (03CH03-HY)
18	Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
19	Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)

※ Calibration Interval of instruments listed above is one year.

※ * Calibration Interval of instruments listed above is two year.

Items	Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
20	Spectrum Analyzer	R&S	FSP40	100004	9KHZ~40GHz	Aug. 31, 2004	Conducted (TH01-HY)
21	Power meter	R&S	NRVS	100444	DC ~ 40GHz	Jul. 06, 2005	Conducted (TH01-HY)
22	Power sensor	R&S	NRV-Z55	100049	DC ~ 40GHz	Jul. 06, 2005	Conducted (TH01-HY)
23	Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Apr. 28, 2005	Conducted (TH01-HY)
24	AC power source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Apr. 21, 2005	Conducted (TH01-HY)
25	DC power source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Nov. 28, 2004	Conducted (TH01-HY)
26	Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 01, 2004	Conducted (TH01-HY)
27	RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Jan. 01, 2005	Conducted (TH01-HY)
28	RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Jan. 01, 2005	Conducted (TH01-HY)
29	Oscilloscope	Tektronix	TDS1012	CO38515	100MHz / 1GS/s	Apr. 15, 2005	Conducted (TH01-HY)
30	Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Dec. 31, 2004	Conducted (TH01-HY)
31	Data Generator	Tektronix	DG2030	063-2920-50	0.1Hz~400MHz	Jun. 02, 2005	Conducted (TH01-HY)

※ Calibration Interval of instruments listed above is one year.

7. Company Profile

SPORTON Lab. was established in 1986 with one shielded room: the first private EMI test facility, offering local manufacturers an alternative EMI test facility apart from ERSO. In 1988, one 3M and 10M/3M open area test site were setup and also obtained official accreditation from FCC, VCCI and NEMKO. In 1993, a Safety laboratory was founded and obtained accreditation from UL of USA, CSA of Canada and TUV (Rhineland & PS) of Germany. In 1995, one EMC lab, including EMI and EMS test facilities was setup. In 1997, SPORTON Group has provided financial expense to relocate the headquarter to Orient Scientific Park in Taipei Hsien to offer more comprehensive, more qualified and better service to local suppliers and manufactures. In 1999, Safety Group and Component Group were setup. In 2001, SPORTON has established 3M/10M chamber in Hwa Ya Technology Park.


7.1. Certificate of Accreditation

Taiwan	BSMI, CNLA, DGT
USA	FCC, NVLAP, UL
EU	Nemko, TUV
Japan	VCCI
Canada	Industry Canada

7.2. Test Location

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 02-2696-2468 FAX : 02-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 03-327-3456 FAX : 03-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 02-2601-1640 FAX : 02-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 02-2631-4739 FAX : 02-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 02-8227-2020 FAX : 02-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 02-2794-8886 FAX : 02-2794-9777

8. Certificate of NVLAP Accreditation

United States Department of Commerce National Institute of Standards and Technology	
	
ISO/IEC 17025:1999 ISO 9002:1994	
Certificate of Accreditation	
SPORTON INTERNATIONAL, INC. TAIPEI HSIEN 221 TAIWAN	
<i>is recognized by the National Voluntary Laboratory Accreditation Program for satisfactory compliance with criteria set forth in NIST Handbook 150:2001, all requirements of ISO/IEC 17025:1999, and relevant requirements of ISO 9002:1994. Accreditation is awarded for specific services, listed on the Scope of Accreditation, for:</i>	
ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS	
December 31, 2005 Effective through	 For the National Institute of Standards and Technology NVLAP Lab Code: 200079-0

NVLAP-01C (06-01)