



# SPORTON International Inc.


No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

Project No: CB10412222

## Maximum Permissible Exposure Report

Applicant's company	Wistron NeWeb Corporation
Applicant Address	20 Park Avenue II, Hsinchu Science Park, Hsinchu 308 Taiwan
FCC ID	NKR-SWA52
Manufacturer's company	Wistron NeWeb Corporation
Manufacturer Address	20 Park Avenue II, Hsinchu Science Park, Hsinchu 308 Taiwan

Product Name	Wireless Audio Module
Brand Name	WNC
Model Name	SWA52
Ref. Standard(s)	47 CFR FCC Part 2 Subpart J, section 2.1091
Received Date	Nov. 24, 2015
Final Test Date	Dec. 26, 2015
Submission Type	Original Equipment

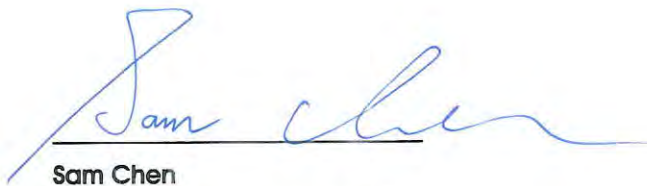

Sam Chen

SPORTON INTERNATIONAL INC.





## Table of Contents

<b>1. GENERAL DESCRIPTION</b> .....	<b>1</b>
1.1. EUT General Information .....	1
1.2. Testing Location.....	1
<b>2. MAXIMUM PERMISSIBLE EXPOSURE</b> .....	<b>2</b>
2.1. Limit of Maximum Permissible Exposure .....	2
2.2. MPE Calculation Method .....	3
2.3. Calculated Result and Limit.....	3



## History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA5N2023	Rev. 01	Initial issue of report	Jan. 05, 2016

## 1. GENERAL DESCRIPTION

### 1.1. EUT General Information

RF General Information		
Frequency Range (MHz)	Operating Frequency (MHz)	Modulation Type
5725-5850	5730.35-5820.35	pi/4-DQPSK

### 1.2. Testing Location

Testing Location		
<input type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456      FAX : 886-3-327-0973
<input checked="" type="checkbox"/>	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065      FAX : 886-3-656-9085

## 2. MAXIMUM PERMISSIBLE EXPOSURE

### 2.1. Limit of Maximum Permissible Exposure

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; \*Plane-wave equivalent power density

## 2.2. MPE Calculation Method

The MPE was calculated at 20 cm to show compliance with the power density limit.

The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \qquad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

**E** = Electric field (V/m)

**P** = Peak RF output power (W)

**G** = EUT Antenna numeric gain (numeric)

**d** = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

## 2.3. Calculated Result and Limit

Exposure Environment: General Population / Uncontrolled Exposure

Antenna Type : Printed Antenna

Conducted Power for pi/4-DQPSK: 12.39dBm

Distance (cm)	Test Freq. (MHz)	Antenna Gain (dBi)	Antenna Gain (numeric)	Average Output Power		Power Density (S) (mW/cm <sup>2</sup> )	Limit of Power Density (S) (mW/cm <sup>2</sup> )	Test Result
				(dBm)	(mW)			
20	5730.35MHz	4.90	3.0903	12.3900	17.3380	0.010665	1	Complies