

FCC Test Report

Equipment : USB Bluetooth 4.0 Dongle
Brand Name : Billonton Systems Inc.
Model No. : GUBT40D
FCC ID : NLF-GUBT40D
Standard : 47 CFR FCC Part 15.247
Frequency Range : 2400 MHz – 2483.5 MHz
Applicant : Billonton Systems Inc.
Manufacturer : No.21,Sui-Lih rd., Hsin-Chu,300,Taiwan

This report only contains LE mode test result.

The product sample received on Jul. 24, 2012 and completely tested on Sep. 06, 2012. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

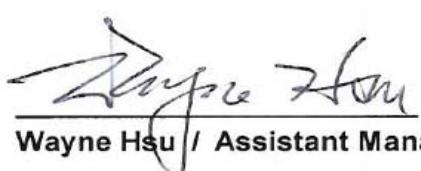

Wayne Hsu / Assistant Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Accessories and Support Equipment.....	7
1.3	Testing Applied Standards	7
1.4	Testing Location Information	7
1.5	Measurement Uncertainty	8
2	TEST CONFIGURATION OF EUT	9
2.1	The Worst Case Modulation Configuration	9
2.2	Test Channel Frequencies Configuration.....	9
2.3	The Worst Case Power Setting Parameter	10
2.4	The Worst Case Measurement Configuration	10
2.5	Test Setup Diagram	12
3	TRANSMITTER TEST RESULT	14
3.1	AC Power-line Conducted Emissions	14
3.2	6dB Bandwidth	17
3.3	RF Output Power.....	19
3.4	Power Spectral Density	23
3.5	Transmitter Radiated Bandedge Emissions.....	25
3.6	Transmitter Radiated Unwanted Emissions	30
4	TEST EQUIPMENT AND CALIBRATION DATA.....	42
5	CERTIFICATION OF TAF ACCREDITATION.....	44
APPENDIX A. TEST PHOTOS		A6
APPENDIX B. PHOTOGRAPHS OF EUT		B5

Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	dBuV]: 0.158895MHz 32.36dBuV (23.16dB) - AV 49.07dBuV (16.45dB) - QP	FCC 15.207	Complied
3.2	15.247(a)	6dB Bandwidth	LE: 1.062 MHz	$\geq 500\text{kHz}$	Complied
3.3	15.247(b)	RF Output Power (Maximum Peak Conducted Output Power)	Power [dBm] Basic: 5.94 EDR: 5.45 LE: 6.53	Power [dBm] Basic: 21 EDR: 21 LE: 30	Complied
3.4	15.247(d)	Power Spectral Density	PSD [dBm/3kHz] LE: -10.99	PSD [dBm/3kHz]: 8	Complied
3.5	15.247(c)	Transmitter Radiated Bandedge Emissions	Non-Restricted Bands: 2541.50MHz: 36.73dB Restricted Bands [dBuV/m at 3m]: 2483.50MHz 62.91 (Margin 11.09dB) - PK 49.55 (Margin 4.45dB) - AV	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied
3.6	15.247(c)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 3m]: 7440.00MHz 50.60 (Margin 3.40dB) - PK	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied

Revision History

1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information				
Frequency Range (MHz)	Bluetooth Version	Ch. Frequency (MHz)	Channel Number	RF Output Power (dBm)
2400-2483.5	v2.1 Basic	2402-2480	0-78 [79]	5.94
2400-2483.5	v2.1 + EDR	2402-2480	0-78 [79]	5.45
2400-2483.5	v4.0 LE	2402-2480	0-39 [40]	6.53

Note 1: Bluetooth EDR uses a combination of GFSK (1Mbps), $\pi/4$ -DQPSK (2Mbps) and 8DPSK (3Mbps).
 Note 2: Bluetooth EDR uses as a system using FHSS modulation.
 Note 3: Bluetooth LE (Low Energy) using GFSK modulation for DTS digital modulation.
 Note 4: RF output power specifies that Maximum Peak Conducted Output Power.

1.1.2 Antenna Information

Antenna Category	
<input type="checkbox"/>	Equipment placed on the market without antennas
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	Temporary RF connector provided
<input checked="" type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.

Antenna General Information					
Ant. No.	Ant. Cat.	Ant. Type	Brand	Model	G_{ANT} (dBi)
1	Internal	Printed	-	-	-0.75

1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input type="checkbox"/> Production ; <input checked="" type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/> Stand-alone	
<input type="checkbox"/> Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...	
<input type="checkbox"/> Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...	
<input type="checkbox"/> Other:	

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – ($10 \log 1/x$)
<input checked="" type="checkbox"/> 70.97% - test mode single channel - LE	1.49

1.2 Accessories and Support Equipment

Support Equipment - Conducted Emissions				
No.	Equipment	Brand Name	Model Name	Serial No.
1	Notebook	DELL	E5520	DoC
2	(USB) Mouse	Microsoft	1004	DoC
3	iPod nano	Apple	A1199	N/A
4	Bluetooth Earphone	SONY	HBH-PV702	N/A

Support Equipment - Radiated Emissions				
No.	Equipment	Brand Name	Model Name	Serial No.
1	Notebook	DELL	E5520	DoC
2	(USB) Mouse	Microsoft	1004	DoC
3	iPod nano	Apple	A1199	DoC

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR FCC Part 15
- ANSI C63.10-2009
- FCC KDB 558074 - Guidance for Performing Compliance Measurements on DTS
- FCC KDB 412172 - Guidelines for Determining the ERP and EIRP

1.4 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	HWA YA	ADD :	No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C	
		TEL :	886-3-327-3456	FAX : 886-3-327-0973
Test Condition		Test Site No.	Test Engineer	Test Environment
Conducted Emission		CO04-HY	Bill	23°C / 46%
RF Conducted		TH01-HY	Shiming	26.6°C / 60%
Radiated Emission		03CH02-HY	Streak	24.8°C / 66%
				05-Aug-12

1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty			
Test Item		Uncertainty	Limit
AC power-line conducted emissions		±2.26 dB	N/A
Emission bandwidth, 6dB bandwidth		±1.42 %	N/A
RF output power, conducted		±0.63 dB	N/A
Power density, conducted		±0.81 dB	N/A
Unwanted emissions, conducted	30 – 1000 MHz	±0.51 dB	N/A
	1 – 18 GHz	±0.67 dB	N/A
	18 – 40 GHz	±0.83 dB	N/A
	40 – 200 GHz	N/A	N/A
All emissions, radiated	30 – 1000 MHz	±2.56 dB	N/A
	1 – 18 GHz	±3.59 dB	N/A
	18 – 40 GHz	±3.82 dB	N/A
	40 – 200 GHz	N/A	N/A
Temperature		±0.8 °C	N/A
Humidity		±3 %	N/A
DC and low frequency voltages		±3 %	N/A
Time		±1.42 %	N/A
Duty Cycle		±1.42 %	N/A

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing						
Bluetooth Version	Number of Transmit Chains (N_{TX})	Data Rate	Modulation Mode	RF Output Power (dBm)	Power Spectral Density (dBm/3kHz)	Worst Modulation Mode
v4.0 LE	1	1 Mbps	LE-1M	6.53	-10.99	LE-1M
Note 1: Bluetooth EDR uses a combination of GFSK (1Mbps), $\pi/4$ -DQPSK (2Mbps) and 8DPSK (3Mbps).						
Note 2: Bluetooth EDR uses as a system using FHSS modulation.						
Note 3: Bluetooth LE (Low Energy) using GFSK modulation for DTS digital modulation.						
Note 4: Modulation modes consist of BT-1M, BT-2M, 1 BT-3M, LE-1M FHSS BT-1M: GFSK (1Mbps), BT-2M: $\pi/4$ -DQPSK (2Mbps), BT-3M: 8DPSK (3Mbps), LE-1M: GFSK (1Mbps)						
Note 5: RF output power specifies that Maximum Peak Conducted Output Power.						

2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration		
Bluetooth Version	Worst Modulation Mode	Test Channel Frequencies (MHz) – FX (Frequencies Abbreviations)
v4.0 LE	LE-1M	2402-(F1), 2440-(F2), 2480-(F3)

2.3 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter					
Test Software Version		BlueTest3			
Worst Modulation Mode	Number of Transmit Chains (N_{TX})	Frequency (MHz)	Power Setting	Data Rate	RF Output Power (dBm)
LE-1M	1	2402	Default	1 Mbps	3.13
LE-1M	1	2440	Default	1 Mbps	5.31
LE-1M	1	2480	Default	1 Mbps	6.53

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.

2.4 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
1	Transmitter Mode


The Worst Case Mode for Following Conformance Tests			
Tests Item	RF Output Power		
Test Condition	Conducted measurement at transmit chains		
Modulation Mode	Number of Transmit Chains (N_{TX})	Data Rate / MCS	Test Frequency
LE-1M	1	1 Mbps	F1, F2, F3



The Worst Case Mode for Following Conformance Tests			
Tests Item	Power Spectral Density 6 dB Bandwidth		
Test Condition	Conducted measurement at transmit chains		
Modulation Mode	Number of Transmit Chains (N_{TX})	Data Rate / MCS	Test Frequency
LE-1M	1	1 Mbps	F1, F2, F3

The Worst Case Mode for Following Conformance Tests			
Tests Item	Transmitter Radiated Bandedge Emissions		
Test Condition	Radiated measurement		
Modulation Mode	Number of Transmit Chains (N _{TX})	Data Rate / MCS	Test Frequency
LE-1M	1	1 Mbps	F1, F3

The Worst Case Mode for Following Conformance Tests			
Tests Item	Transmitter Radiated Unwanted Emissions		
Test Condition	Radiated measurement		
User Position	<input type="checkbox"/> EUT will be placed in fixed position. <input type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two or three orthogonal planes. <input checked="" type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed three orthogonal planes.		
Operating Mode < 1GHz	<input checked="" type="checkbox"/> 1. Transmitter Mode		
Modulation Mode	Data Rate / MCS	Test Frequency	Worst Orthogonal Planes of EUT
LE-1M	1 Mbps	F1, F2, F3	X Plane
Orthogonal Planes of EUT	X Plane 	Y Plane 	Z Plane 

2.5 Test Setup Diagram

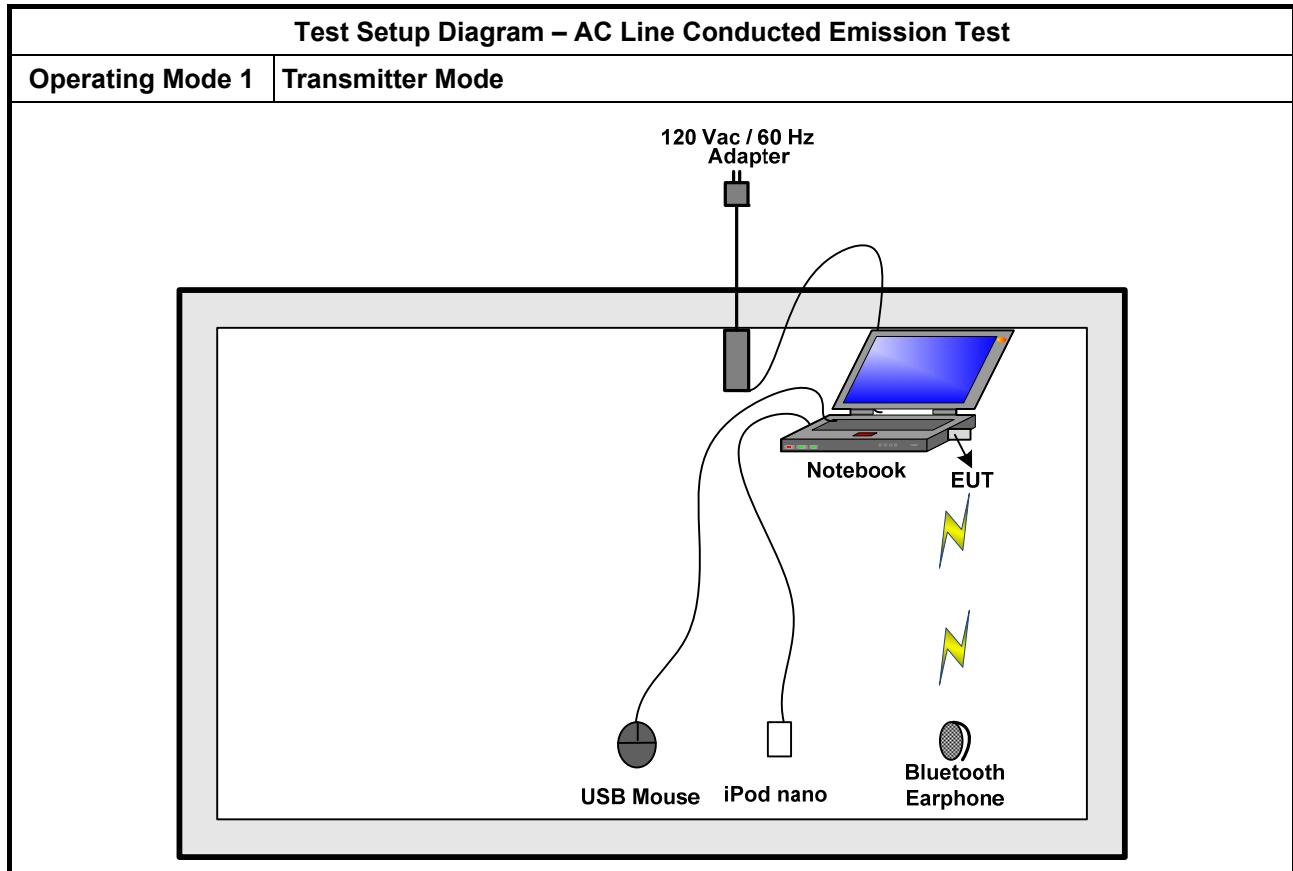

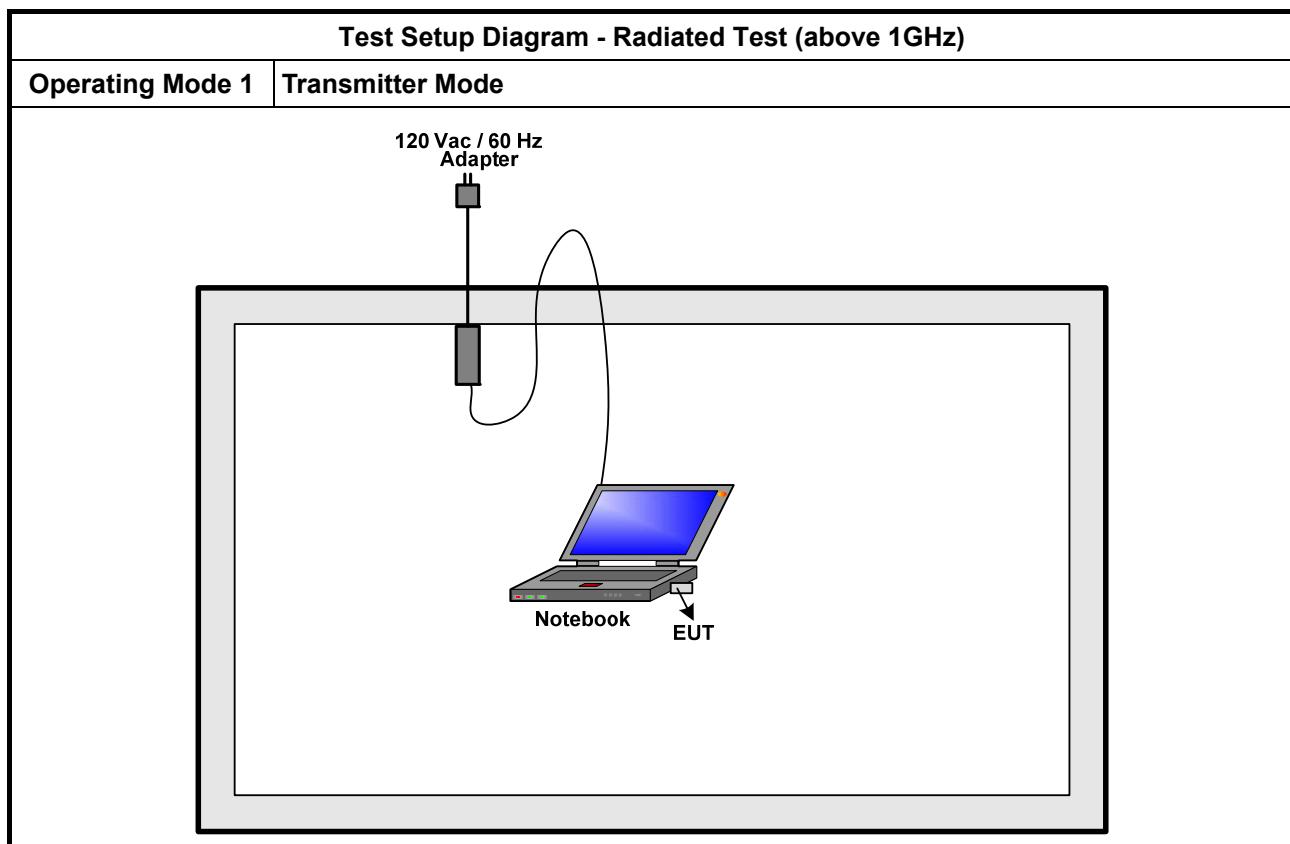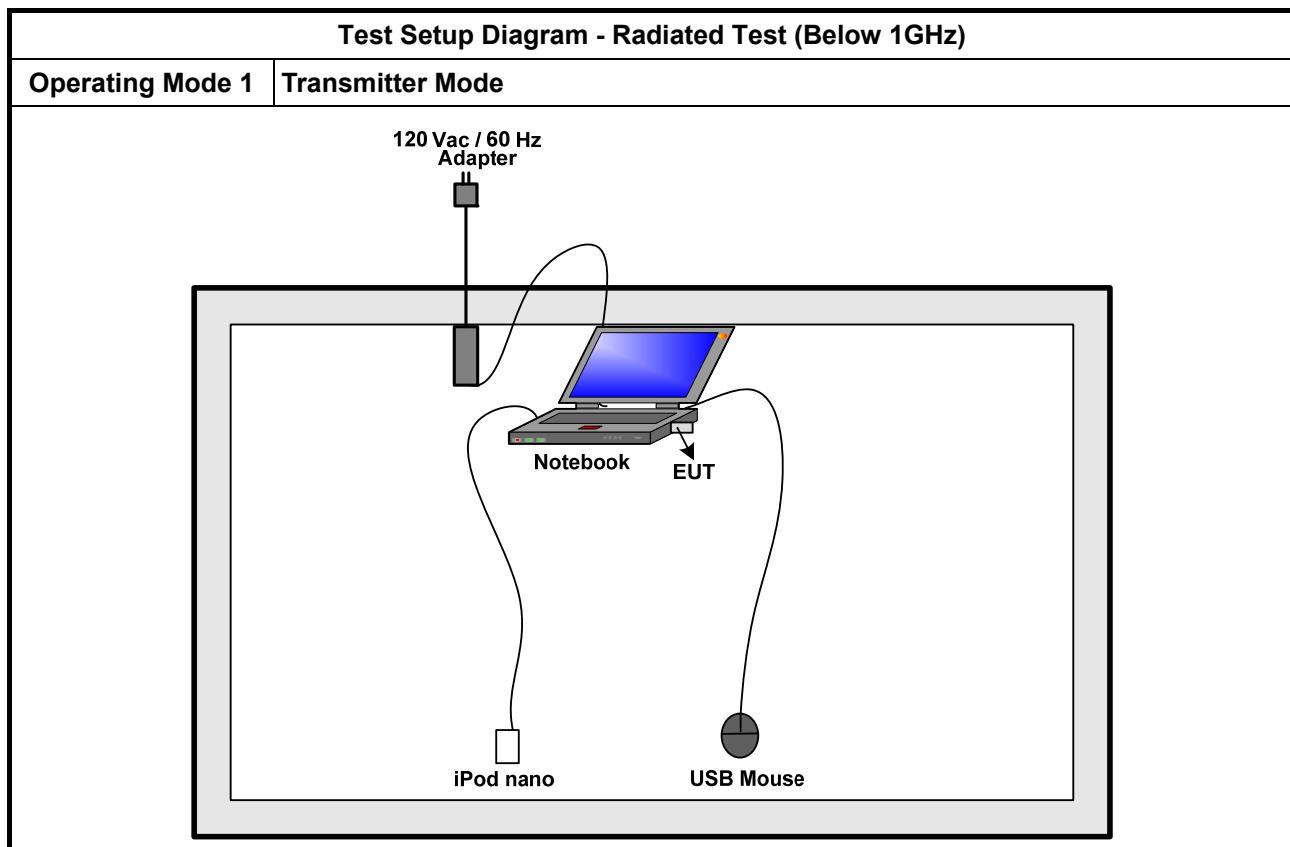

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.1.3 Test Procedures


Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

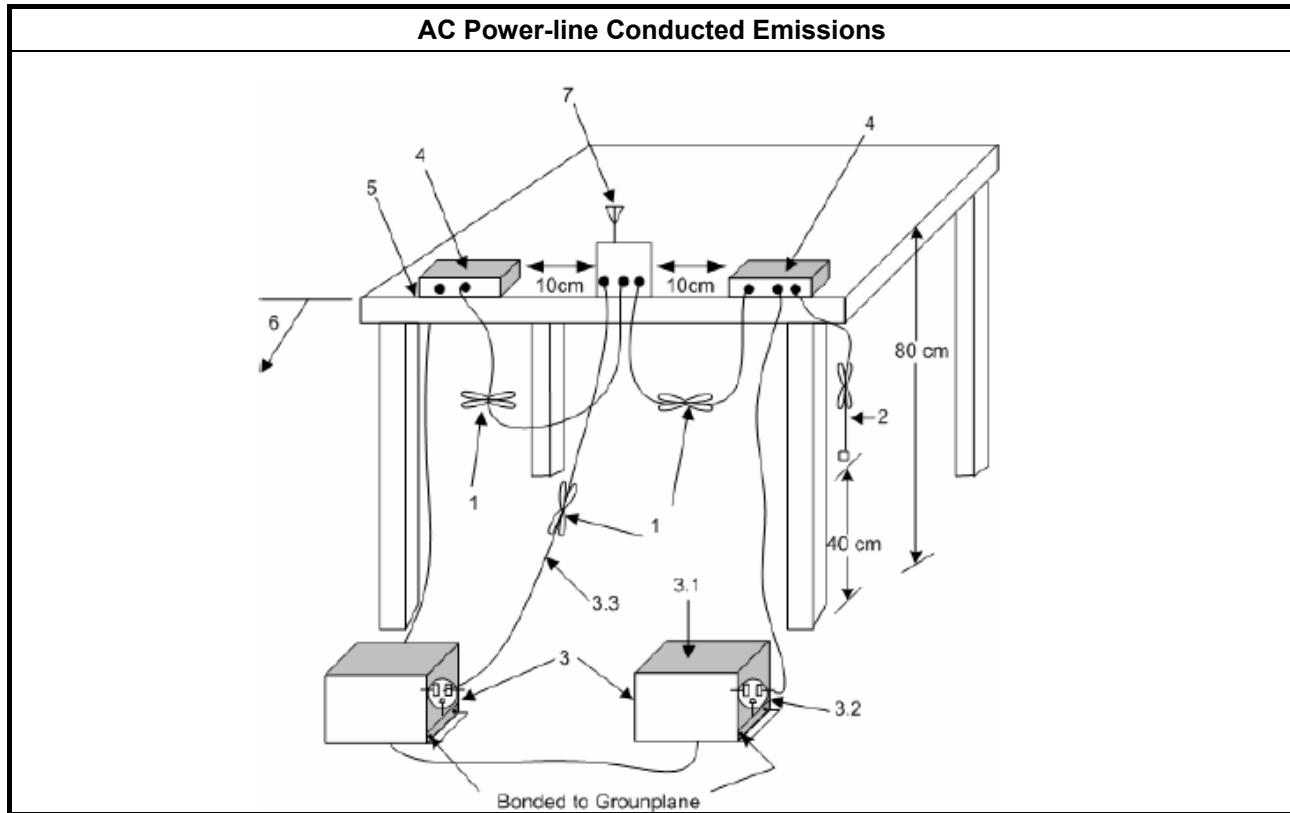

3.1.5 Test Result of AC Power-line Conducted Emissions

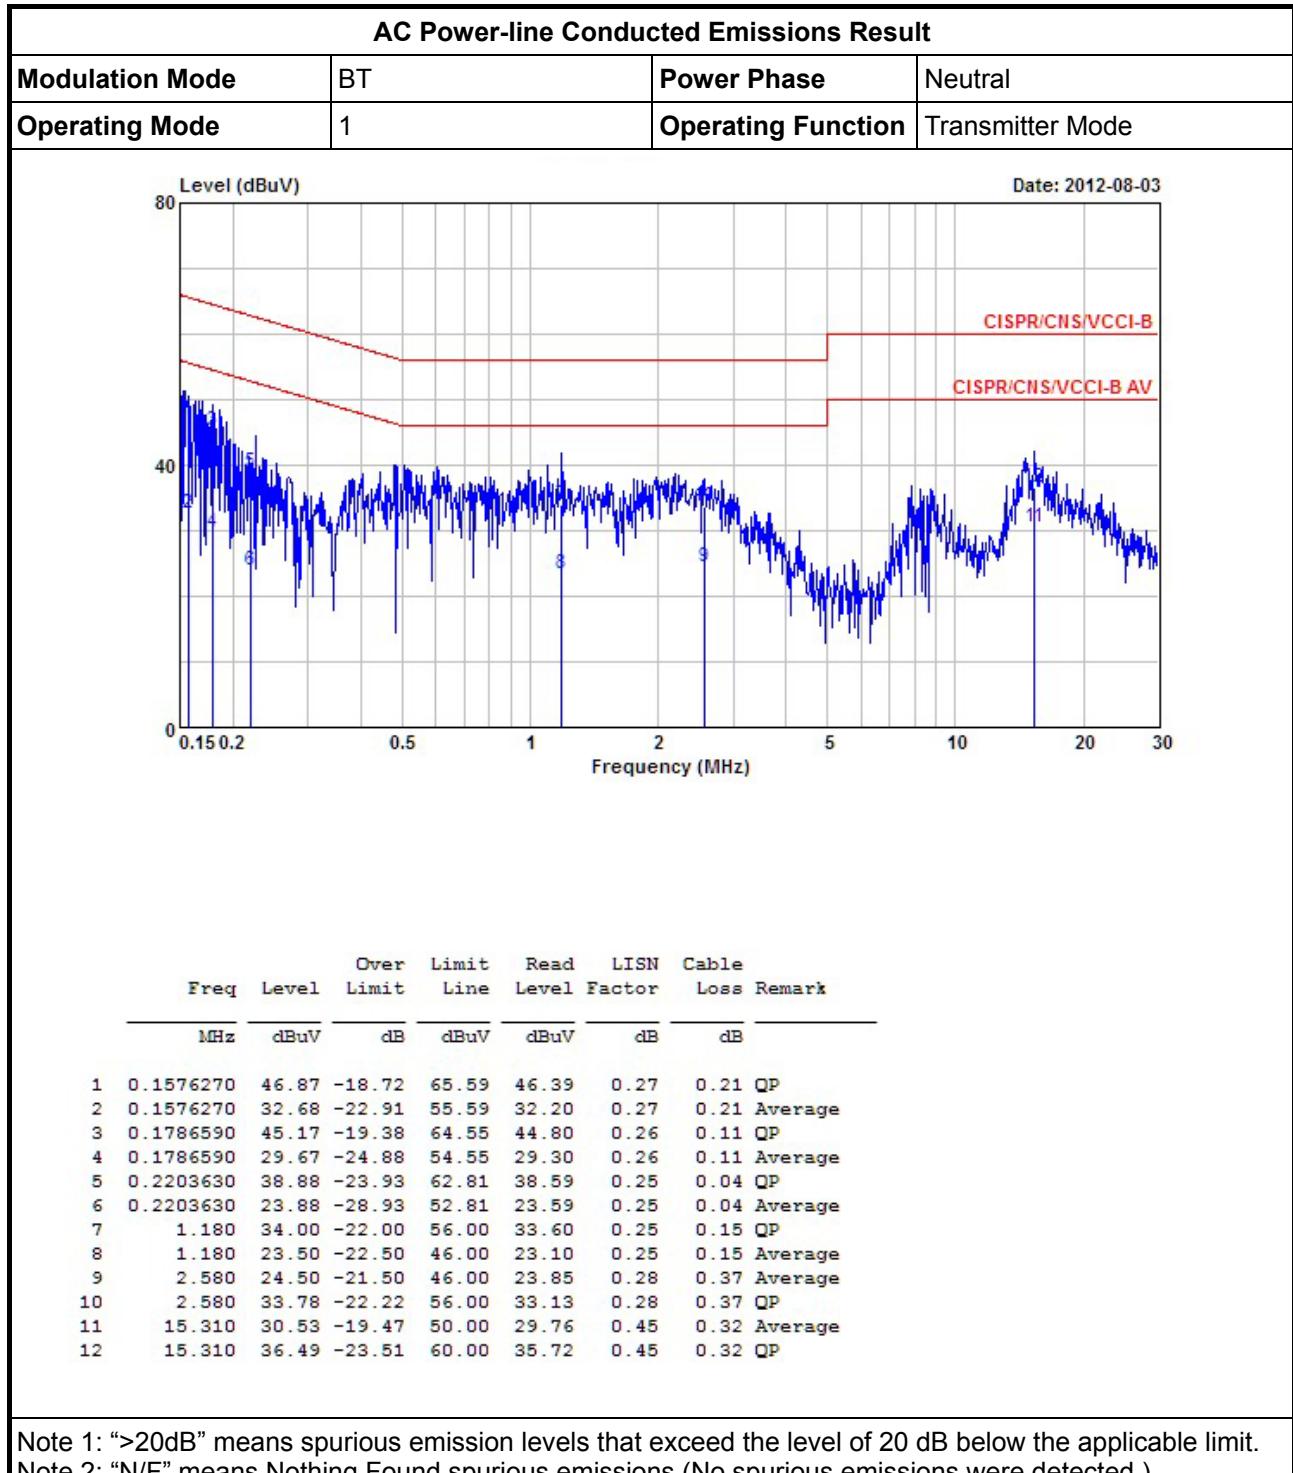

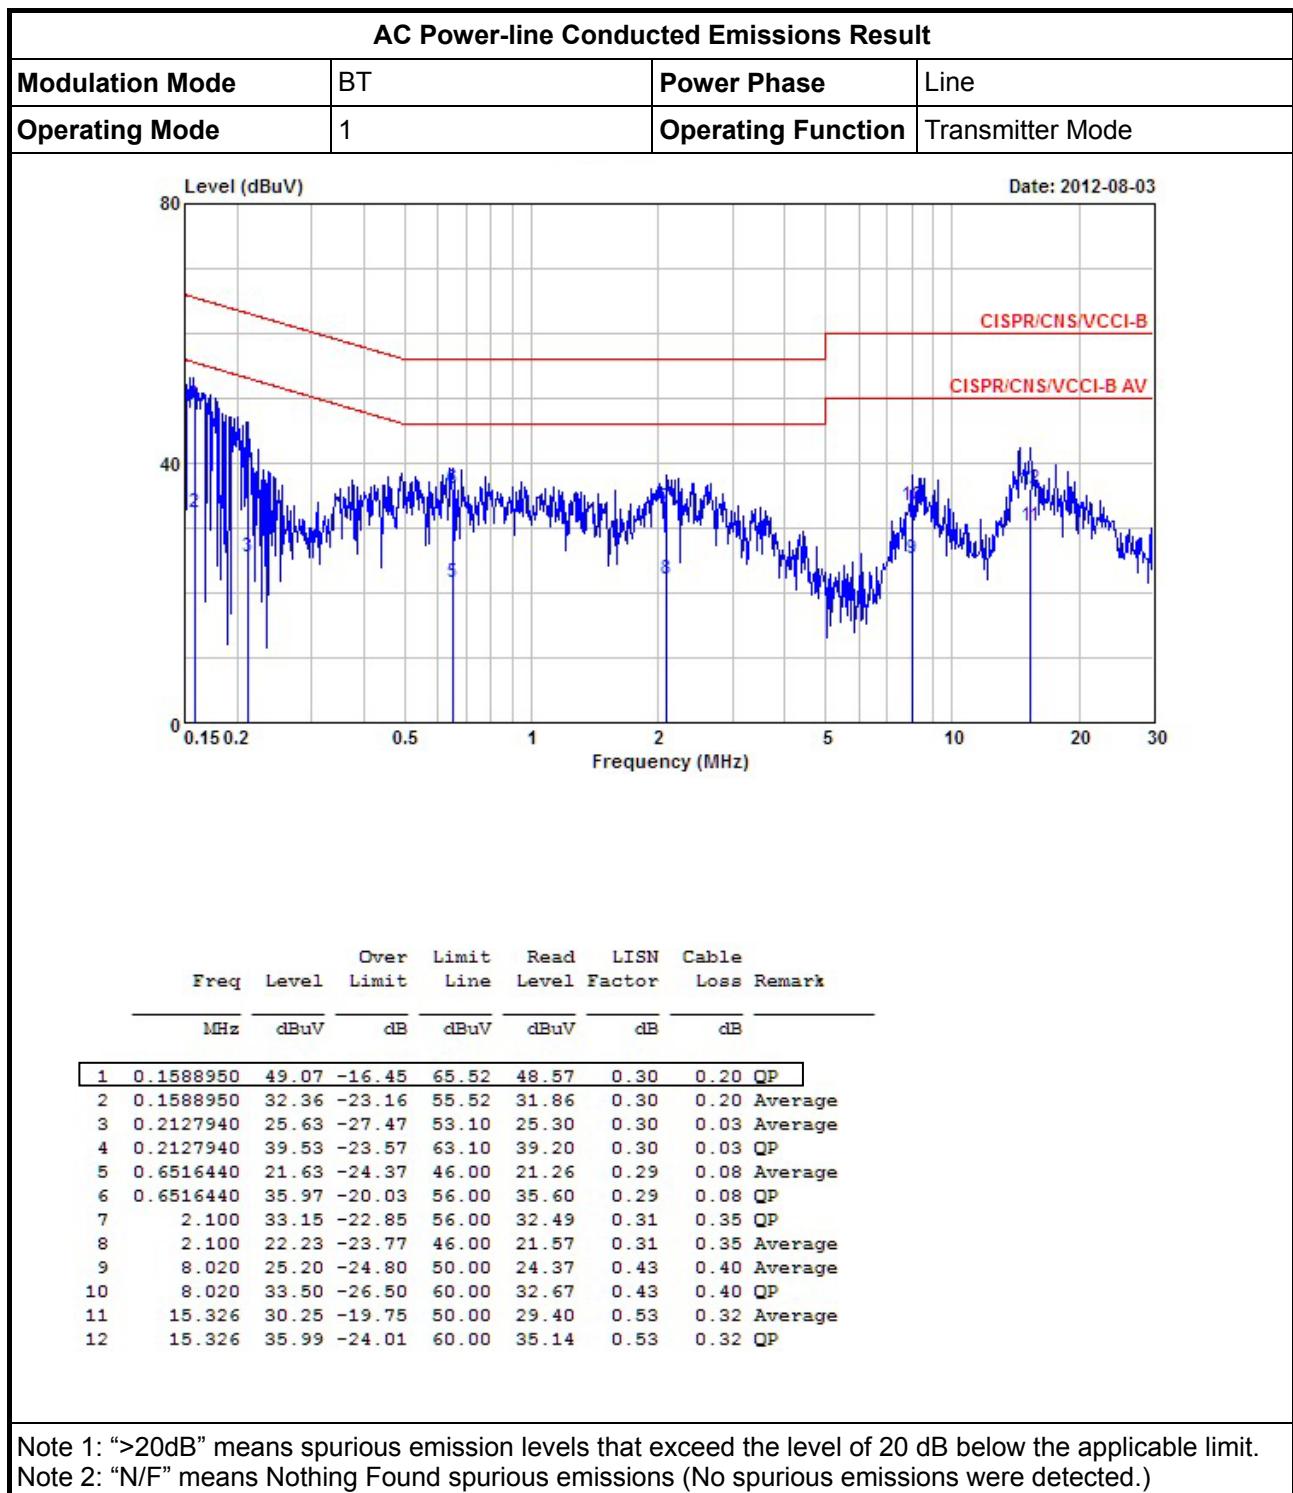

3.2 6dB Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit	
Systems using digital modulation techniques:	
<input checked="" type="checkbox"/> 6 dB bandwidth \geq 500 kHz.	


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures


Test Method	
<input checked="" type="checkbox"/> For the emission bandwidth shall be measured using one of the options below:	
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 5.1.1 Option 1 for 6 dB bandwidth measurement.
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 5.1.2 Option 2 for 6 dB bandwidth measurement.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
<input checked="" type="checkbox"/> For conducted measurement.	
	<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
	<input checked="" type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
	<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
	<input type="checkbox"/> Option 1: Multiple transmit chains measurements need to be performed on one of the active transmit chains (antenna outputs). All measurement had be performed on transmit chains 1.
	<input checked="" type="checkbox"/> Option 2: Multiple transmit chains measurements need to be performed on each transmit chains individually (antenna outputs). All measurement had be performed on all transmit chains.
	<input type="checkbox"/> Option 3: A power splitter/combiner shall be used to combine all the transmit chains (antenna outputs) into a single test point and record a single test point EBW.
<input type="checkbox"/> For radiated measurement. The equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted power level.	

3.2.4 Test Setup

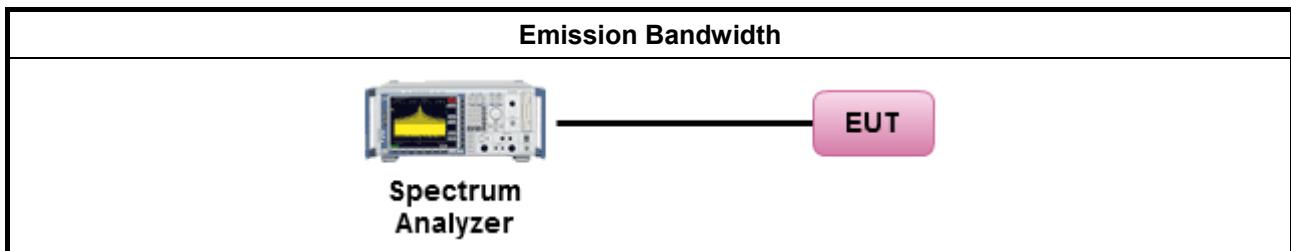

3.2.5 Test Result of Emission Bandwidth

Emission Bandwidth Result			
Modulation Mode	Freq. (MHz)	99% Bandwidth (MHz)	6dB Bandwidth (MHz)
LE-1M	2402	1.056	0.714
LE-1M	2440	1.050	0.714
LE-1M	2480	1.062	0.714
Limit		N/A	≥ 500 kHz
Result			Complied

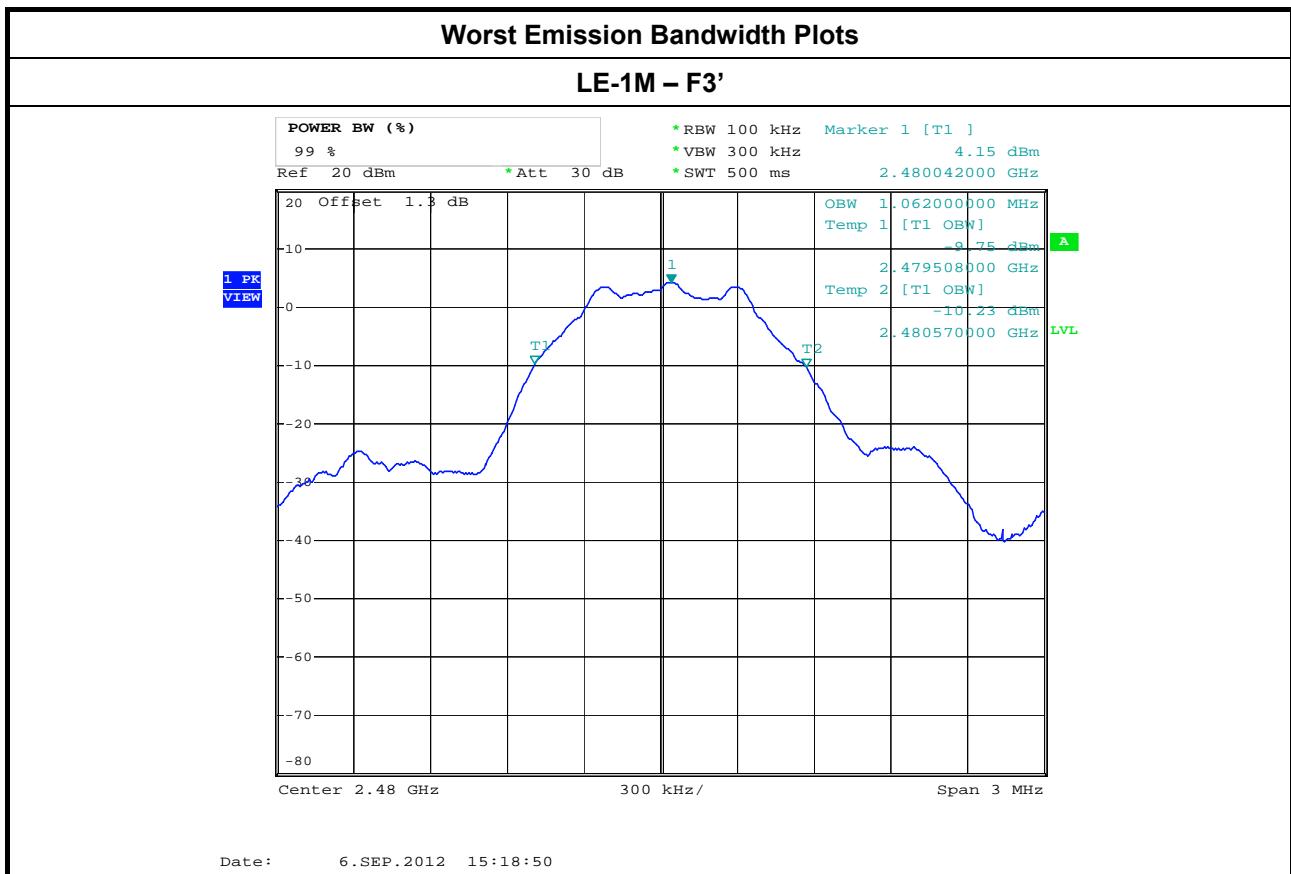

3.3 RF Output Power

3.3.1 RF Output Power Limit

RF Output Power Limit for Digital Modulation Systems	
Maximum Peak Conducted Output Power or Maximum Conducted Output Power Limit	
<input type="checkbox"/> 902-928 MHz Band:	
	<input type="checkbox"/> If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	<input type="checkbox"/> If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band:	
	<input checked="" type="checkbox"/> If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	<input type="checkbox"/> Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	<input type="checkbox"/> Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<input type="checkbox"/> Smart antenna system (SAS):
	<input type="checkbox"/> Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<input type="checkbox"/> Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<input type="checkbox"/> Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dBm
<input type="checkbox"/> 5725-5850 MHz Band:	
	<input type="checkbox"/> If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	<input type="checkbox"/> Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	<input type="checkbox"/> Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30$ dBm
e.i.r.p. Power Limit:	
<input type="checkbox"/> 902-928 MHz Band: $P_{eirp} \leq 36$ dBm (4 W)	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band	
	<input checked="" type="checkbox"/> Point-to-multipoint systems (P2M): $P_{eirp} \leq 36$ dBm (4 W)
	<input type="checkbox"/> Point-to-point systems (P2P): $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX}])$ dBm
	<input type="checkbox"/> Smart antenna system (SAS)
	<input type="checkbox"/> Single beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	<input type="checkbox"/> Overlap beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	<input type="checkbox"/> Aggregate power on all beams: $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX} + 8])$ dBm
<input type="checkbox"/> 5725-5850 MHz Band	
	<input type="checkbox"/> Point-to-multipoint systems (P2M): $P_{eirp} \leq 36$ dBm (4 W)
	<input type="checkbox"/> Point-to-point systems (P2P): N/A
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi. P_{eirp} = e.i.r.p. Power in dBm.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/> Maximum Peak Conducted Output Power	<input type="checkbox"/> Refer as FCC KDB 558074, clause 5.2.1.1 Option 1 (RBW \geq EBW method). <input type="checkbox"/> Refer as FCC KDB 558074, clause 5.2.1.2 Option 2 (integrated band power method). <input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.10.2.1 a) for peak power meter. <input type="checkbox"/> Refer as ANSI C63.10, clause 6.10.2.1 a) for spectrum analyzer - (RBW \geq EBW). <input type="checkbox"/> Refer as ANSI C63.10, clause 6.10.2.1 b) for spectrum analyzer - BW correction factor.
<input type="checkbox"/> Maximum Conducted (Average) Output Power	<input type="checkbox"/> Refer as FCC KDB 558074, clause 5.2.2.1 Option 1 (RMS detection with slow sweep speed). <input type="checkbox"/> Refer as FCC KDB 558074, clause 5.2.2.2 Option 2 (spectral trace averaging). <input type="checkbox"/> Refer as ANSI C63.10, clause 6.10.3.1 for spectrum analyzer - Method 1 (trace averaging). <input type="checkbox"/> Refer as ANSI C63.10, clause 6.10.3.2 for spectrum analyzer - Method 2 (zero-span averaging). <input type="checkbox"/> Refer as ANSI C63.10, clause 6.10.3.2 for spectrum analyzer - Method 3 (band power max-hold).
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 2 for conducted measurement.	<input checked="" type="checkbox"/> For conducted measurements on devices with single transmit chains. <input type="checkbox"/> For conducted measurements on devices with multiple transmit chains: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
<input type="checkbox"/> If multiple transmit chains, EIRP calculation could be following as methods:	<input type="checkbox"/> Method 1: $EIRP_1 = P_1 + G_{ANT1}$; $EIRP_2 = P_2 + G_{ANT2}$; ... $EIRP_n = P_n + G_{ANTn}$ $EIRP_{total} = EIRP_1 + EIRP_2 + \dots + EIRP_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) <input type="checkbox"/> Method 2: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$
<input type="checkbox"/> Refer as FCC KDB 558074, clause 2 for radiated measurement.	

3.3.4 Test Setup

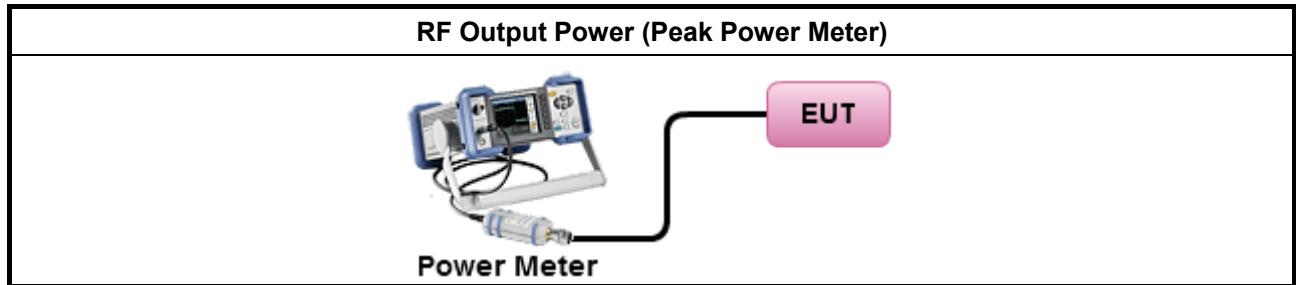

3.3.5 Test Result of Maximum Peak Conducted Output Power

Maximum Peak Conducted Output Power Result					
Directional Gain (dBi)	-0.75	RF Output Power (dBm)			
Modulation Mode	Freq. (MHz)	RF Output Power	Power Limit	EIRP Power	EIRP Limit
LE-1M	2402	3.13	30	2.38	36
LE-1M	2442	5.31	30	4.56	36
LE-1M	2480	6.53	30	5.78	36
Result		Complied			
RF Output Power Limit for Digital Modulation Systems					

3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit	
<input checked="" type="checkbox"/> Power Spectral Density (PSD) \leq 8 dBm/3kHz	


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/> Power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the power spectral density. In addition, the use of a peak PSD procedure will always result in a "worst-case" measured level for comparison to the limit. Therefore, whenever the DTS bandwidth exceeds 500 kHz, it is acceptable to utilize the peak PSD procedure to demonstrate compliance to the PSD limit, regardless of how the fundamental output power was measured. For the power spectral density shall be measured using below options:	
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 5.3.1 Option 1 (peak PSD; BWCF=-15.2dB).	
<input type="checkbox"/> Refer as FCC KDB 558074, clause 5.3.2 Option 2 (average PSD; BWCF=-15.2dB).	
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.11.2.3 for PSD for DTS - (RBW=3kHz; sweep=100s).	
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.11.2.4 for Alternative PSD for DTS - (RBW=3kHz; average=100)	
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 2 for conducted measurement.	
<input checked="" type="checkbox"/> For conducted measurements on devices with single transmit chains.	
<input type="checkbox"/> For conducted measurements on devices with multiple transmit chains using options given below:	
	<input type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the N_{TX} output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace. The new data trace samples added 100 kHz segment and found the highest value of each 100 kHz segments. Add the bandwidth correction factor (BWCF) [-15.2 dB] adjusting in power spectral density per 3kHz.
	<input type="checkbox"/> Option 2: Measure and add $10 \log(N)$ dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with $10 \log(N)$. Or each transmit chains shall be add $10 \log(N)$ to compared with the limit.
<input type="checkbox"/> Refer as FCC KDB 558074, clause 2 for radiated measurement.	


3.4.4 Test Setup

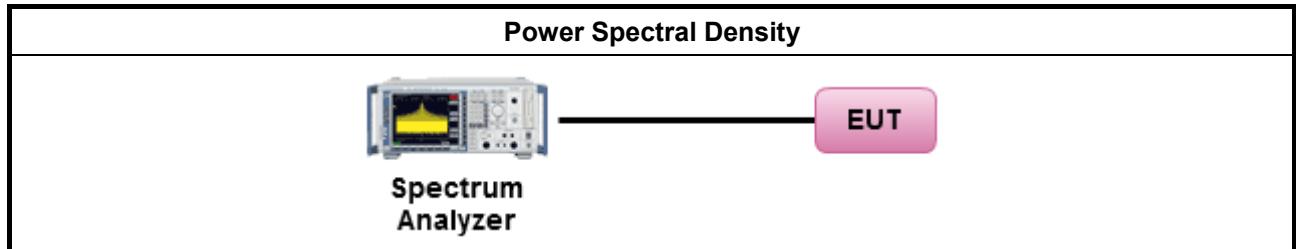

3.4.5 Test Result of Power Spectral Density


Power Spectral Density Result (dBm/3kHz)			
Modulation Mode	Freq. (MHz)	PSD	PSD Limit
LE-1M	2402	-14.35	8
LE-1M	2440	-12.54	8
LE-1M	2480	-10.99	8
Result		Complied	

Note 1: PSD [dBm/3kHz] = PSD [dBm/100kHz] + BWFC [-15.2 dB]

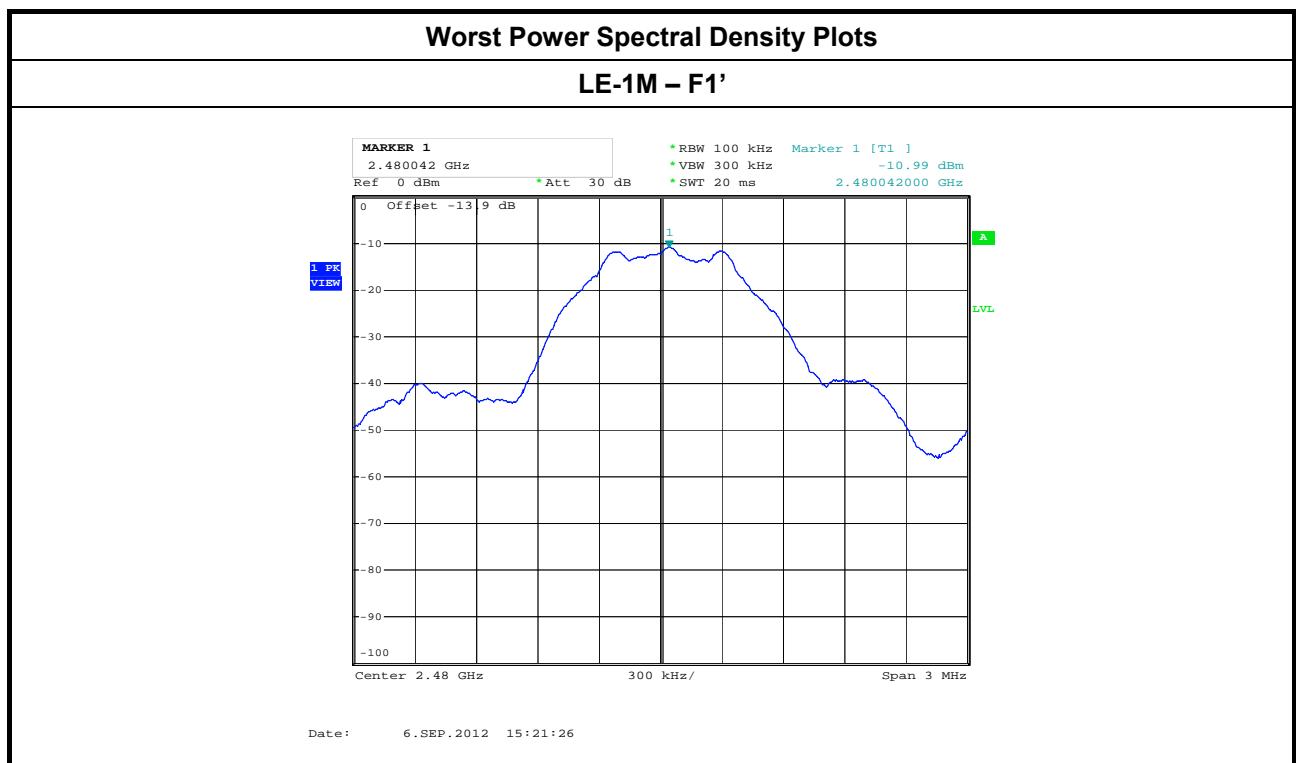

3.5 Transmitter Radiated Bandedge Emissions

3.5.1 Transmitter Radiated Bandedge Emissions Limit

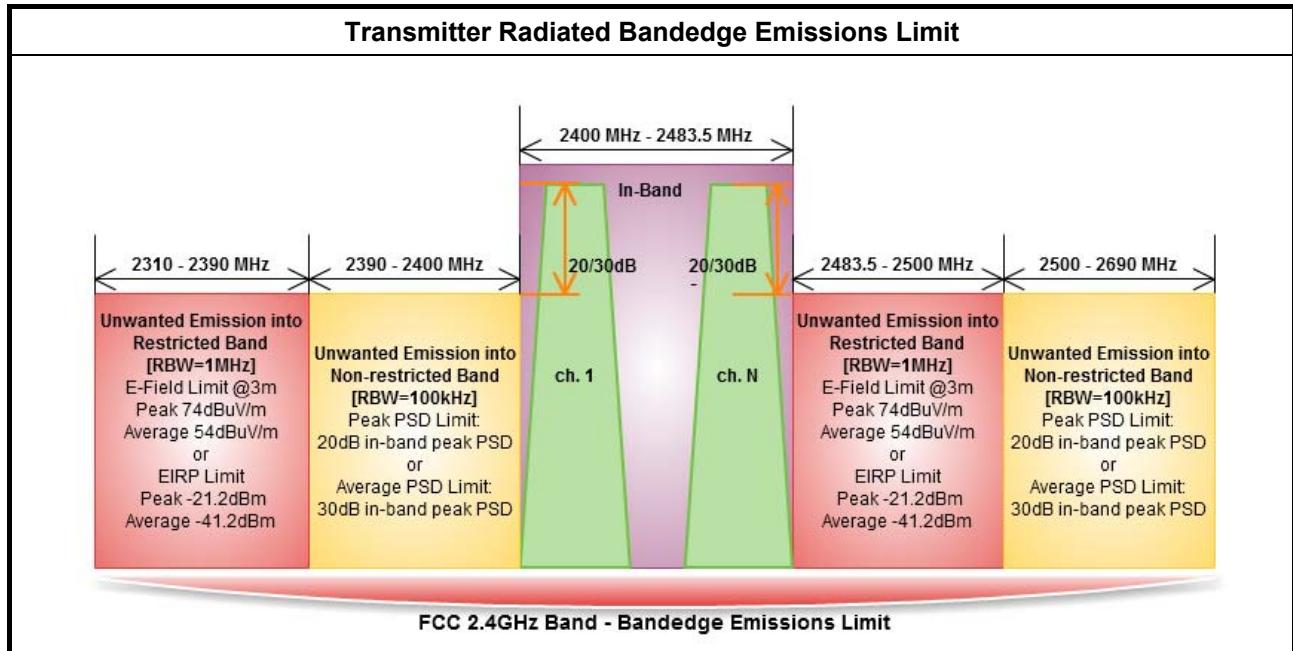

3.5.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method – General Information	
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 5.4.1 for unwanted emissions into non-restricted bands.	
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 5.4.2 for unwanted emissions into restricted bands.	
<input type="checkbox"/> Refer as FCC KDB 558074, clause 5.4.2.2.1 Option 1 (Power Averaging).	
<input type="checkbox"/> Refer as FCC KDB 558074, clause 5.4.2.2.2 Option 2 (Trace Averaging).	
<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). – Duty cycle \geq 98%.	
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.	
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 5.4.2.2.1.1 measurement procedure peak limit.	
<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.	
<input checked="" type="checkbox"/>	For the transmitter bandedge emissions shall be measured using following options below:
<input type="checkbox"/> Refer as FCC KDB 558074, clause 5.4.2.2.4 for narrower resolution bandwidth using the band power and summing the spectral levels (i.e., 100 kHz or 1 MHz).	
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.	
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.	

Test Method	
<input type="checkbox"/> Refer as FCC KDB 558074, clause 2 for conducted measurement.	
	<input type="checkbox"/> For unwanted emissions into non-restricted bands (relative emission limits).
	<input type="checkbox"/> For conducted measurements on devices with multiple transmit chains: Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding 10 log(N) if the measurements are made relative to the in-band emissions on the individual outputs.
	<input type="checkbox"/> For unwanted emissions into restricted bands. Test conducted spurious emissions and radiated by the cabinet with the antenna connector(s) terminated by a specified load (cabinet radiation).
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 5.4.2.2.1 unwanted emissions in restricted bands on frequencies \leq 1000 MHz
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 5.4.2.2.2 unwanted emissions in restricted bands on frequencies $>$ 1000 MHz
	<input type="checkbox"/> For conducted measurements on devices with multiple transmit chains using options given below:
	<input type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, out-of-band and spurious emission measurement. The trace data for each transmit chain has to be individually recorded and each transmit chain trace data shall be added and compared with the limit.
	<input type="checkbox"/> Option 2: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 2 for radiated measurement.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.5 for radiated emissions from above 1 GHz.

3.5.4 Test Setup

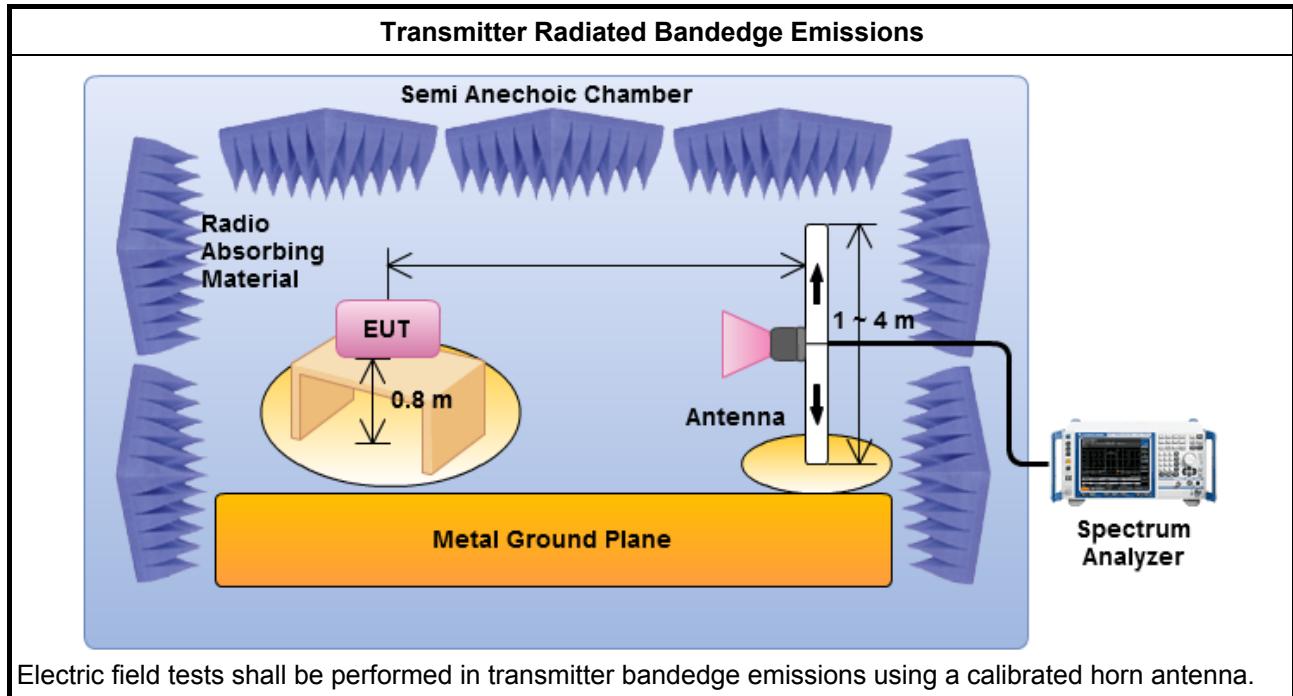

3.5.5 Test Result of Transmitter Radiated Bandedge Emissions

Transmitter Radiated Bandedge Emissions Result								
Modulation	LE-1M		Non-restricted Band Emissions					
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Level Type	Pol. note 1
2390-2400	2402	104.89	2400.00	65.26	39.63	20	PK	V
2500-2690	2480	103.29	2549.10	64.22	39.07	20	PK	V
Low Bandedge				Up Bandedge				

Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)

Transmitter Radiated Bandedge Emissions Result								
Modulation	LE-1M		Restricted Band Emissions					
Restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/1MHz)	RBE Freq. (MHz)	Measure Distance (m)	Out-Band Level (dBuV/m)	Limit (dBuV/m)	Level Type	Pol. note 1
2310-2390	2402	105.38	2386.83	3	60.53	74	PK	V
2310-2390	2402	82.92	2376.08	3	46.99	54	AV	V
2483.5-2500	2480	103.74	2483.50	3	62.91	74	PK	V
2483.5-2500	2480	82.00	2483.50	3	49.55	54	AV	V

Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical).
Note 2: the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$ [-30dB]

3.6 Transmitter Radiated Unwanted Emissions

3.6.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures


Test Method – General Information	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	Measurements in the frequency range 10 GHz - 18GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	Measurements in the frequency range above 18 GHz - 25GHz are typically made at a closer distance 0.5m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	For spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 5.4.1 for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 5.4.2 for unwanted emissions into restricted bands.
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 5.4.2.2.1 Option 1 (Power Averaging).
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 5.4.2.2.2 Option 2 (Trace Averaging).
	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW) – Duty cycle \geq 98%.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 5.4.2.2.1.1 measurement procedure peak limit.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.


Test Method	
<input type="checkbox"/> Refer as FCC KDB 558074, clause 2 for conducted measurement.	
	<input type="checkbox"/> For unwanted emissions into non-restricted bands (relative emission limits).
	<input type="checkbox"/> For conducted measurements on devices with multiple transmit chains: Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding 10 log(N) if the measurements are made relative to the in-band emissions on the individual outputs.
	<input type="checkbox"/> For unwanted emissions into restricted bands. Test conducted spurious emissions and radiated by the cabinet with the antenna connector(s) terminated by a specified load (cabinet radiation).
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 5.4.2.2.1 unwanted emissions in restricted bands on frequencies \leq 1000 MHz
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 5.4.2.2.2 unwanted emissions in restricted bands on frequencies $>$ 1000 MHz
	<input type="checkbox"/> For conducted measurements on devices with multiple transmit chains using options given below:
	<input type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, out-of-band and spurious emission measurement. The trace data for each transmit chain has to be individually recorded and each transmit chain trace data shall be added and compared with the limit.
	<input type="checkbox"/> Option 2: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
<input checked="" type="checkbox"/>	For radiated measurement.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.5 for radiated emissions from above 1 GHz.

3.6.4 Test Setup

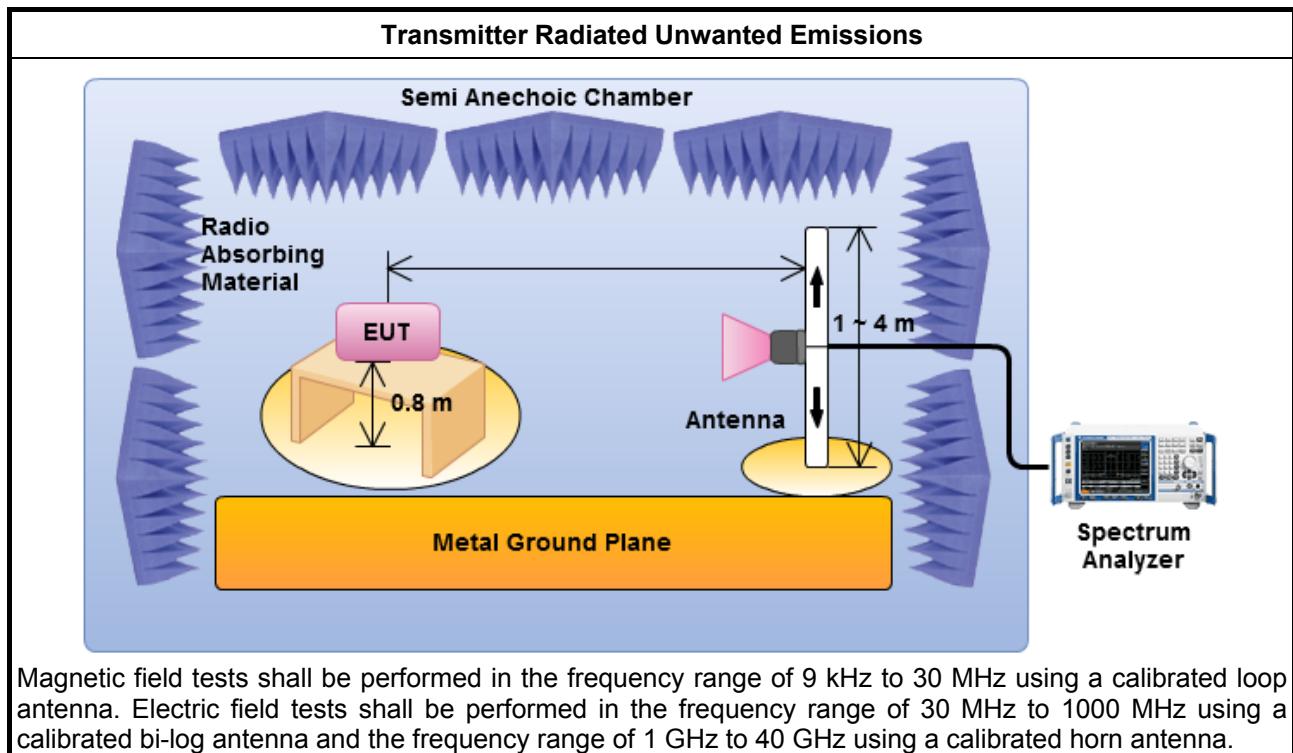

3.6.5 Transmitter Radiated Unwanted Emissions (Below 1GHz)

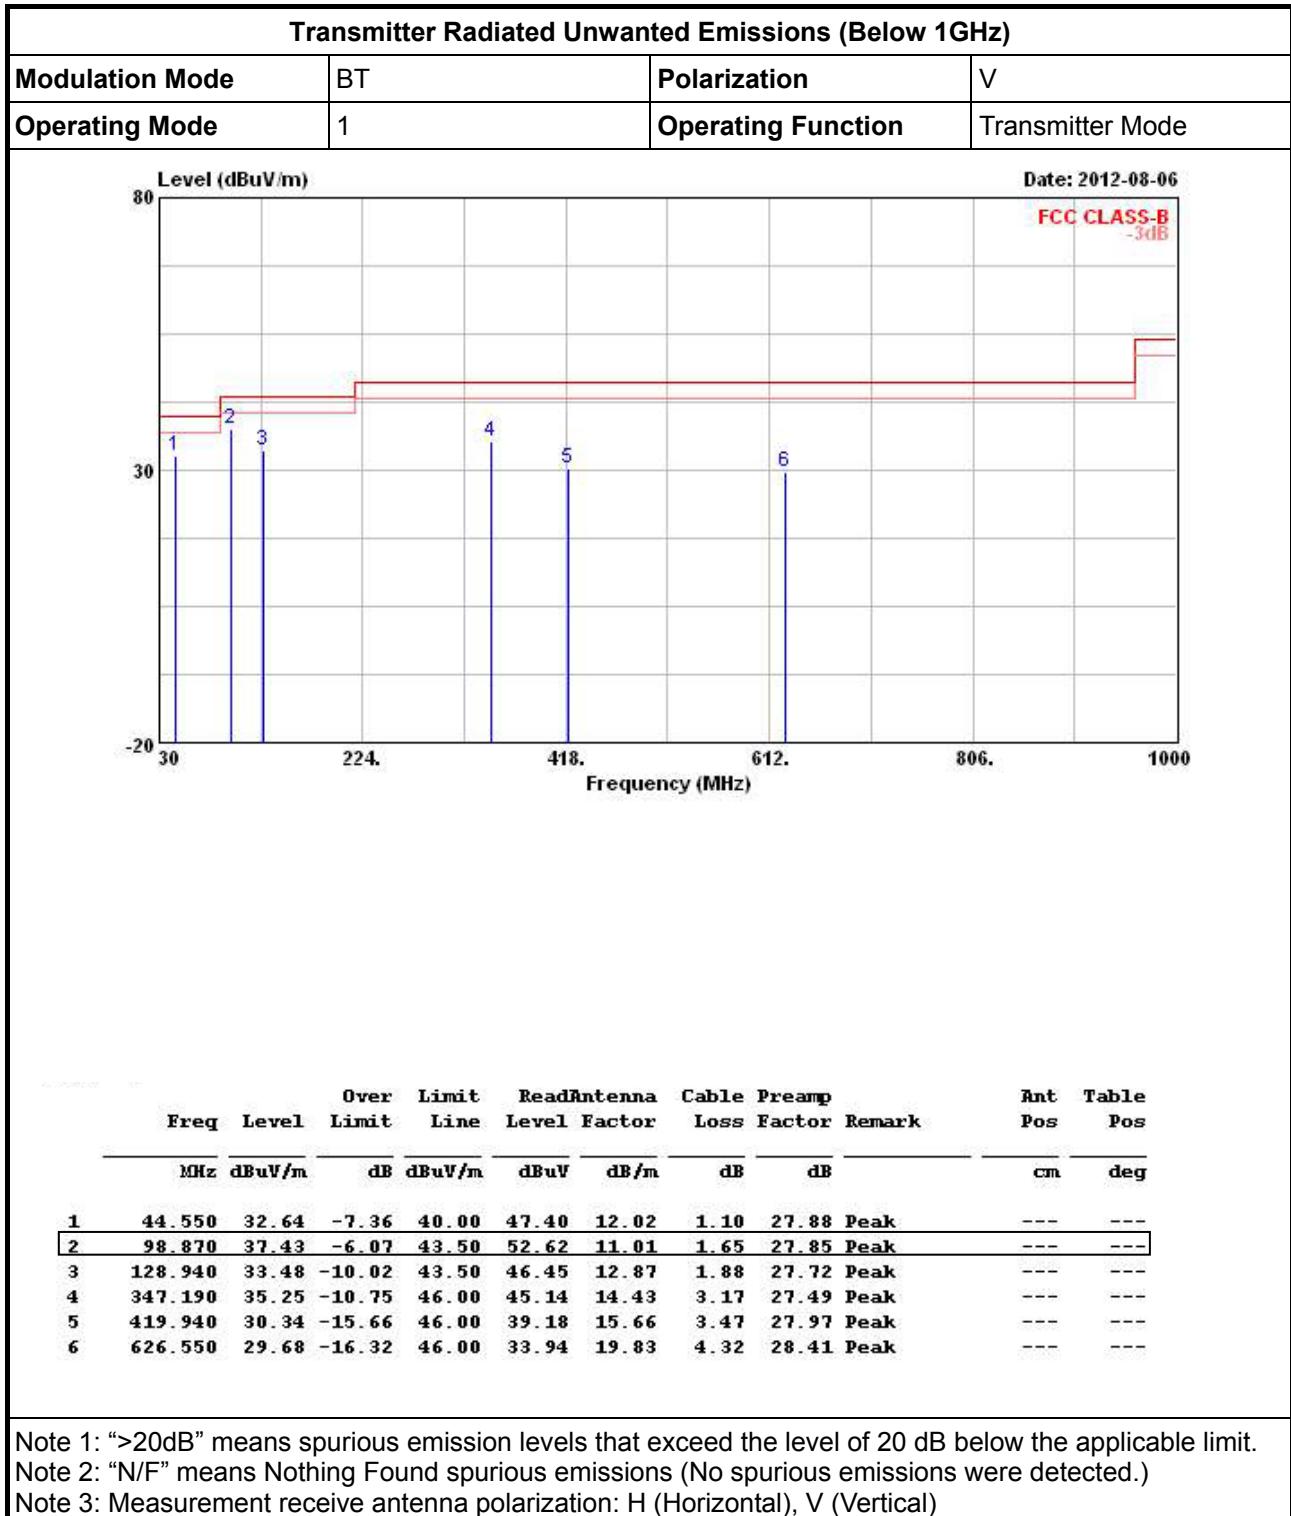

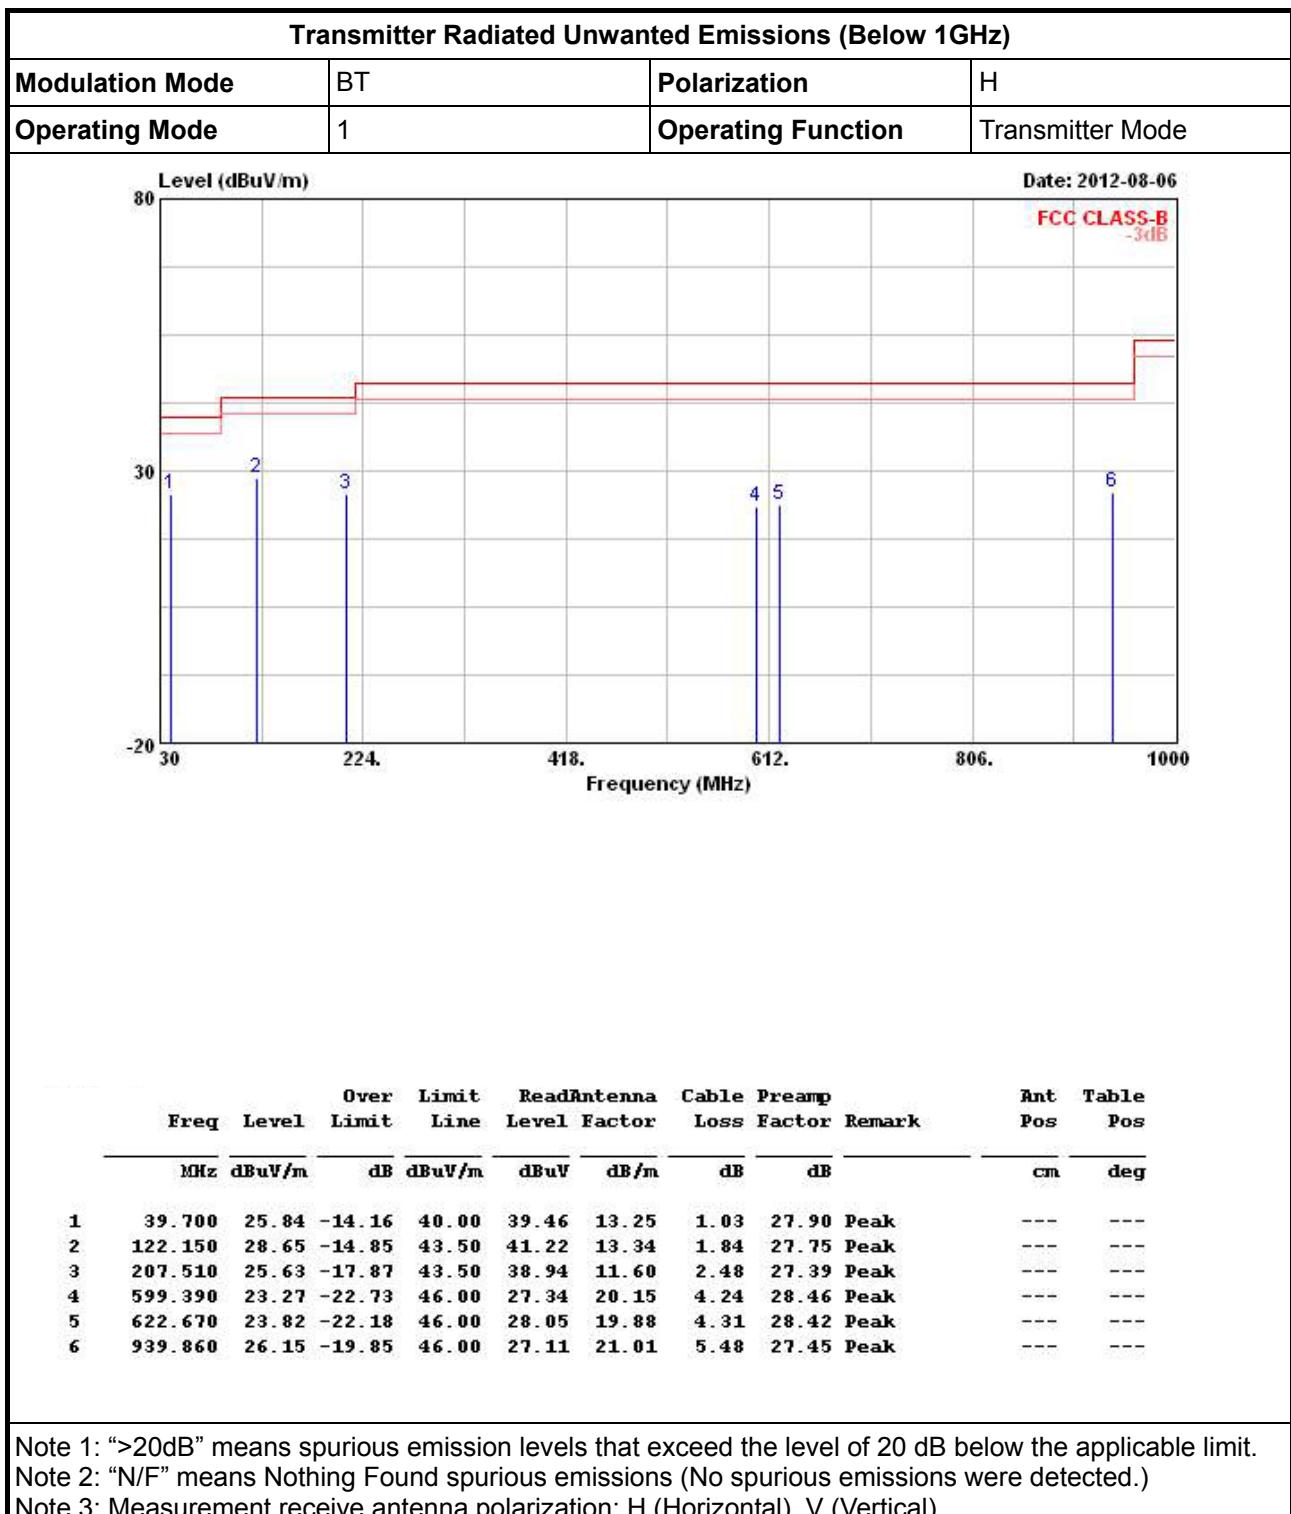



Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


3.6.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for LE-1M

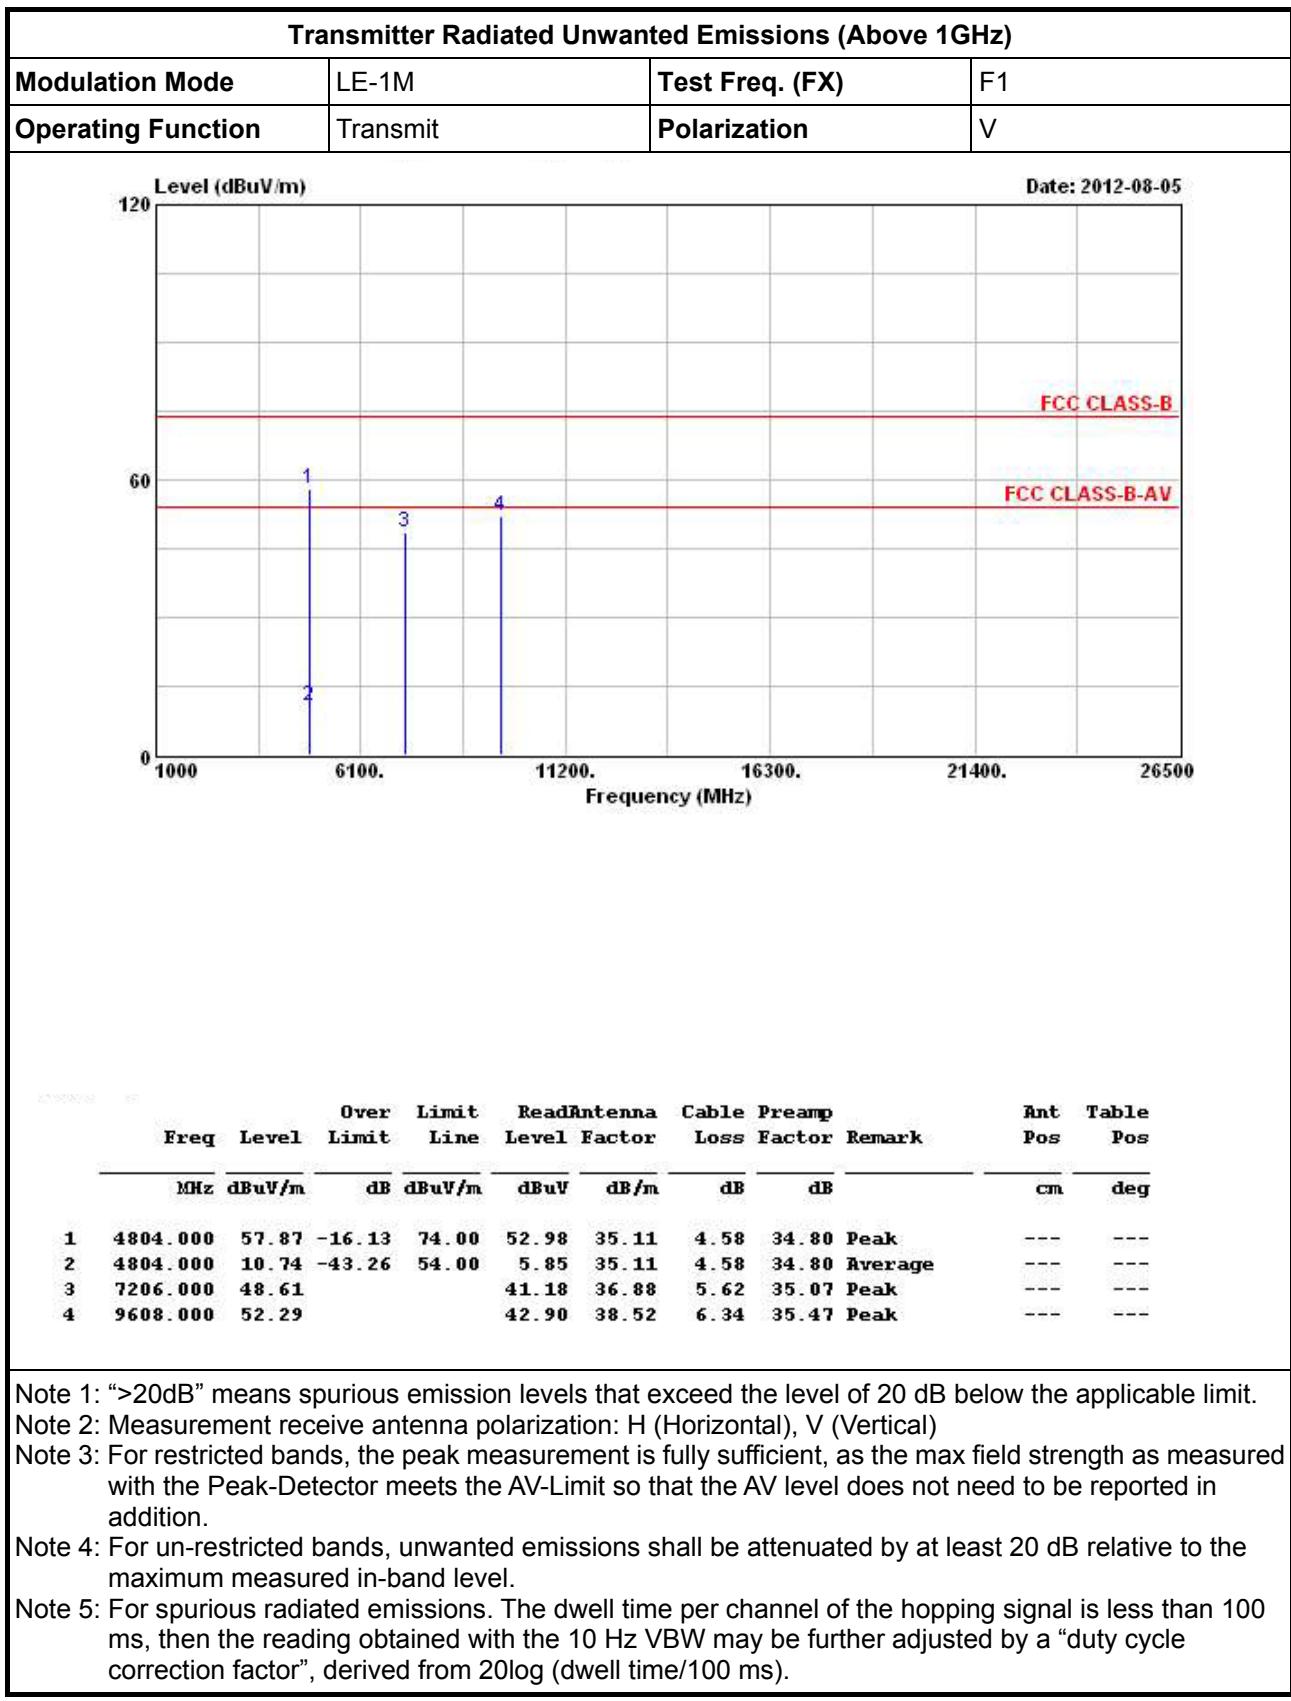


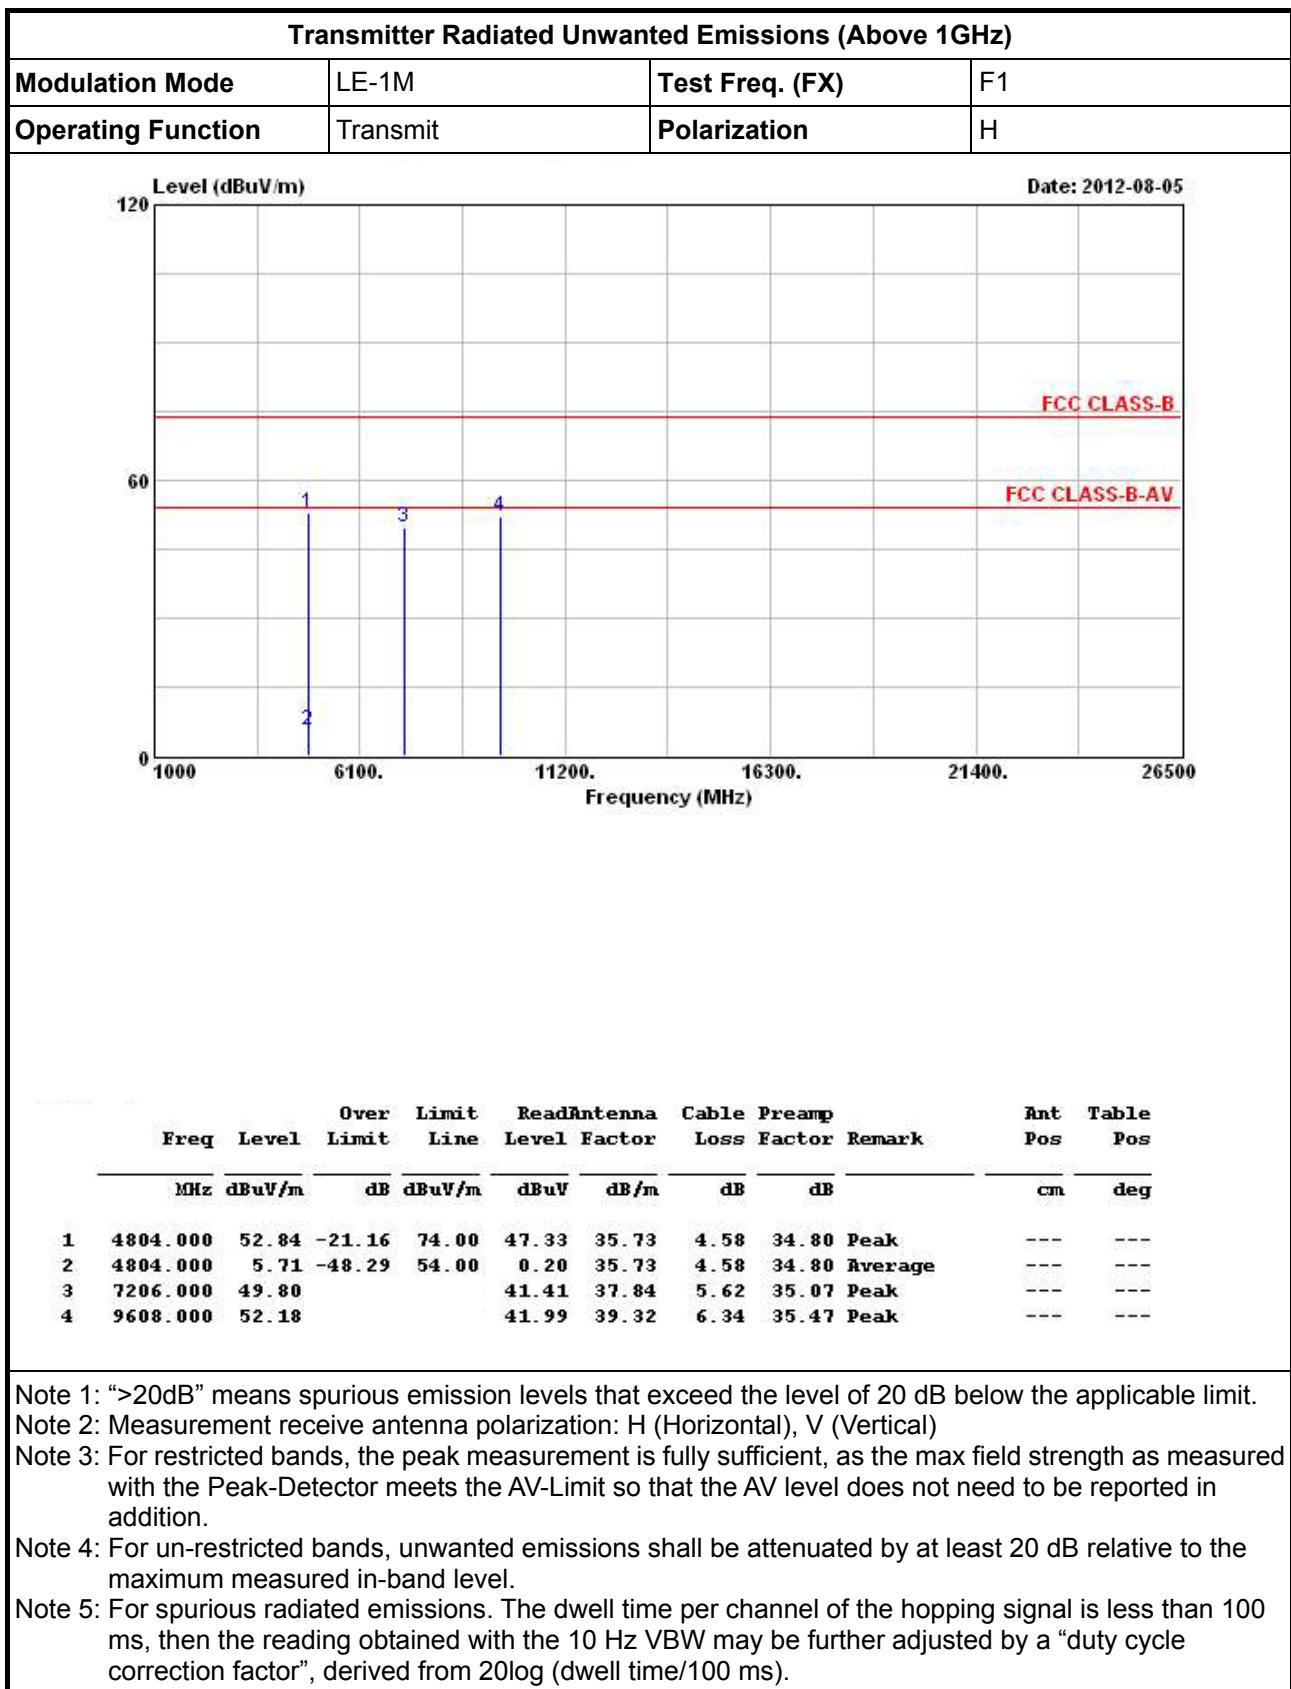

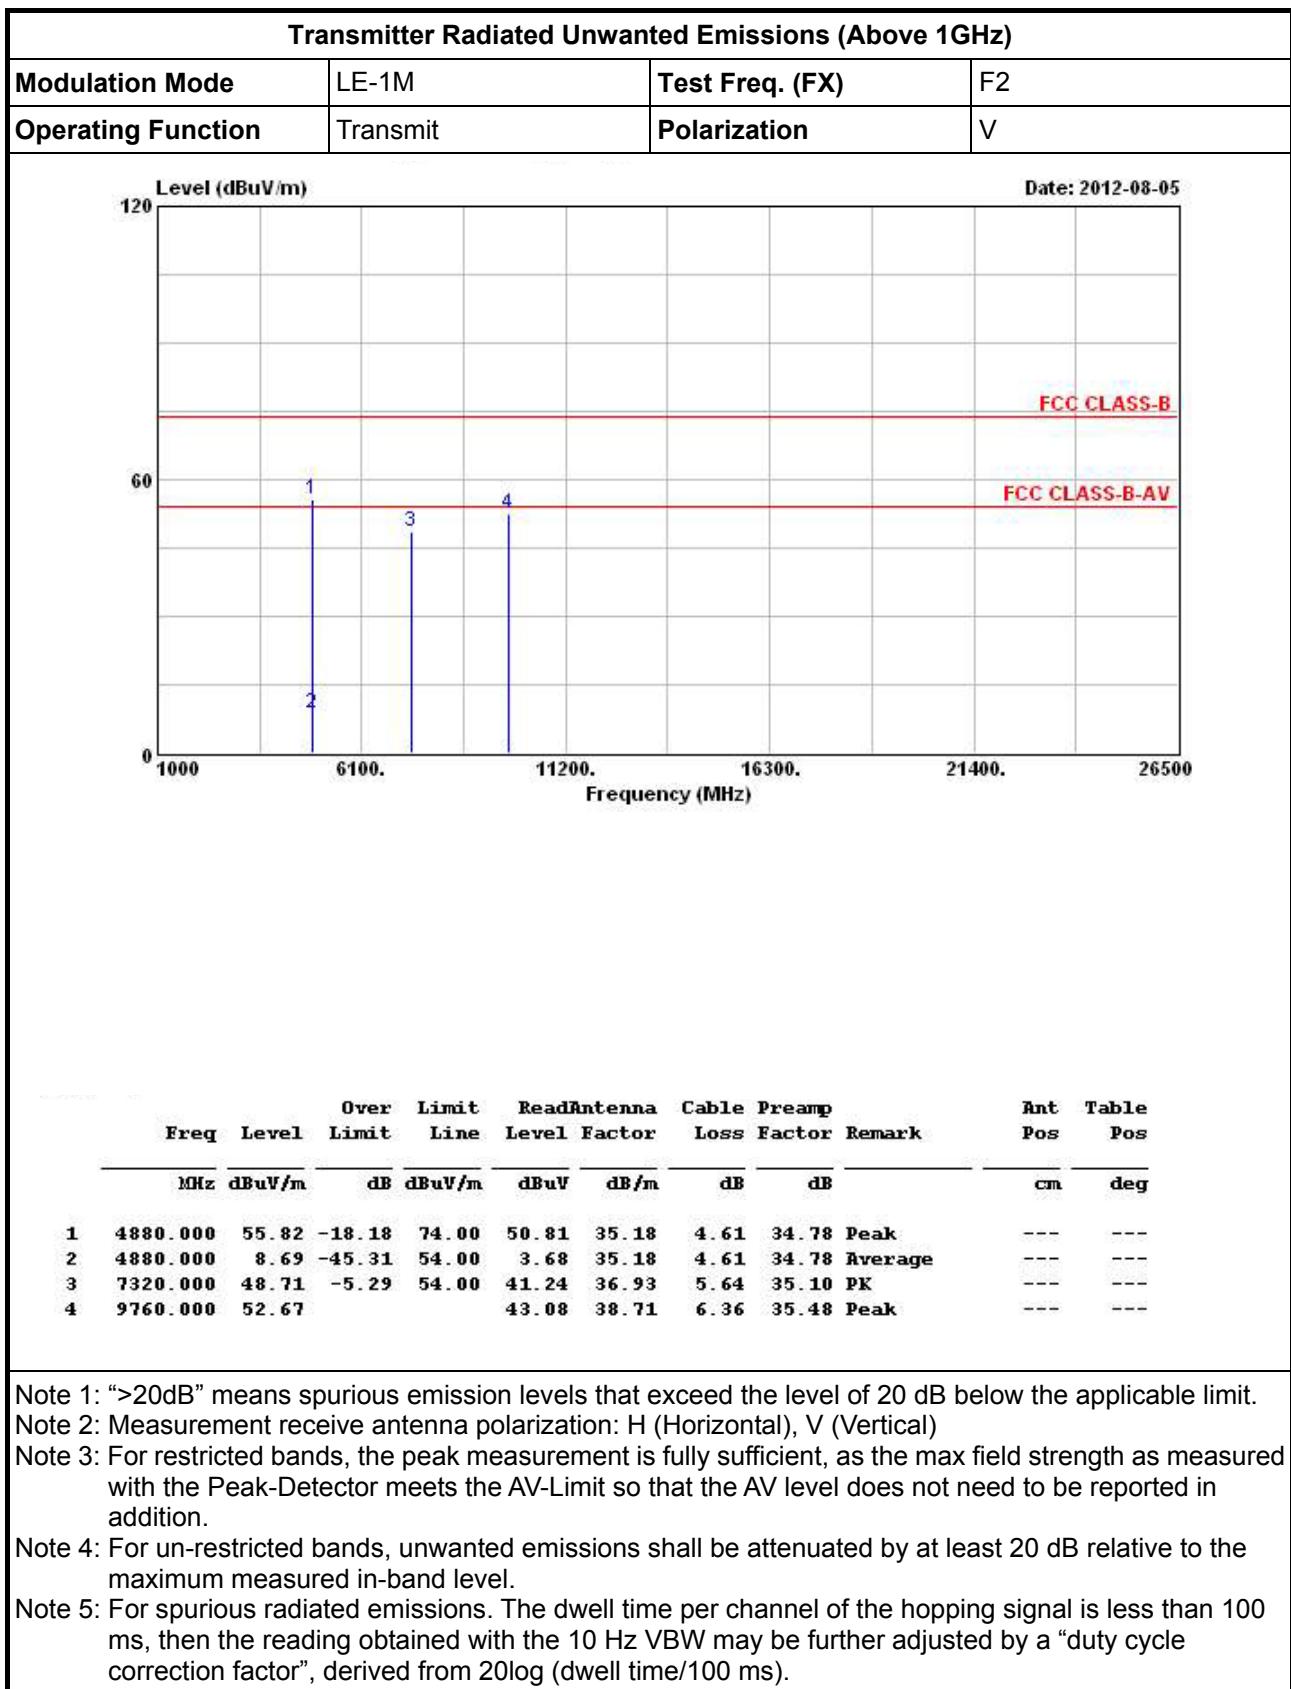

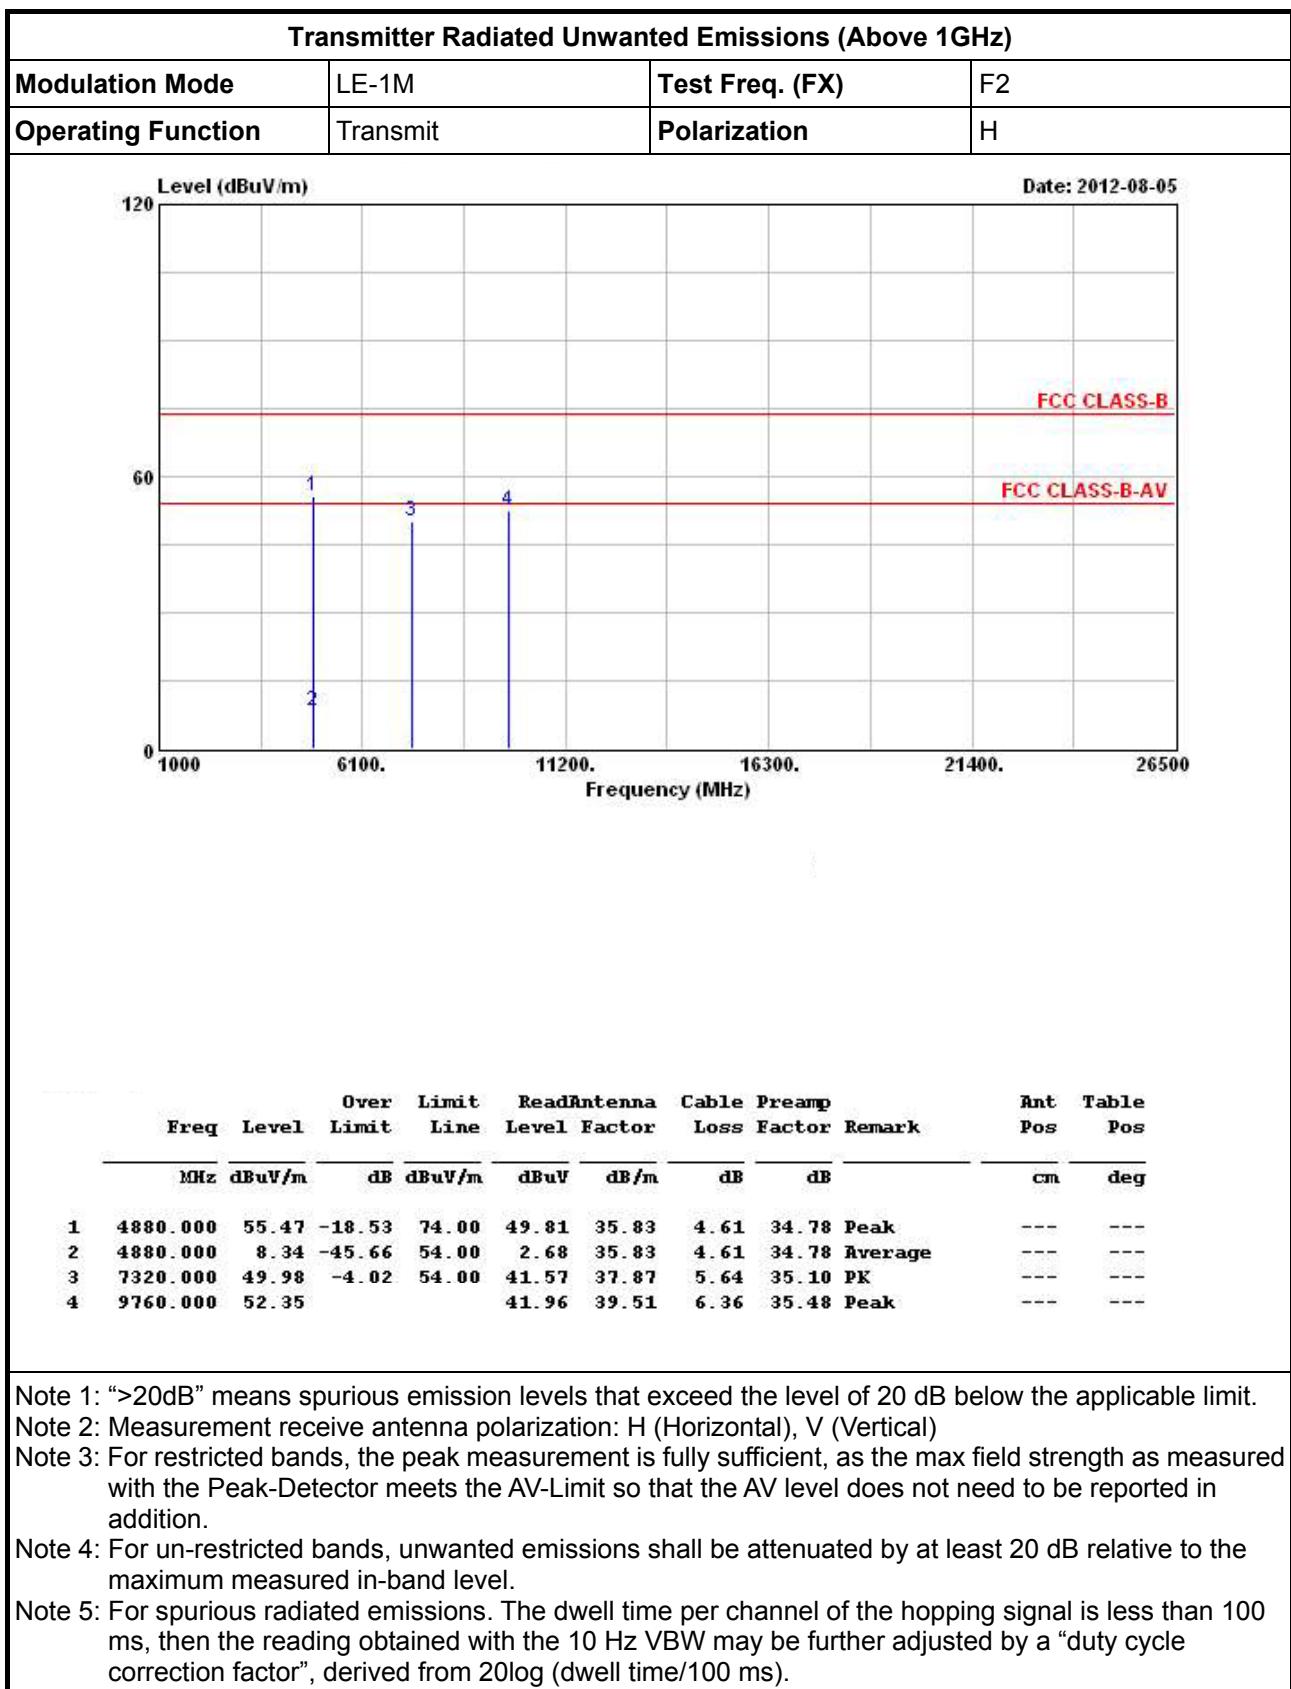

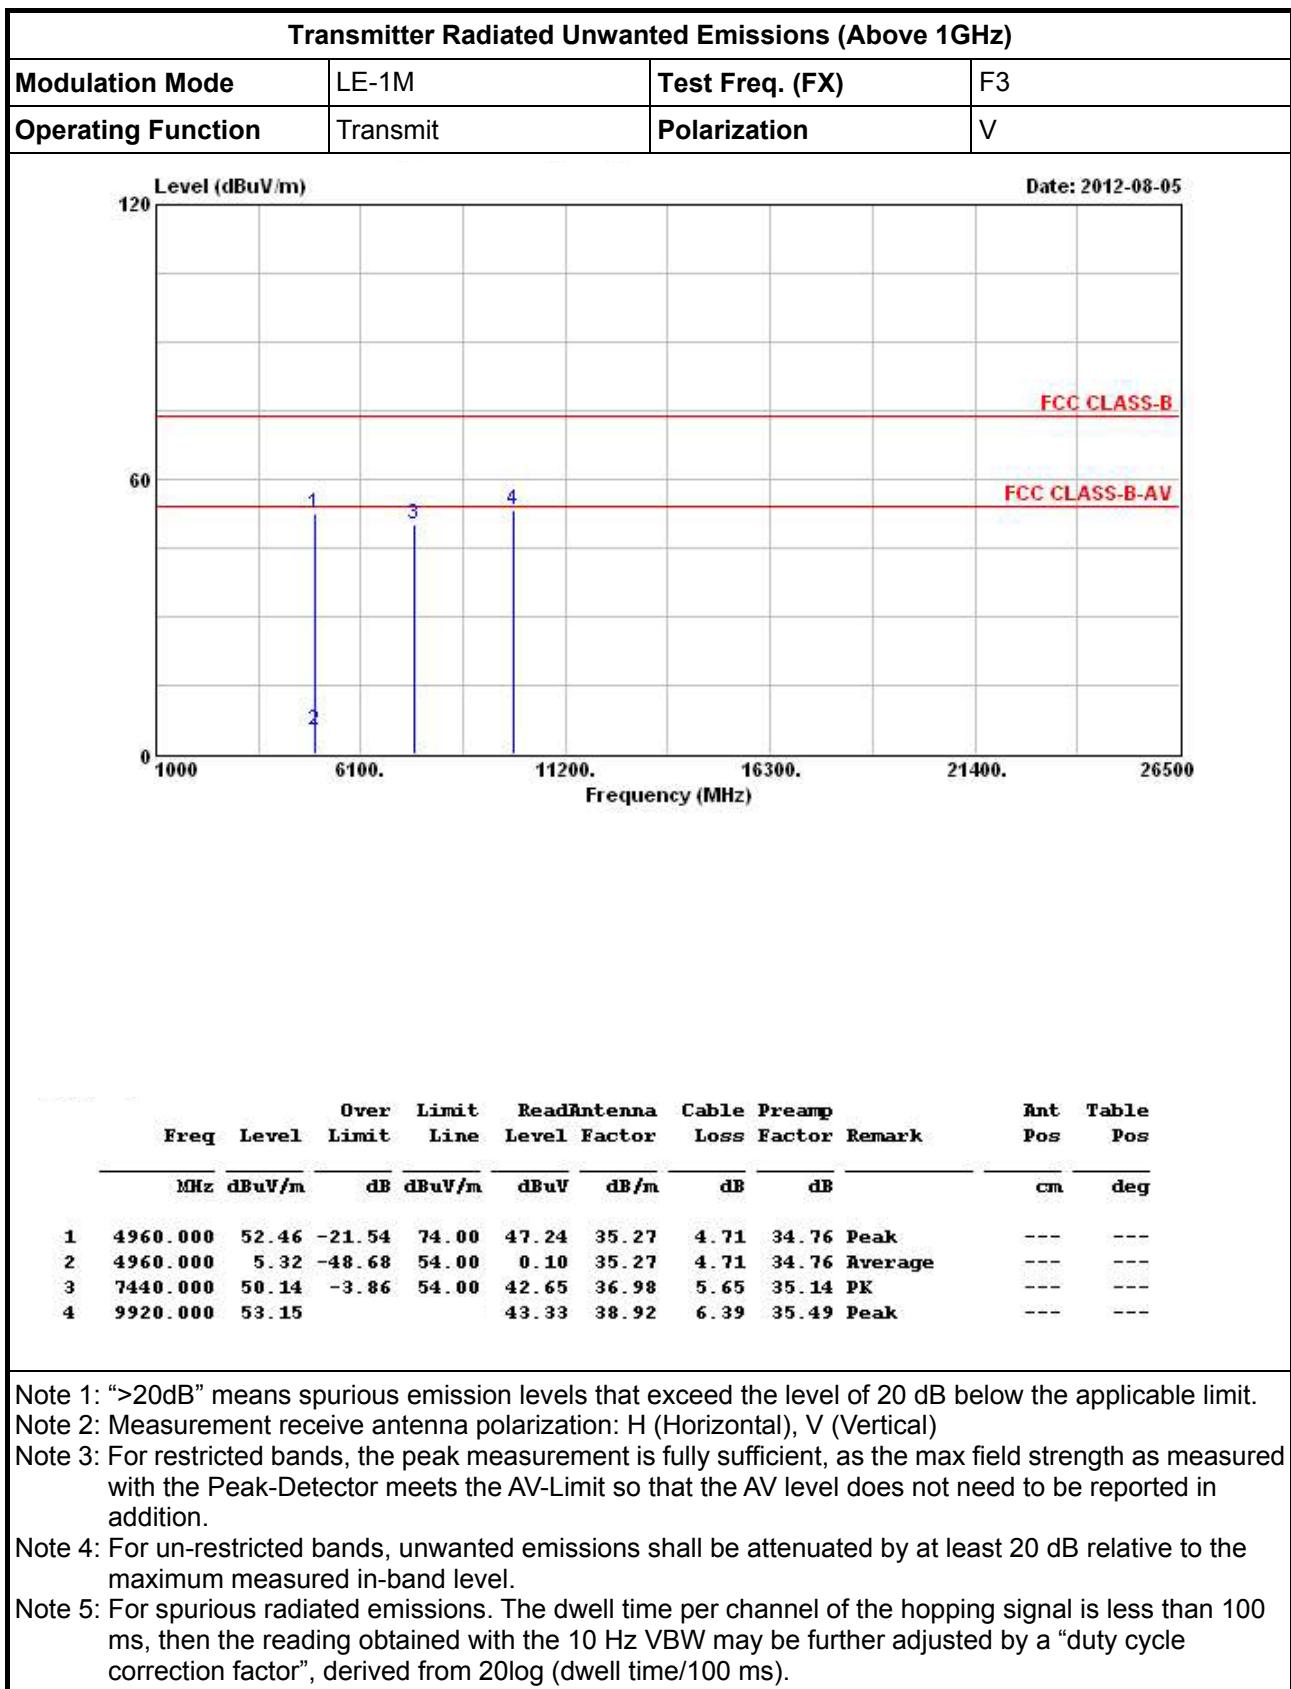

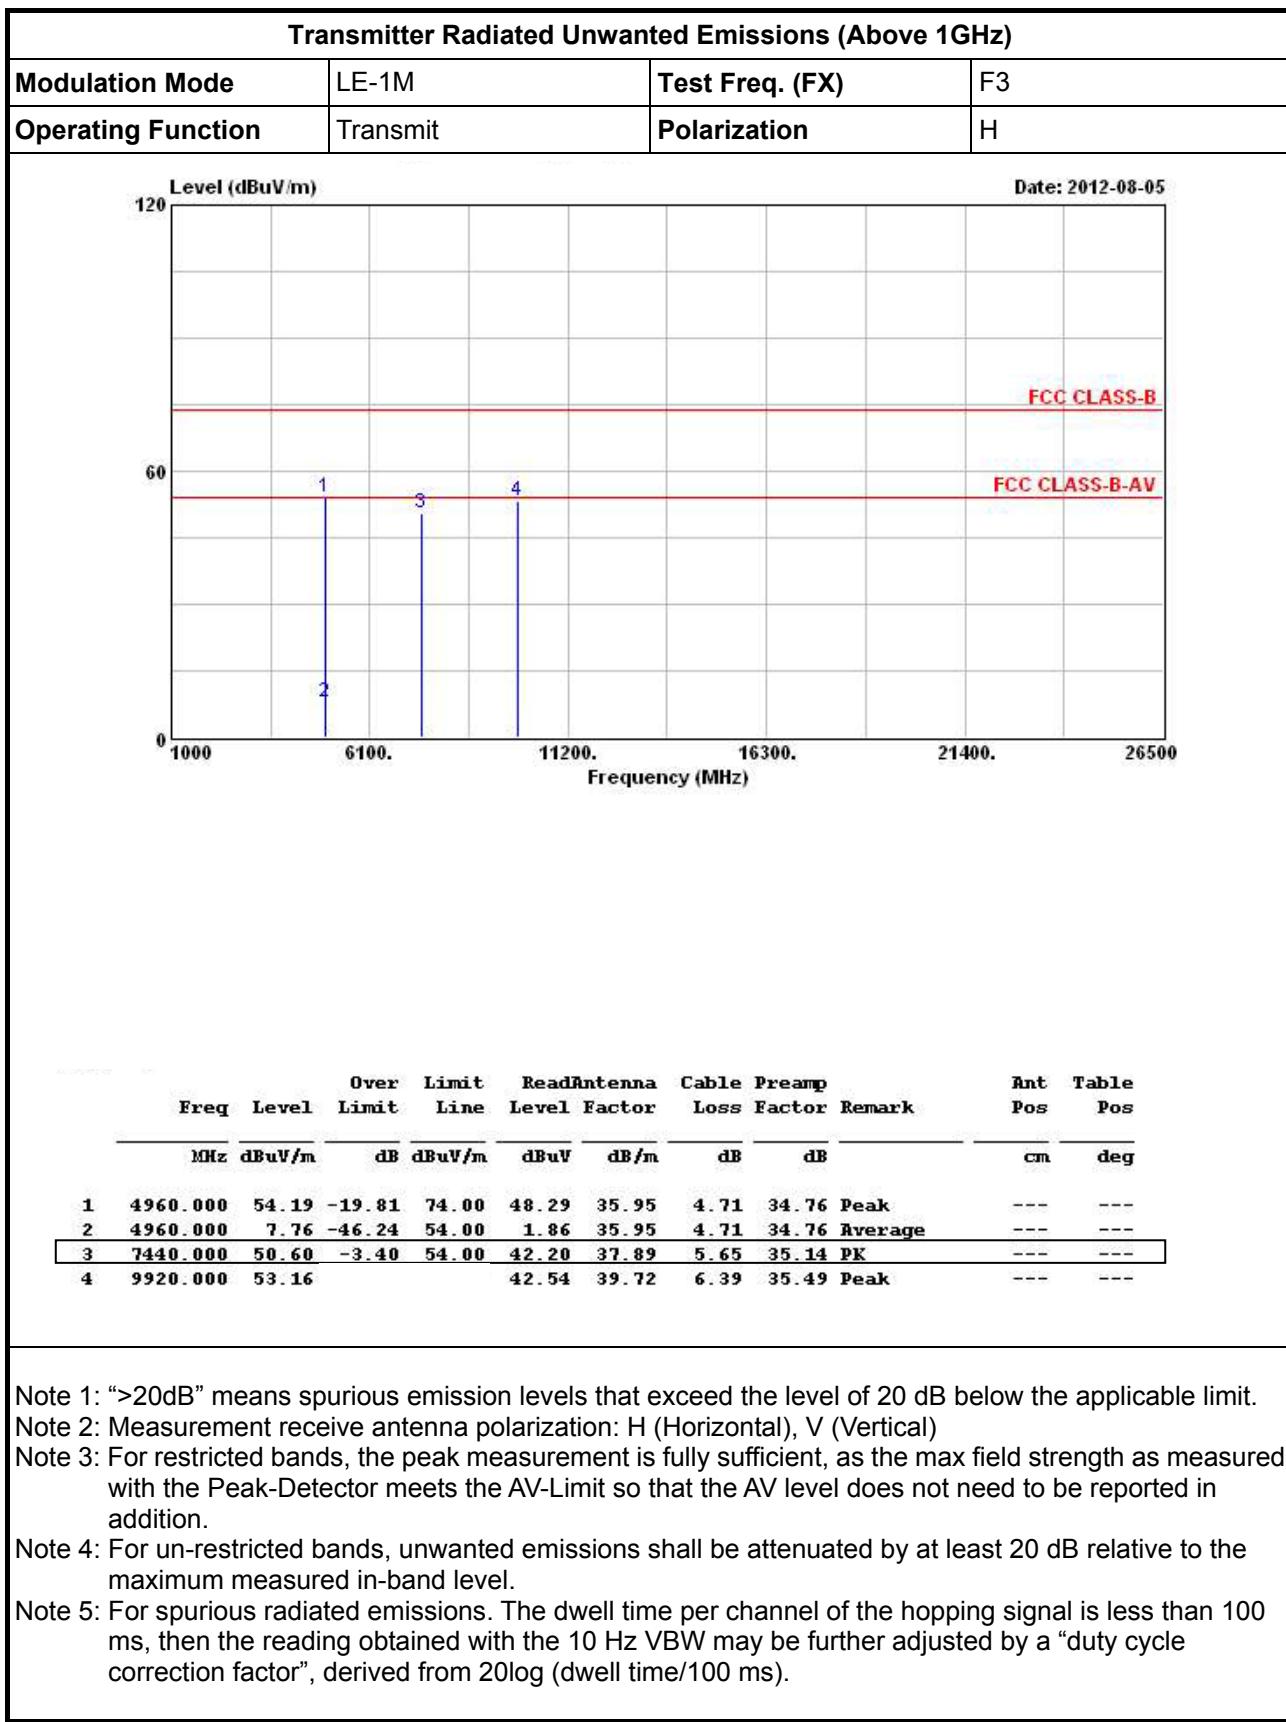

4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9 kHz ~ 2.75 GHz	Mar. 23, 2012	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz – 30MHz	Feb. 08, 2012	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9 kHz ~ 30 MHz	Apr. 20, 2012	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	CB049	9 kHz ~ 30 MHz	Apr. 25, 2012	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP 40	100305	9KHz~40GHz	Feb. 21, 2012	Conducted (TH01-HY)
Spectrum Analyzer	R&S	FSV 40	15195-01-00	9KHz~40GHz	Jan. 06, 2012	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Jun. 19, 2012	Conducted (TH01-HY)
AC Power Source	G.W	APS-9102	EL920581	AC 0V ~ 300V	Jul. 02, 2012	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	-20 ~ 100°C	Dec. 07, 2011	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100302	10MHz ~ 40GHz	Nov. 22, 2011	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	1027452	300MHz ~ 40GHz	Jan. 12, 2012	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	1124009	300MHz ~ 40GHz	Jan. 12, 2012	Conducted (TH01-HY)
RF Cable-2m	HUBER+SUHNER	SUCOFLEX_104	SN 345672/4	1GHz ~ 26.5GHz	Dec. 03, 2011	Conducted (TH01-HY)
RF Cable-3m	HUBER+SUHNER	SUCOFLEX_104	SN 345668/4	1GHz ~ 26.5GHz	Dec. 03, 2011	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Jun. 09, 2011*	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP40	100593	9kHz ~ 40GHz	Sep. 01, 2011	Radiation (03CH02-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz ~ 1GHz 3m	May 10, 2012	Radiation (03CH02-HY)
Amplifier	Agilent	8447D	2944A11146	100kHz ~ 1.3GHz	Jul. 23, 2012	Radiation (03CH02-HY)
Amplifier	Agilent	8449B	3008A02096	1GHz ~ 26.5GHz	Mar. 20, 2012	Radiation (03CH02-HY)
Horn Antenna	ETS-LINDGREN	3117	00091920	1GHz ~ 18GHz	Nov. 15, 2011	Radiation (03CH02-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz ~ 1GHz	Nov. 11, 2011	Radiation (03CH02-HY)
RF Cable-high	SUHNER	SUCOFLEX106	03CH02-HY	1GHz ~ 40GHz	Mar. 06, 2012	Radiation (03CH02-HY)
Bilog Antenna	SCHAFFNER	CBL61128	2723	30MHz ~ 2GHz	Oct. 22, 2011	Radiation (03CH02-HY)
Turn Table	HD	DS 420	420/649/00	0~ 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	HD	MA 240	240/559/00	1 ~ 4 m	N/A	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Sep. 09, 2010*	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is two year.

5 Certification of TAF Accreditation



Certificate No. : L1190-120405

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.

EMC & Wireless Communications Laboratory

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria : ISO/IEC 17025:2005

Accreditation Number : 1190

Originally Accredited : December 15, 2003

Effective Period : January 10, 2010 to January 09, 2013

Accredited Scope : Testing Field, see described in the Appendix

Specific Accreditation Program : Accreditation Program for Designated Testing Laboratory
for Commodities Inspection

Accreditation Program for Telecommunication Equipment
Testing Laboratory

Accreditation Program for BSMI Mutual Recognition
Arrangement with Foreign Authorities

Jay-San Chen
President, Taiwan Accreditation Foundation
Date: April 05, 2012

P1, total 24 pages