



# FCC RF Test Report

**APPLICANT** : HTC Corporation  
**EQUIPMENT** : PDA Phone  
**MODEL NAME** : PD15100  
**FCC ID** : NM8PD15100  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : Digital Spread Spectrum (DSS)

The product was received on Jul. 16, 2010 and completely tested on Aug. 24, 2010. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

Anderson Chiu / Deputy Manager



## **SPORTON INTERNATIONAL INC.**

**No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.**

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : NM8PD15100

Page Number : 1 of 51

Report Issued Date : Sep. 13, 2010

Report Version : Rev. 01



# TABLE OF CONTENTS

REVISION HISTORY ..... 3

SUMMARY OF TEST RESULT ..... 4

1 GENERAL DESCRIPTION ..... 5

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Feature of Equipment Under Test ..... 5

    1.4 Testing Site ..... 6

    1.5 Applied Standards ..... 6

    1.6 Ancillary Equipment List ..... 6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 7

    2.1 RF Output Power ..... 7

    2.2 Test Mode ..... 8

    2.3 Connection Diagram of Test System ..... 9

    2.4 RF Utility ..... 9

3 TEST RESULT ..... 10

    3.1 Number of Channel Measurement ..... 10

    3.2 20dB Bandwidth Measurement ..... 12

    3.3 Hopping Channel Separation Measurement ..... 19

    3.4 Dwell Time Measurement ..... 22

    3.5 Peak Output Power Measurement ..... 24

    3.6 Band Edges Measurement ..... 27

    3.7 Spurious Emission Measurement ..... 31

    3.8 AC Conducted Emission Measurement ..... 35

    3.9 Radiated Emission Measurement ..... 39

    3.10 Antenna Requirements ..... 48

4 LIST OF MEASURING EQUIPMENT ..... 49

5 UNCERTAINTY OF EVALUATION ..... 50

APPENDIX A. SETUP PHOTOGRAPHS



**SUMMARY OF TEST RESULT**

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	A8.4(2)	Number of Channels	≥ 15Chs	Pass	-
3.2	15.247(a)(1)	A8.1(a)	20dB Bandwidth	NA	Pass	-
3.3	15.247(a)(1)	A8.1(b)	Channel Separation	≥ 2/3 of 20dB BW	Pass	-
3.4	15.247(a)(1)	A8.1(d)	Dwell Time of Each Channel	≤ 0.4sec in 31.6sec period	Pass	-
3.5	15.247(b)(1)	A8.1(b)	Peak Output Power	≤ 1W	Pass	-
3.6	15.247(d)	A8.5	Frequency Band Edges	≤ 20dBc	Pass	-
3.7	15.247(d)	A8.5	Spurious Emission	< 20 dBc	Pass	-
3.8	15.207	Gen 7.2.2	AC Conducted Emission	15.207(a)	Pass	Under limit 9.1 dB at 0.254 MHz
3.9	15.247(d)	A8.5	Transmitter Radiated Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.15 dB at 30.00 MHz
3.10	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-

# 1 General Description

## 1.1 Applicant

**HTC Corporation**

No. 23, Xinghua Rd., Taoyuan City, Taiwan

## 1.2 Manufacturer

**HTC Corporation**

No. 23, Xinghua Rd., Taoyuan City, Taiwan

## 1.3 Feature of Equipment Under Test

Product Feature & Specification	
<b>Equipment</b>	PDA Phone
<b>Model Name</b>	PD15100
<b>FCC ID</b>	NM8PD15100
<b>Sample 1</b>	EUT with LCM-Main, Camera-Main and PA-Main
<b>Sample 2</b>	EUT with LCM-2 <sup>nd</sup> , Camera-2 <sup>nd</sup> and PA-Main
<b>Sample 3</b>	EUT with LCM-Main, Camera-Main and PA-2 <sup>nd</sup>
<b>Tx/Rx Frequency Range</b>	2400 MHz ~ 2483.5 MHz
<b>Number of Channels</b>	79
<b>Carrier Frequency of Each Channel</b>	2402+n*1 MHz; n=0~78
<b>Channel Spacing</b>	1 MHz
<b>Maximum Output Power to Antenna</b>	Bluetooth (1Mbps) : -0.04 dBm (0.001 W) Bluetooth EDR (2Mbps) : 2.70 dBm (0.002 W) Bluetooth EDR (3Mbps) : 0.52 dBm (0.001 W)
<b>Antenna Type</b>	PIFA Antenna with gain 0.3 dBi
<b>Type of Modulation</b>	Bluetooth (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi$ /4-DQPSK Bluetooth EDR (3Mbps) : 8-DPSK
<b>EUT Stage</b>	Production Unit

**Remark:**

1. For other wireless features of this EUT, test report will be issued separately.
2. This test report recorded only product characteristics and test results of Digital Spread Spectrum (DSS).
3. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
4. This product has two kinds of PAs, PA-Main and PA-2<sup>nd</sup>. The difference does not relate RF (Bluetooth) effect, so only Sample 1 and Sample 2 are used for tests.

## 1.4 Testing Site

<b>Test Site</b>	SPORTON INTERNATIONAL INC.		
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC/IC Registration No.</b>
	CO05-HY	03CH07-HY	TW1022/4086B-1

## 1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Public Notice DA 00-705
- ♦ ANSI C63.4-2003
- ♦ IC RSS-210 Issue 7

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B (DoC), recorded in a separate test report.

## 1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	GPS Station	T&E	GS-50	N/A	N/A	Unshielded, 1.8 m
3.	Bluetooth Base Station	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m
4.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
5.	Notebook	DELL	Vostro 1510	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
6.	Bluetooth Earphone	Nokia	BH-102	PYAHS-107W	N/A	N/A

## 2 Test Configuration of Equipment Under Test

### 2.1 RF Output Power

Preliminary tests were performed in different data rate and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi$ /4-DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	-0.41 dBm	2.28 dBm	0.12 dBm
Ch39	2441MHz	-0.05 dBm	2.67 dBm	0.52 dBm
Ch78	2480MHz	-0.04 dBm	<b>2.70 dBm</b>	0.36 dBm

**Remark:**

1. The data rate was set in 2Mbps for all the test items due to the highest RF output power.
2. The EUT is programmed to transmit signals continuously for all testing.

## 2.2 Test Mode


The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Pre-scanned tests were conducted to determine the final configuration from all possible combinations. The following tables are showing the test modes as the worst cases and recorded in this report.


Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth 1Mbps / GFSK
	Bluetooth EDR 2Mbps / $\pi/4$ -DQPSK
	Bluetooth EDR 3Mbps / 8-DPSK
<b>Conducted TCs</b>	Mode 1: Bluetooth 1Mbps_CH00_2402 MHz Mode 2: Bluetooth 1Mbps_CH39_2441 MHz Mode 3: Bluetooth 1Mbps_CH78_2480 MHz Mode 4: Bluetooth EDR 2Mbps_CH00_2402 MHz Mode 5: Bluetooth EDR 2Mbps_CH39_2441 MHz Mode 6: Bluetooth EDR 2Mbps_CH78_2480 MHz Mode 7: Bluetooth EDR 3Mbps_CH00_2402 MHz Mode 8: Bluetooth EDR 3Mbps_CH39_2441 MHz Mode 9: Bluetooth EDR 3Mbps_CH78_2480 MHz
<b>Radiated TCs</b>	Mode 1: Bluetooth EDR 2Mbps_CH00_2402 MHz + TC for Sample 1 Mode 2: Bluetooth EDR 2Mbps_CH39_2441 MHz + TC for Sample 1 Mode 3: Bluetooth EDR 2Mbps_CH78_2480 MHz + TC for Sample 1
<b>AC Conducted Emission</b>	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link (2.4G) + GPS Rx + Earphone + Battery 2 + USB Cable 2 (Charging from Adapter 2) for Sample 1 Mode 2 : WCDMA Band IV Idle + Bluetooth Link + WLAN Link (5G) + GPS Rx + Earphone + Battery 2 + USB Cable 2 (Charging from Adapter 2) for Sample 1 Mode 3 : GSM850 Idle + Bluetooth Link + WLAN Link (2.4G) + GPS Rx + Earphone + Battery 2 + USB Cable 2 (Charging from Adapter 2) for Sample 2
<b>Remark:</b>	
<ol style="list-style-type: none"> <li>TC stands for Test Configuration, and consists of Battery 1, Earphone, USB Cable 1, and Adapter 3.</li> <li>For radiated TCs, the data rate was set in 2Mbps due to the highest RF output power; only the data of these modes was reported.</li> <li>For conducted emission, the worst case is mode 1; only the test data of this mode was reported.</li> </ol>	

## 2.3 Connection Diagram of Test System

<Bluetooth Tx Mode>

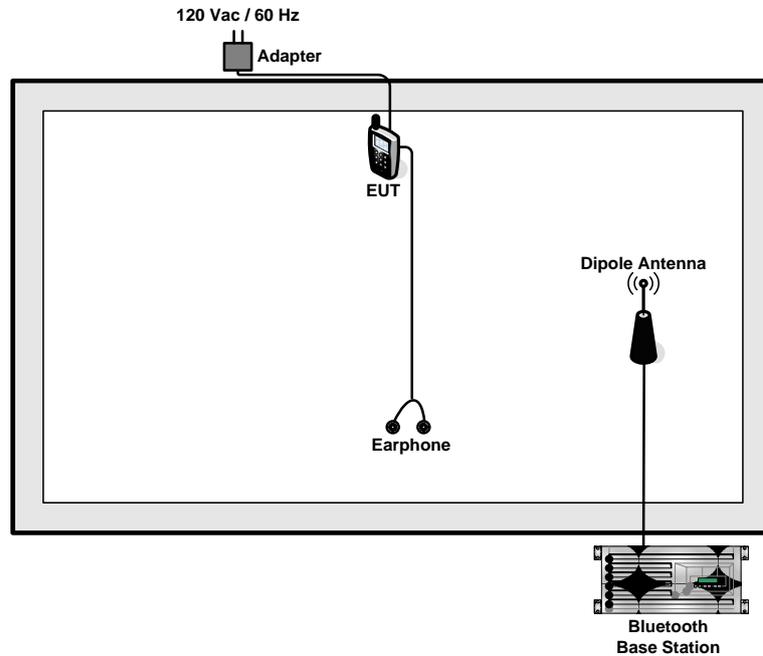

< AC Conducted Emission >

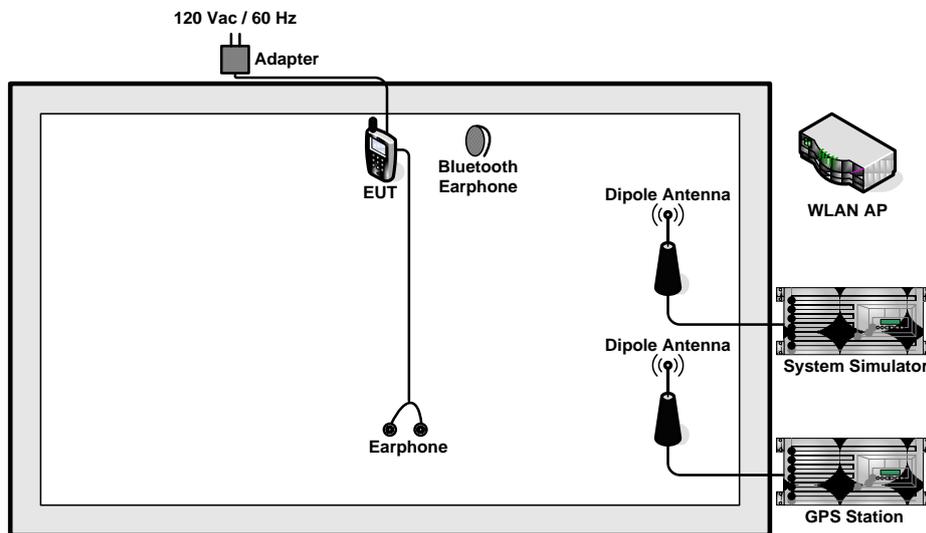

## 2.4 RF Utility

For Bluetooth function, the RF utility, "DUT Test Mode" was installed in EUT which was programmed in order to make the EUT into the engineering modes to contact with Bluetooth base station for transmitting and receiving signals continuously.

### 3 Test Result

#### 3.1 Number of Channel Measurement

##### 3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The modulation types of EUT are irrelevant to number of hopping channels deviation.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:  
Span = the frequency band of operation;  $RBW \geq 1\%$  of the span;  $VBW \geq RBW$ ; Sweep = auto;  
Detector function = peak; Trace = max hold.
5. The number of hopping frequency used is defined as the device has the numbers of total channel.

##### 3.1.4 Test Setup

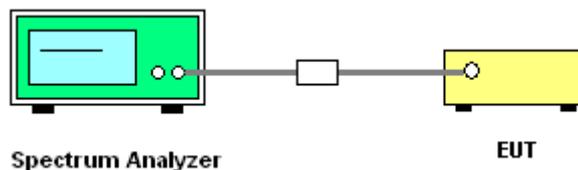





### 3.1.5 Test Result of Number of Hopping Frequency

Test Mode :	Mode 4~6	Temperature :	22~24°C
Test Engineer :	Andy Yeh	Relative Humidity :	61~64%
Number of Hopping Channels (Channel)		Limits (Channel)	
79		> 15	
		Pass	

Number of Hopping Channel Plot on Channel 00 - 78

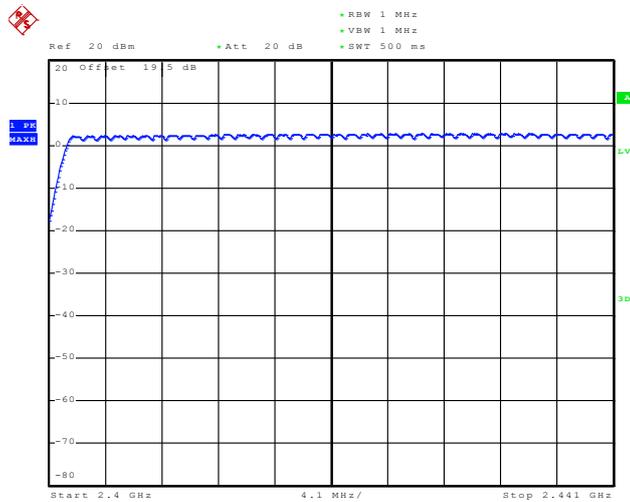

Date: 12.AUG.2010 21:40:19

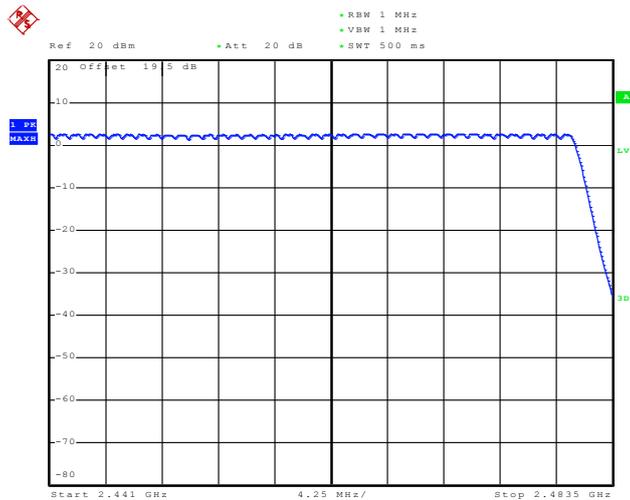

Date: 12.AUG.2010 21:46:26

## 3.2 20dB Bandwidth Measurement

### 3.2.1 Limit of 20dB Bandwidth

N/A


### 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:  
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;  
RBW  $\geq$  1% of the 20 dB bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
5. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

### 3.2.4 Test Setup

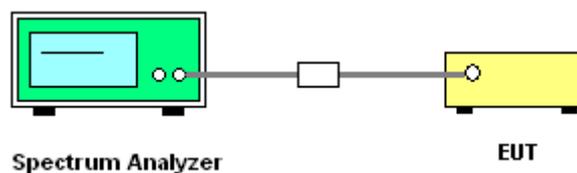




3.2.5 Test Result of 20dB Bandwidth

Test Mode :	Mode 1, 2, 3	Temperature :	22~24°C
Test Engineer :	Andy Yeh	Relative Humidity :	61~64%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.013
39	2441	0.952
78	2480	0.958


20 dB Bandwidth Plot on Channel 00

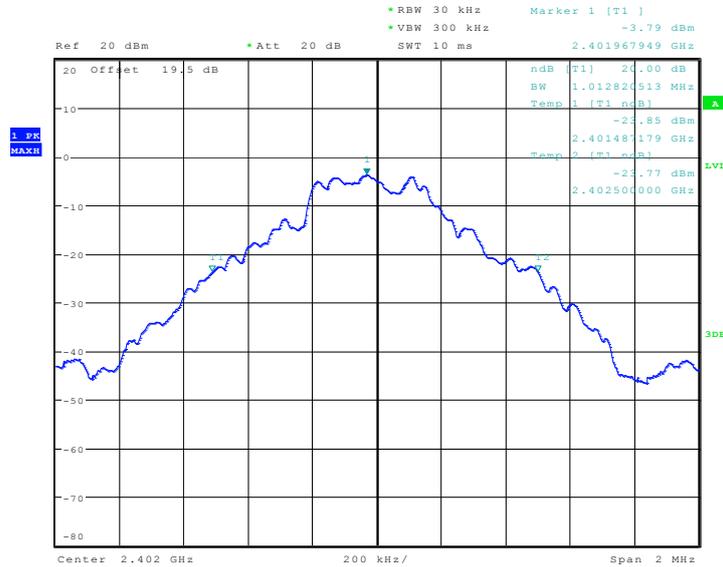

Date: 12.AUG.2010 17:39:41




20 dB Bandwidth Plot on Channel 39

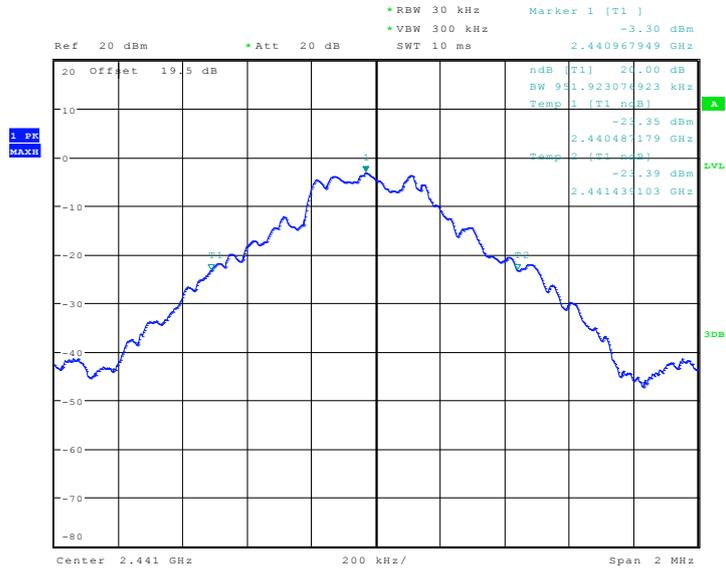

Date: 12.AUG.2010 17:40:49

20 dB Bandwidth Plot on Channel 78

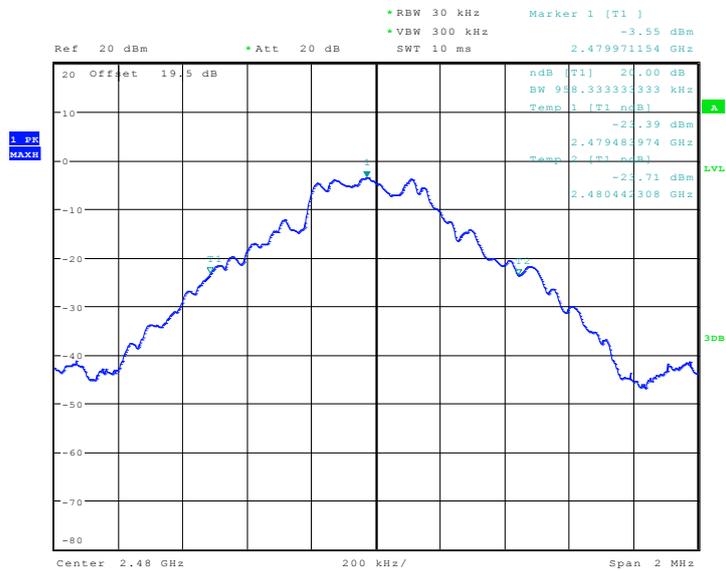


Date: 12.AUG.2010 17:41:29



Test Mode :	Mode 4, 5, 6	Temperature :	22~24°C
Test Engineer :	Andy Yeh	Relative Humidity :	61~64%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.313
39	2441	1.313
78	2480	1.313

20 dB Bandwidth Plot on Channel 00

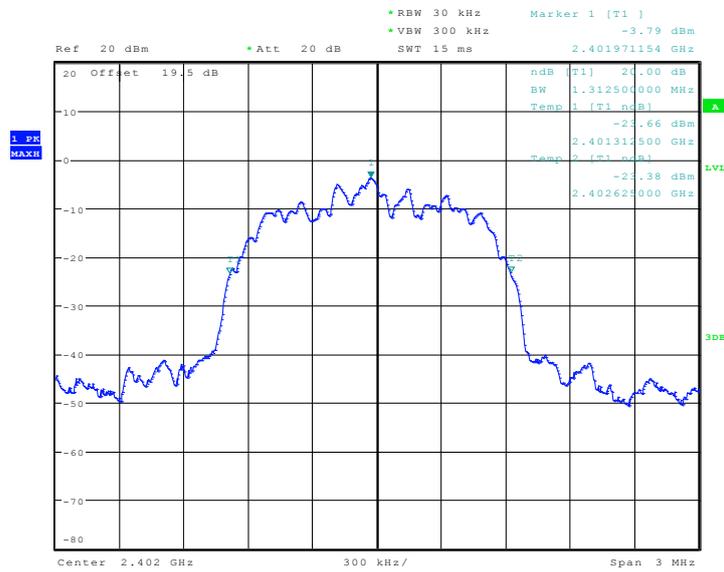

Date: 12.AUG.2010 17:43:42






Test Mode :	Mode 7, 8, 9	Temperature :	22~24°C
Test Engineer :	Andy Yeh	Relative Humidity :	61~64%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.279
39	2441	1.279
78	2480	1.284


20 dB Bandwidth Plot on Channel 00

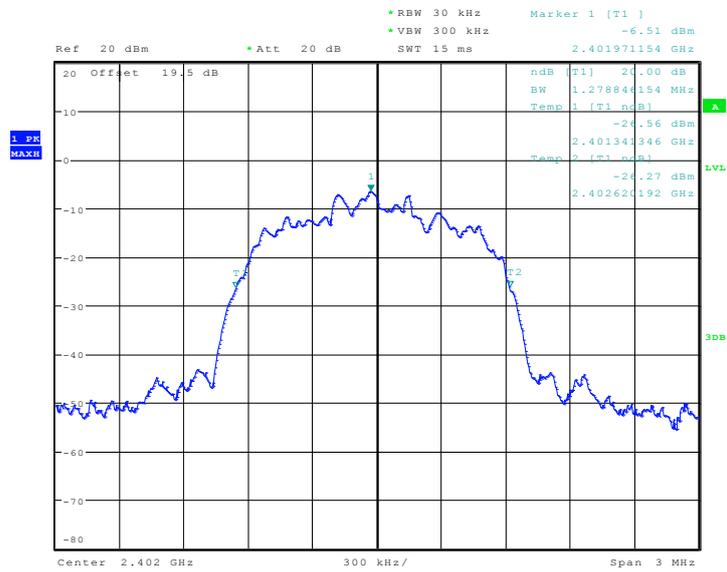

Date: 12.AUG.2010 17:44:25




20 dB Bandwidth Plot on Channel 39

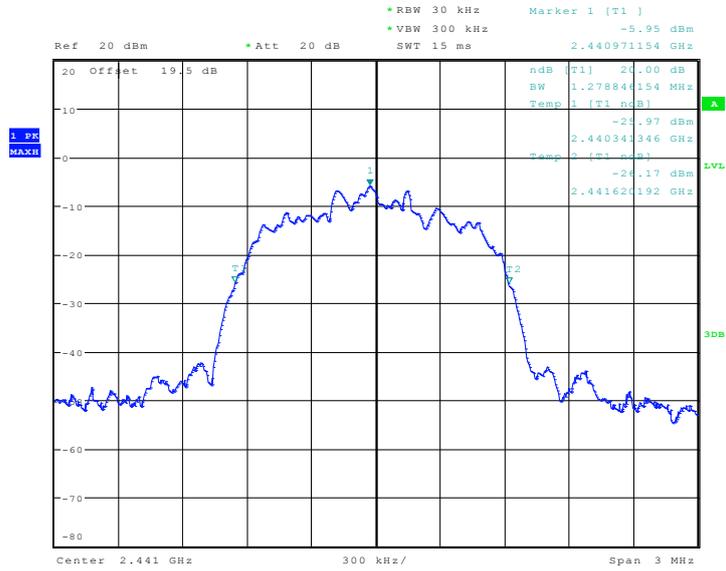

Date: 12.AUG.2010 17:44:57

20 dB Bandwidth Plot on Channel 78

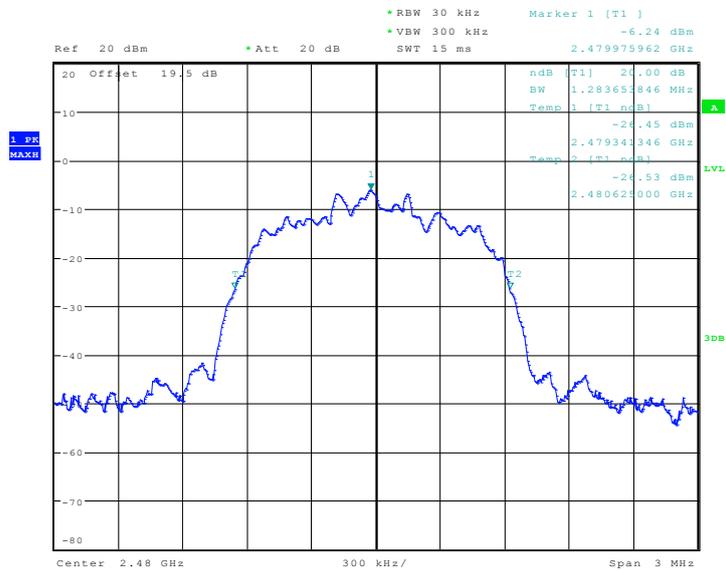

Date: 12.AUG.2010 17:45:25

### 3.3 Hopping Channel Separation Measurement

#### 3.3.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


#### 3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.3.3 Test Procedures

1. Please refer FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels;  $RBW \geq 1\%$  of the span;  
VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

#### 3.3.4 Test Setup

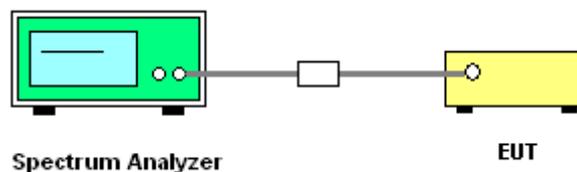




### 3.3.5 Test Result of Hopping Channel Separation

Test Mode :	Mode 4~6	Temperature :	22~24°C
Test Engineer :	Andy Yeh	Relative Humidity :	61~64%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.000	0.875	Pass
39	2441	1.005	0.875	Pass
78	2480	1.000	0.875	Pass


Channel Separation Plot on Channel 00 - 01

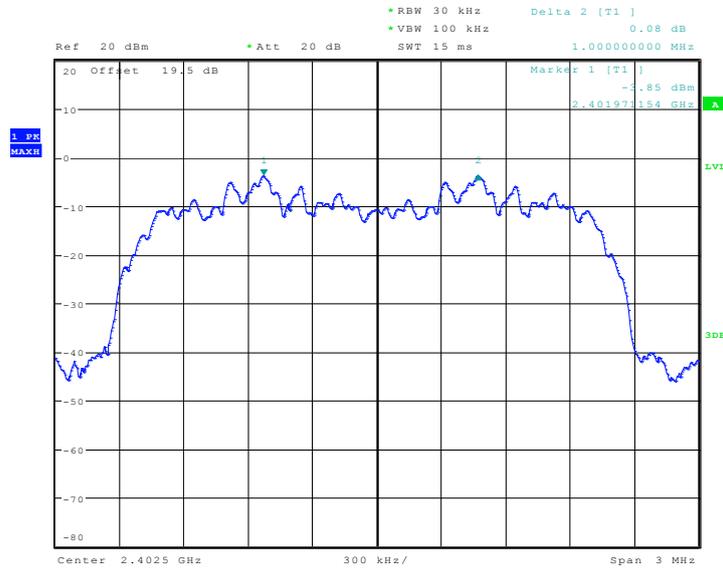

Date: 12.AUG.2010 17:50:33




Channel Separation Plot on Channel 39 - 40

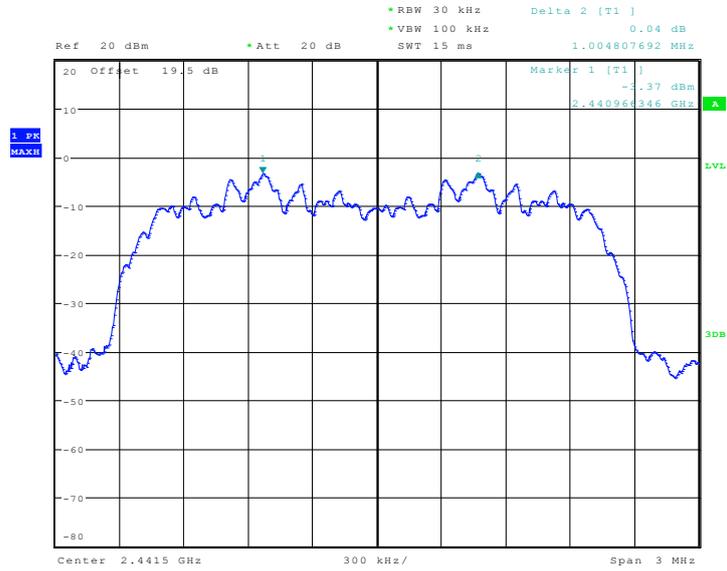

Date: 12.AUG.2010 17:49:44

Channel Separation Plot on Channel 77 - 78

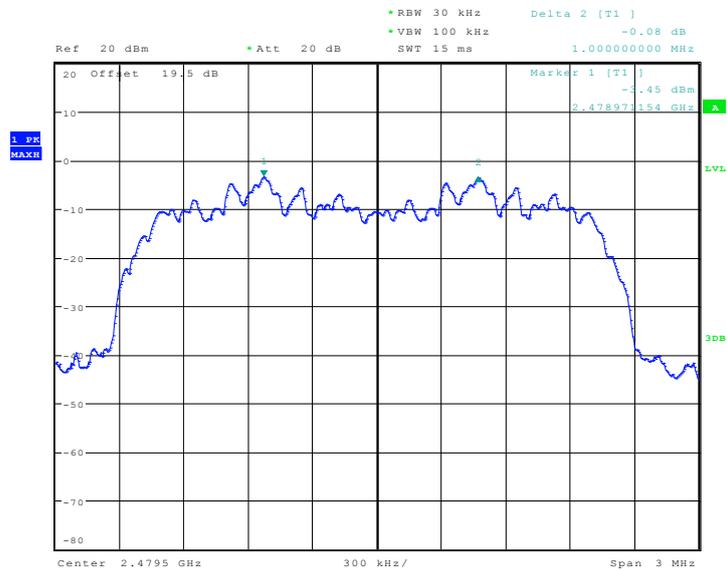

Date: 12.AUG.2010 17:48:52

### 3.4 Dwell Time Measurement

#### 3.4.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


#### 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:  
Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW ≥ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to calculate the dwell time.

#### 3.4.4 Test Setup

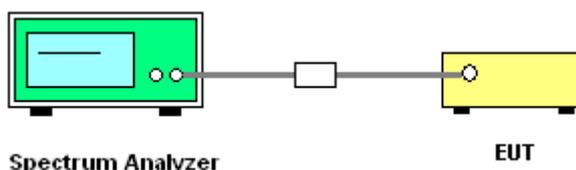

#### 3.4.5 Test Result of Dwell Time

Test Mode :	Mode 5	Temperature :	22~24°C
Test Engineer :	Andy Yeh	Relative Humidity :	61~64%


Package Mode	Average Hopping Channel	Package Transfer Time (usec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
2DH5	3.40	3020.83	0.32	0.4	Pass

**Remark:**

1. Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time
2. 79 channels come from the Hopping Channel number.
3. Average Hopping Channel = hops/sweep time
4. t: Package Transfer Time(us)




2DH5 Dwell Time (One Pulse) Plot on Channel 39

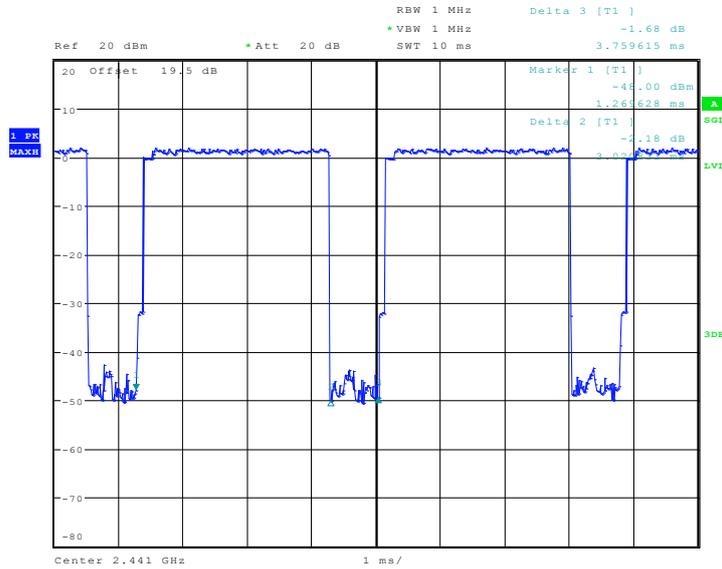

Date: 12.AUG.2010 18:17:48

2DH5 Dwell Time (Count Pulses) Plot on Channel 39

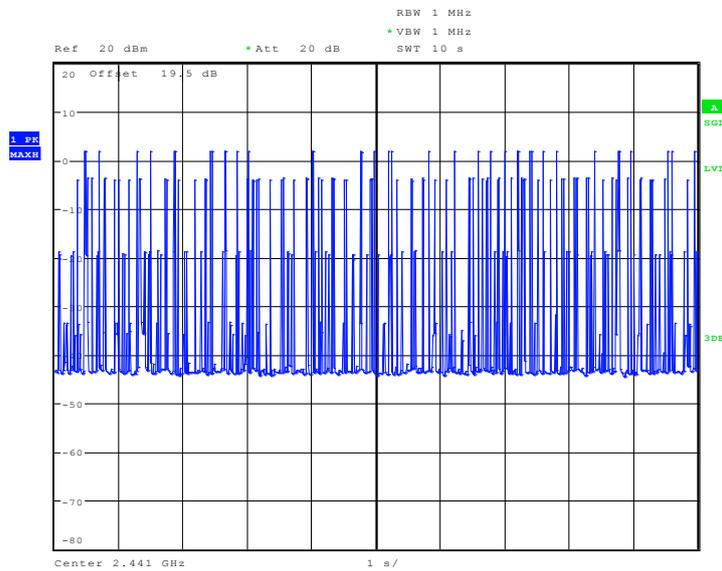

Date: 12.AUG.2010 18:23:00

### 3.5 Peak Output Power Measurement

#### 3.5.1 Limit of Peak Output Power

Frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1W (30 dBm).


#### 3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.

#### 3.5.4 Test Setup

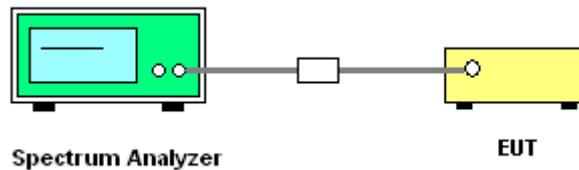


#### 3.5.5 Test Result of Peak Output Power

Test Mode :	Mode 4~6	Temperature :	22~24°C
Test Engineer :	Andy Yeh	Relative Humidity :	61~64%

Channel	Frequency (MHz)	RF Power (dBm)		
		$\pi/4$ -DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	2.28	30	Pass
39	2441	2.67	30	Pass
78	2480	2.70	30	Pass




Peak Output Power Plot on Channel 00

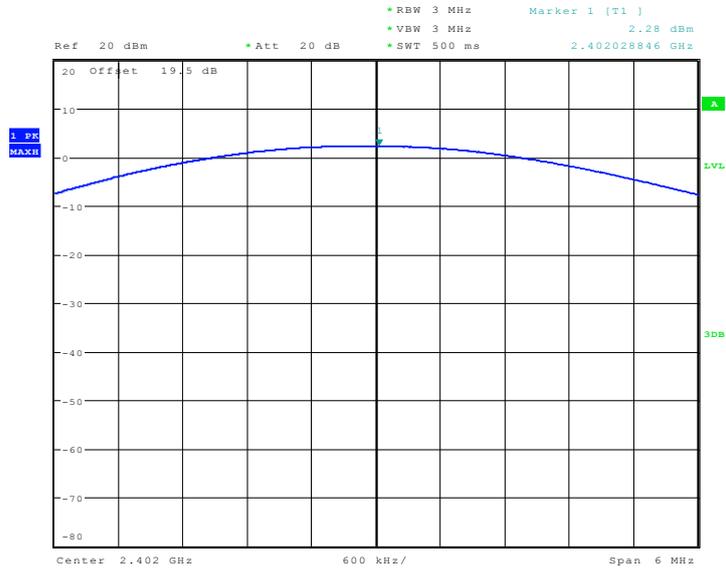

Date: 12.AUG.2010 17:21:54


Peak Output Power Plot on Channel 39

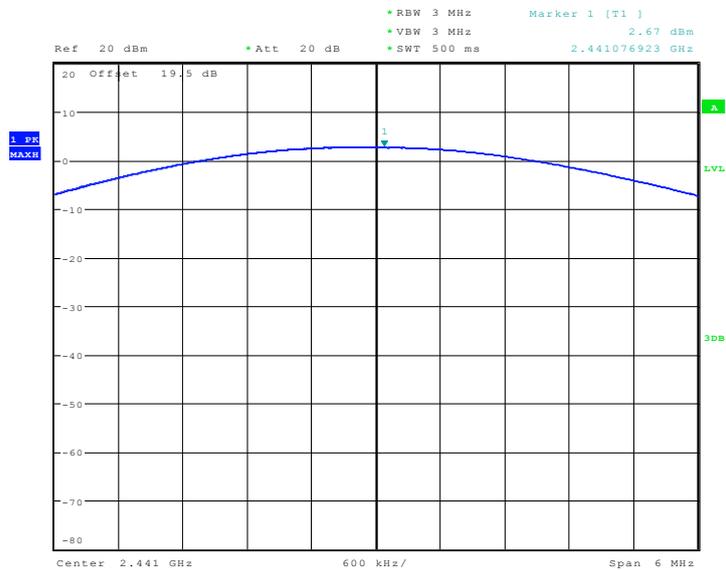

Date: 12.AUG.2010 17:21:30



Peak Output Power Plot on Channel 78

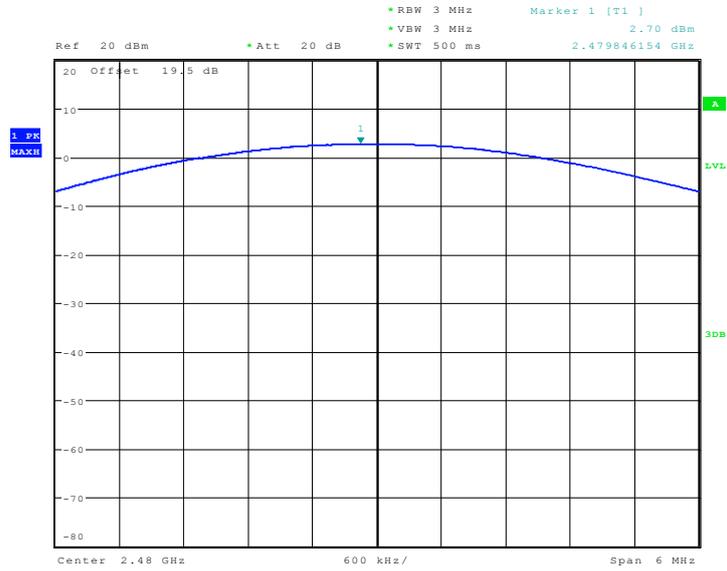

Date: 12.AUG.2010 17:21:07



## **3.6 Band Edges Measurement**

### **3.6.1 Limit of Band Edges**

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

### **3.6.2 Measuring Instruments**


See list of measuring instruments of this test report.

### **3.6.3 Test Procedures**


1. The testing follows the guidelines in ANSI C63.4-2003 and FCC Public Notice DA 00-705 Measurement Guidelines.
2. RF antenna conducted test: Set RBW = 300kHz, Video bandwidth (VBW)  $\geq$  RBW. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 300k Hz RBW. Note: If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.
3. Radiated emission test: Applies to band edge emissions that fall in the restricted bands listed in FCC Section 15.205. The maximum permitted average field strength is listed in FCC Section 15.209. A pre-amp is necessary for this measurement. For measurements above 1 GHz, set RBW = 1MHz, VBW = 1MHz, Sweep: Auto for Peak; set RBW = 1MHz, VBW = 10 Hz, Sweep: Auto for Average. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation. See FCC Section 15.35(b) and (c).
4. In case the emission is fail due to the used RBW / VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.

### 3.6.4 Test Setup

#### <Radiated Band Edges>

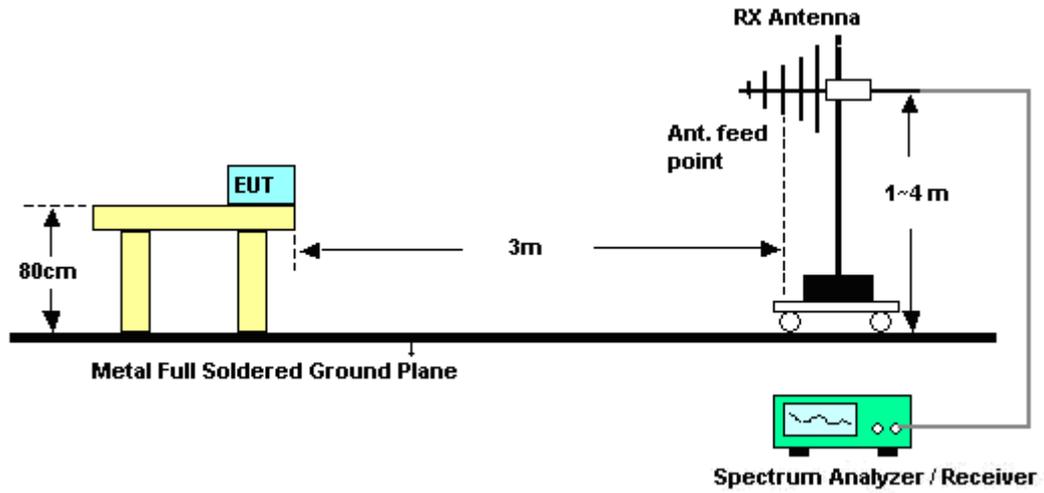

#### <Conducted Band Edges>

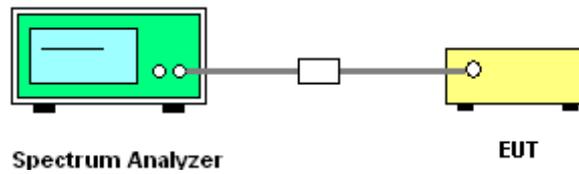



3.6.5 Test Result of Radiated Band Edges

Test Mode :	Mode 1	Temperature :	25~26°C
Test Channel :	00	Relative Humidity :	43~44%
		Test Engineer :	Kay Wu

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2353.70	46.52	-27.48	74.00	42.01	32.08	5.95	33.52	133	360	Peak
2353.70	34.22	-19.78	54.00	29.71	32.08	5.95	33.52	133	360	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2327.86	45.82	-28.18	74.00	41.39	32.02	5.92	33.51	131	226	Peak
2327.86	33.46	-20.54	54.00	29.03	32.02	5.92	33.51	131	226	Average

Test Mode :	Mode 3	Temperature :	25~26°C
Test Channel :	78	Relative Humidity :	43~44%
		Test Engineer :	Kay Wu

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.50	60.16	-13.84	74.00	55.27	32.27	6.18	33.56	118	322	Peak
2483.50	50.10	-3.90	54.00	45.21	32.27	6.18	33.56	118	322	Average


ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.50	59.31	-14.69	74.00	54.42	32.27	6.18	33.56	129	221	Peak
2483.50	47.06	-6.94	54.00	42.17	32.27	6.18	33.56	129	221	Average



### 3.6.6 Test Result of Conducted Band Edges


Test Mode :	Mode 4 and 6	Temperature :	22~24°C
Test Channel :	00 and 78	Relative Humidity :	61~64%
		Test Engineer :	Andy Yeh

Low Band Edge Plot on Channel 00

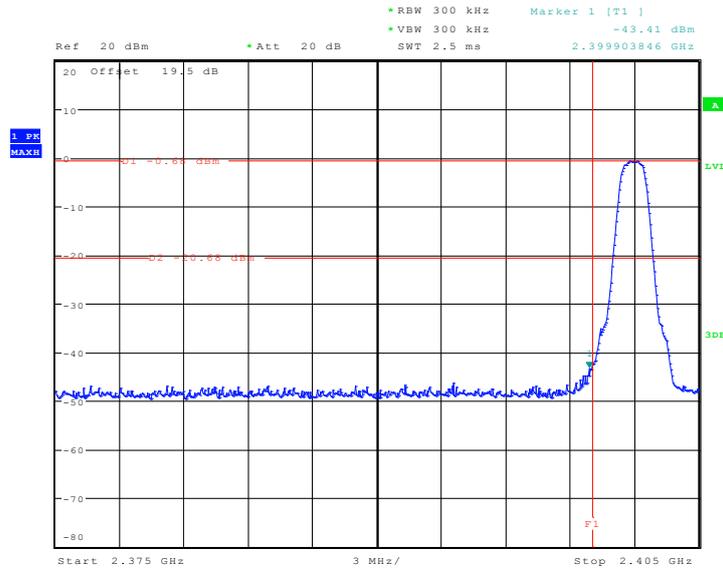

Date: 12.AUG.2010 18:04:32

High Band Edge Plot on Channel 78

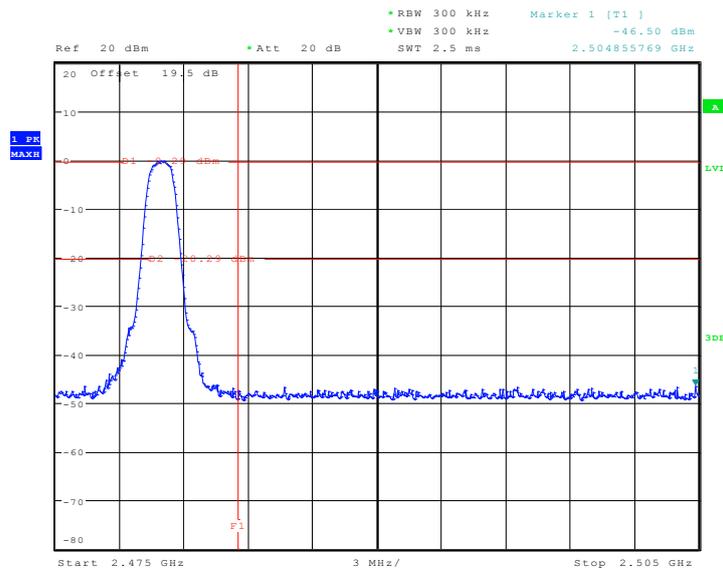

Date: 12.AUG.2010 18:00:56

## 3.7 Spurious Emission Measurement

### 3.7.1 Limit of Spurious Emission Measurement

All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band.


### 3.7.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.7.3 Test Procedure

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set RBW = 100 kHz, Video bandwidth (VBW)  $\geq$  RBW, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.

### 3.7.4 Test Setup

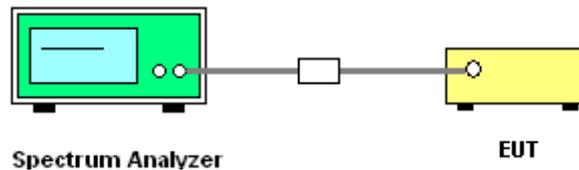




3.7.5 Test Result


Test Mode :	Mode 4	Temperature :	22~24°C
Test Channel :	00	Relative Humidity :	61~64%
		Test Engineer :	Andy Yeh

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

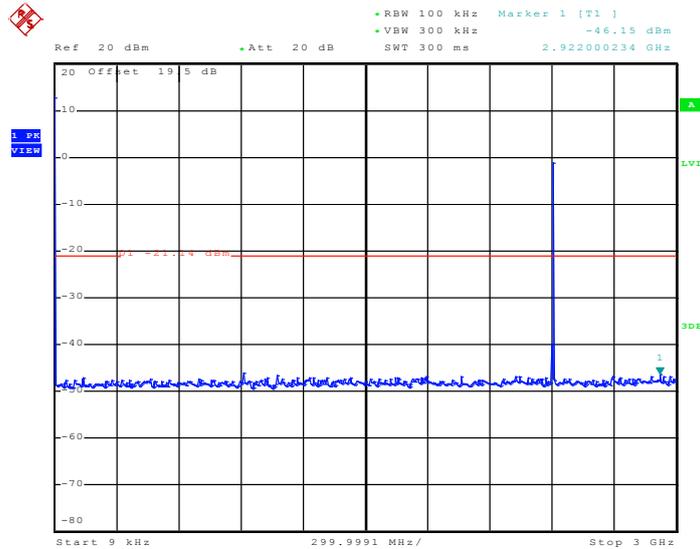

Date: 12.AUG.2010 20:51:23

Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

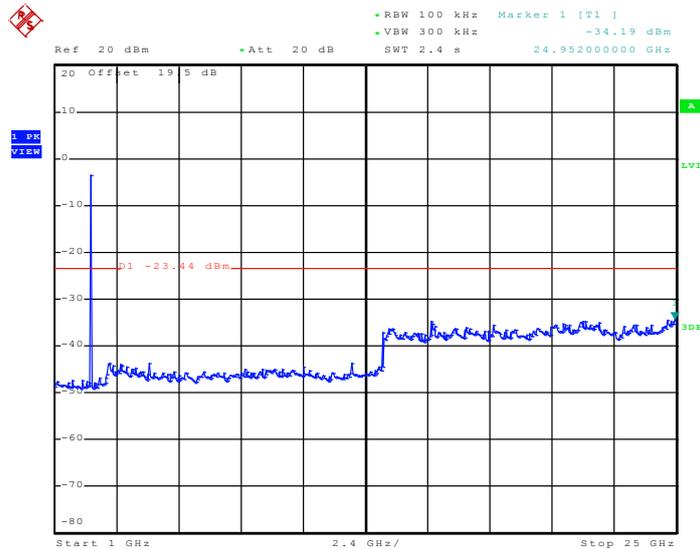


Date: 12.AUG.2010 20:52:05




Test Mode :	Mode 5	Temperature :	22~24°C
Test Channel :	39	Relative Humidity :	61~64%
		Test Engineer :	Andy Yeh

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

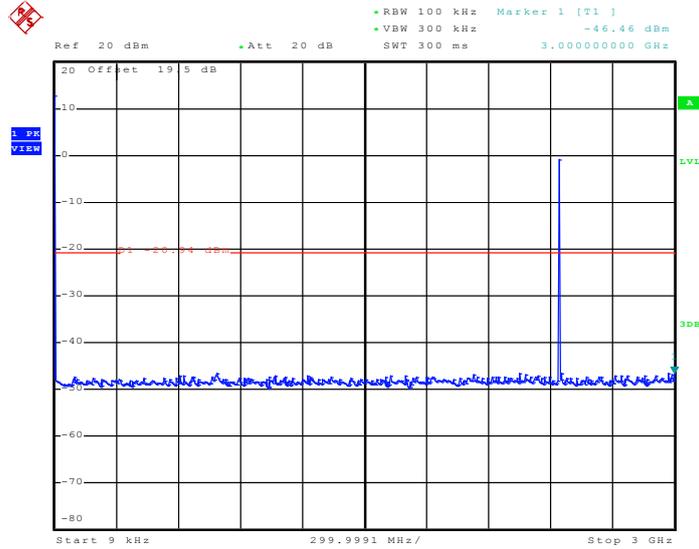

Date: 12.AUG.2010 20:52:53

Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

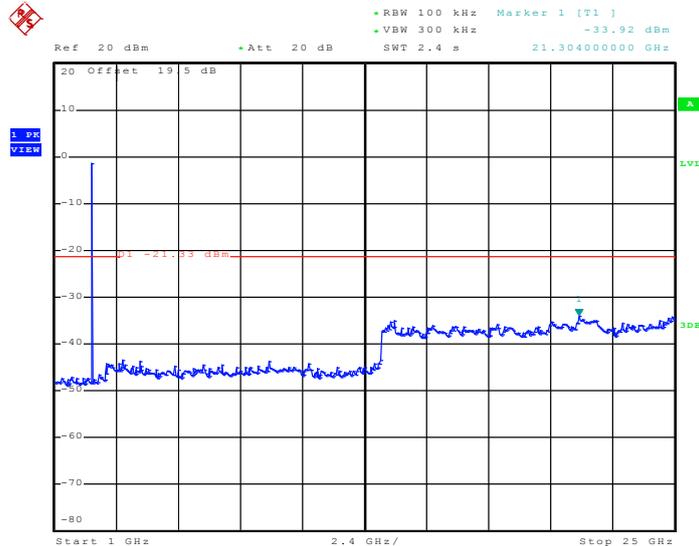


Date: 12.AUG.2010 20:54:00




Test Mode :	Mode 6	Temperature :	22~24°C
Test Channel :	78	Relative Humidity :	61~64%
		Test Engineer :	Andy Yeh

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

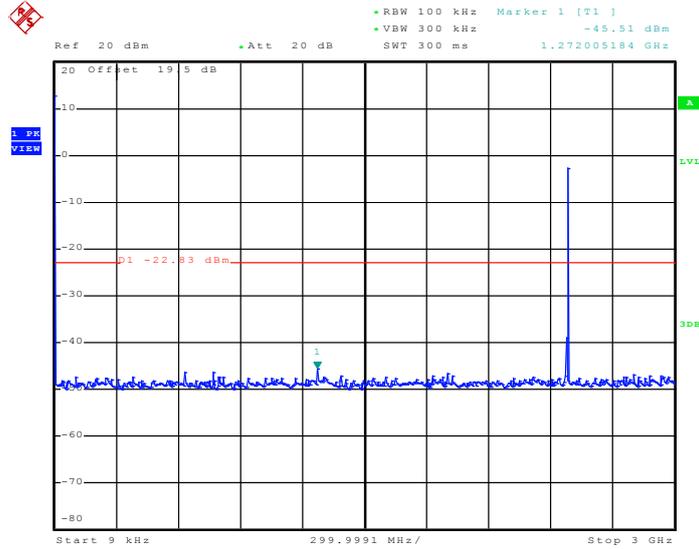

Date: 12.AUG.2010 20:54:38

Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

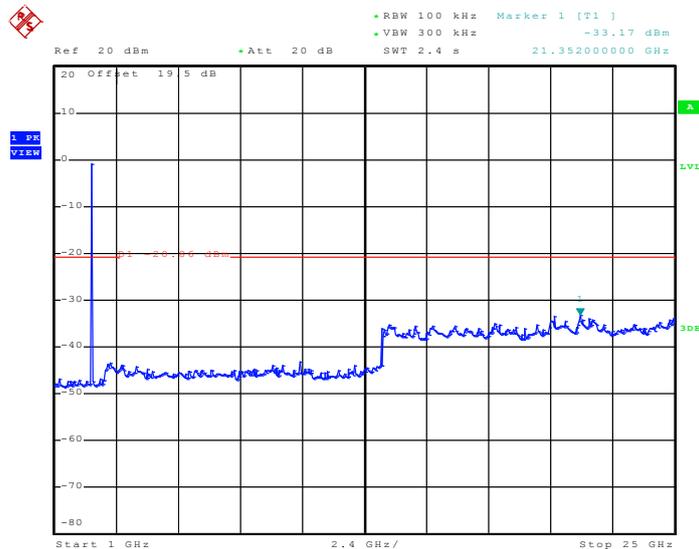

Date: 12.AUG.2010 20:56:18

### 3.8 AC Conducted Emission Measurement

#### 3.8.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.8.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.8.3 Test Procedures


1. Please follow the guidelines in ANSI C63.4-2003.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.8.4 Test Setup

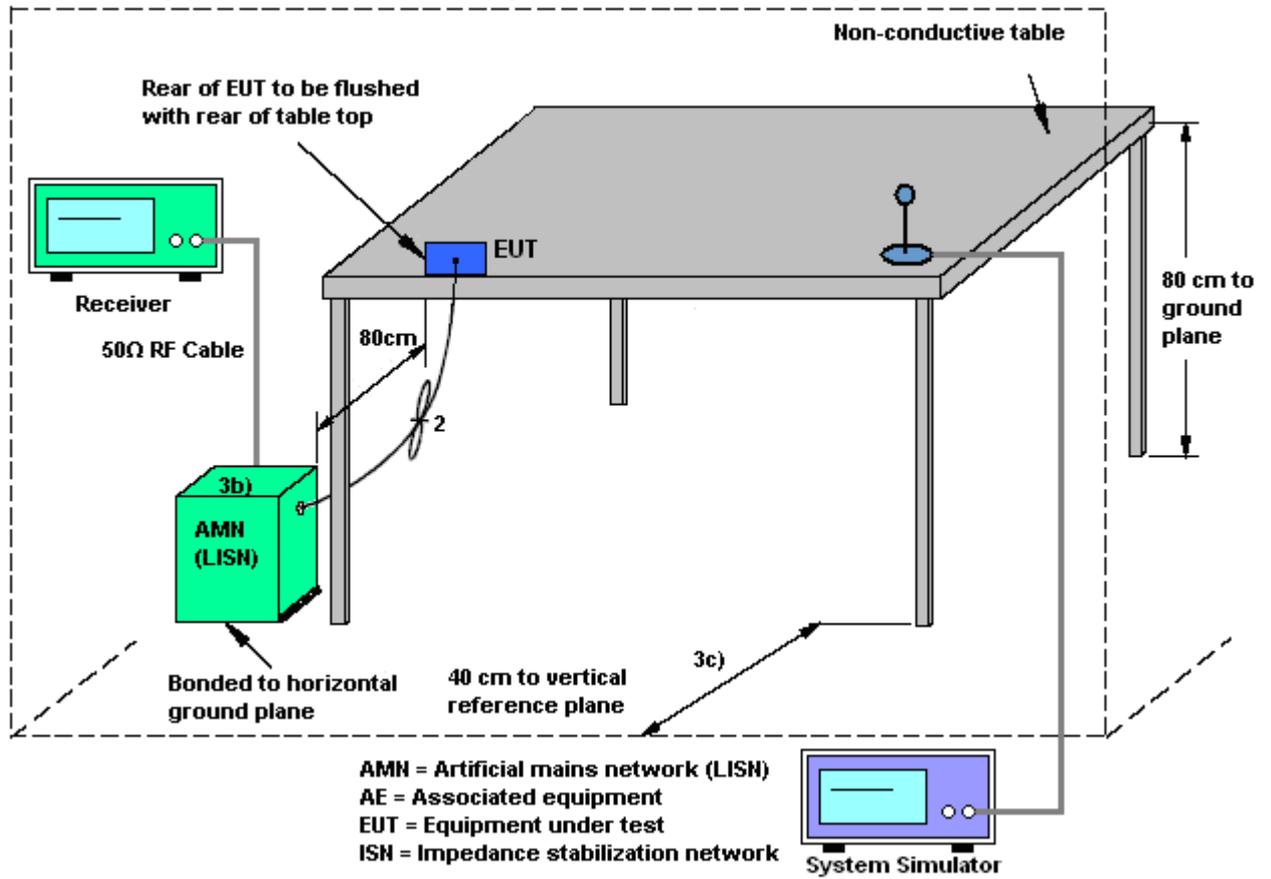

### 3.8.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Novic Jiang	Relative Humidity :	42~44%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link (2.4G) + GPS Rx + Earphone + Battery 2 + USB Cable 2 (Charging from Adapter 2) for Sample 1		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

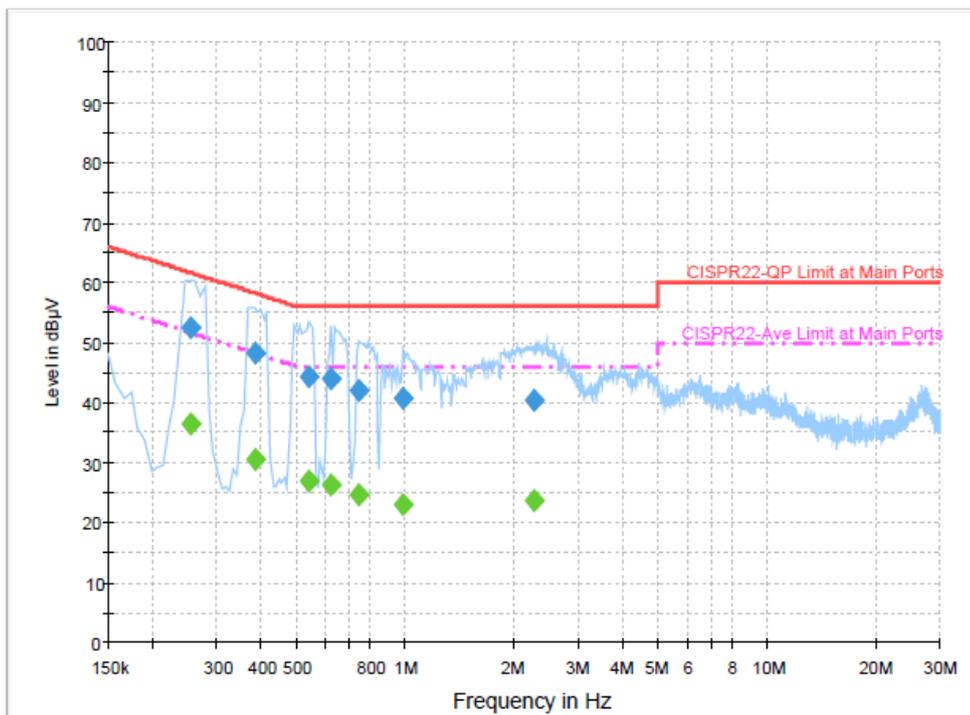

#### Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.254000	52.5	Off	L1	19.3	9.1	61.6
0.382000	48.1	Off	L1	19.4	10.1	58.2
0.542000	44.1	Off	L1	19.3	11.9	56.0
0.622000	44.0	Off	L1	19.3	12.0	56.0
0.742000	41.9	Off	L1	19.4	14.1	56.0
0.982000	40.5	Off	L1	19.4	15.5	56.0
2.262000	40.3	Off	L1	19.5	15.7	56.0

#### Final Result 2

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.254000	36.3	Off	L1	19.3	15.3	51.6
0.382000	30.5	Off	L1	19.4	17.7	48.2
0.542000	26.8	Off	L1	19.3	19.2	46.0
0.622000	26.1	Off	L1	19.3	19.9	46.0
0.742000	24.5	Off	L1	19.4	21.5	46.0
0.982000	22.8	Off	L1	19.4	23.2	46.0
2.262000	23.7	Off	L1	19.5	22.3	46.0



Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Novic Jiang	Relative Humidity :	42~44%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link (2.4G) + GPS Rx + Earphone + Battery 2 + USB Cable 2 (Charging from Adapter 2) for Sample 1		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

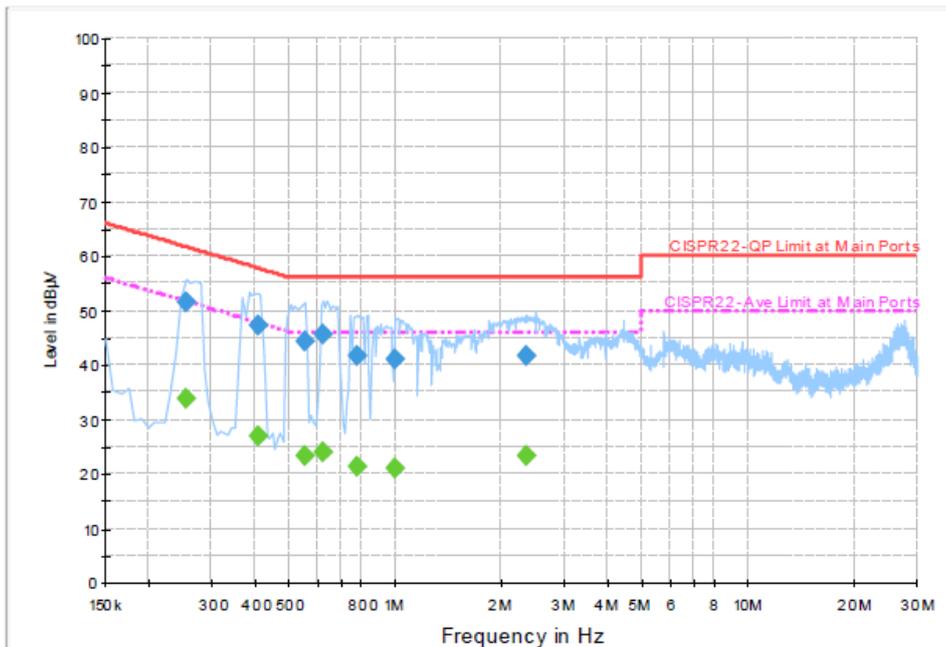

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.254000	51.4	Off	N	19.4	10.2	61.6
0.406000	47.3	Off	N	19.4	10.4	57.7
0.550000	44.4	Off	N	19.3	11.6	56.0
0.622000	45.5	Off	N	19.3	10.5	56.0
0.774000	41.8	Off	N	19.4	14.2	56.0
0.990000	40.9	Off	N	19.4	15.1	56.0
2.334000	41.6	Off	N	19.5	14.4	56.0

**Final Result 2**

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.254000	33.8	Off	N	19.4	17.8	51.6
0.406000	26.7	Off	N	19.4	21.0	47.7
0.550000	23.3	Off	N	19.3	22.7	46.0
0.622000	24.0	Off	N	19.3	22.0	46.0
0.774000	21.5	Off	N	19.4	24.5	46.0
0.990000	20.9	Off	N	19.4	25.1	46.0
2.334000	23.4	Off	N	19.5	22.6	46.0

### 3.9 Radiated Emission Measurement

#### 3.9.1 Limit of Radiated Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.9.2 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.9.3 Test Procedures


1. The testing follows the guidelines in FCC Public Notice DA 00-705 Measurement Guidelines.
2. Use the following spectrum analyzer settings:
  - (1) Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
  - (2) Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.  
 Distance extrapolation factor =  $20 \log(\text{specific distance [3m]} / \text{test distance [1m]})$  (dB)
3. Follow the guidelines in ANSI C63.4-2003 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.

### 3.9.4 Test Setup

For radiated emissions below 30MHz

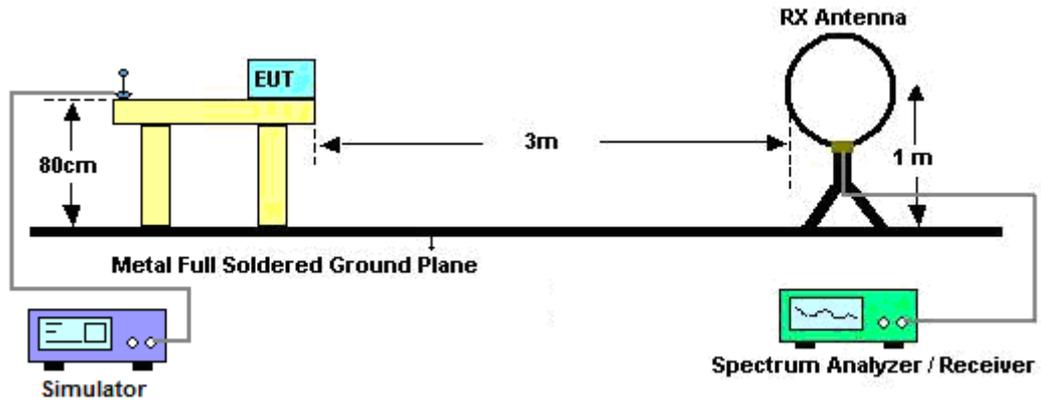

For radiated emissions above 30MHz

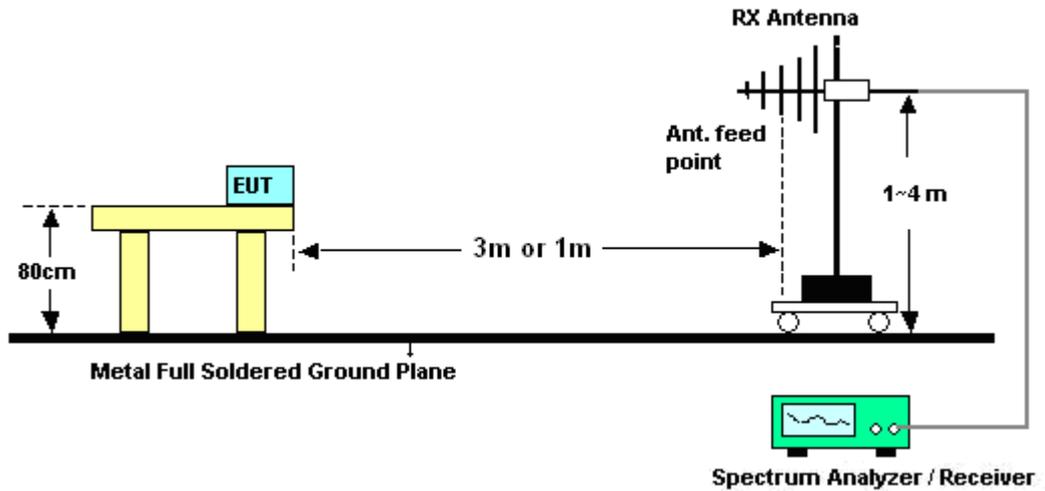



3.9.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

Test Engineer :	Kay Wu	Temperature :	25~26°C	
		Relative Humidity :	43~44%	
Frequency (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.



3.9.6 Test Result of Radiated Emission (30 MHz ~ 10<sup>th</sup> Harmonic)

Test Mode :	Mode 1	Temperature :	25~26°C
Test Channel :	00	Relative Humidity :	43~44%
Test Engineer :	Kay Wu	Polarization :	Horizontal
Remark :	2402 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.00	36.85	-3.15	40.00	48.27	19.51	0.53	31.46	129	282	Peak
49.17	33.88	-6.12	40.00	56.25	8.47	0.69	31.53	-	-	Peak
226.02	21.56	-24.44	46.00	41.70	9.85	1.46	31.45	-	-	Peak
441.40	18.32	-27.68	46.00	30.19	16.97	2.28	31.12	-	-	Peak
654.90	22.79	-23.21	46.00	30.32	20.49	2.85	30.87	-	-	Peak
822.20	24.48	-21.52	46.00	29.55	22.43	3.20	30.70	-	-	Peak
2353.70	46.52	-27.48	74.00	42.01	32.08	5.95	33.52	133	360	Peak
2353.70	34.22	-19.78	54.00	29.71	32.08	5.95	33.52	133	360	Average
2402.00	100.82	-	-	96.19	32.13	6.03	33.53	133	360	Peak
2402.00	82.32	-	-	77.69	32.13	6.03	33.53	133	360	Average
2484.00	33.34	-20.66	54.00	28.45	32.27	6.18	33.56	133	360	Average
2484.00	45.56	-28.44	74.00	40.67	32.27	6.18	33.56	133	360	Peak
8298.00	56.37	-17.63	74.00	43.54	36.00	10.93	34.10	130	322	Peak
8298.00	41.96	-12.04	54.00	29.13	36.00	10.93	34.10	130	322	Average



<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	00	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2402 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.00	35.92	-4.08	40.00	47.34	19.51	0.53	31.46	102	83	Peak
48.90	32.53	-7.47	40.00	54.42	8.96	0.68	31.53	-	-	Peak
182.82	23.79	-19.71	43.50	45.05	9.00	1.26	31.52	-	-	Peak
447.70	18.41	-27.59	46.00	30.10	17.11	2.30	31.10	-	-	Peak
649.30	22.79	-23.21	46.00	30.38	20.44	2.84	30.87	-	-	Peak
864.90	24.84	-21.16	46.00	29.43	22.84	3.29	30.72	-	-	Peak
2327.86	45.82	-28.18	74.00	41.39	32.02	5.92	33.51	131	226	Peak
2327.86	33.46	-20.54	54.00	29.03	32.02	5.92	33.51	131	226	Average
2402.00	94.84	-	-	90.19	32.16	6.03	33.54	131	226	Peak
2402.00	79.51	-	-	74.88	32.13	6.03	33.53	131	226	Average
2500.00	33.16	-20.84	54.00	28.25	32.30	6.18	33.57	131	226	Average
2500.00	45.01	-28.99	74.00	40.10	32.30	6.18	33.57	131	226	Peak
8361.00	56.05	-17.95	74.00	43.19	36.00	10.95	34.09	110	147	Peak
8361.00	42.83	-11.17	54.00	29.97	36.00	10.95	34.09	110	147	Average



<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2441 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.00	36.27	-3.73	40.00	47.69	19.51	0.53	31.46	124	210	Peak
53.49	27.02	-12.98	40.00	50.49	7.36	0.72	31.55	-	-	Peak
230.61	21.89	-24.11	46.00	41.41	10.43	1.49	31.44	-	-	Peak
452.60	19.26	-26.74	46.00	30.84	17.20	2.31	31.09	-	-	Peak
649.30	22.22	-23.78	46.00	29.81	20.44	2.84	30.87	-	-	Peak
822.90	24.39	-21.61	46.00	29.46	22.43	3.20	30.70	-	-	Peak
2334.00	45.08	-28.92	74.00	40.62	32.02	5.95	33.51	103	351	Peak
2334.00	33.52	-20.48	54.00	29.06	32.02	5.95	33.51	103	351	Average
2441.00	84.03	-	-	79.25	32.22	6.11	33.55	103	351	Average
2441.00	100.49	-	-	95.71	32.22	6.11	33.55	103	351	Peak
2492.00	45.31	-28.69	74.00	40.4	32.30	6.18	33.57	103	351	Peak
2492.00	33.36	-20.64	54.00	28.45	32.30	6.18	33.57	103	351	Average
8349.00	55.61	-18.39	74.00	42.76	36.00	10.95	34.10	152	308	Peak
8349.00	41.76	-12.24	54.00	28.91	36.00	10.95	34.10	152	308	Average



<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2441 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.54	36.60	-3.40	40.00	48.57	18.95	0.54	31.46	117	245	Peak
56.46	32.18	-7.82	40.00	56.25	6.74	0.74	31.55	-	-	Peak
194.70	24.25	-19.25	43.50	45.58	8.86	1.30	31.49	-	-	Peak
475.70	18.83	-27.17	46.00	29.86	17.66	2.37	31.06	-	-	Peak
643.00	22.28	-23.72	46.00	29.94	20.40	2.82	30.88	-	-	Peak
839.70	24.97	-21.03	46.00	29.85	22.60	3.24	30.72	-	-	Peak
2332.00	45.86	-28.14	74.00	41.40	32.02	5.95	33.51	150	311	Peak
2332.00	33.51	-20.49	54.00	29.05	32.02	5.95	33.51	150	311	Average
2441.00	93.73	-	-	88.95	32.22	6.11	33.55	150	311	Peak
2441.00	78.45	-	-	73.67	32.22	6.11	33.55	150	311	Average
2494.00	45.94	-28.06	74.00	41.03	32.30	6.18	33.57	150	311	Peak
2494.00	33.21	-20.79	54.00	28.30	32.30	6.18	33.57	150	311	Average
8289.00	55.95	-18.05	74.00	43.12	36.00	10.93	34.10	113	169	Peak
8289.00	41.88	-12.12	54.00	29.05	36.00	10.93	34.10	113	169	Average



<b>Test Mode :</b>	Mode 3	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	78	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2480 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.00	36.17	-3.83	40.00	47.59	19.51	0.53	31.46	118	230	Peak
57.54	30.46	-9.54	40.00	54.73	6.54	0.74	31.55	-	-	Peak
226.02	22.51	-23.49	46.00	42.65	9.85	1.46	31.45	-	-	Peak
419.00	17.78	-28.22	46.00	30.21	16.51	2.21	31.15	-	-	Peak
624.10	22.84	-23.16	46.00	30.73	20.25	2.76	30.90	-	-	Peak
830.60	24.37	-21.63	46.00	29.35	22.51	3.22	30.71	-	-	Peak
2316.00	45.13	-28.87	74.00	40.72	32.00	5.92	33.51	118	322	Peak
2316.00	33.44	-20.56	54.00	29.03	32.00	5.92	33.51	118	322	Average
2480.00	83.18	-	-	78.29	32.27	6.18	33.56	118	322	Average
2480.00	100.06	-	-	95.17	32.27	6.18	33.56	118	322	Peak
2483.50	60.16	-13.84	74.00	55.27	32.27	6.18	33.56	118	322	Peak
2483.50	50.10	-3.90	54.00	45.21	32.27	6.18	33.56	118	322	Average
8313.00	55.62	-18.38	74.00	42.78	36.00	10.94	34.10	137	251	Peak
8313.00	41.73	-12.27	54.00	28.89	36.00	10.94	34.10	137	251	Average



<b>Test Mode :</b>	Mode 3	<b>Temperature :</b>	25~26°C
<b>Test Channel :</b>	78	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2480 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.00	36.66	-3.34	40.00	48.08	19.51	0.53	31.46	109	93	Peak
56.73	31.79	-8.21	40.00	56.06	6.54	0.74	31.55	-	-	Peak
190.65	23.98	-19.52	43.50	45.30	8.91	1.28	31.51	-	-	Peak
439.30	18.54	-27.46	46.00	30.45	16.93	2.28	31.12	-	-	Peak
638.10	22.76	-23.24	46.00	30.48	20.36	2.80	30.88	-	-	Peak
791.40	24.79	-21.21	46.00	30.24	22.10	3.13	30.68	-	-	Peak
2350.00	45.88	-28.12	74.00	41.40	32.05	5.95	33.52	129	221	Peak
2350.00	33.53	-20.47	54.00	29.05	32.05	5.95	33.52	129	221	Average
2480.00	79.29	-	-	74.40	32.27	6.18	33.56	129	221	Average
2480.00	94.83	-	-	89.94	32.27	6.18	33.56	129	221	Peak
2483.50	59.31	-14.69	74.00	54.42	32.27	6.18	33.56	129	221	Peak
2483.50	47.06	-6.94	54.00	42.17	32.27	6.18	33.56	129	221	Average
8397.00	55.55	-18.45	74.00	42.68	36.00	10.96	34.09	107	344	Peak
8397.00	41.92	-12.08	54.00	29.05	36.00	10.96	34.09	107	344	Average



## **3.10 Antenna Requirements**

### **3.10.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.10.2 Antenna Connected Construction**

The antennas type used in this product is PIFA Antenna without connector and it is considered to meet antenna requirement.

### **3.10.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP30	101329	9kHz~30GHz	Apr. 26, 2010	Apr. 25, 2011	Conducted (TH02-HY)
Power Meter	Anritsu	ML2495A	0932001	N/A	Sep. 17, 2009	Sep. 16, 2010	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	0846202	N/A	Sep. 10, 2009	Sep. 09, 2010	Conducted (TH02-HY)
EMI Test Receive	R&S	ESU	100211	9KHz – 2.75GHz	May 28, 2010	May 27, 2011	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100081	9kHz~30MHz	Nov. 30, 2009	Nov. 29, 2010	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100080	9kHz~30MHz	Nov. 23, 2009	Nov. 22, 2010	Conduction (CO05-HY)
AC Power Source	APC	APC-1000W	N/A	N/A	N/A	N/A	Conduction (CO05-HY)
System Simulator	R&S	CMU200	105934	N/A	Nov. 11, 2008	Nov. 10, 2010	Conduction (CO05-HY)
GPS Station	T&E	GS-50	N/A	N/A	N/A	N/A	Conduction (CO05-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2726	30MHz ~ 1GHz	Oct. 31, 2009	Oct. 30, 2010	Radiation (03CH07-HY)
Spectrum Analyzer	R&S	FSP	101067	9KHz ~ 30GHz	Dec. 04, 2009	Dec. 03, 2010	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 19, 2010	Aug. 18, 2011	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz- 40GHz	Oct. 14, 2009	Oct. 13, 2010	Radiation (03CH07-HY)
Pre Amplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Dec.09,2009	Dec. 08, 2010	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10-1000MHz.32 dB.GAIN	Mar. 27, 2010	Mar. 26, 2011	Radiation (03CH07-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz~30 MHz	Jul. 29, 2010	Jul. 28, 2011	Radiation (03CH07-HY)
Bluetooth Base Station	R&S	CBT32	100519	N/A	May 12, 2009	May 11, 2011	Radiation (03CH07-HY)

## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Contribution	Uncertainty of $X_i$		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.10	Normal (k=2)	0.05
Cable Loss	0.10	Normal (k=2)	0.05
AMN Insertion Loss	2.50	Rectangular	0.63
Receiver Specification	1.50	Rectangular	0.43
Site Imperfection	1.39	Rectangular	0.80
Mismatch	+0.34 / -0.35	U-Shape	0.24
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>1.13</b>		
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>2.26</b>		

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of $X_i$		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>1.27</b>		
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>2.54</b>		



**Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)**

Contribution	Uncertainty of $X_i$		$u(X_i)$	$C_i$	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	±0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	±1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	±0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site Imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>2.36</b>				
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>4.72</b>				