



FCC TEST REPORT (PART 27)

REPORT NO.: RF130502C16-3

MODEL NO.: PN07310

FCC ID: NM8PN07310

RECEIVED: May 02, 2013

TESTED: May 23, 2013 ~ May 31, 2013

ISSUED: Jun. 06, 2013

APPLICANT: HTC Corporation

ADDRESS: No. 23, Xinghua Rd., Taoyuan City, Taiwan

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,
New Taipei City, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specifically mentioned, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 CERTIFICATION	5
2 SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	6
2.2 TEST SITE AND INSTRUMENTS	7
3 GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 CONFIGURATION OF SYSTEM UNDER TEST	9
3.3 DESCRIPTION OF SUPPORT UNITS	9
3.4 DESCRIPTION OF TEST MODES	10
3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS	11
4 TEST TYPES AND RESULTS	12
4.1 OUTPUT POWER MEASUREMENT	12
4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	12
4.1.2 TEST PROCEDURES	12
4.1.3 TEST SETUP	13
4.1.4 TEST RESULTS	14
4.2 FREQUENCY STABILITY MEASUREMENT	17
4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	17
4.2.2 TEST PROCEDURE	17
4.2.3 TEST SETUP	17
4.2.4 TEST RESULTS	18
4.3 OCCUPIED BANDWIDTH MEASUREMENT	19
4.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT	19
4.3.2 TEST SETUP	19
4.3.3 TEST PROCEDURES	19
4.3.4 TEST RESULTS	20
4.4 PEAK TO AVERAGE RATIO	21
4.4.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT	21
4.4.2 TEST SETUP	21
4.4.3 TEST PROCEDURES	21
4.4.4 TEST RESULTS	22
4.5 BAND EDGE MEASUREMENT	23
4.5.1 LIMITS OF BAND EDGE MEASUREMENT	23
4.5.2 TEST SETUP	23
4.5.3 TEST PROCEDURES	24
4.5.4 TEST RESULTS	25
4.6 CONDUCTED SPURIOUS EMISSIONS	27



A D T

4.6.1	LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	27
4.6.2	TEST PROCEDURE	27
4.6.3	TEST SETUP.....	27
4.6.4	TEST RESULTS	28
4.7	RADIATED EMISSION MEASUREMENT	29
4.7.1	LIMITS OF RADIATED EMISSION MEASUREMENT	29
4.7.2	TEST PROCEDURES.....	29
4.7.3	DEVIATION FROM TEST STANDARD	29
4.7.4	TEST SETUP.....	30
4.7.5	TEST RESULTS	31
5	INFORMATION ON THE TESTING LABORATORIES	39
6	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	40



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF130502C16-3	Original release	Jun. 06, 2013



1 CERTIFICATION

PRODUCT: Smartphone
MODEL NO.: PN07310
BRAND: HTC
APPLICANT: HTC Corporation
TESTED: May 23, 2013 ~ May 31, 2013
TEST SAMPLE: Production Unit
TEST STANDARDS: **FCC Part 27, Subpart C, F**
FCC Part 2
ANSI C63.4-2003

The above equipment (model: PN07310) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Ivonne Wu , **DATE:** Jun. 06, 2013
Ivonne Wu / Senior Specialist

APPROVED BY : Sam Chen , **DATE:** Jun. 06, 2013
Sam Chen / Assistant Manager

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

OPERATING BAND: 777-787 MHz			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
2.1046 27.50(C)(10)	Maximum Peak Output Power	PASS	Meet the requirement of limit.
2.1055 27.54	Frequency Stability	PASS	Meet the requirement of limit.
2.1049 27.53(g)	Occupied Bandwidth	PASS	Meet the requirement of limit.
27.50(d)(5)	Peak to average ratio	PASS	Meet the requirement of limit.
27.53(g)	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 27.53(g)	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 27.53(g)	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -12.88dB at 1564.00MHz.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	2.93 dB
	200MHz ~1000MHz	2.95 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2.2 TEST SITE AND INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Nov. 16, 2012	Nov. 15, 2013
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Dec. 17, 2012	Dec. 16, 2013
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Mar. 25, 2013	Mar. 24, 2014
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Jan. 07, 2013	Jan. 06, 2014
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Dec. 25, 2012	Dec. 24, 2013
Loop Antenna	HFH2-Z2	100070	Jan. 31, 2012	Jan. 30, 2014
Preamplifier EMCI	EMC 012645	980115	Dec. 28, 2012	Dec. 27, 2013
Preamplifier EMCI	EMC 184045	980116	Dec. 28, 2012	Dec. 27, 2013
Preamplifier EMCI	EMC 330H	980112	Dec. 28, 2012	Dec. 27, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309219/4	Oct. 19, 2012	Oct. 18, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250130/4	Oct. 19, 2012	Oct. 18, 2013
RF signal cable Worken	RG-213	NA	Dec. 29, 2012	Dec. 28, 2013
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Mini-Circuits Power Splitter	ZN2PD-9G	NA	Jun. 13, 2012	Jun. 12, 2013
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA
Communications Tester-Wireless	E5515C	MY52102049	Jun. 11, 2012	Jun. 10, 2013
Radio Communication Analyzer	MT8820C	6201168830	Jul. 17, 2012	Jul. 16, 2013

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 10.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 690701.
5. The IC Site Registration No. is IC 7450F-10.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT


PRODUCT	Smartphone	
MODEL NO.	PN07310	
POWER SUPPLY	5Vdc (adapter or host equipment) 3.8Vdc (battery)	
MODULATION TECHNOLOGY	LTE Band 13	QPSK, 16QAM
FREQUENCY RANGE	LTE Band 13 Channel Bandwidth: 5MHz	779.5MHz ~ 784.5MHz
	LTE Band 13 Channel Bandwidth: 10MHz	782.0MHz
EMISSION DESIGNATOR	LTE Band 13 Channel Bandwidth: 5MHz	4M50G7D
	LTE Band 13 Channel Bandwidth: 10MHz	8M93W7D
MAX. ERP POWER (W)	LTE Band 13 Channel Bandwidth: 5MHz	87.10mW
	LTE Band 13 Channel Bandwidth: 10MHz	85.51mW
ANTENNA TYPE	Fixed Internal Antenna	
DATA CABLE	Refer to Note as below	
I/O PORTS	Refer to users' manual	
ACCESSORY DEVICES	Refer to Note as below	

NOTE:


1. The EUT's accessories list refers to EUT photo.
2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 CONFIGURATION OF SYSTEM UNDER TEST

FOR RADIATION EMISSION TEST

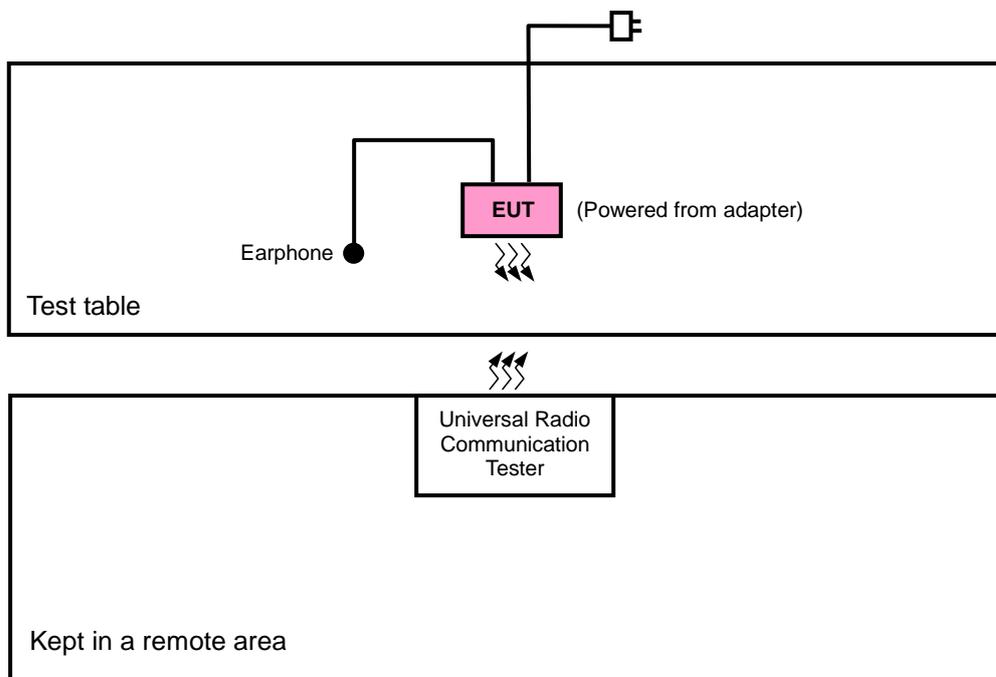

FOR E.R.P. / E.I.R.P. TEST

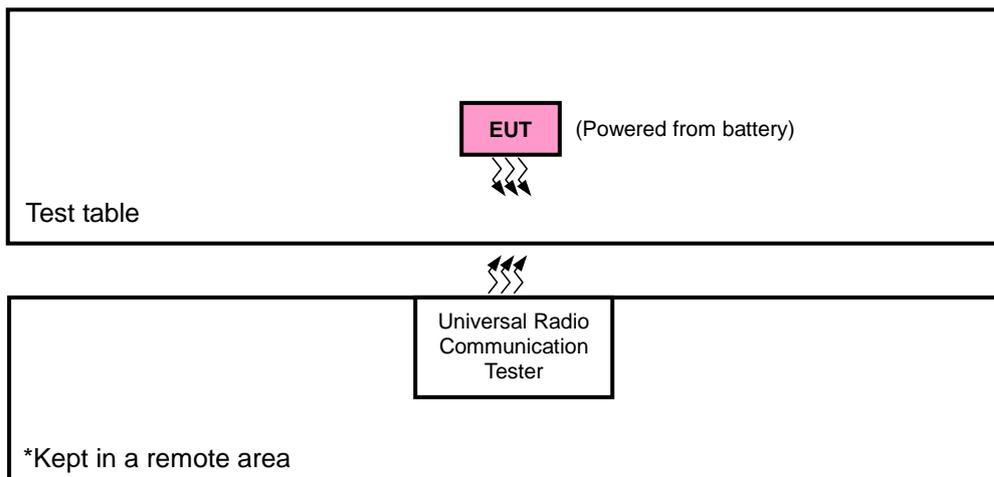

3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.4 DESCRIPTION OF TEST MODES

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on X-plane for ERP and X-axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

LTE Band 13

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE	
-	ERP	23205 to 23255	23205, 23230, 23255	5MHz	QPSK, 16QAM	1 RB / 12 RB Offset	
		23230	23230	10MHz	QPSK, 16QAM	1 RB / 24 RB Offset	
-	FREQUENCY STABILITY	23205 to 23255	23230	5MHz	QPSK	1 RB / 12 RB Offset	
		23230	23230	10MHz	QPSK	1 RB / 24 RB Offset	
-	OCCUPIED BANDWIDTH	23205 to 23255	23205, 23230, 23255	5MHz	QPSK, 16QAM	25 RB / 0 RB Offset	
		23230	23230	10MHz	QPSK, 16QAM	25 RB / 0 RB Offset	
-	PEAK TO AVERAGE RATIO	23205 to 23255	23205, 23230, 23255	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset	
		23230	23230	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset	
-	BAND EDGE	23205 to 23255	23205	5MHz	QPSK	1 RB / 0 RB Offset 25 RB / 0 RB Offset	
			23255	5MHz	QPSK	1 RB / 49 RB Offset 25 RB / 0 RB Offset	
		23230	23230	10MHz	QPSK	1 RB / 0 RB Offset 50 RB / 0 RB Offset	
			23230	10MHz	QPSK	1 RB / 49 RB Offset 50 RB / 0 RB Offset	
		CONDCUETED EMISSION	23205 to 23255	23230	5MHz	QPSK	1 RB / 0 RB Offset
			23230	23230	10MHz	QPSK	1 RB / 0 RB Offset
-	RADIATED EMISSION	23060 to 23130	23230	5MHz	QPSK	1 RB / 12 RB Offset	
		23230	23230	10MHz	QPSK	1 RB / 24 RB Offset	

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
ERP/EIRP	26deg. C, 58%RH	3.8Vdc	Howard Kao
FREQUENCY STABILITY	26deg. C, 58%RH	3.8Vdc	Howard Kao
OCCUPIED BANDWIDTH	26deg. C, 58%RH	3.8Vdc	Howard Kao
BAND EDGE	26deg. C, 58%RH	3.8Vdc	Howard Kao
CONDCUETED EMISSION	26deg. C, 58%RH	3.8Vdc	Howard Kao
RADIATED EMISSION	25deg. C, 65%RH	120Vac, 60Hz	Johnson Liao

3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

ANSI C63.4-2003

ANSI/TIA/EIA-603-C 2004

NOTE: All test items have been performed and recorded as per the above standards.

4 TEST TYPES AND RESULTS

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Portable stations (hand-held devices) operating in the 777-787 MHz band are limited to 3 watts ERP

4.1.2 TEST PROCEDURES

EIRP MEASUREMENT:


- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 10MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$

CONDUCTED POWER MEASUREMENT:


- a. The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

4.1.3 TEST SETUP

EIRP / ERP MEASUREMENT:

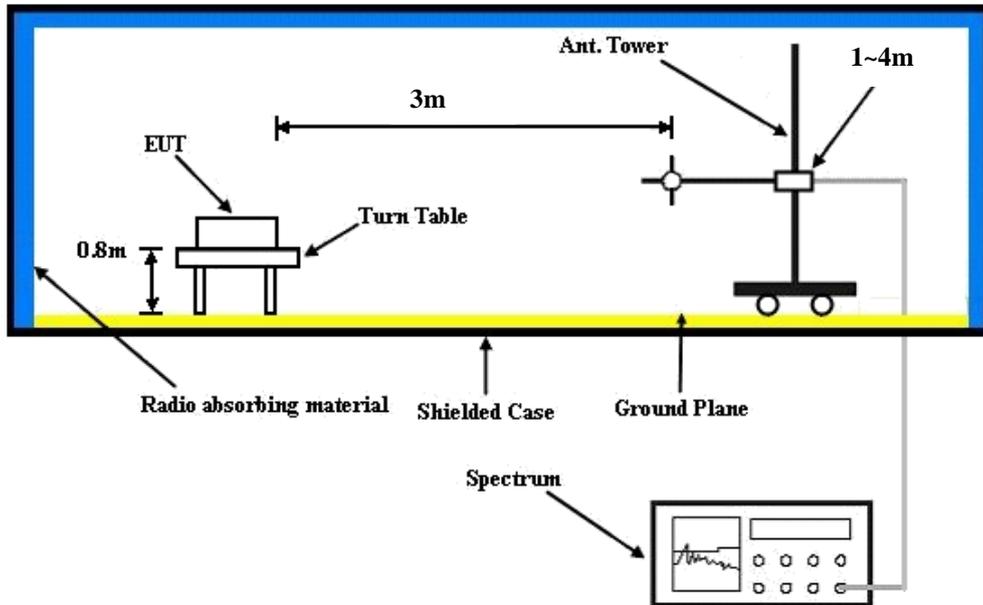

CONDUCTED POWER MEASUREMENT:

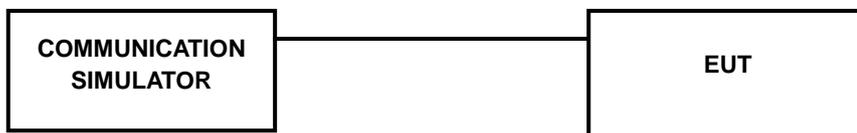

4.1.4 TEST RESULTS

AVERAGE CONDUCTED OUTPUT POWER (dBm)

Band / BW	Modulation	RB Size	RB Offset	Low CH 23205	Mid CH 23230	High CH 23255	3PGG MPR (dB)
				Frequency 779.5 MHz	Frequency 782.0 MHz	Frequency 784.5 MHz	
13 / 5M	QPSK	1	0	23.01	23.04	23.02	0
		1	12	23.71	23.89	23.86	0
		1	24	23.67	23.85	23.82	0
		12	0	22.71	22.89	22.86	1
		12	6	22.76	22.94	22.91	1
		12	13	22.79	22.97	22.94	1
		25	0	22.68	22.86	22.83	1
	16QAM	1	0	22.69	22.87	22.84	1
		1	12	22.79	22.97	22.94	1
		1	24	22.75	22.93	22.90	1
		12	0	21.69	21.87	21.84	2
		12	6	21.74	21.92	21.89	2
		12	13	21.77	21.95	21.92	2
		25	0	21.66	21.84	21.81	2

Band / BW	Modulation	RB Size	RB Offset	Mid CH 23230	3PGG MPR (dB)
				Frequency 782.0 MHz	
13 / 10M	QPSK	1	0	23.99	0
		1	24	24.00	0
		1	49	23.94	0
		25	0	22.83	1
		25	12	22.96	1
		25	25	22.92	1
		50	0	22.76	1
	16QAM	1	0	22.92	1
		1	24	22.93	1
		1	49	22.84	1
		25	0	21.73	2
		25	12	21.86	2
		25	25	21.82	2
		50	0	21.66	2

AVERAGE ERP (dBm)

ANTENNA-0

LTE BAND 13

CHANNEL BANDWIDTH: 5MHz QPSK

Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)
X	23205	779.5	-11.89	32.24	18.20	66.07	H
	23230	782.0	-11.76	32.17	18.26	66.99	
	23255	784.5	-11.53	32.11	18.43	69.66	
	23205	779.5	-14.81	32.43	15.47	35.24	V
	23230	782.0	-14.62	32.42	15.65	36.73	
	23255	784.5	-14.50	32.46	15.81	38.11	

CHANNEL BANDWIDTH: 5MHz 16QAM

Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)
X	23205	779.5	-11.67	32.24	18.42	69.50	H
	23230	782.0	-11.38	32.17	18.64	73.11	
	23255	784.5	-11.48	32.11	18.48	70.47	
	23205	779.5	-15.64	32.43	14.64	29.11	V
	23230	782.0	-16.06	32.42	14.21	26.36	
	23255	784.5	-16.17	32.46	14.14	25.94	

CHANNEL BANDWIDTH: 10MHz QPSK

Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)
X	23230	782.0	-10.70	32.17	19.32	85.51	H
	23230	782.0	-13.84	32.42	16.43	43.95	V

CHANNEL BANDWIDTH: 10MHz 16QAM

Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)
X	23230	782.0	-11.41	32.17	18.61	72.61	H
	23230	782.0	-13.21	32.42	17.06	50.82	V

ANTENNA-1

LTE BAND 13

CHANNEL BANDWIDTH: 5MHz QPSK

Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)
X	23205	779.5	-11.07	32.24	19.02	79.80	H
	23230	782.0	-10.88	32.17	19.14	82.04	
	23255	784.5	-10.78	32.11	19.18	82.79	
	23205	779.5	-15.46	32.43	14.82	30.34	V
	23230	782.0	-14.18	32.42	16.09	40.64	
	23255	784.5	-13.37	32.46	16.94	49.43	

CHANNEL BANDWIDTH: 5MHz 16QAM

Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)
X	23205	779.5	-10.92	32.24	19.17	82.60	H
	23230	782.0	-10.62	32.17	19.40	87.10	
	23255	784.5	-10.57	32.11	19.39	86.90	
	23205	779.5	-15.49	32.43	14.79	30.13	V
	23230	782.0	-14.32	32.42	15.95	39.36	
	23255	784.5	-12.97	32.46	17.34	54.20	

CHANNEL BANDWIDTH: 10MHz QPSK

Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)
X	23230	782.0	-10.96	32.17	19.06	80.54	H
	23230	782.0	-14.29	32.42	15.98	39.63	V

CHANNEL BANDWIDTH: 10MHz 16QAM

Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)
X	23230	782.0	-10.76	32.17	19.26	84.33	H
	23230	782.0	-14.30	32.42	15.97	39.54	V

4.2 FREQUENCY STABILITY MEASUREMENT

4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

4.2.2 TEST PROCEDURE

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.2.3 TEST SETUP

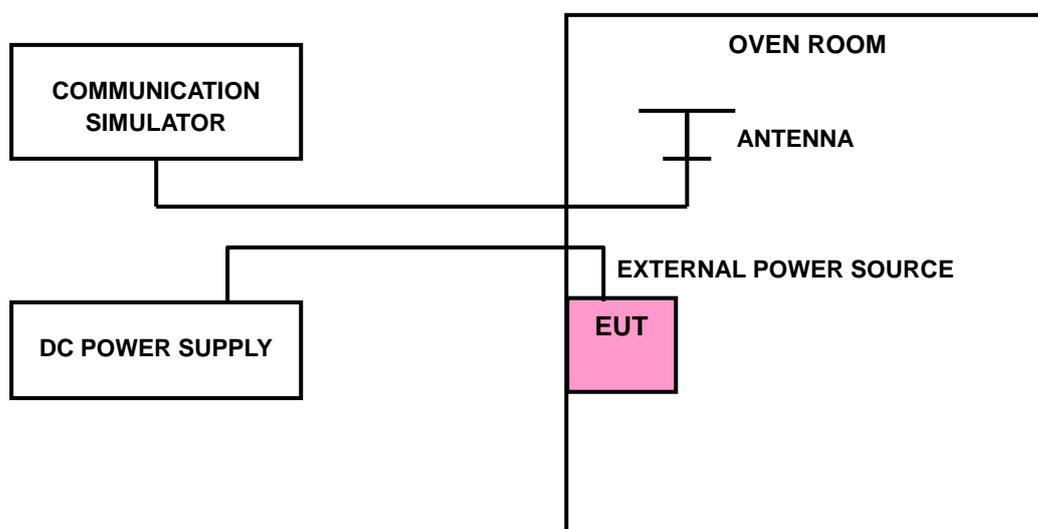

4.2.4 TEST RESULTS

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)	LIMIT (ppm)
	LTE BAND 13	
3.8	0.005	2.5
3.6	0.002	2.5
4.2	-0.002	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.6Vdc to 4.2Vdc.


TEMP. (°C)	FREQUENCY ERROR (ppm)	LIMIT (ppm)
	LTE BAND 13	
-30	-0.002	2.5
-20	-0.001	2.5
-10	0.004	2.5
0	0.004	2.5
10	0.001	2.5
20	0.000	2.5
30	-0.003	2.5
40	-0.003	2.5
50	-0.006	2.5
55	-0.006	2.5

4.3 OCCUPIED BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

4.3.2 TEST SETUP

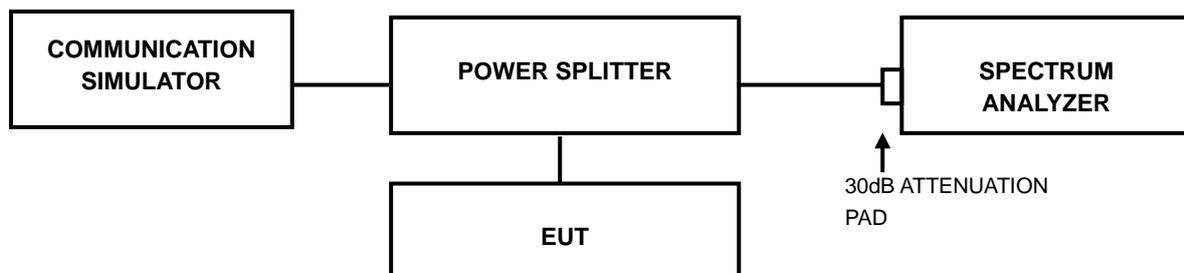


4.3.3 TEST PROCEDURES

- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.3.4 TEST RESULTS

LTE BAND 12							
CHANNEL BANDWIDTH: 5MHz				CHANNEL BANDWIDTH: 10MHz			
CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)		CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)	
		QPSK	16QAM			QPSK	16QAM
23205	779.5	4.4978	4.4901	23230	782.0	8.9291	8.9329
23230	782.0	4.4949	4.4941				
23255	784.5	4.4928	4.4865				

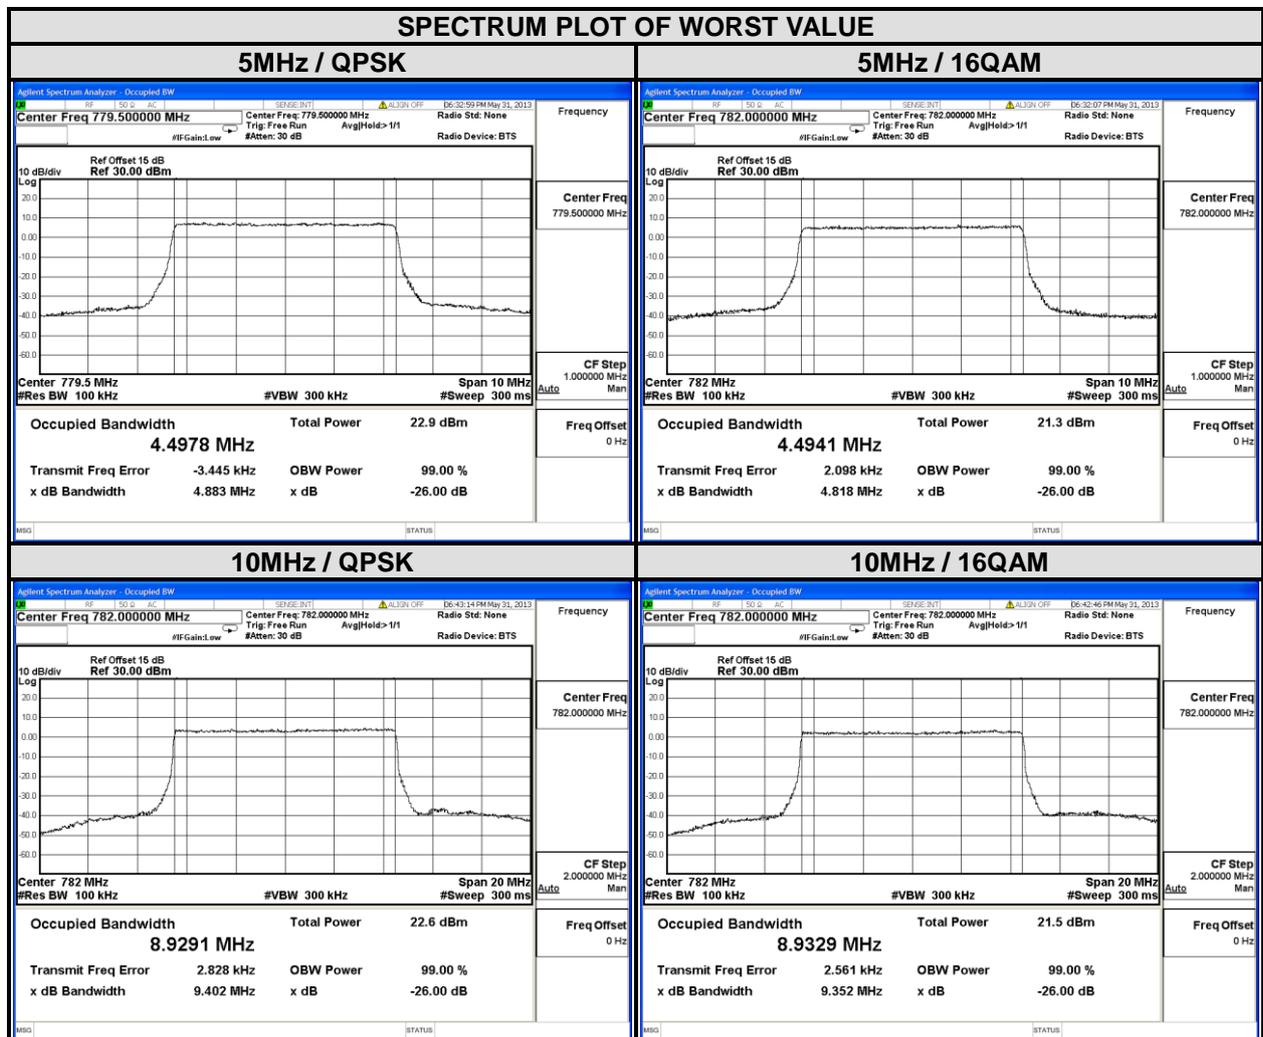


4.4 PEAK TO AVERAGE RATIO

4.4.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

4.4.2 TEST SETUP

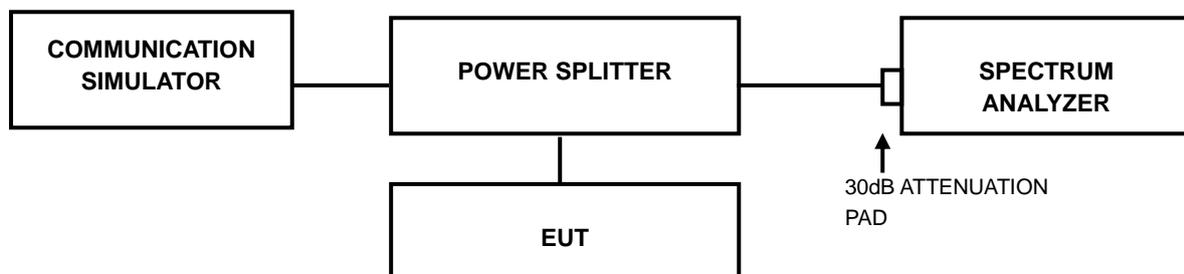


4.4.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

4.4.4 TEST RESULTS

LTE BAND 13							
CHANNEL BANDWIDTH: 5MHz				CHANNEL BANDWIDTH: 10MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
23205	779.5	4.76	6.21	23230	782.0	5.77	6.32
23230	782.0	5.23	5.95				
23255	784.5	5.14	5.98				

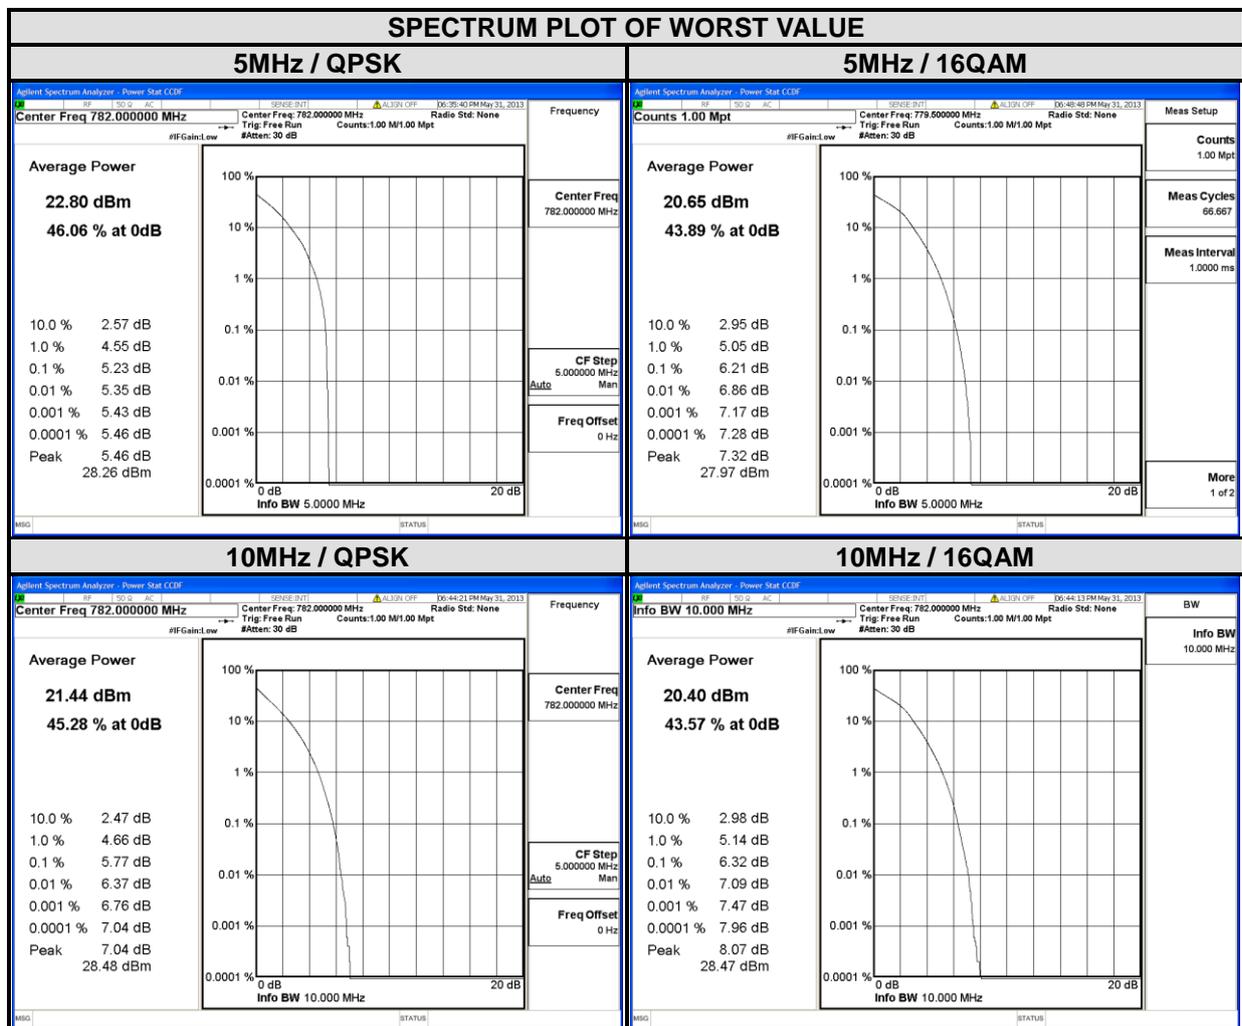


4.5 BAND EDGE MEASUREMENT

4.5.1 LIMITS OF BAND EDGE MEASUREMENT

For operations in the 777-787 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

4.5.2 TEST SETUP

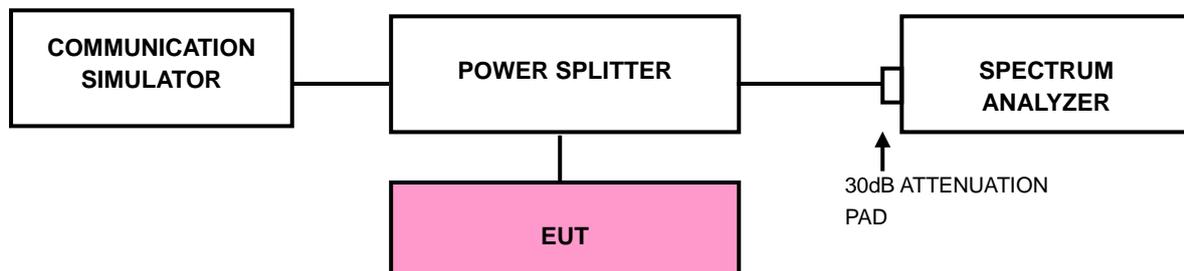


4.5.3 TEST PROCEDURES

- a. The EUT was set up for the maximum peak power with LTE link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels (low and high operational frequency range.).
- b. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- c. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz.
- d. Record the max trace plot into the test report.

4.5.4 TEST RESULTS



LTE BAND 13

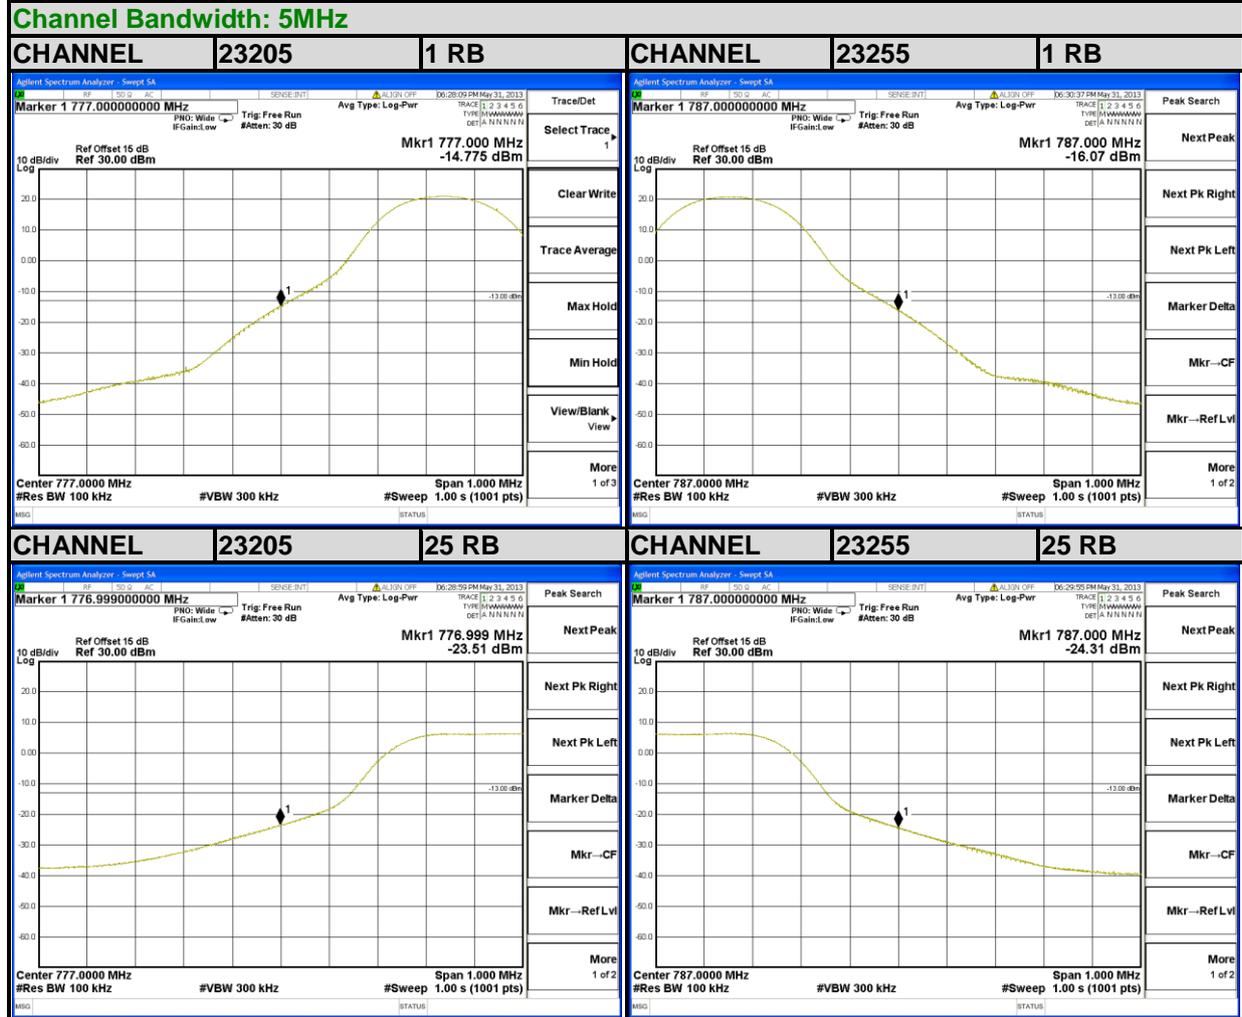



A D T

Channel Bandwidth: 10MHz

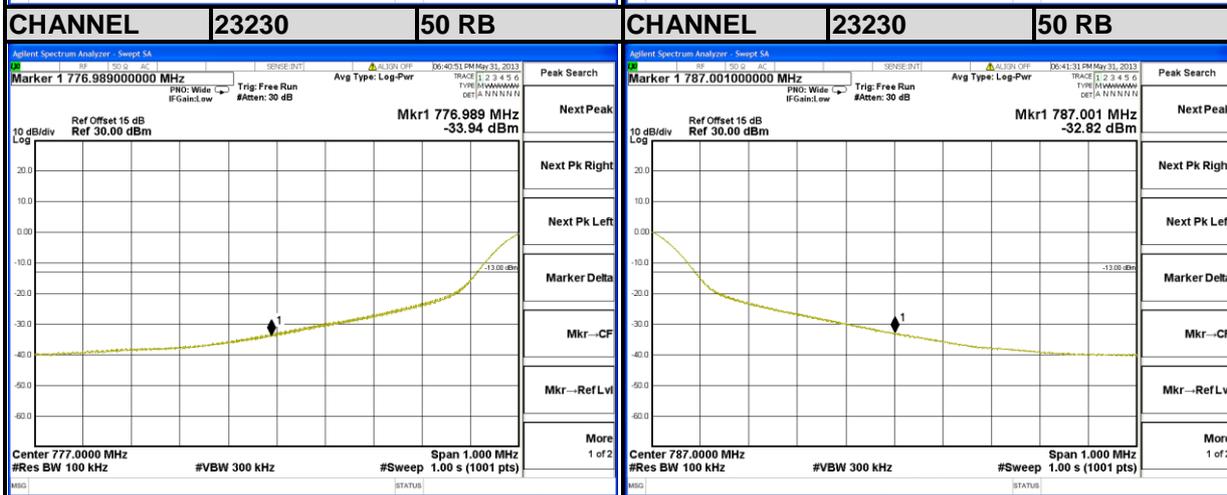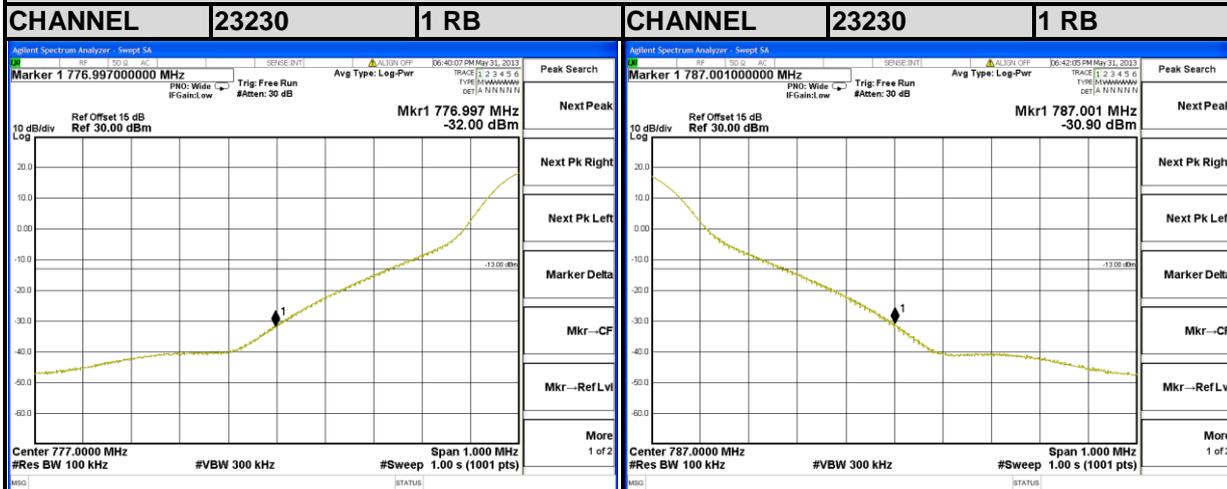

4.6 CONDUCTED SPURIOUS EMISSIONS


4.6.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission equal to -13dBm

4.6.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 30 MHz to 8GHz for LTE Band 17 and from 30MHz to 18GHz for LTE Band 4. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz are used for conducted emission measurement.

4.6.3 TEST SETUP

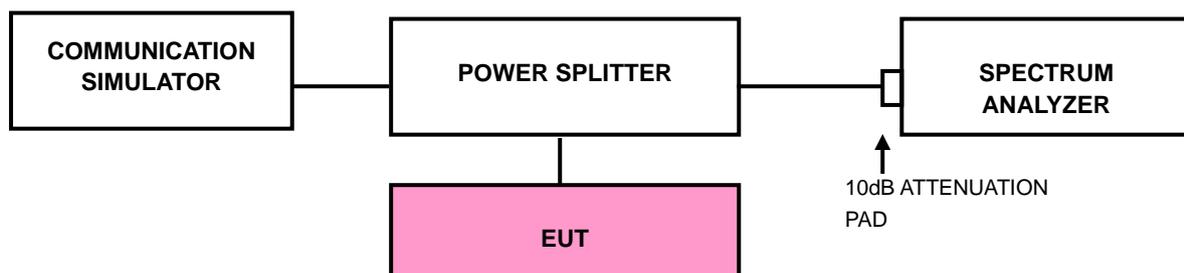




A D T

4.6.4 TEST RESULTS

LTE BAND 13

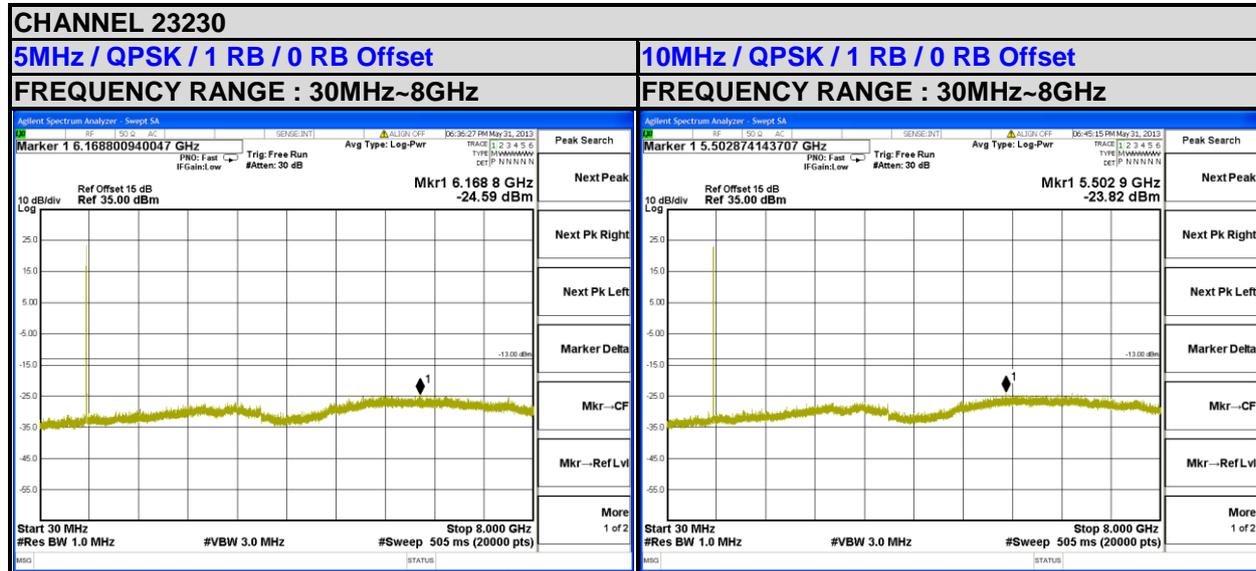

4.7 RADIATED EMISSION MEASUREMENT

4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission equal to -13dBm

4.7.2 TEST PROCEDURES


- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi.}$

NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

4.7.3 DEVIATION FROM TEST STANDARD

No deviation

4.7.4 TEST SETUP

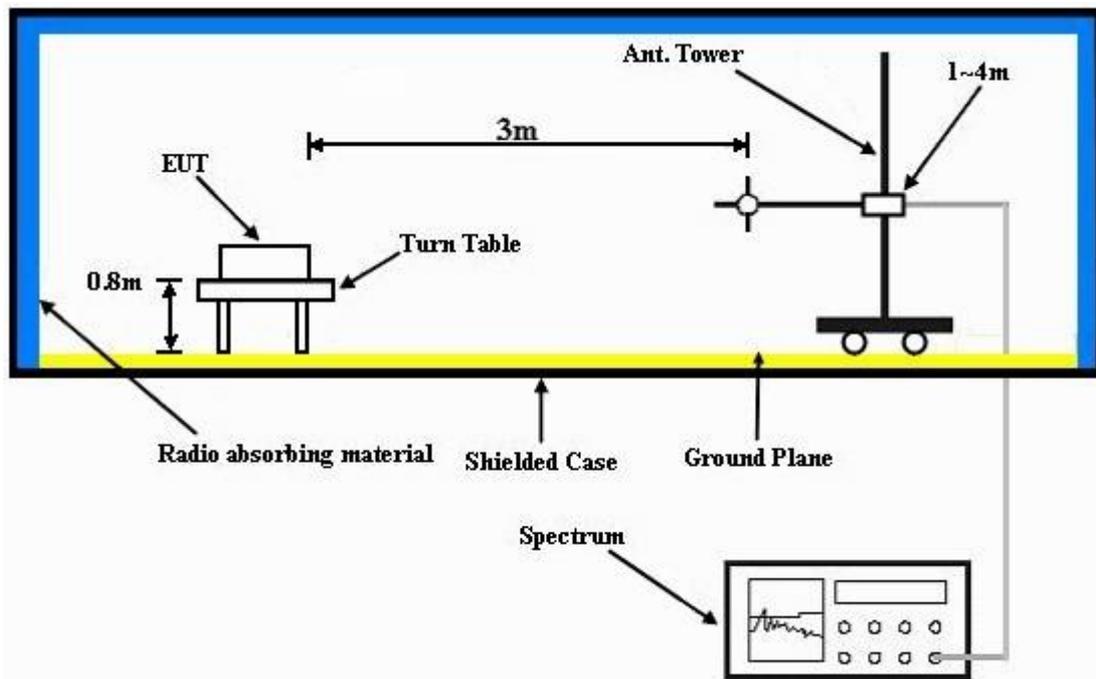

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.7.5 TEST RESULTS

ANTENNA-0


LTE BAND 13

CHANNEL BANDWIDTH: 5MHz / QPSK



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

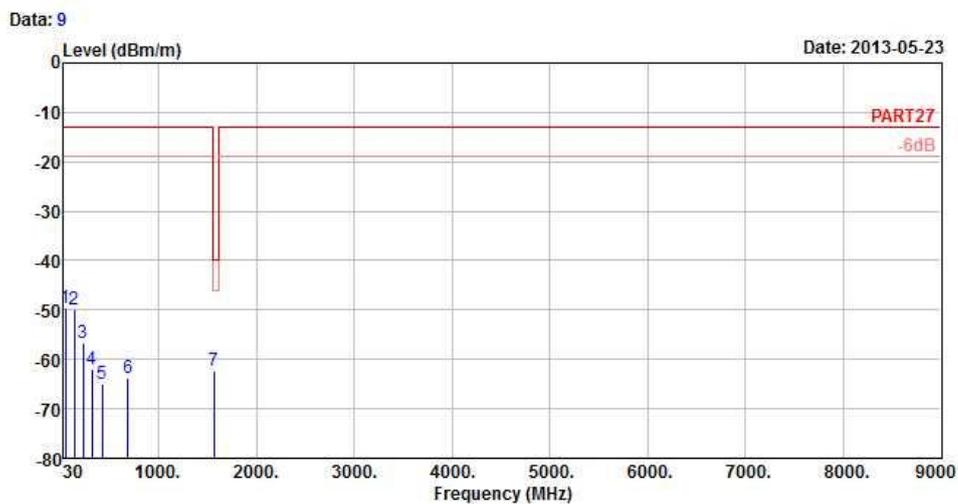

Site : 966 Chamber 5
 Condition : PART27 3m HORIZONTAL
 Brand/Model: PN07310
 Remark : Band 13 5M_QPSK(1,12) Link
 Tested by : Johnson Liao
 Temperature : 25°C
 Humidity : 65%
 Plane : X

	Read	Limit	Over			
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	44.85	-49.72	-48.53	-13.00	-36.72	-1.19 Peak
2	139.35	-49.79	-44.12	-13.00	-36.79	-5.67 Peak
3	230.34	-56.69	-50.14	-13.00	-43.69	-6.55 Peak
4	316.10	-61.96	-55.70	-13.00	-48.96	-6.26 Peak
5	423.90	-65.08	-60.05	-13.00	-52.08	-5.03 Peak
6	689.20	-63.87	-65.13	-13.00	-50.87	1.26 Peak
7 pp	1564.00	-62.15	-48.88	-40.00	-22.15	-13.27 Peak



A D T




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2013-05-23

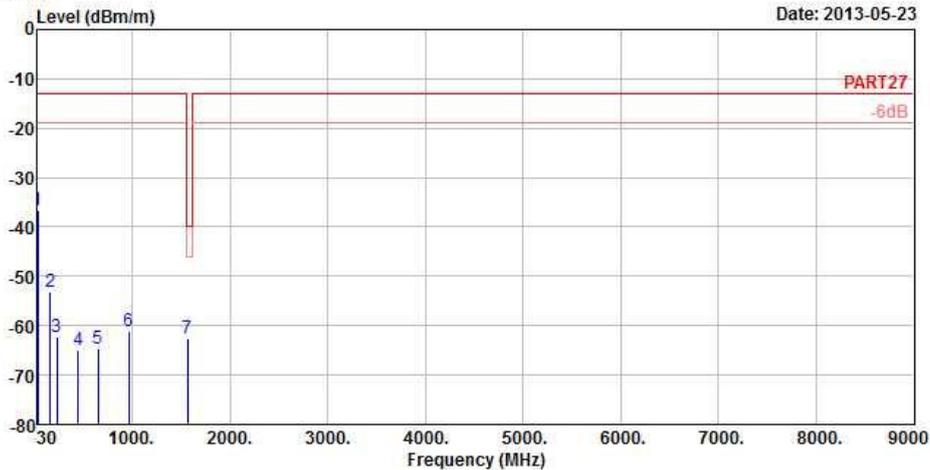

Site : 966 Chamber 5
 Condition : PART27 3m VERTICAL
 Brand/Model: PN07310
 Remark : Band 13 5M_QPSK(1,12) Link
 Tested by : Johnson Liao
 Temperature : 25°C
 Humidity : 65%
 Plane : X

	Freq	Level	Read	Limit	Over		
	MHz	dBm/m	Level	Line	Limit	Factor	Remark
			dBm	dBm/m	dB	dB/m	
1	32.70	-36.47	-35.36	-13.00	-23.47	-1.11	Peak
2	158.52	-53.23	-46.75	-13.00	-40.23	-6.48	Peak
3	224.94	-62.32	-55.51	-13.00	-49.32	-6.81	Peak
4	447.00	-65.00	-60.56	-13.00	-52.00	-4.44	Peak
5	645.80	-64.65	-65.12	-13.00	-51.65	0.47	Peak
6	960.80	-61.04	-64.94	-13.00	-48.04	3.90	Peak
7 pp	1564.00	-62.48	-49.21	-40.00	-22.48	-13.27	Peak



A D T

CHANNEL BANDWIDTH: 10MHz / QPSK




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2013-05-23

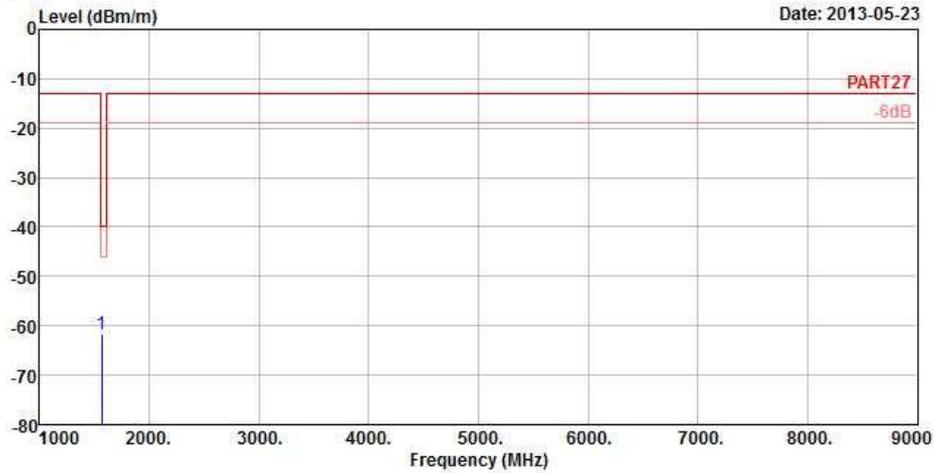

Site : 966 Chamber 5
 Condition : PART27 3m HORIZONTAL
 Brand/Model: PN07310
 Remark : Band 13 10M_QPSK(1,24) Link
 Tested by : Johnson Liao
 Temperature : 25°C
 Humidity : 65%
 Plane : X

Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1 pp 1564.00	-61.84	-48.57	-40.00	-21.84	-13.27	Peak



A D T




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 2013-05-23

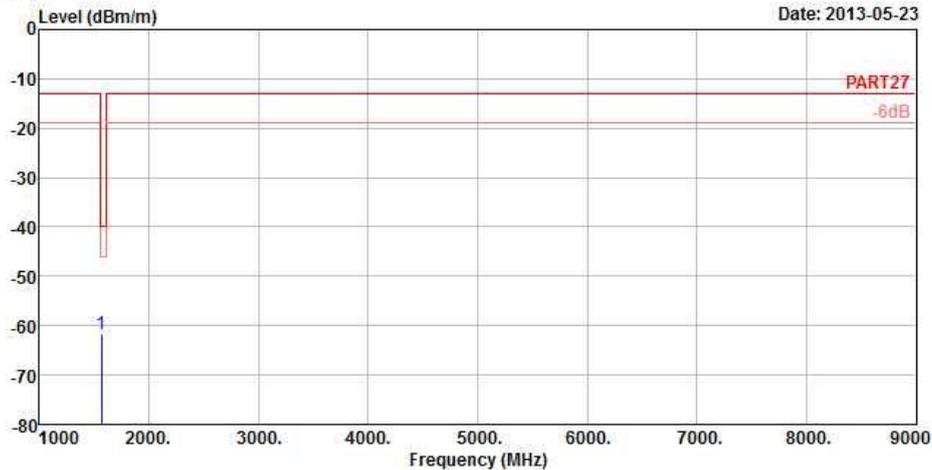

Site : 966 Chamber 5
 Condition : PART27 3m VERTICAL
 Brand/Model: PN07310
 Remark : Band 13 10M_QPSK(1,24) Link
 Tested by : Johnson Liao
 Temperature : 25°C
 Humidity : 65%
 Plane : X

Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1 pp 1564.00	-61.77	-48.50	-40.00	-21.77	-13.27	Peak


ANTENNA-1

CHANNEL BANDWIDTH: 5MHz / QPSK



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

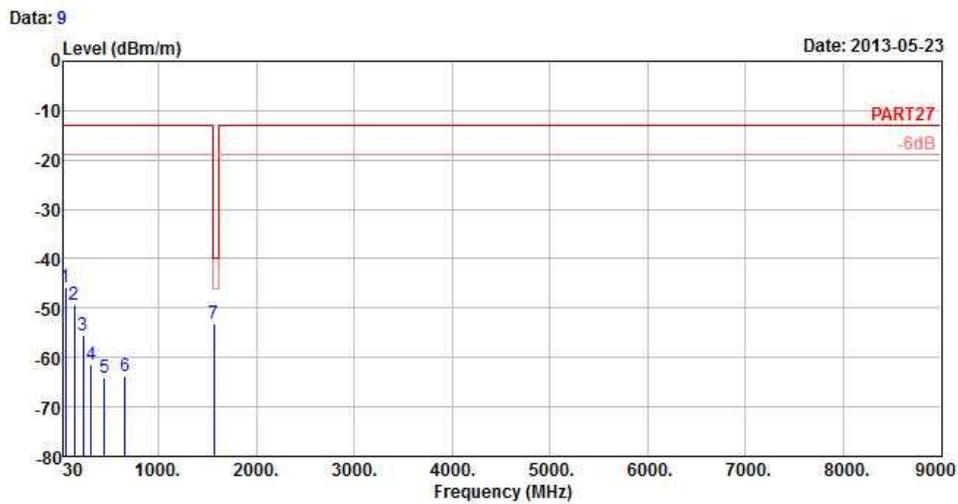

Site : 966 Chamber 5
 Condition : PART27 3m HORIZONTAL
 Brand/Model: PN07310
 Remark : Band 13 5M_QPSK(1,12) Link
 Tested by : Johnson Liao
 Temperature : 25°C
 Humidity : 65%
 Plane : X

	Read	Limit	Over			
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	44.58 -45.69	-44.50	-13.00	-32.69	-1.19	Peak
2	139.35 -49.24	-43.57	-13.00	-36.24	-5.67	Peak
3	228.45 -55.62	-48.98	-13.00	-42.62	-6.64	Peak
4	310.50 -61.52	-55.22	-13.00	-48.52	-6.30	Peak
5	442.10 -64.12	-59.56	-13.00	-51.12	-4.56	Peak
6	654.20 -63.69	-64.32	-13.00	-50.69	0.63	Peak
7 pp	1564.00 -53.00	-39.73	-40.00	-13.00	-13.27	Peak



A D T




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2013-05-23

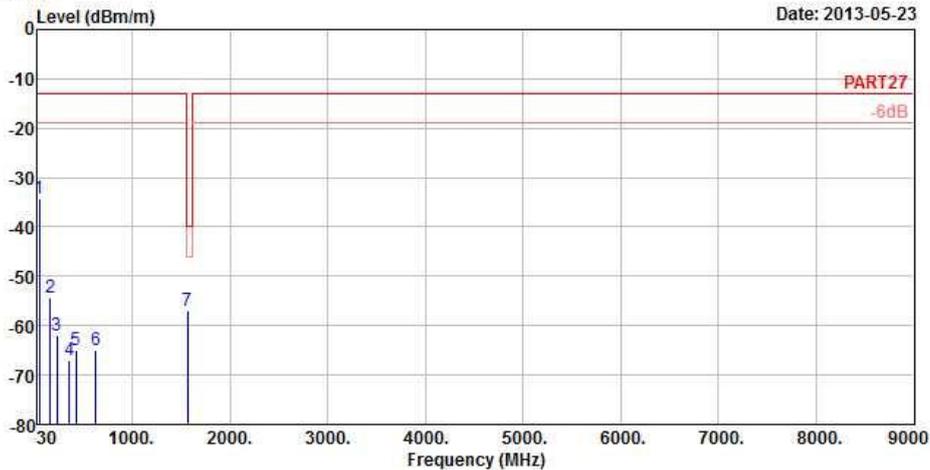

Site : 966 Chamber 5
 Condition : PART27 3m VERTICAL
 Brand/Model: PN07310
 Remark : Band 13 5M_QPSK(1,12) Link
 Tested by : Johnson Liao
 Temperature : 25°C
 Humidity : 65%
 Plane : X

	Read	Limit	Over			
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	44.58	-34.19	-33.00	-13.00	-21.19	-1.19 Peak
2	161.76	-54.18	-47.63	-13.00	-41.18	-6.55 Peak
3	224.13	-61.97	-55.11	-13.00	-48.97	-6.86 Peak
4	353.20	-67.02	-61.04	-13.00	-54.02	-5.98 Peak
5	421.80	-64.93	-59.85	-13.00	-51.93	-5.08 Peak
6	626.90	-65.04	-65.16	-13.00	-52.04	0.12 Peak
7 pp	1564.00	-57.06	-43.79	-40.00	-17.06	-13.27 Peak



A D T

CHANNEL BANDWIDTH: 10MHz / QPSK




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2013-05-23

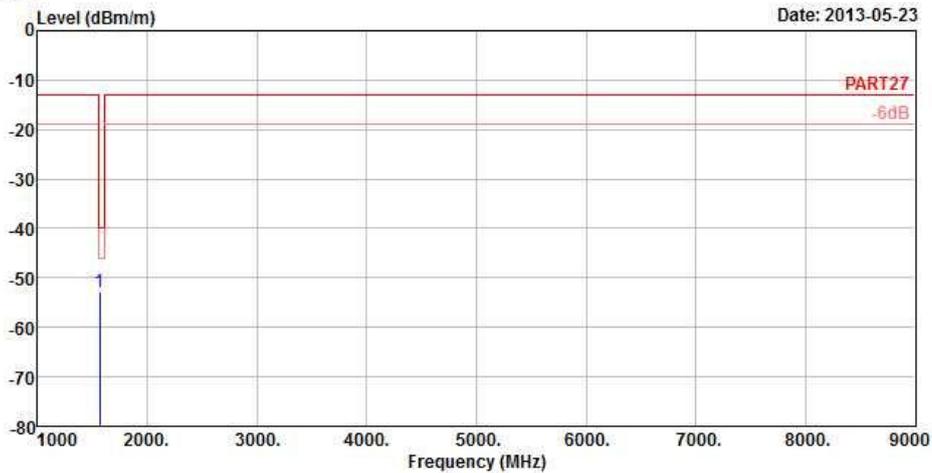

Site : 966 Chamber 5
 Condition : PART27 3m HORIZONTAL
 Brand/Model: PN07310
 Remark : Band 13 10M_QPSK(1,24) Link
 Tested by : Johnson Liao
 Temperature : 25°C
 Humidity : 65%
 Plane : X

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	pp 1564.00	-52.88	-39.61	-40.00	-12.88	-13.27	Peak



A D T




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 2013-05-23

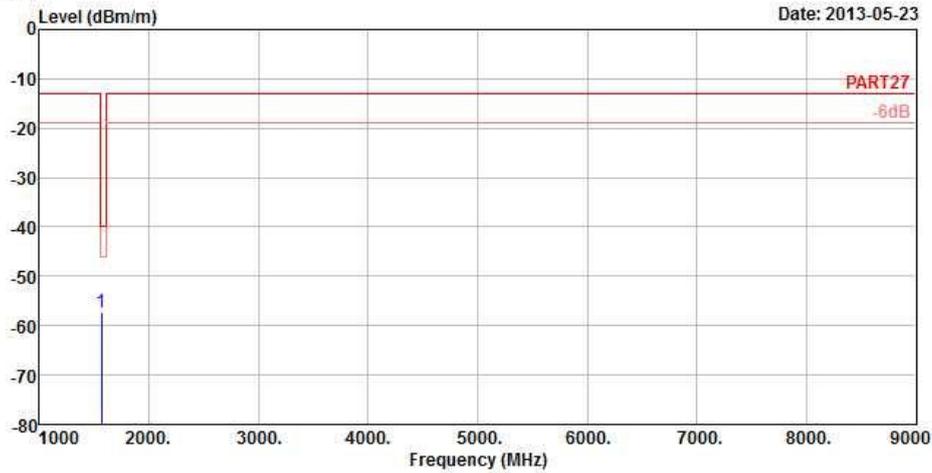

Site : 966 Chamber 5
 Condition : PART27 3m VERTICAL
 Brand/Model: PN07310
 Remark : Band 13 10M_QPSK(1,24) Link
 Tested by : Johnson Liao
 Temperature : 25°C
 Humidity : 65%
 Plane : X

Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1 pp 1564.00	-57.14	-43.87	-40.00	-17.14	-13.27	Peak

5 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---