


NOTES: UNLESS OTHERWISE SPECIFIED



- 1
- APPLY 9±1 IN-LBS TORQUE TO TIGHTEN SCREWS(ITEM #3 & 10).
- 2
- PROPERLY SECURED AND INSTALLED CLIP(ITEM #12) TO CYLINDER SA(ITEM #11) AND ROSE(ITEM #1).
- 3
- APPLY 6±1 IN-LBS TORQUE TO TIGHTEN SCREWS(ITEM #6).
- 4
- ENVIRONMENTAL TEST:
EXTERIOR ASSEMBLIES NEED TO PASS THE FOLLOWING TESTS:
4.1 THERMAL & HUMIDITY TEST WITH TEMPERATURE CYCLED FROM -40°F TO 185°F FOR 240 HRS AT 100% HUMIDITY. NO CRACK TO THE UV COATING OR SCREEN MATERIAL IS ALLOWED AFTER THE TEST AND EXTERIOR SHOULD BE FUNCTIONAL WHEN POWER IS SUPPLIED.

- 5
- PROPERLY ROUTE THE HARNESS INTO THE HOLE OF SILICON RUBBER(ITEM #7).
- 6
- PROPERLY SECURE THE TAPES OF TOUCH SCREEN SA(ITEM #2) ON THE ROSE(ITEM #1).
TOUCHSCREEN MUST WITHSTAND 100-LBF MIN WITH ROSE BY PUSH/PULL TEST WITH ITEM #6 SCREWS INSTALLED.
- 7
- PROPERLY SECURE THE EYELET FROM THE GROUND WIRE ONTO THE GROUNDING POST(ITEM #1) OF THE BACKSIDE OF THE ROSE BY ROUTING GROUND WIRE THROUGH LOWER HOLE OF ROSE UNDERNEATH SILICON RUBBER (ITEM #7)
- 8
- WIRE HARNESS ON ITEM #2 MUST WITHSTAND PULL FORCE OF 28±2 LBF AND MAINTAIN FUNCTIONALITY WITH POWER APPLIED
9. WEIGHT:
5054137 : 0.950 LBS
5054138 : 0.950 LBS

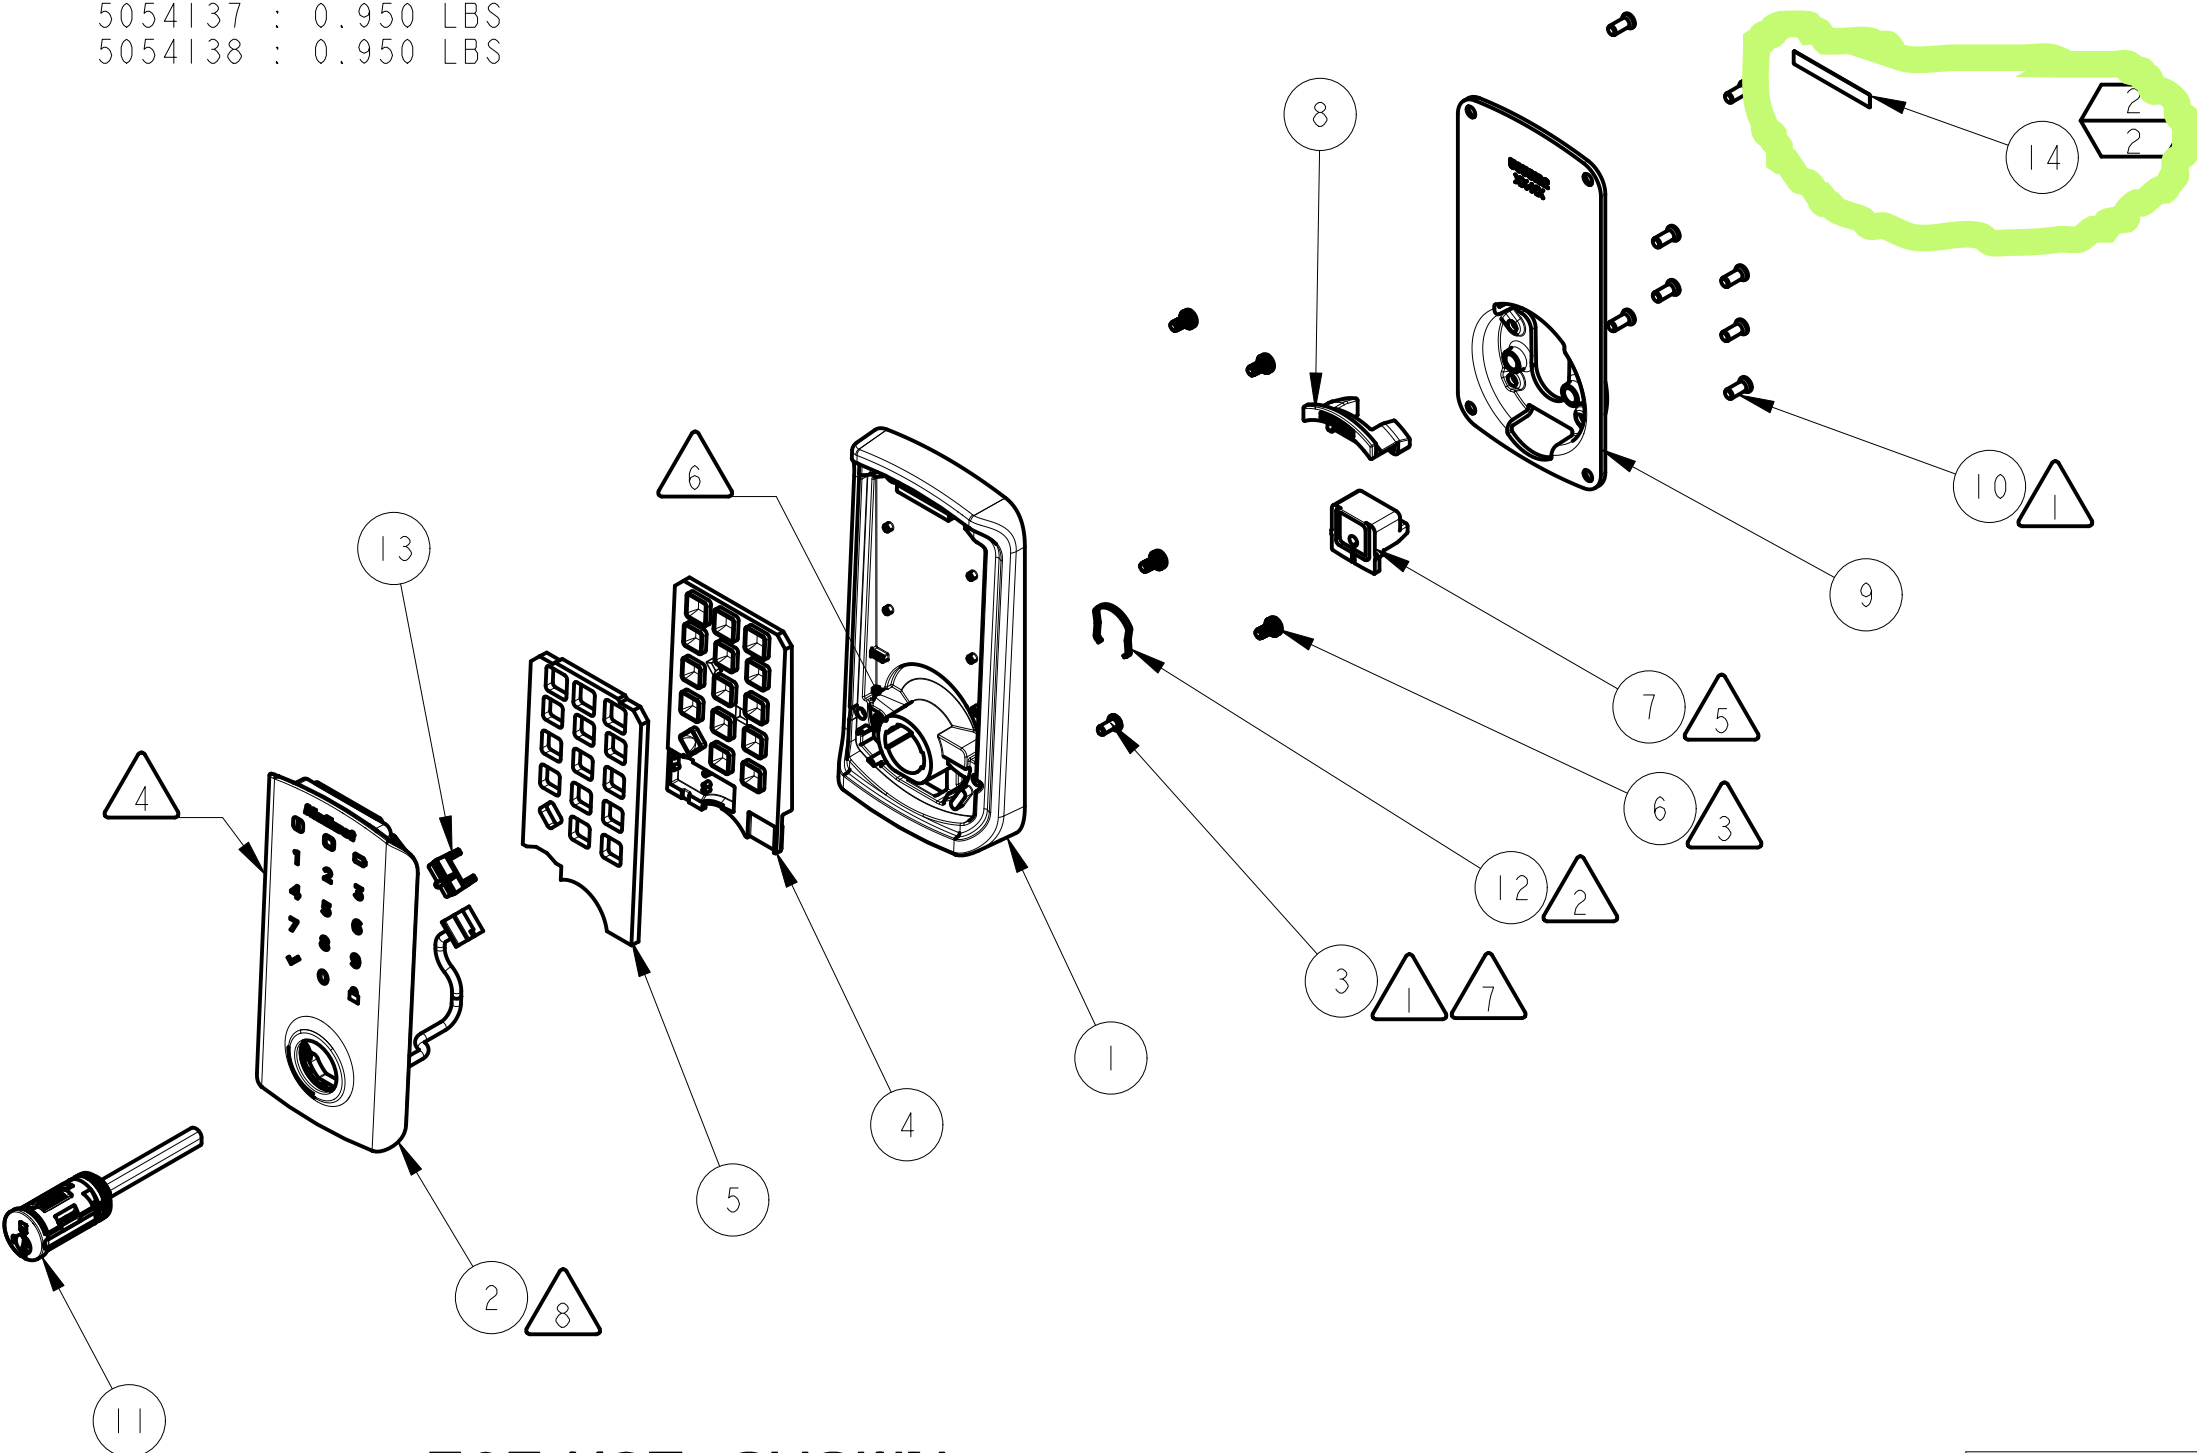

5054137 SHOWN

REV	DESCRIPTION	PDM REF	D: 2.4	M: 2.2+	DRAFTER	ENGINEER	APPROVED
1	PRODUCTION RELEASE PER E014366-03		02/13/25		L. LIN	B. QUACH	JA. LIN
2	REVISED PER E014366-06		04/14/25		P. BECKMAN	T. NGUYEN	M. LOVETT

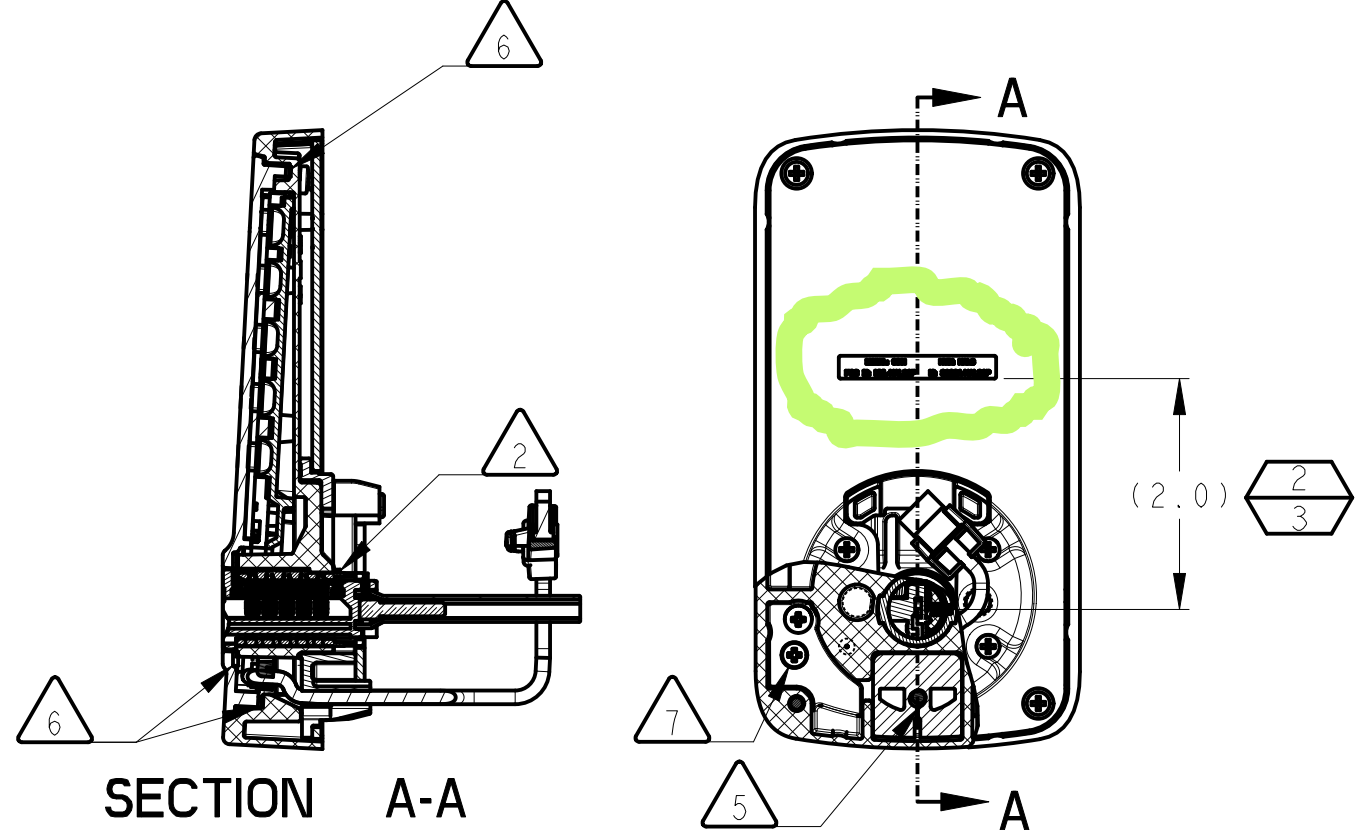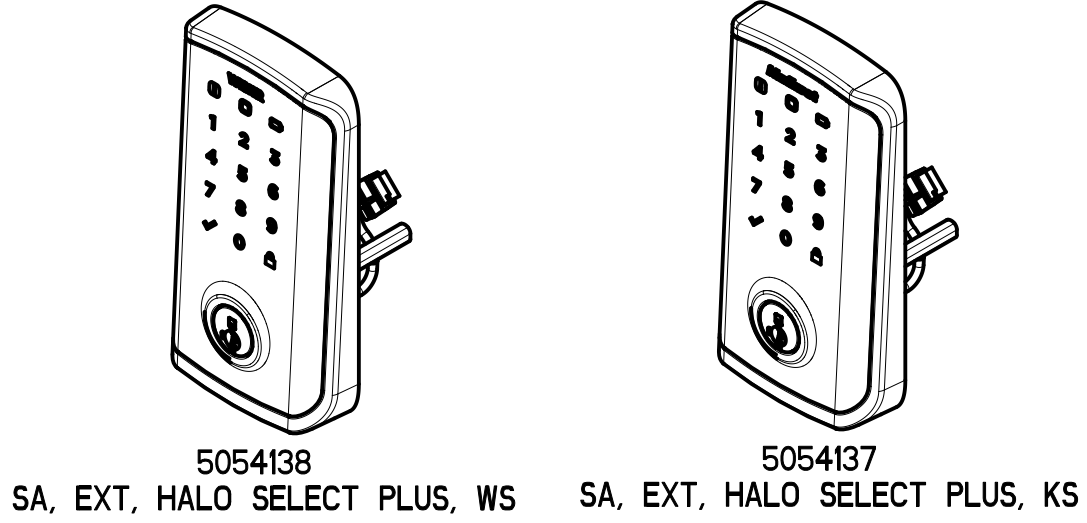

14	5054535	LABEL, FCC, HALO SELECT PLUS	1	1
13	5053198	GRIP, CABLE, HALO 3	1	1
12	5024094	CLIP, CYLINDER	1	1
11	5062286	SA, CYL, DB, SGL, EXT, SMT3	1	1
10	5027512	SCREW, FLAT-HEAD, 6-32 X .330	8	8
9	5053192	PLATE, ROSE, EXT, HALO 3	1	1
8	5053247	RUBBER, UPPER, INSTALLATION, EXT, HALO	1	1
7	5053233	RUBBER, SUPPORT, INSTALLATION, EXT, HALO	1	1
6	5054273	SCREW, PAN HEAD (SERRATED), #5-40, .250"	4	4
5	5054635	LIGHTGUIDE, FOAM PIECE, TOUCHSCREEN, HALO 3	1	1
4	5053232	STRUCTURAL, TOUCHSCREEN, HALO 3	1	1
3	5065847	SCREW, PAN HEAD, 4-20, SELF-THREADING	1	1
2	5065795	SA, SCREEN, TOUCH, EXT, HALO SELECT PLUS,PGMD, WS	1	1
2	5065794	SA, SCREEN, TOUCH, EXT, HALO SELECT PLUS,PGMD, KS	1	1
1	5053231	ROSE, HALO V3	1	1

ITEM NO.	PRT NO.	DESCRIPTION	QTY
			5054138
			5054137

ASSEMBLY NO.:

PART LIST

DRAFTER	DATE	ASSA ABLOY AMERICAS RESIDENTIAL INC. 19701 DA VINCI, LAKE FOREST, CA 92610
L. LIN	05/15/23	
CHECKED	DATE	TITLE
B. QUACH	05/15/23	SA, EXT, HALO SELECT PLUS
ENGINEER	DATE	SIZE
B. QUACH	04/18/22	C
APPROVED	DATE	DO NOT SCALE DRAWING
JA. LIN	05/15/23	DWG NO
		5054136
THIRD ANGLE PROJECTION	RELEASE STATE	Production
	SCALE	1/2
	SHEET	1 OF 1
	REV	2
	ITER	4

KWIKSET
ASSA ABLOY

THIS DOCUMENT IS THE PROPERTY OF ASSA ABLOY AMERICAS RESIDENTIAL INC. AND/OR ITS AFFILIATES. THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO ASSA ABLOY AMERICAS RESIDENTIAL INC. NEITHER THIS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIZED PERSON, COPIED, OR PUBLISHED WITHOUT ASSA ABLOY AMERICAS RESIDENTIAL INC. PRIOR WRITTEN CONSENT.