

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA61080-C/P	Serial No:	CC060014
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	TDMA - Uplink (Low) - Output at 824.03 MHz		

11: 22: 38 AUG 16, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA VB
SC FC
CORR

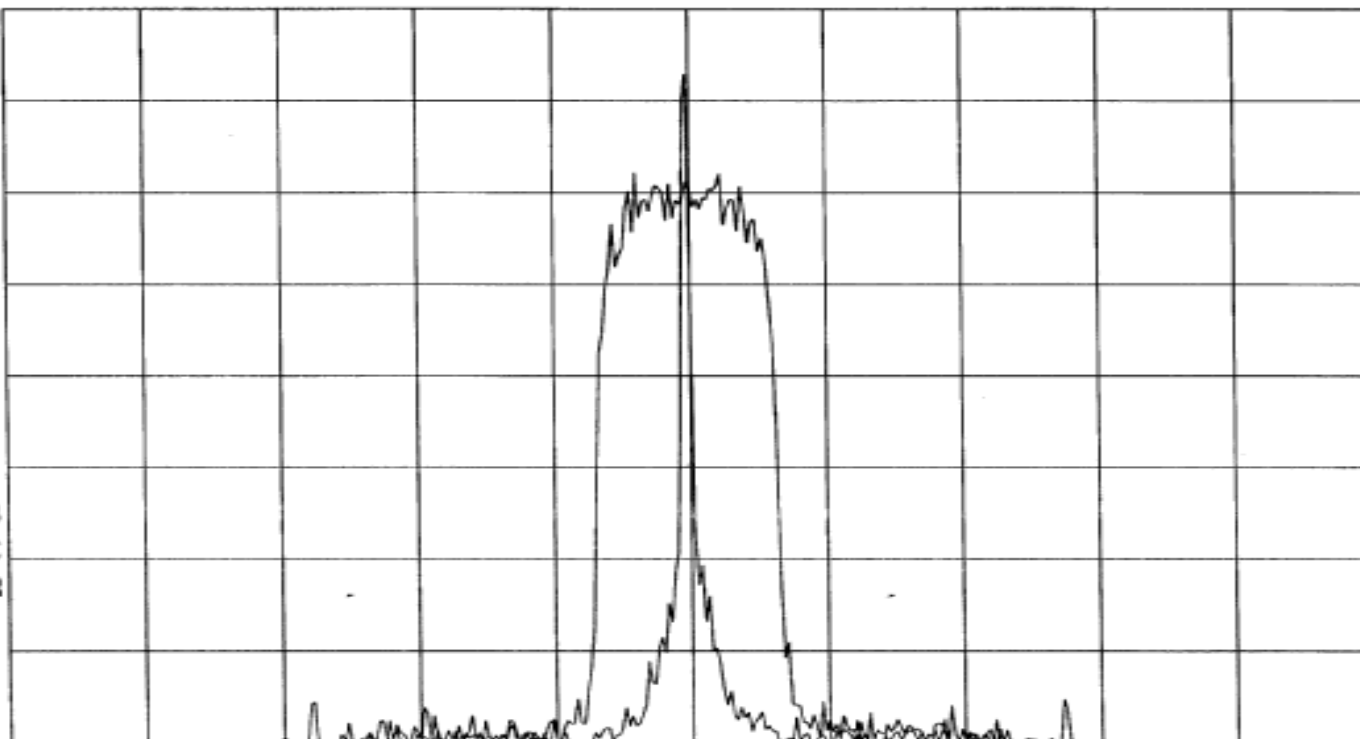

CENTER 824.0300 MHz

#RES BW 300 Hz

#VBW 1 kHz

SPAN 250.0 kHz

SWP 8.33 sec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA61080-C/P	Serial No:	CC060014
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	TDMA - Uplink (Low) - Input at 824.03 MHz		
Job No:	R-4609N-3		Technician:
		M.Seamans	Date:
		8/16/2006	

11: 27: 54 AUG 16, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA SB
SC FC
CORR

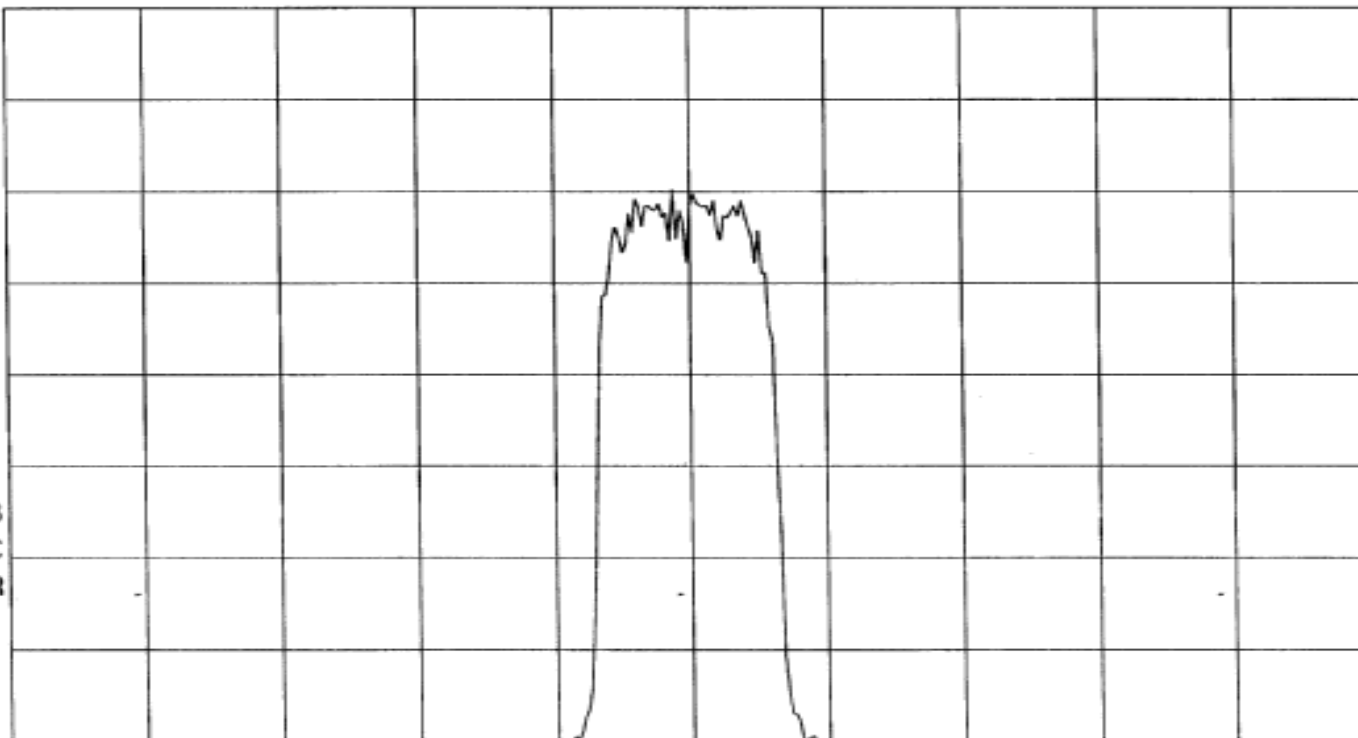

CENTER 824.0300 MHz

#RES BW 300 Hz

#VBW 1 kHz

SPAN 250.0 kHz

SWP 8.33 sec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA61080-C/P	Serial No:	CC060014
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	TDMA - Uplink (High) - Output at 848.97 MHz		

11: 20: 42 AUG 16, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA VB
SC FC
CORR.

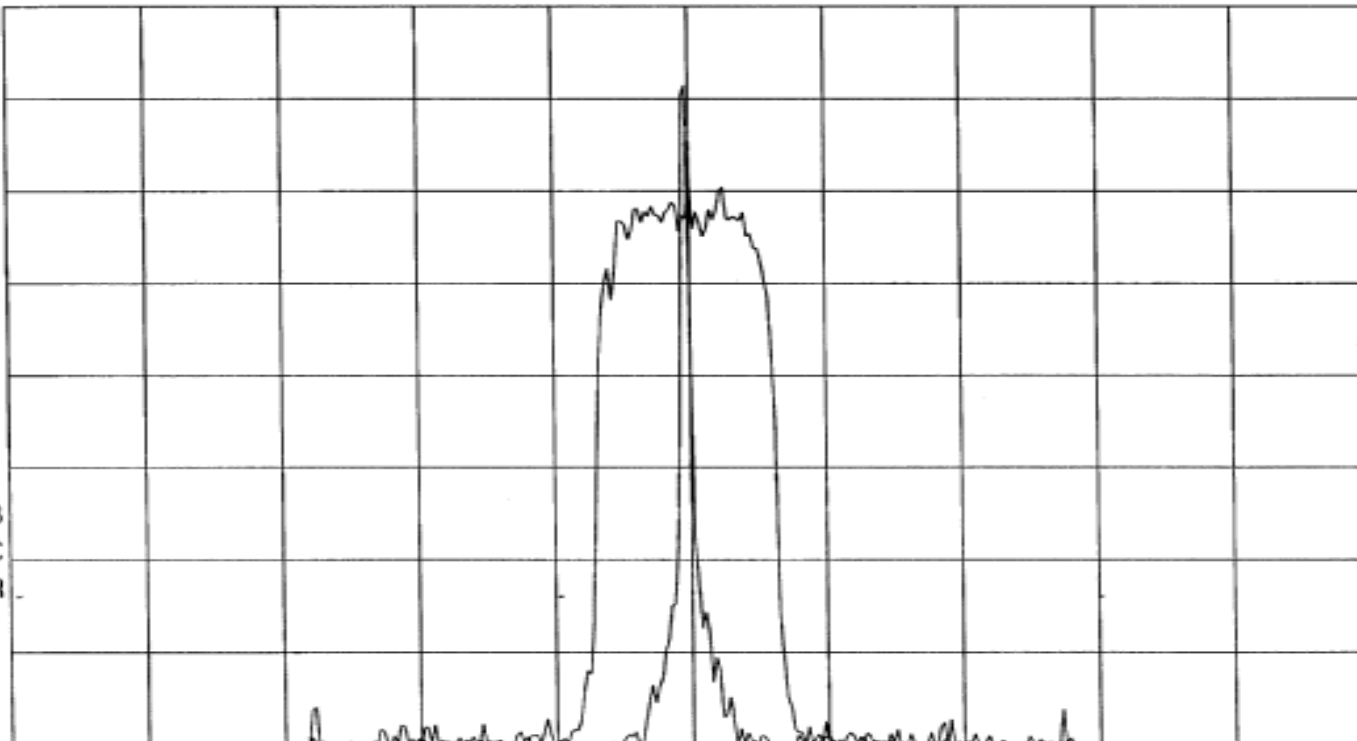

CENTER 848.9700 MHz

#RES BW 300 Hz

#VBW 1 kHz

SPAN 250.0 kHz

SWP 8.33 sec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA61080-C/P	Serial No:	CC060014
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	TDMA - Uplink (High) - Input at 848.97 MHz		

11: 29: 29 AUG 16, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA SB
SC FC
CORR

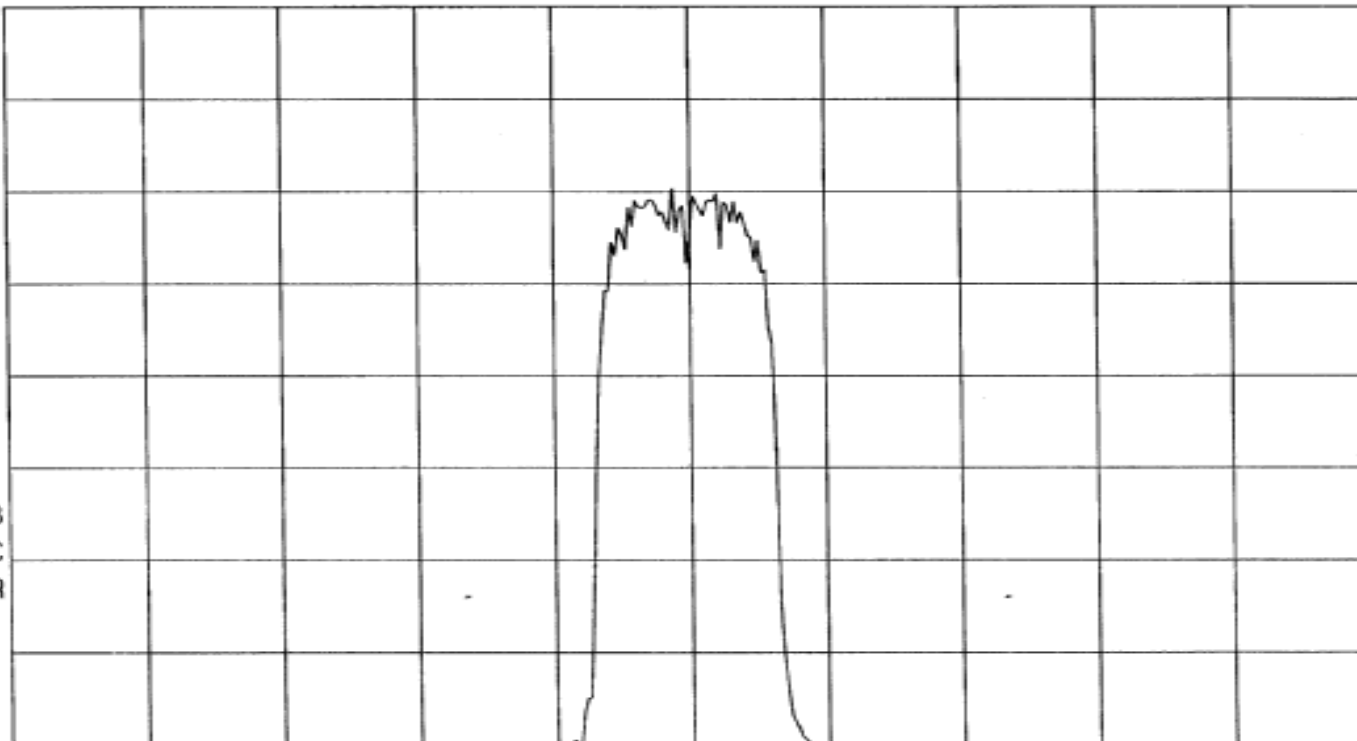

CENTER 848.9700 MHz

#RES BW 300 Hz

#VBW 1 kHz

SPAN 250.0 kHz

SWP 8.33 sec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA61080-C/P	Serial No:	CC060014
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	TDMA - Downlink (low) - Output at 869.03 MHz		
Job No:	R-4609N-3		Technician:
		M.Seamans	Date:
		8/16/2006	

11:10:12 AUG 16, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA VB
SC FC
CORR

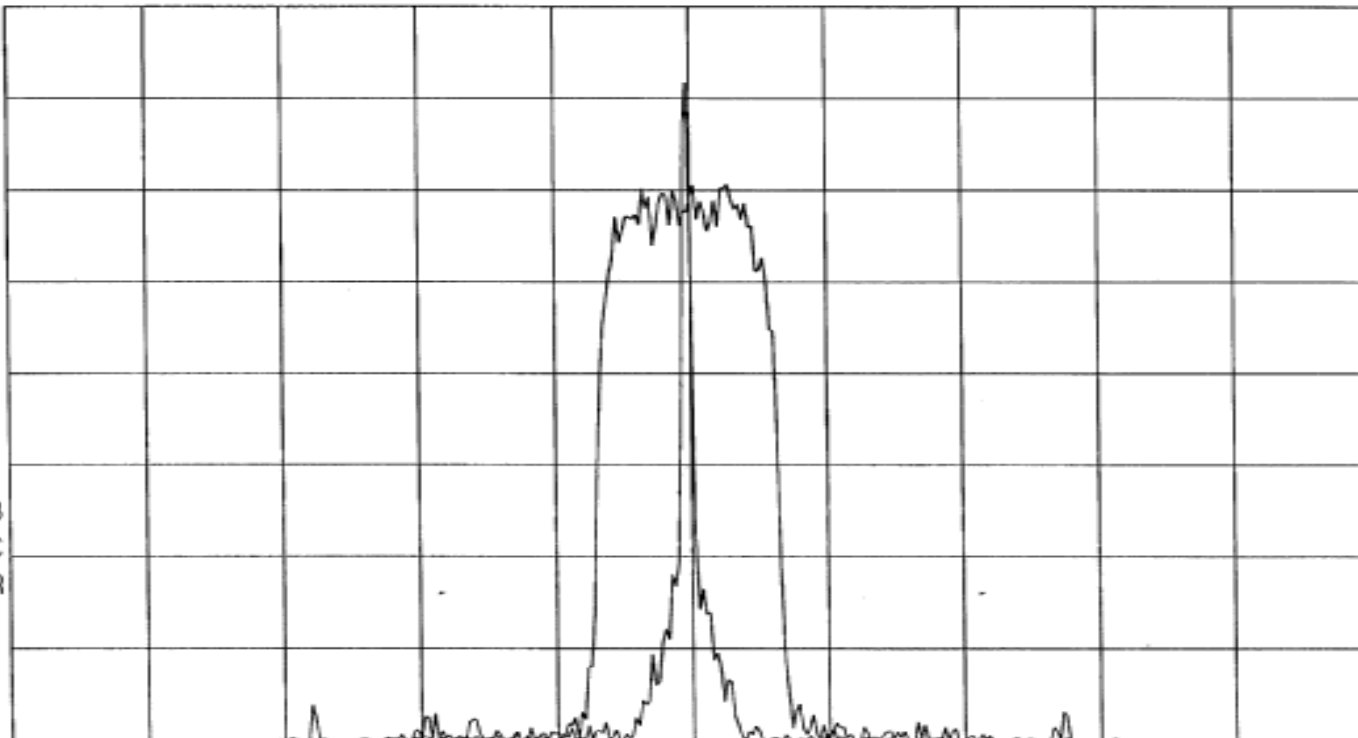

CENTER 869.0300 MHz

#RES BW 300 Hz

#VBW 1 kHz

SPAN 250.0 kHz

SWP 8.33 sec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA61080-C/P	Serial No:	CC060014
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	TDMA - Downlink (low) - Input at 869.03 MHz		

11: 32: 11 AUG 16, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA SB
SC FC
CORR

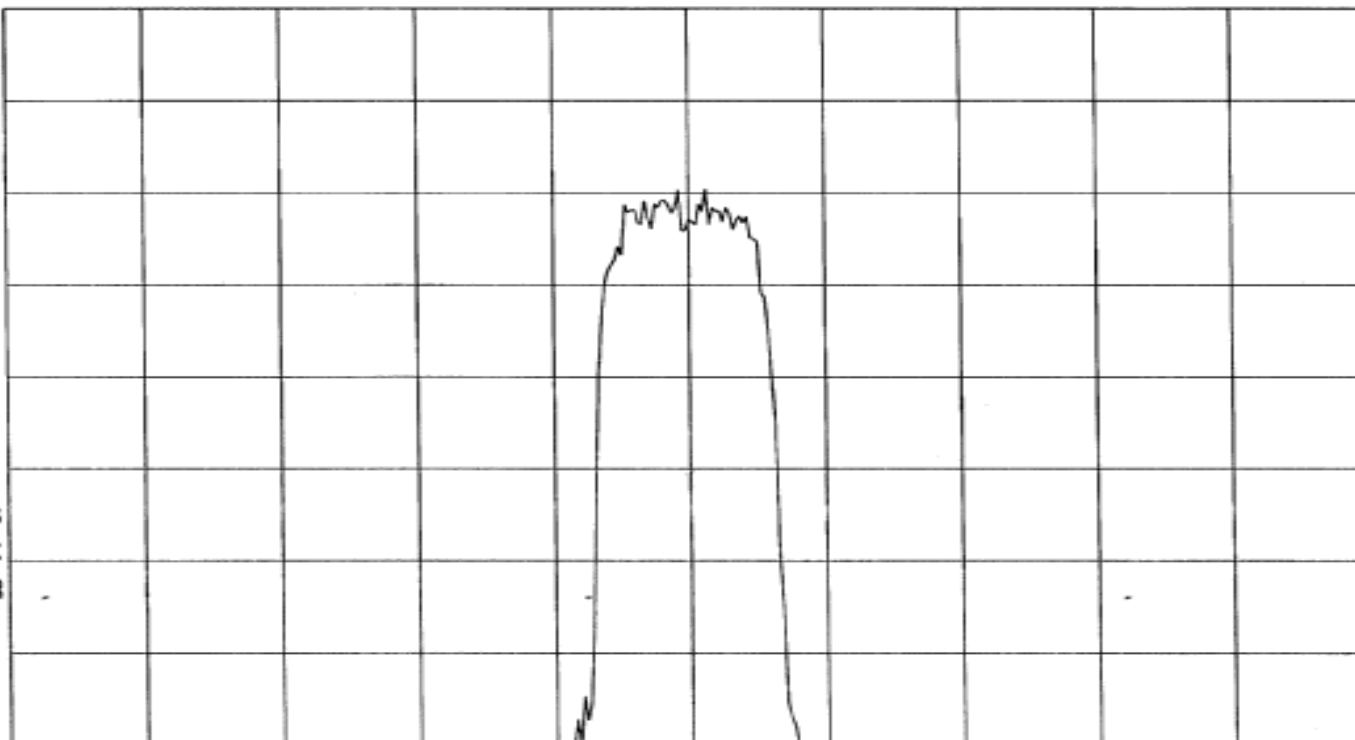

CENTER 869.0300 MHz

#RES BW 300 Hz

#VBW 1 kHz

SPAN 250.0 kHz

SWP 8.33 sec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA61080-C/P	Serial No:	CC060014
Test Specification:	FCC Part 2	Paragraph: 2.1049	Date: 8/16/2006
Operating Mode:	Amplifying input signal		
Notes:	TDMA - Downlink (High) - Output at 893.97 MHz		

11: 17: 27 AUG 16, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA VB
SC FC
CORR

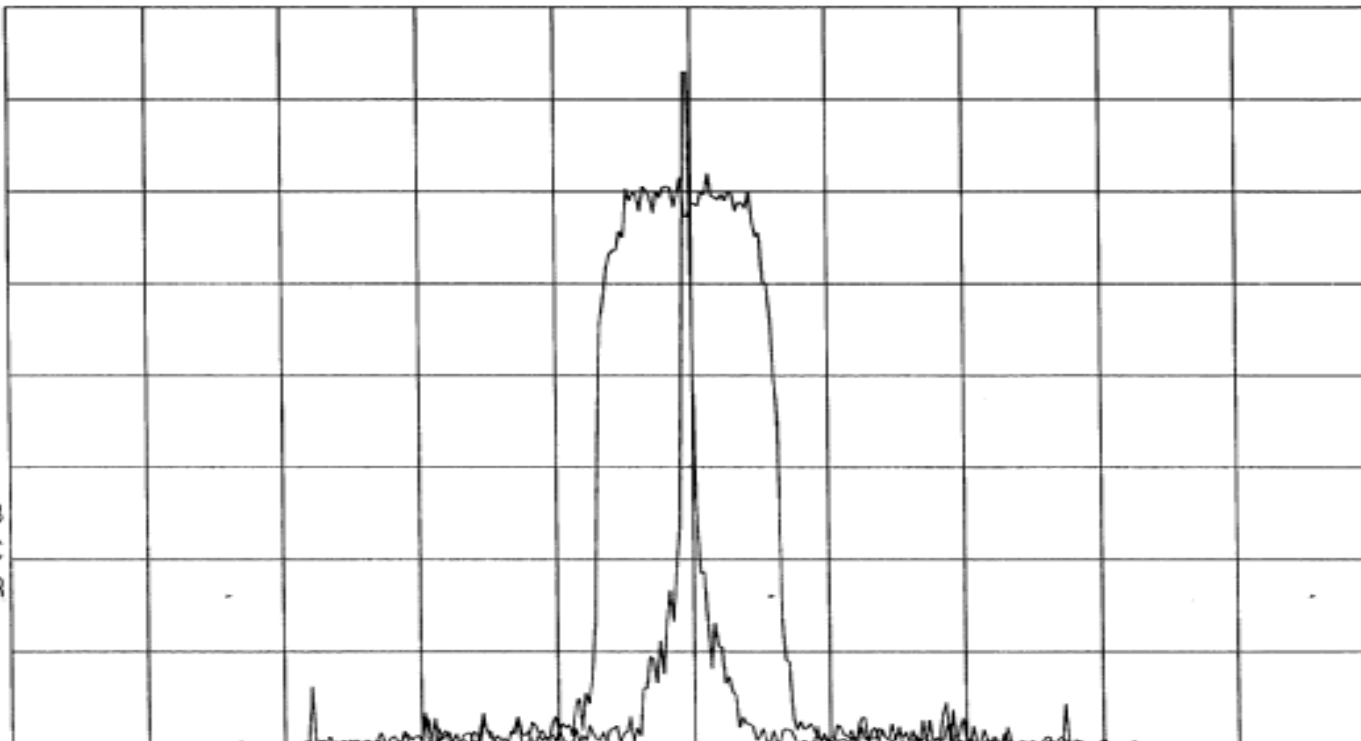

CENTER 893.9700 MHz

#RES BW 300 Hz

#VBW 1 kHz

SPAN 250.0 kHz

SWP 8.33 sec

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA61080-C/P	Serial No:	CC060014
Test Specification:	FCC Part 2	Paragraph: 2.1049	Date: 8/16/2006
Operating Mode:	Amplifying input signal		
Notes:	TDMA - Downlink (High) - Input at 893.97 MHz		

11: 31: 11 AUG 16, 2006

REF 30.0 dBm AT 10 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

VA SB
SC FC
CORR

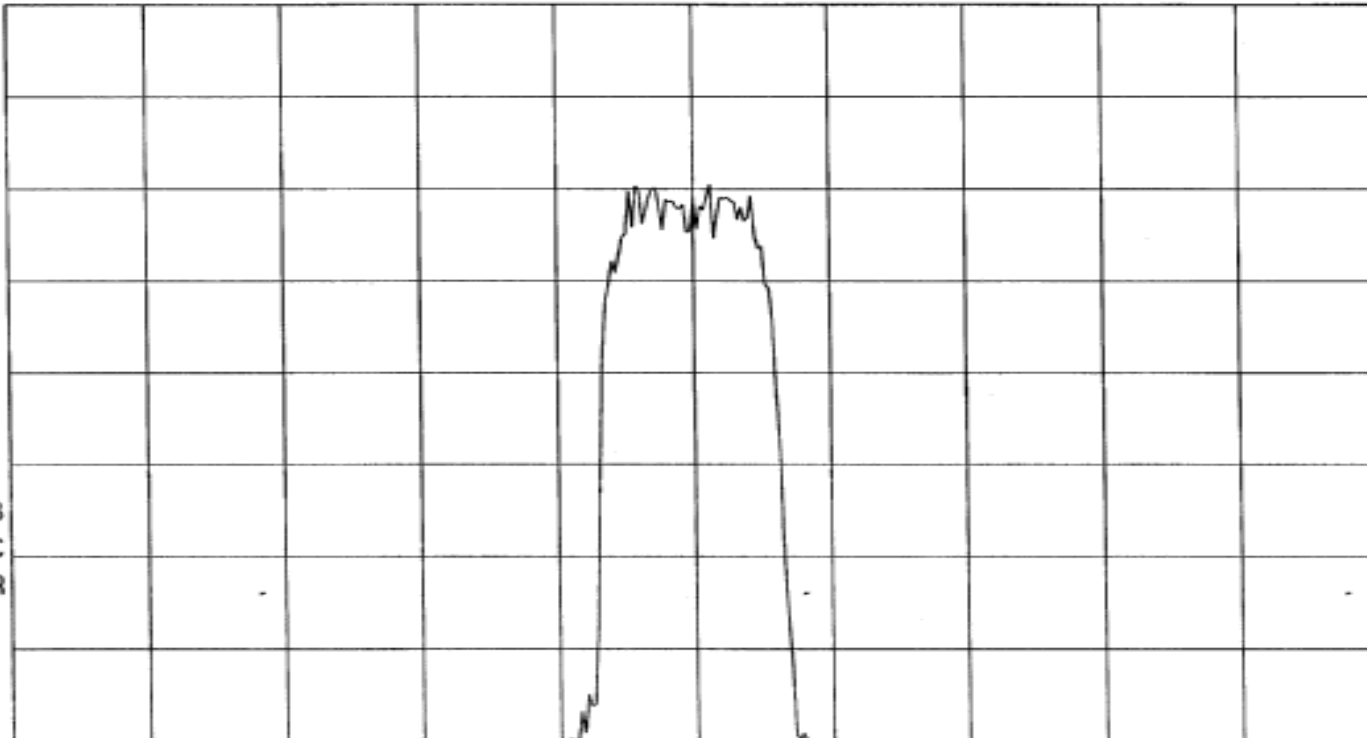

CENTER 893.9700 MHz

#RES BW 300 Hz

#VBW 1 kHz

SPAN 250.0 kHz

SWP 8.33 sec