

TEST REPORT

of

FCC CFR 47 part1, 1.1307(b), 1.1310

FCC ID: NYOMBECNWPC2503

Equipment Under Test : Wireless Charging System
Model Name : MBECNWPC2503
Variant Model Name(s) : -
Applicant : MOBASE ELECTRONICS CO., LTD.
Manufacturer : MOBASE ELECTRONICS CO., LTD.
Date of Receipt : 2024.12.12
Date of Test(s) : 2024.12.12 ~ 2025.02.24
Date of Issue : 2025.02.28

In the configuration tested, the EUT complied with the standards specified above. This test report does not assure KOLAS accreditation.

- 1) The results of this test report are effective only to the items tested.
- 2) The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received.
- 3) This test report cannot be reproduced, except in full, without prior written permission of the Company.
- 4) The data marked ※ in this report was provided by the customer and may affect the validity of the test results.

We are responsible for all the information of this test report except for the data(※) provided by the customer.

Tested by:



Ethan Lim

Technical Manager:



Jinhyoung Cho

SGS Korea Co., Ltd. Gunpo Laboratory



SGS Korea Co., Ltd.

4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

<http://www.sgsgroup.kr>

Report Number: F690501-RF-RTL005804

Page: 2 of 15

INDEX

Table of Contents

1. General Information -----	3
2. Electronic Field and Magnetic Field-----	6

1. General Information

1.1. Testing Laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- 10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- Designation number: KR0150

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Phone No. : +82 31 688 0901

Fax No. : +82 31 688 0921

1.2. Details of Applicant

Applicant : MOBASE ELECTRONICS CO., LTD.

Address : 100, Saneop-ro 156beon-gil, Gwonseon-gu, Suwon-si, Gyeonggi-do,
South Korea, 16648

Contact Person : Ryu, Hee-tack

Phone No. : +82 31 8090 2612

1.3. Details of Manufacturer

Company : Same as applicant

Address : Same as applicant

1.4. Description of EUT

Kind of Product	Wireless Charging System	
Model Name	MBECNWPC2503	
Serial Number	001	
Power Supply	DC 12 V	
Operation Mode	5 W, 7.5 W, 15 W	
Frequency Range	5 W	114 ~ 116 kHz
	7.5 W	119 ~ 121 kHz
	15 W	114 ~ 116 kHz
	Idle	114 ~ 116 kHz
Antenna Type	Coil Antenna	
Antenna Part Number	N/A	
H/W Version	1.0	
S/W Version	1.0	

1.5. Test Equipment List

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Interval	Cal. Due
Electric and Magnetic field Probe analyzer	NARDA	EHP 200AC	170WX91017	Apr. 03, 2024	Annual	Apr. 03, 2025
DC Power Supply	R&S	HMP2020	022802107	Oct. 31, 2024	Annual	Oct. 31, 2025
Anechoic Chamber	SY Corporation	L × W × H (9.6 m × 6.4 m × 6.6 m)	N/A	N.C.R.	N/A	N.C.R.

► Support Equipment

Description	Manufacturer	Model	FCC ID
SAMSUNG Mobile Phone	Samsung Electronics Co., Ltd.	SM-N981U	A3LSMN981U
Apple Mobile Phone	Apple Inc.	A1897	BCG-E3174A
Lap top	Dell	Latitude 3510	-

1.6. Summary of Test Results

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 1 Subpart I		
Section	Test Item(s)	Result
1.1307(b) 1.1310(e)(1)	Electronic Field and Magnetic Field	Pass

1.7. Test Report Revision

Revision	Report Number	Date of Issue	Description
0	F690501-RF-RTL005803	2025.02.28	Initial

1.8. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Electric Field	19.44 %
Magnetic Field	19.86 %

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence.

1.9. Worst Case of Test Configurations

In order to check all kinds of possible configurations, EUT was evaluated with appropriate client and under each charging condition as below table.

Charging mode With client device		Mode		Description
Model	FCC ID			
SM-N981U	A3LSMN981U	5 W, 15 W	114 ~ 116 kHz	1 % of battery 50 % of battery 99 % of battery
A1897	BCG-E3174A	7.5 W	119 ~ 121 kHz	

Mode	Battery	Frequency (kHz)	E-field Strength (V/m)	H-field Strength (A/m)
5 W	1 %	114 ~ 116	<u>59.545</u>	<u>1.525</u>
	50 %		56.959	1.497
	99 %		56.411	1.476
7.5 W	1 %	119 ~ 121	<u>54.249</u>	<u>1.556</u>
	50 %		53.844	1.540
	99 %		53.584	1.537
15 W	1 %	114 ~ 116	<u>57.367</u>	<u>1.546</u>
	50 %		54.552	1.533
	99 %		54.000	1.516


Note;

- EUT was investigated with client device under normal charging condition as above then worst value was only reported.

2. Electronic Field and Magnetic Field

2.1. Isotropic Probe Test Setup

The measurement probe (EHP-200AC) is a regular hexahedron and supports 3-axis isotropic probe.



A: Front of measurement probe
 B: Right of measurement probe
 C: Rear of measurement probe
 D: Left of measurement probe
 E: Top of measurement probe

*Bottom of measurement probe is not used to measure RF exposure condition owing to connection with a stick.

- measurement isotropic probe was investigated by rotating the probe through various angles for one of the EUT's sides as below.


Measurement Point	A	B	C	D	E
Direction	Front	Right	Rear	Left	Top
Measurement Point	A to B	B to C	C to D	D to A	N/A
Direction	Front to Right	Right to Rear	Rear to Left	Left to Front	-
Measurement Point	A to E	B to E	C to E	D to E	N/A
Direction	Front to Top	Right to Top	Rear to Top	Left to Top	-

- When the worst angle among all angles was found, RF exposure measurement should be adjusted from worst angle.

- Worst Case

Mode	Condition	Isotropic Probe position
5W	E-Field	Side D
	H-Field	Side E
7.5W	E-Field	Side D
	H-Field	Side A
15W	E-Field	Side D
	H-Field	Side E

2.2. EUT Test Setup

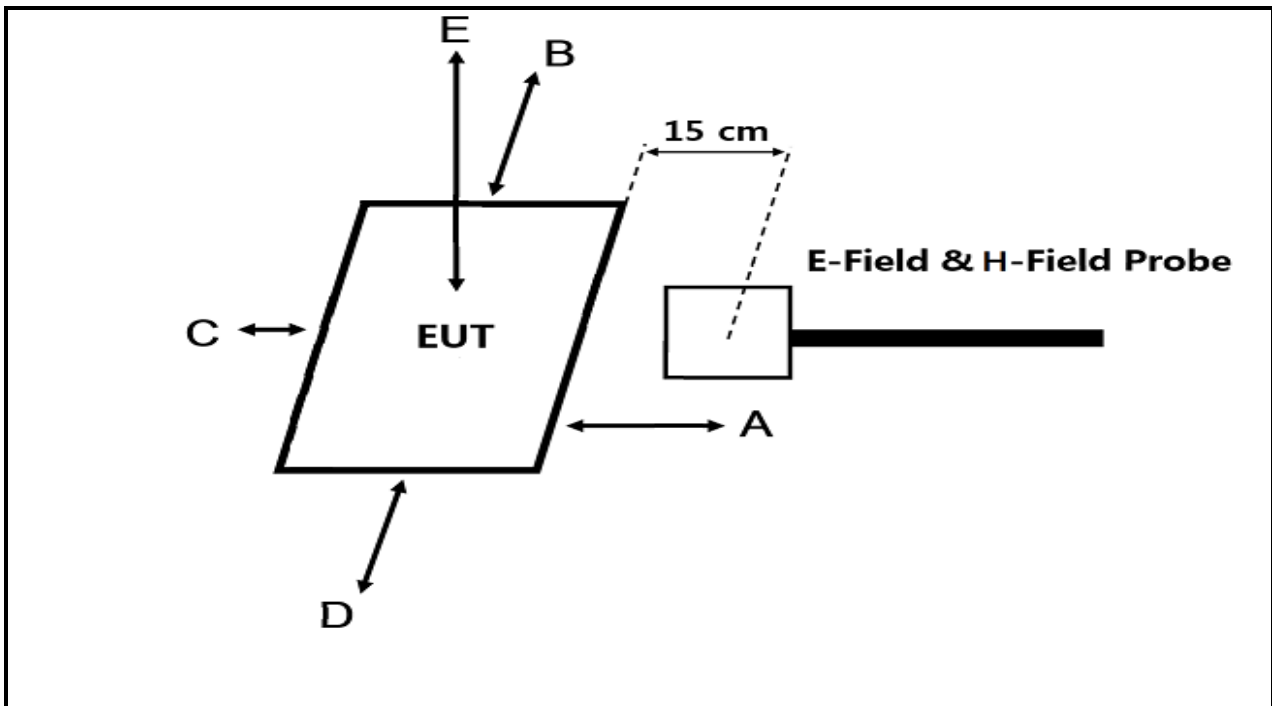

2.3. Measurement procedure

- The RF exposure test was performed in anechoic chamber.
- The measurement probe was placed at test distance (4, 6, 8, 10, 15 cm) which is between the edge of the charger and the geometric center of probe.
- Measurement was performed on each side of the EUT as described above picture (A, B, C, D, E).
- The EUT was measured according to the dictates of KDB 680106 D01 RF Exposure Wireless Charging Apps v03.

Note;

- Because of measurement probe antenna size, minimum distance between charger and probe is 4 cm for E-Field and H-Field.
- Probe has 4 cm radius enclosure but each sensing element is located 8 mm from the other edge. Therefore, actual distance in measurement at 4 cm is 0.8 cm.
- The EUT installed to the vehicle was charged from the top, so it was measured from 5 sides except the bottom.
- According to the manufacturer's declaration, the minimum separation distance between the EUT(A, B, C and D sides) and the probe excluding the E side of the EUT was 5 mm, and thus the evaluation was carried out at 13 mm.

2.4. Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(b), 1.1310.

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

Table 1 to § 1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (minutes)
(i) Limits for Occupational /Control Exposures				
0.3-3.0	614	1.63	*(100)	≤ 6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1 500	-	-	f/300	<6
1 500-100 000	-	-	5	<6
(ii) Limits for General Population/Uncontrolled Exposures				
<u>0.3-1.34</u>	<u>614</u>	<u>1.63</u>	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1 500	-	-	f/1 500	<30
1 500-100 000	-	-	1.0	<30

f = frequency in MHz. * = Plane wave equivalent power density.

2.5. E and H field strength

Ambient temperature : (23 ± 1) °C
Relative humidity : 47 % R.H.

2.5.1. E-Field Strength at from the edges surrounding the EUT

Test Condition: 5 W Operating mode with client device

Frequency (kHz)	Distance (cm)	EUT Sides					Limits (V/m)
		A (V/m)	B (V/m)	C (V/m)	D (V/m)	E (V/m)	
114 ~ 116	15	1.925	2.668	2.661	2.626	9.351	614
	10	4.414	5.768	6.671	5.831	16.605	
	8	6.597	8.088	10.317	9.244	25.454	
	6	10.795	15.013	17.258	15.684	41.215	
	5 mm, 4.5	13.886	27.578	23.832	31.279	-	
	Contact	-	-	-	-	<u>59.545</u>	

Test Condition: 7.5 W Operating mode with client device

Frequency (kHz)	Distance (cm)	EUT Sides					Limits (V/m)
		A (V/m)	B (V/m)	C (V/m)	D (V/m)	E (V/m)	
119 ~ 121	15	2.198	2.510	2.841	2.372	8.516	614
	10	5.238	6.300	6.674	5.143	18.588	
	8	7.746	9.986	9.928	7.764	26.516	
	6	12.790	17.620	17.799	12.933	41.744	
	5 mm, 4.5	15.261	33.320	22.854	22.489	-	
	Contact	-	-	-	-	<u>54.249</u>	

Test Condition: 15 W Operating mode with client device

Frequency (kHz)	Distance (cm)	EUT Sides					Limits (V/m)
		A (V/m)	B (V/m)	C (V/m)	D (V/m)	E (V/m)	
114 ~ 116	15	2.567	2.606	2.989	2.516	8.556	614
	10	5.607	5.754	6.800	5.750	16.554	
	8	7.943	8.672	10.092	8.992	23.446	
	6	13.709	14.598	16.703	15.714	31.998	
	5 mm, 4.5	16.863	24.807	21.146	27.971	-	
	Contact	-	-	-	-	<u>57.367</u>	

Test Condition: Idle

Frequency (kHz)	Distance (cm)	EUT Sides					Limits (V/m)
		A (V/m)	B (V/m)	C (V/m)	D (V/m)	E (V/m)	
114 ~ 116	15	0.080	0.202	0.232	1.106	0.581	614
	10	0.241	0.446	0.513	2.413	1.423	
	8	0.388	0.924	1.027	3.828	4.308	
	6	0.911	1.520	2.815	4.684	12.394	
	5 mm, 4.5	1.854	3.394	9.144	9.774	-	
	Contact	-	-	-	-	<u>26.544</u>	

2.5.2. H-Field Strength at from the edges surrounding the EUT

Test Condition: 5 W Operating mode with client device

Frequency (kHz)	Distance (cm)	EUT Sides					Limits (A/m)
		A (A/m)	B (A/m)	C (A/m)	D (A/m)	E (A/m)	
114 ~ 116	15	0.161	0.191	0.166	0.191	0.240	1.63
	10	0.301	0.420	0.267	0.294	0.268	
	8	0.339	0.679	0.322	0.508	0.406	
	6	0.598	1.226	0.565	0.905	0.562	
	5 mm, 4.5	0.774	1.237	0.633	<u>1.525</u>	-	
	Contact	-	-	-	-	0.872	

Test Condition: 7.5 W Operating mode with client device

Frequency (kHz)	Distance (cm)	EUT Sides					Limits (A/m)
		A (A/m)	B (A/m)	C (A/m)	D (A/m)	E (A/m)	
119 ~ 121	15	0.157	0.157	0.147	0.160	0.160	1.63
	10	0.166	0.278	0.289	0.195	0.205	
	8	0.295	0.408	0.545	0.377	0.304	
	6	0.486	0.818	0.916	0.761	0.490	
	5 mm, 4.5	0.721	<u>1.556</u>	1.422	1.273	-	
	Contact	-	-	-	-	0.836	

Test Condition: 15 W Operating mode with client device

Frequency (kHz)	Distance (cm)	EUT Sides					Limits (A/m)
		A (A/m)	B (A/m)	C (A/m)	D (A/m)	E (A/m)	
114 ~ 116	15	0.196	0.154	0.161	0.144	0.157	1.63
	10	0.283	0.326	0.236	0.319	0.224	
	8	0.499	0.576	0.242	0.528	0.321	
	6	0.724	1.001	0.349	0.906	0.540	
	5 mm, 4.5	0.994	<u>1.546</u>	0.370	1.500	-	
	Contact	-	-	-	-	1.040	

Test Condition: Idle

Frequency (kHz)	Distance (cm)	EUT Sides					Limits (A/m)
		A (A/m)	B (A/m)	C (A/m)	D (A/m)	E (A/m)	
114 ~ 116	15	0.130	0.121	0.115	0.178	0.202	1.63
	10	0.263	0.449	0.295	0.387	0.510	
	8	0.355	0.743	0.557	0.559	0.700	
	6	0.653	0.913	0.754	0.681	0.984	
	5 mm, 4.5	0.782	1.060	1.164	0.921	-	
	Contact	-	-	-	-	<u>1.214</u>	

2.6. H-Field Strength Calculation of the EUT

2.6.1. Calculation of μ_r (relative permeability)

According to the self-inductance formula, μ_r (relative permeability) can be obtained.

$$x = \sqrt{1 + \left(\frac{d}{2l}\right)^2}$$

$$L = 2l \left[\ln \left\{ \left(\frac{2l}{d} \right) (1 + x) \right\} - x + \frac{\mu_r}{4} + \frac{d}{2l} \right]$$

$$\mu_r = 4 \left[\frac{L}{2l} - \ln \left\{ \left(\frac{2l}{d} \right) (1 + x) \right\} + x - \frac{d}{2l} \right]$$

Where;

L: self inductance [nH], Qi specification of WIRELESS POWER CONSORTIUM

d: diameter of the wire [cm]

l: length of the wire in [cm]

μ_r : relative permeability

L [nH]	d [cm]	l [cm]	μ_r
11 500	0.115	153	120.01

2.6.2. Calculation of theoretical H-field strength with Biot-Savart's law

According to Biot-Savart law, the value of the B-field at the distance z from the coil is expressed as follows.

$$B_z = \frac{\mu_0 I R^2}{2(R^2 + z^2)^{3/2}}$$

Convert the value of the B-field to the H-field.

$$B_z = \mu_0 \times H_z,$$

$$H_z = \frac{I R^2}{2(R^2 + z^2)^{3/2}}$$

Considering the number of turns and relative permeability of coil, it is expressed as follows.

$$H_z = \frac{I R^2}{2(R^2 + z^2)^{3/2}} \times \frac{N}{\mu_r}$$

Where;

I: the maximum current to the EUT during charging can be obtained from the power supply equipment [A]

R: the radial of EUT's coil antenna [m]

z: the distance from the coil antenna to the point to be measured [m]

N: the number of turns in the coil

μ_r : relative permeability

Test Condition	I [A]	R [m]	μ_r	N	z [m]	Actual measuring distance ³⁾ [m]	Theoretical H-field value [A/m]
5 W	1	0.027	120.01	12	0.020 ¹⁾	0.008	0.961
					0.012 ²⁾	0	1.413
7.5 W	1	0.027	120.01	12	0.020 ¹⁾	0.008	0.961
					0.012 ²⁾	0	1.413
15 W	1	0.027	120.01	12	0.020 ¹⁾	0.008	0.961
					0.012 ²⁾	0	1.413

Note;


1) Distance z is from the EUT's coil antenna to the measurement point and includes all of the following.

- 4 mm, the gap from EUT's coil antenna to edge of the EUT
- 8 mm, the client phone thickness
- 8 mm, the gap from edge of measuring probe to sensing elements of measuring probe

2) Distance z is from the EUT's coil antenna to the measurement point and includes all of the following.

- 4 mm, the gap from EUT's coil antenna to edge of the EUT
- 8 mm, the client phone thickness

3) In the actual measurement, it means the distance between the EUT and the sensing elements of the probe.

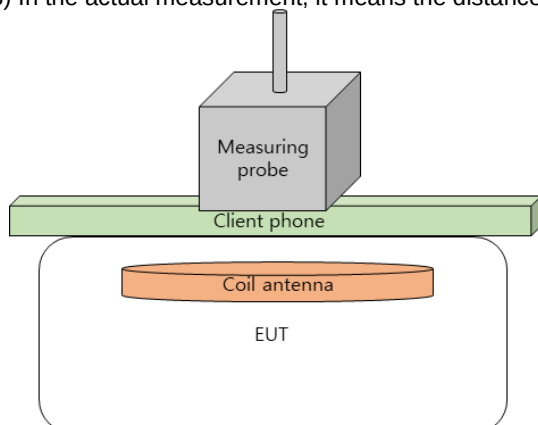

8 mm, the gap from edge of measuring probe to sensing material
8 mm, the client phone thickness
4 mm, the gap from EUT's coil antenna to edge of the EUT

2.6.3. The validation of H-field strength

Frequency (kHz)	Test Condition	Distance (cm)	Theoretical H-field value [A/m]	30 % tolerance of theoretical H-field value [A/m]		EUT Sides E [A/m]	Limits [A/m]
				Min.	Max	Measured value	
114 ~ 116	5 W (1 % battery status of client device)	Contact ¹⁾	0.961	0.673	1.249	0.872	1.63
119 ~ 120	7.5 W (1 % battery status of client device)	Contact ¹⁾	0.961	0.673	1.249	0.836	
114 ~ 116	15 W (1 % battery status of client device)	Contact ¹⁾	0.961	0.673	1.249	1.040	

Note;

- 1) Probe has 4 cm radius enclosure but each sensing element is located 8 mm from the probe edge.
Therefore, actual distance in measurement is 8 mm.

2.6.4. The estimation of H-field strength

Frequency (kHz)	Test Condition	Distance (cm)	EUT Sides E	Limits [A/m]
			Theoretical H-field value [A/m]	
114 ~ 116	5 W (1 % battery status of client device)	0	1.413	1.63
119 ~ 121	7.5 W (1 % battery status of client device)	0	1.413	
114 ~ 116	15 W (1 % battery status of client device)	0	1.413	

Estimation formula and theoretical value have 30% agreement with actual measurement. Estimation for 0mm field strength with validated formula complies limit.

- End of the Test Report -