

**ELECTROMAGNETIC EMISSION  
COMPLIANCE REPORT  
FOR LOW-POWER, NON-LICENSED TRANSMITTER  
(CLASS II PERMISSIVE CHANGE)**

Test Report No. : E085R-007  
AGR No : A083A-153  
Applicant : Shinchang Electrics Co., Ltd.  
Address : 734-2, Wonshi-dong, Ansan-si, Gyeonggi-do, 425-090, Korea  
Manufacturer : Shinchang Electrics Co., Ltd.  
Address : 734-2, Wonshi-dong, Ansan-si, Gyeonggi-do, 425-090, Korea  
Type of Equipment : Remote Keyless Entry System  
FCC ID. : NYOSEKS-09TX  
Model Name : SEKS-KM08Tx  
Serial number : None  
Total page of Report : 14 pages (including this page)  
Date of Incoming : March 24, 2008  
Date of issue : May 07, 2008


### SUMMARY

The equipment complies with the regulation; **FCC Part 15 Subpart C Section 15.231**.

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

Prepared by:



Young-Min, Choi / Senior Engineer  
EMC Div.

Reviewed by:

  
Y. K. Kwon / Director  
EMC Div.

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003(Rev.0)

**HEAD OFFICE** : #505 SK APT. Factory 223-28, Sangdaewon 1 dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, 462-121, Korea  
(TEL: 82-31-746-8500 FAX: 82-31-746-8700)  
**EMC Testing Dept** : 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do 464-860 Korea. (TEL: 82-31-765-8289 FAX: 82-31-766-2904)

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003(Rev.0)

**HEAD OFFICE** : #505 SK APT. Factory 223-28, Sangdaewon 1 dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, 462-121, Korea  
(TEL: 82-31-746-8500 FAX: 82-31-746-8700)

**EMC Testing Dept** : 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do 464-860 Korea. (TEL: 82-31-765-8289 FAX: 82-31-766-2904)

## CONTENTS

	PAGE
<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>4</b>
<b>2. GENERAL INFORMATION .....</b>	<b>5</b>
<b>2.1 PRODUCT DESCRIPTION.....</b>	<b>5</b>
<b>2.2 MODEL DIFFERENCES.....</b>	<b>5</b>
<b>2.3 RELATED SUBMITTAL(S) / GRANT(S) .....</b>	<b>5</b>
<b>2.4 PURPOSE OF THE TEST .....</b>	<b>5</b>
<b>2.5 TEST METHODOLOGY .....</b>	<b>6</b>
<b>2.6 TEST FACILITY .....</b>	<b>6</b>
<b>3. SYSTEM TEST CONFIGURATION.....</b>	<b>7</b>
<b>3.1 JUSTIFICATION.....</b>	<b>7</b>
<b>3.2 PERIPHERAL EQUIPMENT.....</b>	<b>7</b>
<b>3.3 MODE OF OPERATION DURING THE TEST.....</b>	<b>7</b>
<b>3.4. EUT MODIFICATIONS.....</b>	<b>7</b>
<b>3.5 CONFIGURATION OF TEST SYSTEM .....</b>	<b>7</b>
<b>3.6 ANTENNA REQUIREMENT.....</b>	<b>8</b>
<b>4. PRELIMINARY TEST .....</b>	<b>8</b>
<b>4.1 AC POWER LINE CONDUCTED EMISSIONS TESTS .....</b>	<b>8</b>
<b>4.2 GENERAL RADIATED EMISSIONS TESTS .....</b>	<b>8</b>
<b>5. FINAL RESULT OF MEASURMENT.....</b>	<b>9</b>
<b>5.1 FIELD STRENGTH OF THE CARRIER TEST .....</b>	<b>9</b>
<b>5.2 TRANSMITTER TRANSMISSION DURATION .....</b>	<b>10</b>
<b>5.3 SPURIOUS EMISSION TEST .....</b>	<b>11</b>
<b>5.4 BANDWIDTH OF THE OPERATING FREQUENCY .....</b>	<b>12</b>
<b>6. FIELD STRENGTH CALCULATION.....</b>	<b>14</b>
<b>7. LIST OF TEST EQUIPMENT .....</b>	<b>15</b>

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003(Rev.0)

**HEAD OFFICE** : #505 SK APT. Factory 223-28, Sangdaewon 1 dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, 462-121, Korea  
(TEL: 82-31-746-8500 FAX: 82-31-746-8700)  
**EMC Testing Dept** : 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do 464-860 Korea. (TEL: 82-31-765-8289 FAX: 82-31-766-2904)

**1. VERIFICATION OF COMPLIANCE**

APPLICANT : Shinchang Electrics Co., Ltd.  
 ADDRESS : 734-2, Wonshi-dong, Ansan-si, Gyungki-do, 425-090, Korea  
 CONTACT PERSON : Mr. Jong Beom, Park / Quality Control Manager  
 TELEPHONE NO : +82-41-901-0472  
 FCC ID : NYOSEKS-09TX  
 MODEL NAME : SEKS-KM08Tx  
 BRAND NAME : KIA  
 SERIAL NUMBER : N/A  
 DATE : May 07, 2008

EQUIPMENT CLASS	<b>DSC - Part 15, Security/Remote Control Transmitter</b>
KIND OF EQUIPMENT	Remote Keyless Entry System
THIS REPORT CONCERNS	CLASS II PERMISSIVE CHANGE
MEASUREMENT PROCEDURES	ANSI C63.4: 2003
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.231
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER(S) OPEN AREA TEST SITE

- The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003(Rev.0)

**HEAD OFFICE** : #505 SK APT. Factory 223-28, Sangdaewon 1 dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, 462-121, Korea  
 (TEL: 82-31-746-8500 FAX: 82-31-746-8700)

**EMC Testing Dept** : 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do 464-860 Korea. (TEL: 82-31-765-8289 FAX: 82-31-766-2904)

## 2. GENERAL INFORMATION

### 2.1 Product Description

The Shinchang Electrics Co., Ltd., Model: SEKS-KM08Tx (referred to as the EUT in this report) is a Remote Keyless Entry System that it controls locking and unlocking the door of a vehicle by wireless remote controller. The associated receiver is manufactured by Shinchang Electrics Co., Ltd, Model No: SEKS-SM09Rx., FCC ID: NYOSEKS-09RX.

Product specification information described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Plastic
TX FREQUENCY	315.00 MHz
MODULATION	FM
LIST OF EACH OSC. OR CRY. FREQ.(FREQ.>=1MHz)	52.5 MHz
ANTENNA TYPE	Built-in on the PCB in the EUT
CODE	Rolling Code (Hopping Algorithm)
TRANSMISSION TIME	Not longer than 1 sec
RATED SUPPLY VOLTAGE	DC 12V from a battery
NUMBER OF LAYERS	2 Layers
FUNCTION OF BUTTON	Door Lock/Unlock and Panic Button

### 2.2 Model Differences

- None

### 2.3 Related Submittal(s) / Grant(s)

- CLASS II Permissive Change;

The equipment under test was certified on April 26, 2005, but only following modifications and/or changed items are implemented into the device.

Changed items on the device
“The PCB pattern was adjusted on the bottom to avoid the short between <+> terminal and GND.”

### 2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in section 15.231.

## **2.5 Test Methodology**

Radiated testing was performed according to the procedures in ANSI C63.4: 2003 at a distance of 3 meters from EUT to the antenna.

## **2.6 Test Facility**

The Electromagnetic compatibility measurement facilities are located on at 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do, 464-080, Korea. Description details of test facilities were submitted to the Federal Communications Commission on August 30, 2005 (Registration Number: 92819 and 340658), accredited by KOLAS (Korea Laboratory Accreditation Scheme, No: 85) and approved by TUV, DNV and MIC (Ministry of Information and Communications in Korea) according to the requirement of ISO17025.

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003(Rev.0)

**HEAD OFFICE** : #505 SK APT. Factory 223-28, Sangdaewon 1 dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, 462-121, Korea  
(TEL: 82-31-746-8500 FAX: 82-31-746-8700)

**EMC Testing Dept** : 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do 464-080 Korea. (TEL: 82-31-765-8289 FAX: 82-31-766-2904)

### 3. SYSTEM TEST CONFIGURATION

#### 3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	Shinchang Electric Co., Ltd.	KM-FSK-315-V2.1	N/A

#### 3.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested: None

#### 3.3 Mode of operation during the test

To get a maximum radiated emission from the EUT, the button on the EUT was continuously pressed to transmit the signal. To activate continuous transmission, place a small plastic block between rubber band and the push button on the EUT.

To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

#### 3.4. EUT MODIFICATIONS

- None

#### 3.5 Configuration of Test System

**Line Conducted Test:** It is not need to test this requirement, because the EUT shall be operated by DC battery.

**Radiated Emission Test:** Preliminary radiated emissions test were conducted using the procedure in ANSI C63.4: 2003 8.3.1.1 and 13.1.4.1 to determine the worse operating conditions. Final radiated emission tests were conducted at 3meter open area test site.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

#### Occupied Bandwidth Measurement:

This measurement is performed with the antenna located close enough to give a full-scale deflection of the modulated carrier on the spectrum analyzer. The plot is taken at 20kHz/division frequency span, 10 kHz resolution bandwidth and 5dB/division logarithmic display from the spectrum analyzer.

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003(Rev.0)

**HEAD OFFICE** : #505 SK APT. Factory 223-28, Sangdaewon 1 dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, 462-121, Korea  
(TEL: 82-31-746-8500 FAX: 82-31-746-8700)

**EMC Testing Dept** : 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do 464-860 Korea. (TEL: 82-31-765-8289 FAX: 82-31-766-2904)

### 3.6 Antenna Requirement

According to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

#### Antenna Construction:

The transmitter antenna of the EUT is a pattern antenna on the main board in the EUT, so no consideration of replacement by the user.

## 4. PRELIMINARY TEST

### 4.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
It is not need to test this requirement, because the power of the EUT is supplied from a DC battery.	

### 4.2 General Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
TX Mode	X

## 5. FINAL RESULT OF MEASURMENT

### 5.1 Field Strength of the Carrier Test

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Humidity Level	: <u>35 %</u>	Temperature: <u>19 °C</u>
Limits apply to	: <u>FCC CFR 47, PART 15, SUBPART C, SECTION 15.231(b)</u>	
Type of Test	: <u>INTENTIONAL RADIATOR</u>	
Result	: <u>PASSED BY -19.45 dB under Average mode</u>	

EUT	: Remote Keyless Entry System	Date: April 15, 2008
Operating Condition	: TX mode	
Distance	: 3 Meter	

Radiated Emissions			Ant	Correction Factors			Total	FCC	
Carrier Freq. (MHz)	Amplitude (dBuV)	Detector Mode	Pol.	Antenna (dB/m)	Cable (dB)	Average Level Factor	Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
315.00	40.20	Peak	H	13.98	3.39	-	57.57	95.62	-38.05
	30.30	Peak	V			-	47.67	95.62	-47.95
315.00	38.80	AVE	H	13.98	3.39	-	56.17	75.62	-19.45
	28.50	AVE	V			-	45.87	75.62	-29.75

\* Remark: To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

“Q.P.”: Quasi-Peak, “AVE”: Average, “H”: Horizontal Polarization, “V”: Vertical Polarization



Tested by: In-Sub, Youn / Test Engineer

**5.2 Transmitter Transmission Duration**

Humidity Level : 35 % Temperature: 19 °C  
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.231 (a)  
 Type of Test : INTENTIONAL RADIATOR

EUT : Remote Keyless Entry System Date: April 15, 2008  
 Operating Condition : Switch on the EUT was continuously pushed

Manually Activated Duration (Sec)	Limit (sec)	Margin (Sec)	Result
3.333	5.0	1.67	Pass

Tested by: In-Sub, Youn / Test Engineer

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003(Rev.0)

**HEAD OFFICE** : #505 SK APT. Factory 223-28, Sangdaewon 1 dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, 462-121, Korea  
 (TEL: 82-31-746-8500 FAX: 82-31-746-8700)

**EMC Testing Dept** : 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do 464-860 Korea. (TEL: 82-31-765-8289 FAX: 82-31-766-2904)

### 5.3 Spurious Emission Test

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Humidity Level	: <u>35 %</u>	Temperature: <u>19 °C</u>
Limits apply to	: <u>FCC CFR 47, PART 15, SUBPART C, SECTION 15.231(b)</u>	
Type of Test	: <u>INTENTIONAL RADIATOR</u>	
Result	: <u>PASSED BY -7.26dB at 1153.50 MHz</u>	


EUT	: Remote Keyless Entry System	Date: April 15, 2008
Operating Condition	: TX mode	
Distance	: 3 Meter	

Radiated Emissions			Ant	Correction Factors		Total	FCC	
Freq. (MHz)	Amplitude (dBuV)	Detect Mode	Pol.	Antenna (dB/m)	Cable (dB)	Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
262.50	25.40	Peak	H	11.96	3.05	40.41	55.62	-15.21
367.50	11.60	Peak	H	14.07	3.78	29.45	55.62	-26.17
420.00	11.20	Peak	H	15.09	4.22	30.51	55.62	-25.11
525.00	7.10	Peak	H	17.08	4.85	29.03	55.62	-26.59
630.00	8.20	Peak	H	18.77	5.26	32.23	55.62	-23.39
1100.50	10.40	Peak	H	27.54	8.22	46.16	55.62	-9.46
1153.50	11.10	Peak	H	28.61	8.65	48.36	55.62	-7.26
Other spurious frequencies were not found up to 4000 MHz.								

\*Remark: To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

The EUT has enough margin with peak mode, so average mode was not performed.

“Q.P.” : Quasi-Peak, “AVE”: Average, “H”: Horizontal Polarization, “V”: Vertical Polarization



Tested by: In-Sub, Youn / Test Engineer

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003(Rev.0)

**HEAD OFFICE** : #505 SK APT. Factory 223-28, Sangdaewon 1 dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, 462-121, Korea  
(TEL: 82-31-746-8500 FAX: 82-31-746-8700)

**EMC Testing Dept** : 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do 464-860 Korea. (TEL: 82-31-765-8289 FAX: 82-31-766-2904)

**5.4 Bandwidth of the operating frequency**

Humidity Level : 35 % Temperature: 19 °C  
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.231 (c)  
 Type of Test : INTENTIONAL RADIATOR  
 Result : PASSED

---

EUT : Remote Keyless Entry System Date: April 15, 2008  
 Operating Condition : TX mode  
 Minimum Resolution Bandwidth : 10 kHz

Carrier Freq. (MHz)	Bandwidth of the emission. (kHz)	Limit (kHz)	Remark
315.00	60.0	787.5	<u>The point 20dB down from the modulated carrier</u>

Remark: Please refer to Photo Data for bandwidth for test data.




---


Tested by: In-Sub, Youn / Test Engineer

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003(Rev.0)

**HEAD OFFICE** : #505 SK APT. Factory 223-28, Sangdaewon 1 dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, 462-121, Korea  
 (TEL: 82-31-746-8500 FAX: 82-31-746-8700)  
**EMC Testing Dept** : 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do 464-860 Korea. (TEL: 82-31-765-8289 FAX: 82-31-766-2904)

## Plotted Data for bandwidth

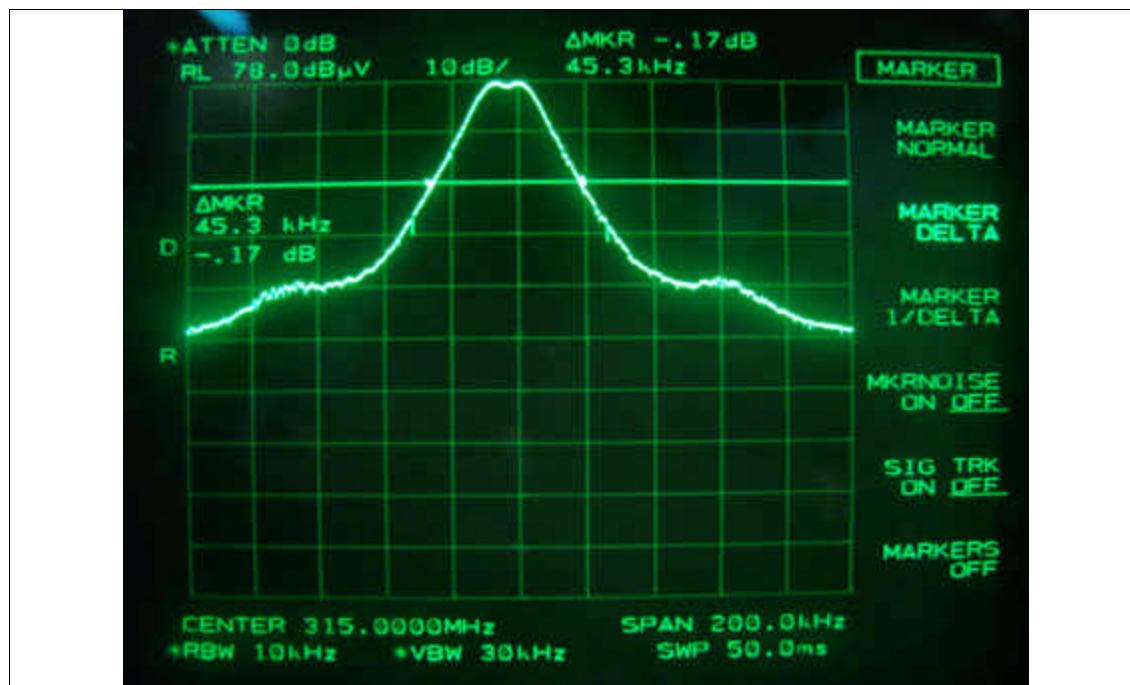

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003(Rev.0)

**HEAD OFFICE** : #505 SK APT. Factory 223-28, Sangdaewon 1 dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, 462-121, Korea  
(TEL: 82-31-746-8500 FAX: 82-31-746-8700)

**EMC Testing Dept** : 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do 464-860 Korea. (TEL: 82-31-765-8289 FAX: 82-31-766-2904)

## 6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)  
+ Cable Loss (dB)  
+ Antenna Factor (Loss) (dB/meter)

---

= Corrected Reading (dBuV/meter)  
- Specification Limit (dBuV/meter)  
= dB Relative to Spec (+/- dB)

## 7. LIST OF TEST EQUIPMENT

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE	
1.	Test receiver	R/S	ESVS10	827864/005	DEC/07	12MONTH	■	
2.	Test receiver	R/S	ESHS 10	834467/007	MAY/07	12MONTH		
3.	Spectrum analyzer	HP	8566B	2516A01677	JUN/07	12MONTH	■	
4.	TRILOG Broadband Antenna	Schwarzbeck	VULB9163	VULB9163 202	APR/08	24MONTH		
5.	Biconical antenna		EMCO	3110	9003-1121	12MONTH		
			Schwarzbeck	VHA9103	91031852		■	
6.	Log Periodic antenna	Schwarzbeck	9108-A(494)	62281001	FEB/08	12MONTH	■	
7.	LISN	EMCO	3825/2	9109-1867	JUN/07	12MONTH		
				9109-1869	JUN/07			
		Schwarzbeck	NSLK 8128	8128-216	JUL/07			
8.	Position Controller	HD GmbH	HD100	N/A	N/A	N/A	■	
9.	Turn Table	HD GmbH	DS420S	N/A	N/A	N/A	■	
10.	Antenna Master	HD GmbH	MA240	N/A	N/A	N/A	■	
11.	RF Amplifier	HP	8447D	2727A04987	JUN/07	12MONTH	■	
12.	Horn Antenna	Schwarzbeck	BBHA9120D	BBHA9120D294	JUL/06	24MONTH	■	
13.	Spectrum Analyzer	HP	8564E	3650A00756	JUN/07	12MONTH	■	
14.	Isolation Transformer	Digitek Power	DPT	DPF-22027	N/A	N/A	■	
15.	Isolation Transformer	Digitek Power	DPT	DPF-22028	N/A	N/A	■	
16.	Frequency Converter	Digitek Power	VFS/DEFC	N/A	N/A	N/A	■	

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003(Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, 462-121, Korea  
(TEL: 82-31-746-8500 FAX: 82-31-746-8700)

EMC Testing Dept : 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do 464-860 Korea. (TEL: 82-31-765-8289 FAX: 82-31-766-2904)