

Industrial IoT Access Point

Dual-Band 2x2, 802.11ac Wave 2

AP-WIFI-1200-US



PCTEL's AP-WIFI-1200-US Industrial IoT access point is ideal for demanding industrial and outdoor applications. Housed in a compact, easy-to-deploy enclosure and offering external antenna connectors, it can be used in a wide variety of applications and environments. With a wide temperature range it is ideal for outdoor deployments with a single Power-over-Ethernet (PoE) connection for power and backhaul. Capable of a total aggregate dual-radio rate of up to 1Gbps, this level of performance provides mobile users with a wireless experience that is equivalent to a wired connection.

Bands

- 2.4 GHz: 20/40 MHz
- 5 GHz: 20/40/80 MHz

Technologies

- WiFi
- Bluetooth®

Features

- Dual-radio 2.4 and 5 GHz combined throughput up to 1 Gbps
- 4 external WiFi antenna ports
- Bluetooth® 5.0 radio with dedicated external antenna port
- Small, lightweight form factor for ease of installation
- Install your own software or firmware

AP-WIFI-1200-US Industrial IoT Access Point

Feature	Benefit
Small Size and Weight	Can be easily mounted to walls or light poles where aesthetics is a concern.
802.11ac Wave 2 Radio	The 5 GHz radio can operate at high data rates up to 867 Mbps data rates, taking advantage of multi-user MIMO with up to 2 spatial streams.
Bluetooth® 5.0	On-board Bluetooth® radio with dedicated external antenna port.
4 External WiFi Antenna Ports	4 single-band antenna ports providing flexibility in coverage design using a full range of existing PCTEL antennas.
Accessible Console Port	Console port for configuration and debugging. Accessible behind easily removable cover. Cable available.
Simple Connection and Powering	Powered using a single Power-over-Ethernet (PoE) 1 Gbps Ethernet connection. No special connections are required. All weatherproofing cable glands are included.
Hardware That Is Software Ready	Shipped pre-loaded with U-boot, the popular open-source bootloader for embedded Linux. The radios are calibrated, and the unit is tested and ready to be programmed with user code.

Rugged Design

Designed to meet the demands of any outdoor environment, the AP-WIFI-1200-US Industrial IoT access point weighs just over 2.5 pounds (1.2 KGs) with a footprint of only 6" x 8" x 2.5". Suitable for deployments between -40°C and +55°C including full solar loading of 1200 W/m² and it's able to withstand wind gusts up to 165 mph and with an IP-67 rating, making it safe to operate in most types of weather. The low power consumption and high TX output power make it an ideal choice for all types of outdoor deployments where high-performance access points are required.

Specifications

Radios (Dual Band, Dual Concurrent)	802.11n/b/g, 2x2:2, 2.4 GHz 802.11ac Wave 2na, 2x2:2, 5 GHz
Channel Bandwidth	2.4 GHz: 20 MHz, 40 MHz 5 GHz: 20/40/80 MHz
TX Power	2.4 GHz: 26 dBm Total, 23 dBm per path 5 GHz: 24 dBm Total, 21 dBm per path
PHY Rate	2.4 GHz: 300 Mbps (40 MHz) 5 GHz: 866.7 Mbps (80 MHz)
Bluetooth®	5.1
Memory (DDR3/NAND/NOR)	1 GB/128 MB/4 MB
Cpu Clock Speed	717 MHz
Cpu Cores	Quad-Core CPU / 4x ARM Cortex A7 (IPQ4029)
Power Consumption	< 13 W
Antenna Ports	WiFi: 4 Single Band Ports, N-connectors Bluetooth®: 1 Single Band Port, N-connector
Ethernet Interface	1 GbE (PoE, 802.3at Type 1 Class 3)
Mode Button	Factory Configuration Reset User Defined Function
Console Port	USB 2.0 Type-B Mini
Size	6" x 8" x 2.5" (152 x 203 x 64 mm)
Temperature Range (Operational)	-40°C to +65°C -40°C to +55°C with Full Sun Load
Temperature Range (Storage)	-40°C to +85°C
Water/Dust Intrusion	IP67
Color	Pantone 428C
LED Status Indicator	Operation Status User Defined

AP-WIFI-1200-US Industrial IoT Access Point

Compliance (FCC, ISED, ETSI)

Safety	IEC 62368-1 UL/CSA 62368-1
Radio Approvals	FCC Part 15.247, 15.407 EN 300 328 EN 301 893 RSS-210 RSS-247
EMI and Susceptibility	FCC Part 15.107, 15.109 EN 301 489-1, 489-17 ICES-003

FCC Compliance Statement

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Canadian Compliance Statements

This device contains license-exempt transmitters/receivers that comply with Innovation, Science and Economic Development Canada's license-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:


- (1) L'appareil ne doit pas produire de brouillage;
- (2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement

This radio transmitter, 26584-WIFIAP1200, has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Le présent émetteur radio, 26584-WIFIAP1200, a été approuvé par Innovation, Sciences et Développement Économique Canada pour fonctionner avec les types d'antenne énumérés ci-dessous et ayant un gain admissible maximal. Les types d'antenne non inclus dans cette liste, et dont le gain est supérieur au gain maximal indiqué pour tout type figurant sur la liste, sont strictement interdits pour l'exploitation de l'émetteur.

PCTEL Model Number	Antenna Type	Gain at 2.4 GHz	Gain at 5 GHz
MHODB24490507NM-IP	Dual-band omni-directional antenna	5 dBi	7 dBi
BOA24006NM	2.4 GHz omni-directional antenna	6 dBi	NA

Figure 1: Block Diagram AP-WIFI-1200-US PCTEL Access Point Platform

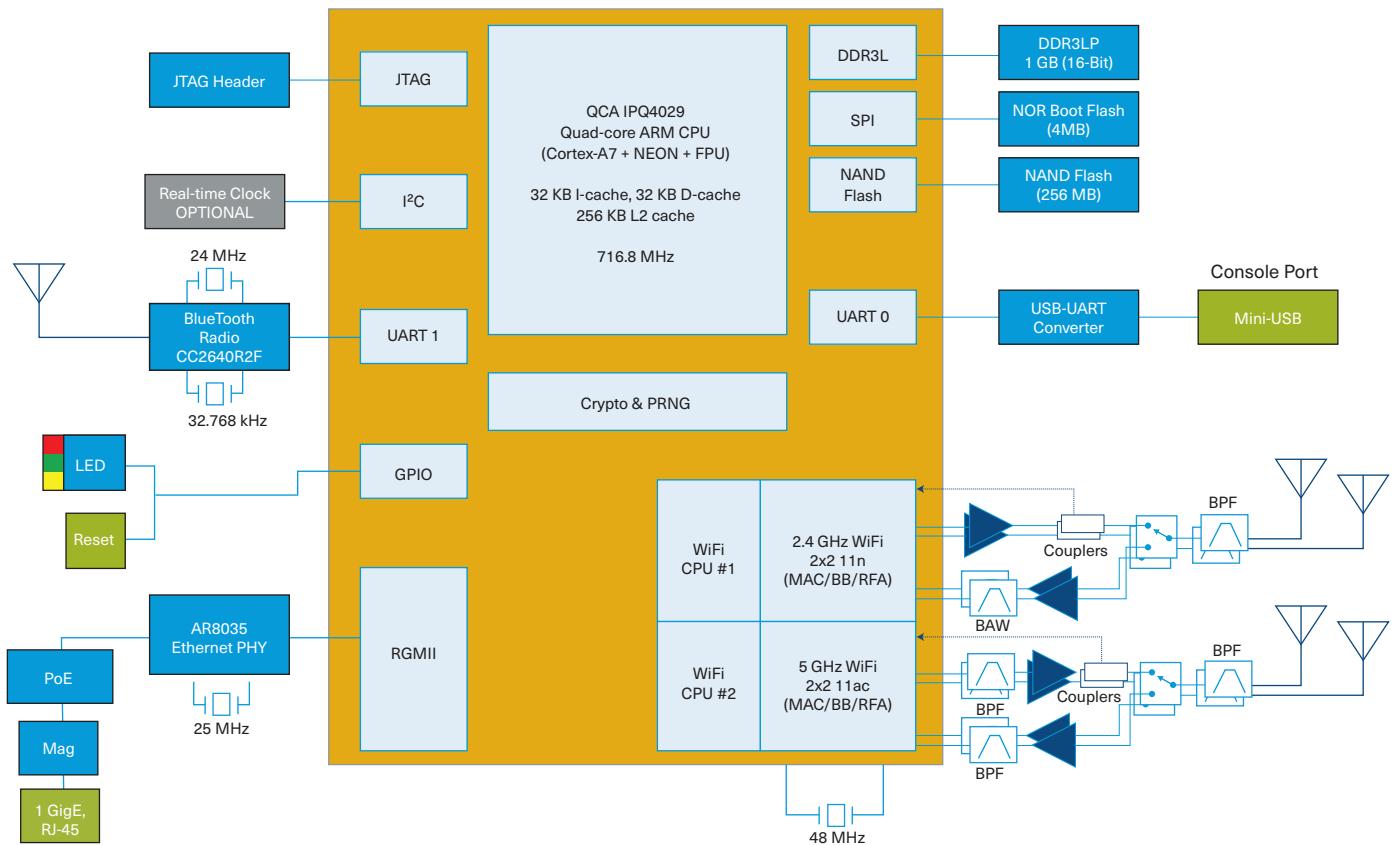

Solving Complex Wireless Challenges

PCTEL is a leading global provider of wireless technology, including purpose-built Industrial IoT devices, antenna systems, and test and measurement solutions. Trusted by our customers for over 25 years, we solve complex wireless challenges to help organizations stay connected, transform, and grow.

For more information, please visit our website at
pctel.com/industrial-iot-devices



PCTEL, Inc.

T: +1 630 372 6800 | pctel.com