

FCC PART 15C TEST REPORT FOR CERTIFICATION
On Behalf of

Meta Watch, Ltd.

Meta Watch

Model No.: SW12-2 ; SW12-1

FCC ID: O29-SW12

Prepared for : Meta Watch, Ltd.
Tekniikanie 14 02150 Espoo Finland

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F12218
Date of Test : Sep.20~Oct.14, 2012
Date of Report : Oct.24, 2012

TABLE OF CONTENTS

Description	Page
1. SUMMARY OF STANDARDS AND RESULTS.....	1-1
1.1. Description of Standards and Results	1-1
2. GENERAL INFORMATION	2-1
2.1. Description of Device (EUT)	2-1
2.2. Test Information.....	2-2
2.3. Tested Supporting System Details	2-2
2.4. Block diagram of connection between the EUT and simulators	2-2
2.5. Test Facility	2-3
2.6. Measurement Uncertainty (95% confidence levels, k=2)	2-3
3. POWER LINE CONDUCTED EMISSION TEST	3-1
3.1. Test Equipments.....	3-1
3.2. Block Diagram of Test Setup.....	3-1
3.3. Power Line Conducted Emission Test Limits.....	3-1
3.4. Configuration of EUT on Test	3-2
3.5. Operating Condition of EUT.....	3-2
3.6. Test Procedure.....	3-2
3.7. Power Line Conducted Emission Test Results	3-2
4. RADIATED EMISSION TEST	4-1
4.1. Test Equipment	4-1
4.2. Block Diagram of Test Setup.....	4-1
4.3. Radiated Emission Limit.....	4-2
4.4. EUT Configuration on Test.....	4-3
4.5. Operating Condition of EUT.....	4-3
4.6. Test Procedure.....	4-3
4.7. Radiated Emission Test Results	4-4
5. CONDUCTED SPURIOUS EMISSIONS.....	5-1
5.1. Test Equipment	5-1
5.2. Limit.....	5-1
5.3. Test Procedure.....	5-1
5.4. Test result.....	5-1
6. CARRIER FREQUENCY SEPARATION TEST	6-1
6.1. Test Equipment	6-1
6.2. Limit.....	6-1
6.3. Test Results.	6-1
7. 20 DB BANDWIDTH TEST	7-1
7.1. Test Equipment	7-1
7.2. Limit.....	7-1
7.3. Test Results	7-1
8. NUMBER OF HOPPING FREQUENCY TEST	8-1
8.1. Test Equipment	8-1
8.2. Limit.....	8-1
8.3. Test Results	8-1
9. DWELL TIME	9-1
9.1. Test Equipment	9-1
9.2. Limit.....	9-1
9.3. Test Results	9-1
10. MAXIMUM PEAK OUTPUT POWER TEST	10-1

FCC ID: Q29-SW12

10.1.	Test Equipment	10-1
10.2.	Limit.....	10-1
10.3.	Test Procedure.....	10-1
10.4.	Test Results	10-2
11.	BAND EDGE COMPLIANCE TEST	11-1
11.1.	Test Equipment	11-1
11.2.	Limit.....	11-1
11.3.	Test Produce	11-1
11.4.	Test Results	11-1
12.	DEVIATION TO TEST SPECIFICATIONS.....	12-1
13.	PHOTOGRAPH OF TEST	13-1
13.1.	Photos of Power Line Conducted Emission Test	13-1
13.2.	Photos of Radiated Emission Test.....	13-2
14.	PHOTOS OF THE EUT.....	14-1

FCC ID: O29-SW12

TEST REPORT CERTIFICATION

Applicant : Meta Watch, Ltd.
Manufacturer : Meta Watch, Ltd.
EUT Description : Meta Watch
FCC ID : O29-SW12
(A) MODEL NO. : SW12-2 ; SW12-1
(B) Test Model : SW12-2
(C) POWER SUPPLY : DC 5V
(D) TEST VOLTAGE : DC 5V from PC Input AC120V/60Hz

Tested for comply with:
FCC Rules and Regulations Part 15 Subpart C
Test procedure used:
ANSI C63.10:2009

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to confirm comply with all the FCC Part 15 Subpart C requirements.

The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC and IC requirements.

This Report is made under FCC Part 2.1075. No modifications were required during testing to bring this product into compliance.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Date of Test : Sep.20~ Oct.14, 2012 Report of date: Oct.24, 2012

Prepared by : June Shao Reviewed by : Sunny Lu
June Shao/ Assistant Manager Sunny Lu / Assistant Manager

AUDIX 信華科技(深圳)有限公司
Audix Technology (Shenzhen) Co., Ltd.

EMC 部門報告專用章

Stamp only for EMC Dept. Report

Signature: Ken Lu 10/5/12

Approved & Authorized Signer : Ken Lu
Ken Lu / Manager

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission Test	FCC Part 15: 15.207 ANSI C63.10 :2009	PASS
Radiated Emission Test	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10 :2009	PASS
Conducted Spurious Emissions	FCC Part 15: 15.247(a)(1) ANSI C63.10 :2009	PASS
Carrier Frequency Separation Test	FCC Part 15: 15.247(a)(1) ANSI C63.10 :2009	PASS
20dB Bandwidth Test	FCC Part 15: 15.215 ANSI C63.10 :2009	PASS
Number Of Hopping Frequency Test	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2009	PASS
Dwell Time Test	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2009	PASS
Maximum Peak Output Power Test	FCC Part 15: 15.247(b)(1)\ ANSI C63.10 :2009	PASS
Band Edge Compliance Test	FCC Part 15: 15.247(d) ANSI C63.10 :2009	PASS
N/A is an abbreviation for Not Applicable.		

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Product Name	:	Meta Watch
Model Number	:	SW12-2 ; SW12-1 SW12-2 use plastic and SW12-1 use metal case
FCC ID	:	O29-SW12
Radio	:	Bluetooth 2.1
Operation Frequency	:	2402-2480MHz
Modulation Technology	:	GFSK
Antenna Assembly Gain	:	Chip Antenna, 0.5dB.
Applicant	:	Meta Watch, Ltd. Tekniikanie 14 02150 Espoo Finland
Manufacturer	:	Meta Watch, Ltd. Tekniikanie 14 02150 Espoo Finland
USB Cable	:	Shielded, Detachable, 1.0m
Date of Test	:	Sep.20~Oct.14, 2012
Date of Receipt	:	Sep.19, 2012
Sample Type	:	Prototype production

2.2. Test Information


A special test software was used to control EUT work in Continuous TX mode(100% duty cycle), and select test channel, wireless mode and data rate.

Mode	Channel	Frequency (MHz)
GFSK	Low :CH0	2402
	Middle: CH39	2440
	High: CH78	2480

2.3. Tested Supporting System Details

No.	Description	ACS No.	Manufacturer	Model	Serial Number	Approved type
1.	Notebook	---	DELL	PP09S	N/A	☒ FCC DoC ☒ BSMI ID: R41108
		Power Cord: Unshielded, Detachable, 1.8m Power Adapter: Manufacturer: DELL, M/N: LA65NS1-00 Cable: Unshielded, Detachable, 4.0m(Bond one ferrite core)				

2.4. Block diagram of connection between the EUT and simulators

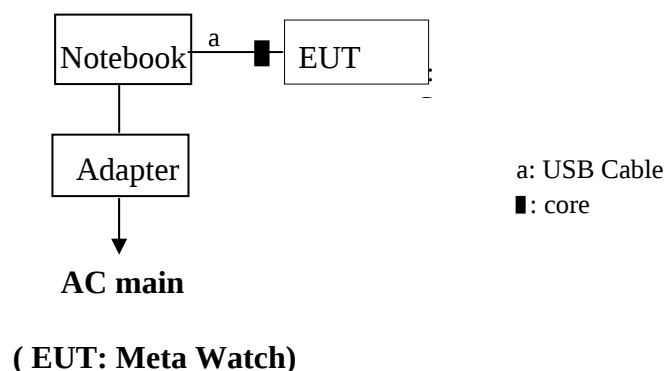

2.5. Test Facility

Site Description

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block, Shenzhen
Science & Industrial Park, Nantou,
Shenzhen, Guangdong, China

3m Anechoic Chamber : Certificated by FCC, USA
Registration Number: 90454
Valid Date: Feb.22, 2015

3m & 10m Anechoic Chamber : Certificated by FCC, USA
Registration Number: 794232
Valid Date: Dec.30, 2012

EMC Lab. : Certificated by Industry Canada
Registration Number: IC 5183A-1
Valid Date: Jun.13, 2014

: Certificated by DAkkS, Germany
Registration No: D-PL-12151-01-01
Valid Date: Feb.01, 2014

Accredited by NVLAP, USA
NVLAP Code: 200372-0
Valid Date: Mar.31, 2013

2.6.Measurement Uncertainty (95% confidence levels, k=2)


Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	3.2 dB (150KHz to 30MHz)
Uncertainty for Radiation Emission test in 3m chamber	3.6 dB(30~200MHz, Polarize: H)
	3.8 dB(30~200MHz, Polarize: V)
	4.2 dB(200M~1GHz, Polarize: H)
	3.8 dB(200M~1GHz, Polarize: V)
Uncertainty for Radiation Emission test in 3m chamber (1GHz-18GHz)	3.1dB (Distance: 3m Polarize: V)
	3.7 dB (Distance: 3m Polarize: H)
Uncertainty for Radiated Spurious Emission test in RF chamber	3.57 dB
Uncertainty for Conduction Spurious emission test	2.00 dB
Uncertainty for Output power test	0.73 dB
Uncertainty for Power density test	2.00 dB
Uncertainty for Frequency range test	7×10^{-8}
Uncertainty for Bandwidth test	83 kHz
Uncertainty for DC power test	0.038 %
Uncertainty for test site temperature and humidity	0.6°C
	3%

3. POWER LINE CONDUCTED EMISSION TEST

3.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS10	838693/001	Oct.31, 11	1 Year
2.	L.I.S.N.#1	Rohde & Schwarz	ESH2-Z5	834066/011	Oct.31, 11	1 Year
3.	L.I.S.N.#3	Kyoritsu	KNW-242C	8-1920-1	May.08, 12	1 Year
4.	Terminator	Hubersuhner	50Ω	No. 1	May.08, 12	1 Year
5.	Terminator	Hubersuhner	50Ω	No. 2	May.08, 12	1 Year
6.	RF Cable	Fujikura	3D-2W	No.1	May.08, 12	1Year
7.	Coaxial Switch	Anritsu	MP59B	M50564	May.08, 12	1 Year
8.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100341	May.08, 12	1 Year

3.2. Block Diagram of Test Setup

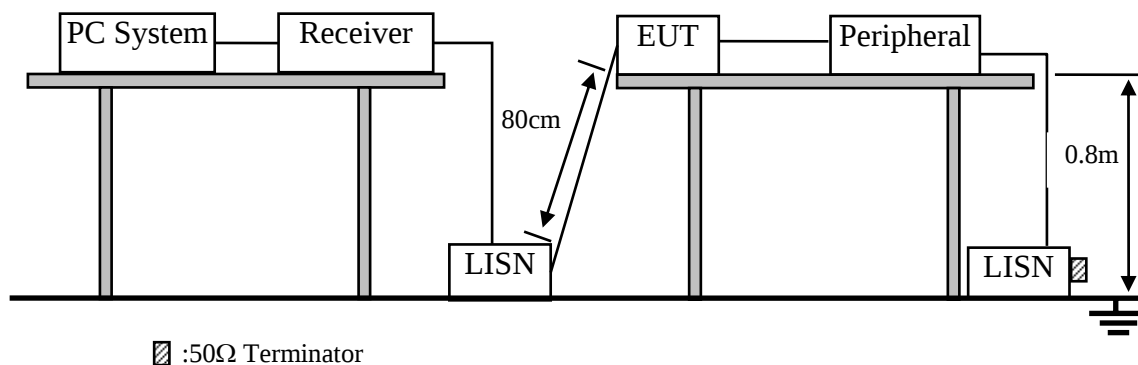

3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3.4.Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4.1.Meta Watch (EUT)

Model Number : SW12-2
Serial Number : N/A

3.4.2.Support Equipment: As Tested Supporting System Details, in Section 2.3.

3.5.Operating Condition of EUT

3.5.1.Setup the EUT and simulator as shown as Section 2.4.

3.5.2.Turned on the power of all equipment.

3.5.3.PC run test software to control EUT work in Tx mode.

3.6.Test Procedure


The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2009 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESHS10) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.7.Power Line Conducted Emission Test Results

PASS. (All emissions not reported below are too low against the prescribed limits.)

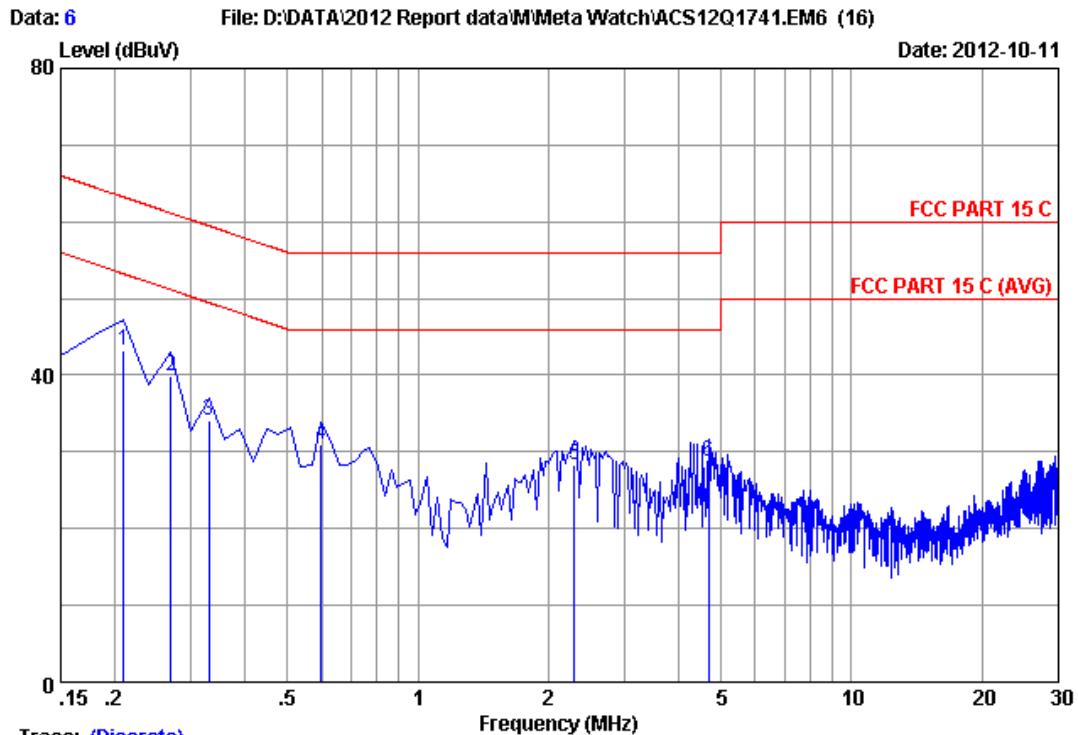


Trace: (Discrete)

Site no :1#conduction Data No :6
 Dis./Ant. **: 2012 ESH2-25 LINE
 Limit :FCC PART 15 C
 Env./Ins. :24.5°C/55% Engineer :Nick_Huang
 EUT :Meta Watch M/N:SW12-2
 Power Rating :DC 5V From PC Input AC 120V/60Hz
 Test Mode :BT2.1 Tx Mode
 :
 :

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.20970	0.15	9.95	33.19	43.29	63.22	19.93	QP
2	0.26940	0.15	9.95	29.86	39.96	61.14	21.18	QP
3	0.32910	0.16	9.95	23.89	34.00	59.47	25.47	QP
4	0.59775	0.16	9.95	20.81	30.92	56.00	25.08	QP
5	2.299	0.21	9.94	18.23	28.38	56.00	27.62	QP
6	4.687	0.25	9.95	18.53	28.73	56.00	27.27	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)
 +Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

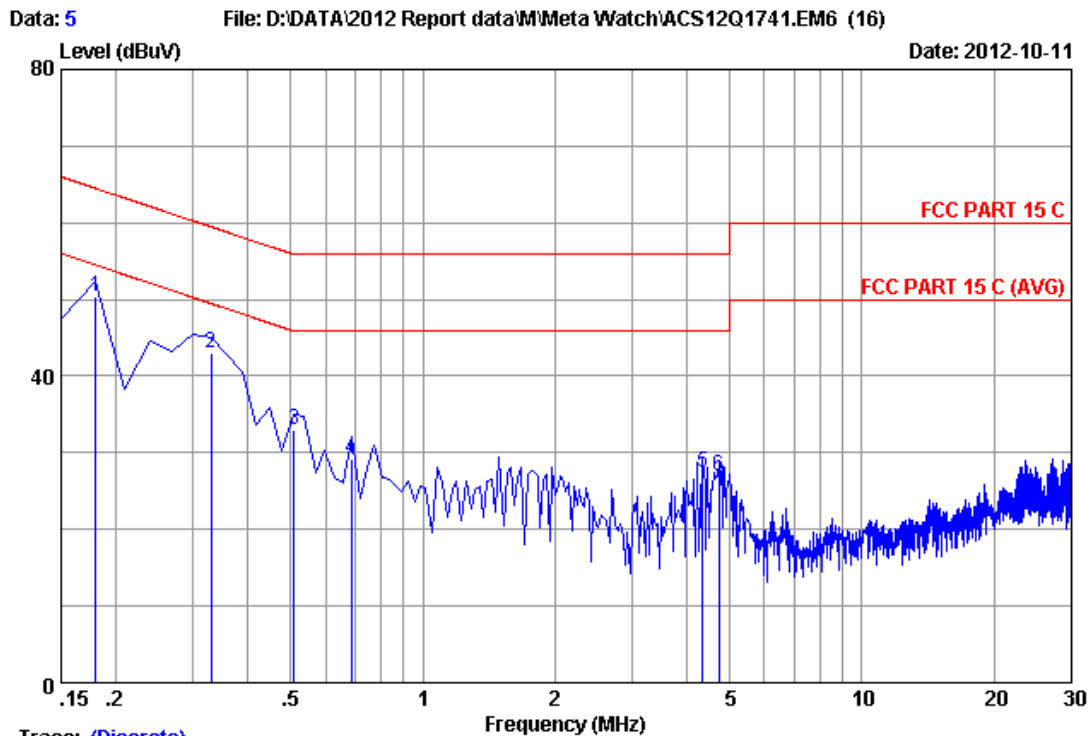

Trace: (Discrete)

Site no :1#conduction Data No :5
 Dis./Ant. **: 2012 ESH2-Z5 NEUTRAL
 Limit :FCC PART 15 C
 Env./Ins. :24.5°C/55% Engineer :Nick_Huang
 EUT :Meta Watch M/N:SW12-2
 Power Rating :DC 5V From PC Input AC 120V/60Hz
 Test Mode :BT2.1 Tx Mode
 :
 :

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.17985	0.14	9.94	40.26	50.34	64.49	14.15	QP
2	0.32910	0.15	9.95	32.97	43.07	59.47	16.40	QP
3	0.50820	0.15	9.95	22.81	32.91	56.00	23.09	QP
4	0.68730	0.16	9.95	19.05	29.16	56.00	26.84	QP
5	4.329	0.24	9.95	17.25	27.44	56.00	28.56	QP
6	4.717	0.25	9.95	16.72	26.92	56.00	29.08	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)
 +Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

4. RADIATED EMISSION TEST

4.1. Test Equipment

Frequency rang: 30~1000MHz


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	3#Chamber	AUDIX	N/A	N/A	Nov.28,11	1 Year
2	EMI Spectrum	Agilent	E4407B	MY41440292	May.08, 12	1 Year
3	Test Receiver	Rohde & Schwarz	ESVS10	834468/011	May.08, 12	1 Year
4	Amplifier	HP	8447D	2648A04738	May.08, 12	1 Year
5	Bilog Antenna	Schaffner	CBL6111C	2598	Oct.26, 10	2.0 Year
6	RF Cable	MIYAZAKI	CFD400-NL	3# Chamber No.1	May.08, 12	0.5Year
7	Coaxial Switch	Anritsu	MP59B	M74389	May.08, 12	1 Year


Frequency rang: above 1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum Analyzer	Agilent	E4407B	MY41440292	May.08, 12	1 Year
2	Horn Antenna	EMCO	3115	9510-4580	May.08, 12	1 Year
3	Horn Antenna	EMCO	3116	00060089	Nov.25, 11	1.5 Year
4	Amplifier	Agilent	8449B	3008A00863	May.08, 12	1 Year
5	RF Cable	Hubersuhner	SUCOFLEX106	77980/6	May.08, 12	0.5Year
6	RF Cable	Hubersuhner	SUCOFLEX106	77977/6	May.08, 12	0.5Year

4.2. Block Diagram of Test Setup

For frequency range 30MHz-1000MHz

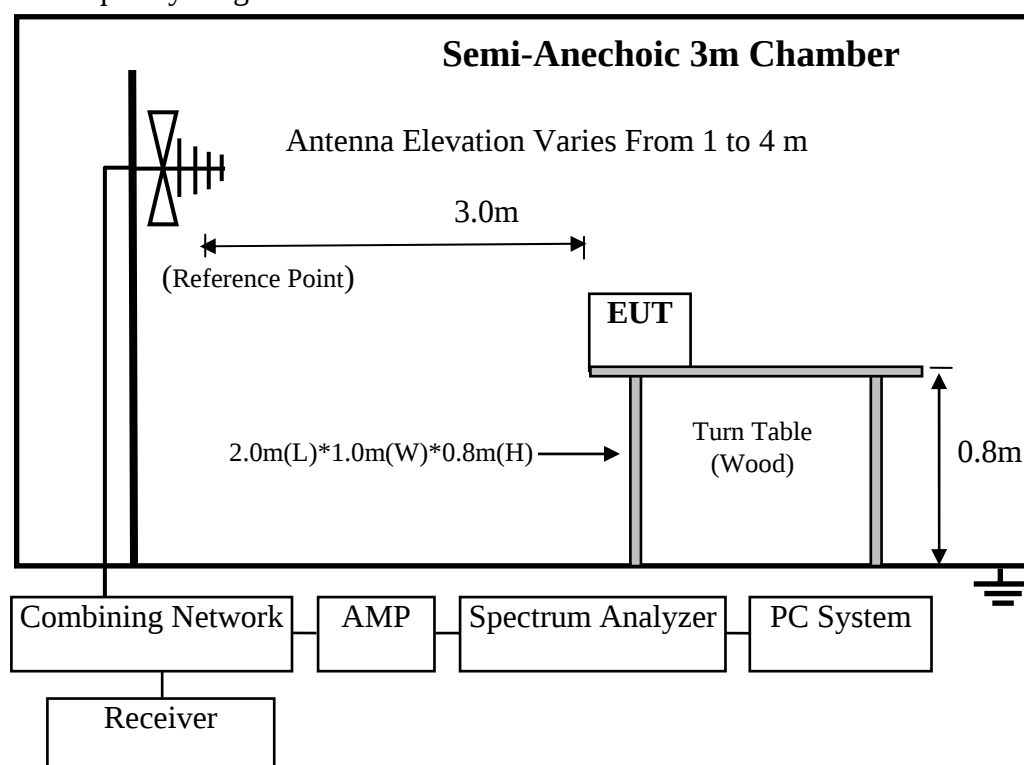

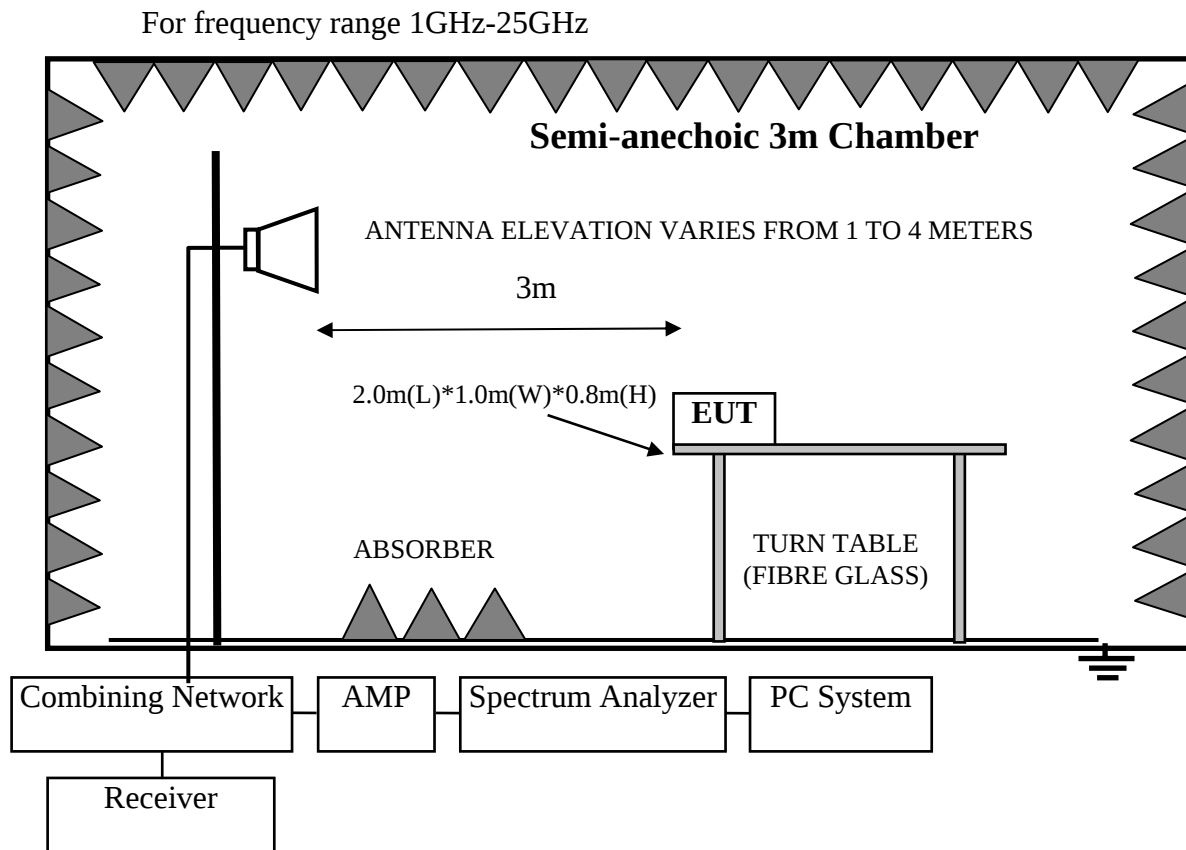

4.3.Radiated Emission Limit

4.3.1.15.209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Remark : (1) Emission level $\text{dB}\mu\text{V} = 20 \log$ Emission level $\mu\text{V}/\text{m}$

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.3.2.15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

4.4.EUT Configuration on Test

The configurations of EUT are listed in Section 3.5.

4.5.Operating Condition of EUT

Same as Conducted Emission test that is listed in Section 3.6. except the test set up replaced by Section 4.2.

4.6.Test Procedure

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The duty cycle of the signal during the test is 100%.The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

4.7. Radiated Emission Test Results

PASS.

All the emissions from 30MHz to 25 GHz were comply with 15.209 limits.


Note: For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

Frequency: 30MHz~1GHz

Data: 4

File: E:\2012 Report Data\M\Meta Watch\ACS12Q1741.EM6 (24)


Date: 2012-10-14

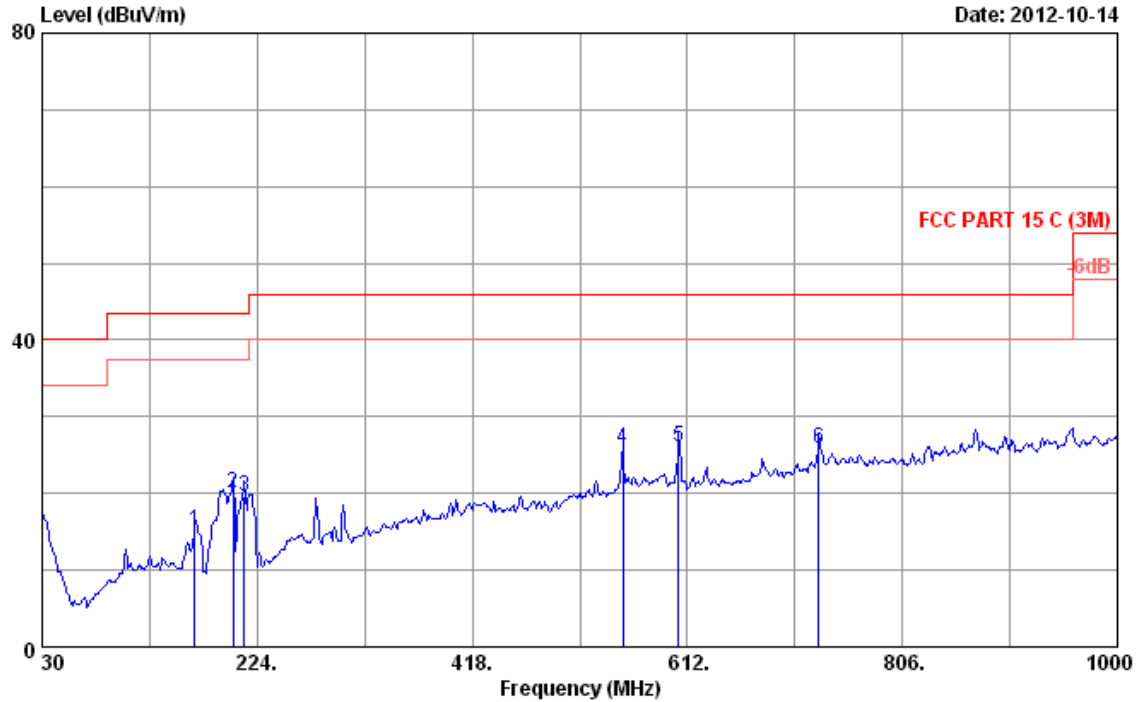

Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2012 CBL6111C 2598 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 24°C/56% Engineer : Tony
 EUT : Meta Watch M/N:SW12-2
 Power rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : BT2.1 Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	167.740	9.90	1.00	4.21	15.11	43.50	28.39	QP
2	202.660	9.58	1.08	9.43	20.09	43.50	23.41	QP
3	212.360	9.77	1.09	8.69	19.55	43.50	23.95	QP
4	553.800	19.35	1.99	4.41	25.75	46.00	20.25	QP
5	604.240	20.27	2.13	3.70	26.10	46.00	19.90	QP
6	730.340	21.80	2.50	1.53	25.83	46.00	20.17	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

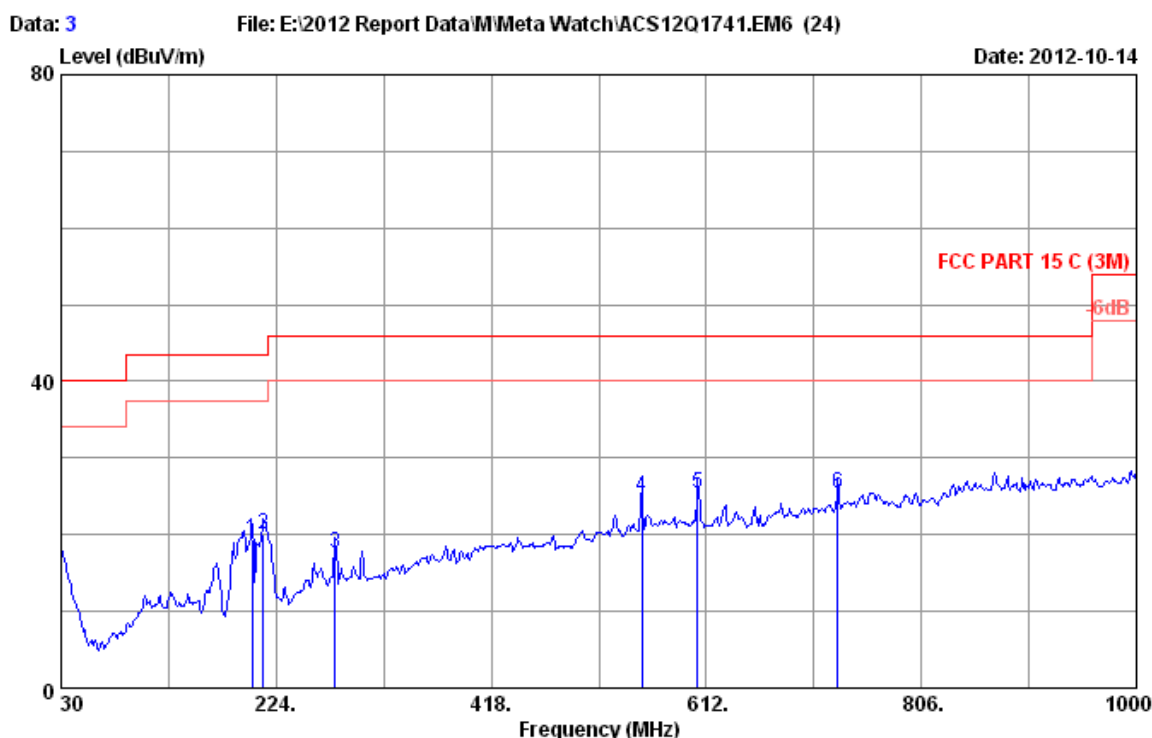


Site no. : 3m Chamber Data no. : 3
 Dis. / Ant. : 3m 2012 CBL6111C 2598 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 24°C/56% Engineer : Tony
 EUT : Meta Watch M/N:SW12-2
 Power rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : BT2.1 Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	202.660	9.58	1.08	8.84	19.50	43.50	24.00	QP
2	212.360	9.77	1.09	9.20	20.06	43.50	23.44	QP
3	277.350	13.21	1.23	3.07	17.51	46.00	28.49	QP
4	553.800	19.35	1.99	3.63	24.97	46.00	21.03	QP
5	604.240	20.27	2.13	3.07	25.47	46.00	20.53	QP
6	730.340	21.80	2.50	1.21	25.51	46.00	20.49	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 1GHz~18GHz

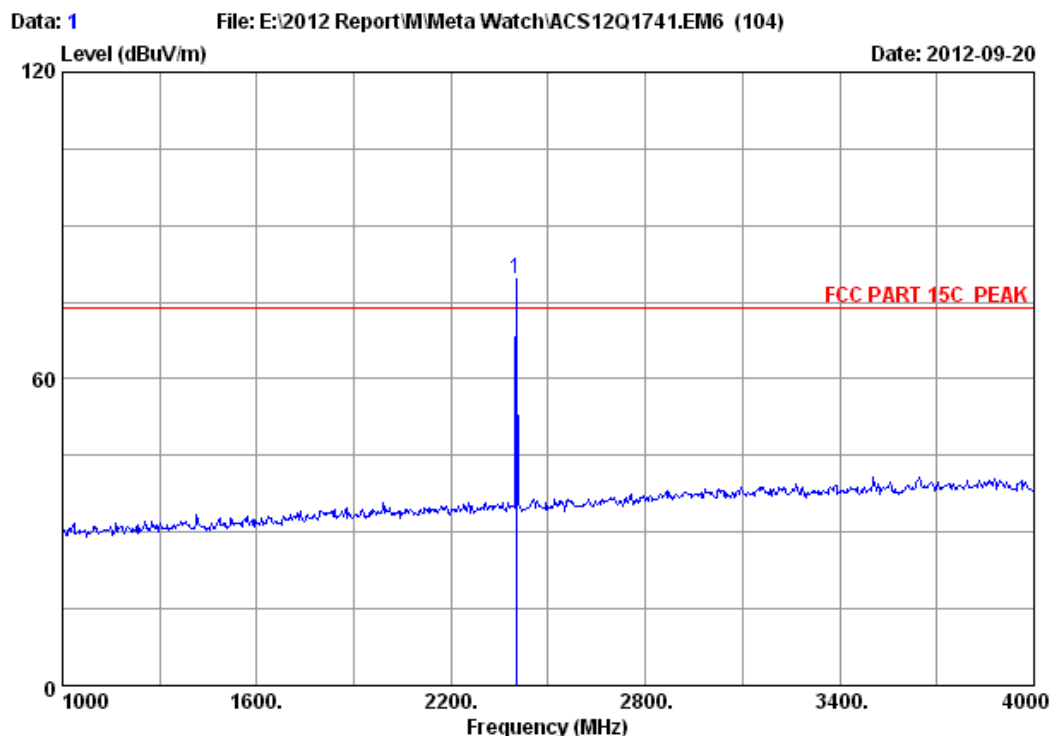


Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Meta Watch
 Power supply : DC 5V From PC Input AC 120V/60Hz
 Test mode : BR(v2.1) GFSK 2402MHz Tx Mode
 M/N : SW12-2

	Ant.	Cable	Amp.		Emission				
Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1 2402.000	27.96	6.01	34.44	80.13	79.66	74.00	-5.66	Peak	

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

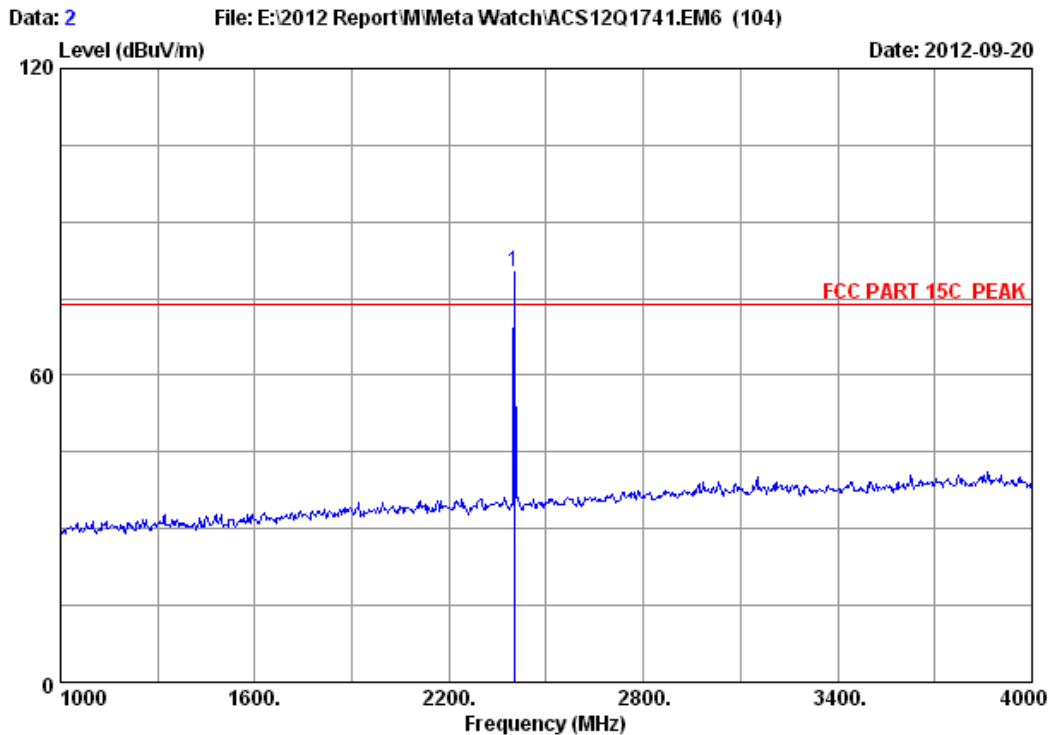


Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Meta Watch
 Power supply : DC 5V From PC Input AC 120V/60Hz
 Test mode : BR(v2.1) GFSK 2402MHz Tx Mode
 M/N : SW12-2


	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.000	27.96	6.01	34.44	80.77	80.30	74.00	-6.30	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

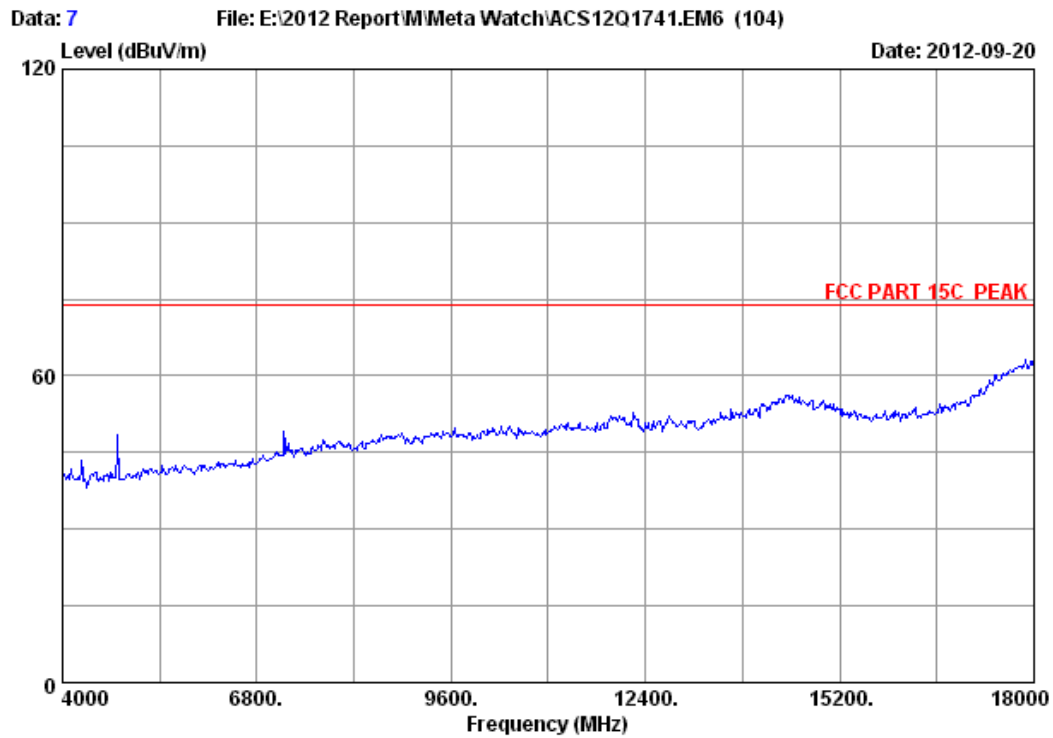

Site no.	: 3m Chamber	Data no.	: 7
Dis. / Ant.	: 3m 2012 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Leo-Li
EUT	: Meta Watch		
Power supply	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: BR(v2.1) GFSK 2402MHz Tx Mode		
M/N	: SW12-2		

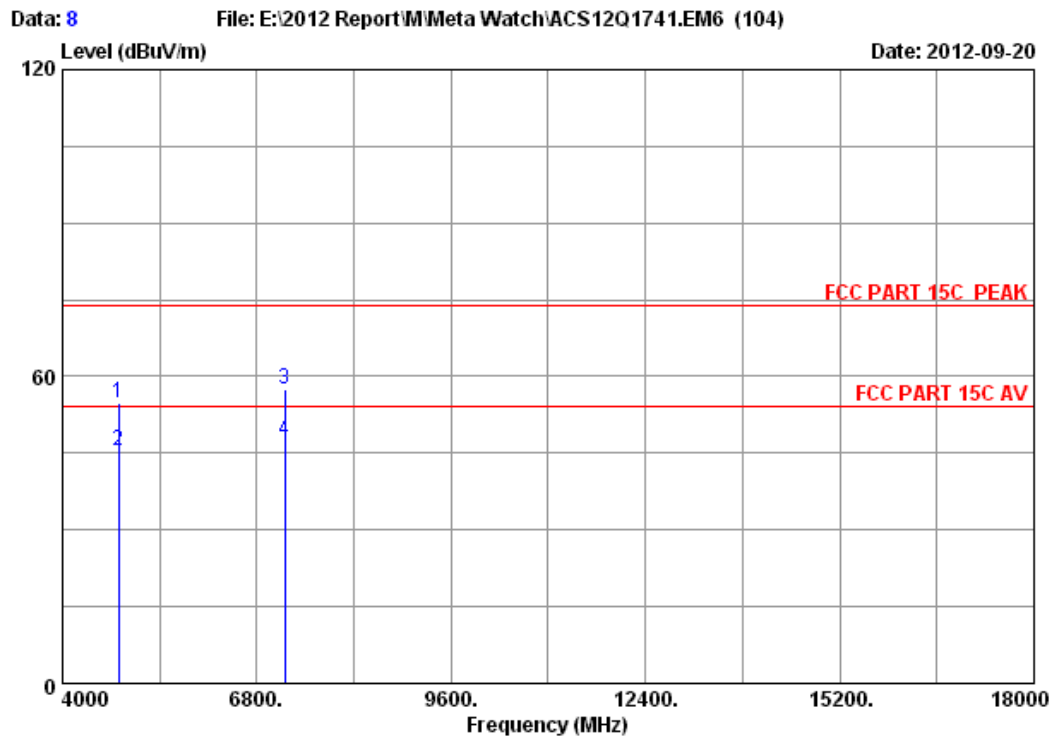


Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Meta Watch
 Power supply : DC 5V From PC Input AC 120V/60Hz
 Test mode : BR(v2.1) GFSK 2402MHz Tx Mode
 M/N : SW12-2


	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4804.000	32.86	8.52	34.60	47.91	54.69	74.00	19.31	Peak
2	4804.000	32.47	8.67	35.72	40.15	45.57	54.00	8.43	Average
3	7206.000	35.74	10.45	34.72	46.06	57.53	74.00	16.47	Peak
4	7206.000	35.44	10.74	35.00	36.17	47.35	54.00	6.65	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

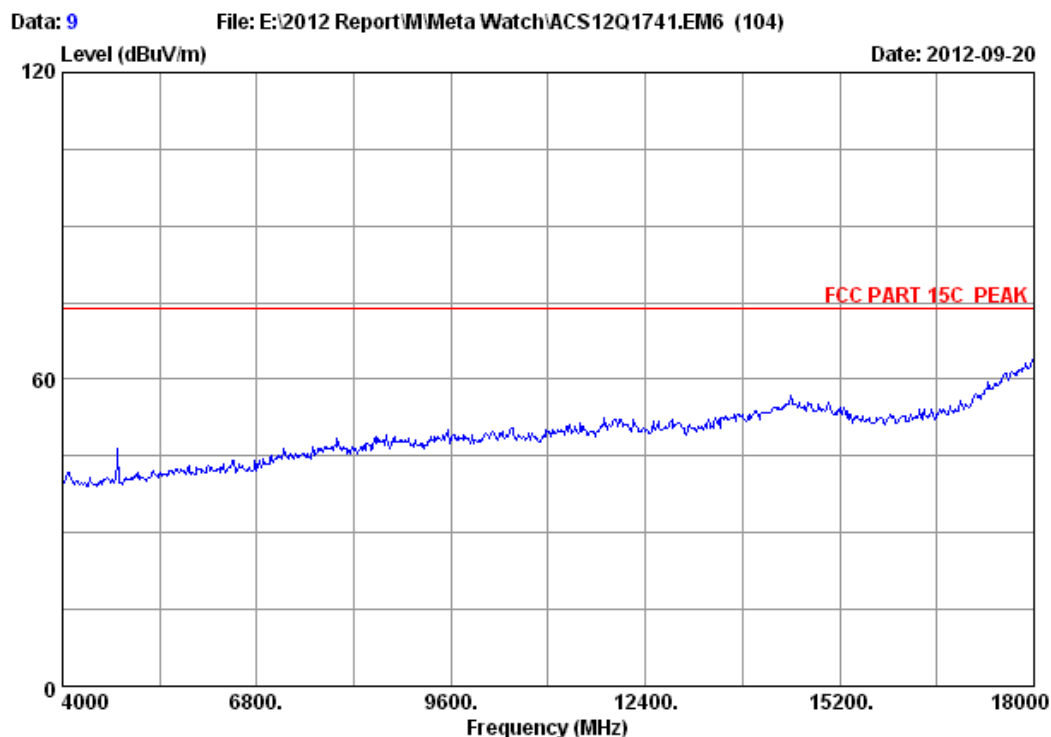

Site no.	: 3m Chamber	Data no.	: 9
Dis. / Ant.	: 3m 2012 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Leo-Li
EUT	: Meta Watch		
Power supply	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: BR(v2.1) GFSK 2402MHz Tx Mode		
M/N	: SW12-2		

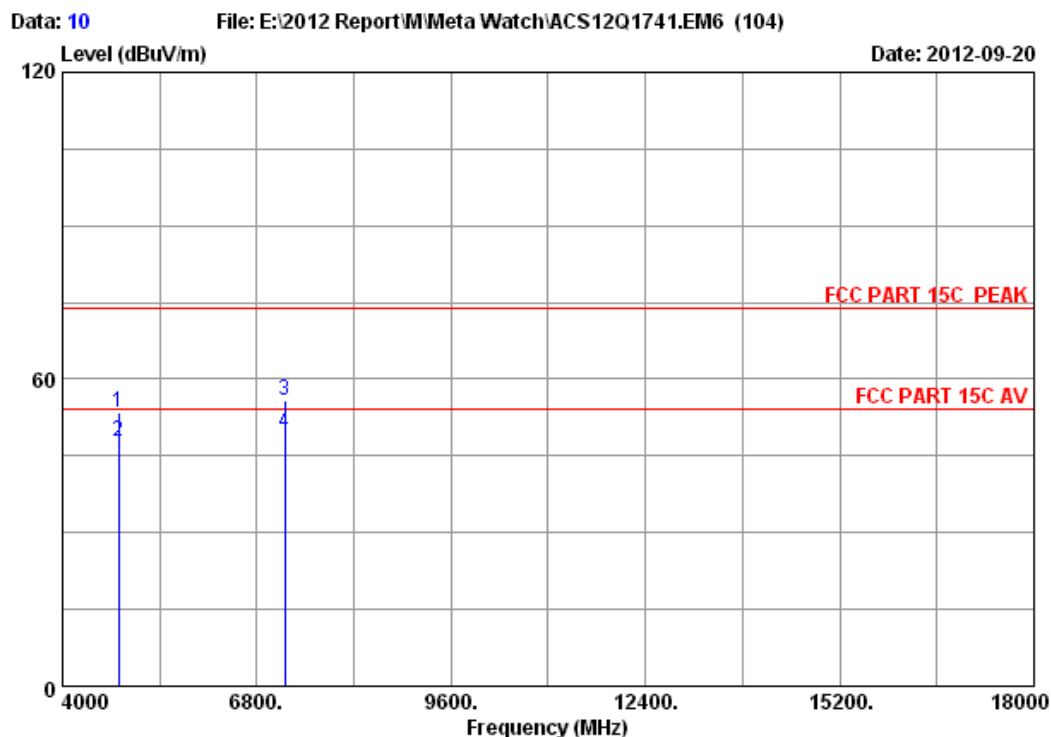


Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Meta Watch
 Power supply : DC 5V From PC Input AC 120V/60Hz
 Test mode : BR(v2.1) GFSK 2402MHz Tx Mode
 M/N : SW12-2


	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4804.000	32.86	8.52	34.60	46.65	53.43	74.00	20.57	Peak
2	4804.000	32.47	8.67	35.72	42.31	47.73	54.00	6.27	Average
3	7206.000	35.74	10.45	34.72	44.37	55.84	74.00	18.16	Peak
4	7206.000	35.44	10.74	35.00	38.25	49.43	54.00	4.57	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

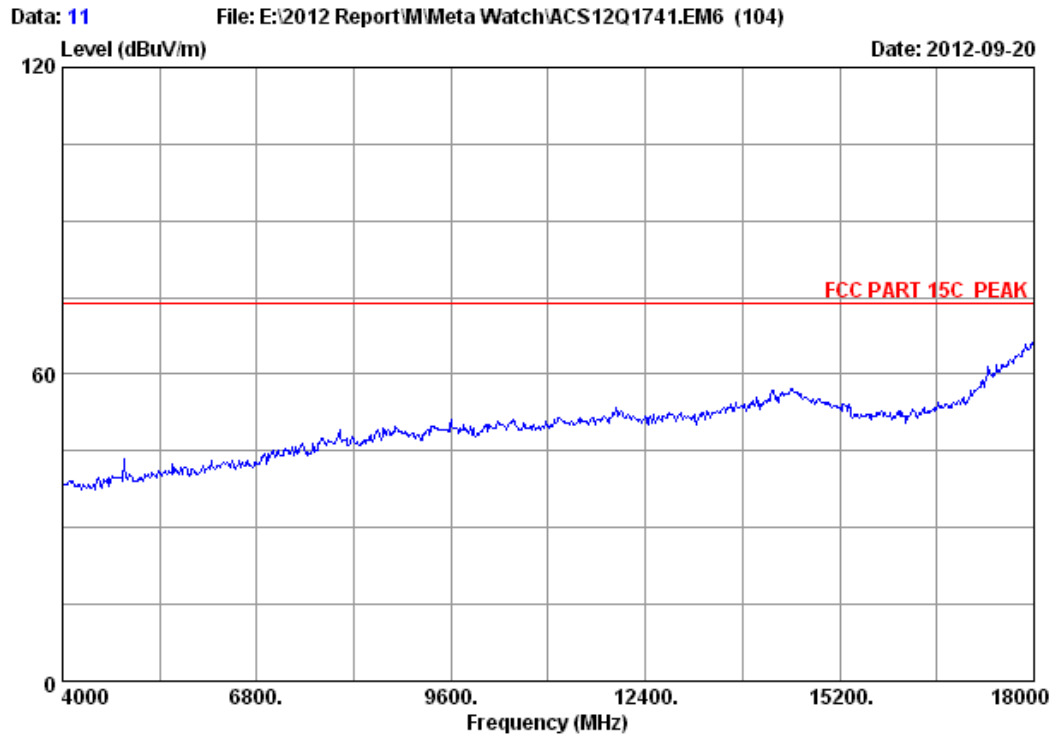

Site no.	: 3m Chamber	Data no.	: 11
Dis. / Ant.	: 3m 2012 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Leo-Li
EUT	: Meta Watch		
Power supply	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: BR(v2.1) GFSK 2441MHz Tx Mode		
M/N	: SW12-2		

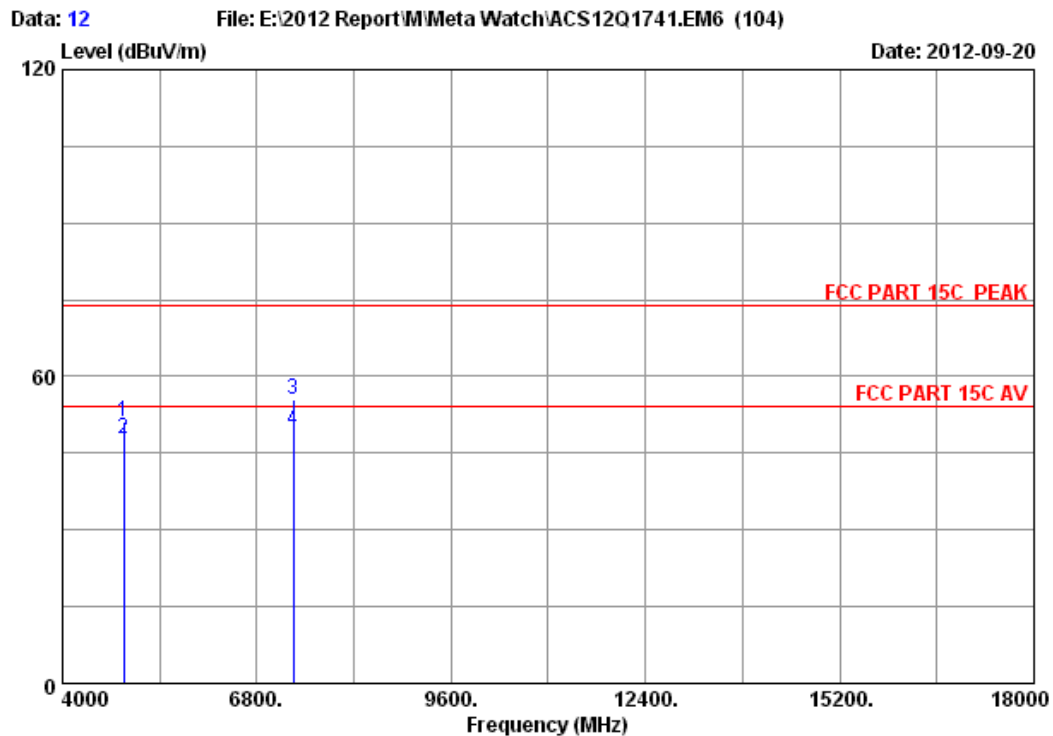


Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Meta Watch
 Power supply : DC 5V From PC Input AC 120V/60Hz
 Test mode : BR(v2.1) GFSK 2441MHz Tx Mode
 M/N : SW12-2


	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4882.000	32.64	8.74	35.69	45.41	51.10	74.00	22.90	Peak
2	4882.000	32.64	8.74	35.69	42.11	47.80	54.00	6.20	Average
3	7323.000	35.74	10.80	34.97	43.76	55.33	74.00	18.67	Peak
4	7323.000	35.74	10.80	34.97	38.05	49.62	54.00	4.38	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

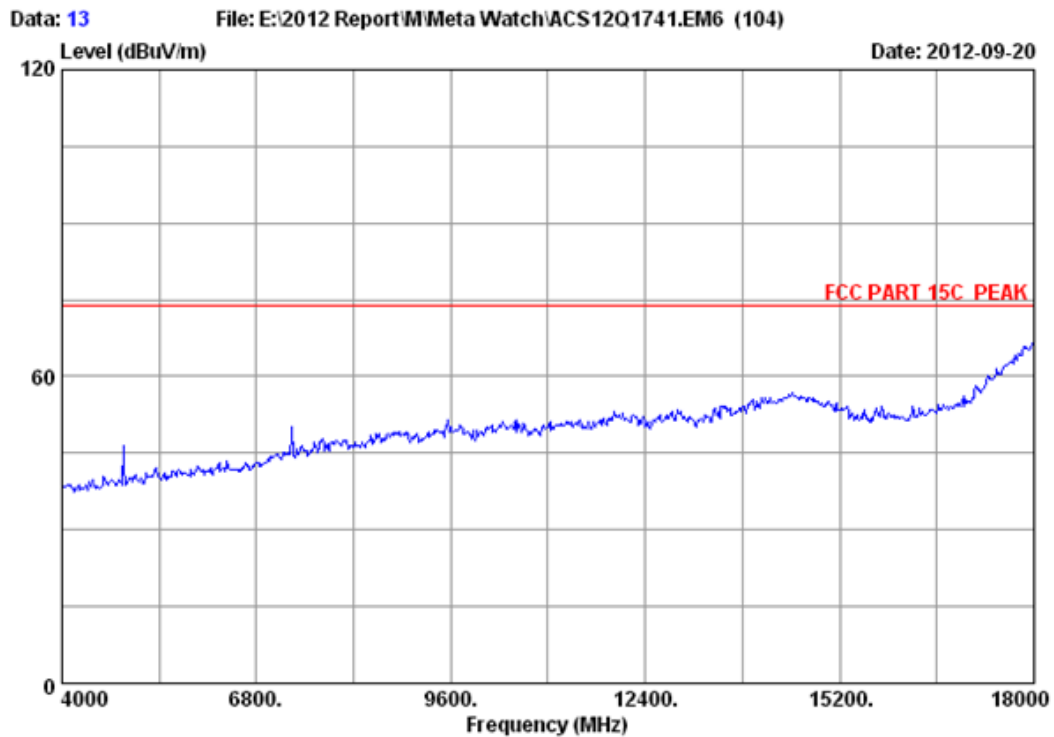

Site no.	: 3m Chamber	Data no.	: 13
Dis. / Ant.	: 3m 2012 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Leo-Li
EUT	: Meta Watch		
Power supply	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: BR(v2.1) GFSK 2441MHz Tx Mode		
M/N	: SW12-2		

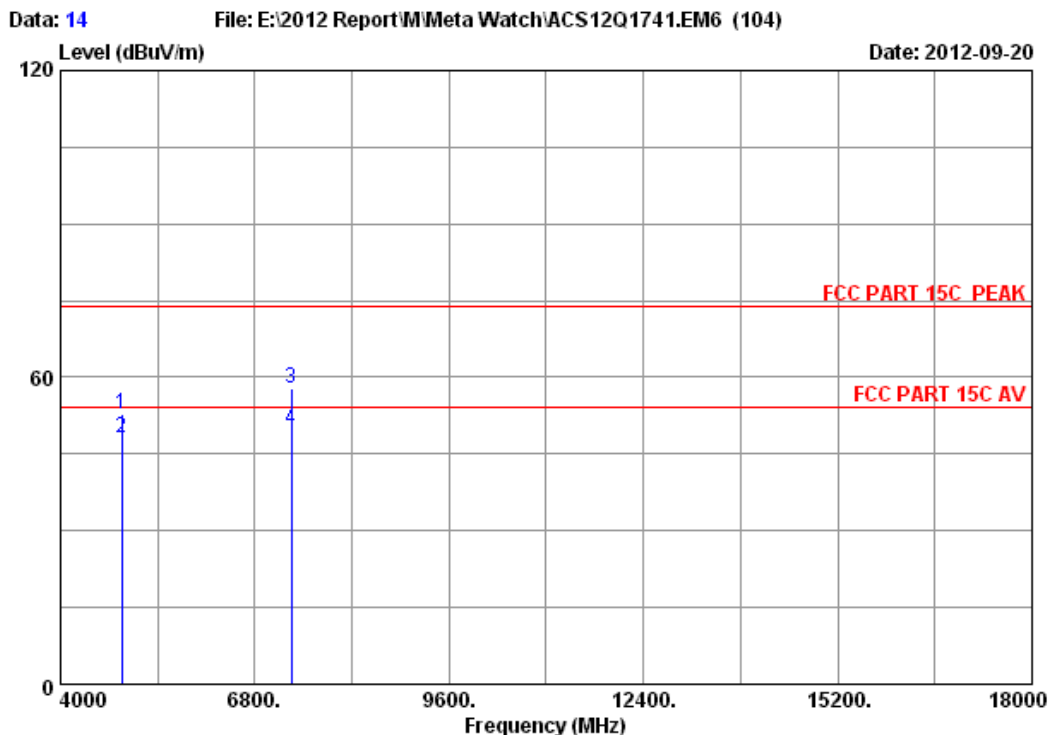


Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Meta Watch
 Power supply : DC 5V From PC Input AC 120V/60Hz
 Test mode : BR(v2.1) GFSK 2441MHz Tx Mode
 M/N : SW12-2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4882.000	32.64	8.74	35.69	47.10	52.79	74.00	21.21	Peak
2	4882.000	32.64	8.74	35.69	42.33	48.02	54.00	5.98	Average
3	7323.000	35.74	10.80	34.97	46.26	57.83	74.00	16.17	Peak
4	7323.000	35.74	10.80	34.97	38.19	49.76	54.00	4.24	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

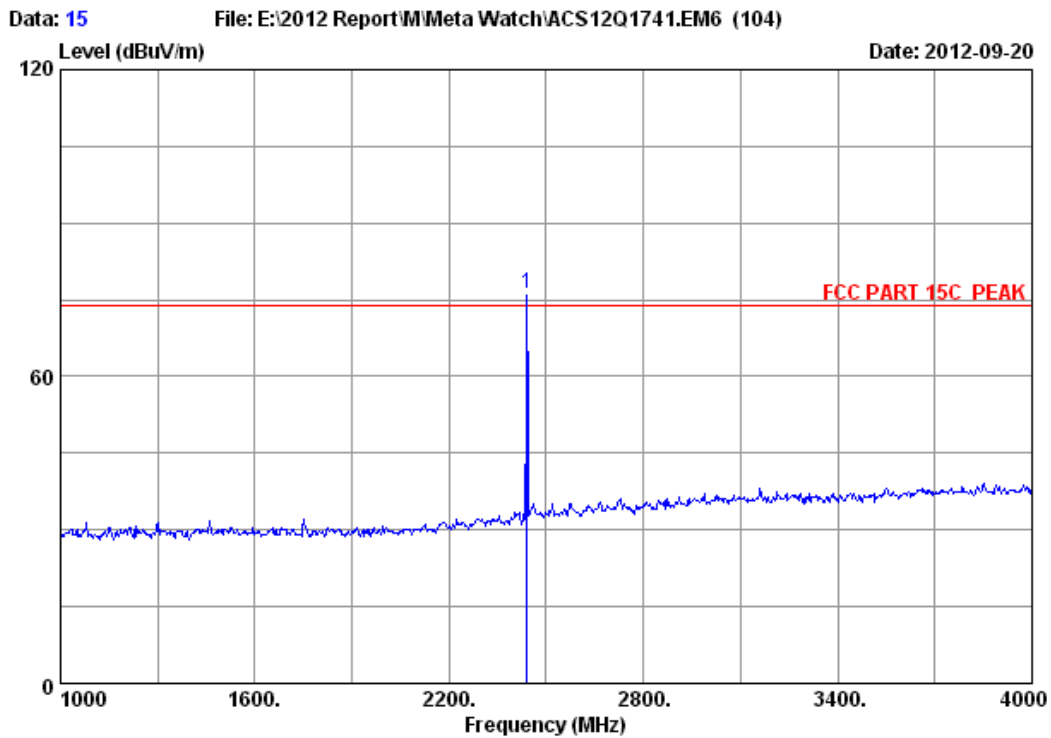


Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Meta Watch
 Power supply : DC 5V From PC Input AC 120V/60Hz
 Test mode : BR(v2.1) GFSK 2441MHz Tx Mode
 M/N : SW12-2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.000	27.02	6.09	35.92	78.89	76.08	74.00	-2.08	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

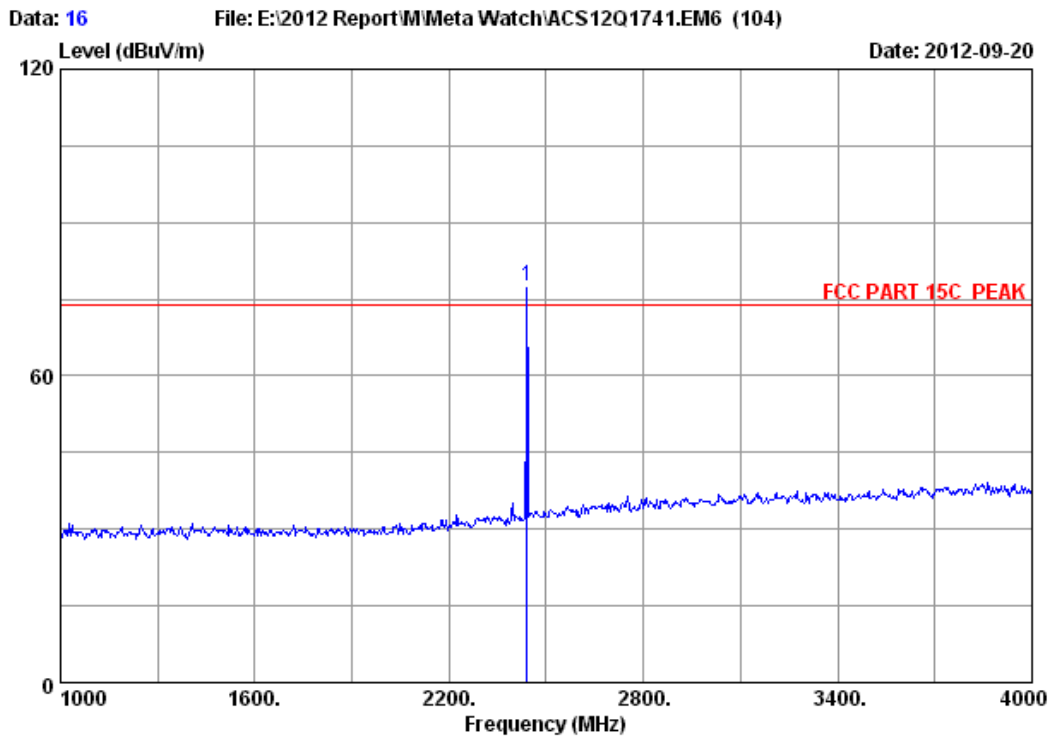


Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Meta Watch
 Power supply : DC 5V From PC Input AC 120V/60Hz
 Test mode : BR(v2.1) GFSK 2441MHz Tx Mode
 M/N : SW12-2


	Freq.	Ant.	Cable	Amp.		Emission			
	(MHz)	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2441.000	27.02	6.09	35.92	80.25	77.44	74.00	-3.44	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

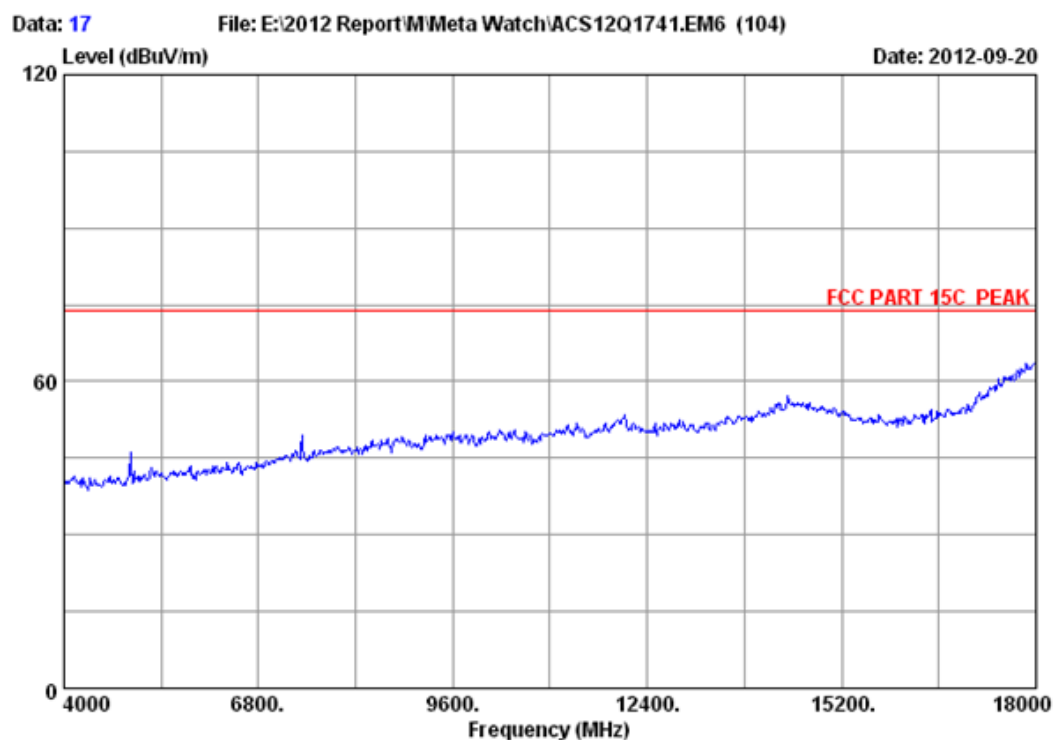

Site no.	: 3m Chamber	Data no.	: 17
Dis. / Ant.	: 3m 2012 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Leo-Li
EUT	: Meta Watch		
Power supply	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: BR(v2.1) GFSK 2480MHz Tx Mode		
M/N	: SW12-2		

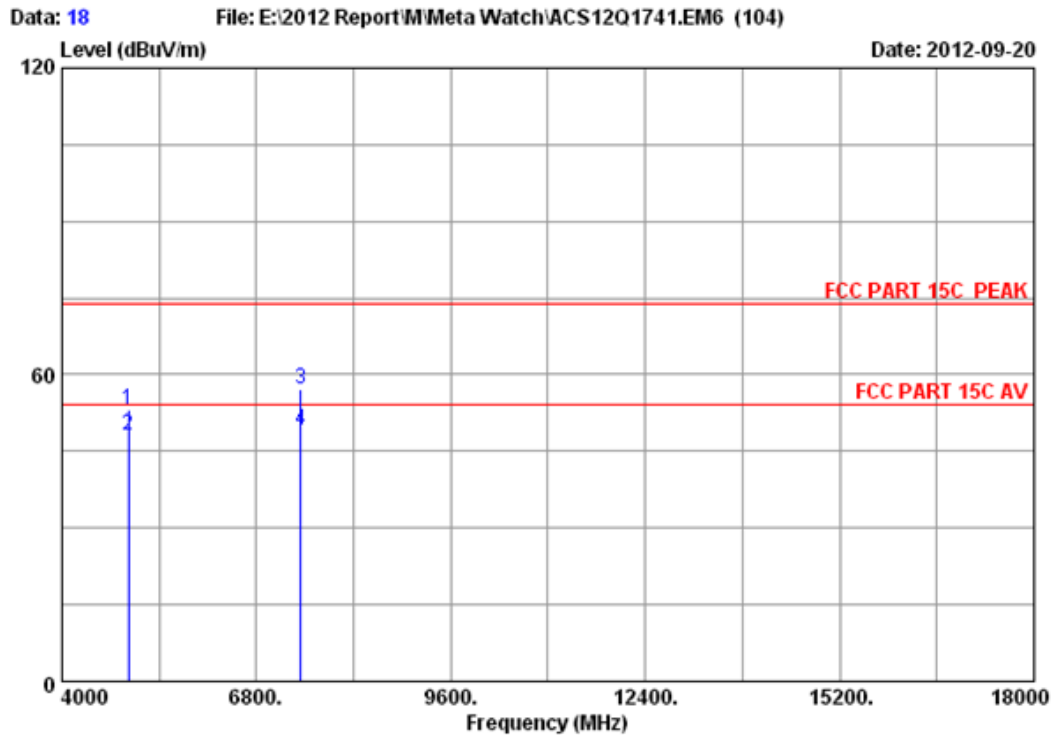


Site no. : 3m Chamber Data no. : 18
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Meta Watch
 Power supply : DC 5V From PC Input AC 120V/60Hz
 Test mode : BR(v2.1) GFSK 2480MHz Tx Mode
 M/N : SW12-2


	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4960.000	33.14	8.65	34.60	46.07	53.26	74.00	20.74	Peak
2	4960.000	32.81	8.81	35.66	42.28	48.24	54.00	5.76	Average
3	7440.000	36.37	10.51	34.74	44.97	57.11	74.00	16.89	Peak
4	7440.000	36.04	10.85	34.94	37.09	49.04	54.00	4.96	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

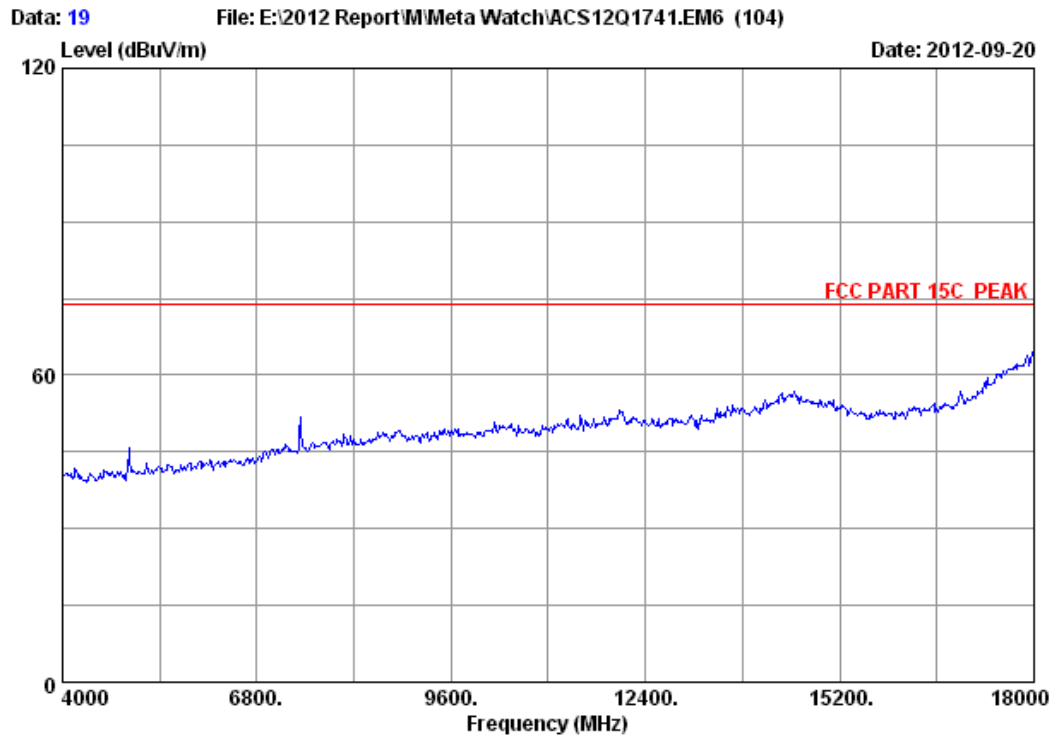

Site no.	: 3m Chamber	Data no.	: 19
Dis. / Ant.	: 3m 2012 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Leo-Li
EUT	: Meta Watch		
Power supply	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: BR(v2.1) GFSK 2480MHz Tx Mode		
M/N	: SW12-2		

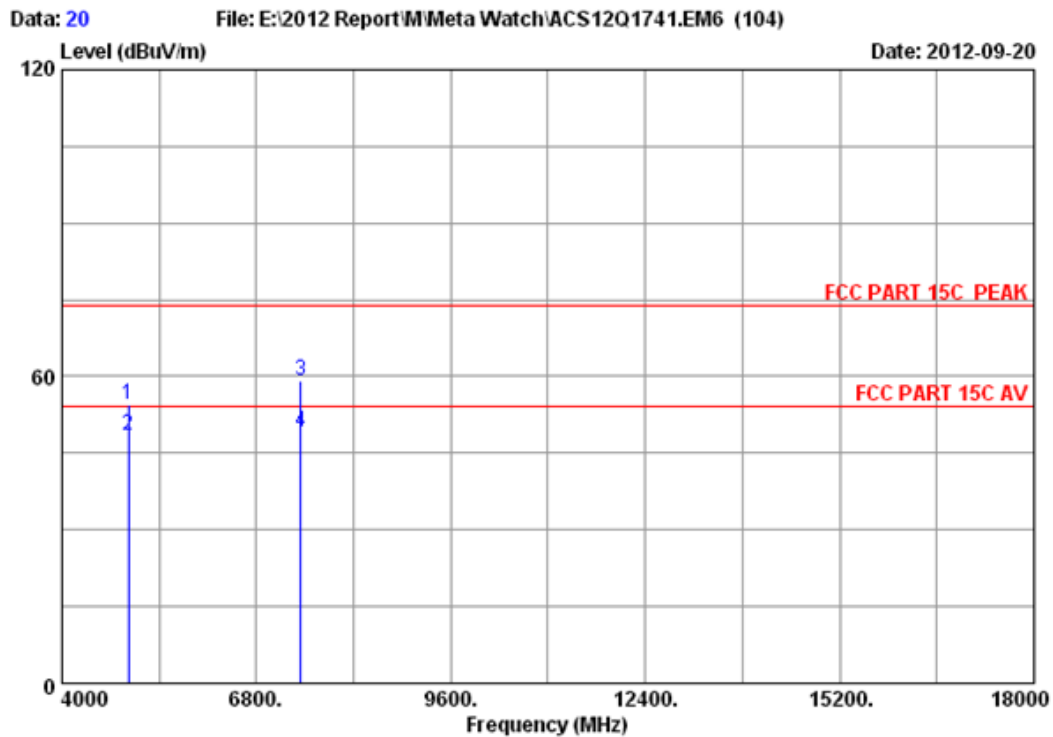


Site no. : 3m Chamber Data no. : 20
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Meta Watch
 Power supply : DC 5V From PC Input AC 120V/60Hz
 Test mode : BR(v2.1) GFSK 2480MHz Tx Mode
 M/N : SW12-2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4960.000	33.14	8.65	34.60	47.18	54.37	74.00	19.63	Peak
2	4960.000	32.81	8.81	35.66	42.51	48.47	54.00	5.53	Average
3	7440.000	36.37	10.51	34.74	47.05	59.19	74.00	14.81	Peak
4	7440.000	36.04	10.85	34.94	37.17	49.12	54.00	4.88	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

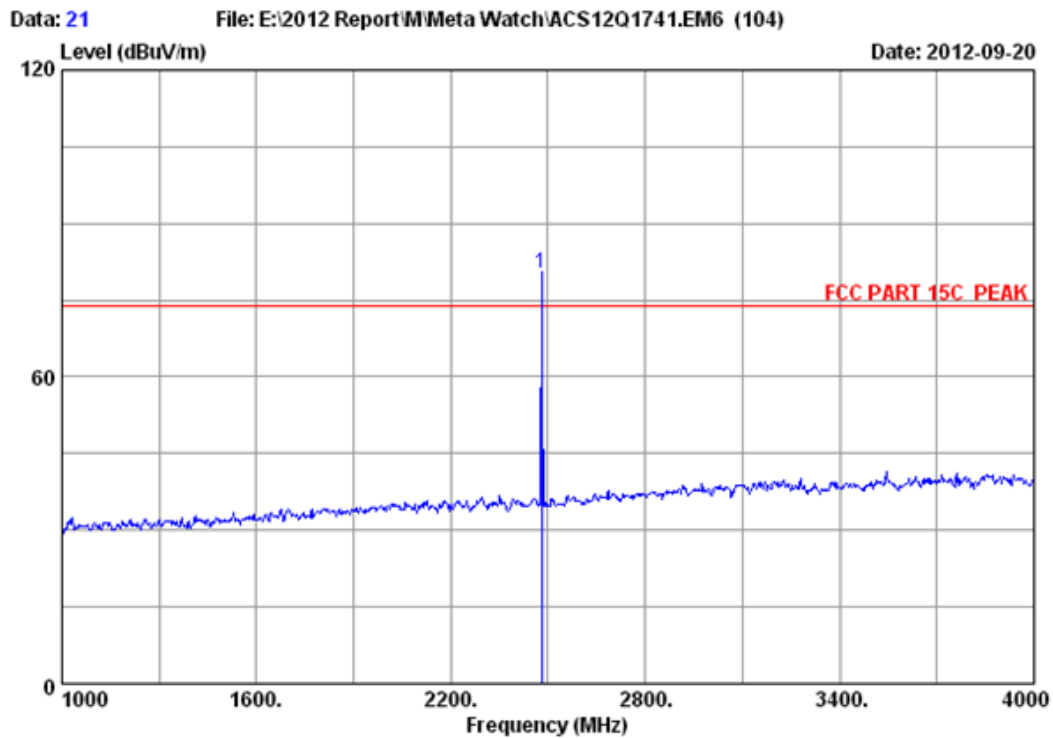


Site no. : 3m Chamber Data no. : 21
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Meta Watch
 Power supply : DC 5V From PC Input AC 120V/60Hz
 Test mode : BR(v2.1) GFSK 2480MHz Tx Mode
 M/N : SW12-2

	Freq.	Ant.	Cable	Amp.		Emission			
	(MHz)	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2480.000	28.08	6.15	34.45	80.32	80.10	74.00	-6.10	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

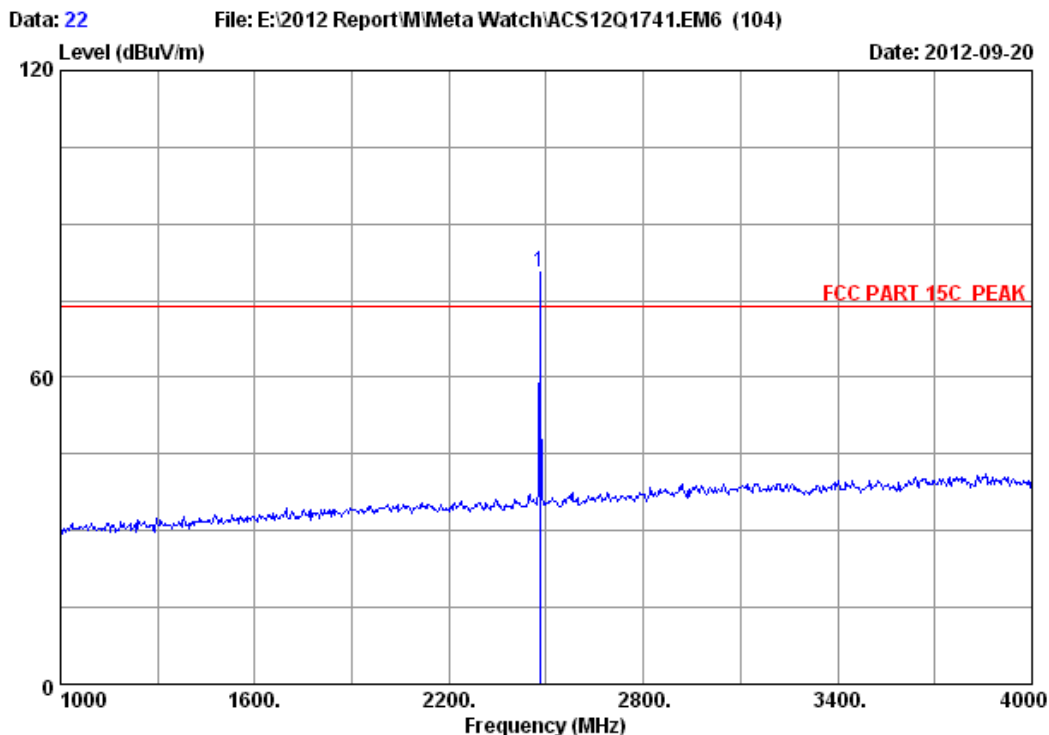

Site no. : 3m Chamber Data no. : 22
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Meta Watch
 Power supply : DC 5V From PC Input AC 120V/60Hz
 Test mode : BR(v2.1) GFSK 2480MHz Tx Mode
 M/N : SW12-2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2480.000	27.27	6.15	35.92	82.98	80.48	74.00	-6.48	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

5. CONDUCTED SPURIOUS EMISSIONS

5.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08,12	1 Year
2.	Attenuator	Agilent	8491B	MY39262165	May.08,12	1 Year
3.	RF Cable	Hubersuhner	SUCOFLEX102	28618/2	May.08,12	1 Year

5.2. Limit

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.



5.3. Test Procedure



The transmitter output was connected to a spectrum analyzer, The resolution bandwidth is set to 100 kHz, The video bandwidth is set to 300 kHz and measure all the emissions detected.

5.4. Test result



PASS (The testing data was attached in the next pages.)


Hopping off
CH0: 2402MHz

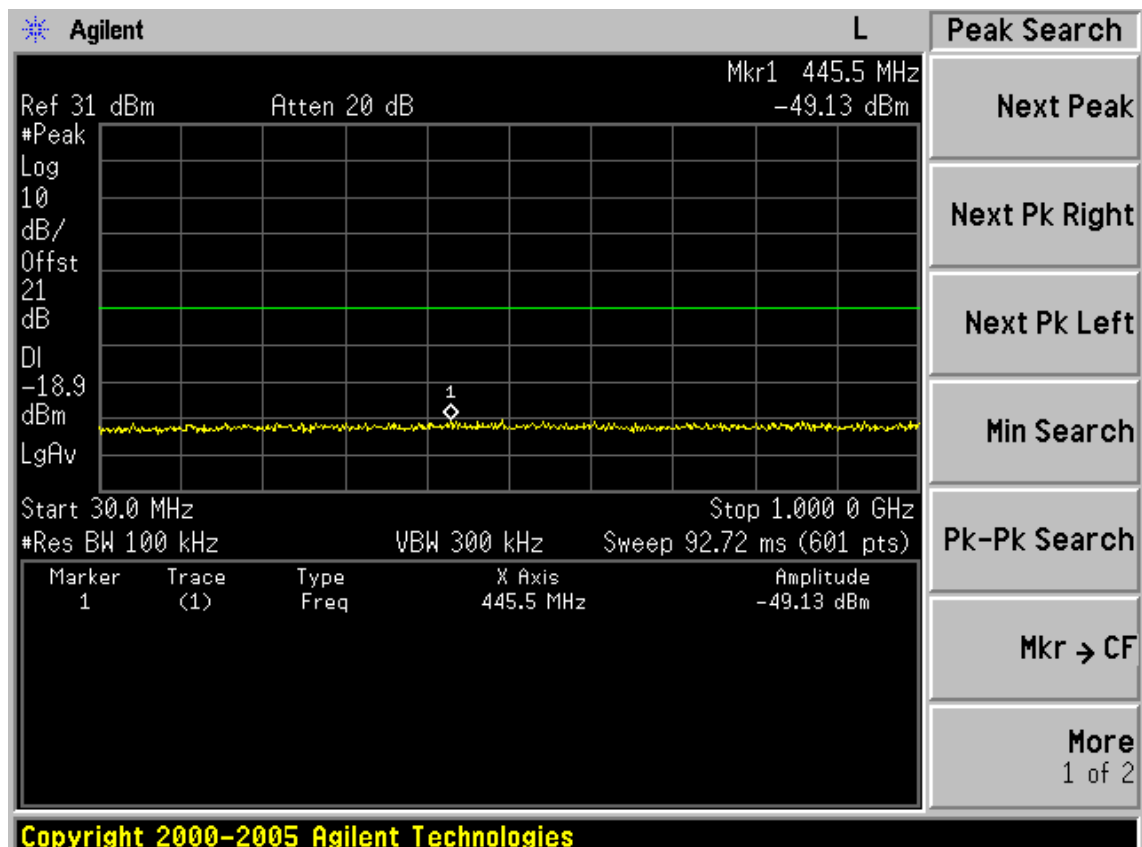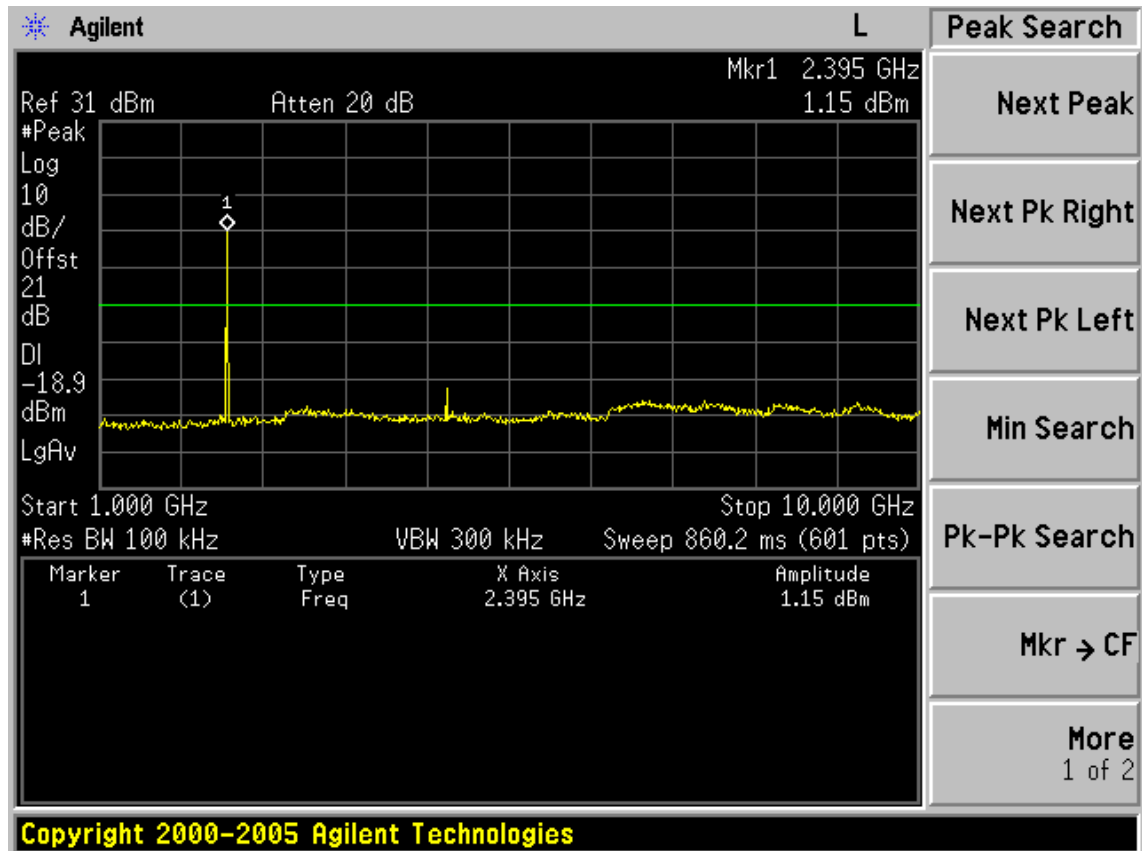

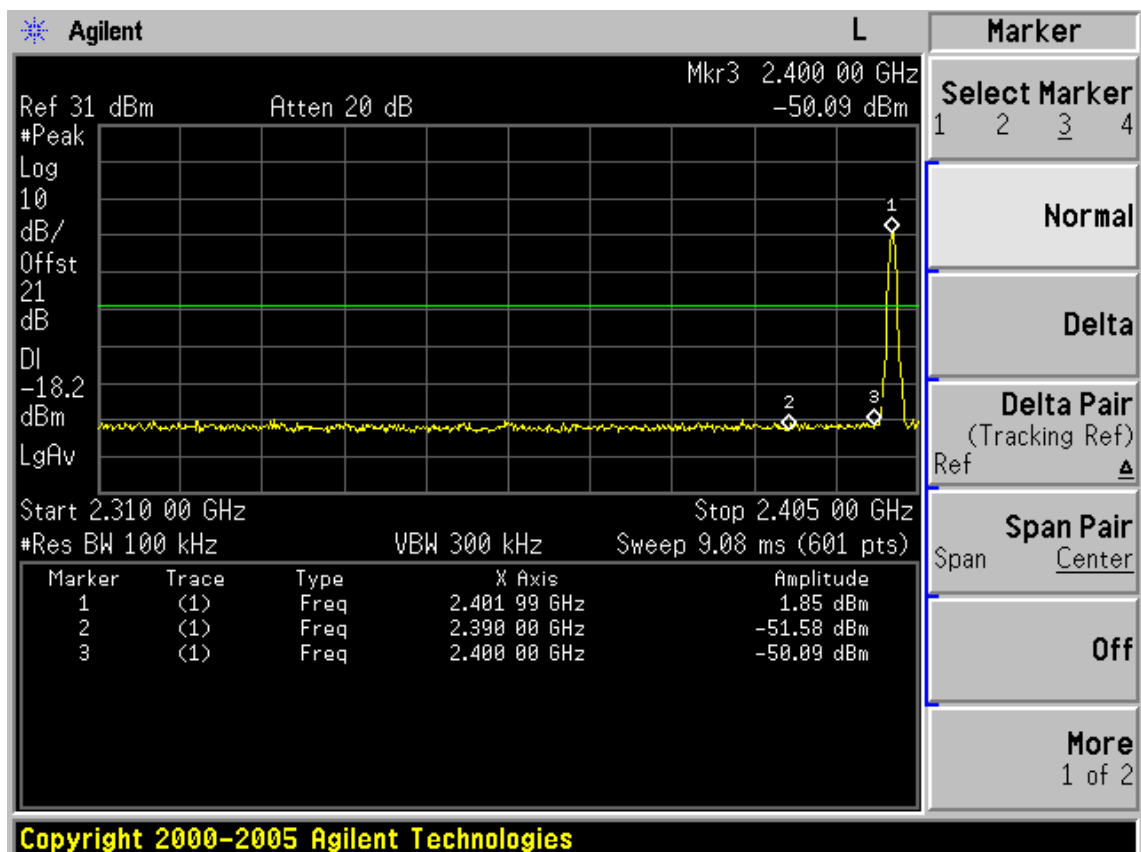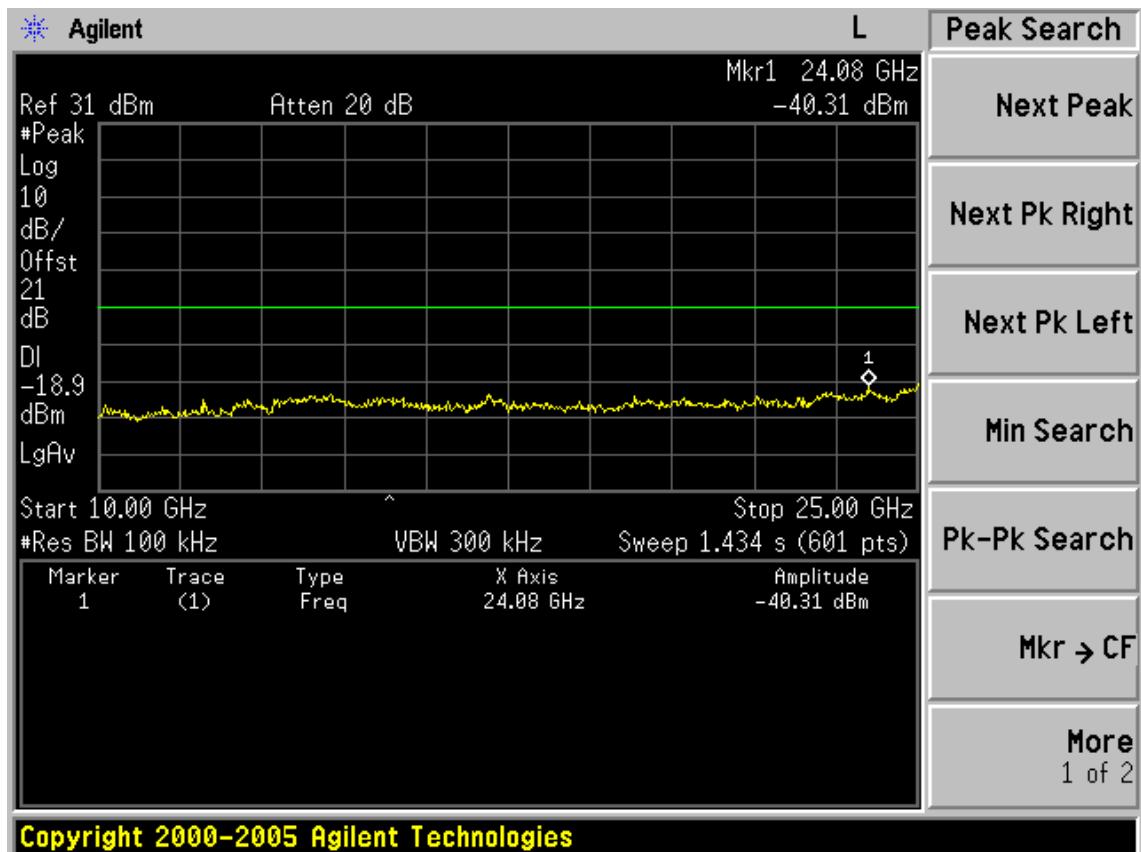




CH39: 2441MHz

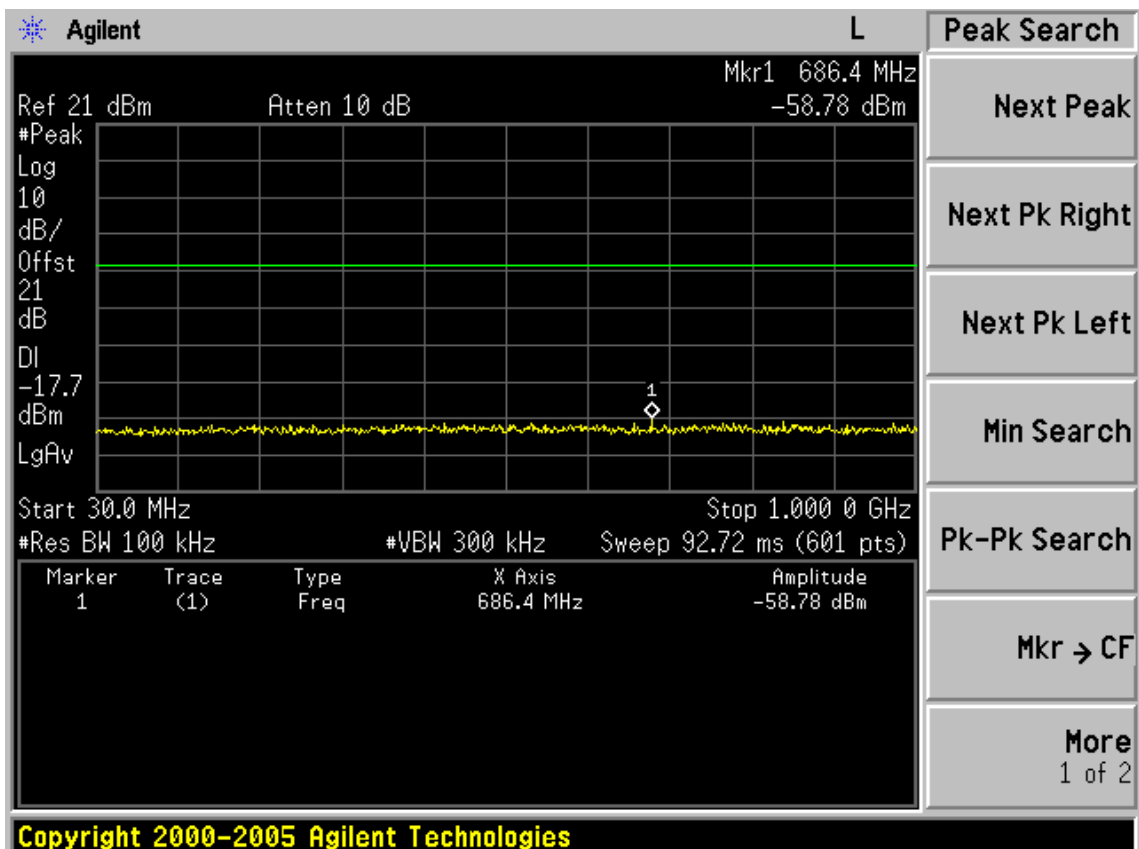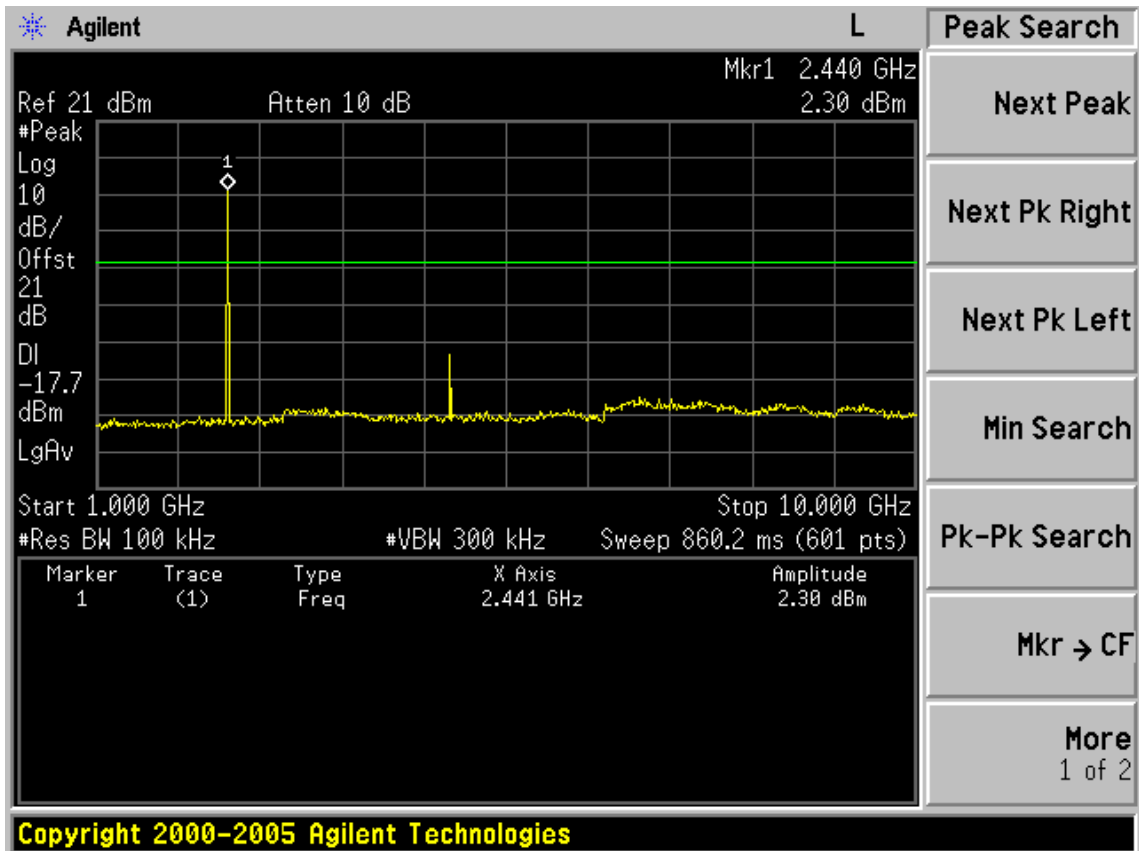


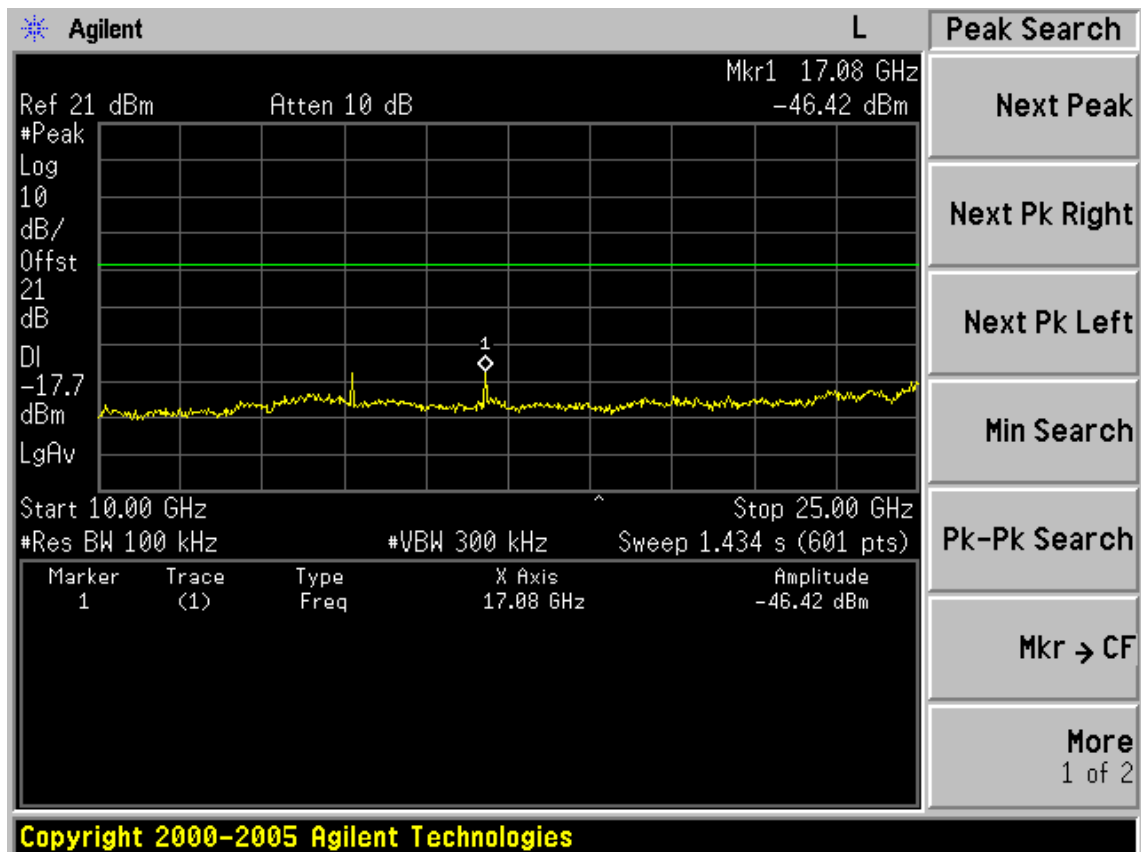


CH78: 2480MHz

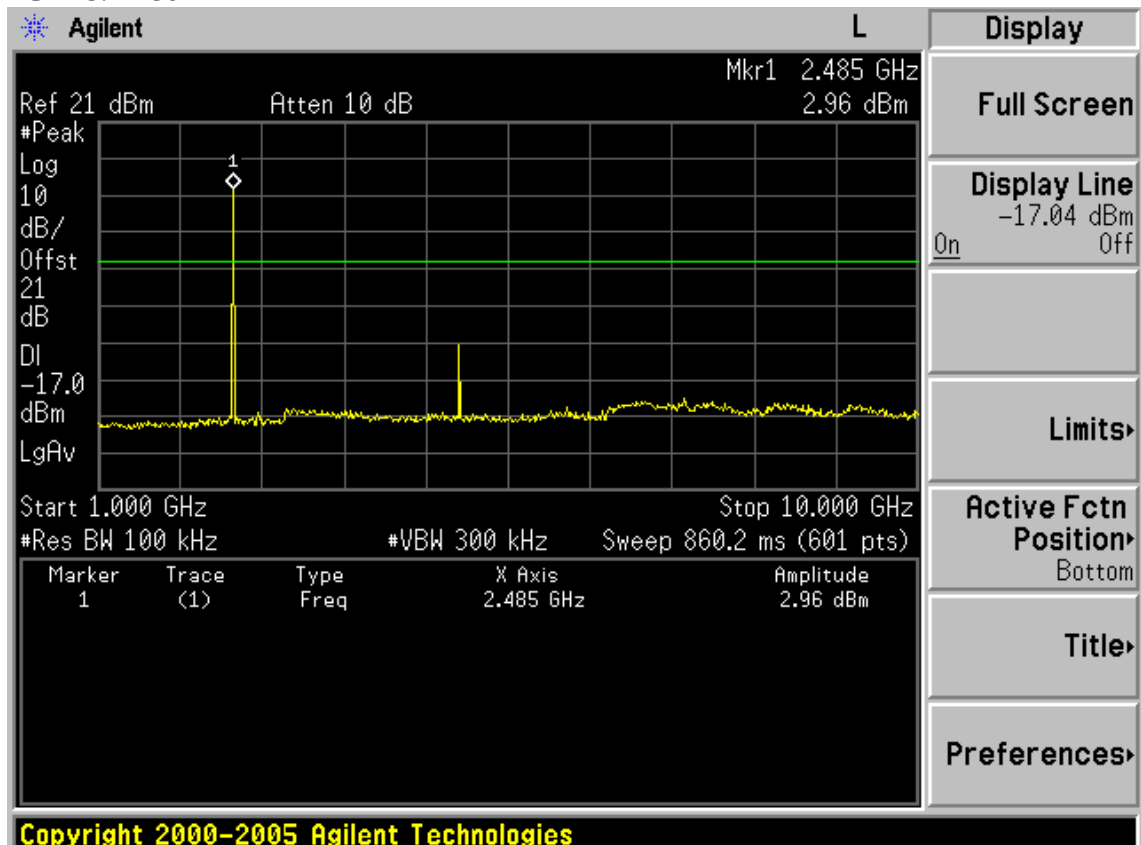


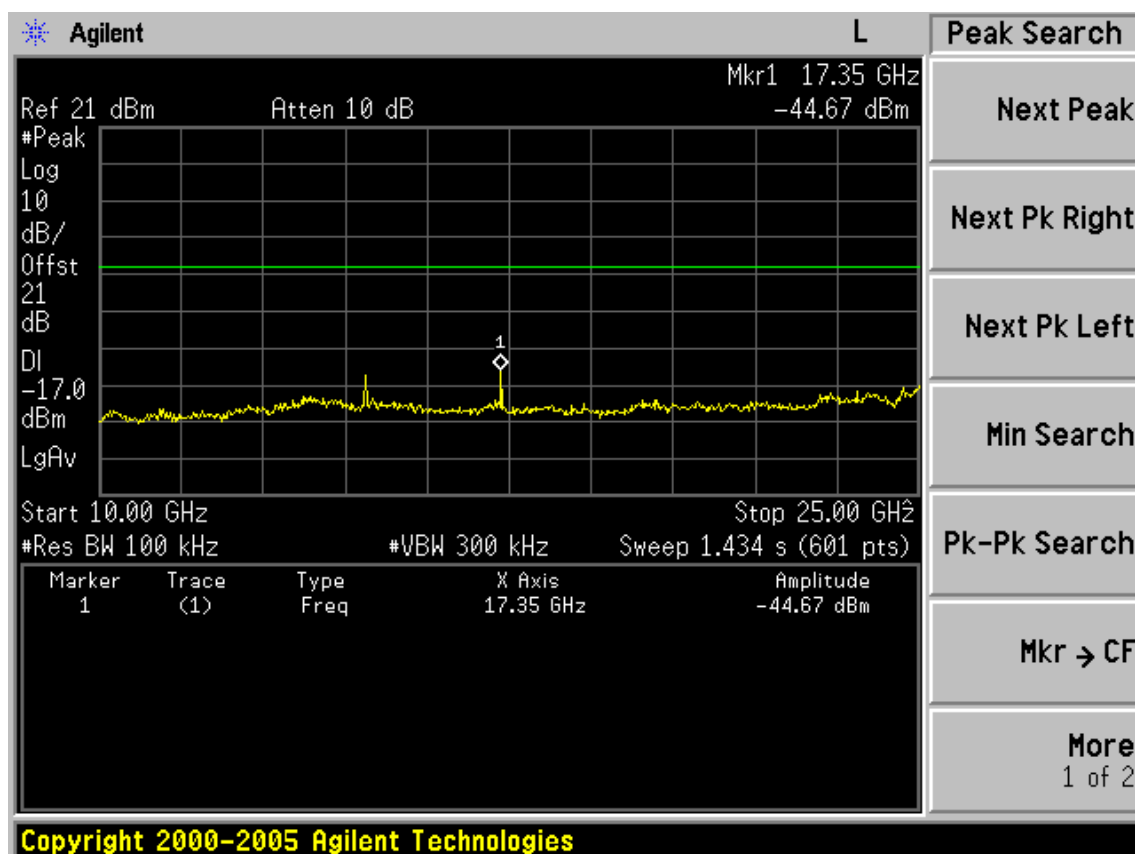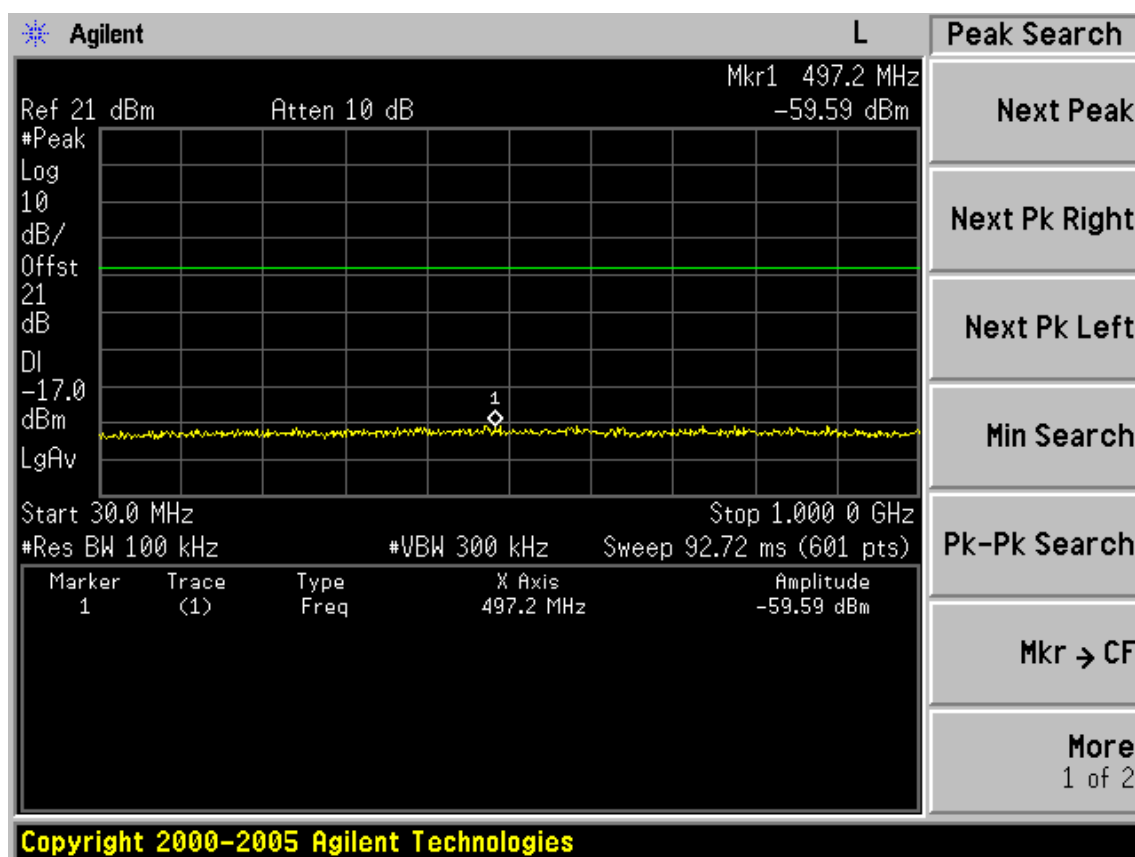

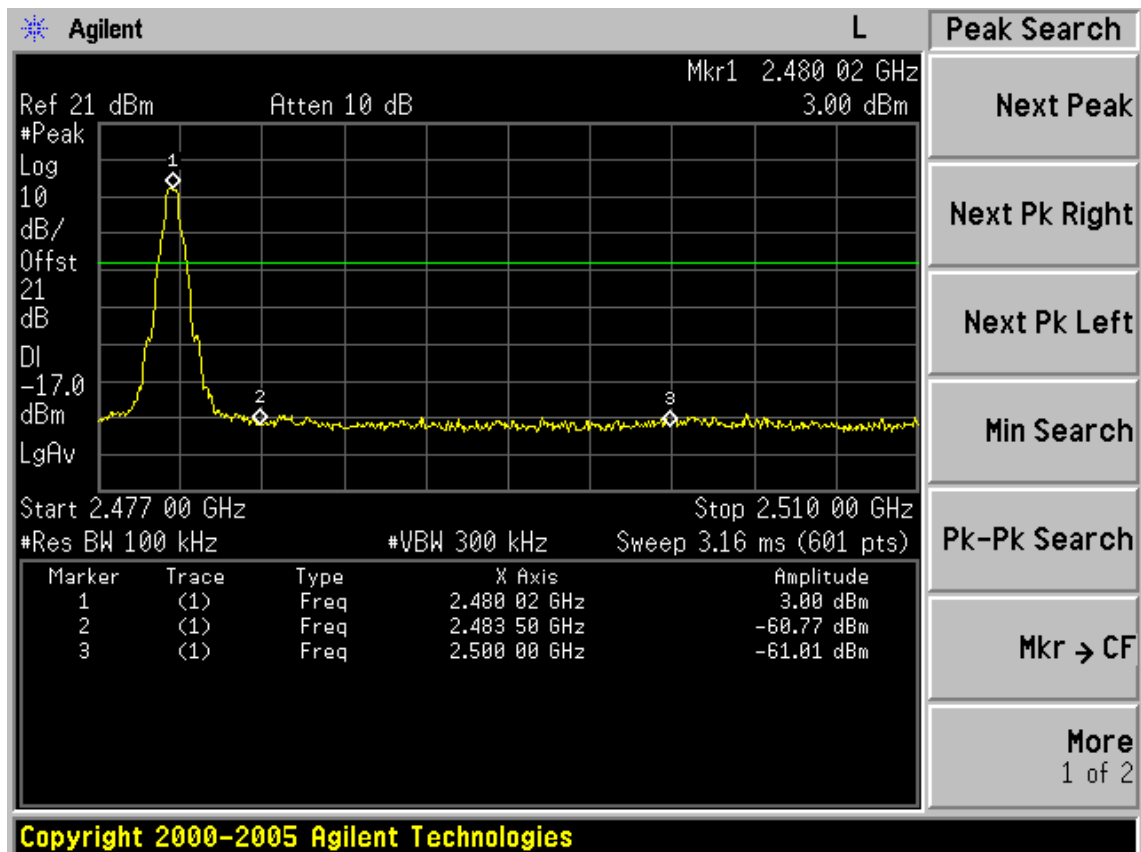

Hopping On

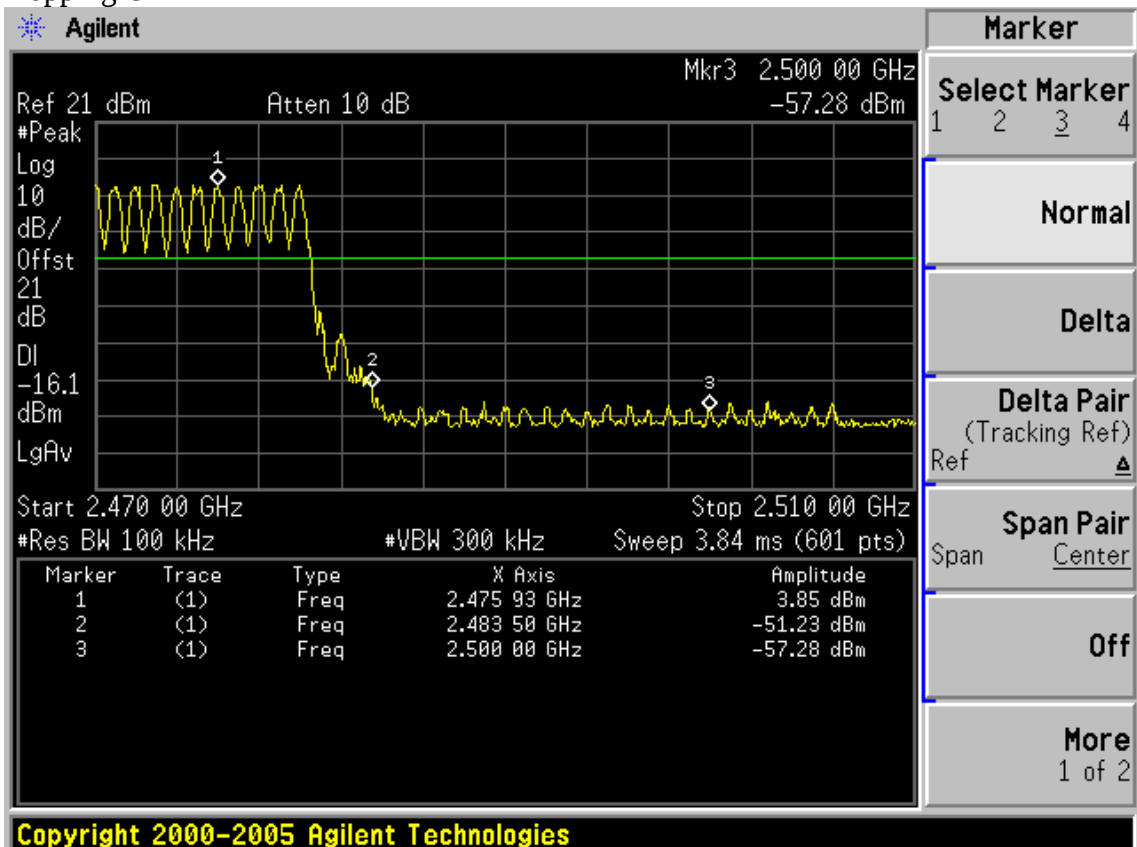

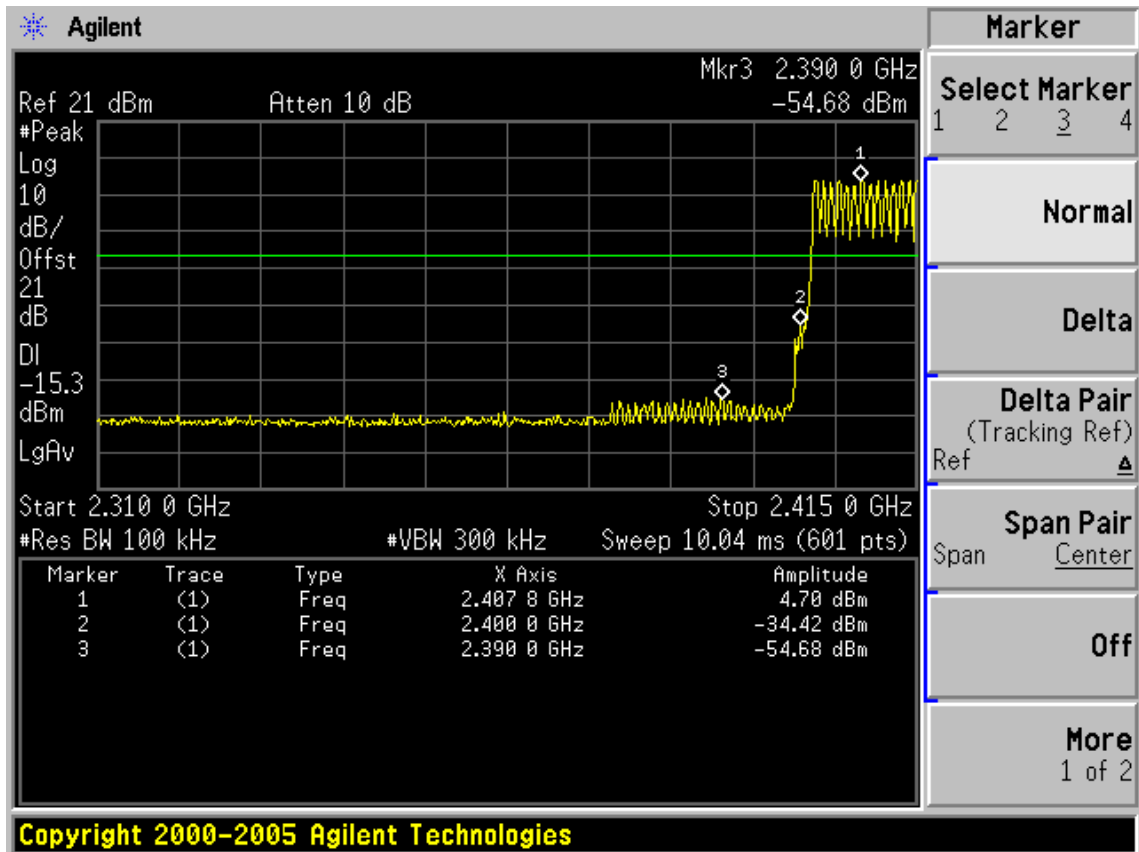

6. CARRIER FREQUENCY SEPARATION TEST

6.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08, 12	1 Year


6.2. Limit

Frequency hopping systems shall have hopping channel carrier frequency separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

6.3. Test Results.

EUT: Meta Watch		
M/N: SW12-2		
Test date: 2012-09-20	Pressure: 101 ± 1 kpa	Humidity: 51 ± 3 %
Tested by: Leo-Li	Test site: RF Site	Temperature : 24 ± 0.6 °C

Channel separation	Conclusion
1.00MHz	PASS

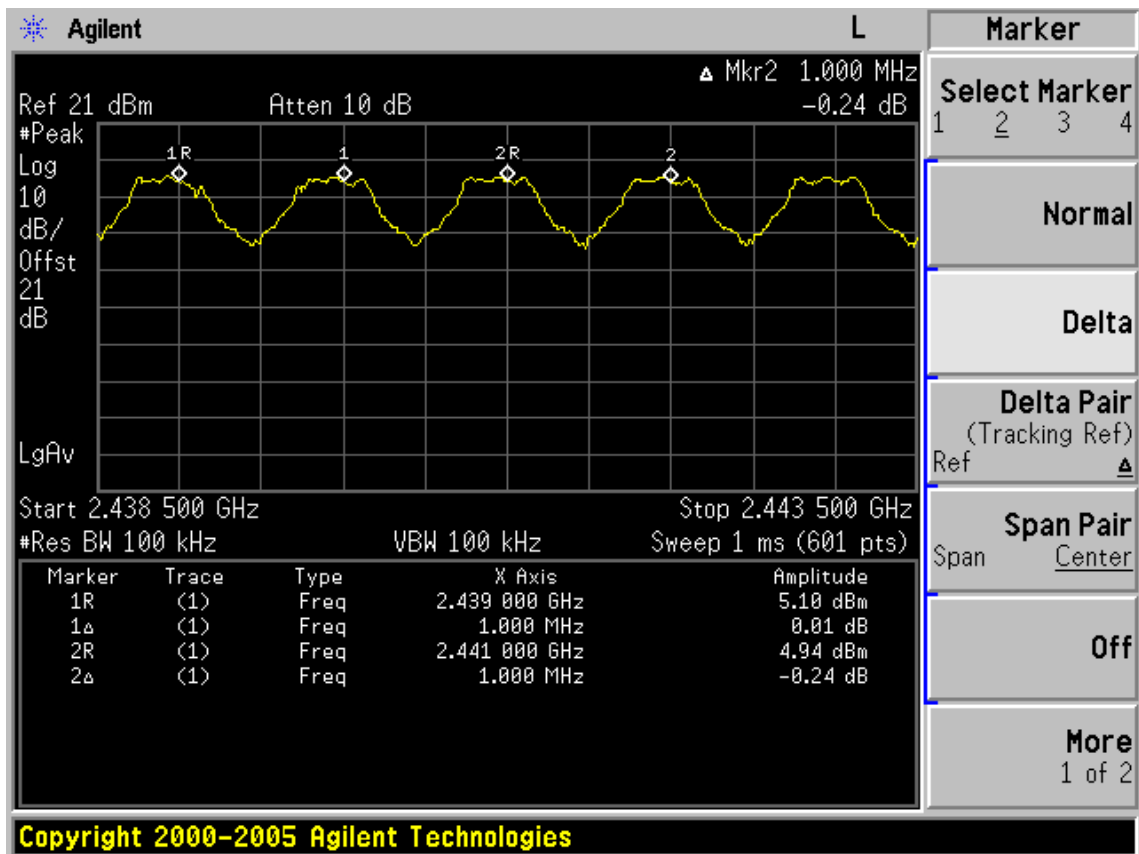

7. 20 DB BANDWIDTH TEST

7.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08,12	1 Year

7.2. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.


7.3. Test Results

EUT: Meta Watch		
M/N: SW12-2		
Test date: 2012-09-20	Pressure: 101 $\pm$ 1kpa	Humidity: 53.8 $\pm$ 3%
Tested by: Leo-Li	Test site: RF Site	Temperature : 24 $\pm$ 0.6 $^{\circ}$ C


Cable loss: 1.0 dB		Attenuator loss: 20 dB	
Test Mode	Frequency (MHz)	20dB bandwidth (KHz)	Limit (KHz)
GFSK	2402	962.086	N/A
	2441	958.134	N/A
	2480	955.339	N/A
Conclusion : PASS			


GFSK

CH0: 2402MHz

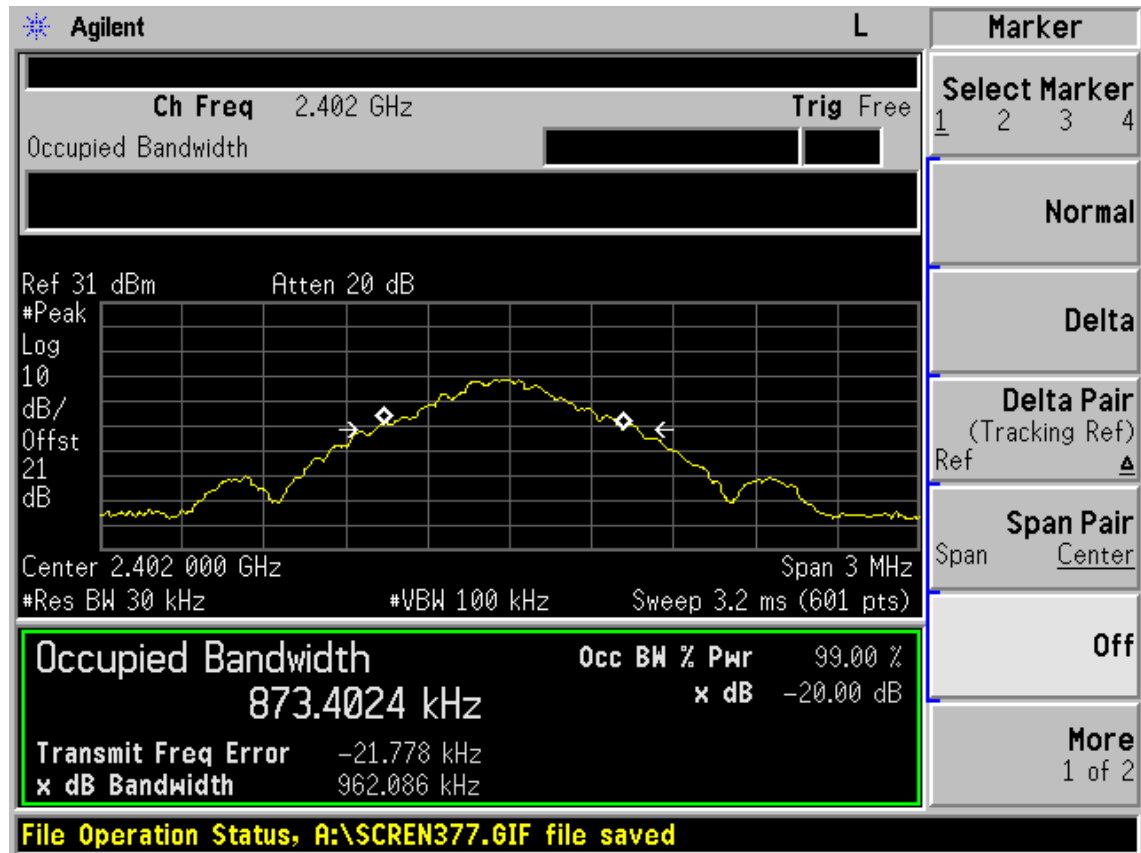

CH39: 2441MHz

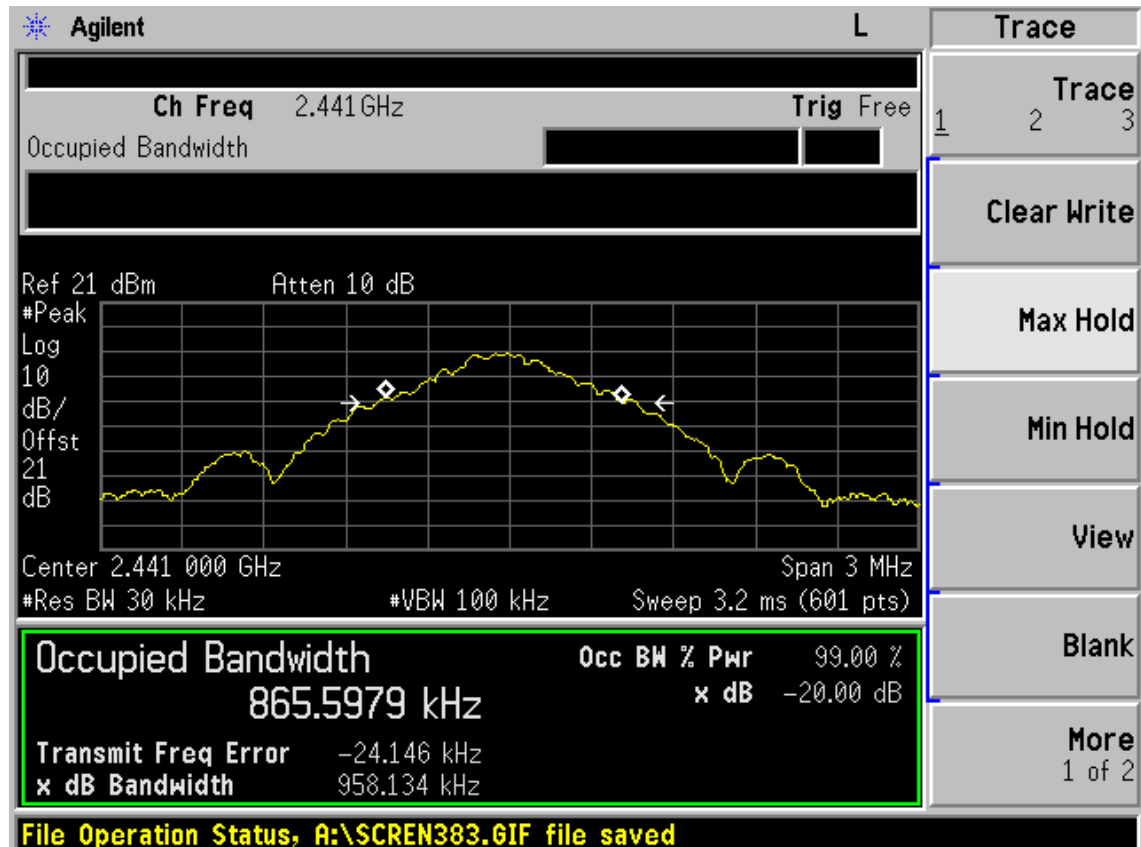

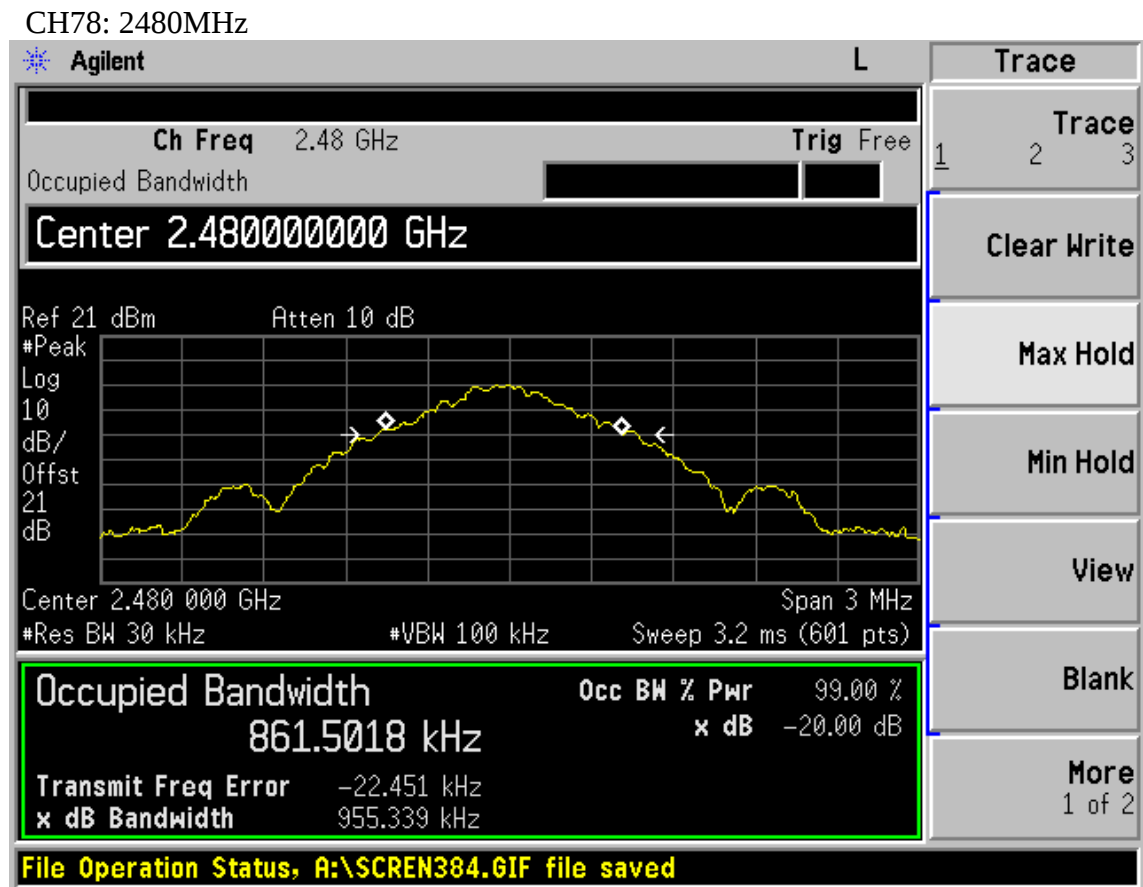

8. NUMBER OF HOPPING FREQUENCY TEST

8.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08, 12	1 Year



8.2. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

8.3. Test Results

EUT: Meta Watch		
M/N: SW12-2		
Test date: 2012-09-20	Pressure: 101±1 kpa	Humidity: 53.8 ±3%
Tested by: Leo-Li	Test site: RF Site	Temperature : 24 ±0.6 °C

Number of channel	Limit	Conclusion
79	>=15	PASS

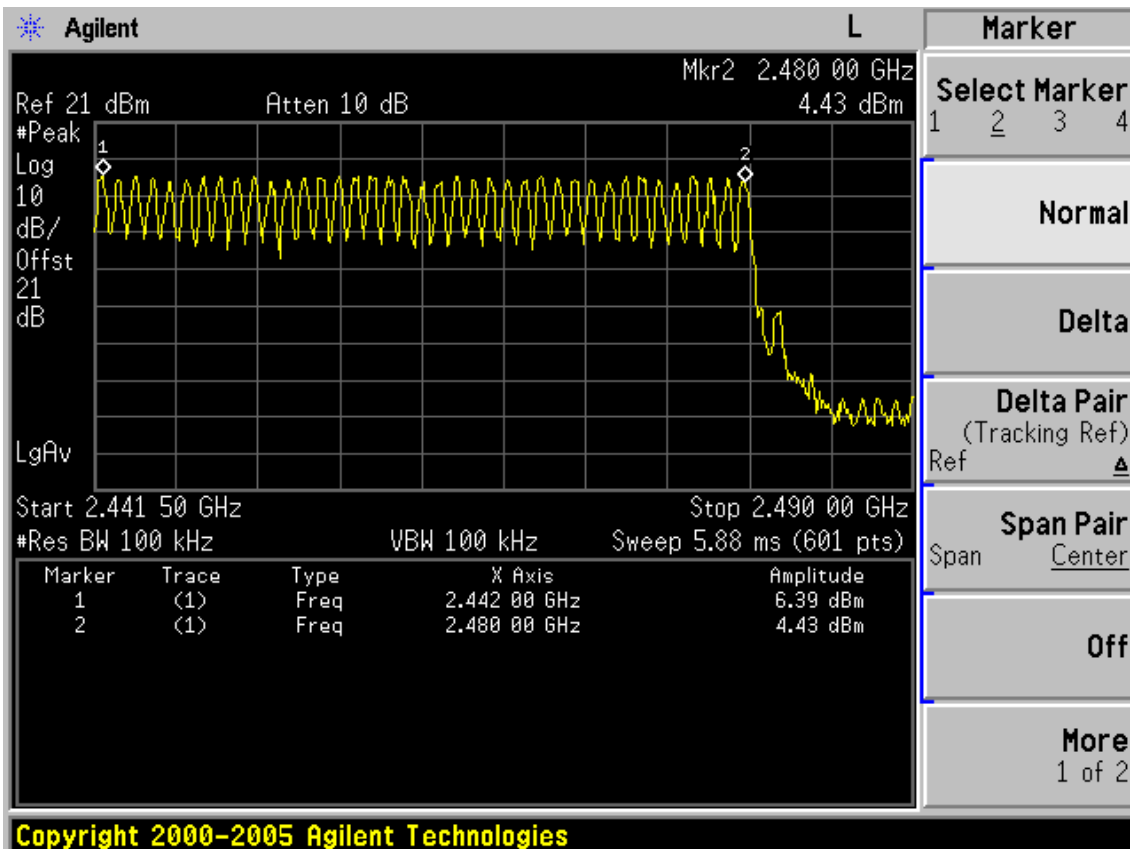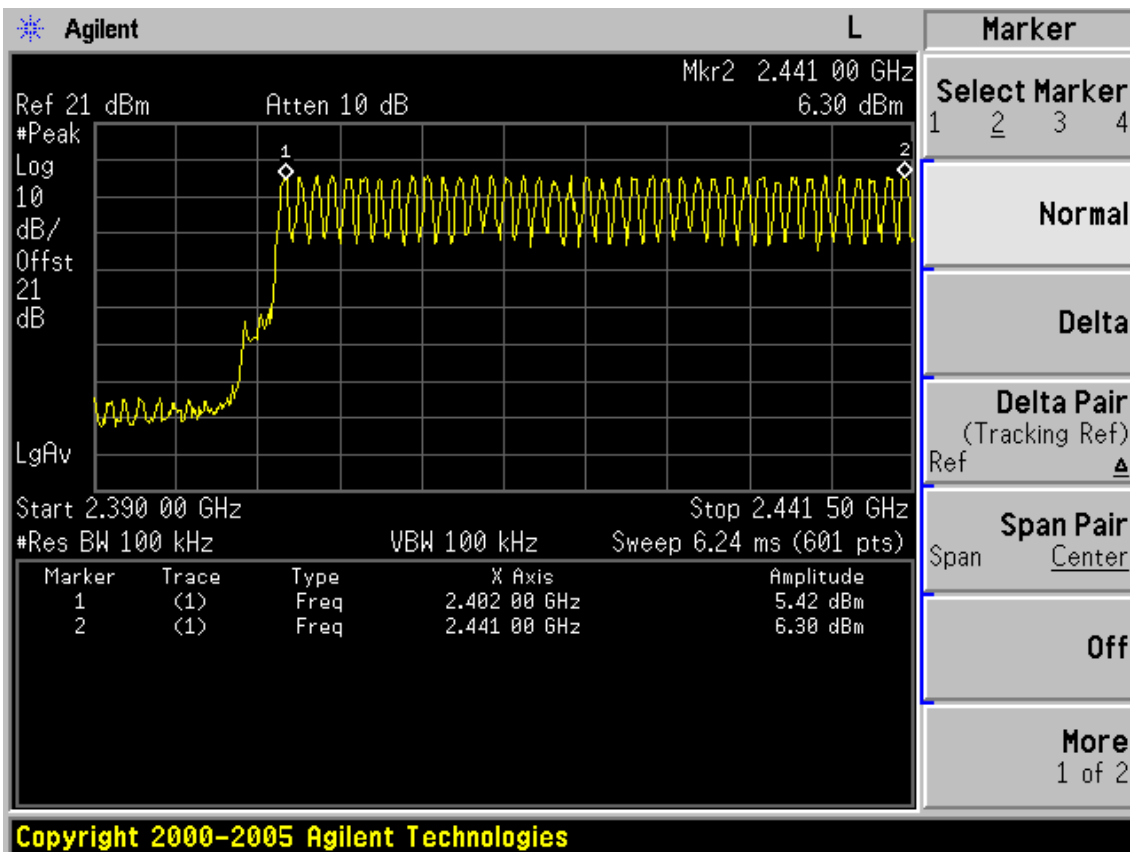

9. DWELL TIME

9.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08, 12	1 Year

9.2. Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

9.3. Test Results



EUT: Meta Watch		
M/N: SW12-2		
Test date: 2012-09-20	Pressure: 101 ± 1 kpa	Humidity: 51 ± 3 %
Tested by: Leo-Li	Test site: RF Site	Temperature : 24 ± 0.6 °C

Mode		Dwell time	Limit	Conclusion
GFSK	DH1	$51\text{hops}/5\text{s} * 0.4 * 79\text{channels} * 0.438\text{ms} = 141.176 \text{ ms}$	<400ms	PASS
	DH3	$25\text{hops}/5\text{s} * 0.4 * 79\text{channels} * 1.715\text{ms} = 270.970 \text{ ms}$	<400ms	PASS
	DH5	$17\text{hops}/5\text{s} * 0.4 * 79\text{channels} * 2.992\text{ms} = 321.460\text{ms}$	<400ms	PASS



Note: All the lower levels were signal from receiver's, and should not considered in here.

GFSK



DH 1

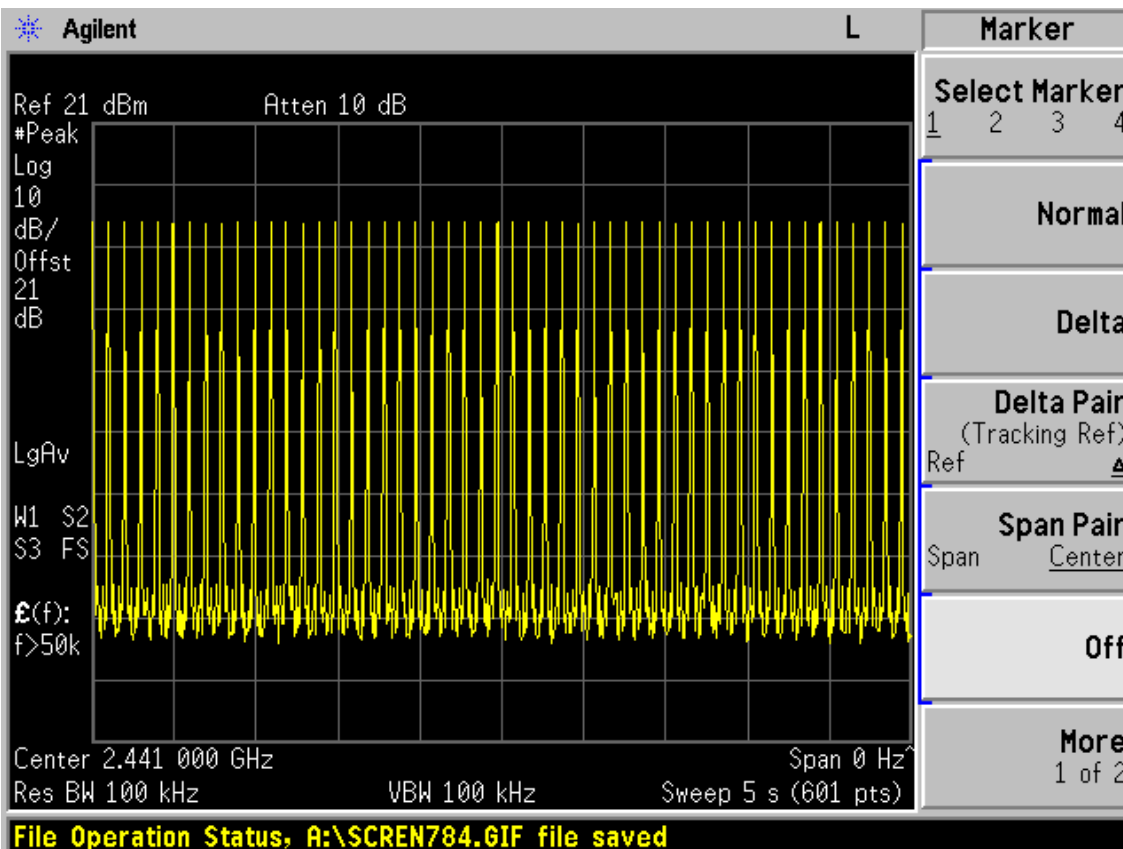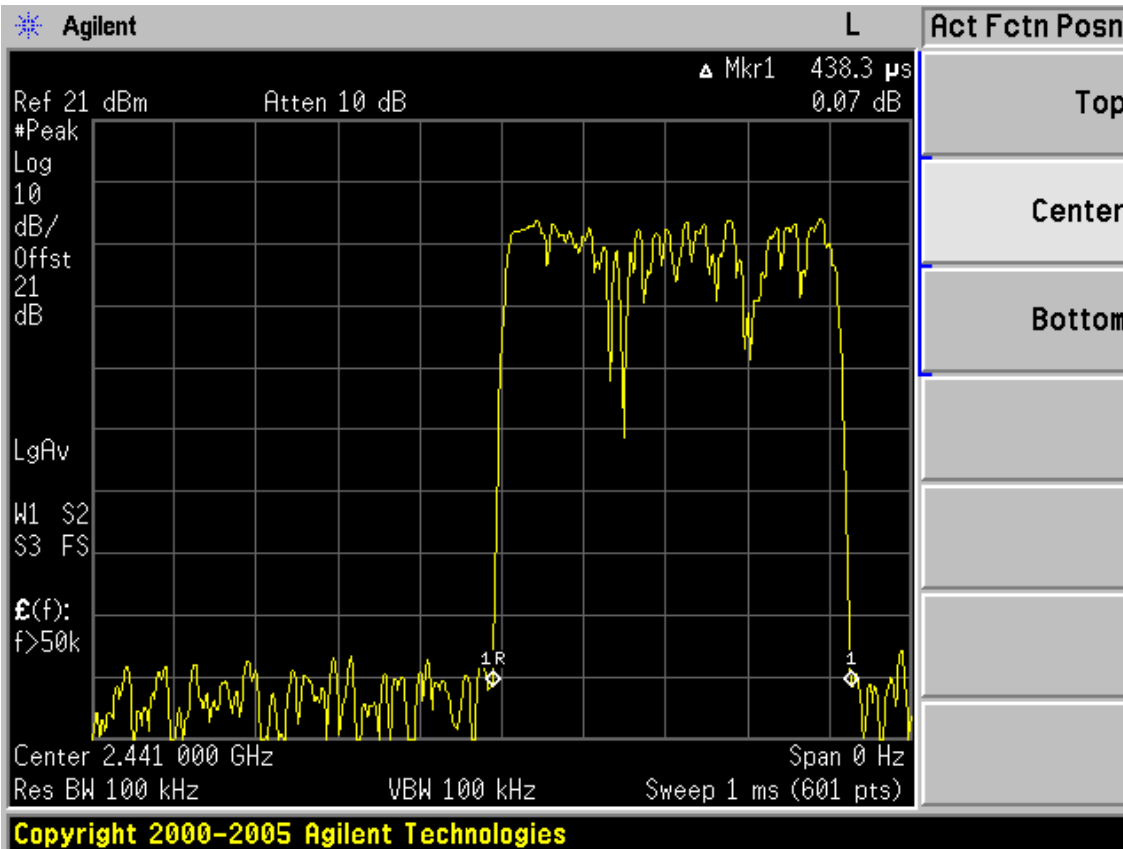

DH 3

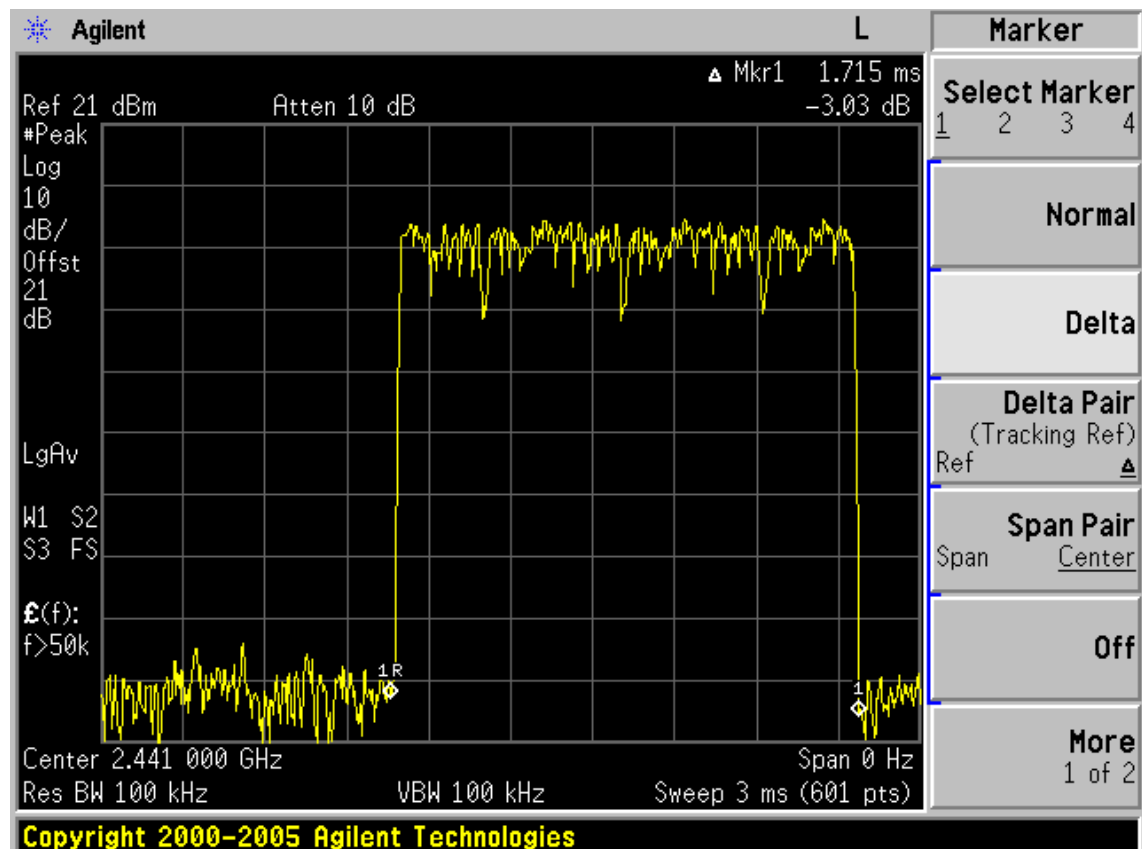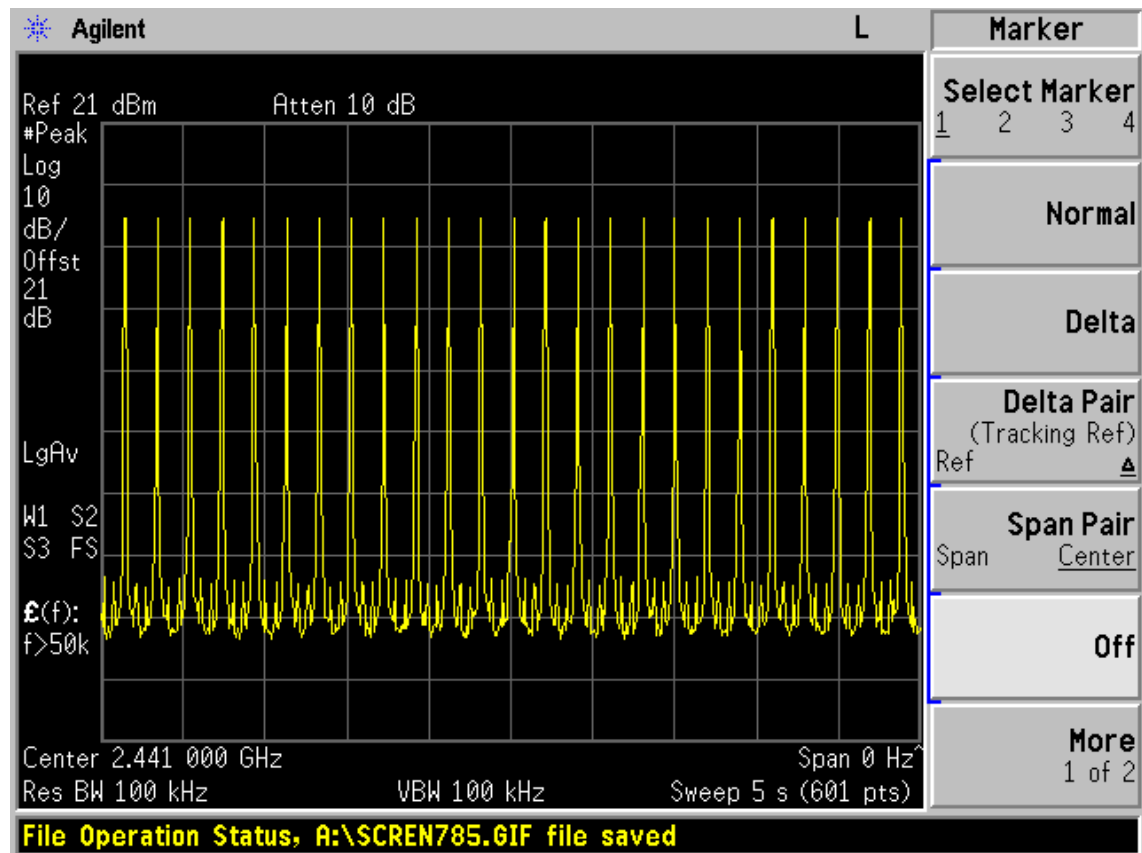

DH 5

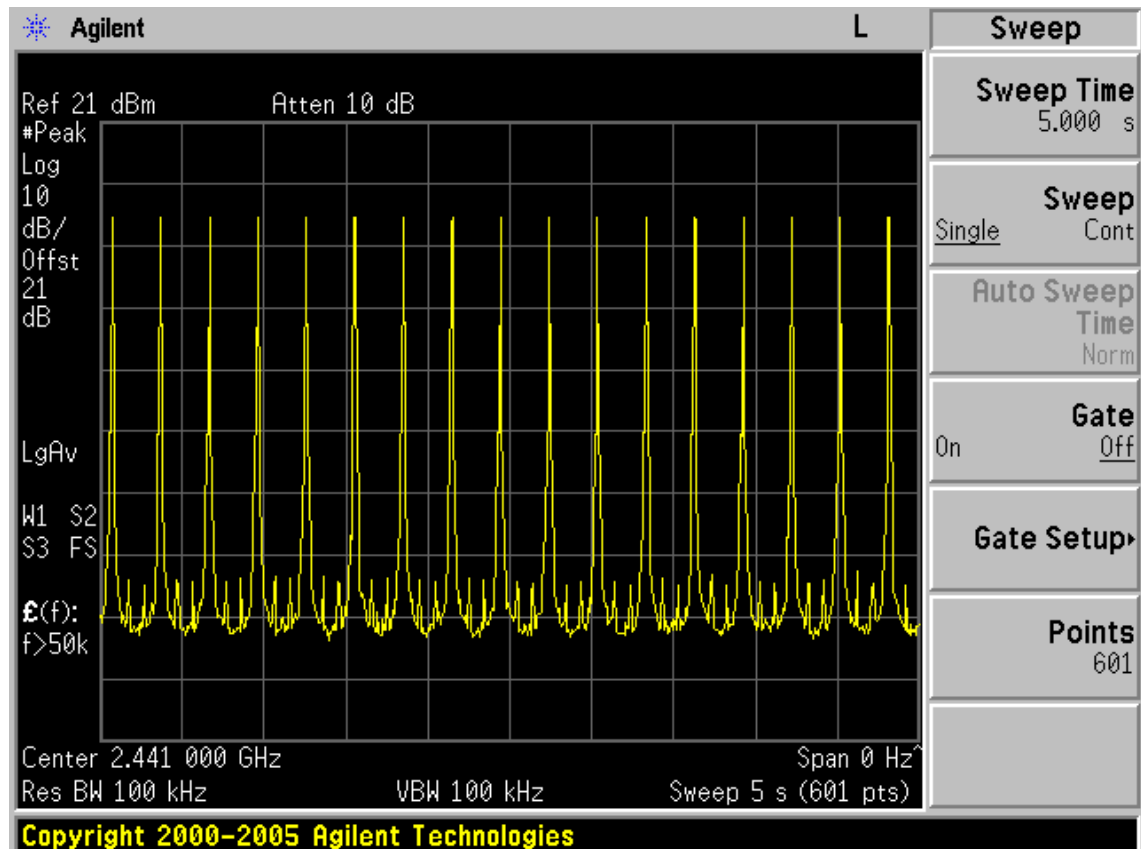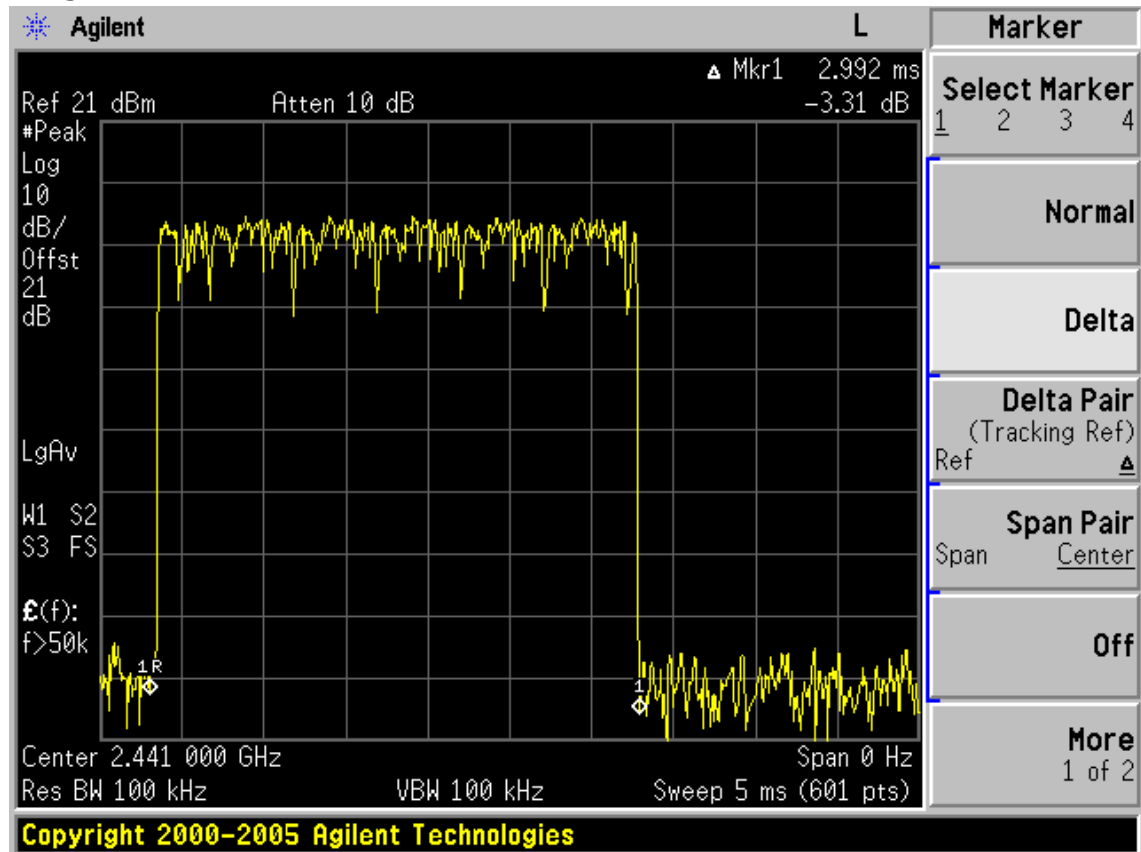

10. MAXIMUM PEAK OUTPUT POWER TEST

10.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4446A	US44300459	May.08, 12	1 Year
2.	Amp	HP	8449B	3008A08495	May.08, 12	1 Year
3.	Antenna	EMCO	3115	9510-4580	Nov.19, 11	1Year
4.	HF Cable	Hubersuhne	Sucoflex104	-	May.08, 12	1 Year
1.	Power Meter	Anritsu	ML2487A	6K00002472	May.08, 12	1Year
2.	Power Sensor	Anritsu	MA2491A	033005	May.08, 12	1Year

10.2. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

10.3. Test Procedure

1. Connected the EUT's antenna port to spectrum analyzer.
2. Set the RBW> Bandwidth of test Frequency and put the test Frequency, Set the Span large enough to capture the entire signal
3. Use a peak detector on max hold
4. Reading the value from the Spectrum analyzer

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

10.4.Test Results

EUT: Meta Watch			
M/N: SW12-2			
Test date: 2012-09-20		Pressure: 101±1 kpa	Humidity: 52 ±3%
Tested by: Leo-Li		Test site: RF site	Temperature: 24 ±0.6 °C
Cable loss: 1.0 dB		Attenuator loss: 20 dB	
Test Mode	Frequency (MHz)	Peak output Power (dBm)	Limit (dBm)
GFSK	2402	2.05	21
	2441	2.38	21
	2480	3.20	21
Conclusion: PASS			

11.BAND EDGE COMPLIANCE TEST

11.1.Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4446A	US44300459	May.08, 12	1 Year
2.	Amp	HP	8449B	3008A08495	May.08, 12	1 Year
3.	Antenna	EMCO	3115	9510-4580	Nov.19, 11	1Year
4.	HF Cable	Hubersuhne	Sucoflex104	-	May.08, 12	1 Year

11.2.Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

11.3.Test Produce

For upper band emissions that are up to two bandwidths(2MHz) away (2483.5MHz to 2485.5MHz) from the band-edge use below produce:

1. Choose a spectrum analyzer span that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set the analyzer RBW to 100KHz and with a video bandwidth 300KHz. Record the peak levels of the fundamental emission and the relevant band-edge emission, Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not a field strength measurement, it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.

2. Subtract the delta measured in step (1) from the maximum field strengths measured in clause 4 .The resultant field strengths are then used to determine band-edge compliance as required by Section 15.205


For emissions above two bandwidths away from the band-edge use below produce:

1. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upperband-edges of the emission:
 - (a) PEAK: RBW=1MHz ;VBW=3MHz, PK detector, Sweep=AUTO
 - (b)This device is pulse modulated, a duty cycle factor was used to calculate average level based measured peak level

11.4.Test Results

Pass (The testing data was attached in the next pages.)

Note: If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

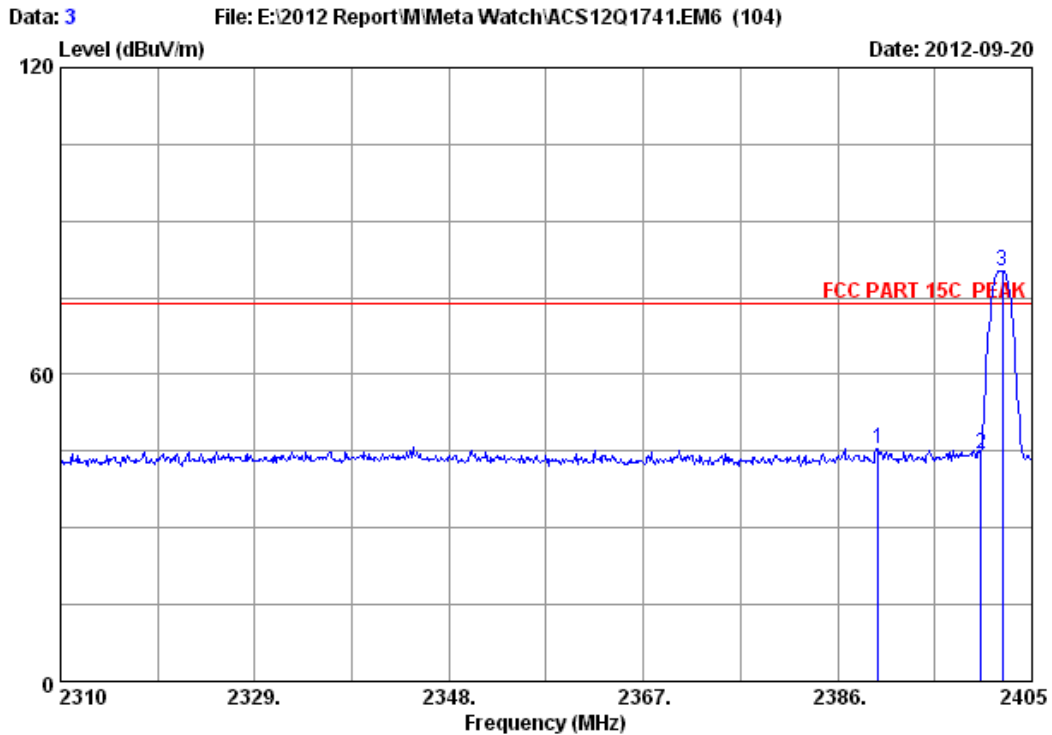


Site no. : 3m Chamber Data no. : 3
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Meta Watch
 Power supply : DC 5V From PC Input AC 120V/60Hz
 Test mode : BR(v2.1) GFSK 2402MHz Tx Mode
 M/N : SW12-2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	27.96	6.01	34.44	45.92	45.45	74.00	28.55	Peak
2	2400.000	27.96	6.01	34.44	44.99	44.52	74.00	29.48	Peak
3	2402.150	27.96	6.01	34.44	80.74	80.27	74.00	-6.27	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

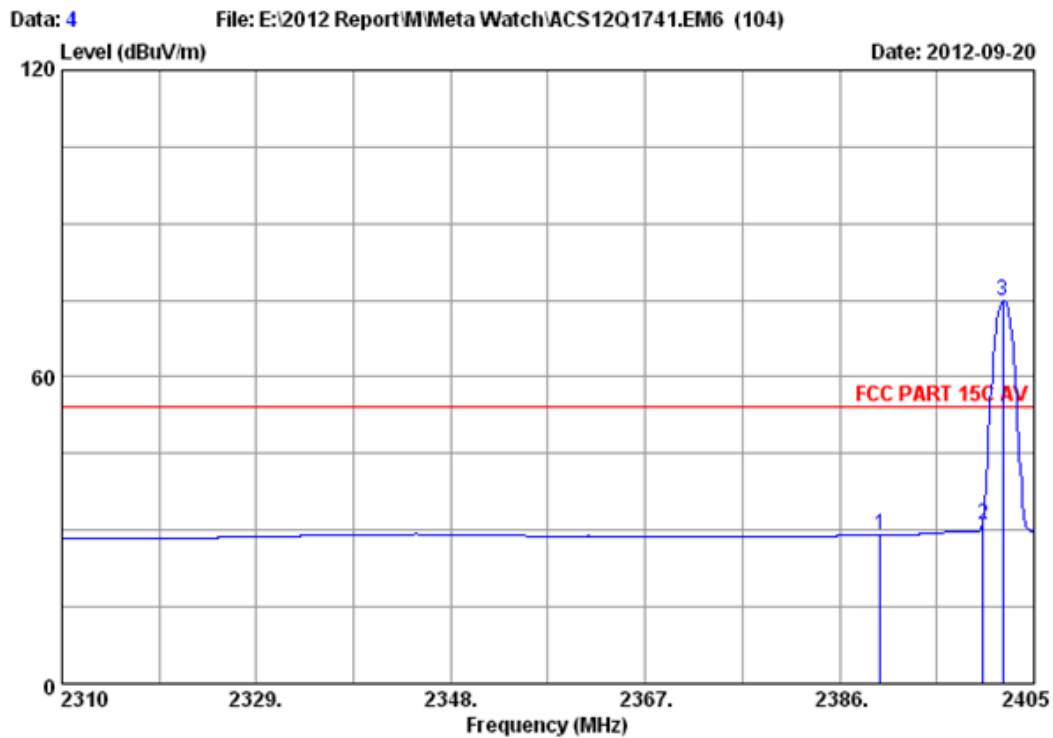


Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Meta Watch
 Power supply : DC 5V From PC Input AC 120V/60Hz
 Test mode : BR(v2.1) GFSK 2402MHz Tx Mode
 M/N : SW12-2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	26.70	6.00	35.92	32.41	29.19	54.00	24.81	Average
2	2400.000	26.76	6.02	35.92	34.38	31.24	54.00	22.76	Average
3	2401.960	26.77	6.02	35.92	77.90	74.77	54.00	-20.77	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

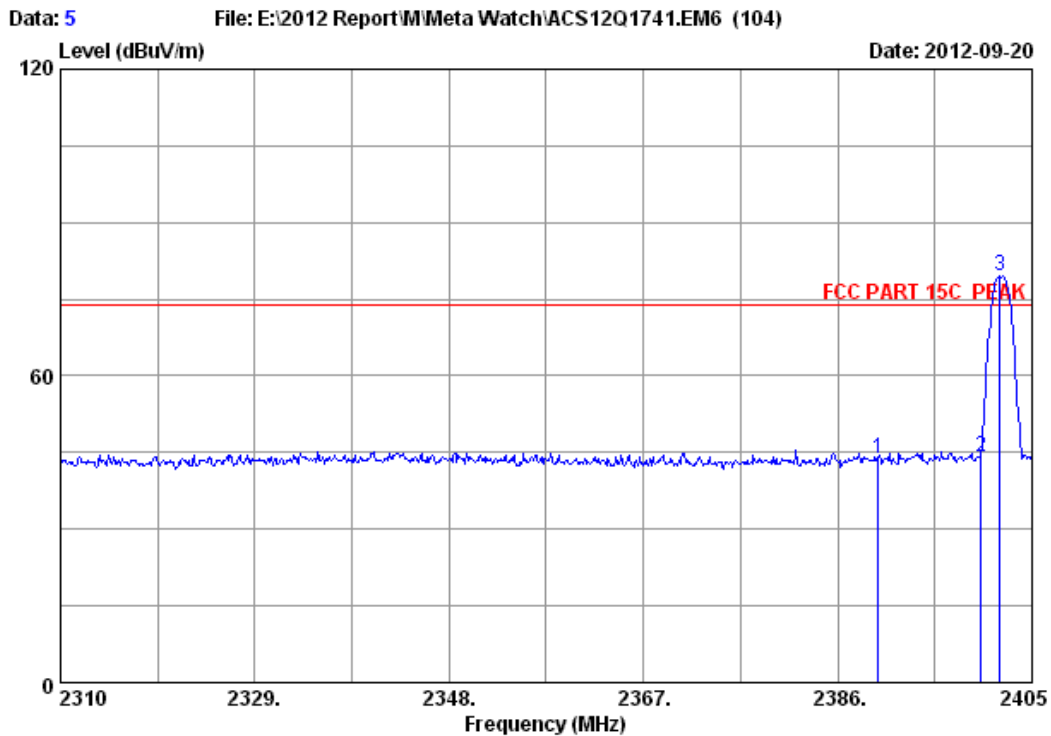


Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Meta Watch
 Power supply : DC 5V From PC Input AC 120V/60Hz
 Test mode : BR(v2.1) GFSK 2402MHz Tx Mode
 M/N : SW12-2

	Freq.	Ant.	Cable	Amp.		Emission			
	(MHz)	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2390.000	27.96	6.01	34.44	44.13	43.66	74.00	30.34	Peak
2	2400.000	27.96	6.01	34.44	44.59	44.12	74.00	29.88	Peak
3	2401.865	27.96	6.01	34.44	79.86	79.39	74.00	-5.39	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

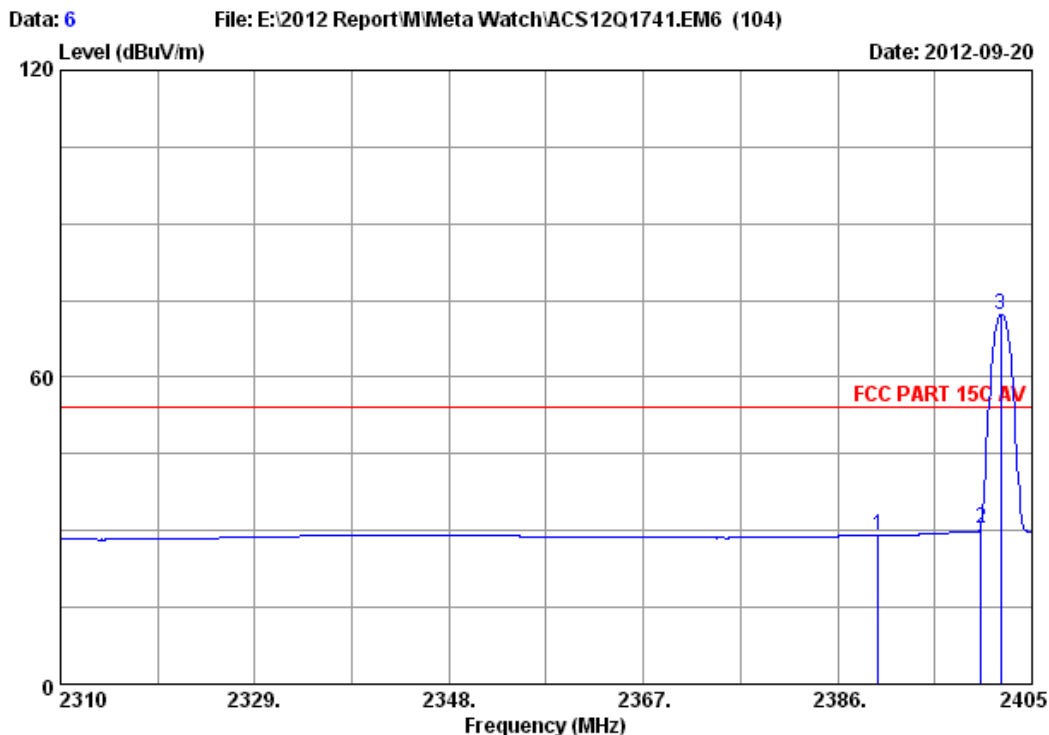


Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Meta Watch
 Power supply : DC 5V From PC Input AC 120V/60Hz
 Test mode : BR(v2.1) GFSK 2402MHz Tx Mode
 M/N : SW12-2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	26.70	6.00	35.92	32.37	29.15	54.00	24.85	Average
2	2400.000	26.76	6.02	35.92	33.68	30.54	54.00	23.46	Average
3	2401.960	26.77	6.02	35.92	75.43	72.30	54.00	-18.30	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

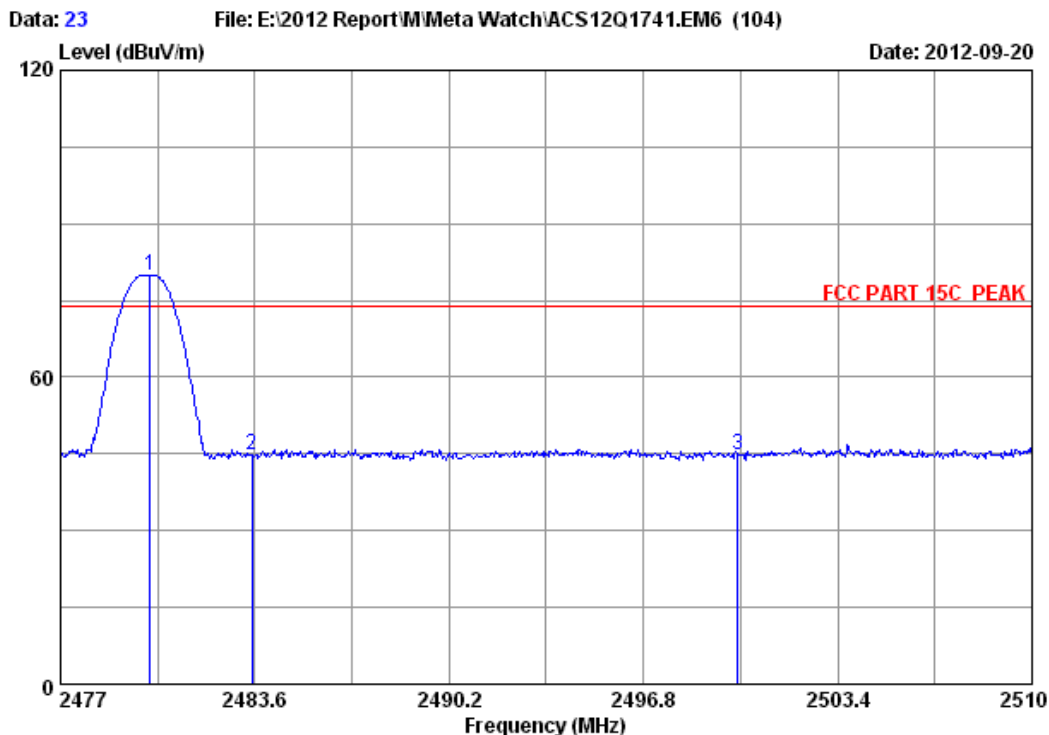


Site no. : 3m Chamber Data no. : 23
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Meta Watch
 Power supply : DC 5V From PC Input AC 120V/60Hz
 Test mode : BR(v2.1) GFSK 2480MHz Tx Mode
 M/N : SW12-2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.036	28.08	6.15	34.45	80.17	79.95	74.00	-5.95	Peak
2	2483.500	28.08	6.15	34.45	44.91	44.69	74.00	29.31	Peak
3	2500.000	28.10	6.18	34.45	44.99	44.82	74.00	29.18	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

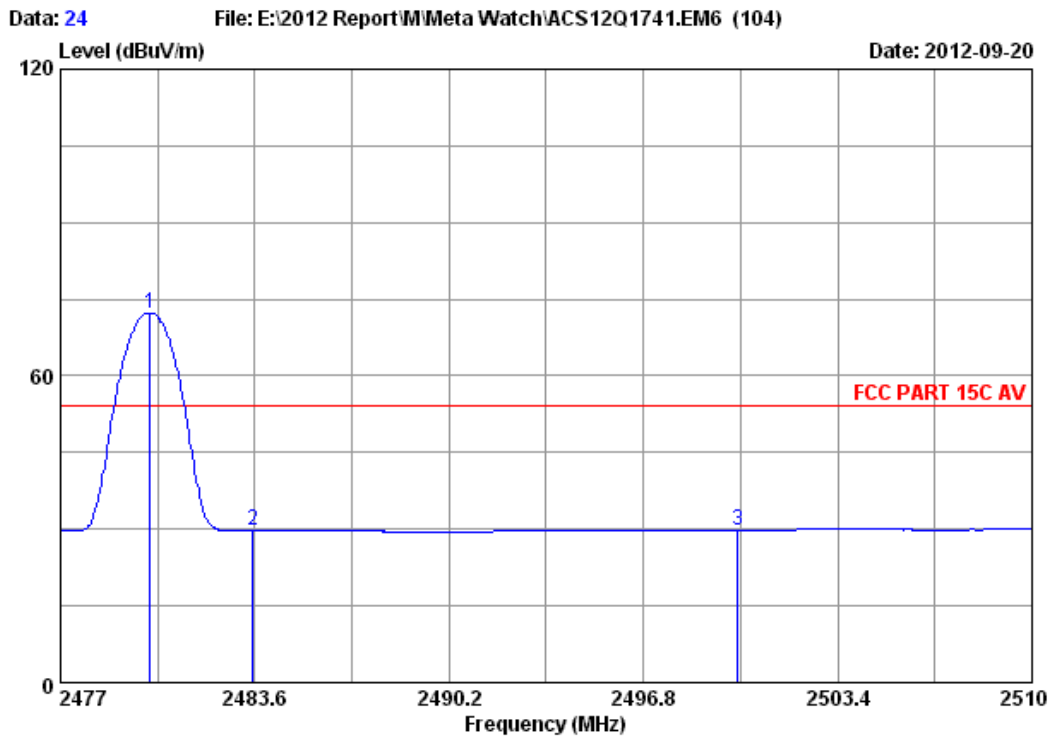


Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Meta Watch
 Power supply : DC 5V From PC Input AC 120V/60Hz
 Test mode : BR(v2.1) GFSK 2480MHz Tx Mode
 M/N : SW12-2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.036	27.27	6.15	35.92	74.86	72.36	54.00	-18.36	Average
2	2483.530	27.29	6.16	35.92	32.15	29.68	54.00	24.32	Average
3	2500.000	27.40	6.19	35.93	32.02	29.68	54.00	24.32	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

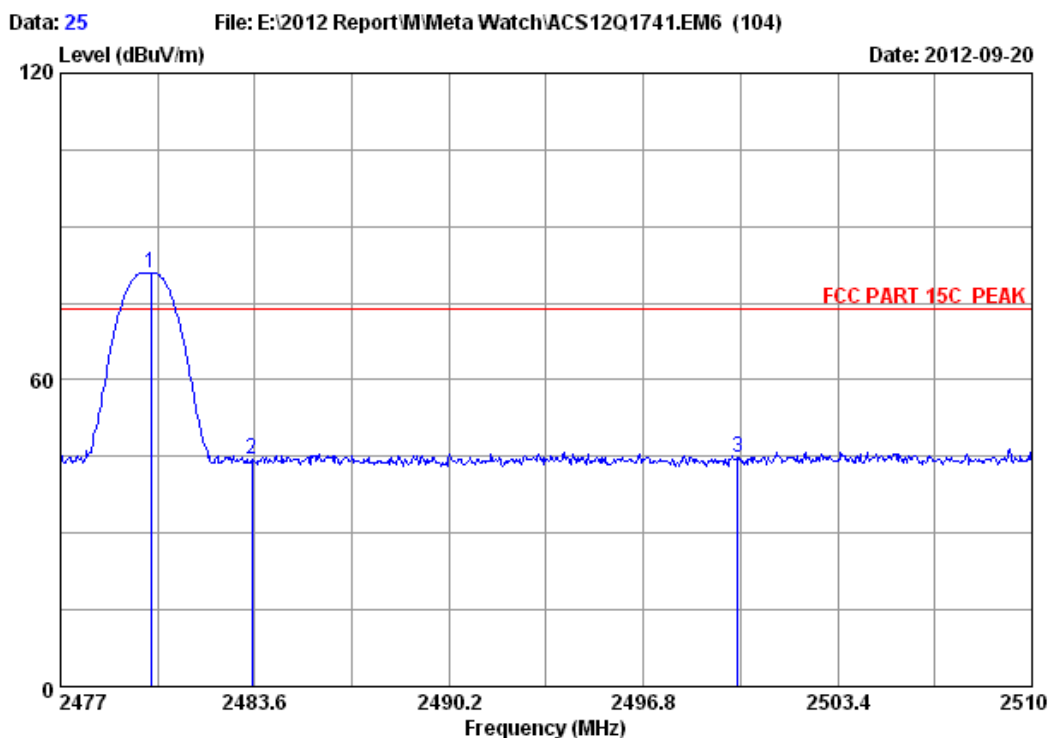


Site no. : 3m Chamber Data no. : 25
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Meta Watch
 Power supply : DC 5V From PC Input AC 120V/60Hz
 Test mode : BR(v2.1) GFSK 2480MHz Tx Mode
 M/N : SW12-2

	Freq.	Ant.	Cable	Amp.		Emission			
	(MHz)	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2480.069	28.08	6.15	34.45	81.18	80.96	74.00	-6.96	Peak
2	2483.500	28.08	6.15	34.45	44.82	44.60	74.00	29.40	Peak
3	2500.000	28.10	6.18	34.45	44.84	44.67	74.00	29.33	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

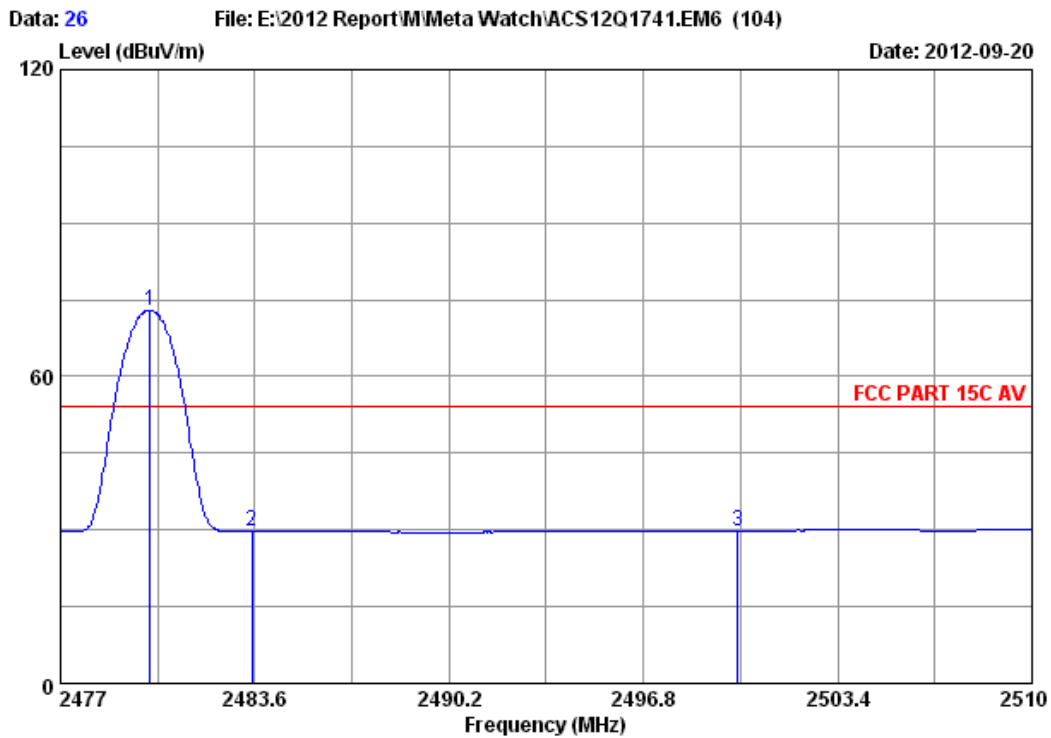

Site no. : 3m Chamber Data no. : 26
 Dis. / Ant. : 3m 2012 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : Meta Watch
 Power supply : DC 5V From PC Input AC 120V/60Hz
 Test mode : BR(v2.1) GFSK 2480MHz Tx Mode
 M/N : SW12-2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.036	27.27	6.15	35.92	75.43	72.93	54.00	-18.93	Average
2	2483.500	27.29	6.16	35.92	32.15	29.68	54.00	24.32	Average
3	2500.000	27.40	6.19	35.93	32.03	29.69	54.00	24.31	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

12.DEVIATION TO TEST SPECIFICATIONS

[NONE]