

FCC TEST REPORT

for

47 CFR, Part 15, Subpart C

Equipment : Wireless Desktop (Keyboard)

Model No. : PT-2002-K3I, KBR-37

FCC ID : O3L-PT-02-K3I

Filing Type : Certification

Applicant : **Paten Wireless Technology Inc.**
4F, No. 50, Lane. 10, Jihu Road,
Neihu, Taipei 114, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Table of Contents

History of this test report	ii
CERTIFICATE OF COMPLIANCE.....	1
1. General Description of Equipment under Test	2
1.1. Applicant.....	2
1.2. Manufacturer.....	2
1.3. Basic Description of Equipment under Test.....	2
1.4. Feature of Equipment under Test.....	3
2. Test Configuration of Equipment under Test	4
2.1. Test Manner	4
2.2. Description of Test System	4
2.3. Band edge compliance plot per 15.227(b).....	6
Horizontal.....	6
2.4. Connection Diagram of Test System.....	7
3. General Information of Test	8
3.1. Test Facility	8
3.2. Standard for Methods of Measurement.....	8
3.3. Test in Compliance with.....	8
3.4. Frequency Range Investigated.....	8
3.5. Test Distance.....	8
4. Test of Conducted Powerline.....	9
5. Test of Radiated Emission	10
5.1. Major Measuring Instruments.....	10
5.2. Test Procedures	11
5.3. Typical Test Setup Layout of Radiated Emission	12
5.4. Test Result of Radiated Emission	13
6. EMI Suppression Component List.....	15
7. Antenna Factor & Cable Loss	16
8. List of Measuring Equipments Used	17
9. Uncertainty of Test Site.....	18
Appendix A. Photographs of EUT	A1 ~ A5

History of this test report

Original Report Issue Date: Oct. 7, 2002

☒ No additional attachment.

☐ Additional attachment were issued as following record :

Attachment No.	Issue Date	Description

CERTIFICATE OF COMPLIANCE

for

47 CFR, Part 15, Subpart C

Equipment : Wireless Desktop (Keyboard)

Model No. : PT-2002-K3I, KBR-37

FCC ID : O3L-PT-02-K3I

Applicant : **Paten Wireless Technology Inc.**
4F, No. 50, Lane. 10, Jihu Road,
Neihu, Taipei 114, Taiwan, R.O.C.

I **HEREBY** CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 1992** and the energy emitted by this equipment was **passed** both radiated and conducted emission limits. Testing was carried out on Aug. 9, 2002 at **SPORTON International Inc.** LAB. in Kwei-Shan.


K. J. Lin
Manager

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1. General Description of Equipment under Test

1.1. Applicant

Paten Wireless Technology Inc.
4F, No. 50, Lane. 10, Jihu Road,
Neihu, Taipei 114, Taiwan, R.O.C.

1.2. Manufacturer

WEI FU Mold Plastic & Metal Factory
Da-Ning Industrial Zone Humen
Dongguan Guangdong, CHINA

1.3. Basic Description of Equipment under Test

Equipment	: Wireless Desktop (Keyboard)
Model No.	: PT-2002-K3I, KBR-37
FCC ID	: O3L-PT-02-K3I
Trade Name	: Paten, Acer
Power Supply Type	: 3 VDC From Battery
Power Cord	: N/A

1.4. Feature of Equipment under Test

1. 1 Channel (With Multi Task, Paten's Patent)
2. Security ID: 256 Sets
3. Cordless Technology: Radio Frequency (TDMA technology)
4. Carry Frequency: 27.145MHZ
5. Modulation Mode: FSK (Frequency Shift Key)
6. Transfer Rate: 10 kbps
7. Input Power: 3VDC (2*AAA)
8. Power Consumption: 10 mA
9. RF Power: 500uv/m at 3m
10. Switch Activation Mechanism: Membrane
11. Indicator LED: 1 LED (Red, Blinking)
12. Operation Switch: 1 Link Switch (Tact switch)
13. Effective Distance: 2 M
14. Battery Life: 6 Months

2. Test Configuration of Equipment under Test

2.1. Test Manner

- a. The EUT has been configured and operated pursuant to ANSI C63.4-1992 in a manner which tended to maximize its emission characteristics in a typical application.
- b. Frequency range investigated: conduction 450 KHz to 30 MHz, radiation 30 MHz to 1000MHz.
- c. The test system has been included the HP PC, REALsync Monitor, HP Printer, ACEEX Modem, PATEN Mouse, PATEN Receiver and EUT for EMI test.

2.2. Description of Test System

Support Unit 1. -- Personal Computer (HP)

FCC ID	: N/A
Model No.	: DTPC-22
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0039
Data Cable	: Shielded, 360 degree via metal back shells
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 2. -- Monitor (REALsync)

FCC ID	: N/A
Model No.	: DJ72
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0023
Data Cable	: Shielded, 360 degree via metal back shells, 1.7m
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 3. -- Mouse (PATEN)

FCC ID	: N/A
Model No.	: PT-2002-MO
Serial No.	: N/A

Support Unit 4. -- Printer (HP)

FCC ID	: B94C2642X
Model No.	: DJ 400
Power Supply Type	: Linear
Power Cord	: Non-Shielded
Serial No.	: SP0048
Data Cable	: Shielded, 360 degree via metal back shells, 1.35m

Support Unit 5. -- Modem (ACEEX)


FCC ID	: IFAXDM1414
Model No.	: DM1414
Power Supply Type	: Linear
Power Cord	: Non-Shielded
Serial No.	: SP0015
Data Cable	: Shielded, 360 degree via metal back shells, 1.15m

Support Unit 6. -- Receiver (PATEN)

FCC ID	: N/A
Model No.	: PT-2002-RLPJ
Serial No.	: N/A

2.3. Band edge compliance plot per 15.227(b).


Vertical

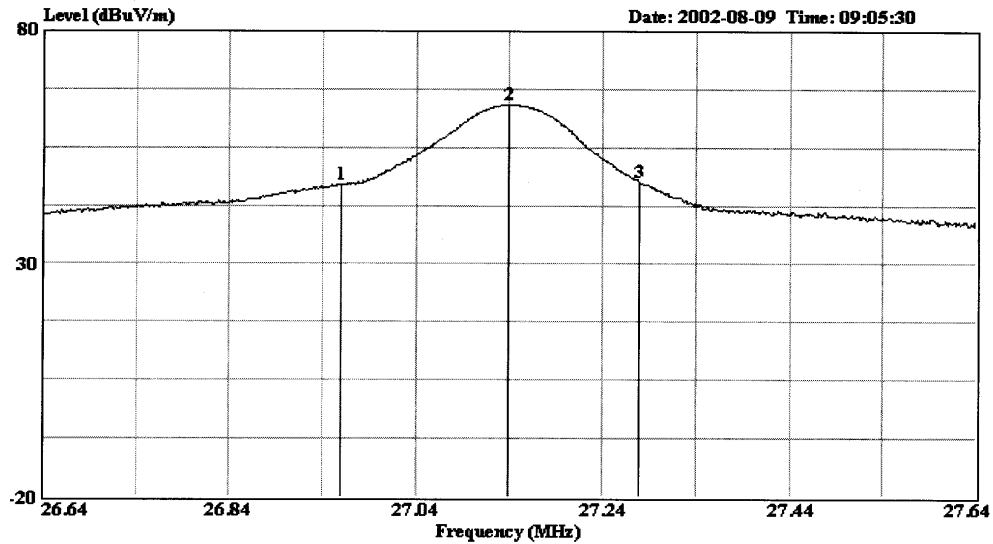

Mark 1 : 26.96MHz 32.99dBuV/m

Mark 3 : 27.28MHz 33.46dBuV/m

Horizontal

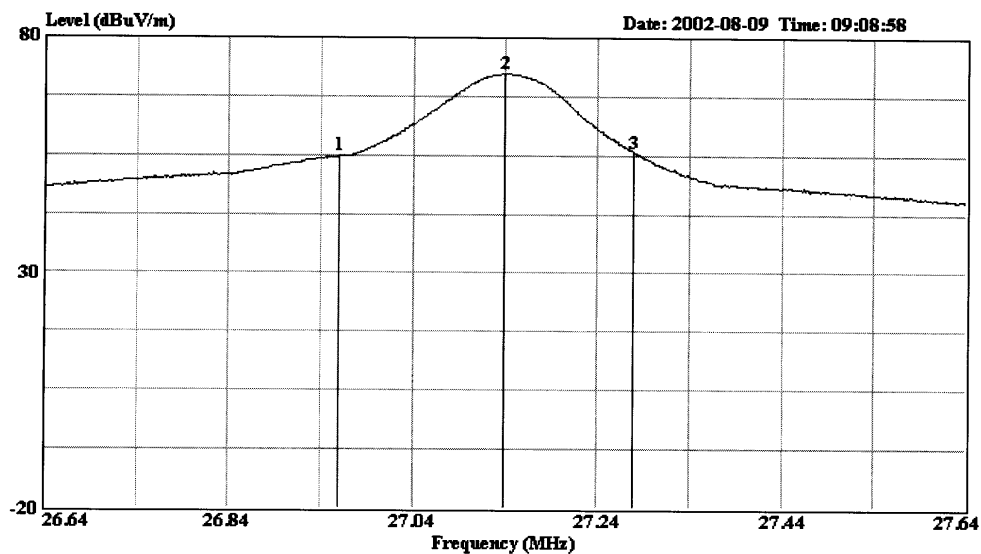


Mark 1 : 26.96MHz 40.84dBuV/m

Mark 2 : 27.28MHz 41.65dBuV/m

Conformation of the fundamental frequency

2.4. Connection Diagram of Test System

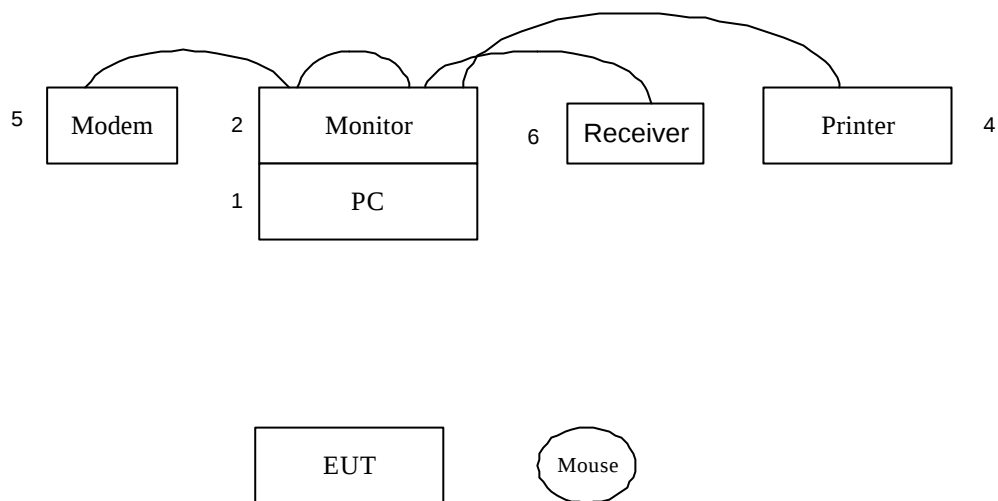

1. The I/O cable is connected from PC to the support unit 2.
2. The I/O cable is connected from PC to the support unit 4.
3. The I/O cable is connected from PC to the support unit 5.
4. The I/O cable is connected from PC to the support unit 6.

3. General Information of Test

3.1. Test Facility

This test was carried out by SPORTON International Inc.

Test Site Location : No. 30-2, Lin 6, Diing-Fwu Tsuen, Lin-Kou-Hsiang,
Taipei Hsien, Taiwan, R.O.C.

TEL : 886-2-2601-1640

FAX : 886-2-2601-1695

Test Site No : SH03

3.2. Standard for Methods of Measurement

ANSI C63.4-1992

3.3. Test in Compliance with

FCC Part 15, Subpart C

3.4. Frequency Range Investigated

Radiation : from 30 MHz to 1 GHz

3.5. Test Distance

The test distance of radiated emission from antenna to EUT is 3 M.

4. Test of Conducted Powerline

The power supply of the EUT is from battery.

So the conducted powerline test is not applicable to the EUT.

5. Test of Radiated Emission

Radiated emissions from 30 MHz to 1 GHz were measured with a bandwidth of 120 kHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in section 5.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

5.1. Major Measuring Instruments


5.1.1. from 30MHz to 1GHz

- Amplifier (ADVANTEST BB525C)
Attenuation 10 dB
RF Gain 30 dB
Signal Input 9 KHz to 3 GHz
- Spectrum Analyzer (RAHDE&SCHEARZ & FSP7)
Attenuation 10 dB
Start Frequency 30 MHz
Stop Frequency 1000 MHz
Resolution Bandwidth 120 KHz
Signal Input 9 KHz to 7 GHz

5.2. Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.

5.3. Typical Test Setup Layout of Radiated Emission

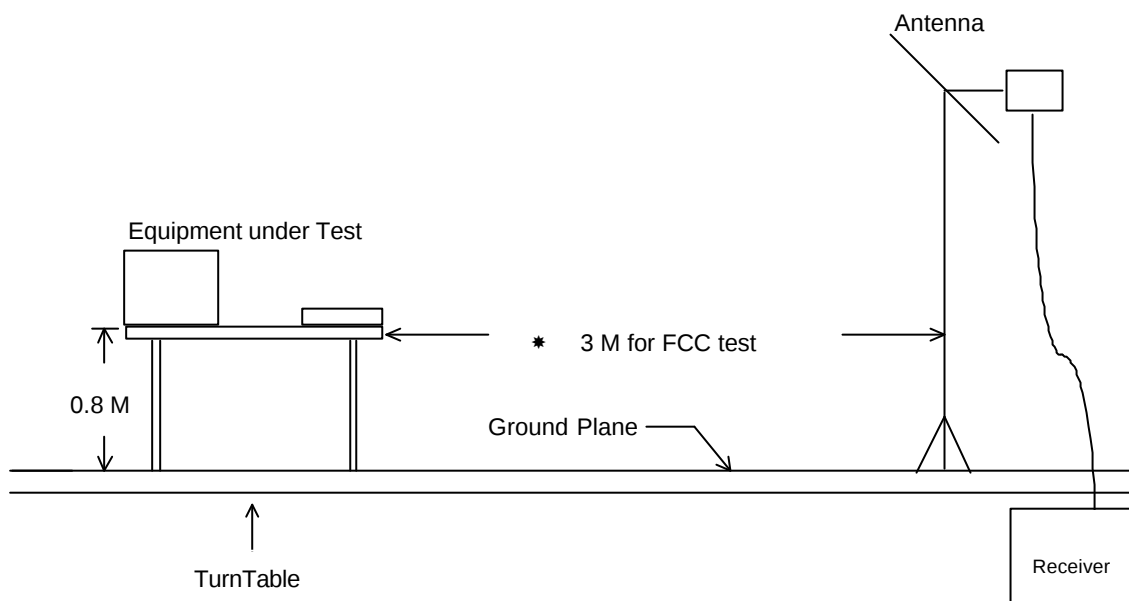

5.4. Test Result of Radiated Emission

- Test Distance : 3 M
- Temperature : 26°C
- Relative Humidity : 65 %
- Test Date : August 9, 2002
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission Level

The Radiated Emission test was passed at minimum margin

108.30 MHz / 40.15 dBuV/m (HORIZONTAL) Antenna Height 2 Meter, Turntable Degree 161 °.


- Spurious Emissions:

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits (dBuV/m)	(uV/m)	Emission Level (dBuV/m) (uV/m)		Margin (dB)	Detect Mode
54.30	V	6.59	1.32	41.26	40.00	100	18.46	8.38	-21.54	Peak
81.30	V	7.27	1.63	41.30	40.00	100	19.52	9.46	-20.48	Peak
108.30	V	11.14	1.90	52.96	43.50	150	35.42	59.02	-8.08	Peak
135.57	V	10.69	2.08	42.73	43.50	150	25.04	17.86	-18.46	Peak
162.57	V	9.14	2.29	38.26	43.50	150	19.23	9.15	-24.27	Peak
189.57	V	8.80	2.51	54.60	43.50	150	35.45	59.22	-8.05	Peak
54.30	H	6.59	1.32	50.58	40.00	100	27.78	24.50	-12.22	Peak
81.30	H	7.27	1.63	46.08	40.00	100	24.30	16.40	-15.70	Peak
108.30	H	11.14	1.90	57.69	43.50	150	40.15	101.74	-3.35	Peak
135.37	H	10.69	2.08	50.92	43.50	150	33.23	45.87	-10.27	Peak
162.57	H	9.14	2.29	44.87	43.50	150	25.84	19.59	-17.66	Peak
189.57	H	8.80	2.51	57.17	43.50	150	38.02	79.60	-5.48	Peak

• Field strength of fundamental and harmonics

Frequency	Antenna	Cable	Reading	Limits		Emission Level		Margin	Detect	
(MHz)	Polarity	Factor (dB/m)	Loss (dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode
27.140	H	15.40	0.93	72.25	80.00	10000	58.27	819.407	-21.73	Peak
27.140	V	15.40	0.93	64.22	80.00	10000	50.24	325.087	-29.76	Peak

Test Engineer :



Wayne Hsu

6. EMI Suppression Component List

⇒No EMI suppression components.

7. Antenna Factor & Cable Loss

Frequency (Mhz)	Antenna Factor (dB)	Cable Loss (dB)
30	18.10	0.99
35	16.00	1.07
40	13.29	1.13
45	10.75	1.20
50	8.10	1.26
55	6.40	1.32
60	5.36	1.40
65	4.94	1.41
70	5.19	1.51
75	6.05	1.57
80	6.96	1.60
85	8.04	1.70
90	8.76	1.70
95	9.70	1.75
100	10.30	1.79
110	11.17	1.93
120	11.60	1.95
130	11.23	2.01
140	10.61	2.12
150	10.10	2.20
160	9.20	2.26
170	9.01	2.33
180	8.71	2.40
190	8.80	2.52
200	8.24	2.55
220	8.80	2.64
240	10.72	2.78
260	13.20	2.89
280	12.50	2.98
300	12.96	3.11
320	13.50	3.20
340	13.93	3.25
360	14.39	3.44
380	14.70	3.63
400	15.76	3.50
450	16.35	3.82
500	17.29	4.01
550	18.50	4.16
600	18.43	4.39
650	18.85	4.72
700	18.93	4.71
750	19.75	4.83
800	19.92	5.27
850	20.24	5.22
900	20.30	5.22
950	20.46	5.54
1000	20.80	5.81

8. List of Measuring Equipments Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	RAHDE & SCHEARZ	FSP7	838858/039	9KHz – 7GHz	Jan. 07, 2002	Radiation (SH03)
Amplifier	ADVANTEST	BB525C	CH300001	9KHz – 3GHz	Nov. 15, 2001	Radiation (SH03)
Bilog Antenna	SCHAFFNER	CBL61128	2681	30MHz –2GHz	Dec. 23, 2001	Radiation (SH03)
Turn Table	HD	DS 420	420/649/00	0 ~ 360 degree	N/A	Radiation (SH03)
Antenna Mast	HD	MA 240	240/559/00	1 m - 4 m	N/A	Radiation (SH03)

*Calibration Interval of instruments listed above is one year.

9. Uncertainty of Test Site

Uncertainty of Radiated Emission Measurement

Contribution	Probability Distribution	3m
Antenna factor calibration	normal(k=2)	±1
cable loss calibration	normal(k=2)	±0.3
RCV/SPA specification	rectangular	±2
Antenna Directivity	rectangular	±3
Antenna Factor V.S. Height	rectangular	±2
Antenna Factor Interpolation for Frequency	rectangular	±0.25
site imperfection	rectangular	±2
Mismatch Receiver VSWR $\Gamma_1=0.09$ Antenna VSWR $\Gamma_2=0.67$ Uncertainty= $20\log(1-\Gamma_1*\Gamma_2)$	U-shaped	±0.54
combined standard uncertainty Ue(y)	normal	±2.7
Measuring uncertainty for a level of confidence of 95% U=2Ue(y)	normal (k=2)	±5.4

$U = \sqrt{\{(1/2)^2 + (0.3/2)^2 + (2^2 + 0.5^2 + 2^2 + 0.25^2 + 2^2)/3 + (0.54)^2/2\}} = 2.2$ for 10m test distance

$U = \sqrt{\{(1/2)^2 + (0.3/2)^2 + (2^2 + 3^2 + 2^2 + 0.25^2 + 2^2)/3 + (0.54)^2/2\}} = 2.7$ for 3m test distance

Uncertainty of Conducted Emission Measurement

Contribution	Probability Distribution	150KHz – 30MHz
Cable and I/P attenuator calibration	normal(k=2)	±0.3
RCV/SPA specification	rectangular	±2
LISN coupling specification	rectangular	±1.5
Transducer factor frequency interpolation	rectangular	±0.2
Mismatch Receiver VSWR $\Gamma_1=0.09$ LISN VSWR $\Gamma_2=0.33$ Uncertainty= $20\log(1-\Gamma_1*\Gamma_2)$	U-shaped	0.2
combined standard uncertainty Ue(y)	normal	±1.66
Measuring uncertainty for a level of confidence of 95% U=2Ue(y)	normal (k=2)	±3.32

$U = \sqrt{\{(0.3/2)^2 + (2^2 + 1.5^2 + 0.2^2)/3 + (0.2)^2/2\}} = 1.66$