

AppendixA: Effective (Isotropic) Radiated Power Output Data

Test Result(WCDMA)

Band	Type	Channel	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP Limit (dBm)	Verdict
Band2	Voice	9262	23.04	22.68	33.01	PASS
Band2	TestMode	9262	23.06	22.7	33.01	PASS
Band2	Voice	9400	23.17	22.81	33.01	PASS
Band2	TestMode	9400	23.21	22.85	33.01	PASS
Band2	Voice	9538	23.24	22.88	33.01	PASS
Band2	TestMode	9538	23.27	22.91	33.01	PASS
Band5	Voice	4132	23.12	19.43	38.45	PASS
Band5	TestMode	4132	23.13	19.44	38.45	PASS
Band5	Voice	4183	23.08	19.39	38.45	PASS
Band5	TestMode	4183	23.09	19.4	38.45	PASS
Band5	Voice	4233	23.16	19.47	38.45	PASS
Band5	TestMode	4233	23.14	19.45	38.45	PASS

Test Result(HSDPA)

Band	Channel	SubTest	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP Limit (dBm)	Verdict
Band2	9262	1	23.45	23.09	33.01	PASS
Band2	9262	2	23.38	23.02	33.01	PASS
Band2	9262	3	21.96	21.6	33.01	PASS
Band2	9262	4	22.06	21.7	33.01	PASS
Band2	9400	1	23.28	22.92	33.01	PASS
Band2	9400	2	23.01	22.65	33.01	PASS
Band2	9400	3	21.79	21.43	33.01	PASS
Band2	9400	4	21.80	21.44	33.01	PASS
Band2	9538	1	23.47	23.11	33.01	PASS
Band2	9538	2	23.40	23.04	33.01	PASS
Band2	9538	3	22.11	21.75	33.01	PASS
Band2	9538	4	22.19	21.83	33.01	PASS
Band5	4132	1	23.45	19.76	38.5	PASS
Band5	4132	2	22.63	18.94	38.5	PASS
Band5	4132	3	21.17	17.48	38.5	PASS
Band5	4132	4	21.24	17.55	38.5	PASS
Band5	4183	1	23.37	19.68	38.5	PASS
Band5	4183	2	22.74	19.05	38.5	PASS

Band5	4183	3	21.21	17.52	38.5	PASS
Band5	4183	4	21.23	17.54	38.5	PASS
Band5	4233	1	22.93	19.24	38.5	PASS
Band5	4233	2	22.23	18.54	38.5	PASS
Band5	4233	3	20.89	17.2	38.5	PASS
Band5	4233	4	20.91	17.22	38.5	PASS

Test Result(HSUPA)

Band	Channel	SubTest	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP Limit (dBm)	Verdict
Band2	9262	1	20.14	19.78	33.01	PASS
Band2	9262	2	20.82	20.46	33.01	PASS
Band2	9262	3	20.66	20.3	33.01	PASS
Band2	9262	4	20.92	20.56	33.01	PASS
Band2	9262	5	22.54	22.18	33.01	PASS
Band2	9400	1	20.04	19.68	33.01	PASS
Band2	9400	2	20.51	20.15	33.01	PASS
Band2	9400	3	20.32	19.96	33.01	PASS
Band2	9400	4	20.62	20.26	33.01	PASS
Band2	9400	5	22.23	21.87	33.01	PASS
Band2	9538	1	20.40	20.04	33.01	PASS
Band2	9538	2	20.85	20.49	33.01	PASS
Band2	9538	3	20.65	20.29	33.01	PASS
Band2	9538	4	20.96	20.6	33.01	PASS
Band2	9538	5	22.56	22.2	33.01	PASS
Band5	4132	1	20.78	17.09	38.5	PASS
Band5	4132	2	20.90	17.21	38.5	PASS
Band5	4132	3	20.67	16.98	38.5	PASS
Band5	4132	4	20.43	16.74	38.5	PASS
Band5	4132	5	23.41	19.72	38.5	PASS
Band5	4183	1	20.70	17.01	38.5	PASS
Band5	4183	2	20.80	17.11	38.5	PASS
Band5	4183	3	20.59	16.9	38.5	PASS
Band5	4183	4	20.44	16.75	38.5	PASS
Band5	4183	5	23.35	19.66	38.5	PASS
Band5	4233	1	20.41	16.72	38.5	PASS
Band5	4233	2	20.55	16.86	38.5	PASS
Band5	4233	3	20.32	16.63	38.5	PASS
Band5	4233	4	20.18	16.49	38.5	PASS
Band5	4233	5	23.33	19.64	38.5	PASS

Remark: EIRP (dBm) = Conducted power (dBm) + Antenna Gain (dBi). (For Band2)

ERP (dBm) = EIRP (dBm) - 2.15 (dB). (For Band5)


AppendixB:Peak-to-Average Ratio

Test Result(WCDMA)

Band	Channel	Peak-to-Average Ratio(dB)	Limit(dB)	Verdict
Band2	9400	2.95	13	PASS
Band5	4183	3.04	13	PASS

Remark: All channel had been tested, but only the worst case data displayed in this report.

Test Graphs(WCDMA)

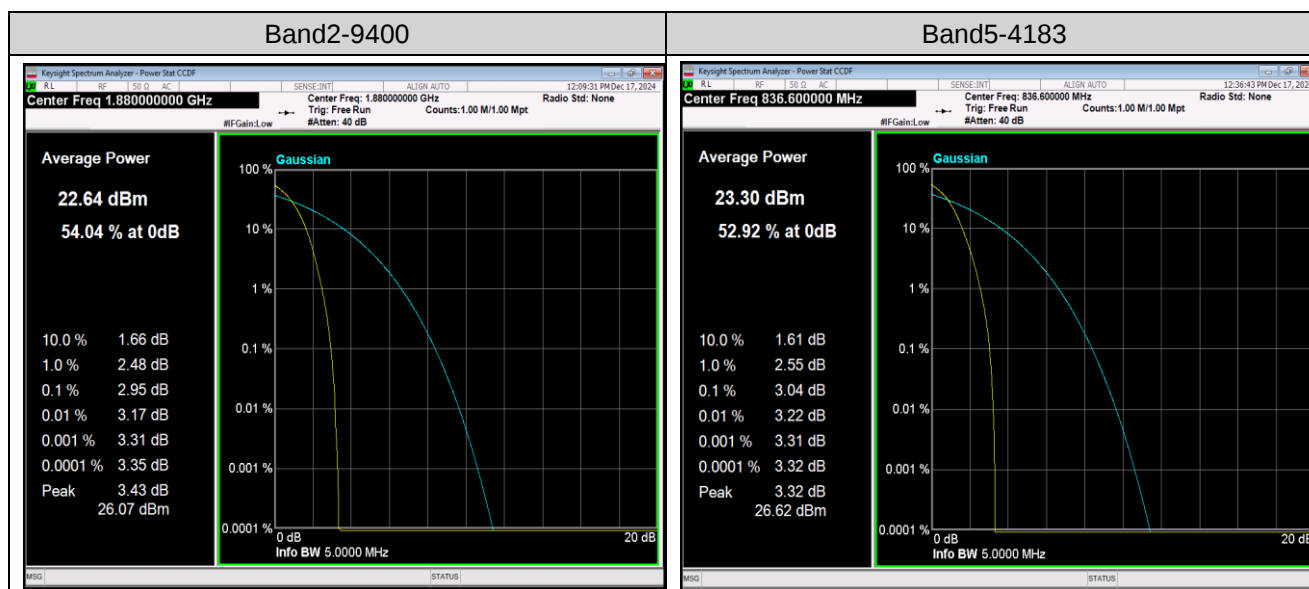


AppendixC:26dB Bandwidth andOccupied Bandwidth

Test Result(WCDMA)

Band	Channel	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit(kHz)	Verdict
Band2	9262	4.1507	4.673	---	PASS
Band2	9400	4.1435	4.669	---	PASS
Band2	9538	4.1525	4.667	---	PASS
Band5	4132	4.1467	4.661	---	PASS
Band5	4183	4.1465	4.665	---	PASS
Band5	4233	4.1502	4.665	---	PASS

Test Graphs(WCDMA)

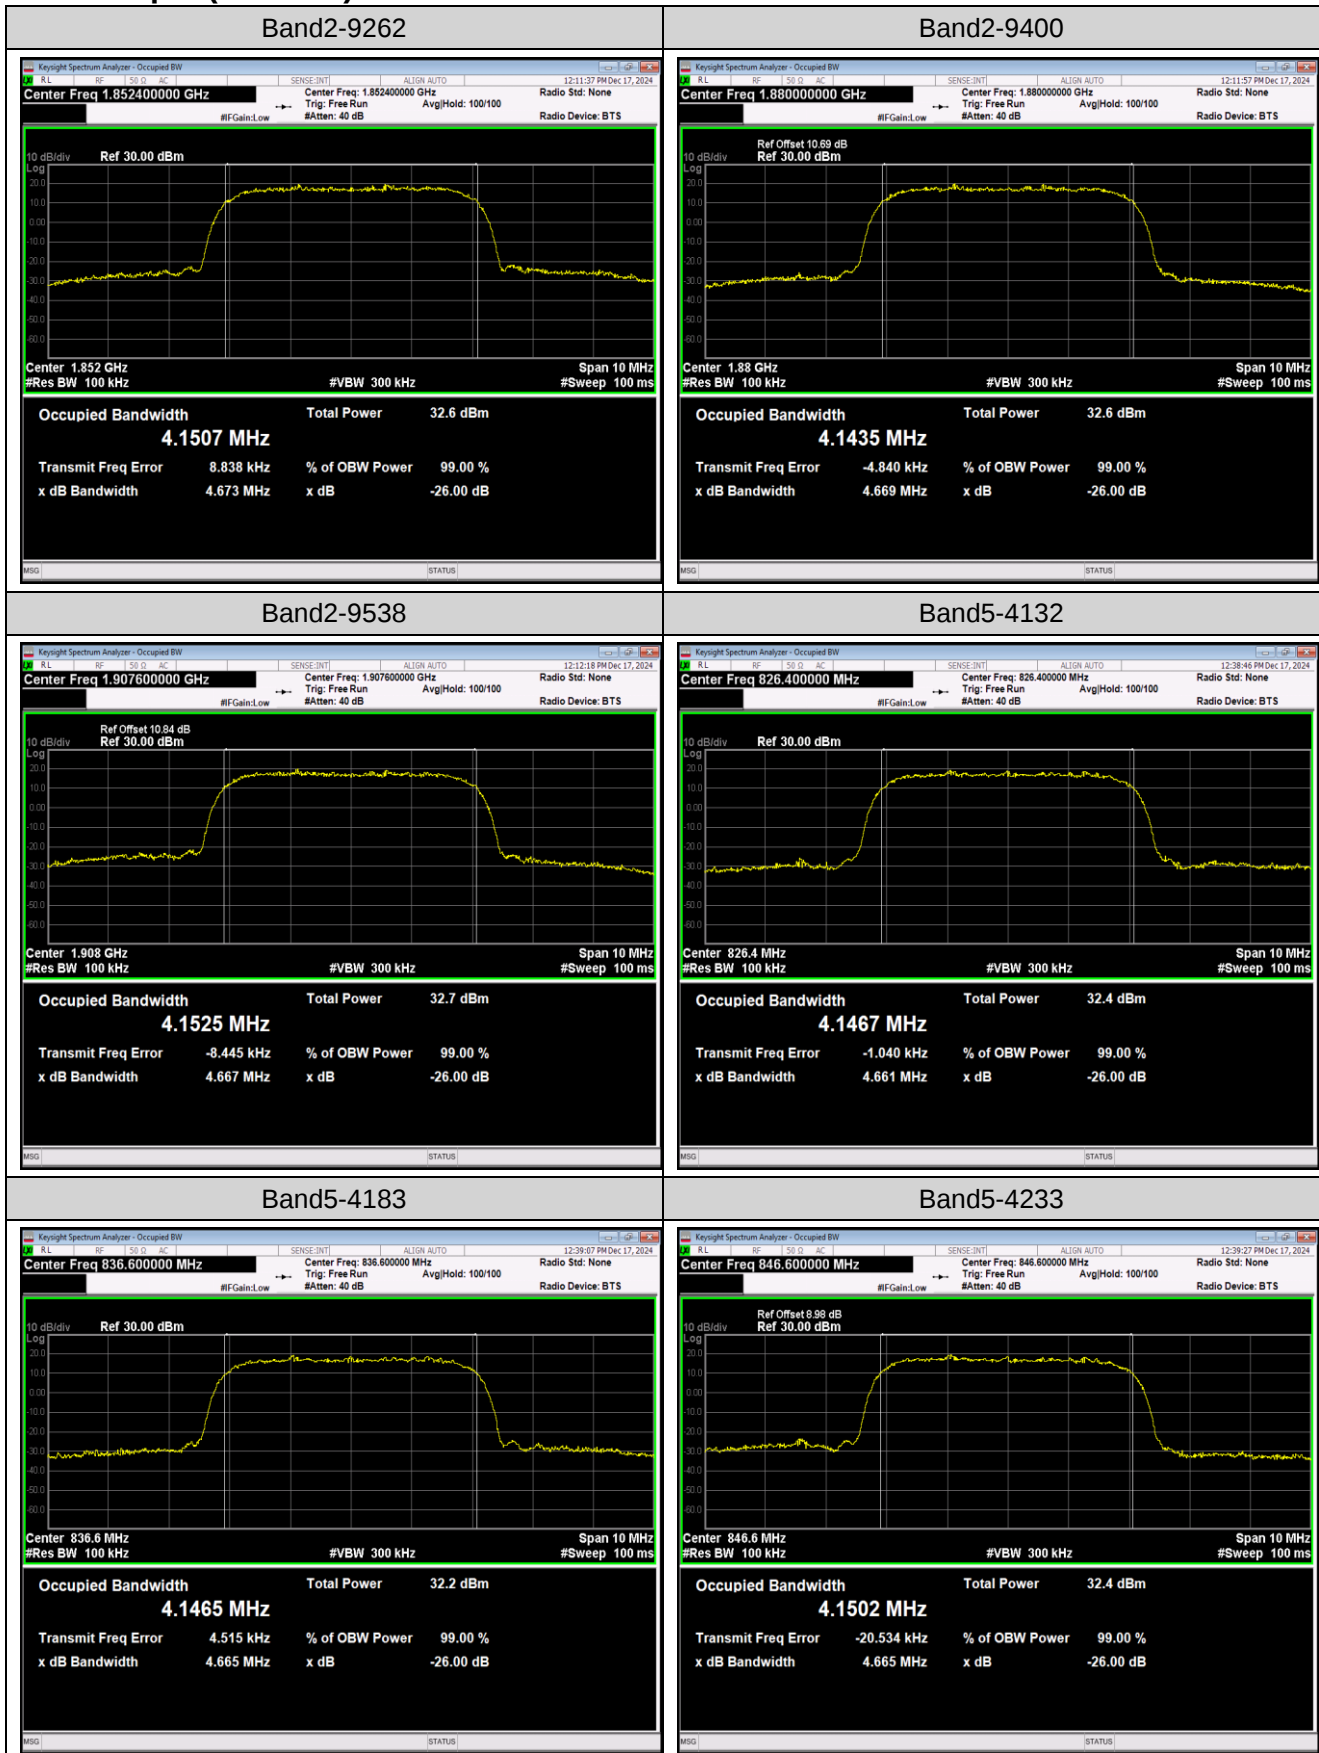


AppendixD:Band Edge

Test Result(WCDMA)

Band	Channel	Frequency (MHz)	Result (dBm)	Limit(dBm)	Verdict
Band2	9262	1850.00	-22.50	-13	PASS
Band2	9538	1910.00	-22.78	-13	PASS
Band5	4132	824.00	-22.87	-13	PASS
Band5	4233	849.00	-23.77	-13	PASS

Test Graphs(WCDMA)

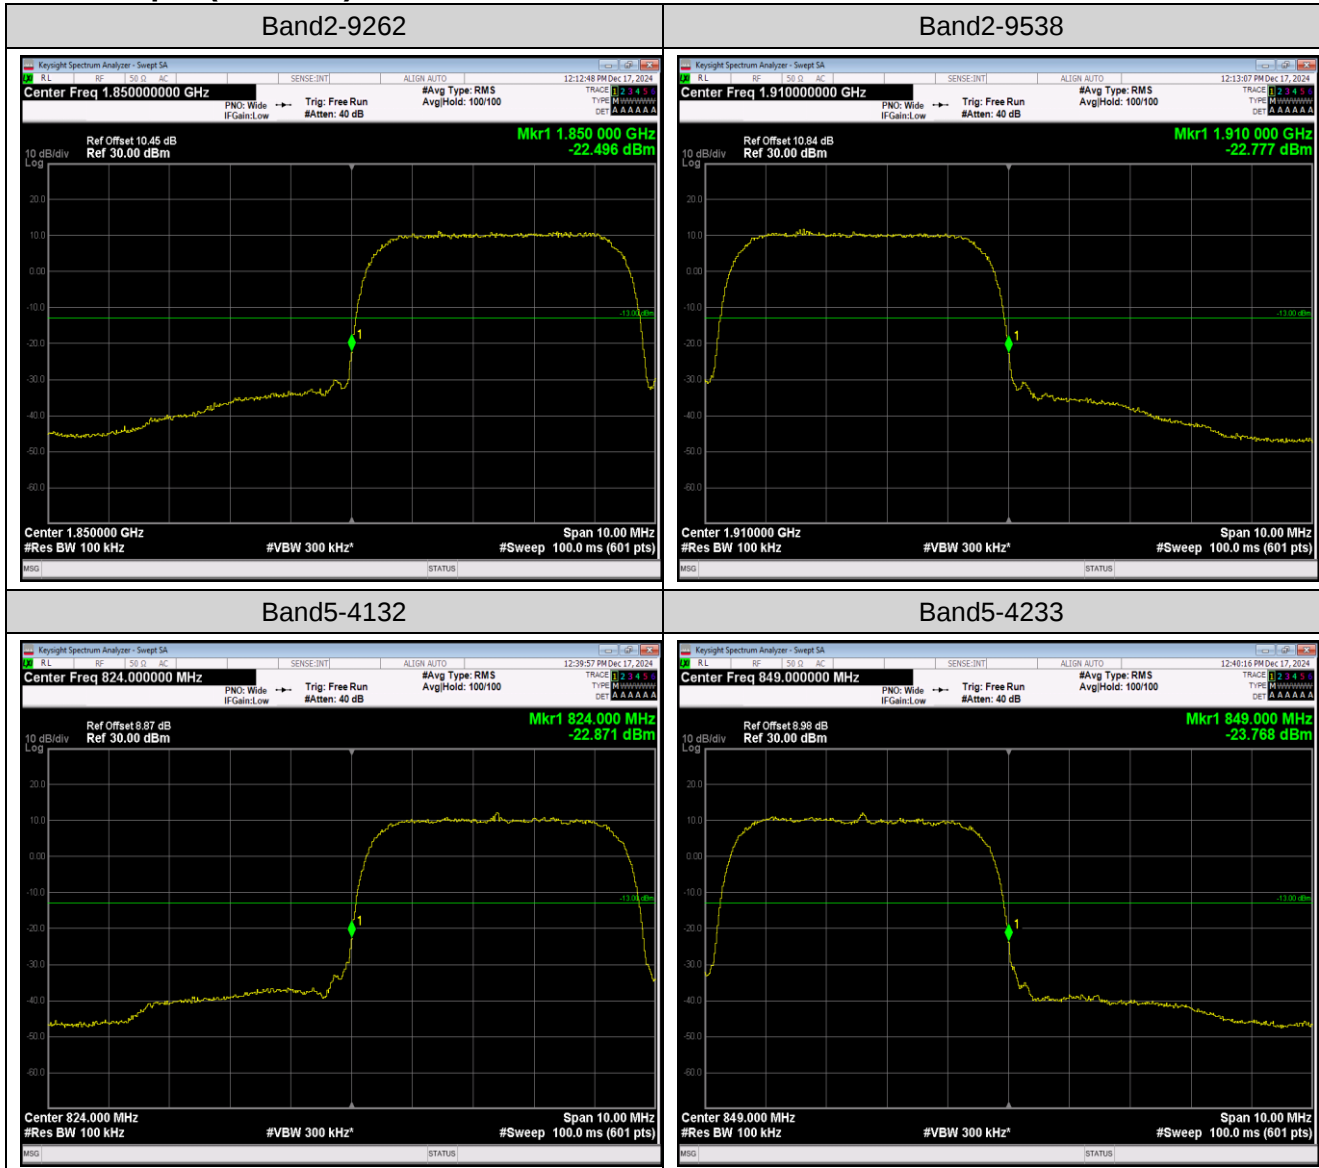


AppendixE:Conducted SpuriousEmission

Test Result(WCDMA)

Band	Channel	Frequency Range (Mhz)	Frequency (dBm)	Result (dBm)	Limit (dBm)	Verdict
Band2	9262	0.009~0.15MHz	0.01	-55.51	-43	PASS
Band2	9262	0.15~30MHz	0.15	-47.04	-23	PASS
Band2	9262	30~1000MHz	939.89	-45.84	-13	PASS
Band2	9262	1000~20000MHz	19918.3	-30.82	-13	PASS
Band2	9400	0.009~0.15MHz	0.01	-56.96	-43	PASS
Band2	9400	0.15~30MHz	0.17	-46.83	-23	PASS
Band2	9400	30~1000MHz	945.62	-45.03	-13	PASS
Band2	9400	1000~20000MHz	19934.13	-30.86	-13	PASS
Band2	9538	0.009~0.15MHz	0.01	-54.32	-43	PASS
Band2	9538	0.15~30MHz	0.15	-45.27	-23	PASS
Band2	9538	30~1000MHz	880.72	-45.33	-13	PASS
Band2	9538	1000~20000MHz	19960.73	-30.33	-13	PASS
Band5	4132	0.009~0.15MHz	0.01	-56.63	-33	PASS
Band5	4132	0.15~30MHz	0.15	-45.52	-13	PASS
Band5	4132	30~1000MHz	396.43	-53.63	-13	PASS
Band5	4132	1000~10000MHz	7299.7	-37.13	-13	PASS
Band5	4183	0.009~0.15MHz	0.01	-56.97	-33	PASS
Band5	4183	0.15~30MHz	0.15	-47.19	-13	PASS
Band5	4183	30~1000MHz	996.22	-54.29	-13	PASS
Band5	4183	1000~10000MHz	7321	-36.82	-13	PASS
Band5	4233	0.009~0.15MHz	0.01	-55.59	-33	PASS
Band5	4233	0.15~30MHz	0.17	-45.74	-13	PASS
Band5	4233	30~1000MHz	950.11	-53.9	-13	PASS
Band5	4233	1000~10000MHz	5218	-36.57	-13	PASS

Test Graphs(WCDMA)

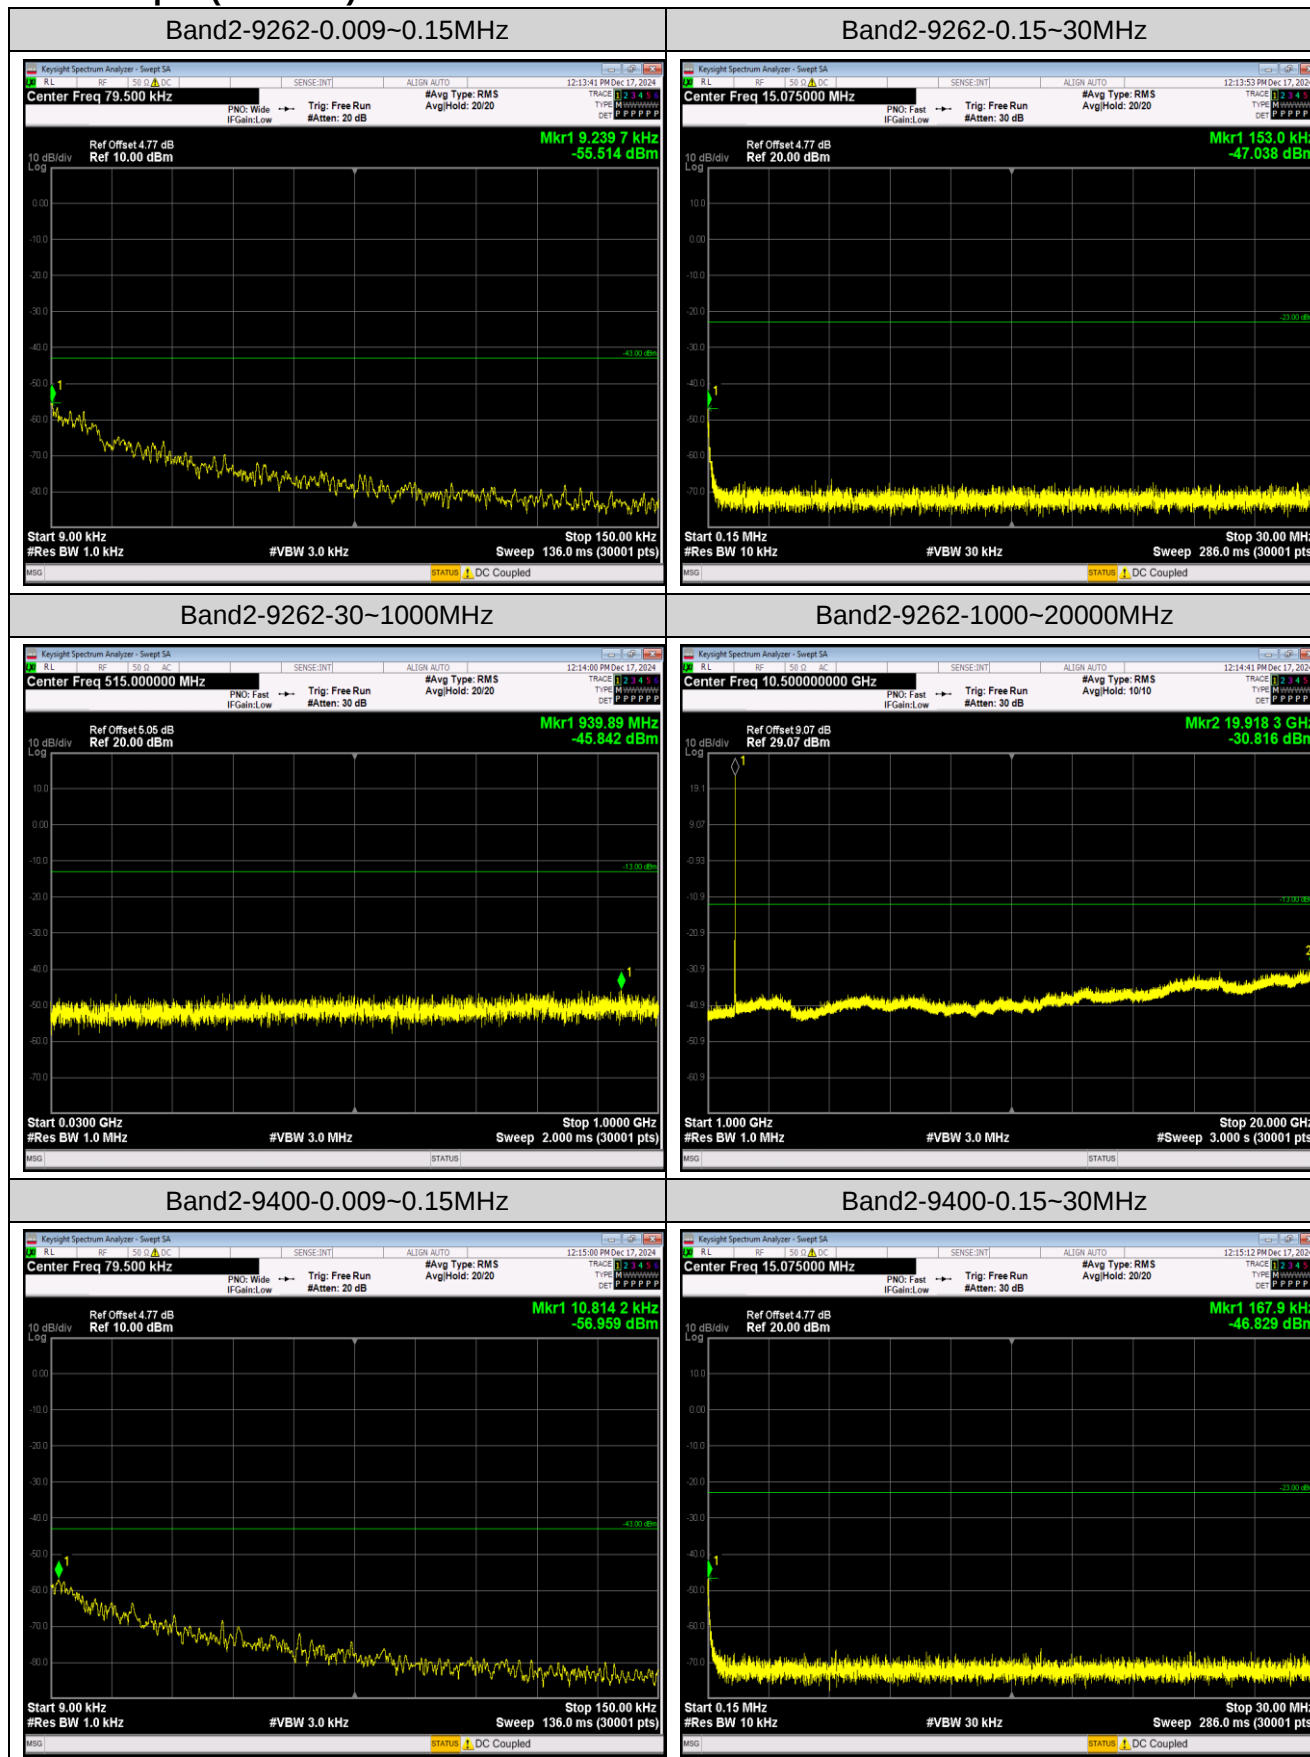



JianYan Testing Group Shenzhen Co., Ltd.


No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Project No.: JYTSZR2412009

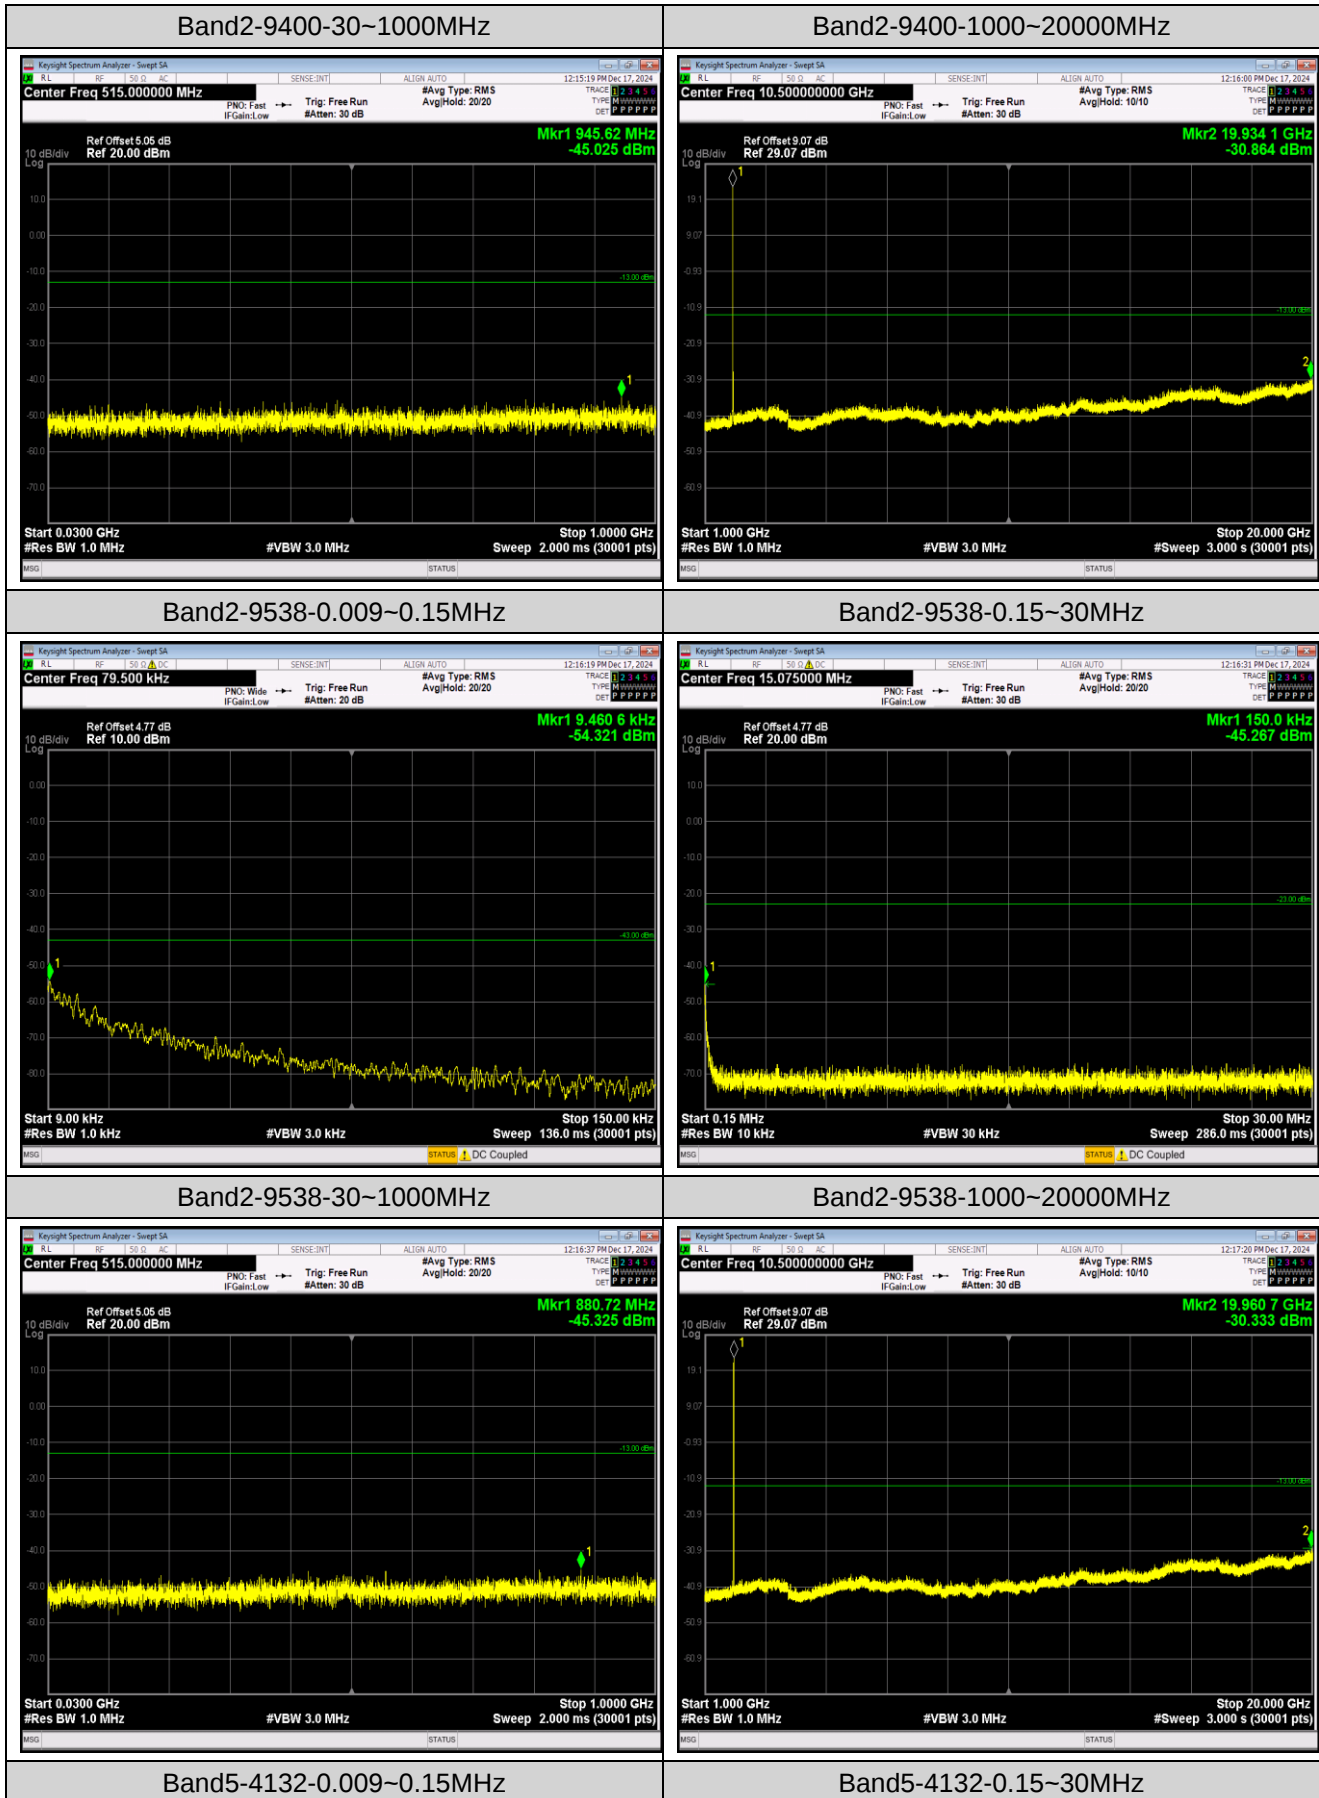

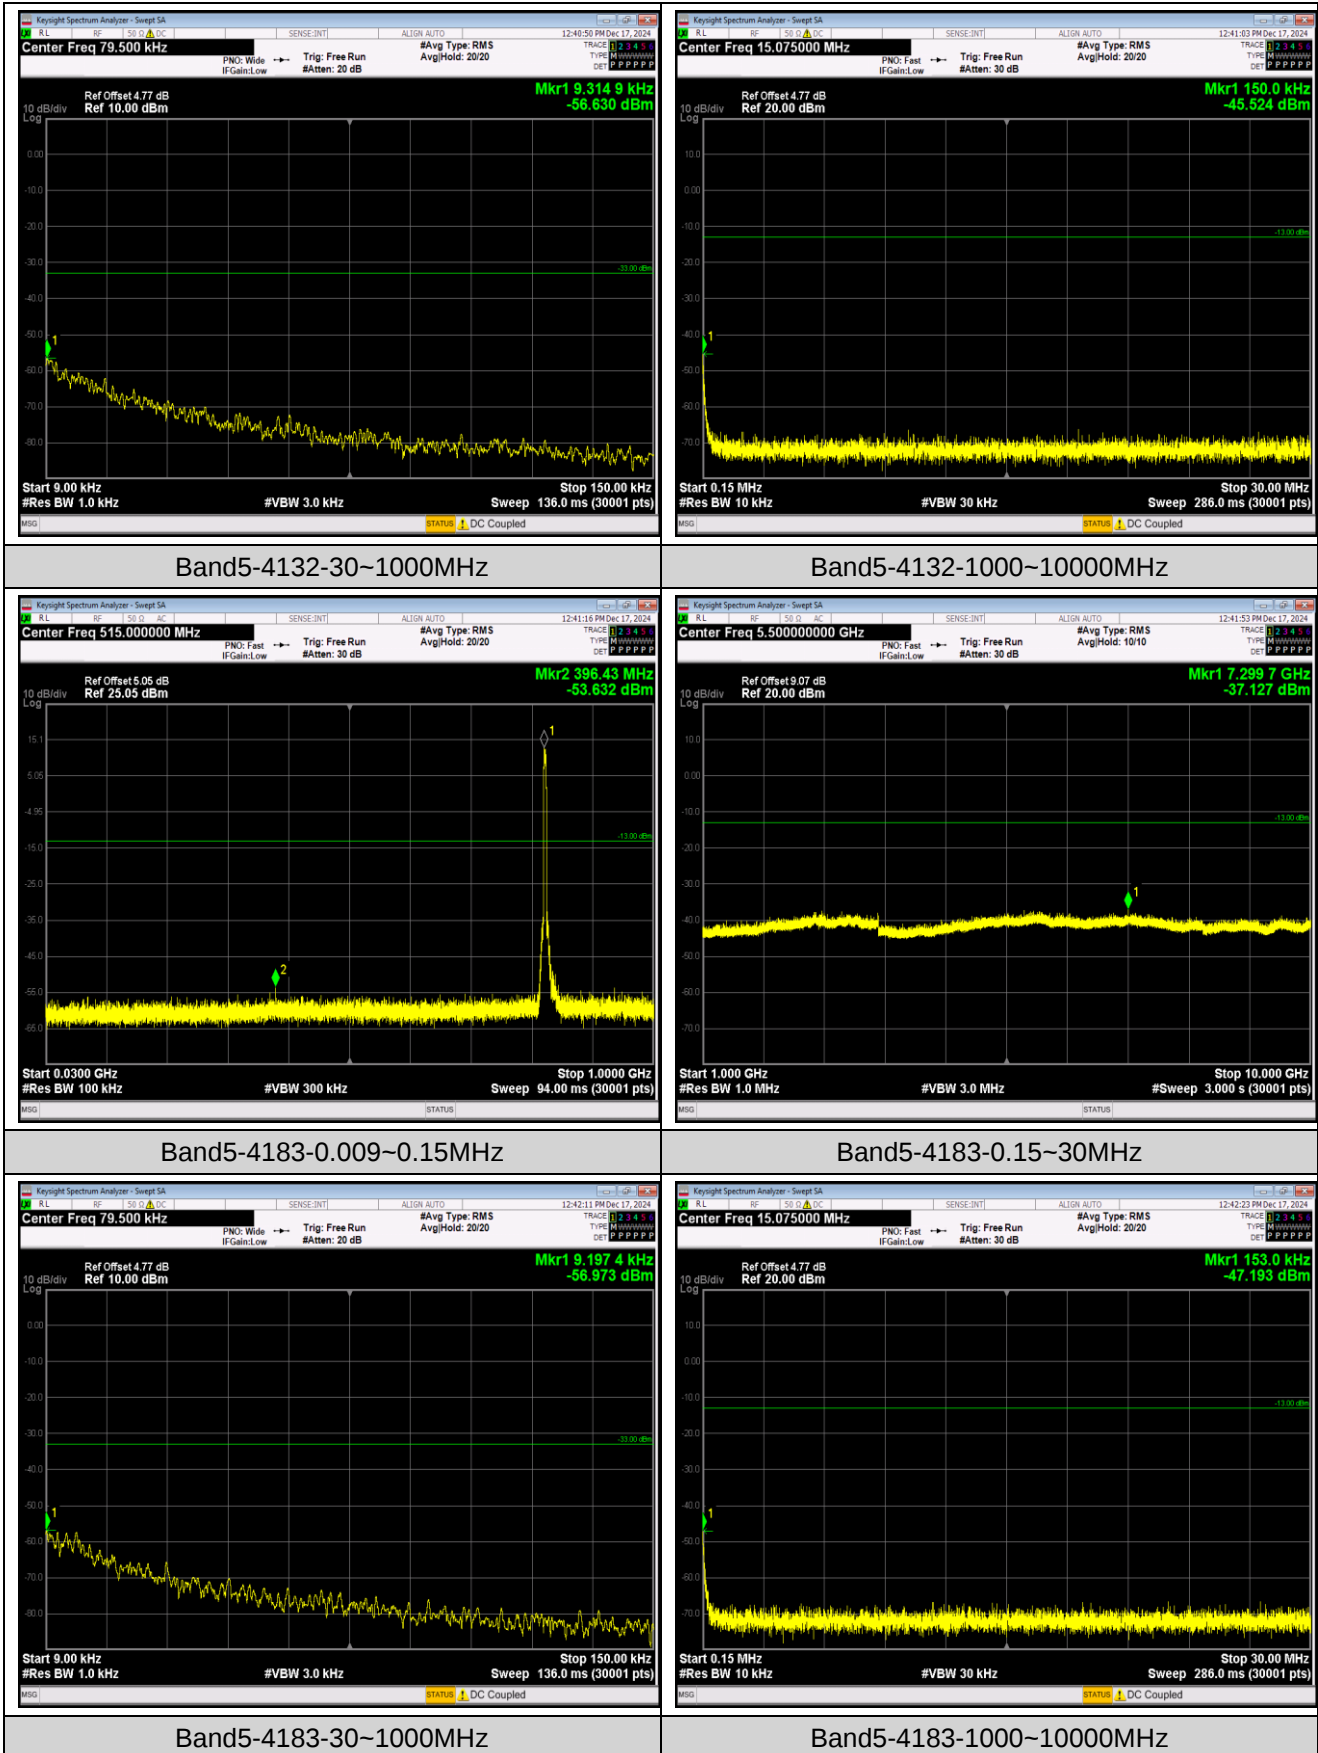

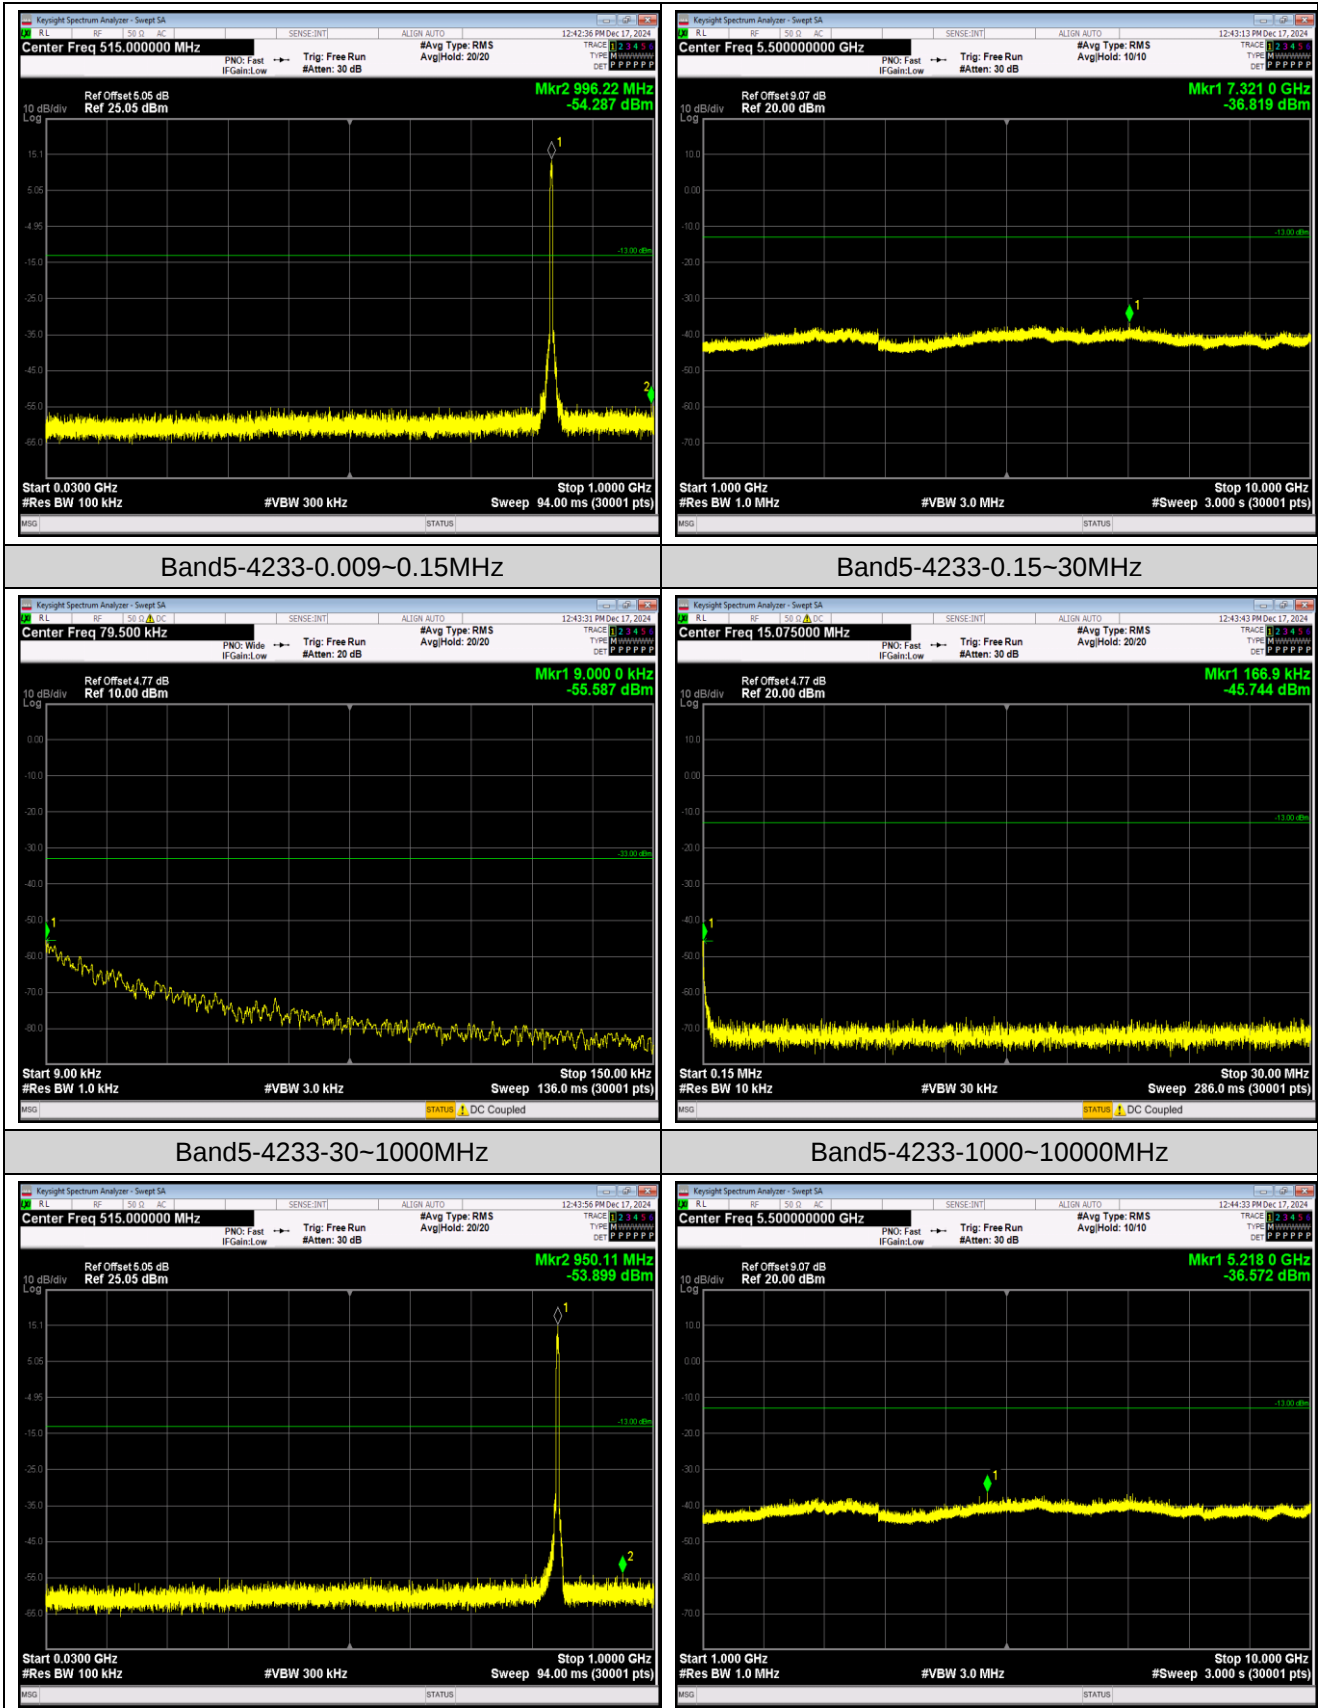

AppendixF:Frequency Stability

Test Result

Reference Frequency: WCDMA BAND V 12.2k RMC Middle channel=4183 Frequency=836.6MHz					
Temperature					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	2.57	0.003072	±2.5	Pass
	-20	2.50	0.002988		
	-10	-1.78	-0.002128		
	0	-2.83	-0.003383		
	10	1.66	0.001984		
	20	-0.82	-0.000980		
	30	-1.93	-0.002307		
	40	0.04	0.000048		
	50	-0.25	-0.000299		
Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	3.50	1.70	0.002032	±2.5	Pass
	3.70	-1.17	-0.001399		
	4.20	0.10	0.000120		
Remark: All channel had been tested, but only the worst case data displayed in this report.					

Reference Frequency: WCDMA BAND II 12.2k RMC Middle Frequency=9400 channel=1880MHz					
Temperature					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	1.85	0.000984	Within authorized band for BAND II	Pass
	-20	7.87	0.004186		
	-10	2.56	0.001362		
	0	-3.43	-0.001824		
	10	4.63	0.002463		
	20	-1.40	-0.000745		
	30	7.77	0.004133		
	40	1.33	0.000707		
	50	1.20	0.000638		
Voltage					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	3.50	1.22	0.000649	Within authorized band for BAND II	Pass
	3.70	-3.30	-0.001755		
	4.20	5.82	0.003096		
Remark: All channel had been tested, but only the worst case data displayed in this report.					

Appendix G: Modulation Characteristics

Test Result

Band	Channel	Result	Verdict
Band2	9400	PASS	PASS
Band5	4183	PASS	PASS

Remark: All channel had been tested, but only the worst case data displayed in this report.

Test Graphs

