

# FCC RF Test Report

**APPLICANT** : Lenovo (Shanghai) Electronics Technology Co., Ltd.  
**EQUIPMENT** : Tablet PC IdeaTab A3000-F  
**BRAND NAME** : lenovo  
**MODEL NAME** : 60029, Z0A2  
**FCC ID** : O57A3000F  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System

The product was received on Feb. 27, 2013 and completely tested on Mar. 27, 2013. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.**



TABLE OF CONTENTS

REVISION HISTORY..... 3
SUMMARY OF TEST RESULT ..... 4
1 GENERAL DESCRIPTION ..... 5
1.1 Applicant..... 5
1.2 Manufacturer..... 5
1.3 Feature of Equipment Under Test ..... 5
1.4 Product Specification of Equipment Under Test..... 5
1.5 Testing Site..... 6
1.6 Applied Standards ..... 6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 7
2.1 Carrier Frequency Channel ..... 7
2.2 Pre-Scanned RF Power..... 8
2.3 Test Mode..... 9
2.4 Connection Diagram of Test System..... 10
2.5 Support Unit used in test configuration and system ..... 11
2.6 RF Utility ..... 11
2.7 Measurement Results Explanation Example..... 12
3 TEST RESULT..... 13
3.1 6dB Bandwidth Measurement ..... 13
3.2 Output Power Measurement..... 20
3.3 Power Spectral Density Measurement ..... 23
3.4 Conducted Band Edges and Spurious Emission Measurement ..... 37
3.5 Radiated Emission Measurement..... 50
3.6 AC Conducted Emission Measurement..... 69
3.7 Antenna Requirements..... 73
4 LIST OF MEASURING EQUIPMENT ..... 74
5 UNCERTAINTY OF EVALUATION ..... 76
APPENDIX A. PHOTOGRAPHS OF EUT
APPENDIX B. SETUP PHOTOGRAPHS



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	A8.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	A8.4	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	A8.2(b)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	A8.5	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
			Conducted Spurious Emission		Pass	-
3.5	15.247(d)	A8.5	Radiated Band Edges	15.209(a) & 15.247(d)	Pass	-
			Radiated Spurious Emission		Pass	Under limit 3.04 dB at 2483.500 MHz
3.6	15.207	Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 12.19 dB at 0.880 MHz
0	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-

# 1 General Description

## 1.1 Applicant

**Lenovo (Shanghai) Electronics Technology Co., Ltd.**  
 No. 68 Building, 199 Fenju Road, Wai Gao Qiao FTZ, Shanghai, China

## 1.2 Manufacturer

**Lenovo PC HK Limited**  
 23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong

## 1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Tablet PC IdeaTab A3000-F
Brand Name	lenovo
Model Name	60029, Z0A2
FCC ID	O57A3000F
EUT supports Radios application	WLAN 11bgn/Bluetooth EDR/Bluetooth 4.0 - LE
HW Version	LepadA3000-F
SW Version	A3000_130428
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2412 MHz ~ 2462 MHz
Number of Channels	11
Carrier Frequency of Each Channel	2412+(n-1)*5 MHz; n=1~11
Maximum Output Power to Antenna	802.11b : 17.26 dBm (0.0532 W) 802.11g : 19.50 dBm (0.0891 W) 802.11n HT20 : 21.08 dBm (0.1082 W)
Antenna Type	Fixed Internal Antenna with gain 3.10 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

### 1.5 Testing Site

<b>Test Site</b>	SPORTON INTERNATIONAL INC.		
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC/IC Registration No.</b>
	03CH06-HY		722060/4086B-1

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.			
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
<b>Test Site No.</b>	<b>Sporton Site No.</b>			<b>FCC/IC Registration No.</b>
	TH01-KS	CO01-KS	03CH01-KS	149928/4086E-1

### 1.6 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v02
- ANSI C63.4-2003 and ANSI C63.10-2009

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 KHz to 30 MHz) and radiated emission (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-

## 2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and antenna configurations as following table and the highest power data rates were chosen for full test in the following tables. Final Output Power equals to Measured Output Power adds the duty factor.

Channel	Frequency	2.4GHz 802.11b RF Power (dBm)			
		DSSS Data Rate			
		1 Mbps	2 Mbps	5.5 Mbps	11 Mbps
CH 01	2412 MHz	17.03	17.54	17.29	17.32
CH 06	2437 MHz	17.26	17.05	17.18	17.11
CH 11	2462 MHz	17.26	17.39	17.32	17.31

Channel	Frequency	2.4GHz 802.11g RF Power (dBm)							
		OFDM Data Rate							
		6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
CH 01	2412 MHz	20.85	20.52	20.77	20.62	21.06	20.76	20.86	19.24
CH 06	2437 MHz	19.46	19.44	19.23	19.2	19.18	19.1	19.06	19.50
CH 11	2462 MHz	21.12	20.61	20.52	20.75	20.44	20.48	20.86	19.15

Channel	Frequency	2.4GHz 802.11n HT20 RF Power (dBm)							
		OFDM Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 01	2412 MHz	20.87	21.18	20.76	21.13	21.22	20.59	20.81	21.15
CH 06	2437 MHz	21.08	20.16	19.97	19.85	20.12	19.98	20.08	19.82
CH 11	2462 MHz	20.59	21.92	21.76	21.72	21.68	21.52	21.46	21.32


### 2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.


Test Cases				
	Test Items	Mode	Data Rate	Test Channel
Conducted TCs	6dB BW Power Spectral Density	802.11b	1 Mbps	1/6/11
		802.11g	54 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
	Output Power	802.11b	1 Mbps	1/6/11
		802.11g	54 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
	Conducted Band Edge	802.11b	1 Mbps	1/11
		802.11g	54 Mbps	1/11
		802.11n HT20	6.5 Mbps	1/11
Conducted Spurious Emission	802.11b	1 Mbps	1/6/11	
	802.11g	54 Mbps	1/6/11	
	802.11n HT20	6.5 Mbps	1/6/11	
Radiated TCs	Radiated Band Edge	802.11b	1 Mbps	1/11
		802.11g	54 Mbps	1/11
		802.11n HT20	6.5 Mbps	1/11
	Radiated Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	54 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
AC Conducted Emission	Mode 1 : Bluetooth Link + WLAN Link + USB Cable 1 (Charging from Adapter 3) + Battery 1 + Earphone for Sample 1			

## 2.4 Connection Diagram of Test System

<WLAN Tx Mode>

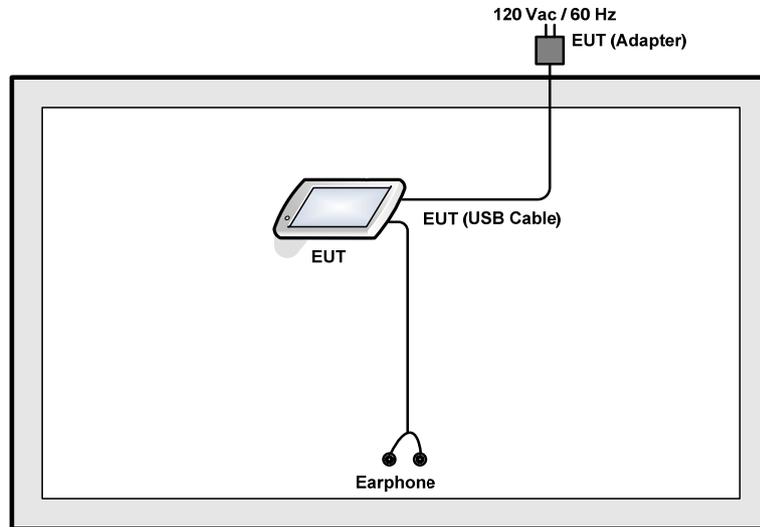

<AC Conducted Emission Mode>

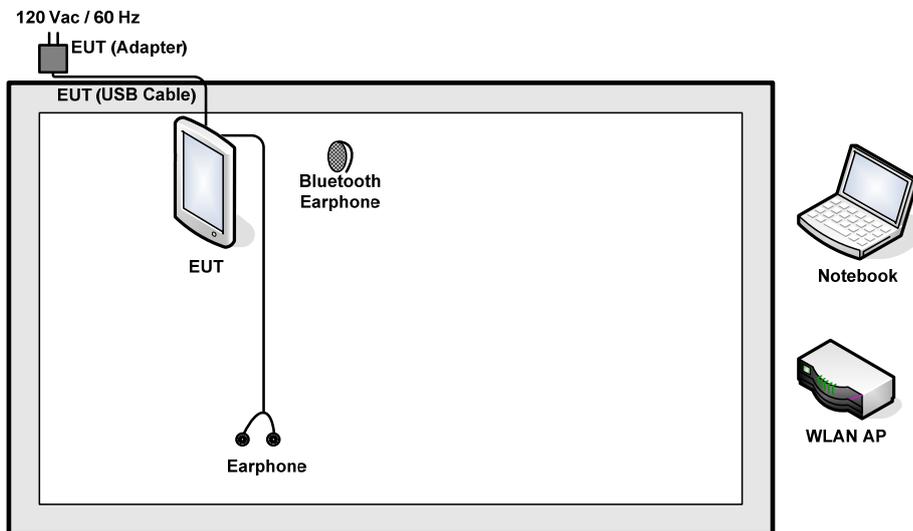

## 2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GWINSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
3.	Notebook	DELL	P08S	QDS-BRCM1030	N/A	AC I/P: Unshielded, 0.9 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Lenovo	LBH301	N/A	N/A	N/A

## 2.6 RF Utility

For WLAN function, turn on “Enter Engineer” software on the EUT directly. Then, the EUT will get into the engineering modes to contact with WLAN AP for continuous transmitting and receiving signals.



## **2.7 Measurement Results Explanation Example**

**For conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and 10dB attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and 10dB attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following table shows an offset computation example with cable loss 5.6 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 5.6 + 10 = 15.6 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB Bandwidth Measurement

##### 3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 KHz.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 KHz.
5. Measure and record the results in the test report.

##### 3.1.4 Test Setup

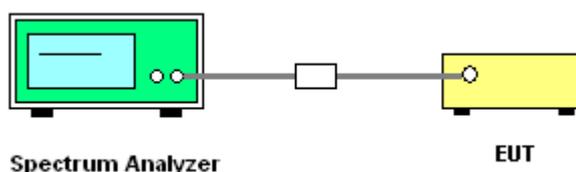




3.1.5 Test Result of 6dB Bandwidth

Test Mode :	802.11b	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11b 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	9.08	0.5	Pass
06	2437	9.04	0.5	Pass
11	2462	9.04	0.5	Pass


6 dB Bandwidth Plot on 802.11b Channel 01

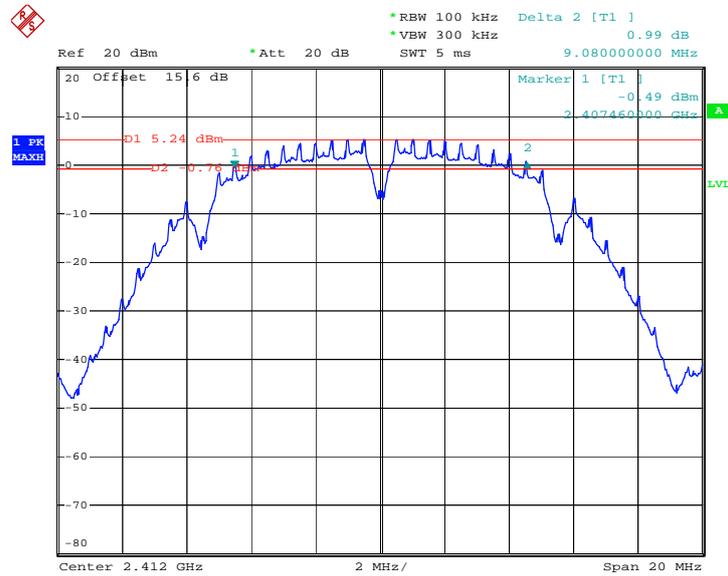

Date: 13.MAR.2013 15:44:53




6 dB Bandwidth Plot on 802.11b Channel 06

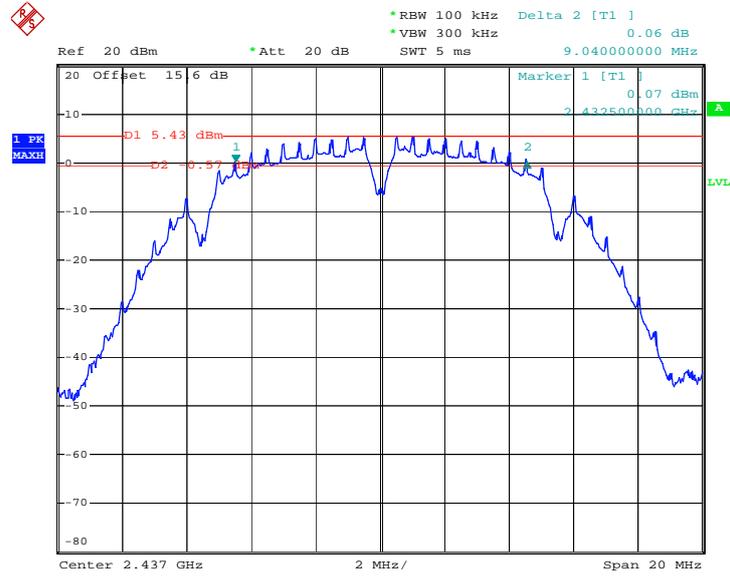

Date: 13.MAR.2013 15:47:54

6 dB Bandwidth Plot on 802.11b Channel 11

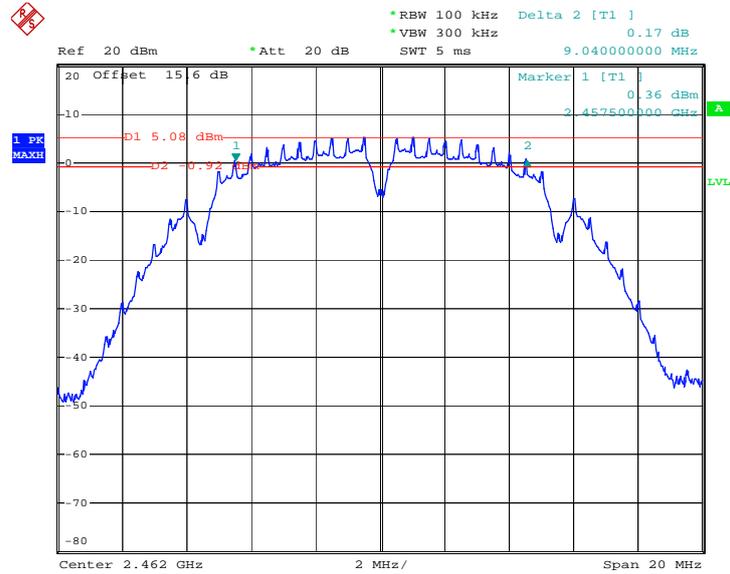


Date: 13.MAR.2013 15:50:18



Test Mode :	802.11g	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11g 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	16.48	0.5	Pass
06	2437	16.48	0.5	Pass
11	2462	16.48	0.5	Pass


6 dB Bandwidth Plot on 802.11g Channel 01

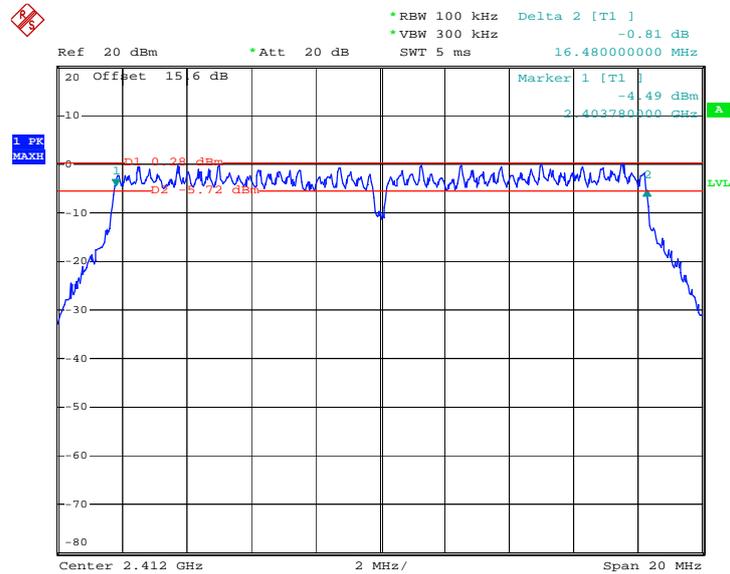

Date: 13.MAR.2013 15:53:10




### 6 dB Bandwidth Plot on 802.11g Channel 06

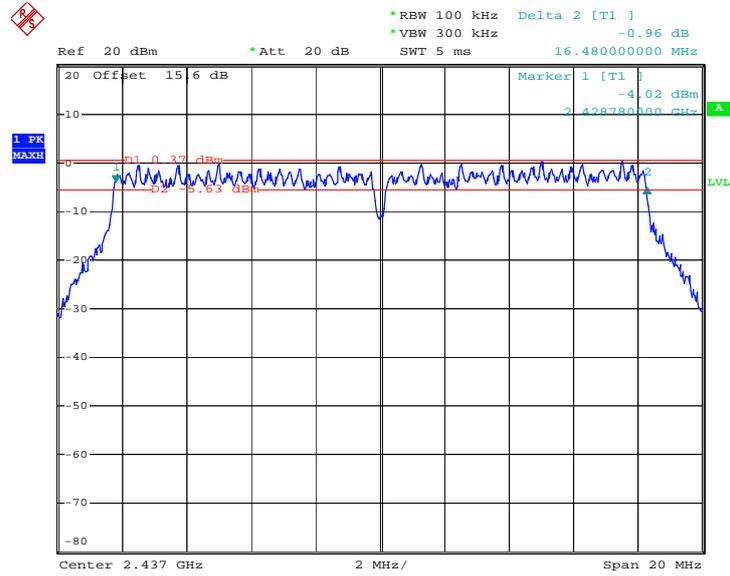

Date: 13.MAR.2013 15:55:43

### 6 dB Bandwidth Plot on 802.11g Channel 11

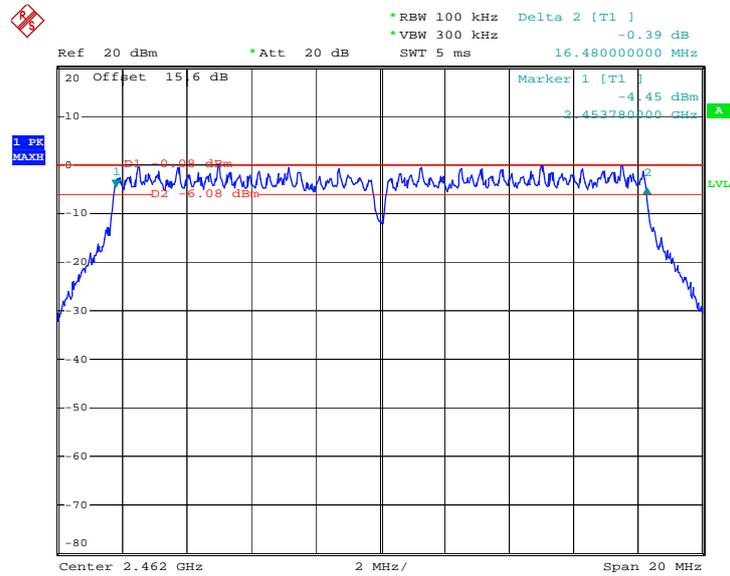


Date: 13.MAR.2013 15:57:57



Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	2.4GHz 802.11n HT20 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	17.60	0.5	Pass
06	2437	17.56	0.5	Pass
11	2462	17.60	0.5	Pass


6 dB Bandwidth Plot on 802.11n HT20 Channel 01

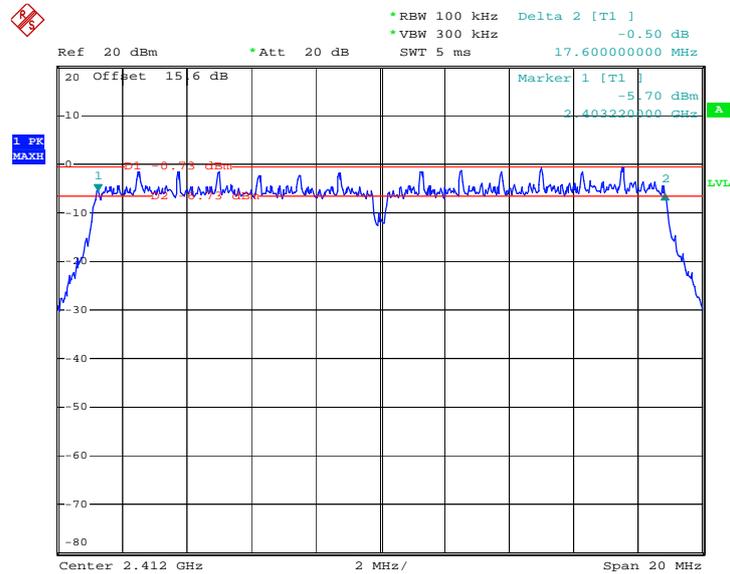

Date: 13.MAR.2013 16:00:37




6 dB Bandwidth Plot on 802.11n HT20 Channel 06

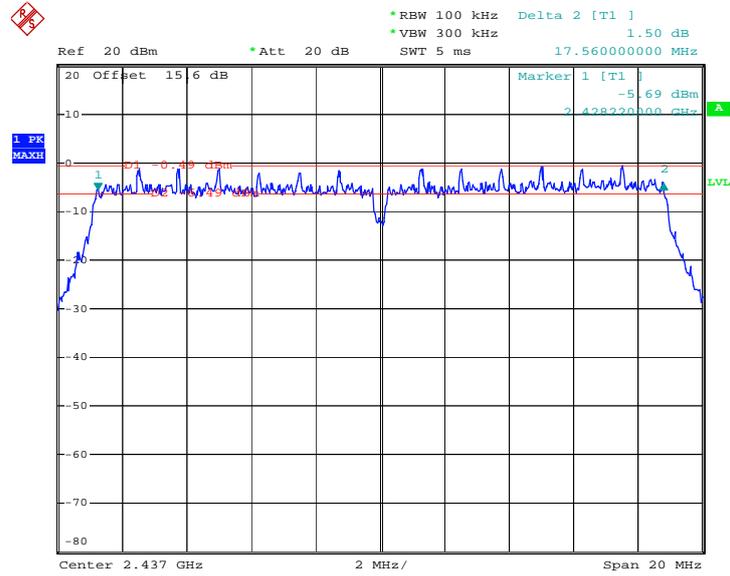

Date: 13.MAR.2013 16:03:40

6 dB Bandwidth Plot on 802.11n HT20 Channel 11

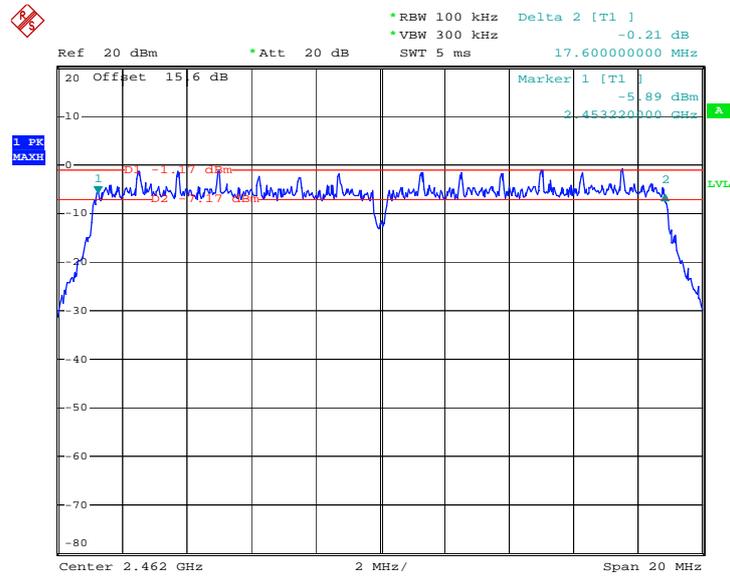

Date: 13.MAR.2013 16:05:57

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

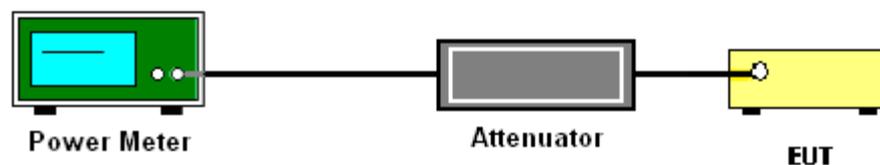

3.2.5 Test Result of Peak Output Power

Test Mode :	802.11b	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11b Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	17.03	30	Pass
06	2437	17.26	30	Pass
11	2462	17.26	30	Pass

Test Mode :	802.11g	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11g Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	19.24	30	Pass
06	2437	19.50	30	Pass
11	2462	19.15	30	Pass

Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	2.4GHz 802.11n HT20 Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	20.87	30	Pass
06	2437	21.08	30	Pass
11	2462	20.59	30	Pass



3.2.6 Test Result of Average output Power (Reporting Only)

Test Mode :	802.11b	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%
Duty Cycle:	98.75%	Duty Factor:	0.05dB

Channel	Frequency (MHz)	802.11b Average Output Power (dBm)
01	2412	14.21
06	2437	14.35
11	2462	14.07

Test Mode :	802.11g	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%
Duty Cycle:	61.54%	Duty Factor:	2.11dB

Channel	Frequency (MHz)	802.11g Average Output Power (dBm)
01	2412	9.26
06	2437	9.29
11	2462	9.20

Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%
Duty Cycle:	91.54%	Duty Factor:	0.38dB

Channel	Frequency (MHz)	802.11n HT20 Average Output Power (dBm)
01	2412	10.16
06	2437	10.09
11	2462	10.06

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3KHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure 9.1 Option 1 of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v02
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

#### 3.3.4 Test Setup

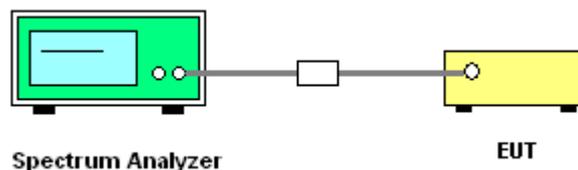

3.3.5 Test Result of Power Spectral Density

Test Mode :	802.11b	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11b Power Density		Max. Limits (dBm/3KHz)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
01	2412	4.99	-8.25	8	Pass
06	2437	4.87	-8.46	8	Pass
11	2462	5.05	-7.84	8	Pass

Test Mode :	802.11g	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11g Power Density		Max. Limits (dBm/3KHz)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
01	2412	0.25	-15.36	8	Pass
06	2437	0.31	-13.74	8	Pass
11	2462	-0.22	-15.77	8	Pass

Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11n HT20 Power Density		Max. Limits (dBm/3KHz)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
01	2412	-1.35	-15.24	8	Pass
06	2437	-1.27	-14.05	8	Pass
11	2462	-1.00	-13.99	8	Pass


Note:

1. Measured power density (dBm) has offset with cable loss.
2. The Measured power density (dBm)/ 100KHz is reference level and used as 20dBc down for Conducted Band Edges and Conducted Spurious Emission limit line.



### 3.3.6 Test Result of Power Spectral Density Plots (100kHz)


PSD 100kHz Plot on 802.11b Channel 01

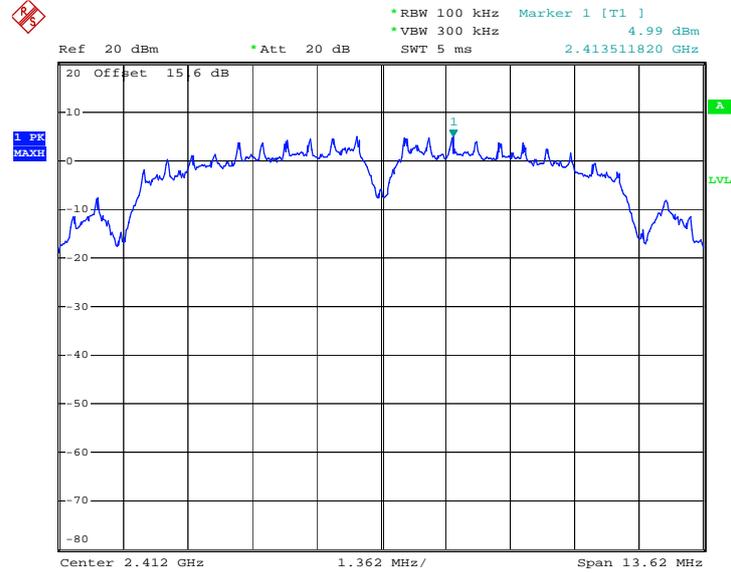

Date: 13.MAR.2013 15:45:22




PSD 100kHz Plot on 802.11b Channel 06

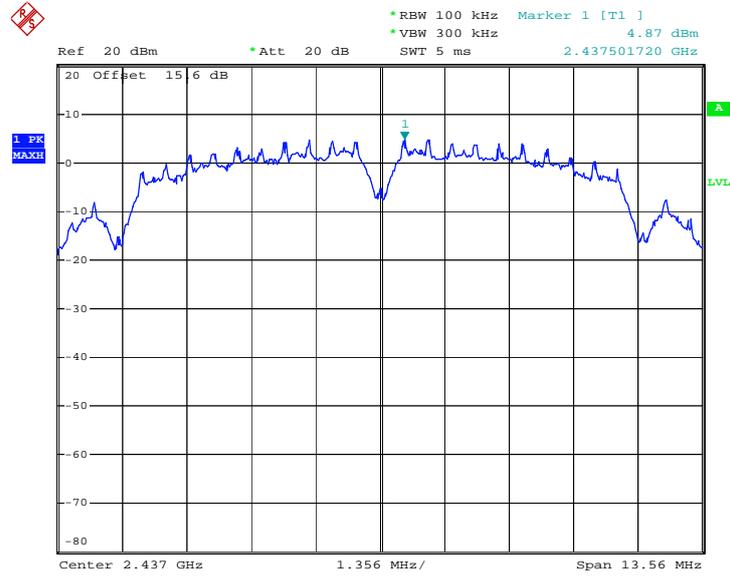

Date: 13.MAR.2013 15:48:24


PSD 100kHz Plot on 802.11b Channel 11

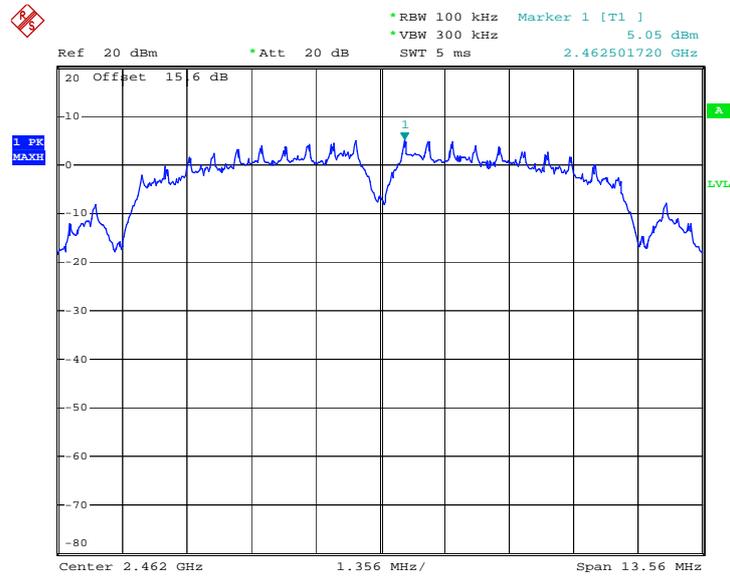

Date: 13.MAR.2013 15:50:47




PSD 100kHz Plot on 802.11g Channel 01

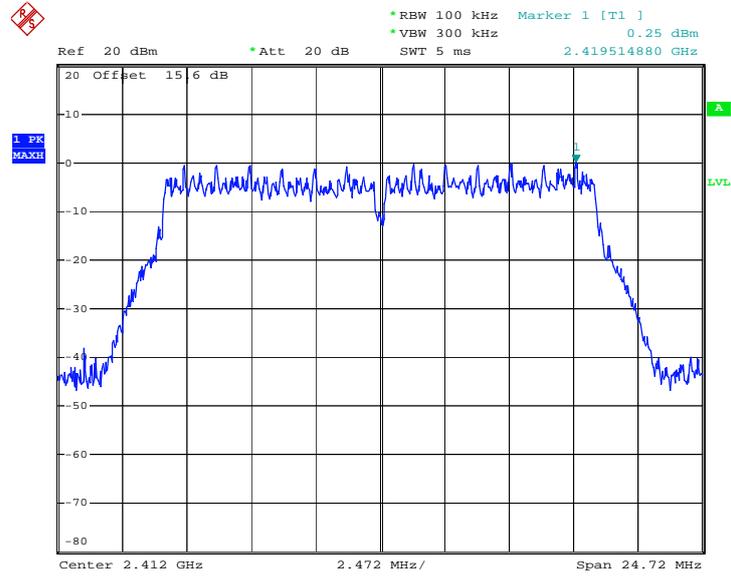

Date: 13.MAR.2013 15:53:40




PSD 100kHz Plot on 802.11g Channel 06

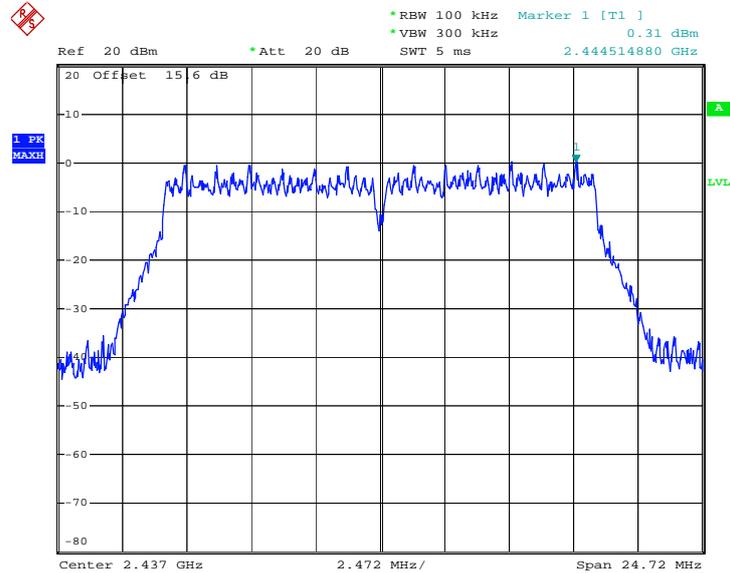

Date: 13.MAR.2013 15:56:14


PSD 100kHz Plot on 802.11g Channel 11

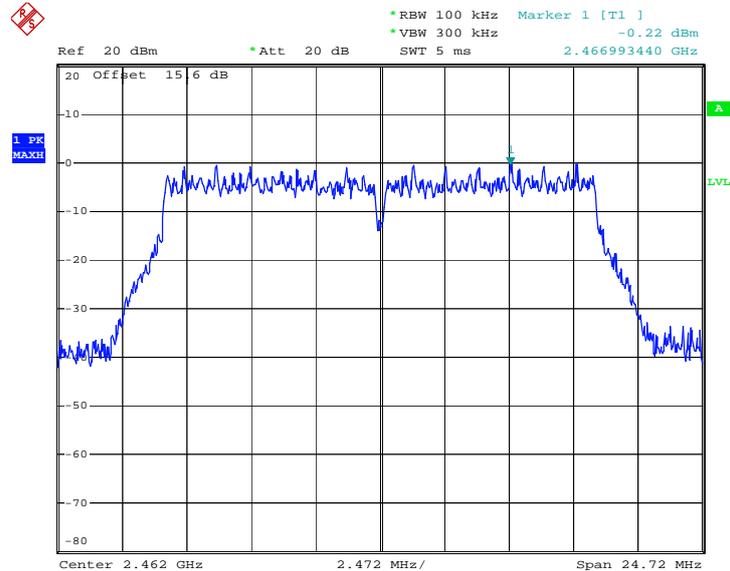

Date: 13.MAR.2013 15:58:27




PSD 100kHz Plot on 802.11n HT20 Channel 01

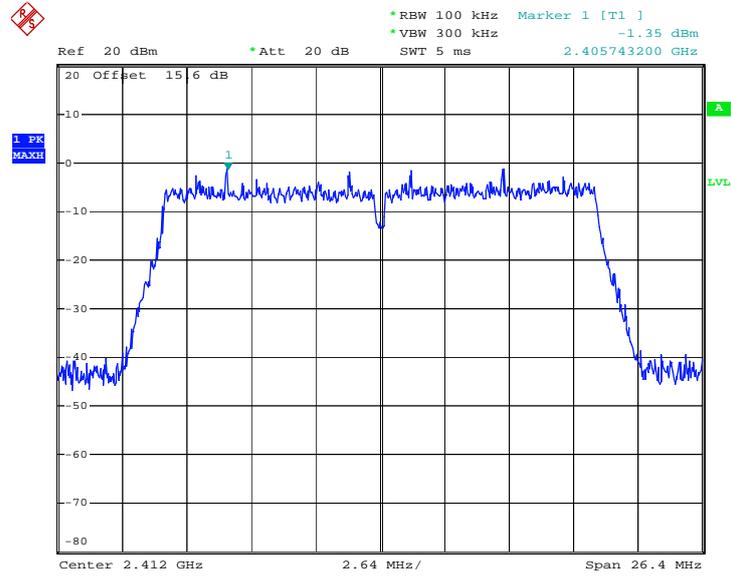

Date: 13.MAR.2013 16:01:08




PSD 100kHz Plot on 802.11n HT20 Channel 06

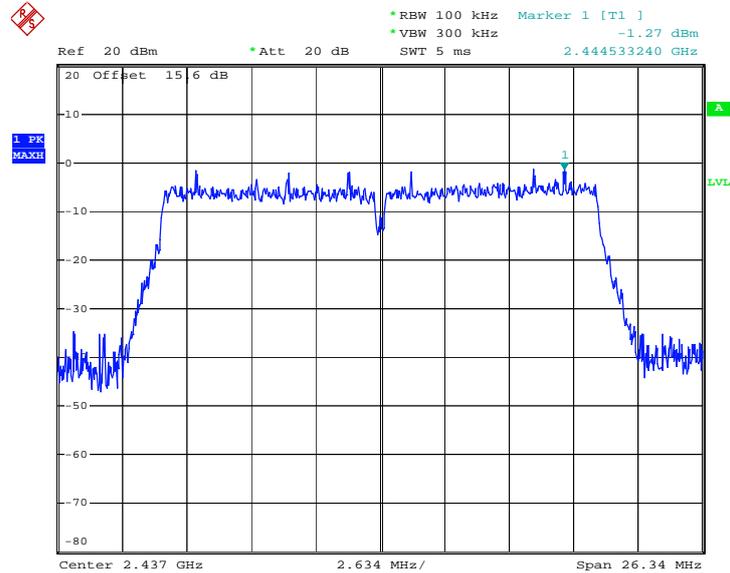

Date: 13.MAR.2013 16:04:10

PSD 100kHz Plot on 802.11n HT20 Channel 11

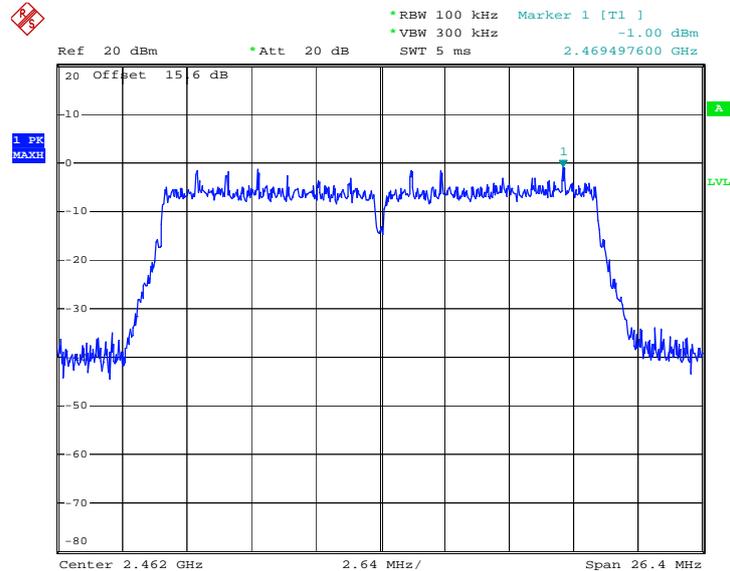


Date: 13.MAR.2013 16:06:27



### 3.3.7 Test Result of Power Spectral Density Plots (3kHz)


PSD 3kHz Plot on 802.11b Channel 01

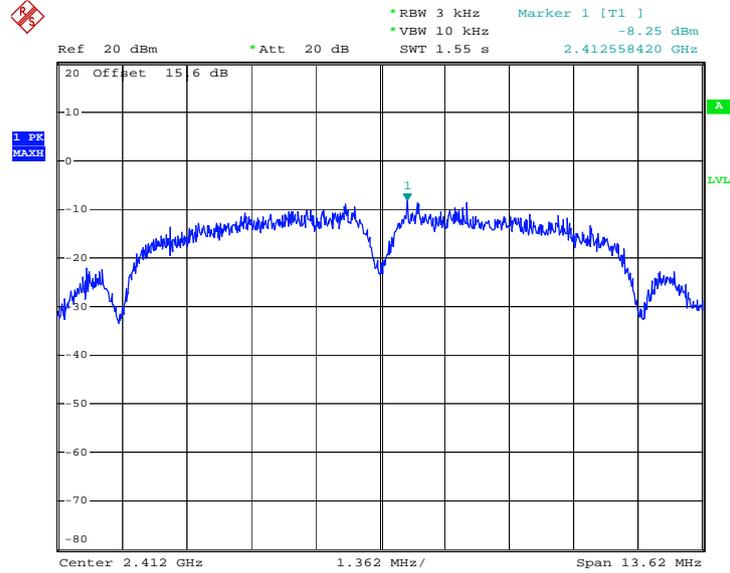

Date: 13.MAR.2013 15:45:12




PSD 3kHz Plot on 802.11b Channel 06

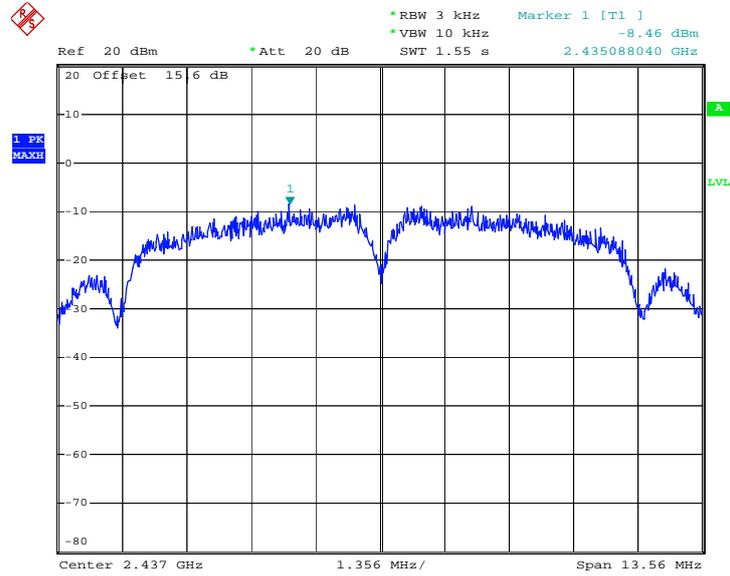

Date: 13.MAR.2013 15:48:14


PSD 3kHz Plot on 802.11b Channel 11

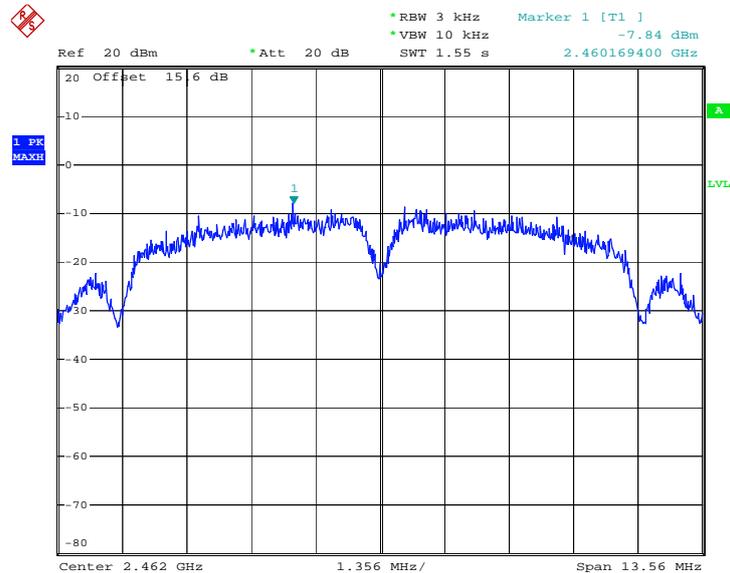

Date: 13.MAR.2013 15:50:37




PSD 3kHz Plot on 802.11g Channel 01

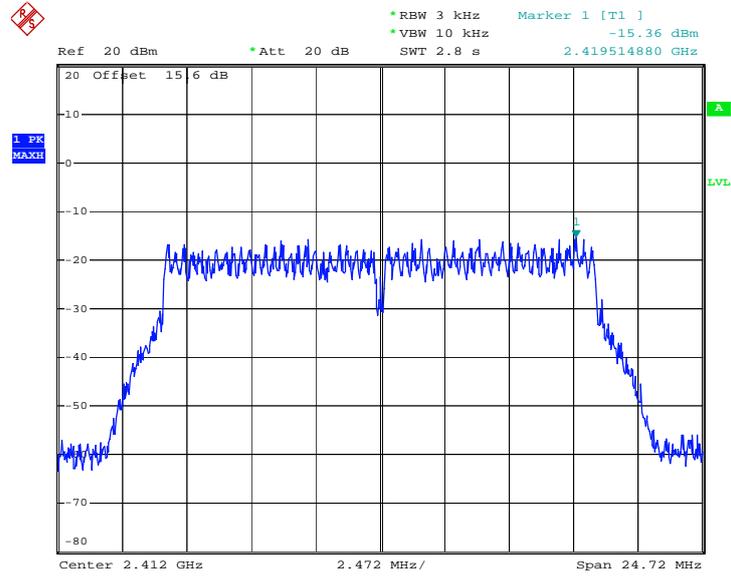

Date: 13.MAR.2013 15:53:31




PSD 3kHz Plot on 802.11g Channel 06

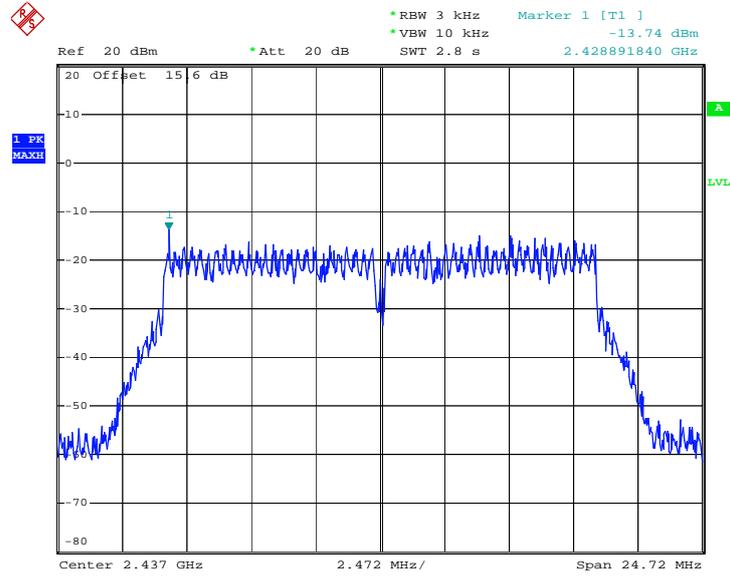

Date: 13.MAR.2013 15:56:04


PSD 3kHz Plot on 802.11g Channel 11

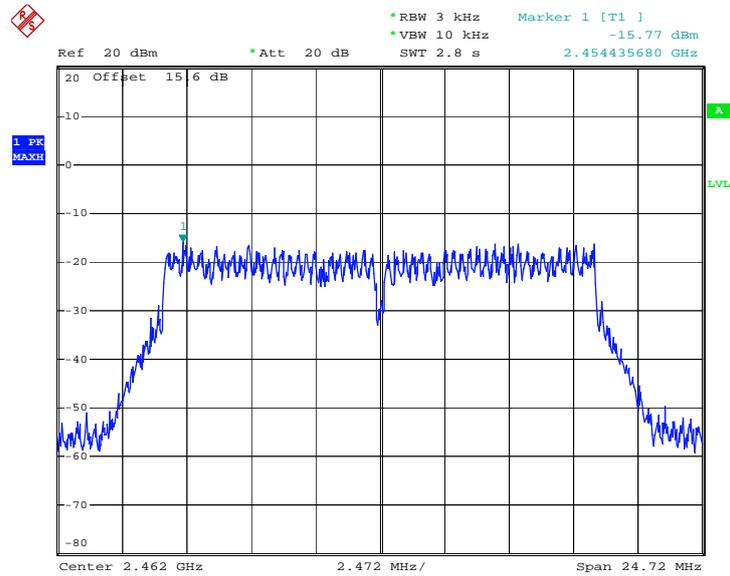

Date: 13.MAR.2013 15:58:17




PSD 3kHz Plot on 802.11n HT20 Channel 01

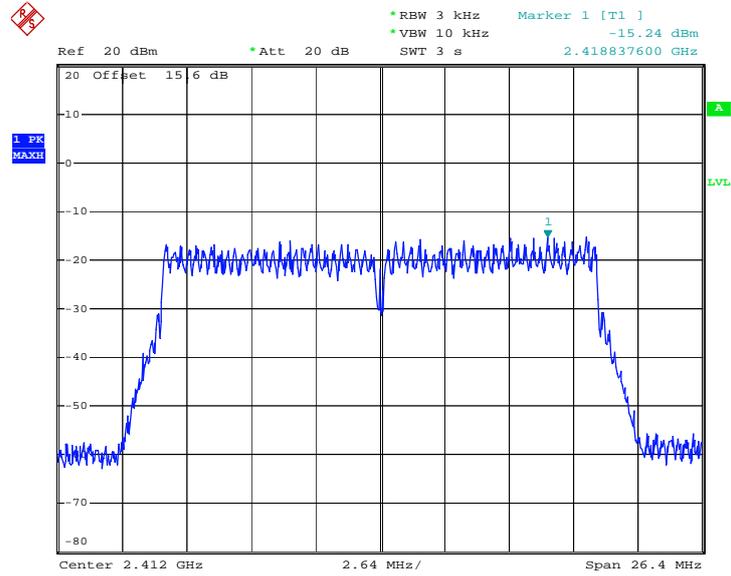

Date: 13.MAR.2013 16:00:58




PSD 3kHz Plot on 802.11n HT20 Channel 06

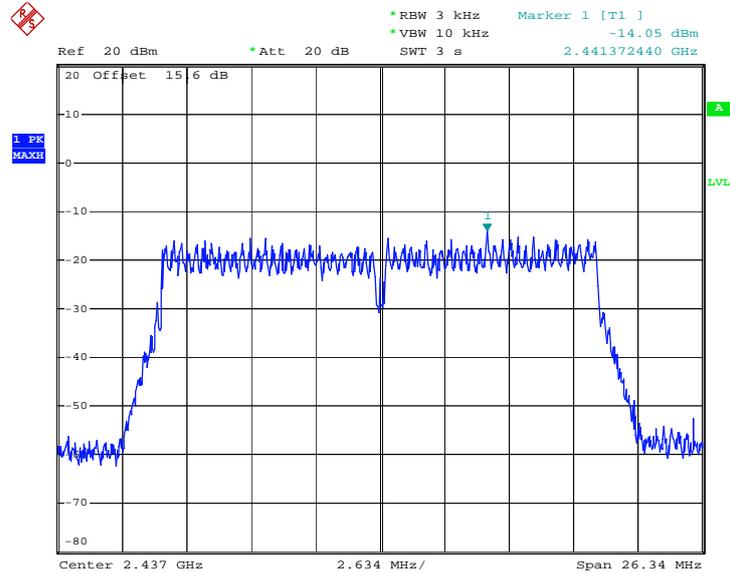

Date: 13.MAR.2013 16:04:00

PSD 3kHz Plot on 802.11n HT20 Channel 11

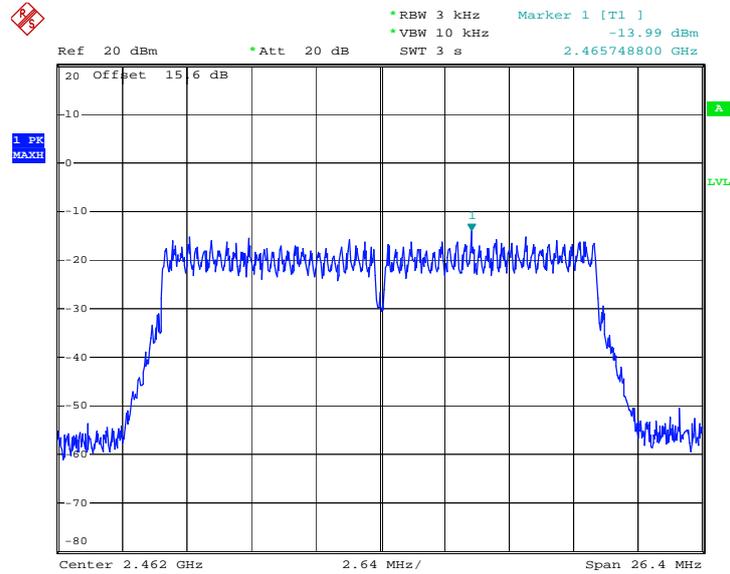

Date: 13.MAR.2013 16:06:18

### 3.4 Conducted Band Edges and Spurious Emission Measurement

#### 3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


#### 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.4.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 KHz, VBW=300 KHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz, when maximum peak conducted output power procedure is used. The attenuation is set to 30dB, when maximum conducted output power procedure is used.
5. Measure and record the results in the test report.

#### 3.4.4 Test Setup

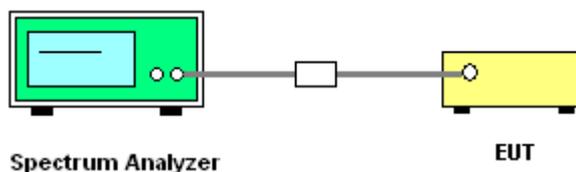




### 3.4.5 Test Plots of Conducted Band Edges


Test Mode :	802.11b	Temperature :	23~24°C
Test Band :	Low and High	Relative Humidity :	47~48%
Test Channel :	01 and 11	Test Engineer :	Lizy Li

Low Band Edge Plot on 802.11b Channel 01

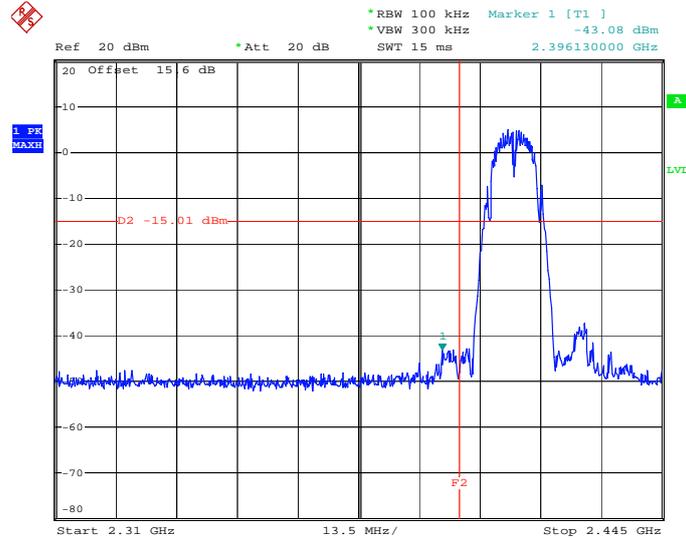

Date: 13.MAR.2013 15:45:38

High Band Edge Plot on 802.11b Channel 11

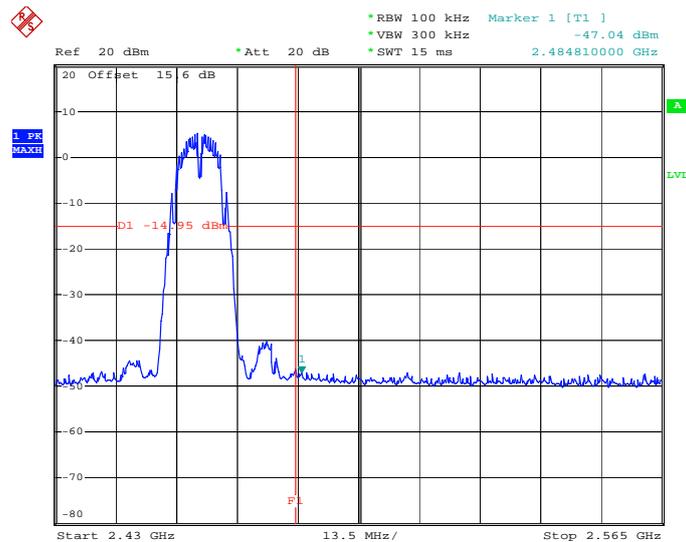


Date: 13.MAR.2013 16:10:00




Test Mode :	802.11g	Temperature :	23~24°C
Test Band :	Low and High	Relative Humidity :	47~48%
Test Channel :	01 and 11	Test Engineer :	Lizy Li

Low Band Edge Plot on 802.11g Channel 01

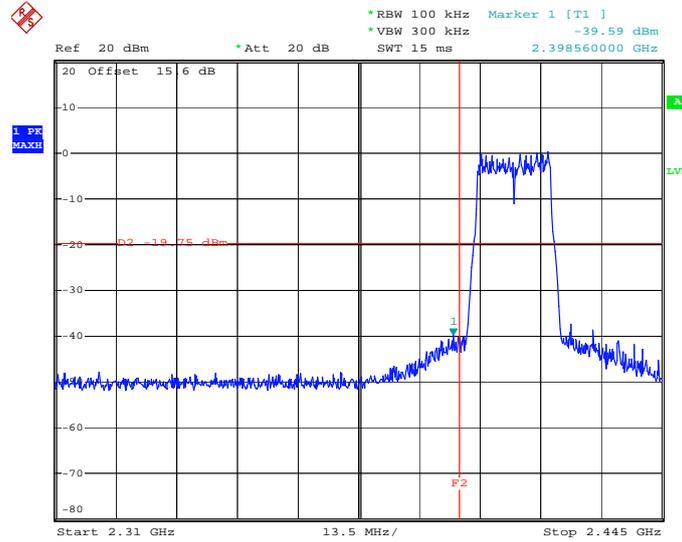

Date: 13.MAR.2013 15:53:57

High Band Edge Plot on 802.11g Channel 11

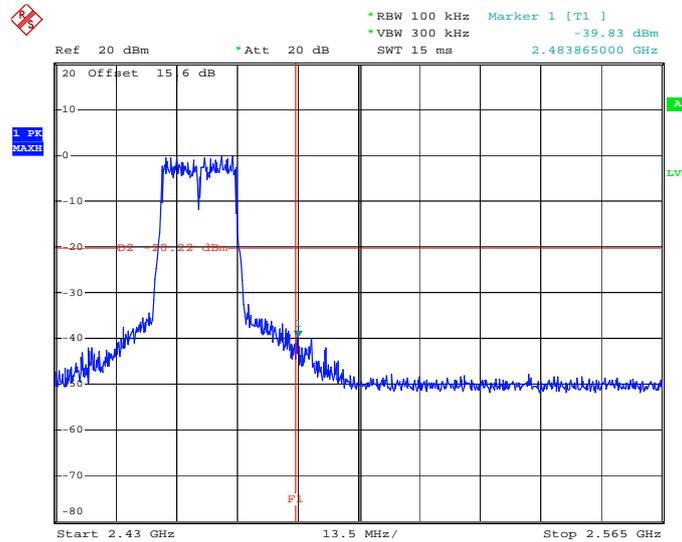


Date: 13.MAR.2013 15:58:43




Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Band :	Low and High	Relative Humidity :	47~48%
Test Channel :	01 and 11	Test Engineer :	Lizy Li

Low Band Edge Plot on 802.11n HT20 Channel 01

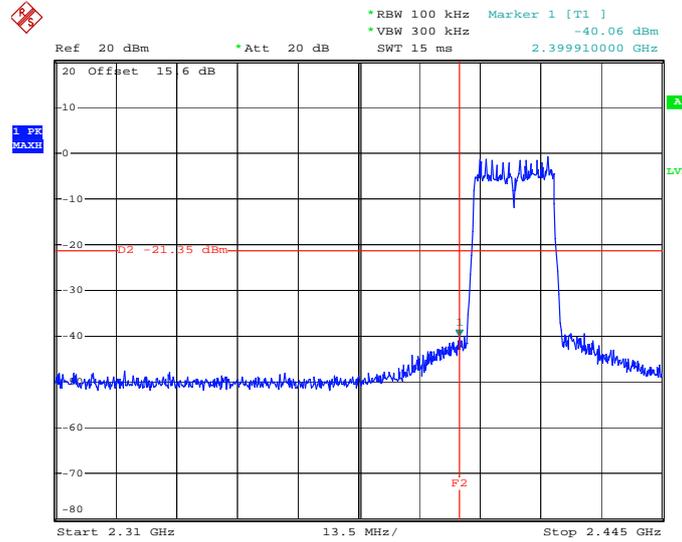

Date: 13.MAR.2013 16:01:24

High Band Edge Plot on 802.11n HT20 Channel 11

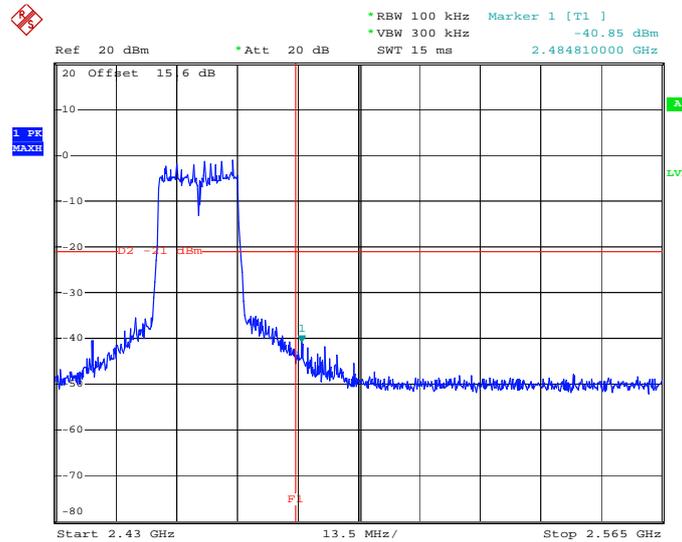


Date: 13.MAR.2013 16:06:44

### 3.4.6 Test Plots of Spurious Emission

Test Mode :	802.11b	Temperature :	23~24°C
Test Band :	30MHz-3GHz and 2G-25GHz	Relative Humidity :	47~48%
Test Channel :	01, 06, 11	Test Engineer :	Lizy Li

#### 802.11b 30 MHz~3 GHz


#### Conducted Spurious Emission Plot on Channel 01

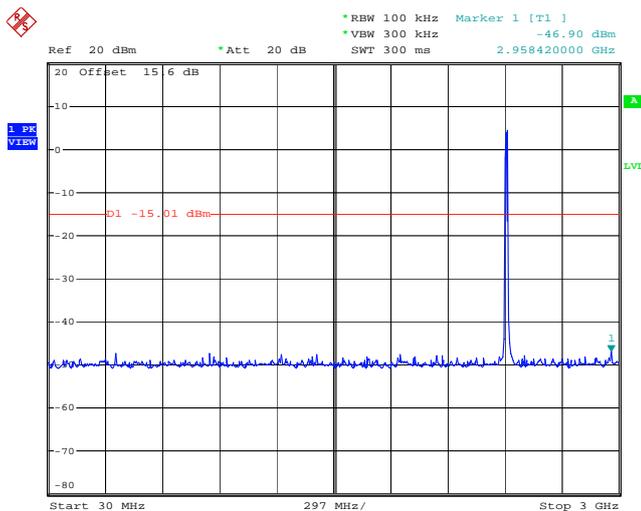

Date: 13.MAR.2013 16:11:26

#### 802.11b 2 GHz~25 GHz

#### Conducted Spurious Emission Plot on Channel 01

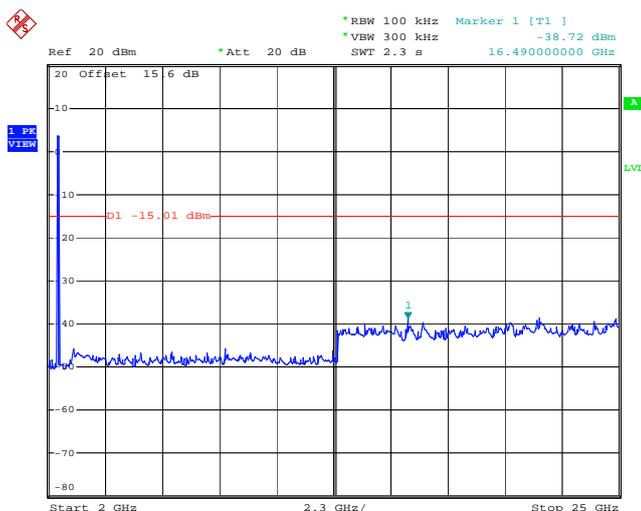


Date: 16.MAR.2013 23:42:09



802.11b 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 06

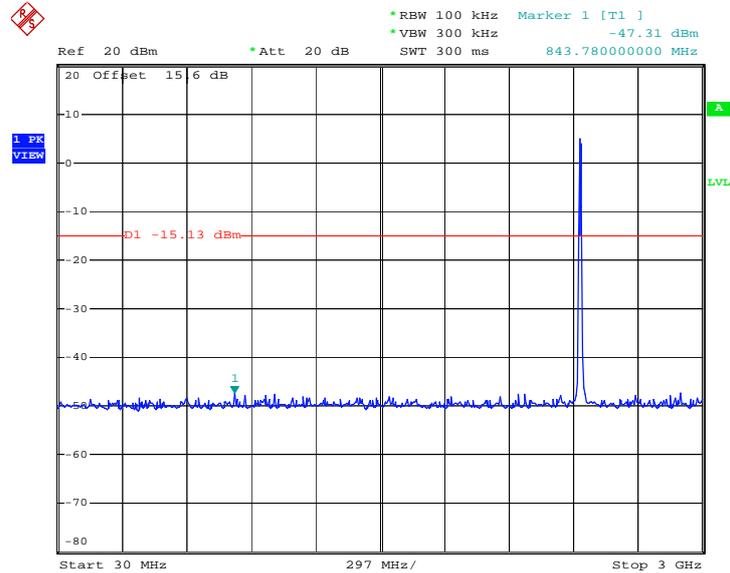

Date: 13.MAR.2013 16:12:32

802.11b 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 06

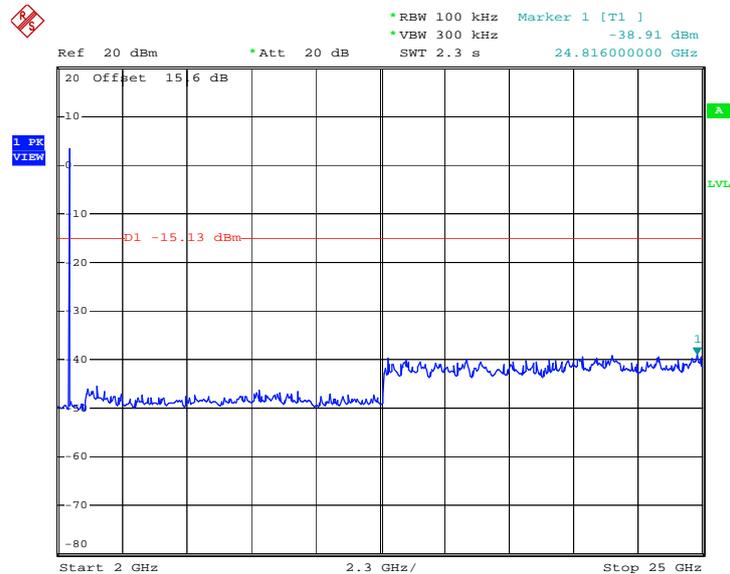


Date: 16.MAR.2013 23:44:19



802.11b 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 11

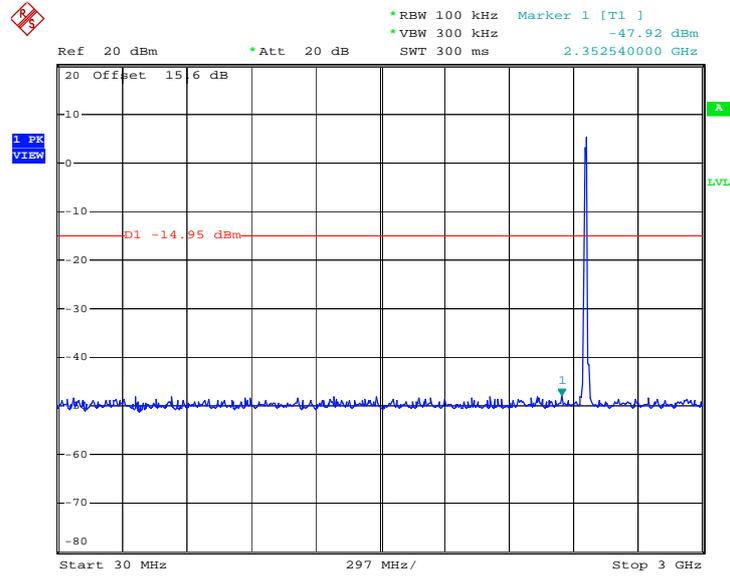

Date: 13.MAR.2013 16:13:20

802.11b 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 11

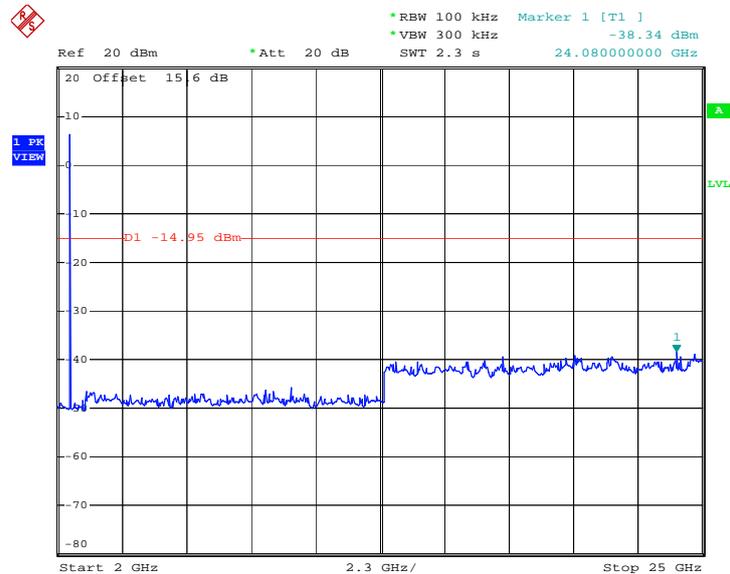


Date: 16.MAR.2013 23:45:01



Test Mode :	802.11g	Temperature :	23~24°C
Test Band :	30MHz-3GHz and 2G-25GHz	Relative Humidity :	47~48%
Test Channel :	01, 06, 11	Test Engineer :	Lizy Li

802.11g 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 01

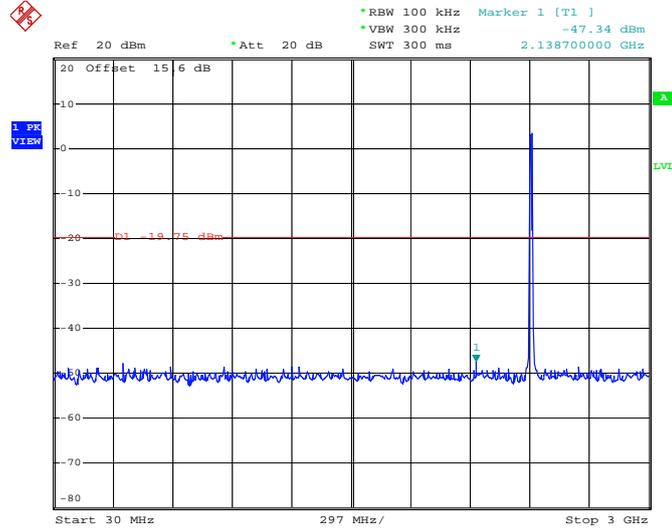

Date: 16.MAR.2013 23:58:17

802.11g 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 01

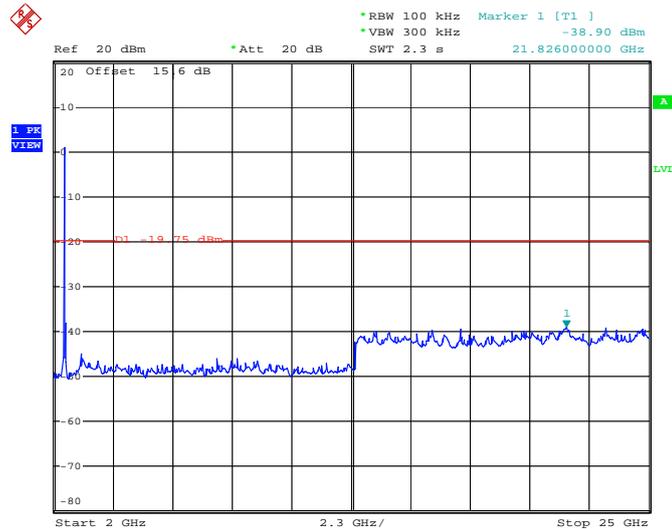


Date: 16.MAR.2013 23:47:18



802.11g 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 06

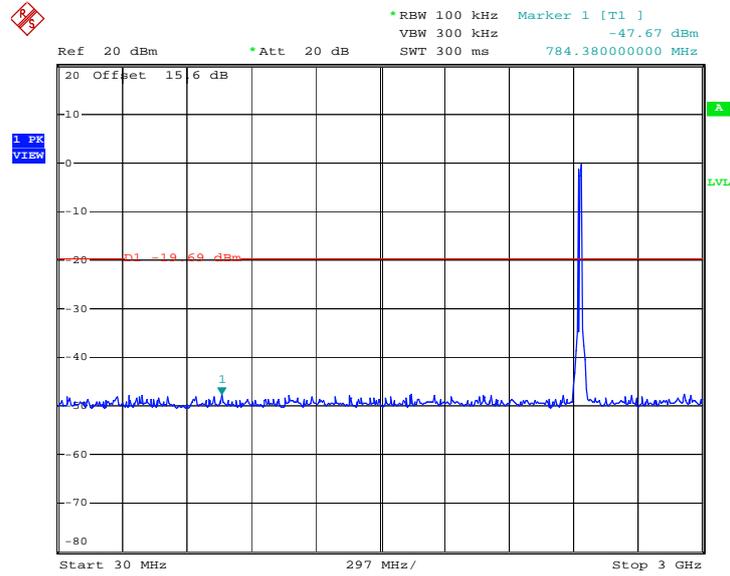

Date: 13.MAR.2013 16:18:19

802.11g 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 06

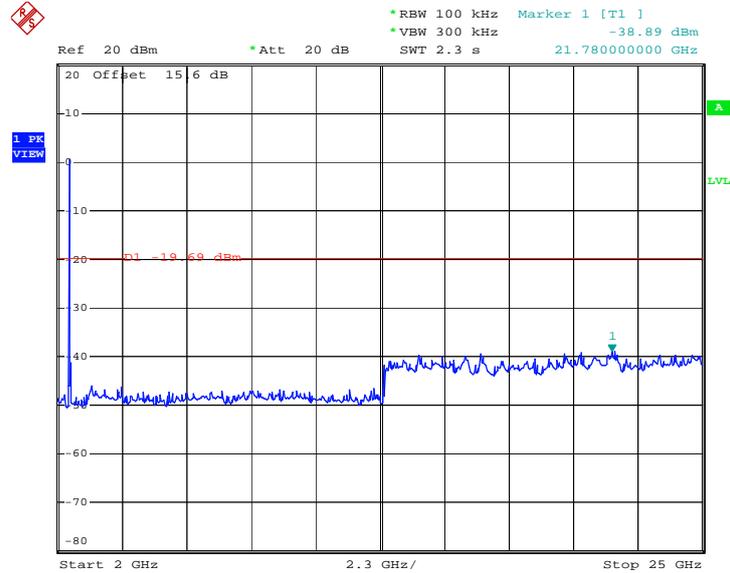


Date: 16.MAR.2013 23:47:53



802.11g 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 11

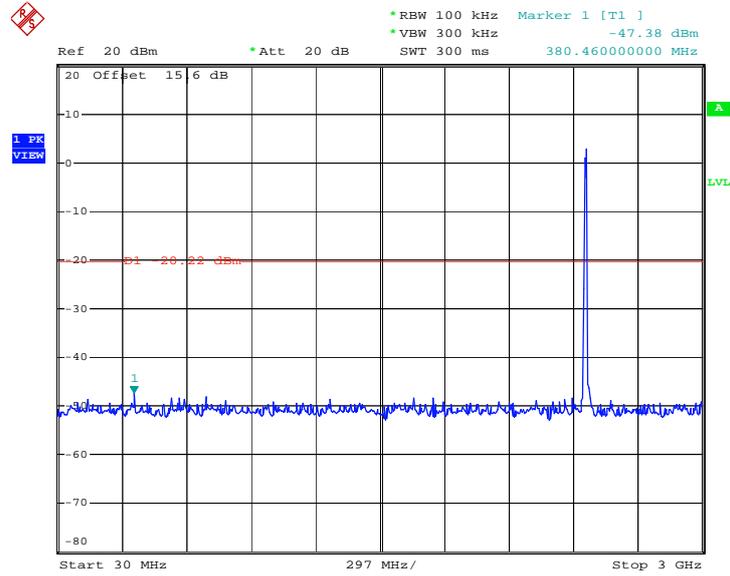

Date: 17.MAR.2013 00:01:18

802.11g 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 11

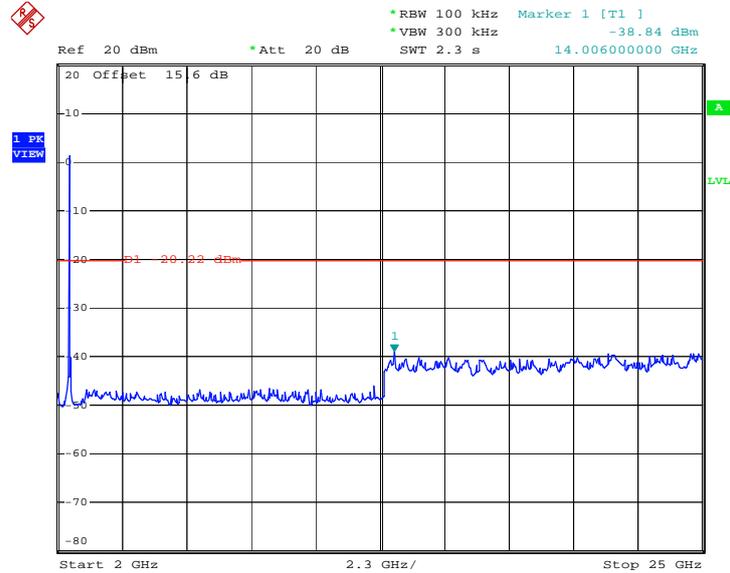


Date: 16.MAR.2013 23:48:26



Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Band :	30MHz-3GHz and 2G-25GHz	Relative Humidity :	47~48%
Test Channel :	01, 06, 11	Test Engineer :	Lizy Li

802.11n HT20 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 01

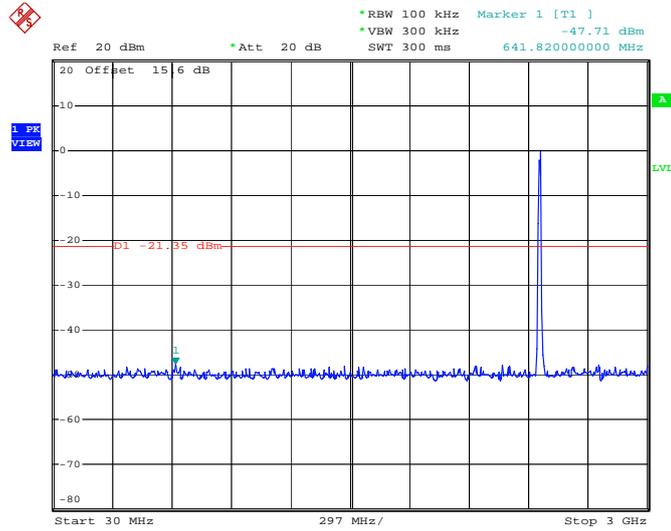

Date: 17.MAR.2013 01:10:38

802.11n HT20 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 01

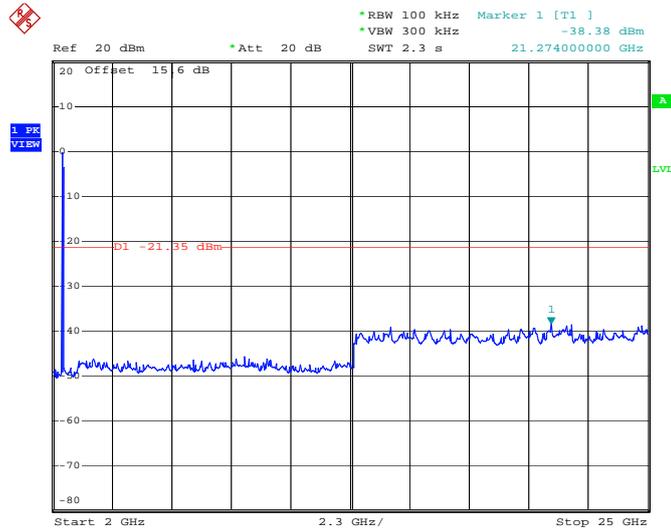


Date: 16.MAR.2013 23:49:26



802.11n HT20 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 06

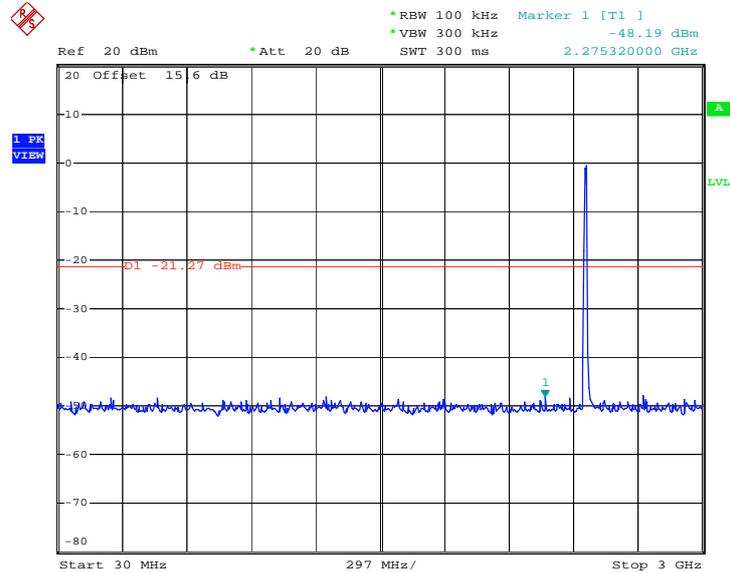

Date: 17.MAR.2013 01:09:59

802.11n HT20 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 06

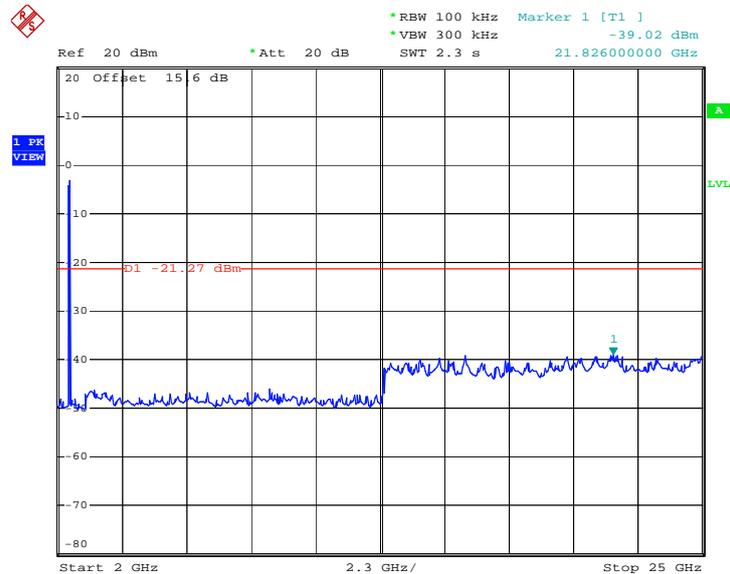


Date: 16.MAR.2013 23:50:10



802.11n HT20 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 11

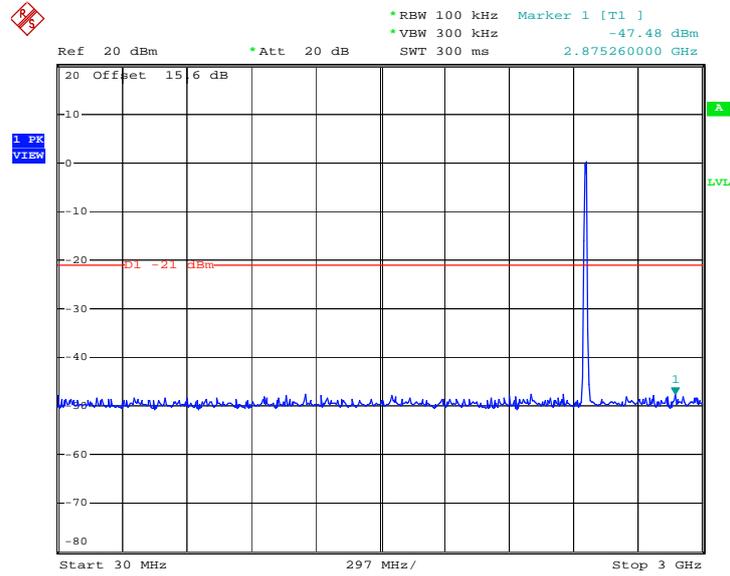

Date: 17.MAR.2013 01:14:04

802.11n HT20 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 11

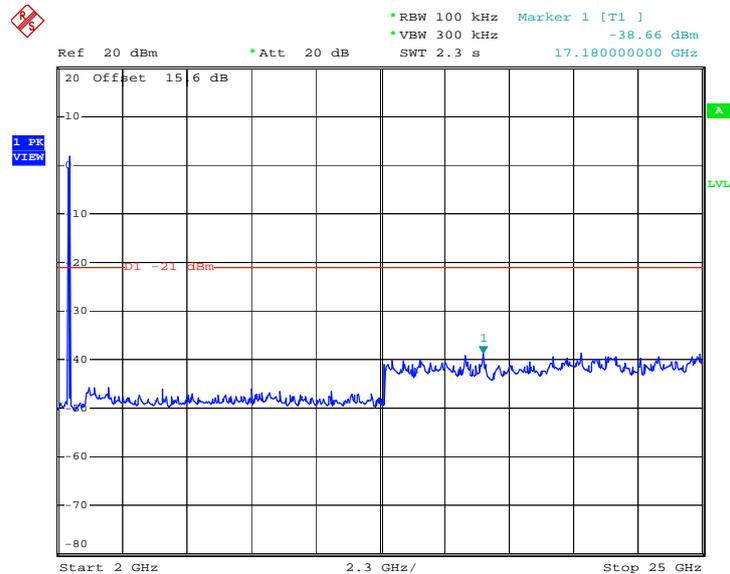

Date: 16.MAR.2013 23:51:31



### 3.5 Radiated Emission Measurement

#### 3.5.1 Limit of Radiated Emission

In any 100 KHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

See list of measuring instruments of this test report.



### 3.5.3 Test Procedures


1. The testing follows the guidelines in ANSI C63. 10-2009
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 KHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz,  $VBW = 3$ MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - $VBW = 10$  Hz, when duty cycle is no less than 98 percent.
    - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle (%)	T(ms)	1/T(KHz)	VBW Setting
802.11b	99.057	-	-	10Hz
802.11g	61.538	0.176	5.682	10KHz
802.11n HT20	91.513	1.294	0.773	1KHz


**Note:** For average measurement with duty cycle < 98%, use reduced VBW measurement method 4.2.3.2.3 in ANSI C63.10.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

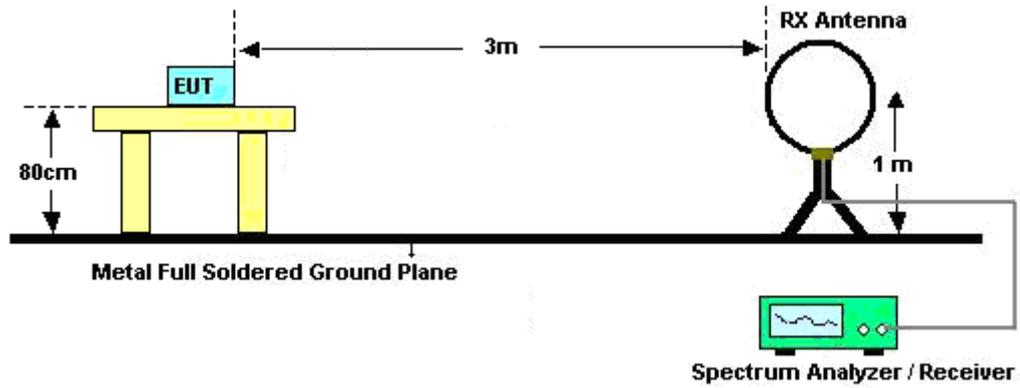

For radiated emissions from 30MHz to 1GHz

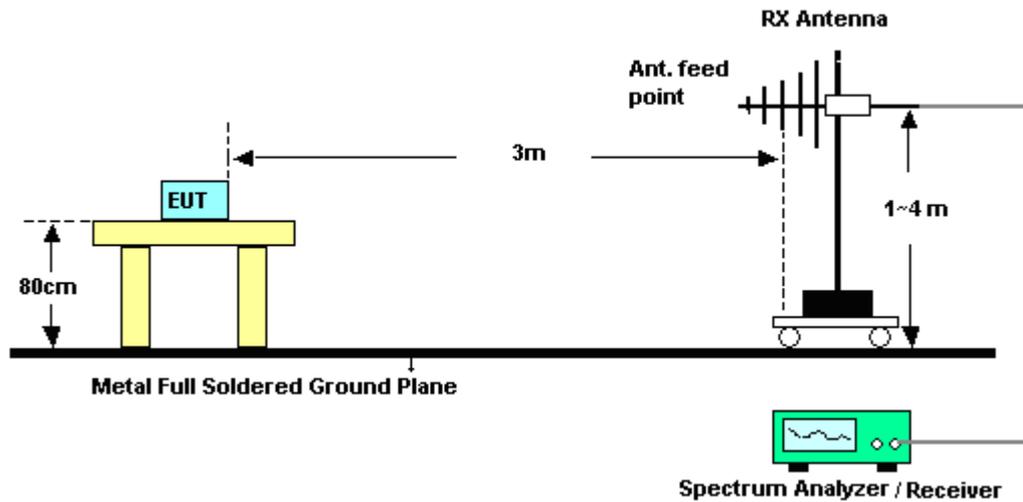

For radiated emissions above 1GHz

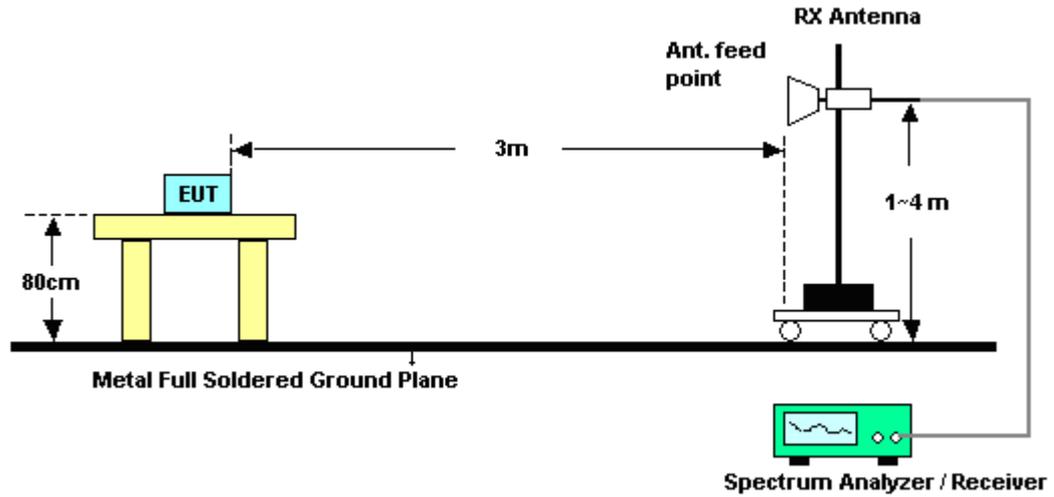

### 3.5.5 Test Results of Radiated Emissions (9 KHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.5.6 Test Result of Radiated Band Edges

Test Mode :	802.11b	Temperature :	23~24°C
Test Band :	Low	Relative Humidity :	42~43%
Test Channel :	01	Test Engineer :	Marlboro Wang

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2388.12	55.25	-18.75	74	51	32.36	6.45	34.56	108	140	Peak
2386.77	43.98	-10.02	54	39.73	32.36	6.45	34.56	108	140	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2386.95	54.4	-19.6	74	50.15	32.36	6.45	34.56	200	278	Peak
2386.77	43.02	-10.98	54	38.77	32.36	6.45	34.56	200	278	Average

Test Mode :	802.11b	Temperature :	23~24°C
Test Band :	High	Relative Humidity :	42~43%
Test Channel :	11	Test Engineer :	Marlboro Wang

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.8	58.76	-15.24	74	54.24	32.48	6.59	34.55	133	260	Peak
2483.5	50.96	-3.04	54	46.44	32.48	6.59	34.55	133	260	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.71	57.09	-16.91	74	52.57	32.48	6.59	34.55	200	277	Peak
2483.5	48.53	-5.47	54	44.01	32.48	6.59	34.55	200	277	Average



Test Mode :	802.11g	Temperature :	23~24°C
Test Band :	Low	Relative Humidity :	42~43%
Test Channel :	01	Test Engineer :	Marlboro Wang

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.92	65.4	-8.6	74	61.15	32.36	6.45	34.56	102	113	Peak
2389.65	46.44	-7.56	54	42.19	32.36	6.45	34.56	102	113	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.47	65.52	-8.48	74	61.27	32.36	6.45	34.56	200	276	Peak
2389.83	47.98	-6.02	54	43.73	32.36	6.45	34.56	200	276	Average

Test Mode :	802.11g	Temperature :	23~24°C
Test Band :	High	Relative Humidity :	42~43%
Test Channel :	11	Test Engineer :	Marlboro Wang

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2484.73	66.56	-7.44	74	62.9	33.01	2.16	31.51	100	131	Peak
2483.56	46.09	-7.91	54	42.43	33.01	2.16	31.51	100	131	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.65	62.23	-11.77	74	58.57	33.01	2.16	31.51	104	105	Peak
2483.62	42.98	-11.02	54	39.32	33.01	2.16	31.51	104	105	Average



Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Band :	Low	Relative Humidity :	42~43%
Test Channel :	01	Test Engineer :	Marlboro Wang

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.83	68.66	-5.34	74	64.41	32.36	6.45	34.56	139	243	Peak
2389.92	48.63	-5.37	54	44.38	32.36	6.45	34.56	139	243	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.56	64.96	-9.04	74	60.71	32.36	6.45	34.56	200	277	Peak
2389.65	45.81	-8.19	54	41.56	32.36	6.45	34.56	200	277	Average

Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Band :	High	Relative Humidity :	42~43%
Test Channel :	11	Test Engineer :	Marlboro Wang

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2489.5	69.98	-4.02	74	65.44	32.5	6.59	34.55	131	246	Peak
2483.74	50.78	-3.22	54	46.26	32.48	6.59	34.55	131	246	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2487.58	67.02	-6.98	74	62.48	32.5	6.59	34.55	197	248	Peak
2483.62	47.29	-6.71	54	42.77	32.48	6.59	34.55	197	248	Average

### 3.5.7 Test Result of Radiated Emission (30 MHz ~ 10<sup>th</sup> Harmonic)

NOTE: Below 1GHz for radiated emission measurement, pre-scanned all test modes and only choose the worst case mode was recorded in the report.

<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Marlboro Wang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2412 MHz is fundamental signal which can be ignored. 2. 7236 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. For example, 109.29 dBuV/m - 20dB = 89.29 dBuV/m. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2412	104.02	-	-	99.71	32.38	6.49	34.56	109	155	Average
2412	109.29	-	-	104.98	32.38	6.49	34.56	109	155	Peak
4824	48.27	-25.73	74	58.82	34.87	10.17	55.59	100	0	Peak
7236	49.66	-39.63	89.29	58.97	36.15	10.96	56.42	100	0	Peak

<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Marlboro Wang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2412 MHz is fundamental signal which can be ignored. 2. 7236 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2413	101.55	-	-	97.24	32.38	6.49	34.56	200	297	Average
2413	106.9	-	-	102.59	32.38	6.49	34.56	200	297	Peak
4824	48.43	-25.57	74	58.98	34.87	10.17	55.59	100	0	Peak
7236	49.54	-37.36	86.9	58.85	36.15	10.96	56.42	100	0	Peak



<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Marlboro Wang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2438 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2438	104.59	-	-	100.2	32.43	6.52	34.56	197	188	Average
2438	109.91	-	-	105.52	32.43	6.52	34.56	197	188	Peak
4875	48.5	-25.5	74	59.15	34.85	10.18	55.68	100	0	Peak
7311	50.29	-23.71	74	59.49	36.14	10.94	56.28	100	0	Peak

<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Marlboro Wang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2436 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2436	101.73	-	-	97.37	32.4	6.52	34.56	200	305	Average
2436	107.33	-	-	102.97	32.4	6.52	34.56	200	305	Peak
4875	48.72	-25.28	74	59.37	34.85	10.18	55.68	100	0	Peak
7311	49.78	-24.22	74	58.98	36.14	10.94	56.28	100	0	Peak



<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Marlboro Wang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
102.09	33.91	-9.59	43.5	53.13	11.36	1.11	31.69	-	-	Peak
160.68	36.31	-7.19	43.5	56.54	9.92	1.5	31.65	-	-	Peak
205.5	40.28	-3.22	43.5	61.26	9.08	1.57	31.63	100	56	Peak
304.9	36.99	-9.01	46	53.39	13.34	1.92	31.66	-	-	Peak
666.8	32.2	-13.8	46	42.2	19.14	2.84	31.98	-	-	Peak
769	32.85	-13.15	46	41.96	19.9	3.05	32.06	-	-	Peak
2462	104.67	-	-	100.22	32.45	6.56	34.56	194	192	Average
2462	110.02	-	-	105.57	32.45	6.56	34.56	194	192	Peak
4923	49.51	-24.49	74	60.26	34.83	10.2	55.78	100	0	Peak
7386	49.82	-24.18	74	58.89	36.12	10.92	56.11	100	0	Peak



<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Marlboro Wang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
44.04	36.83	-3.17	40	57.44	10.38	0.71	31.7	100	213	Peak
102.09	31.18	-12.32	43.5	50.4	11.36	1.11	31.69	-	-	Peak
201.45	34.71	-8.79	43.5	55.56	9.23	1.56	31.64	-	-	Peak
352.5	30.62	-15.38	46	45.76	14.36	2.06	31.56	-	-	Peak
533.1	34.27	-11.73	46	45.36	18.25	2.51	31.85	-	-	Peak
918.8	26.77	-19.23	46	34.17	20.7	3.32	31.42	-	-	Peak
2462	102.44	-	-	97.99	32.45	6.56	34.56	200	300	Average
2462	107.77	-	-	103.32	32.45	6.56	34.56	200	300	Peak
4923	49.09	-24.91	74	59.84	34.83	10.2	55.78	100	0	Peak
7386	50.42	-23.58	74	59.49	36.12	10.92	56.11	100	0	Peak



<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Marlboro Wang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2413 MHz is fundamental signal which can be ignored. 2. 7236 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2413	99.6	-	-	95.29	32.38	6.49	34.56	135	232	Average
2413	109.01	-	-	104.7	32.38	6.49	34.56	135	232	Peak
4824	47.96	-26.04	74	58.51	34.87	10.17	55.59	100	0	Peak
7236	50.45	-38.56	89.01	59.76	36.15	10.96	56.42	100	0	Peak

<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Marlboro Wang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2413 MHz is fundamental signal which can be ignored. 2. 7236 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2413	97.82	-	-	93.51	32.38	6.49	34.56	200	290	Average
2413	107.46	-	-	103.15	32.38	6.49	34.56	200	290	Peak
4824	47.76	-26.24	74	58.31	34.87	10.17	55.59	100	0	Peak
7236	49.43	-38.03	87.46	58.74	36.15	10.96	56.42	100	0	Peak



<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Marlboro Wang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2438 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2438	100.59	-	-	96.2	32.43	6.52	34.56	200	191	Average
2438	110.37	-	-	105.98	32.43	6.52	34.56	200	191	Peak
4875	48.05	-25.95	74	58.7	34.85	10.18	55.68	100	0	Peak
7311	49.38	-24.62	74	58.58	36.14	10.94	56.28	100	0	Peak

<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Marlboro Wang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2436 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2436	97.92	-	-	93.56	32.4	6.52	34.56	200	306	Average
2436	107.14	-	-	102.78	32.4	6.52	34.56	200	306	Peak
4875	48.64	-25.36	74	59.29	34.85	10.18	55.68	100	0	Peak
7311	49.58	-24.42	74	58.78	36.14	10.94	56.28	100	0	Peak



<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Marlboro Wang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
102	30.06	-13.44	43.5	52.35	10.74	0.58	33.61	-	-	Peak
165.49	27.08	-16.42	43.5	50.54	9.36	0.75	33.57	-	-	Peak
247.68	38.68	-7.32	46	59.32	11.88	0.92	33.44	120	1	Peak
283.98	32.41	-13.59	46	52.09	12.74	0.97	33.39	-	-	Peak
365.54	29.72	-16.28	46	47.08	14.88	1.11	33.35	-	-	Peak
942.13	27.16	-18.84	46	37.15	20.7	1.75	32.44	-	-	Peak
2462	107.25	-	-	103.63	32.98	2.15	31.51	100	130	Peak
2462	96.74	-	-	93.12	32.98	2.15	31.51	100	130	Average
4924	48.17	-25.83	74	41.34	35.19	3.15	31.51	102	0	Peak
7386	49.73	-24.27	74	41.23	36.24	3.19	30.93	120	354	Peak



<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Marlboro Wang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
33.92	24.62	-15.38	40	42.3	15.56	0.36	33.6	-	-	Peak
102	33.83	-9.67	43.5	56.12	10.74	0.58	33.61	100	231	Peak
251.18	27.33	-18.67	46	47.84	12.01	0.92	33.44	-	-	Peak
364.26	25.47	-20.53	46	42.85	14.86	1.11	33.35	-	-	Peak
614.21	26.96	-19.04	46	39.83	18.67	1.41	32.95	-	-	Peak
948.76	27.11	-18.89	46	37.07	20.73	1.75	32.44	-	-	Peak
2462	103.47	-	-	99.85	32.98	2.15	31.51	102	104	Peak
2462	92.64	-	-	89.02	32.98	2.15	31.51	102	104	Average
4924	48.98	-25.02	74	42.15	35.19	3.15	31.51	110	231	Peak
7386	50.43	-23.57	74	41.93	36.24	3.19	30.93	135	122	Peak



<b>Test Mode :</b>	802.11n HT20	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Marlboro Wang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2413 MHz is fundamental signal which can be ignored. 2. 7236 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2413	98.54	-	-	94.23	32.38	6.49	34.56	136	236	Average
2413	108.55	-	-	104.24	32.38	6.49	34.56	136	236	Peak
4824	47.62	-26.38	74	58.17	34.87	10.17	55.59	100	0	Peak
7236	49.71	-38.84	88.55	59.02	36.15	10.96	56.42	100	0	Peak

<b>Test Mode :</b>	802.11n HT20	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Marlboro Wang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2413 MHz is fundamental signal which can be ignored. 2. 7236 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2413	95.93	-	-	91.62	32.38	6.49	34.56	200	296	Average
2413	106.25	-	-	101.94	32.38	6.49	34.56	200	296	Peak
4824	47.65	-26.35	74	58.2	34.87	10.17	55.59	100	0	Peak
7236	48.82	-37.43	86.25	58.13	36.15	10.96	56.42	100	0	Peak



<b>Test Mode :</b>	802.11n HT20	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Marlboro Wang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2438 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2438	97.89	-	-	93.5	32.43	6.52	34.56	105	196	Average
2438	108.02	-	-	103.63	32.43	6.52	34.56	105	196	Peak
4875	47.64	-26.36	74	58.29	34.85	10.18	55.68	100	0	Peak
7311	48.41	-25.59	74	57.61	36.14	10.94	56.28	100	0	Peak

<b>Test Mode :</b>	802.11n HT20	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Marlboro Wang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2436 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2436	95.88	-	-	91.52	32.4	6.52	34.56	200	297	Average
2436	106.19	-	-	101.83	32.4	6.52	34.56	200	297	Peak
4875	47.86	-26.14	74	58.51	34.85	10.18	55.68	100	0	Peak
7311	49.47	-24.53	74	58.67	36.14	10.94	56.28	100	0	Peak



<b>Test Mode :</b>	802.11n HT20	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Marlboro Wang	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2463 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
102.09	33.73	-9.77	43.5	52.95	11.36	1.11	31.69	-	-	Peak
165	36.71	-6.79	43.5	56.85	10	1.52	31.66	-	-	Peak
249.78	42.12	-3.88	46	59.64	12.4	1.73	31.65	100	156	Peak
300	37.06	-8.94	46	53.63	13.2	1.9	31.67	-	-	Peak
361.6	35.13	-10.87	46	49.97	14.64	2.09	31.57	-	-	Peak
458.2	27.14	-18.86	46	39.62	17.04	2.33	31.85	-	-	Peak
2463	98.57	-	-	94.12	32.45	6.56	34.56	104	193	Average
2463	108.76	-	-	104.31	32.45	6.56	34.56	104	193	Peak
4923	47.73	-26.27	74	58.48	34.83	10.2	55.78	100	0	Peak
7386	50.14	-23.86	74	59.21	36.12	10.92	56.11	100	0	Peak



<b>Test Mode :</b>	802.11n HT20	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Marlboro Wang	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2463 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
43.5	34.3	-5.7	40	54.91	10.38	0.71	31.7	100	99	Peak
165.81	32.18	-11.32	43.5	52.38	9.94	1.52	31.66	-	-	Peak
280.83	34.24	-11.76	46	51.21	12.91	1.85	31.73	-	-	Peak
300.7	31.54	-14.46	46	48.07	13.23	1.91	31.67	-	-	Peak
356.7	30.71	-15.29	46	45.68	14.51	2.08	31.56	-	-	Peak
555.5	27.17	-18.83	46	37.41	19.1	2.57	31.91	-	-	Peak
2463	95.87	-	-	91.42	32.45	6.56	34.56	197	298	Average
2463	106.04	-	-	101.59	32.45	6.56	34.56	197	298	Peak
4923	47.58	-26.42	74	58.33	34.83	10.2	55.78	100	0	Peak
7386	49.17	-24.83	74	58.24	36.12	10.92	56.11	100	0	Peak

## 3.6 AC Conducted Emission Measurement

### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


### 3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.6.3 Test Procedures

1. The testing follows the guidelines in ANSI C63.4-2003 and ANSI C63.10-2009.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 KHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


### 3.6.4 Test Setup

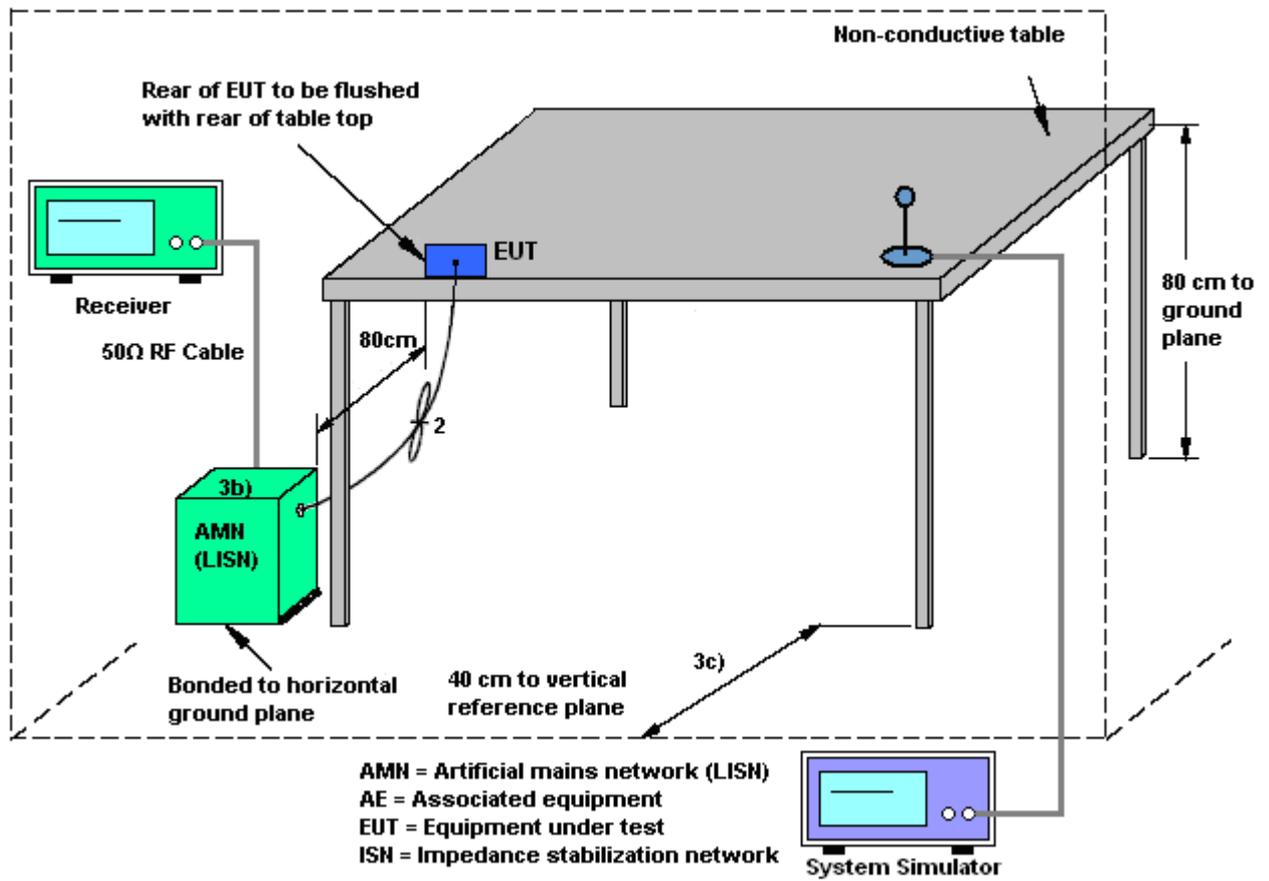



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	19~20°C
Test Engineer :	Tom Wang	Relative Humidity :	39~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	Bluetooth Link + WLAN Link + USB Cable 1 (Charging from Adapter 3) + Battery 1 + Earphone for Sample 1		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

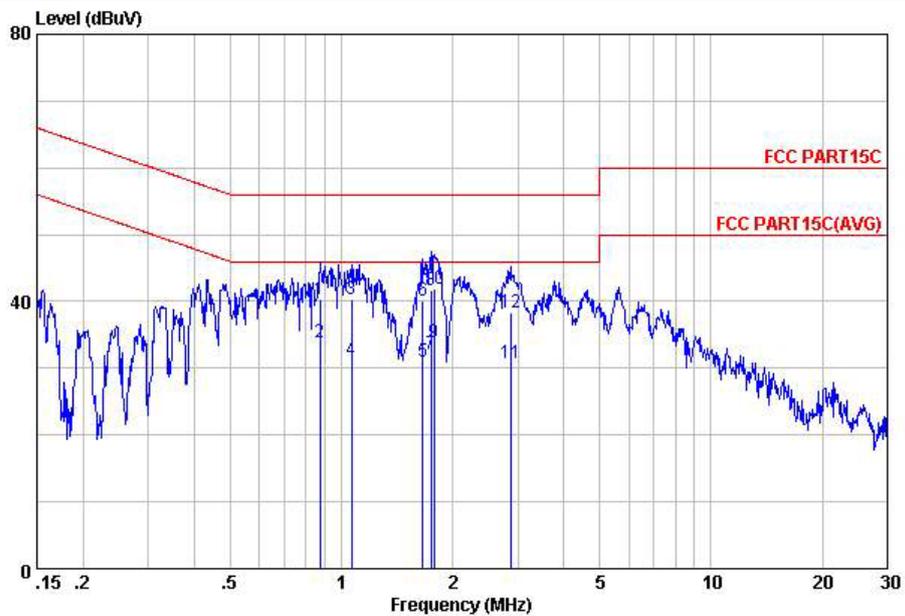


Site : C001-KS  
 Condition: FCC PART15C LISN-L20130306 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.88	40.31	-15.69	56.00	29.90	0.13	10.28	QP
2	0.88	33.81	-12.19	46.00	23.40	0.13	10.28	Average
3	1.07	40.38	-15.62	56.00	30.00	0.10	10.28	QP
4	1.07	31.28	-14.72	46.00	20.90	0.10	10.28	Average
5	1.66	30.90	-15.10	46.00	20.50	0.10	10.30	Average
6	1.66	40.10	-15.90	56.00	29.70	0.10	10.30	QP
7	1.74	32.20	-13.80	46.00	21.80	0.10	10.30	Average
8	1.74	41.70	-14.30	56.00	31.30	0.10	10.30	QP
9	1.78	33.80	-12.20	46.00	23.40	0.10	10.30	Average
10	1.78	41.90	-14.10	56.00	31.50	0.10	10.30	QP
11	2.87	30.75	-15.25	46.00	20.30	0.13	10.32	Average
12	2.87	38.35	-17.65	56.00	27.90	0.13	10.32	QP



Test Mode :	Mode 1	Temperature :	19~20°C
Test Engineer :	Tom Wang	Relative Humidity :	39~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	Bluetooth Link + WLAN Link + USB Cable 1 (Charging from Adapter 3) + Battery 1 + Earphone for Sample 1		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

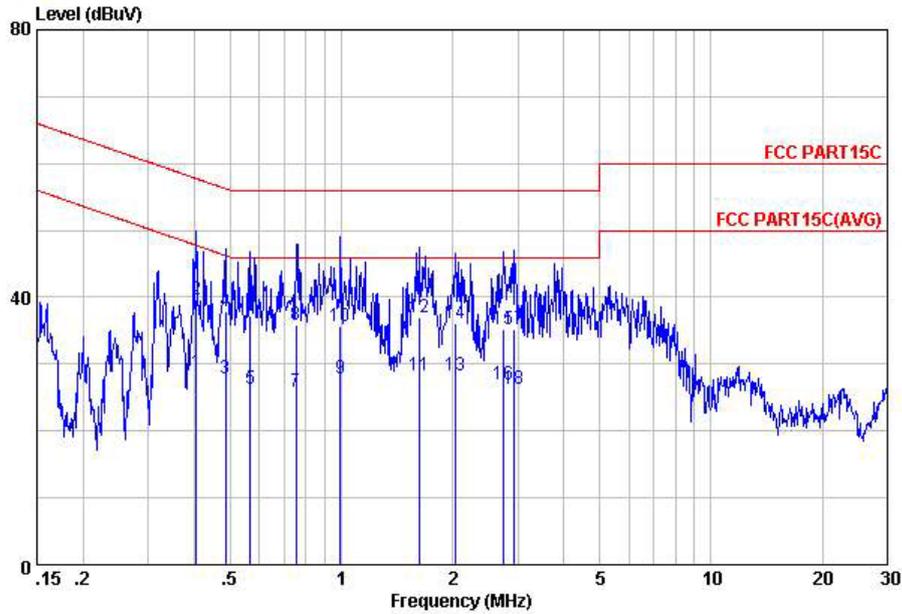

Site : C001-KS  
 Condition: FCC PART15C LISN-N20130306 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.40	28.75	-19.02	47.77	18.10	0.40	10.25	Average
2	0.40	39.75	-18.02	57.77	29.10	0.40	10.25	QP
3	0.49	27.96	-18.27	46.23	17.40	0.31	10.25	Average
4	0.49	37.96	-18.27	56.23	27.40	0.31	10.25	QP
5	0.57	26.33	-19.67	46.00	15.80	0.27	10.26	Average
6	0.57	37.13	-18.87	56.00	26.60	0.27	10.26	QP
7	0.75	25.86	-20.14	46.00	15.41	0.18	10.27	Average
8	0.75	35.96	-20.04	56.00	25.51	0.18	10.27	QP
9	0.99	27.78	-18.22	46.00	17.40	0.10	10.28	Average
10	0.99	35.68	-20.32	56.00	25.30	0.10	10.28	QP
11	1.62	28.40	-17.60	46.00	18.00	0.10	10.30	Average
12	1.62	36.90	-19.10	56.00	26.50	0.10	10.30	QP
13	2.03	28.20	-17.80	46.00	17.80	0.10	10.30	Average
14	2.03	36.10	-19.90	56.00	25.70	0.10	10.30	QP
15	2.74	35.14	-20.86	56.00	24.71	0.12	10.31	QP
16	2.74	26.94	-19.06	46.00	16.51	0.12	10.31	Average
17	2.93	35.15	-20.85	56.00	24.70	0.13	10.32	QP
18	2.93	26.25	-19.75	46.00	15.80	0.13	10.32	Average



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.7.2 Antenna Connected Construction**

Non-standard connector used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 29, 2012	Mar. 13, 2013~ Mar. 17, 2013	Dec. 28, 2013	Conducted (TH01-KS)
Power Meter	Agilent	E4416A	MY45101555	N/A	Aug. 22, 2012	Mar. 13, 2013~ Mar. 17, 2013	Aug. 21, 2013	Conducted (TH01-KS)
Power Sensor	Agilent	E9327A	MY44421198	N/A	Aug. 22, 2012	Mar. 13, 2013~ Mar. 17, 2013	Aug. 21, 2013	Conducted (TH01-KS)
DC Power Supply	GWINSTEK	GPS-3030D	E1884515	N/A	Aug. 22, 2012	Mar. 13, 2013~ Mar. 17, 2013	Aug. 21, 2013	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	N/A	Dec. 29, 2012	Mar. 13, 2013~ Mar. 17, 2013	Dec. 28, 2013	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSP30	101352	9KHz~30GHz	Nov. 07, 2012	Mar. 16, 2013~ Mar. 17, 2013	Nov. 06, 2013	Radiation (03CH06-HY)
Spectrum Analyzer	Agilent	E4408B	MY44211030	9KHz ~ 26.5GHz	Nov. 26, 2012	Mar. 16, 2013~ Mar. 17, 2013	Nov. 25, 2013	Radiation (03CH06-HY)
EMI Test Receiver	R&S	ESVS10	834468/0003	20MHz ~ 1000MHz	May 04, 2012	Mar. 16, 2013~ Mar. 17, 2013	May 03, 2013	Radiation (03CH06-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2885	30MHz ~ 2GHz	Oct. 06, 2012	Mar. 16, 2013~ Mar. 17, 2013	Oct. 05, 2013	Radiation (03CH06-HY)
Double Ridge Horn Antenna	EMCO	3117	00066583	1GHz ~ 18GHz	Aug. 01, 2012	Mar. 16, 2013~ Mar. 17, 2013	Jul. 31, 2013	Radiation (03CH06-HY)
Double Ridge Horn Antenna	COM-POWER	AH-118	071025	1GHz~18GHz	Aug. 09, 2012	Mar. 16, 2013~ Mar. 17, 2013	Aug. 08, 2013	Radiation (03CH06-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz ~ 40GHz	Sep. 28, 2012	Mar. 16, 2013~ Mar. 17, 2013	Sep. 27, 2013	Radiation (03CH06-HY)
Preamplifier	Agilent	8449B	3008A01917	1GHz ~ 26.5GHz	Apr. 13, 2012	Mar. 16, 2013~ Mar. 17, 2013	Apr. 12, 2013	Radiation (03CH06-HY)
Amplifier	Agilent	310N	186713	9KHz ~ 1GHz	Apr. 11, 2012	Mar. 16, 2013~ Mar. 17, 2013	Apr. 10, 2013	Radiation (03CH06-HY)
Pre Amplifier	EMCI	EMC051845	SN980048	1GHz ~ 18GHz	Jul. 21, 2012	Mar. 16, 2013~ Mar. 17, 2013	Jul. 20, 2013	Radiation (03CH06-HY)
Pre Amplifier	MITEQ	AMF-7D-00101 800-30-10P	159087	1GHz~18GHz	Feb. 26, 2013	Mar. 16, 2013~ Mar. 17, 2013	Feb. 25, 2014	Radiation (03CH06-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9KHz ~ 30MHz	Jul. 03, 2012	Mar. 16, 2013~ Mar. 17, 2013	Jul. 02, 2013	Radiation (03CH06-HY)



EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 08, 2012	Mar. 27, 2013	Nov. 07, 2013	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP30	100400	9kHz~30GHz	Jun. 01, 2012	Mar. 27, 2013	May 31, 2013	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Dec. 07, 2012	Mar. 27, 2013	Dec. 06, 2013	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz~30 MHz	Jul. 03, 2012	Mar. 27, 2013	Jul. 02, 2014	Radiation (03CH01-KS)
Double Ridge Horn Antenna	ETS-Lindgren	1908/7/13	00075957	1GHz~18GHz	Dec. 07, 2012	Mar. 27, 2013	Dec. 06, 2013	Radiation (03CH01-KS)
Amplifier	com-power	PA-103A	161069	1MHz~1GHz	Jun. 01, 2012	Mar. 27, 2013	May 31, 2013	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Dec. 29, 2012	Mar. 27, 2013	Dec. 28, 2013	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701023	1GHz~18GHz	Nov. 07, 2012	Mar. 27, 2013	Nov. 06, 2013	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	9170249	15GHz~40GHz	Nov. 23, 2012	Mar. 27, 2013	Nov. 22, 2013	Radiation (03CH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz	Jun. 01, 2012	Mar. 20, 2013	May 31, 2013	Conduction (CO01-KS)
LISN	MessTec	AN3016	60103	9kHz~30MHz	Dec. 29, 2012	Mar. 20, 2013	Dec. 28, 2013	Conduction (CO01-KS)
LISN	MessTec	AN3016	60105	9kHz~30MHz	Dec. 29, 2012	Mar. 20, 2013	Dec. 28, 2013	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	N/A	Nov. 15, 2012	Mar. 20, 2013	Nov. 14, 2013	Conduction (CO01-KS)



## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.54
-------------------------------------------------------------------------	------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.72
-------------------------------------------------------------------------	------

### Uncertainty of Conducted Emission Measurement (150 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.26
-------------------------------------------------------------------------	------



## **Appendix A. Photographs of EUT**

Please refer to Sporton report number EP322704-01 as below.