


# FCC SAR Test Report

**APPLICANT** : Lenovo (Shanghai) Electronics Technology Co., Ltd.  
**EQUIPMENT** : Portable Tablet Computer  
**BRAND NAME** : lenovo  
**MODEL NAME** : Lenovo A3300-GV  
**MARKETING NAME** : Lenovo A3300-GV  
**FCC ID** : O57A3300GV  
**STANDARD** : FCC 47 CFR Part 2 (2.1093)  
ANSI/IEEE C95.1-1992  
IEEE 1528-2003

The product was testing completed on Dec. 18, 2013. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Deputy Manager



Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.**



## Table of Contents

<b>1. Statement of Compliance</b>	<b>4</b>
<b>2. Administration Data</b>	<b>5</b>
2.1 Testing Laboratory	5
2.2 Applicant	5
2.3 Manufacturer	5
2.4 Application Details	5
<b>3. General Information</b>	<b>6</b>
3.1 Description of Equipment Under Test (EUT)	6
3.2 Maximum RF output power among production units	7
3.3 Applied Standard	8
3.4 Device Category and SAR Limits	8
3.5 Test Conditions	8
<b>4. Specific Absorption Rate (SAR)</b>	<b>9</b>
4.1 Introduction	9
4.2 SAR Definition	9
<b>5. SAR Measurement System</b>	<b>10</b>
5.1 E-Field Probe	11
5.2 Data Acquisition Electronics (DAE)	11
5.3 Robot	12
5.4 Measurement Server	12
5.5 Phantom	13
5.6 Device Holder	14
5.7 Data Storage and Evaluation	15
5.8 Test Equipment List	17
<b>6. Tissue Simulating Liquids</b>	<b>18</b>
<b>7. System Verification Procedures</b>	<b>20</b>
7.1 Purpose of System Performance check	20
7.2 System Setup	20
7.3 SAR System Verification Results	21
<b>8. EUT Testing Position</b>	<b>22</b>
<b>9. Measurement Procedures</b>	<b>23</b>
9.1 Spatial Peak SAR Evaluation	23
9.2 Power Reference Measurement	24
9.3 Area & Zoom Scan Procedures	24
9.4 Volume Scan Procedures	25
9.5 SAR Averaged Methods	25
9.6 Power Drift Monitoring	25
<b>10. Bluetooth Exclusions Applied</b>	<b>25</b>
<b>11. Conducted RF Output Power (Unit: dBm)</b>	<b>26</b>
<b>12. Antenna Location</b>	<b>28</b>
<b>13. SAR Test Results</b>	<b>30</b>
13.1 Head SAR	31
13.2 Body SAR	32
13.3 Repeated SAR Measurement	33
13.4 Highest SAR Plot	34
<b>14. Simultaneous Transmission Analysis</b>	<b>37</b>
14.1 Head Exposure Conditions	38
14.2 Tablet Body Exposure Conditions	39
14.3 SPLSR Evaluation and Analysis	40
<b>15. Uncertainty Assessment</b>	<b>41</b>
<b>16. References</b>	<b>43</b>
<b>Appendix A. Plots of System Performance Check</b>	
<b>Appendix B. Plots of SAR Measurement</b>	
<b>Appendix C. DASY Calibration Certificate</b>	
<b>Appendix D. Test Setup Photos</b>	





1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Lenovo (Shanghai) Electronics Technology Co., Ltd. DUT: Portable Tablet Computer, Brand Name: lenovo, Model Name: Lenovo A3300-GV** are as follows.

<Highest SAR Summary>

Exposure Position	Frequency Band	Reported 1g-SAR (W/kg)	Equipment Class	Highest Reported 1g-SAR (W/kg)
Head	GSM850	0.93	PCE	0.93
	GSM1900	0.81		
	WLAN 2.4GHz Band	0.22	DTS	0.22
Body(0cm Gap)	GSM850	1.04	PCE	1.19
	GSM1900	1.19		
	WLAN 2.4GHz Band	1.16	DTS	1.16

<Highest Simultaneous transmission SAR>

Frequency Band	Equipment Class	Exposure Position	Highest Reported Simultaneous Transmission 1g-SAR (W/kg)
GSM850	PCE	Head	0.97
WLAN 2.4GHz	DTS		

Frequency Band	Equipment Class	Exposure Position	Highest Reported Simultaneous Transmission 1g-SAR (W/kg)
GSM1900	PCE	Bottom Face	1.30
Bluetooth	DSS		

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003.

## **2. Administration Data**

### **2.1 Testing Laboratory**

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958

### **2.2 Applicant**

<b>Company Name</b>	Lenovo (Shanghai) Electronics Technology Co., Ltd.
<b>Address</b>	No. 68 Building, 199 Fenju Road, Wai Gao Qiao FTZ, Shanghai, China

### **2.3 Manufacturer**

<b>Company Name</b>	Lenovo PC HK Limited
<b>Address</b>	23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong

### **2.4 Application Details**

<b>Date of Start during the Test</b>	Dec. 16, 2013
<b>Date of End during the Test</b>	Dec. 18, 2013



### 3. General Information

#### 3.1 Description of Equipment Under Test (EUT)

Product Feature & Specification	
EUT	Portable Tablet Computer
Brand Name	lenovo
Model Name	Lenovo A3300-GV
Marketing Name	Lenovo A3300-GV
FCC ID	O57A3300GV
IMEI Code	863352020001674
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	• GSM/GPRS/EGPRS • 802.11b/g/n HT20/HT40 • Bluetooth v3.0+EDR , Bluetooth v4.0
Antenna Type	WWAN: PIFA Antenna WLAN: PIFA Antenna Bluetooth: PIFA Antenna
HW Version	A977_MB_PCB_V3.0
SW Version	A3300T_A422_01_02_131014_CN
EUT Stage	Pre-Production
<b>Remark:</b> 1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description. 2. Voice function is supported. 3. This device supports GPRS/EGPRS operation up to class12.	



**3.2 Maximum RF output power among production units**

Band	GSM850 (Burst Average Power) (dBm)	GSM1900 (Burst Average Power) (dBm)
GSM (GMSK, 1 Tx slot)	32.5	29
GPRS (GMSK, 1 Tx slot)	32.5	29
GPRS (GMSK, 2 Tx slots)	29.5	26
GPRS (GMSK, 3 Tx slots)	27.5	24
GPRS (GMSK, 4 Tx slots)	26.5	23
EDGE (8PSK, 1 Tx slot)	28	27
EDGE (8PSK, 2 Tx slots)	26.5	26
EDGE (8PSK, 3 Tx slots)	25	24
EDGE (8PSK, 4 Tx slots)	23.5	23

Maximum Target Average Power for Production Unit (dBm)			
Mode / Band	IEEE 802.11		
WLAN 2.4GHz Band	11b	11g	11n-HT20
Channel 01	13	11	11
Channel 06	12.5	11	11
Channel 11	12.5	11	11

Maximum Target Average Power for Production Unit (dBm)	
Mode / Band	IEEE 802.11
WLAN 2.4GHz Band	11n-HT40
Channel 03	9.5
Channel 06	10
Channel 09	6

Bluetooth average power (dBm)				
Mode	1Mbps (GFSK)	2Mbps ( $\pi/4$ -DQPSK)	3Mbps (8-DPSK)	BT4.0-LE (GFSK)
Tune Up Limit	4	2	2	-4



### 3.3 Applied Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r02
- FCC KDB 865664 D02 SAR Reporting v01r01
- FCC KDB 447498 D01 General RF Exposure Guidance v05r01
- FCC KDB 248227 D01 SAR meas for 802 11abg v01r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r01
- FCC KDB 941225 D03 SAR Test Reduction GSM GPRS EDGE v01

### 3.4 Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

### 3.5 Test Conditions

#### 3.5.1 Ambient Condition

Ambient Temperature	20 to 24 °C
Humidity	< 60 %

#### 3.5.2 Test Configuration

For WWAN SAR testing, the device was controlled by using a base station emulator. Communication between the device and the emulator was established by air link. The distance between the EUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT.

During WLAN SAR testing EUT is configured with the WLAN continuous TX tool, and the transmission duty factor was monitored on the spectrum analyzer with zero-span setting

For WLAN SAR testing, WLAN engineering testing software installed on the EUT can provide continuous transmitting RF signal.

## **4. Specific Absorption Rate (SAR)**

### **4.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **4.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = c \left( \frac{\delta T}{\delta t} \right)$$


Where: C is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

## 5. SAR Measurement System

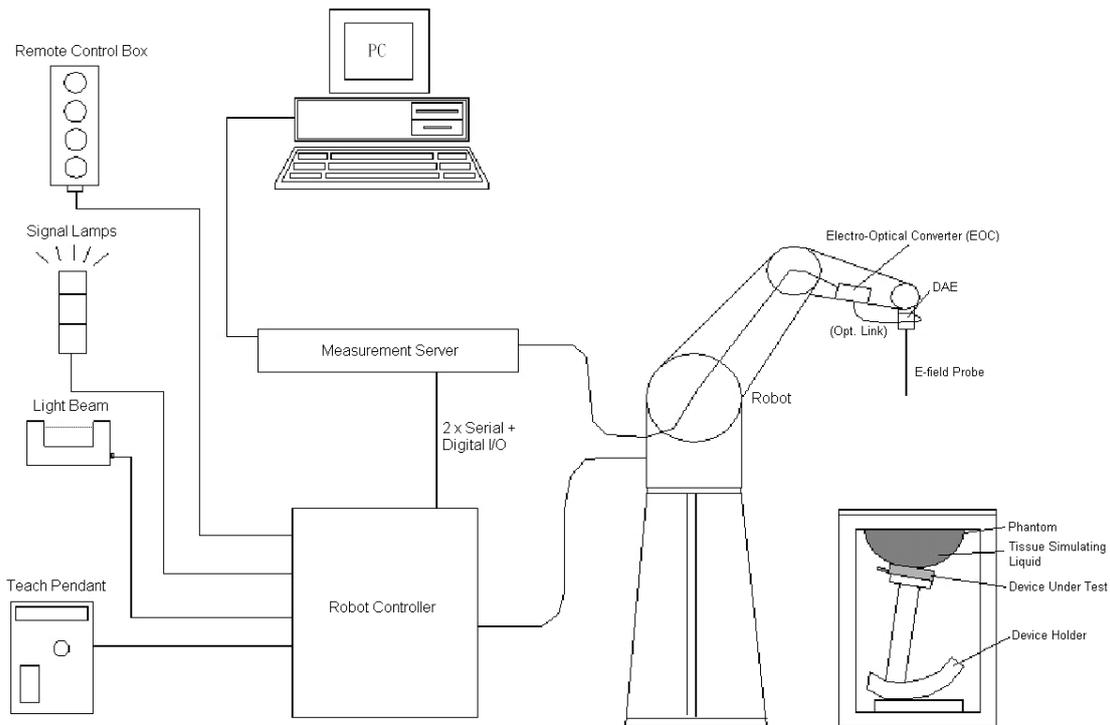

**Fig 5.1 SPEAG DASY System Configurations**

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Component details are described in in the following sub-sections.


**5.1 E-Field Probe**

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

**5.1.1 E-Field Probe Specification**

**<EX3DV4 Probe>**

<b>Construction</b>	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
<b>Frequency</b>	10 MHz to 6 GHz; Linearity: $\pm 0.2$ dB
<b>Directivity</b>	$\pm 0.3$ dB in HSL (rotation around probe axis) $\pm 0.5$ dB in tissue material (rotation normal to probe axis)
<b>Dynamic Range</b>	10 $\mu$ W/g to 100 mW/g; Linearity: $\pm 0.2$ dB (noise: typically $< 1 \mu$ W/g)
<b>Dimensions</b>	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm

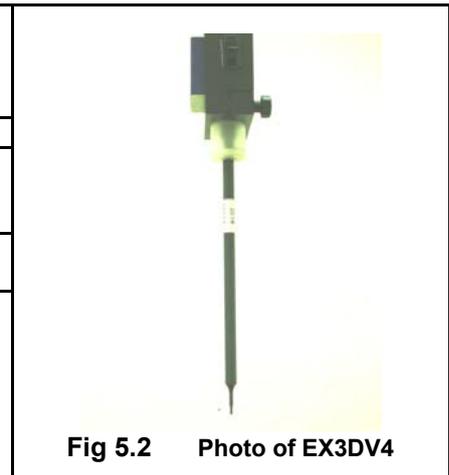

**Fig 5.2 Photo of EX3DV4**

**5.1.2 E-Field Probe Calibration**

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy shall be evaluated and within  $\pm 0.25$ dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

**5.2 Data Acquisition Electronics (DAE)**

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



**Fig 5.3 Photo of DAE**

### 5.3 Robot

The SPEAG DASY system uses the high precision robots (DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability  $\pm 0.035$  mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



Fig 5.4 Photo of DASY5

### 5.4 Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY5: 400 MHz, Intel Celeron), chipdisk (DASY5: 128 MB), RAM (DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Fig 5.5 Photo of Server for DASY5

**5.5 Phantom**

**<SAM Twin Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm
<b>Filling Volume</b>	Approx. 25 liters
<b>Dimensions</b>	Length: 1000 mm; Width: 500 mm; Height: adjustable feet
<b>Measurement Areas</b>	Left Hand, Right Hand, Flat Phantom




**Fig 5.6 Photo of SAM Phantom**

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

**<ELI4 Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm (sagging: <1%)
<b>Filling Volume</b>	Approx. 30 liters
<b>Dimensions</b>	Major ellipse axis: 600 mm Minor axis: 400 mm

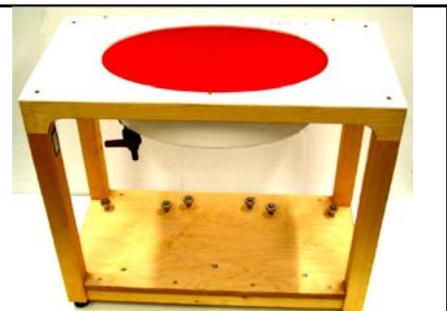

**Fig 5.7 Photo of ELI4 Phantom**

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

## 5.6 Device Holder

### <Device Holder for SAM Twin Phantom>

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of  $\pm 0.5$  mm would produce a SAR uncertainty of  $\pm 20$  %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Fig 5.8 Device Holder

## **5.7 Data Storage and Evaluation**

### **5.7.1 Data Storage**

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

### **5.7.2 Data Evaluation**

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

<b>Probe parameters :</b>	- Sensitivity	Norm <sub>i</sub> , a <sub>i0</sub> , a <sub>i1</sub> , a <sub>i2</sub>
	- Conversion factor	ConvF <sub>i</sub>
	- Diode compression point	dcp <sub>i</sub>
<b>Device parameters :</b>	- Frequency	f
	- Crest factor	cf
<b>Media parameters :</b>	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with  $V_i$  = compensated signal of channel  $i$ , ( $i = x, y, z$ )  
 $U_i$  = input signal of channel  $i$ , ( $i = x, y, z$ )  
 $cf$  = crest factor of exciting field (DASY parameter)  
 $dcp_i$  = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated :

$$\text{E-field Probes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field Probes : } H_i = \sqrt{V_i \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}}$$

with  $V_i$  = compensated signal of channel  $i$ , ( $i = x, y, z$ )  
 $\text{Norm}_i$  = sensor sensitivity of channel  $i$ , ( $i = x, y, z$ ),  $\mu\text{V}/(\text{V/m})^2$  for E-field Probes  
 $\text{ConvF}$  = sensitivity enhancement in solution  
 $a_{ij}$  = sensor sensitivity factors for H-field probes  
 $f$  = carrier frequency [GHz]  
 $E_i$  = electric field strength of channel  $i$  in V/m  
 $H_i$  = magnetic field strength of channel  $i$  in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g  
 $E_{\text{tot}}$  = total field strength in V/m  
 $\sigma$  = conductivity in [mho/m] or [Siemens/m]  
 $\rho$  = equivalent tissue density in  $\text{g}/\text{cm}^3$

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.



**5.8 Test Equipment List**

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	4d091	Nov. 18, 2011	Nov. 14, 2014
SPEAG	1900MHz System Validation Kit	D1900V2	5d118	Nov. 21, 2011	Nov. 14, 2014
SPEAG	2450MHz System Validation Kit	D2450V2	840	Mar. 26, 2013	Mar. 25, 2014
SPEAG	Data Acquisition Electronics	DAE4	1210	Jun. 19, 2013	Jun. 18, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3857	Jun. 20, 2013	Jun. 19, 2014
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1477	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1479	NCR	NCR
SPEAG	ELI4 Phantom	QD OVA 001 BB	1079	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Agilent	Wireless Communication Test Set	E5515C	MY52102706	May 04, 2013	May 03, 2014
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	Apr. 22, 2013	Apr. 21, 2014
Agilent	Dielectric Probe Kit	85070E	MY44300475	NCR	NCR
R&S	Signal Generator	SMR40	100455	Jan. 18, 2013	Jan. 17, 2014
Anritsu	Power Meter	ML2495A	1218010	Feb. 28, 2013	Feb. 27, 2014
Anritsu	Power Sensor	MA2411B	1207253	Feb. 28, 2013	Feb. 27, 2014
R&S	Spectrum Analyzer	FSP30	101399	May 23, 2013	May 22, 2014
Agilent	Dual Directional Coupler	778D	50422	Note 4	
Woken	Attenuator 1	WK0602-XX	N/A	Note 4	
PE	Attenuator 2	PE7005-10	N/A	Note 4	
PE	Attenuator 3	PE7005- 3	N/A	Note 4	
AR	Power Amplifier	5S1G4M2	328767	Note 5	

**Table 5.1 Test Equipment List**

**Note:**

1. The calibration certificate of DASYS can be referred to appendix C of this report.
2. Referring to KDB 865664 D01v01r02, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole D835V2, SN: 4d091, D1900V2, SN: 5d118, can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.
4. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
5. In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1W input power according to the ratio of 1W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the power meter is critical and we do have calibration for it
6. Attenuator 1 insertion loss is calibrated by the network Analyzer, which the calibration is valid, before system check.

## 6. Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.2.



Fig 6.1 Photo of Liquid Height for Head SAR



Fig 6.2 Photo of Liquid Height for Body SAR

The following table gives the recipes for tissue simulating liquid.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
<b>For Head</b>								
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
<b>For Body</b>								
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7

Table 6.1 Recipes of Tissue Simulating Liquid



The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85070E Dielectric Probe Kit and an Agilent Network Analyzer.

The following table shows the measuring results for simulating liquid.

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity Target ( $\sigma$ )	Permittivity Target ( $\epsilon_r$ )	Delta ( $\sigma$ ) (%)	Delta ( $\epsilon_r$ ) (%)	Limit (%)	Date
835	Head	22.8	0.878	40.789	0.90	41.50	-2.44	-1.71	±5	2013/12/16
1900	Head	22.9	1.425	38.906	1.40	40.00	1.79	-2.74	±5	2013/12/17
2450	Head	22.5	1.812	39.835	1.80	39.20	0.67	1.62	±5	2013/12/18
835	Body	22.6	0.982	54.848	0.97	55.20	1.24	-0.64	±5	2013/12/17
1900	Body	22.7	1.555	53.699	1.52	53.30	2.30	0.75	±5	2013/12/16
2450	Body	22.7	1.930	51.230	1.95	52.70	-1.03	-2.79	±5	2013/12/18

Table 6.2 Measuring Results for Simulating Liquid

## 7. System Verification Procedures

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

### 7.1 Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

### 7.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

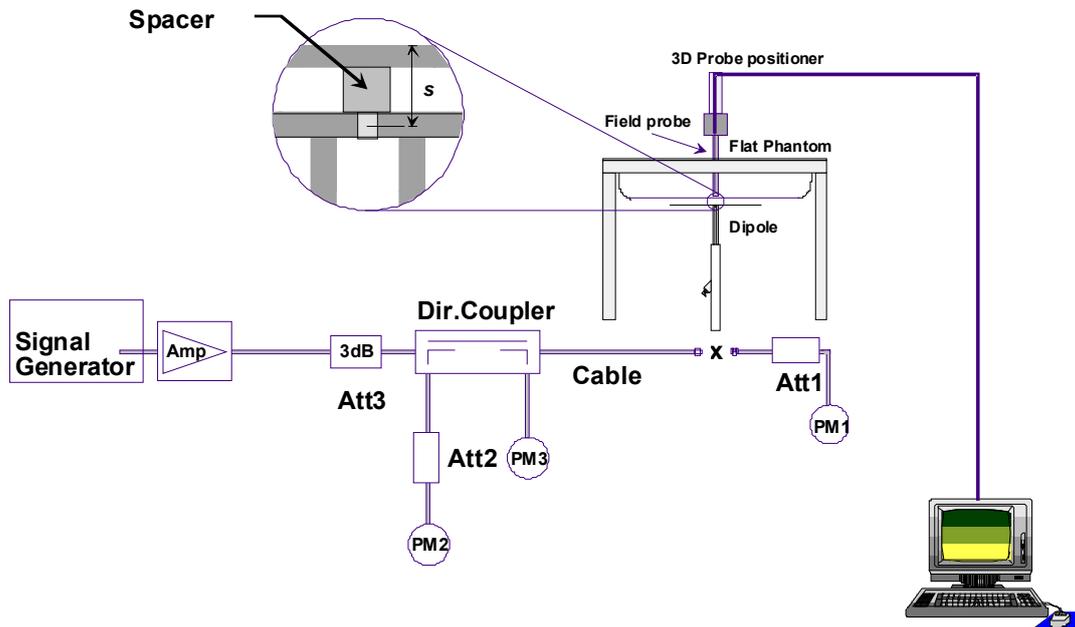


Fig 7.1 System Setup for System Evaluation

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. Calibrated Dipole



**Fig 7.2 Photo of Dipole Setup**

**7.3 SAR System Verification Results**

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Table 7.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Liquid Type	Power fed onto reference dipole (mW)	Targeted SAR (W/kg)	Measured SAR (W/kg)	Normalized SAR (W/kg)	Deviation (%)
2013/12/16	835	Head	250	9.40	2.36	9.44	0.43
2013/12/17	1900	Head	250	40.30	10.30	41.2	2.23
2013/12/18	2450	Head	250	53.60	13.00	52	-2.99
2013/12/17	835	Body	250	9.42	2.27	9.08	-3.61
2013/12/16	1900	Body	250	41.80	10.40	41.6	-0.48
2013/12/18	2450	Body	250	50.40	12.70	50.8	0.79

**Table 7.1 Target and Measurement SAR after Normalized**



## **8. EUT Testing Position**

This EUT was tested in eight different positions. They are right Cheek, right Tilted, left Cheek, left Tilted, bottom-face of tablet PC, Edge1, Edge2 and Edge4. Additionally, the surface of EUT is touching with phantom 0 cm for bottom-face, Edge1, Edge2 and Edge4. Please refer to Appendix D for the test setup photos.

### **8.1 SAR Testing for Tablet**

This device can be used also in full sized tablet exposure conditions, due to its size. Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR exclusion threshold in KDB 447498 D01v05r01 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

## 9. Measurement Procedures

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### 9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

### 9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

### 9.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r02 quoted below.

When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

		≤ 3 GHz	> 3 GHz	
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 ± 1 mm	½·δ·ln(2) ± 0.5 mm	
Maximum probe angle from probe axis to phantom surface normal at the measurement location		30° ± 1°	20° ± 1°	
Maximum area scan spatial resolution: Δx <sub>Area</sub> , Δy <sub>Area</sub>		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm	
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.		
Maximum zoom scan spatial resolution: Δx <sub>Zoom</sub> , Δy <sub>Zoom</sub>		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz <sub>Zoom</sub> (n)	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	Δz <sub>Zoom</sub> (1): between 1 <sup>st</sup> two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		Δz <sub>Zoom</sub> (n>1): between subsequent points	≤ 1.5·Δz <sub>Zoom</sub> (n-1)	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

### 9.4 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

### 9.5 SAR Averaged Methods

In DASy, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

### 9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

## 10. Bluetooth Exclusions Applied

Mode Band	Average power(dBm)	
	Bluetooth v3.0+EDR	Bluetooth v4.0
2.4GHz Bluetooth	4	-4

**Note:**

1. Per KDB 447498 D01v05r01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- If the distance of the antenna to the user is < 5mm, 5mm is used to determine SAR exclusion threshold

Bluetooth Max Power (dBm)	Test Distance (mm)	Frequency (GHz)	exclusion thresholds
4	0	2.48	0.79

2. Per KDB 447498 D01v05r01 exclusion thresholds is 0.79 < 3, RF exposure evaluation is not required.

## 11. Conducted RF Output Power (Unit: dBm)

### <GSM Conducted Power>

**Note:**

1. Per KDB 447498 D01v05r01, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. The EUT do not support DTM function.
3. For Head SAR testing, GSM should be evaluated, therefore the EUT was set in GSM Voice for GSM850/1900 due to its highest frame-average power.
4. Per KDB 941225 D03 v01, for Body SAR testing, the EUT was set in GPRS 2 Tx slots for GSM850/1900 due to its highest frame-average power.

Band GSM850 TX Channel	Burst Average Power (dBm)			Frame-Average Power (dBm)		
	128	189	251	128	189	251
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8
GSM (GMSK, 1 Tx slot)	32.04	32.08	32.13	23.04	23.08	23.13
GPRS (GMSK, 1 Tx slot) – CS1	32.04	32.09	32.12	23.04	23.09	23.12
GPRS (GMSK, 2 Tx slots) – CS1	29.25	29.29	29.32	23.25	23.29	23.32
GPRS (GMSK, 3 Tx slots) – CS1	27.26	27.31	27.33	23.00	23.05	23.07
GPRS (GMSK, 4 Tx slots) – CS1	26.06	26.10	26.13	23.06	23.10	23.13
EDGE (8PSK, 1 Tx slot) – MCS5	27.11	27.40	27.22	18.11	18.40	18.22
EDGE (8PSK, 2 Tx slots) – MCS5	26.08	26.46	26.25	20.08	20.46	20.25
EDGE (8PSK, 3 Tx slots) – MCS5	24.21	24.53	24.33	19.95	20.27	20.07
EDGE (8PSK, 4 Tx slots) – MCS5	23.10	23.41	23.17	20.10	20.41	20.17

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

Band GSM1900 TX Channel	Burst Average Power (dBm)			Frame-Average Power (dBm)		
	512	661	810	512	661	810
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8
GSM (GMSK, 1 Tx slot)	28.71	28.75	28.78	19.71	19.75	19.78
GPRS (GMSK, 1 Tx slot) – CS1	28.73	28.75	28.77	19.73	19.75	19.77
GPRS (GMSK, 2 Tx slots) – CS1	25.72	25.76	25.80	19.72	19.76	19.80
GPRS (GMSK, 3 Tx slots) – CS1	23.72	23.79	23.82	19.46	19.53	19.56
GPRS (GMSK, 4 Tx slots) – CS1	22.78	22.75	22.78	19.78	19.75	19.78
EDGE (8PSK, 1 Tx slot) – MCS5	26.80	26.59	26.30	17.80	17.59	17.30
EDGE (8PSK, 2 Tx slots) – MCS5	25.79	25.67	25.32	19.79	19.67	19.32
EDGE (8PSK, 3 Tx slots) – MCS5	23.83	23.67	23.36	19.57	19.41	19.10
EDGE (8PSK, 4 Tx slots) – MCS5	22.78	22.56	22.30	19.78	19.56	19.30

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<WLAN 2.4GHz mode Conducted Power>

802.11b Average Power (dBm)					
Channel	Frequency (MHz)	Data Rate (bps)			
		1M bps	2M bps	5.5M bps	11M bps
CH 01	2412	12.52	12.40	12.51	12.50
CH 06	2437	12.11	12.10	12.21	12.20
CH 11	2462	12.20	12.18	12.29	12.28

802.11g Average Power (dBm)									
Channel	Frequency (MHz)	Data Rate (bps)							
		6M bps	9M bps	12M bps	18M bps	24M bps	36M bps	48M bps	54M bps
CH 01	2412	10.63	10.56	10.61	10.58	10.60	10.51	10.59	10.58
CH 06	2437	10.29	10.24	10.29	10.26	10.28	10.19	10.27	10.26
CH 11	2462	10.16	10.08	10.13	10.10	10.12	10.03	10.11	10.10


WLAN 2.4GHz Band 802.11n-HT20 Average Power (dBm)									
Channel	Frequency (MHz)	MCS Index							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 01	2412	10.62	10.59	10.61	10.55	10.55	10.61	10.61	10.60
CH 06	2437	10.13	10.11	10.13	10.07	10.07	10.13	10.13	10.12
CH 11	2462	9.68	9.63	9.65	9.59	9.59	9.65	9.65	9.64

WLAN 2.4GHz Band 802.11n-HT40 Average Power (dBm)									
Channel	Frequency (MHz)	MCS Index							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 03	2422	9.20	9.16	9.18	9.12	9.15	9.14	9.19	9.18
CH 06	2437	9.98	9.95	9.96	9.90	9.93	9.92	9.97	9.96
CH 09	2452	5.30	5.29	5.30	5.24	5.27	5.26	5.31	5.30

Note:

1. Per KDB 248227 D01 v01r02, choose the highest output power channel to test SAR and determine further SAR exclusion
2. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate
3. Apply the test exclusion rule in KDB 248227 D01 v01r02 11g, 11n-HT20/HT40 output power is less than 1/4dB higher than 11b mode, thus the SAR can be excluded.

## 12. Antenna Location

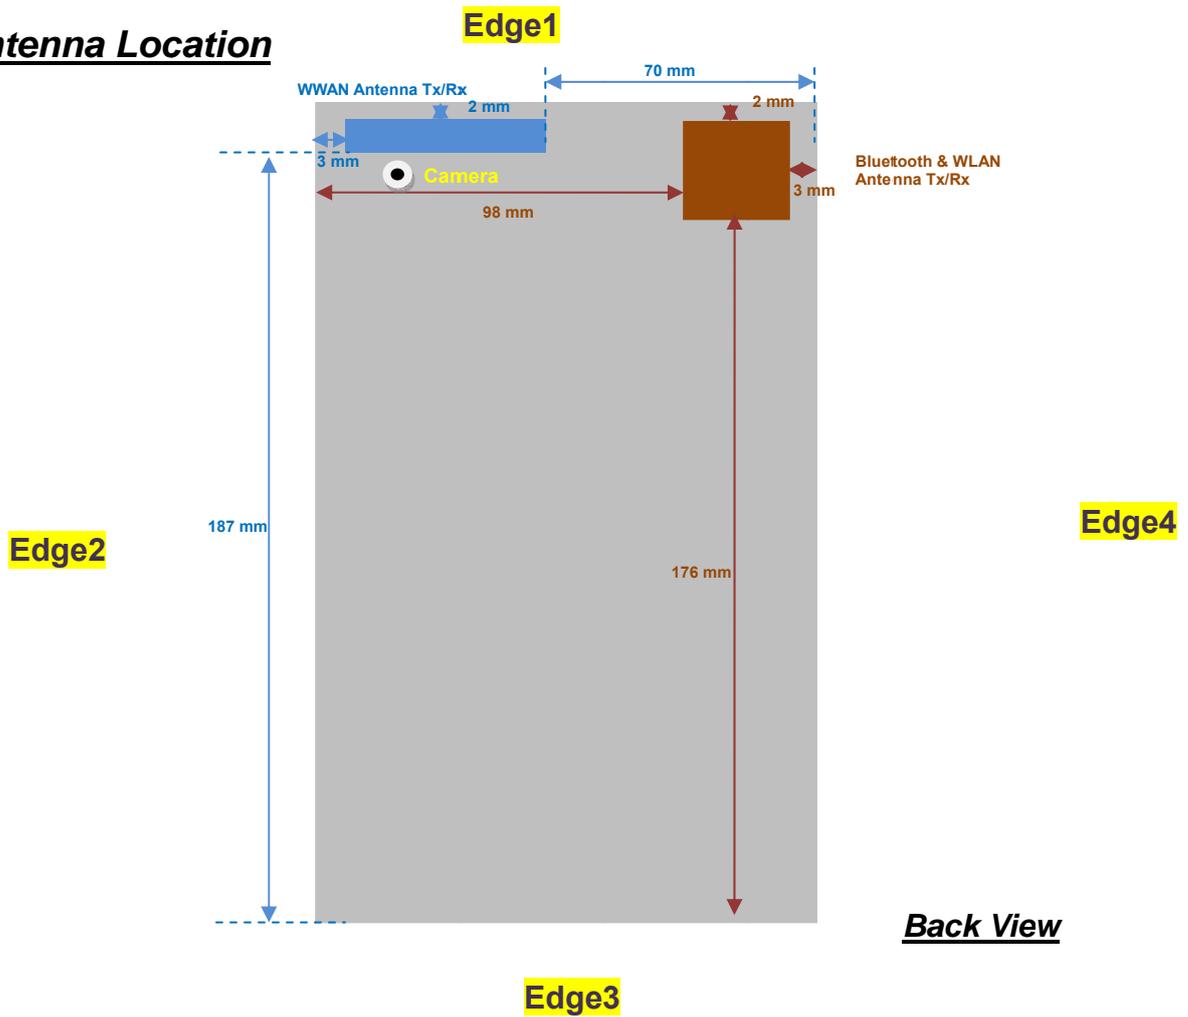

Antennas	Wireless Interface
WWAN Main Antenna (Tx / Rx)	GSM850 GSM1900
BT&WLAN Antenna (Tx / Rx)	WLAN 2.4GHz Bluetooth

**SAR test exclusion table distance is ≤ 50mm**

Exposure Position	Wireless Interface	GPRS850 2 Tx slots	GPRS1900 2 Tx slots	802.11b
		Tune-up Maximum power (dBm)	23.5	20
Bottom Face	Antenna to user (mm)	5		5
	SAR exclusion threshold	41.25	27.63	6.28
	SAR testing required?	<b>Yes</b>	<b>Yes</b>	<b>Yes</b>
Edge 1	Antenna to user (mm)	5		5
	SAR exclusion threshold	41.25	27.63	6.28
	SAR testing required?	<b>Yes</b>	<b>Yes</b>	<b>Yes</b>
Edge 2	Antenna to user (mm)	5		
	SAR exclusion threshold	41.25	27.63	
	SAR testing required?	<b>Yes</b>	<b>Yes</b>	
Edge 4	Antenna to user (mm)			5
	SAR exclusion threshold			6.28
	SAR testing required?			<b>Yes</b>

**SAR test exclusion table distance is > 50mm**

Exposure Position	Wireless Interface	GPRS850 2 Tx slots	GPRS1900 2Tx slots	802.11b
	Tune-up Maximum power (dBm)	23.5	20	13
	Tune-up Maximum rated power (mW)	224.00	100.00	20.00
Edge 2	Antenna to user (mm)			98
	SAR exclusion threshold (mW)			575.6
	SAR testing required?			<b>No</b>
Edge 3	Antenna to user (mm)	187		176
	SAR exclusion threshold (mW)	937.40	1478.56	1355.6
	SAR testing required?	<b>No</b>	<b>No</b>	<b>No</b>
Edge 4	Antenna to user (mm)	70		
	SAR exclusion threshold (mW)	275.96	308.56	
	SAR testing required?	<b>No</b>	<b>No</b>	

**Note:**

- Maximum power is the source-based time-average power and represents the maximum RF output power among production units
- Per KDB 447498 D01v05r01, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
- Per KDB 447498 D01v05r01, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold.
- Per KDB 447498 D01v05r01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:
 
$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
  - f(GHz) is the RF channel transmit frequency in GHz
  - Power and distance are rounded to the nearest mW and mm before calculation
  - The result is rounded to one decimal place for comparison
- Per KDB 447498 D01v05r01, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
  - [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz
  - [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz



### **13. SAR Test Results**

**Note:**

1. Per KDB 447498 D01v05r01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
2. Per KDB 447498 D01v05r01, for each exposure position, if the highest output channel reported SAR  $\leq 0.8$ W/kg, other channels SAR testing is not necessary.



13.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured SAR <sub>1g</sub> (W/kg)	Reported SAR <sub>1g</sub> (W/kg)
1	GSM850	GSM Vioce	Right Cheek	251	848.8	32.13	32.5	1.089	0.01	0.473	0.515
2	GSM850	GSM Vioce	Right Tilted	251	848.8	32.13	32.5	1.089	0.06	0.377	0.411
3	GSM850	GSM Vioce	Left Cheek	251	848.8	32.13	32.5	1.089	0.08	0.784	0.854
4	GSM850	GSM Vioce	Left Tilted	251	848.8	32.13	32.5	1.089	-0.0028	0.592	0.645
5	<b>GSM850</b>	<b>GSM Vioce</b>	<b>Left Cheek</b>	<b>128</b>	<b>824.2</b>	<b>32.04</b>	<b>32.5</b>	<b>1.112</b>	<b>0.02</b>	<b>0.835</b>	<b>0.928</b>
6	GSM850	GSM Vioce	Left Cheek	189	836.4	32.08	32.5	1.102	0.05	0.806	0.888

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured SAR <sub>1g</sub> (W/kg)	Reported SAR <sub>1g</sub> (W/kg)
7	GSM1900	GSM Vioce	Right Cheek	810	1909.8	28.78	29	1.052	0.06	0.33	0.347
8	GSM1900	GSM Vioce	Right Tilted	810	1909.8	28.78	29	1.052	0.06	0.251	0.264
9	<b>GSM1900</b>	<b>GSM Vioce</b>	<b>Left Cheek</b>	<b>810</b>	<b>1909.8</b>	<b>28.78</b>	<b>29</b>	<b>1.052</b>	<b>0.17</b>	<b>0.768</b>	<b>0.808</b>
10	GSM1900	GSM Vioce	Left Tilted	810	1909.8	28.78	29	1.052	0.09	0.652	0.686
11	GSM1900	GSM Vioce	Left Cheek	512	1850.2	28.71	29	1.069	0.06	0.642	0.686
12	GSM1900	GSM Vioce	Left Cheek	661	1880	28.75	29	1.059	0.01	0.702	0.744

<WLAN2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Data Rate (bps)	Average Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured SAR <sub>1g</sub> (W/kg)	Reported SAR <sub>1g</sub> (W/kg)
13	<b>WLAN 2.4GHz</b>	<b>802.11b</b>	<b>Right Cheek</b>	<b>1</b>	<b>2412</b>	<b>1M</b>	<b>12.52</b>	<b>13</b>	<b>1.117</b>	<b>0.12</b>	<b>0.201</b>	<b>0.224</b>
14	WLAN 2.4GHz	802.11b	Right Tilted	1	2412	1M	12.52	13	1.117	0.1	0.124	0.138
15	WLAN 2.4GHz	802.11b	Left Cheek	1	2412	1M	12.52	13	1.117	0.07	0.038	0.043
16	WLAN 2.4GHz	802.11b	Left Tilted	1	2412	1M	12.52	13	1.117	-0.07	0.041	0.046

**13.2 Body SAR**

**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured SAR <sub>1g</sub> (W/kg)	Reported SAR <sub>1g</sub> (W/kg)
21	GSM850	GPRS ( 2 Tx slots)	Bottom Face	0	251	848.8	29.32	29.5	1.042	0.09	0.939	0.979
22	GSM850	GPRS ( 2 Tx slots)	Edge1	0	251	848.8	29.32	29.5	1.042	0.0057	0.379	0.395
23	GSM850	GPRS ( 2 Tx slots)	Edge2	0	251	848.8	29.32	29.5	1.042	0.04	0.431	0.449
<b>25</b>	<b>GSM850</b>	<b>GPRS ( 2 Tx slots)</b>	<b>Bottom Face</b>	<b>0</b>	<b>128</b>	<b>824.2</b>	<b>29.25</b>	<b>29.5</b>	<b>1.059</b>	<b>0.03</b>	<b>0.978</b>	<b>1.036</b>
27	GSM850	GPRS ( 2 Tx slots)	Bottom Face	0	189	836.4	29.29	29.5	1.050	-0.04	0.959	1.007

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured SAR <sub>1g</sub> (W/kg)	Reported SAR <sub>1g</sub> (W/kg)
<b>29</b>	<b>GSM1900</b>	<b>GPRS ( 2 Tx slots)</b>	<b>Bottom Face</b>	<b>0</b>	<b>810</b>	<b>1909.8</b>	<b>25.8</b>	<b>26</b>	<b>1.047</b>	<b>0.08</b>	<b>1.14</b>	<b>1.194</b>
31	GSM1900	GPRS ( 2 Tx slots)	Edge1	0	810	1909.8	25.8	26	1.047	-0.07	0.704	0.737
32	GSM1900	GPRS ( 2 Tx slots)	Edge2	0	810	1909.8	25.8	26	1.047	0.05	0.47	0.492
33	GSM1900	GPRS ( 2 Tx slots)	Bottom Face	0	512	1850.2	25.72	26	1.067	0.04	0.917	0.978
34	GSM1900	GPRS ( 2 Tx slots)	Bottom Face	0	661	1880	25.76	26	1.057	-0.06	1.01	1.067

**<WLAN2.4GHz SAR>**

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Data Rate (bps)	Average Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured SAR <sub>1g</sub> (W/kg)	Reported SAR <sub>1g</sub> (W/kg)
35	WLAN 2.4GHz	802.11b	Bottom Face	0	1	2412	1M	12.52	13	1.117	-0.03	0.823	0.919
36	WLAN 2.4GHz	802.11b	Edge1	0	1	2412	1M	12.52	13	1.117	-0.13	0.080	0.090
37	WLAN 2.4GHz	802.11b	Edge4	0	1	2412	1M	12.52	13	1.117	-0.13	0.238	0.266
<b>38</b>	<b>WLAN 2.4GHz</b>	<b>802.11b</b>	<b>Bottom Face</b>	<b>0</b>	<b>6</b>	<b>2437</b>	<b>1M</b>	<b>12.11</b>	<b>12.5</b>	<b>1.094</b>	<b>0.07</b>	<b>1.06</b>	<b>1.160</b>
40	WLAN 2.4GHz	802.11b	Bottom Face	0	11	2462	1M	12.2	12.5	1.072	-0.05	1.03	1.104



13.3 Repeated SAR Measurement

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Data Rate (bps)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
25	GSM850	GPRS ( 2 Tx slots)	Bottom Face	0	128	824.2	-	29.25	29.5	1.059	0.03	0.978	1	1.036
26	GSM850	GPRS ( 2 Tx slots)	Bottom Face	0	128	824.2	-	29.25	29.5	1.059	0.09	0.969	1.009	1.026
29	GSM1900	GPRS ( 2 Tx slots)	Bottom Face	0	810	1909.8	-	25.8	26	1.047	0.08	1.14	1	1.194
30	GSM1900	GPRS ( 2 Tx slots)	Bottom Face	0	810	1909.8	-	25.8	26	1.047	0.08	1.13	1.009	1.183
38	WLAN 2.4GHz	802.11b	Bottom Face	0	6	2437	1M	12.11	12.5	1.094	0.07	1.06	1	1.160
39	WLAN 2.4GHz	802.11b	Bottom Face	0	6	2437	1M	12.11	12.5	1.094	0.10	1.05	1.010	1.149

Note:

1. Per KDB 865664 D01v01r02, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/kg
2. Per KDB 865664 D01v01r02, if the ratio among the repeated measurement is  $\leq 1.2$  and the measured SAR  $< 1.45$ W/kg, only one repeated measurement is required.
3. The ratio is the largest SAR to the smallest SAR among original and repeated measurement.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

### 13.4 Highest SAR Plot

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2013.12.17

#### #25\_GSM850\_GPRS (2 Tx slots)\_Bottom Face 0cm\_Ch128

Communication System: GPRS/EDGE (2 Tx slots); Frequency: 824.2 MHz; Duty Cycle: 1:4.15  
 Medium: MSL\_835\_131217 Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.971$  mho/m;  $\epsilon_r =$

54.947;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch128/Area Scan (101x81x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 1.526 mW/g

**Ch128/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 6.333 V/m; Power Drift = 0.03 dB  
 Peak SAR (extrapolated) = 1.795 W/kg  
**SAR(1 g) = 0.978 mW/g; SAR(10 g) = 0.614 mW/g**  
 Maximum value of SAR (measured) = 1.055 mW/g

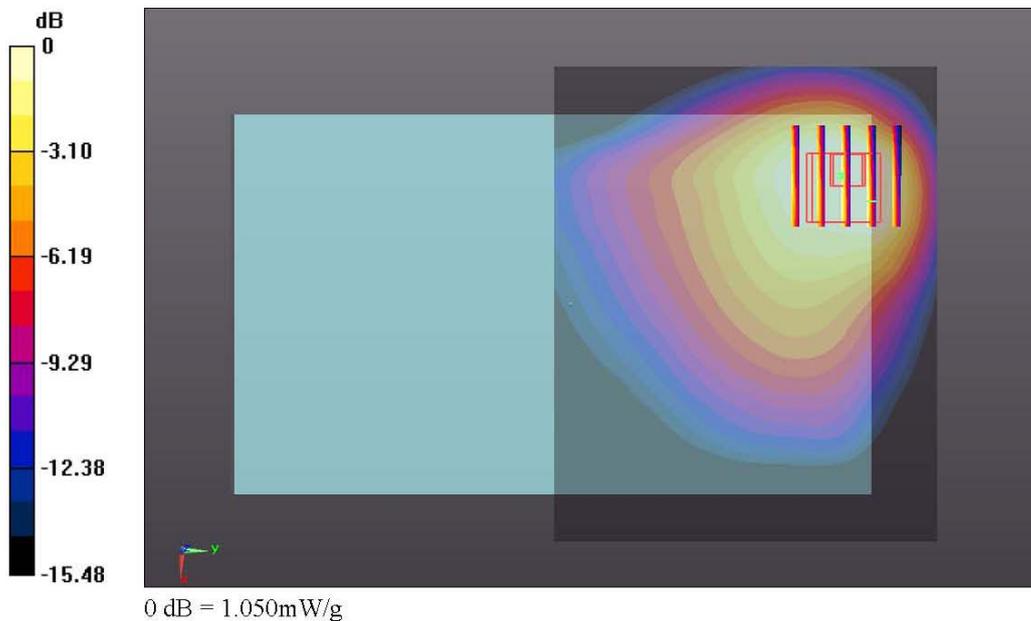

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2013.12.16

**#29\_GSM1900\_GPRS (2 Tx slots)\_Bottom Face 0cm\_Ch810**


Communication System: GPRS/EDGE (2 Tx slots); Frequency: 1909.8 MHz; Duty Cycle: 1:4.15  
 Medium: MSL\_1900\_131216 Medium parameters used:  $f = 1909.8 \text{ MHz}$ ;  $\sigma = 1.563 \text{ mho/m}$ ;  $\epsilon_r = 53.587$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch810/Area Scan (101x81x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 1.926 mW/g

**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 2.843 V/m; Power Drift = 0.08 dB  
 Peak SAR (extrapolated) = 2.313 W/kg  
**SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.592 mW/g**  
 Maximum value of SAR (measured) = 1.301 mW/g

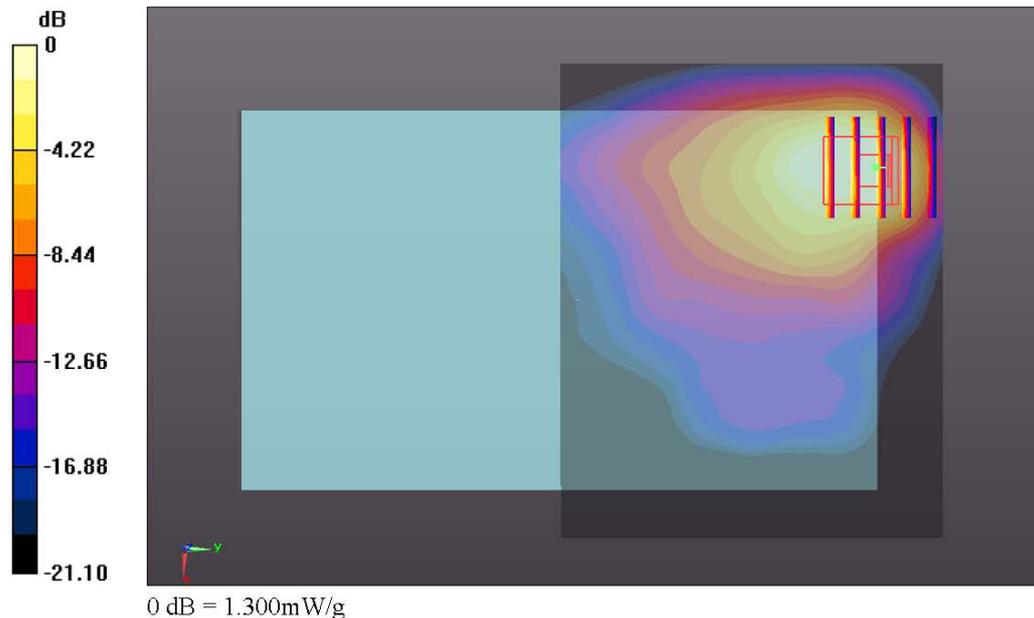

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2013.12.18

**#38\_WLAN2.4GHz\_802.11b\_1M\_Bottom Face 0cm\_Ch6**


Communication System: WIFI; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium: MSL\_2450\_131218 Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.912 \text{ mho/m}$ ;  $\epsilon_r = 51.29$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Ambient Temperature : 23.5 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7, 7, 7); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch6/Area Scan (131x91x1):** Measurement grid: dx=12mm, dy=12mm  
 Maximum value of SAR (interpolated) = 2.095 mW/g

**Ch6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 1.323 V/m; Power Drift = 0.07 dB  
 Peak SAR (extrapolated) = 2.978 W/kg  
**SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.433 mW/g**  
 Maximum value of SAR (measured) = 1.832 mW/g

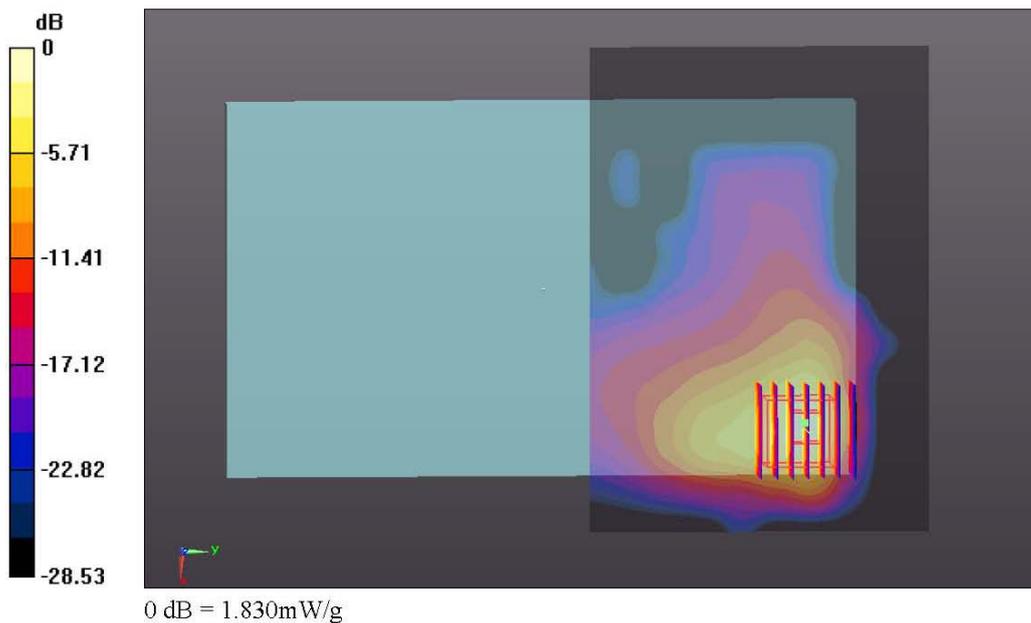



**14. Simultaneous Transmission Analysis**

NO.	Simultaneous Transmission Configurations	Tablet		Note
		Head	Body	
1.	GSM(Voice) + WLAN2.4GHz(data)	Yes	-	-
2.	GSM(Voice) + Bluetooth(data)	Yes	-	-
3.	GPRS/EDGE(Data) + WLAN2.4GHz(data)	-	Yes	2.4GHz Hotspot
4.	GPRS/EDGE(Data) + Bluetooth(data)	-	Yes	Bluetooth Tethering

**Note:**

1. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
2. The Reported SAR summation is calculated based on the same configuration and test position.
3. Per KDB 447498 D01v05r01, simultaneous transmission SAR is compliant if,
  - i) Scalar SAR summation < 1.6W/kg.
  - ii)  $SPLSR = (SAR_1 + SAR_2)^{1.5} / (min. \text{ separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$ , where  $(x_1, y_1, z_1)$  and  $(x_2, y_2, z_2)$  are the coordinates of the extrapolated peak SAR locations in the zoom scan  
If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary
  - iii) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg
4. For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v05r01 based on the formula below.
  - i)  $(max. \text{ power of channel, including tune-up tolerance, mW}) / (min. \text{ test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$  for test separation distances  $\leq 50 \text{ mm}$ ; where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.
  - ii) When the minimum test separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
  - iii) 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

In this report, 50mm separation is applied to conservatively estimate SAR value for separation distance > 50mm

Bluetooth Max Power	Exposure Position	Head	Bottom Face	Edge 1	Edge 2	Edge 4
	Test separation	0	0	0	0	0
4 dBm	Antenna to user distance(mm)	0	0	2	98	3
	Estimated SAR (W/kg)	0.105	0.105	0.105	0.011	0.105



**14.1 Head Exposure Conditions**

**< WWAN + WLAN >**

Position	WWAN			WLAN		WWAN+WLAN Summation SAR (W/kg)	SPLSR	Case No
	WWAN Band	Plot No	SAR (W/kg)	Plot No	SAR (W/kg)			
Right Cheek	GSM850	#1	0.515	#13	0.224	<b>0.74</b>		
	GSM1900	#7	0.347	#13	0.224	<b>0.57</b>		
Right Tilted	GSM850	#2	0.411	#14	0.138	<b>0.55</b>		
	GSM1900	#8	0.264	#14	0.138	<b>0.40</b>		
Left Cheek	GSM850	#5	0.928	#15	0.043	<b>0.97</b>		
	GSM1900	#9	0.808	#15	0.043	<b>0.85</b>		
Left Tilted	GSM850	#4	0.645	#16	0.046	<b>0.69</b>		
	GSM1900	#10	0.686	#16	0.046	<b>0.73</b>		

**< WWAN + Bluetooth >**

Position	WWAN			Bluetooth	WWAN+BT Summation SAR (W/kg)	SPLSR	Case No
	WWAN Band	Plot No	SAR (W/kg)	Estimated SAR (W/kg)			
Right Cheek	GSM850	#1	0.515	0.105	<b>0.62</b>		
	GSM1900	#7	0.347	0.105	<b>0.45</b>		
Right Tilted	GSM850	#2	0.411	0.105	<b>0.52</b>		
	GSM1900	#8	0.264	0.105	<b>0.37</b>		
Left Cheek	GSM850	#5	0.928	0.105	<b>1.03</b>		
	GSM1900	#9	0.808	0.105	<b>0.91</b>		
Left Tilted	GSM850	#4	0.645	0.105	<b>0.75</b>		
	GSM1900	#10	0.686	0.105	<b>0.79</b>		



**14.2 Tablet Body Exposure Conditions**

**< WWAN + WLAN >**


Position	WWAN			WLAN		WWAN+WLAN Summation SAR (W/kg)	SPLSR	Case No
	WWAN Band	Plot No	SAR (W/kg)	Plot No	SAR (W/kg)			
Bottom Face	GSM850	#25	1.036	#38	1.16	<b>2.20</b>	0.04	# 1
	GSM1900	#29	1.194	#38	1.16	<b>2.35</b>	0.04	# 2
Edge1	GSM850	#22	0.395	#36	0.09	<b>0.49</b>		
	GSM1900	#31	0.737	#36	0.09	<b>0.83</b>		
Edge2	GSM850	#23	0.449			<b>0.45</b>		
	GSM1900	#32	0.492			<b>0.49</b>		
Edge4	GSM850			#37	0.266	<b>0.27</b>		

**< WWAN + Bluetooth >**


Position	WWAN			Bluetooth	WWAN+BT Summation SAR (W/kg)	SPLSR	Case No
	WWAN Band	Plot No	SAR (W/kg)	Estimated SAR (W/kg)			
Bottom Face	GSM850	#25	1.036	0.105	<b>1.14</b>		
	GSM1900	#29	1.194	0.105	<b>1.30</b>		
Edge1	GSM850	#22	0.395	0.105	<b>0.50</b>		
	GSM1900	#31	0.737	0.105	<b>0.84</b>		
Edge2	GSM850	#23	0.449	0.011	<b>0.46</b>		
	GSM1900	#32	0.492	0.011	<b>0.50</b>		
Edge4	GSM850			0.105	<b>0.11</b>		

14.3 SPLSR Evaluation and Analysis

Case No #1	Position	Band	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
Plot No					X	Y	Z				
25	Bottom Face	GSM850	1.036	0	-0.0325	0.093	-0.176	77.5	2.20	0.04	Not required
38		WLAN2.4G	1.16	0	0.0442	0.0824	-0.178				

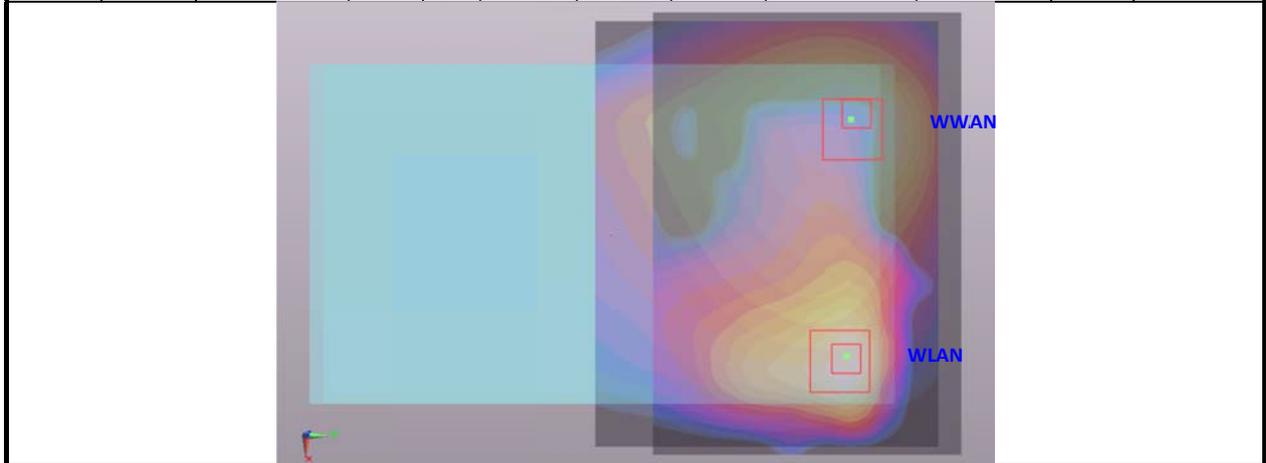

Case No #2	Position	Band	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Pair SAR sum (W/kg)	SPLSR	Simultaneous SAR
Plot No					X	Y	Z				
29	Bottom Face	GSM1900	1.194	0	-0.042	0.094	-0.176	87.0	2.35	0.04	Not required
38		WLAN 2.4G	1.16	0	0.0442	0.0824	-0.178				

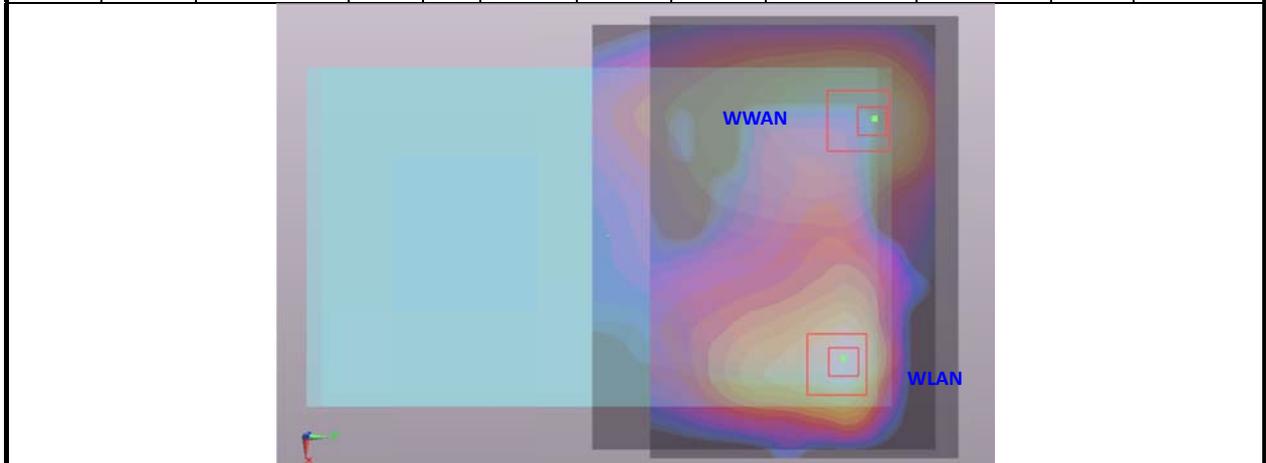

Remark:  $SPLSR = (SAR_1 + SAR_2)_{1.5} / (\text{min. separation distance, mm})$ . If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary

Test Engineer : Fulu Hu

## 15. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture’s specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 14.1

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor <sup>(a)</sup>	1/k <sup>(b)</sup>	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b)  $\kappa$  is the coverage factor

**Table 15.1. Standard Uncertainty for Assumed Distribution**

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.



Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
<b>Measurement System</b>							
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.4	Rectangular	√3	1	1	± 0.2 %	± 0.2 %
Probe Positioning	2.9	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
<b>Test Sample Related</b>							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
<b>Phantom and Setup</b>							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
<b>Combined Standard Uncertainty</b>						± 11.0 %	± 10.8 %
<b>Coverage Factor for 95 %</b>						K=2	
<b>Expanded Uncertainty</b>						± 22.0 %	± 21.5 %

Table 15.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz



## **16. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v01r02, "SAR Measurement Procedures for 802.11 a/b/g Transmitters", May 2007
- [6] FCC KDB 447498 D01 v05r01, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", May 2013
- [7] FCC KDB 941225 D03 v01, "Recommended SAR Test Reduction Procedures for GSM / GPRS / EDGE", December 2008
- [8] FCC KDB 616217 D04 v01r01, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", May 2013
- [9] FCC KDB 865664 D01 v01r02, "SAR Measurement Requirements for 100 MHz to 6 GHz", Dec 2013.
- [10] FCC KDB 865664 D02 v01r01, "RF Exposure Compliance Reporting and Documentation Considerations", May 2013



## ***Appendix A. Plots of System Performance Check***

The plots are shown as follows.

### System Check\_Head\_835MHz\_131216

**DUT: D835V2 - SN:4d091**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL\_835\_131216 Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.878 \text{ mho/m}$ ;  $\epsilon_r = 40.789$ ;

$\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.3 \text{ }^\circ\text{C}$  ; Liquid Temperature :  $22.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.35, 9.35, 9.35); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Pin=250mW/Area Scan (61x61x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $2.992 \text{ mW/g}$


**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $53.837 \text{ V/m}$ ; Power Drift =  $-0.02 \text{ dB}$

Peak SAR (extrapolated) =  $3.533 \text{ W/kg}$

**SAR(1 g) =  $2.36 \text{ mW/g}$ ; SAR(10 g) =  $1.54 \text{ mW/g}$**

Maximum value of SAR (measured) =  $2.993 \text{ mW/g}$

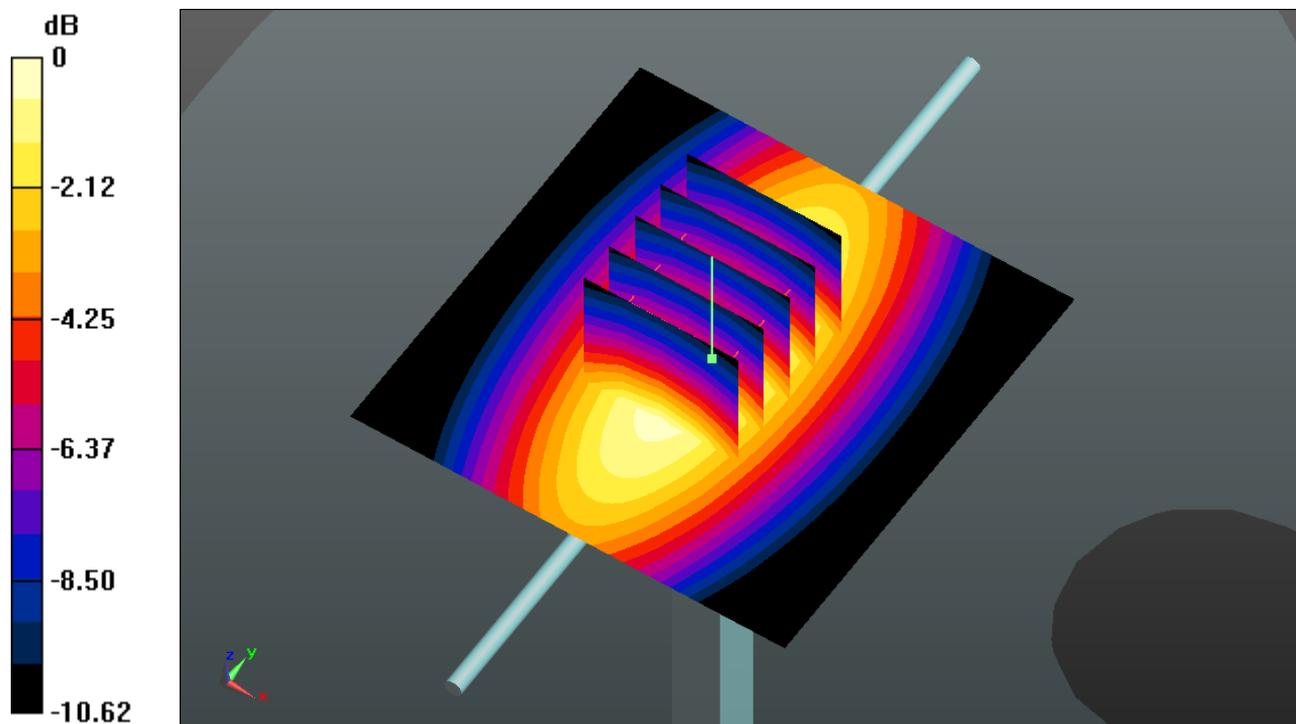

0 dB =  $2.990 \text{ mW/g}$

### System Check\_Head\_1900MHz\_131217

#### DUT: D1900V2 - SN:5d118

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_131217 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.425$  mho/m;  $\epsilon_r =$

$38.906$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.9 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.04, 8.04, 8.04); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Pin=250mW/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 14.866 mW/g


**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 89.257 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 18.952 W/kg

**SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.35 mW/g**

Maximum value of SAR (measured) = 14.857 mW/g

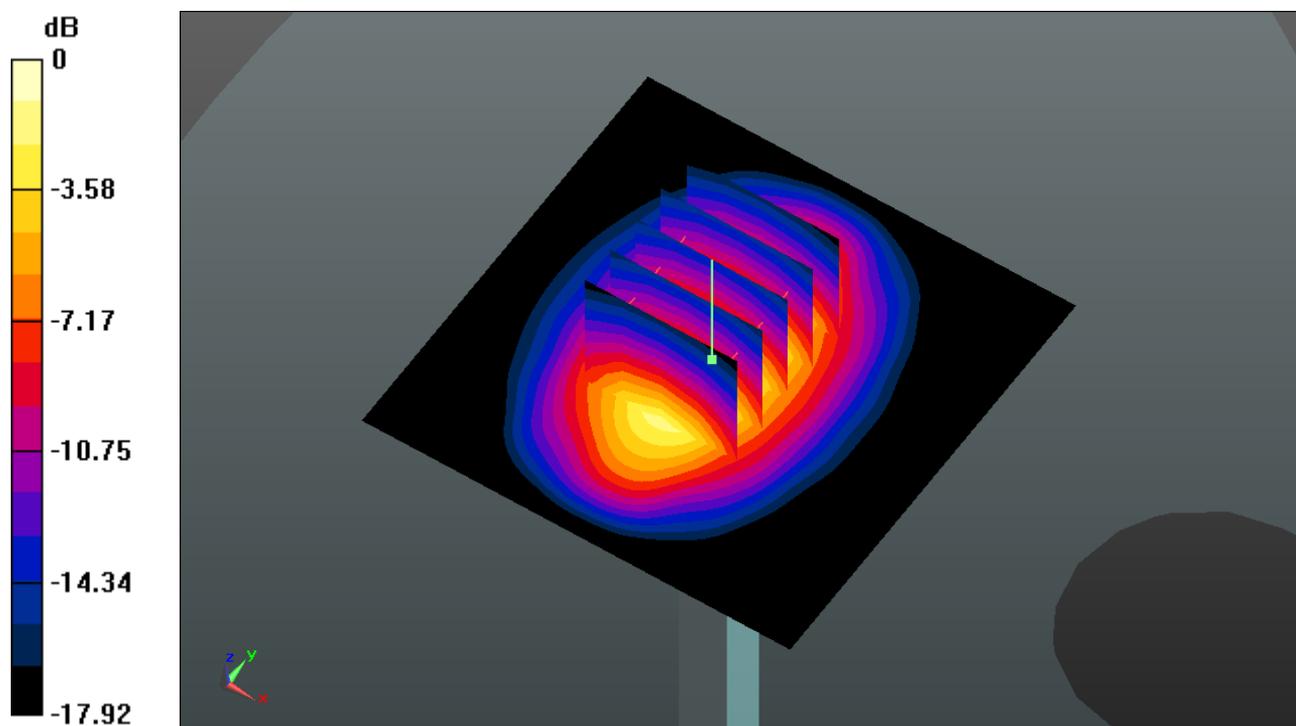

0 dB = 14.860mW/g

**System Check\_Head\_2450MHz\_131218**

**DUT: D2450V2 - SN:840**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL\_2450\_131218 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.812$  mho/m;  $\epsilon_r =$

$39.835$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(7.05, 7.05, 7.05); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Pin=250mW/Area Scan (71x71x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 20.922 mW/g


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 90.907 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 27.905 W/kg

**SAR(1 g) = 13 mW/g; SAR(10 g) = 5.88 mW/g**

Maximum value of SAR (measured) = 20.333 mW/g

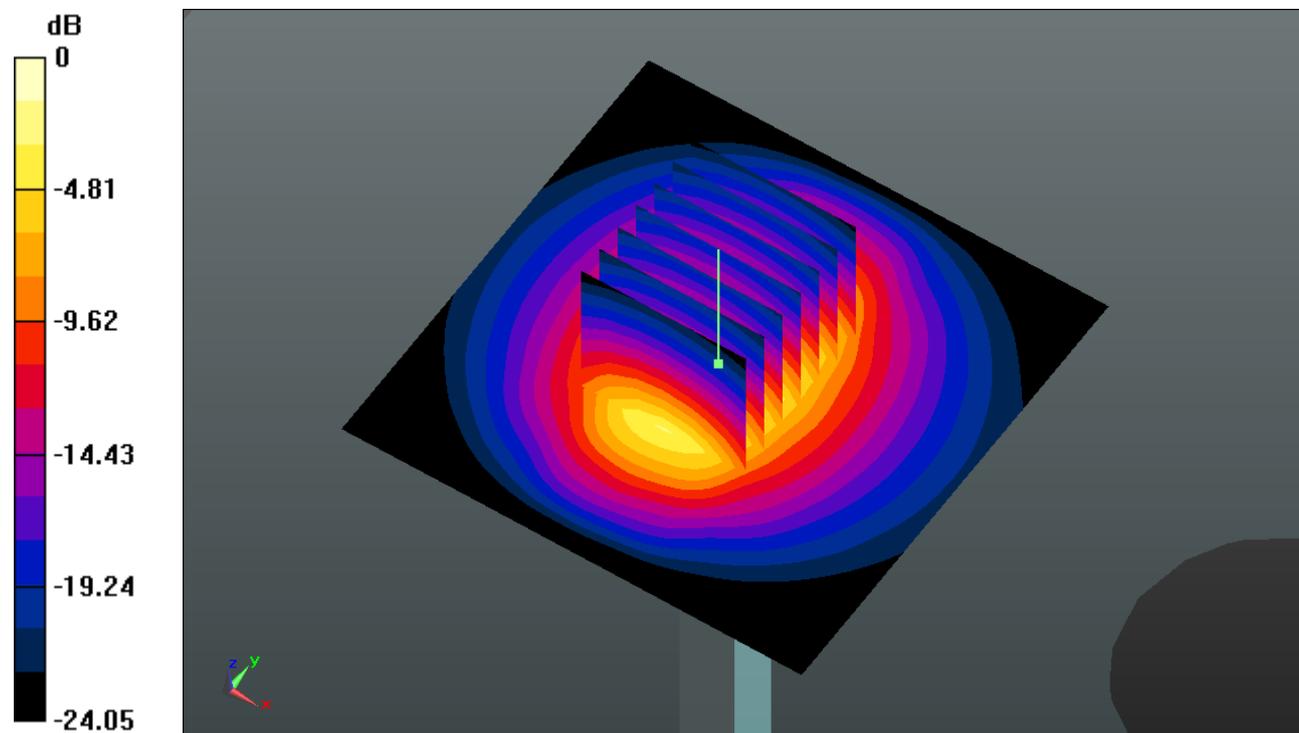

0 dB = 20.330mW/g

### System Check\_Body\_835MHz\_131217

**DUT: D835V2 - SN:4d091**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL\_835\_131217 Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.982 \text{ mho/m}$ ;  $\epsilon_r = 54.848$ ;

$\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.2 \text{ }^\circ\text{C}$  ; Liquid Temperature :  $22.6 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Pin=250mW/Area Scan (61x61x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $2.842 \text{ mW/g}$


**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $49.533 \text{ V/m}$ ; Power Drift =  $0.06 \text{ dB}$

Peak SAR (extrapolated) =  $3.373 \text{ W/kg}$

**SAR(1 g) =  $2.27 \text{ mW/g}$ ; SAR(10 g) =  $1.5 \text{ mW/g}$**

Maximum value of SAR (measured) =  $2.876 \text{ mW/g}$

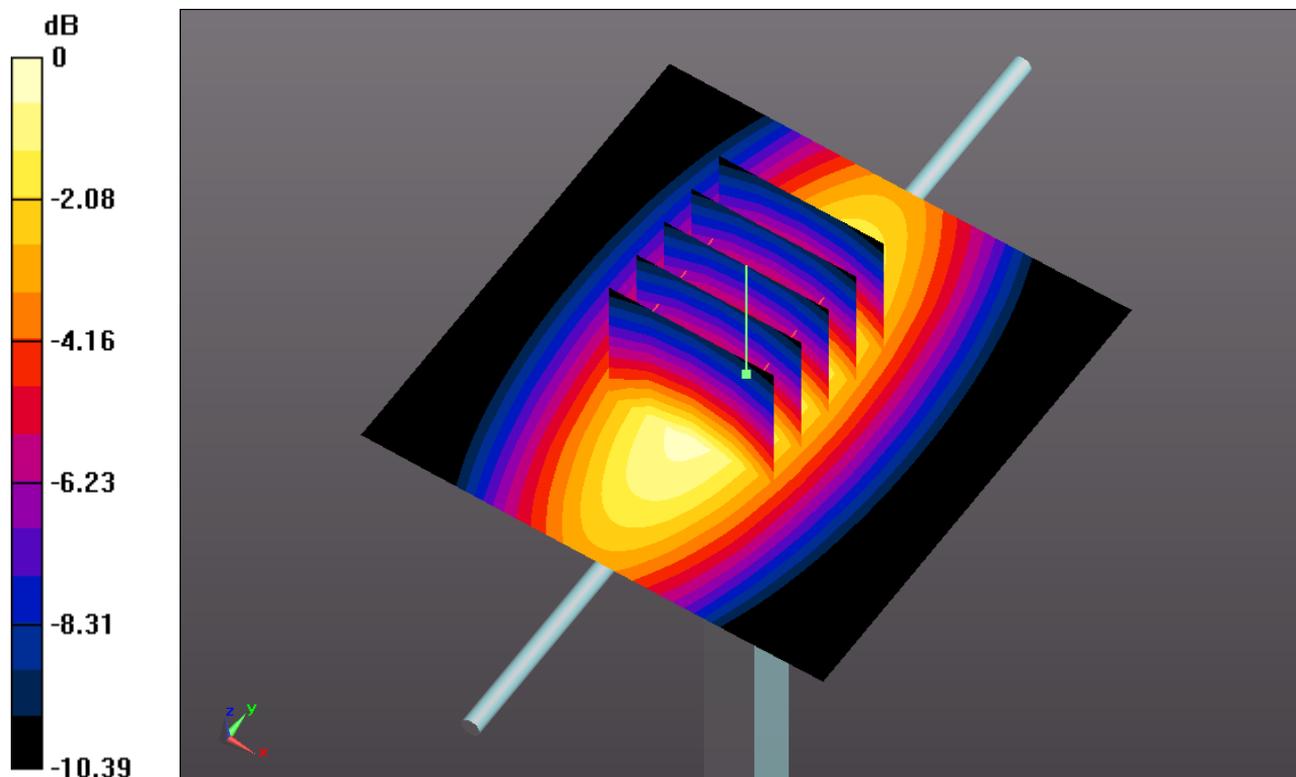

0 dB =  $2.880\text{mW/g}$

### System Check\_Body\_1900MHz\_131216

#### DUT: D1900V2 - SN:5d118

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_131216 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.555$  mho/m;  $\epsilon_r =$

$53.699$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Pin=250mW/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 14.703 mW/g


**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 87.515 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 18.029 W/kg

**SAR(1 g) = 10.4 mW/g; SAR(10 g) = 5.43 mW/g**

Maximum value of SAR (measured) = 14.732 mW/g

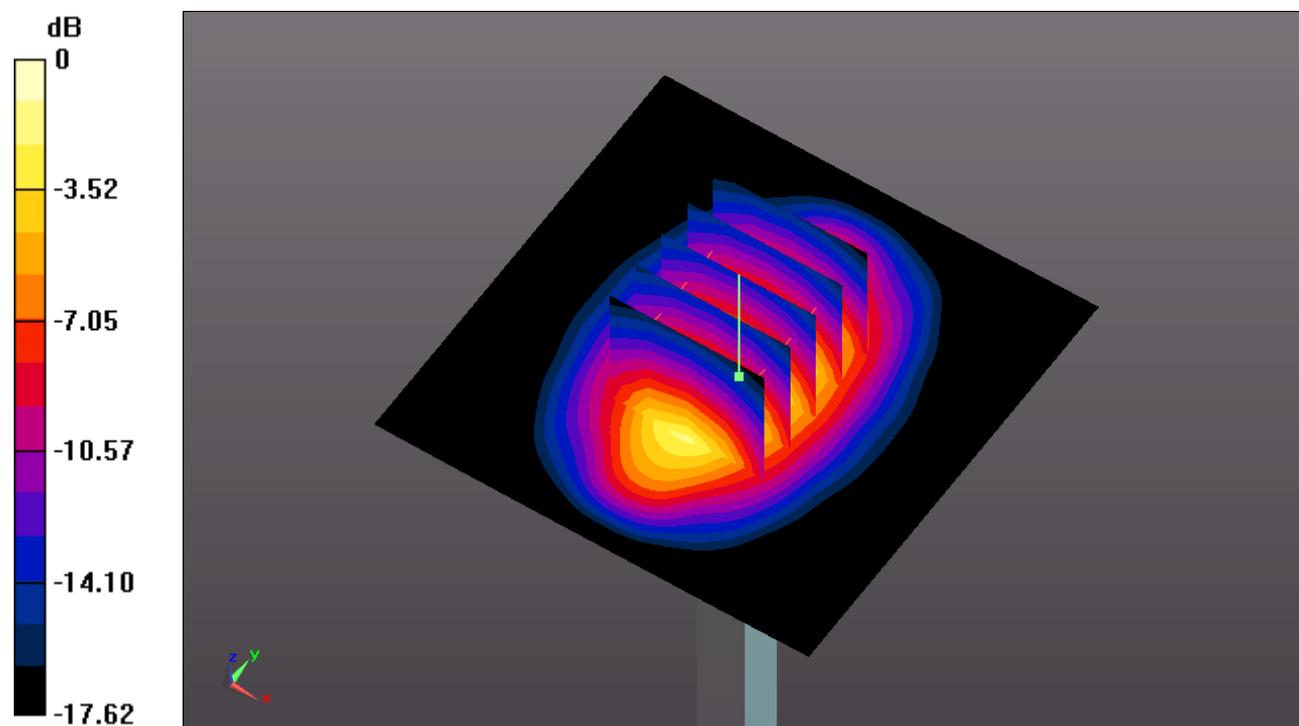

0 dB = 14.730mW/g

### System Check\_Body\_2450MHz\_131218

#### DUT: D2450V2 - SN:840

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL\_2450\_131218 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.93$  mho/m;  $\epsilon_r = 51.23$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7, 7, 7); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Pin=250mW/Area Scan (81x81x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 18.898 mW/g


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 86.617 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 25.810 W/kg

**SAR(1 g) = 12.7 mW/g; SAR(10 g) = 5.95 mW/g**

Maximum value of SAR (measured) = 19.132 mW/g

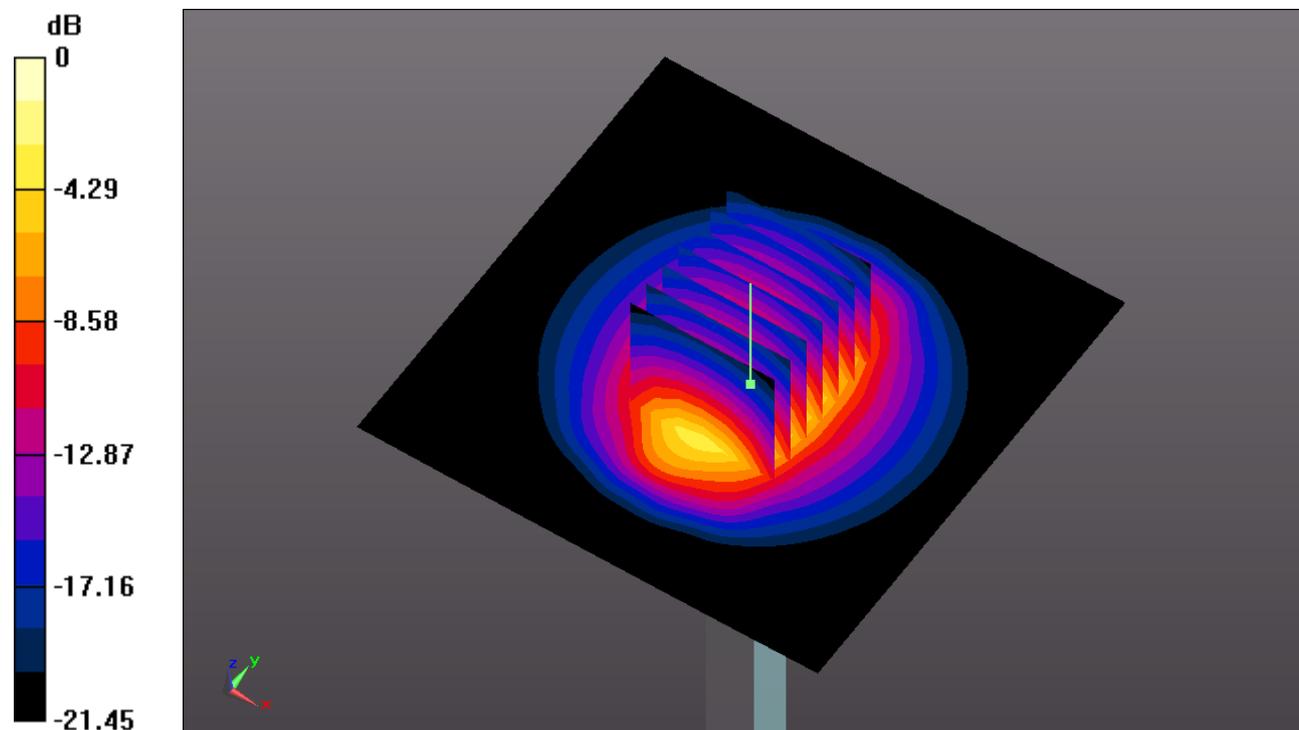

0 dB = 19.130mW/g



## ***Appendix B. Plots of SAR Measurement***

The plots are shown as follows.

### #01\_GSM850\_GSM Voice\_Right Cheek\_Ch251

Communication System: General GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL\_835\_131216 Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.89$  mho/m;  $\epsilon_r = 40.605$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.35, 9.35, 9.35); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch251/Area Scan (101x161x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.590 mW/g


**Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.597 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.699 W/kg

**SAR(1 g) = 0.473 mW/g; SAR(10 g) = 0.324 mW/g**

Maximum value of SAR (measured) = 0.580 mW/g

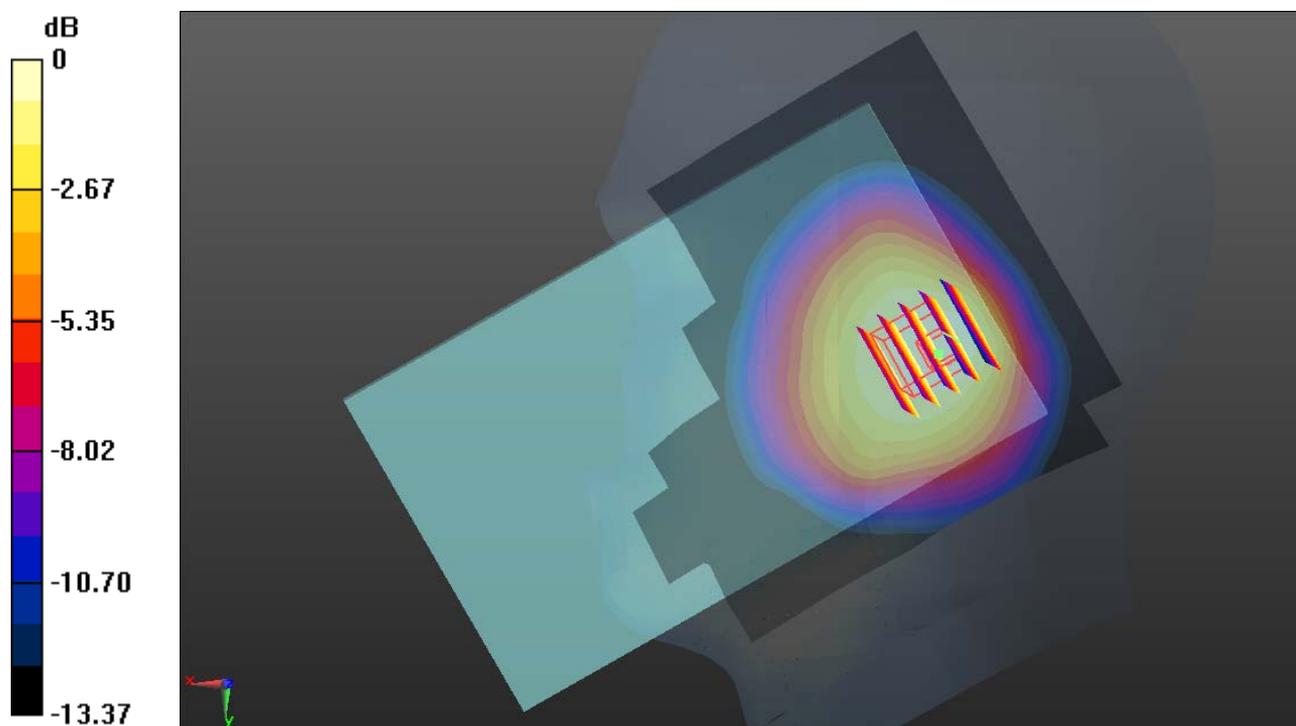

0 dB = 0.580mW/g

### #02\_GSM850\_GSM Voice\_Right Tilted\_Ch251

Communication System: General GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL\_835\_131216 Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.89$  mho/m;  $\epsilon_r = 40.605$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.35, 9.35, 9.35); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch251/Area Scan (101x161x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.459 mW/g


**Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.859 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.558 W/kg

**SAR(1 g) = 0.377 mW/g; SAR(10 g) = 0.261 mW/g**

Maximum value of SAR (measured) = 0.469 mW/g

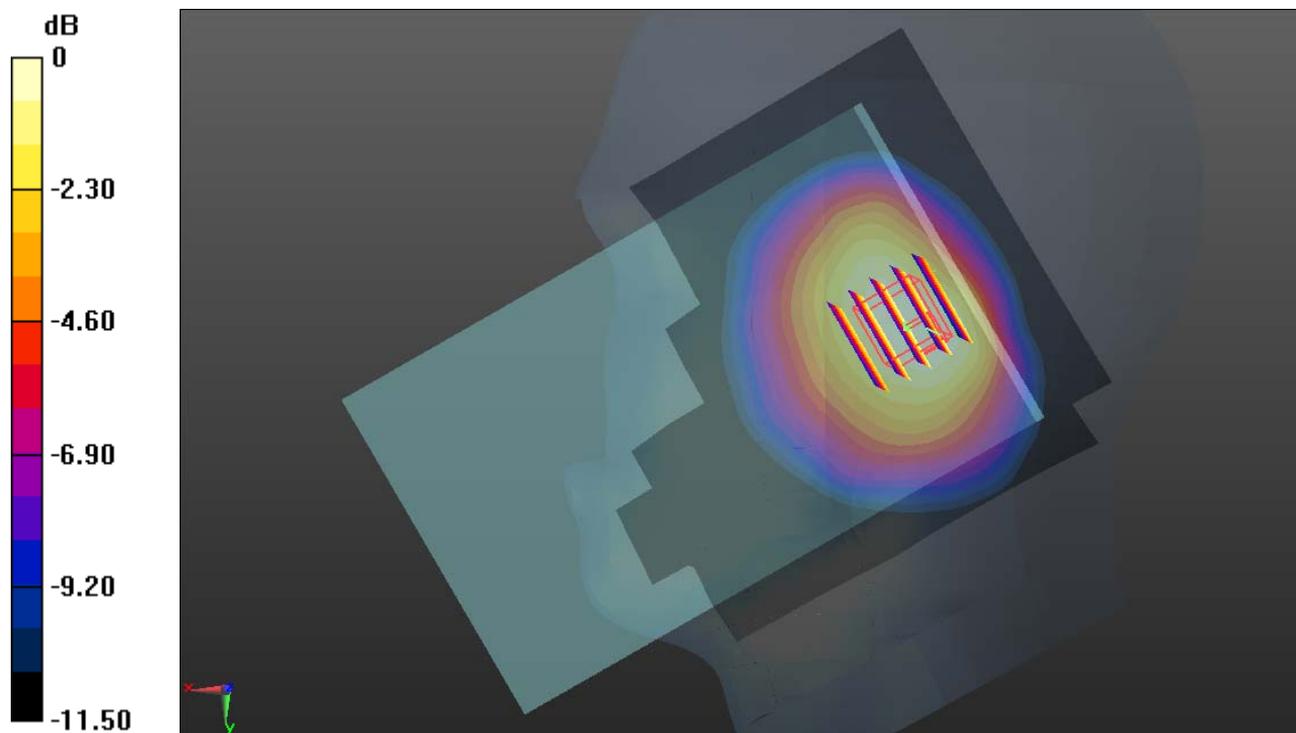

0 dB = 0.470mW/g

**#03\_GSM850\_GSM Voice\_Left Cheek\_Ch251**

Communication System: General GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL\_835\_131216 Medium parameters used:  $f = 849 \text{ MHz}$ ;  $\sigma = 0.89 \text{ mho/m}$ ;  $\epsilon_r = 40.605$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.8 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(9.35, 9.35, 9.35); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch251/Area Scan (101x161x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.385 mW/g


**Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.429 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.642 W/kg

**SAR(1 g) = 0.784 mW/g; SAR(10 g) = 0.451 mW/g**

Maximum value of SAR (measured) = 1.191 mW/g

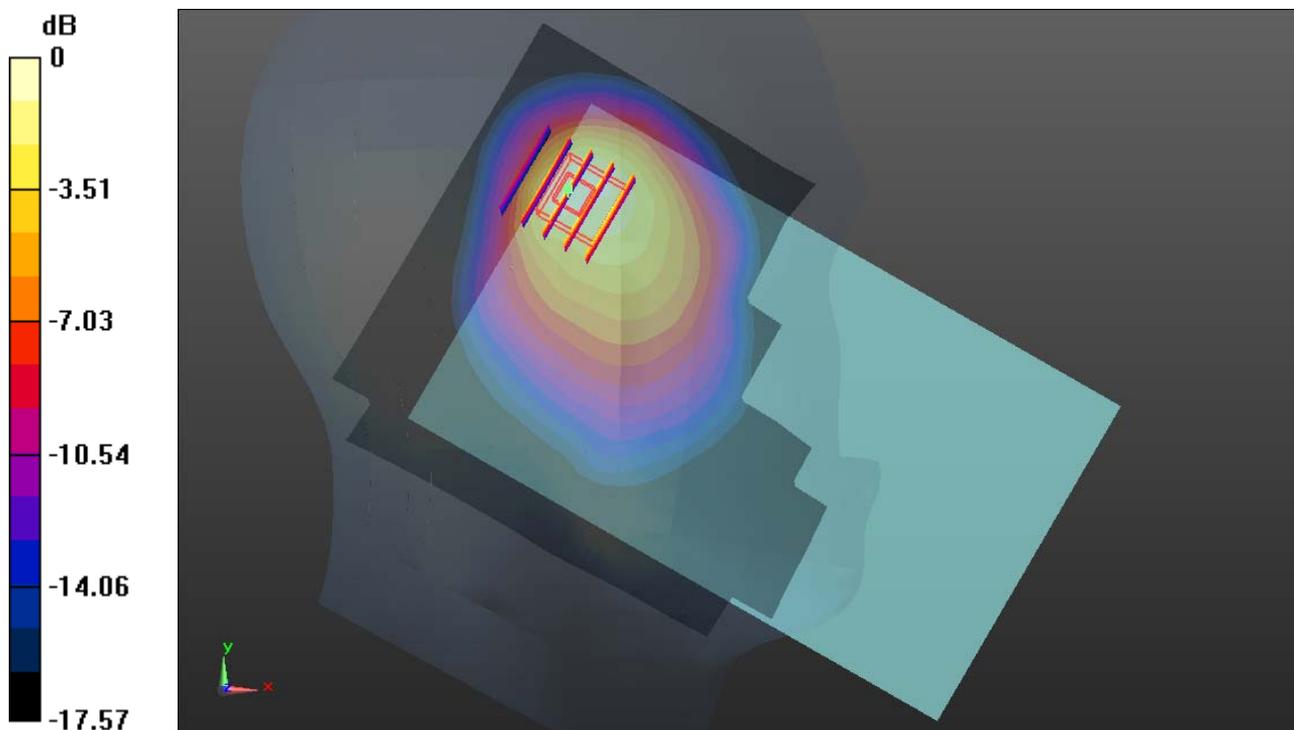

0 dB = 1.190mW/g

### #04\_GSM850\_GSM Voice\_Left Tilted\_Ch251

Communication System: General GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL\_835\_131216 Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.89$  mho/m;  $\epsilon_r = 40.605$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.35, 9.35, 9.35); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch251/Area Scan (101x161x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.054 mW/g


**Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.657 V/m; Power Drift = -0.0028 dB

Peak SAR (extrapolated) = 1.296 W/kg

**SAR(1 g) = 0.592 mW/g; SAR(10 g) = 0.336 mW/g**

Maximum value of SAR (measured) = 0.956 mW/g

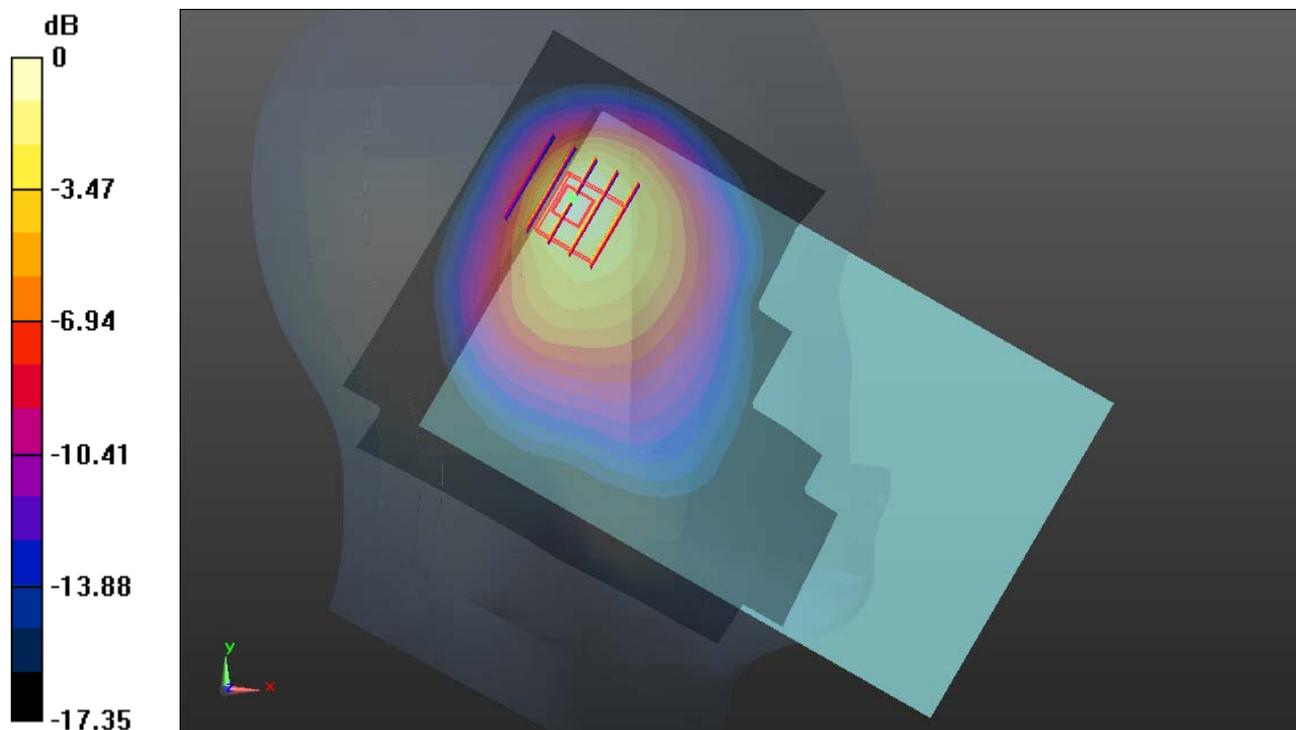

0 dB = 0.960mW/g

**#05\_GSM850\_GSM Voice\_Left Cheek\_Ch128**


Communication System: General GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8.3  
 Medium: HSL\_835\_131216 Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.868$  mho/m;  $\epsilon_r = 40.914$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.8 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(9.35, 9.35, 9.35); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch128/Area Scan (101x161x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 1.565 mW/g

**Ch128/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 15.606 V/m; Power Drift = 0.02 dB  
 Peak SAR (extrapolated) = 1.773 W/kg  
**SAR(1 g) = 0.835 mW/g; SAR(10 g) = 0.477 mW/g**  
 Maximum value of SAR (measured) = 1.281 mW/g

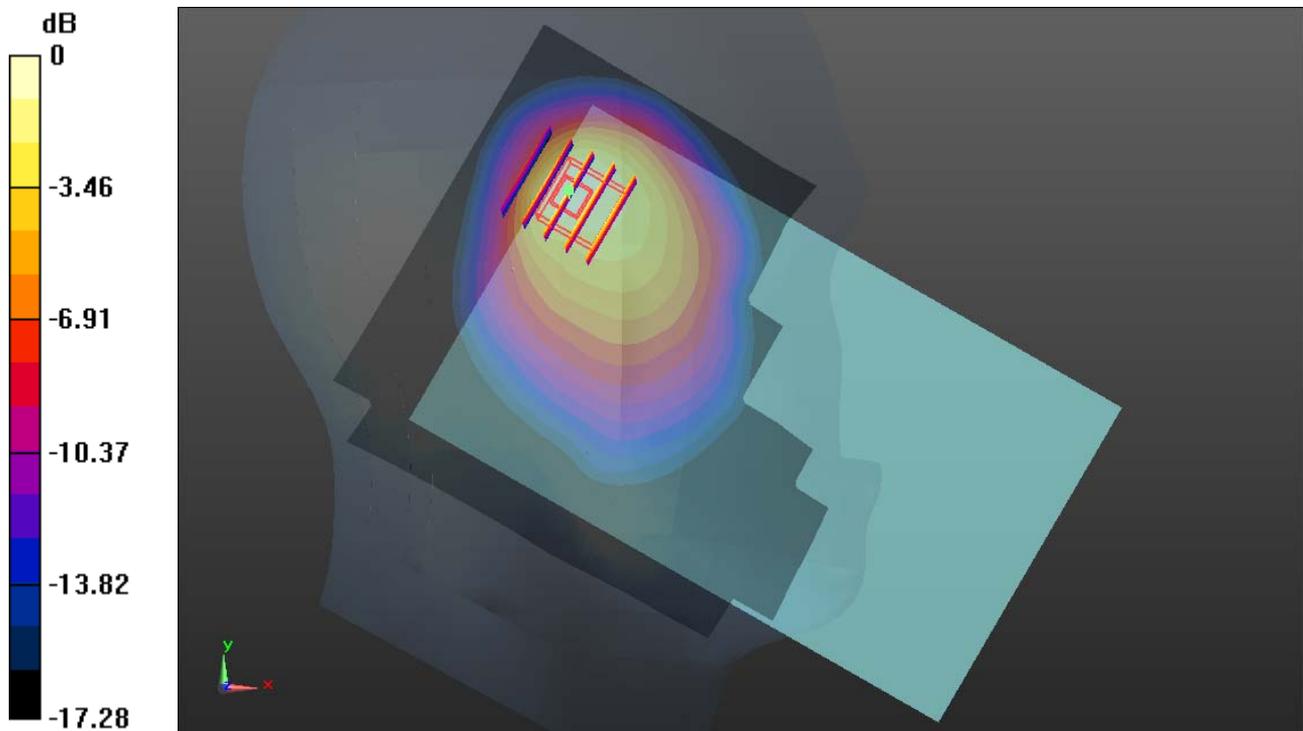

0 dB = 1.280mW/g

### #06\_GSM850\_GSM Voice\_Left Cheek\_Ch189


Communication System: General GSM; Frequency: 836.4 MHz; Duty Cycle: 1:8.3  
Medium: HSL\_835\_131216 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.879$  mho/m;  $\epsilon_r = 40.772$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.35, 9.35, 9.35); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch189/Area Scan (101x161x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 1.513 mW/g

**Ch189/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 15.197 V/m; Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 1.712 W/kg  
**SAR(1 g) = 0.806 mW/g; SAR(10 g) = 0.461 mW/g**  
Maximum value of SAR (measured) = 1.236 mW/g

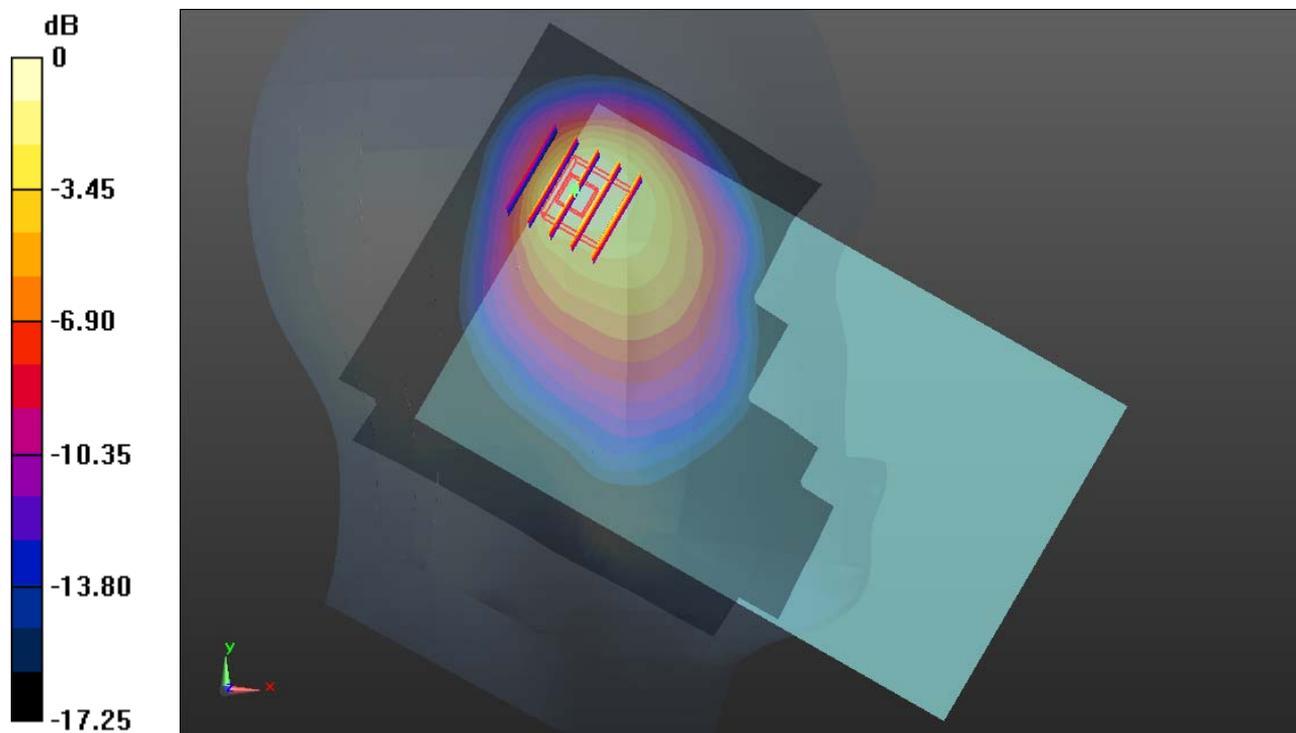

0 dB = 1.240mW/g

### #07\_GSM1900\_GSM Voice\_Right Cheek\_Ch810


Communication System: General GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3  
Medium: HSL\_1900\_131217 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.435$  mho/m;  $\epsilon_r = 38.859$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.9 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.04, 8.04, 8.04); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch810/Area Scan (101x161x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.445 mW/g

**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 12.759 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 0.569 W/kg  
**SAR(1 g) = 0.330 mW/g; SAR(10 g) = 0.188 mW/g**  
Maximum value of SAR (measured) = 0.459 mW/g

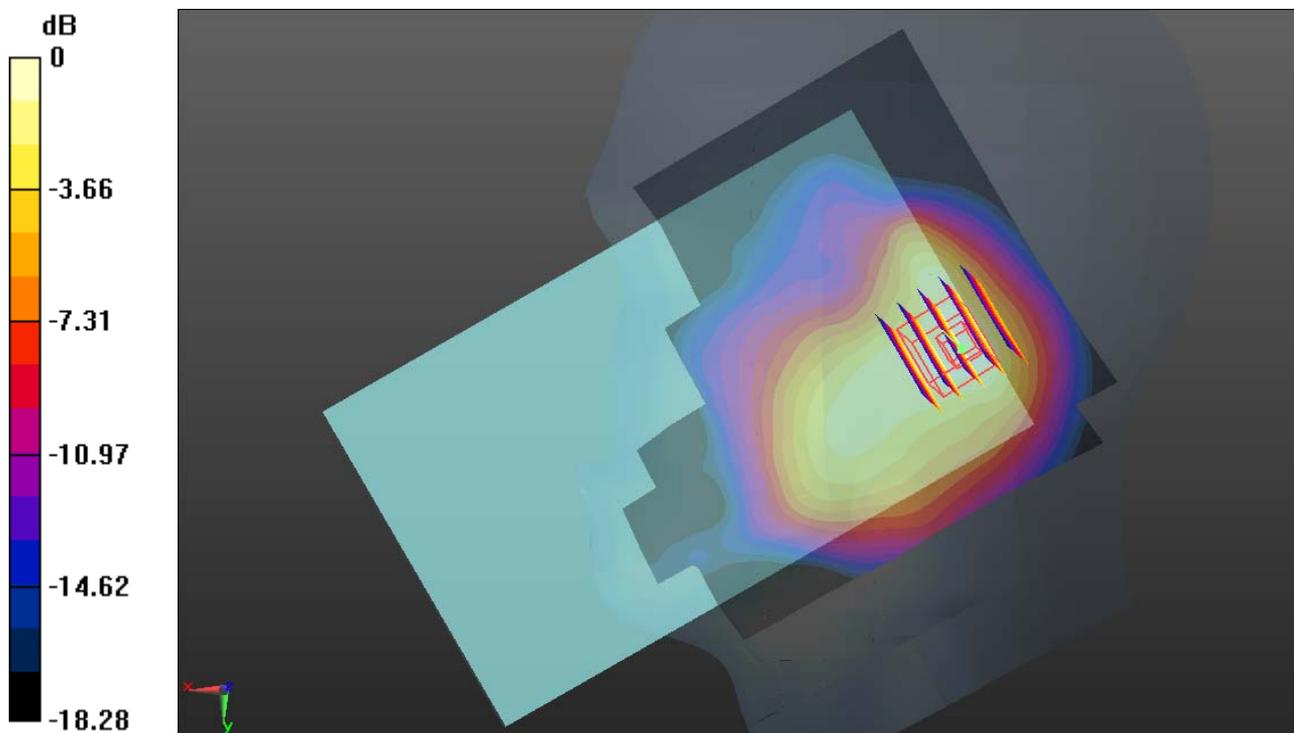

0 dB = 0.460mW/g

### #08\_GSM1900\_GSM Voice\_Right Tilted\_Ch810


Communication System: General GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3  
Medium: HSL\_1900\_131217 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.435$  mho/m;  $\epsilon_r = 38.859$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.9 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.04, 8.04, 8.04); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch810/Area Scan (101x161x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.389 mW/g

**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 13.440 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 0.452 W/kg  
**SAR(1 g) = 0.251 mW/g; SAR(10 g) = 0.142 mW/g**  
Maximum value of SAR (measured) = 0.357 mW/g

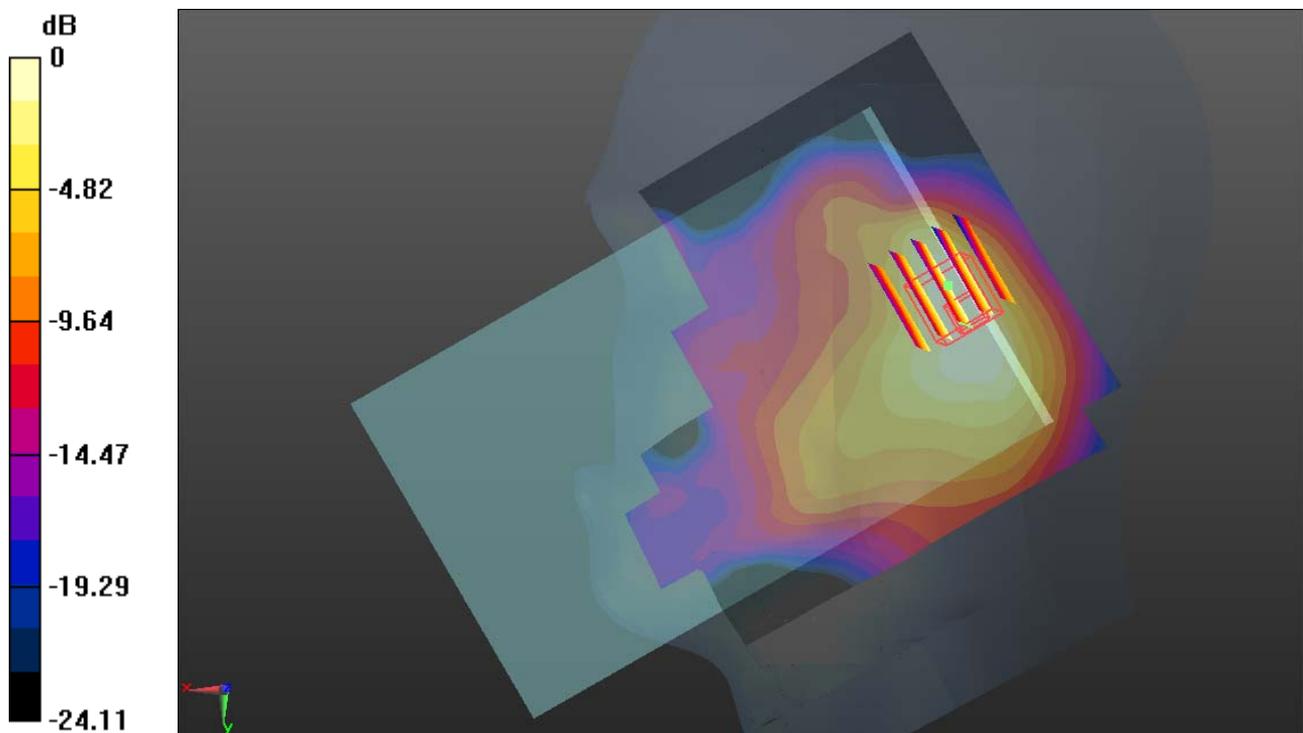

0 dB = 0.360mW/g

### #09\_GSM1900\_GSM Voice\_Left Cheek\_Ch810


Communication System: General GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3  
Medium: HSL\_1900\_131217 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.435$  mho/m;  $\epsilon_r = 38.859$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.9 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.04, 8.04, 8.04); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch810/Area Scan (101x161x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 1.339 mW/g

**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 9.723 V/m; Power Drift = 0.17 dB  
Peak SAR (extrapolated) = 1.363 W/kg  
**SAR(1 g) = 0.768 mW/g; SAR(10 g) = 0.420 mW/g**  
Maximum value of SAR (measured) = 1.037 mW/g

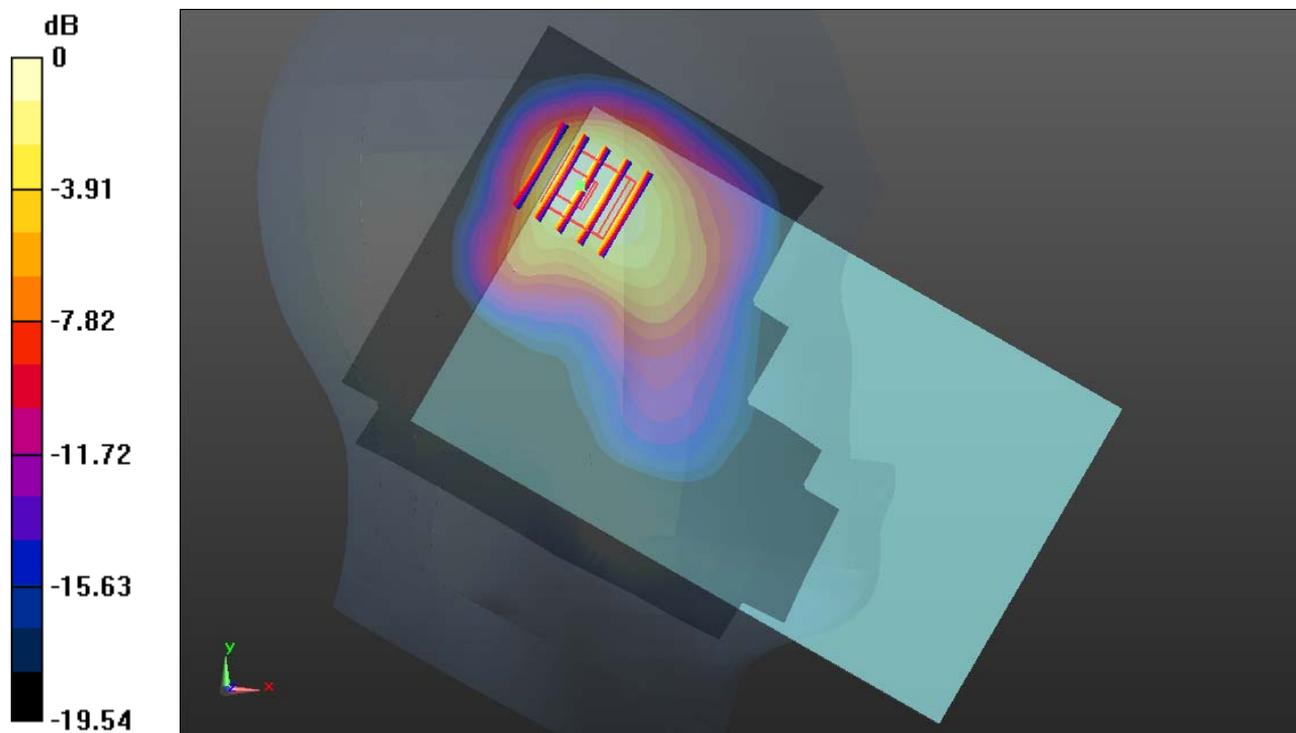

0 dB = 1.040mW/g

**#10\_GSM1900\_GSM Voice\_Left Tilted\_Ch810**


Communication System: General GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3  
 Medium: HSL\_1900\_131217 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.435$  mho/m;  $\epsilon_r = 38.859$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.9 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(8.04, 8.04, 8.04); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch810/Area Scan (101x161x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 1.076 mW/g

**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 13.251 V/m; Power Drift = 0.09 dB  
 Peak SAR (extrapolated) = 1.225 W/kg  
**SAR(1 g) = 0.652 mW/g; SAR(10 g) = 0.332 mW/g**  
 Maximum value of SAR (measured) = 0.954 mW/g

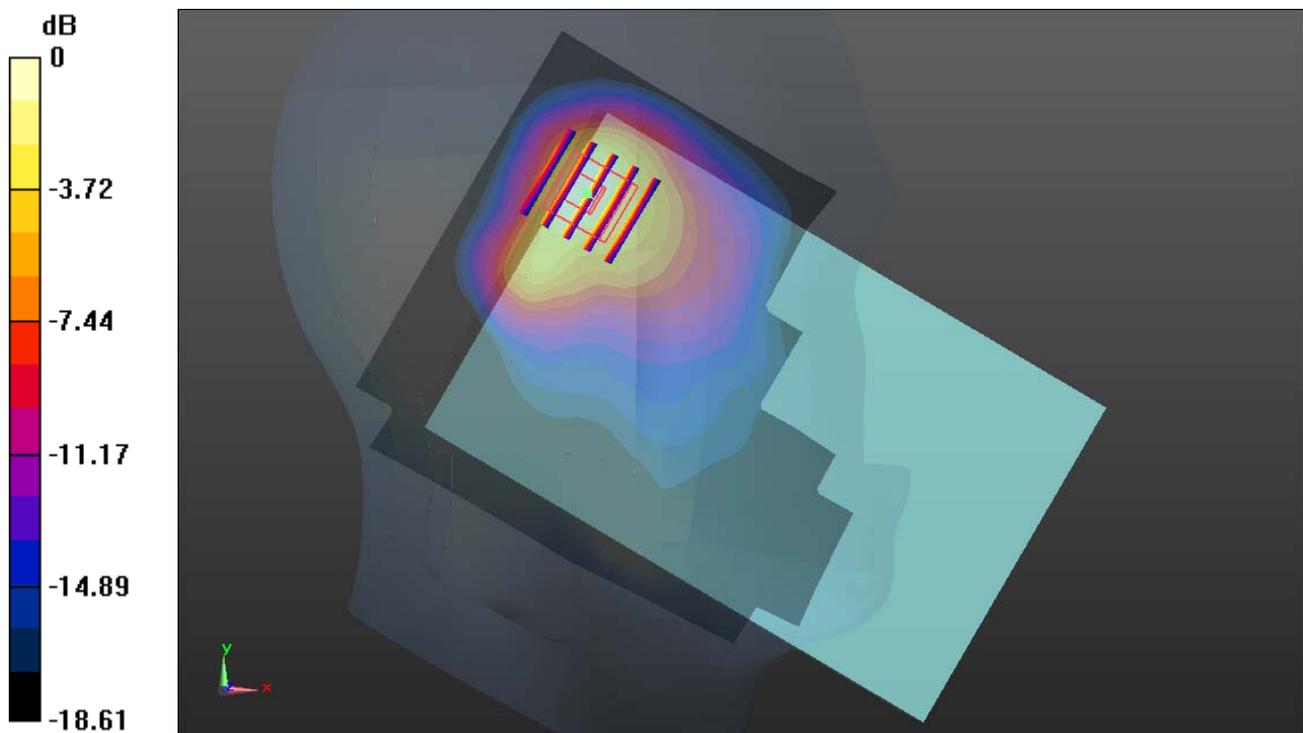

0 dB = 0.950mW/g

**#11\_GSM1900\_GSM Voice\_Left Cheek\_Ch512**


Communication System: General GSM; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3  
 Medium: HSL\_1900\_131217 Medium parameters used:  $f = 1850.2 \text{ MHz}$ ;  $\sigma = 1.374 \text{ mho/m}$ ;  $\epsilon_r = 39.089$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.9 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(8.04, 8.04, 8.04); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch512/Area Scan (101x161x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 1.095 mW/g

**Ch512/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 9.090 V/m; Power Drift = 0.06 dB  
 Peak SAR (extrapolated) = 1.099 W/kg  
**SAR(1 g) = 0.642 mW/g; SAR(10 g) = 0.361 mW/g**  
 Maximum value of SAR (measured) = 0.867 mW/g

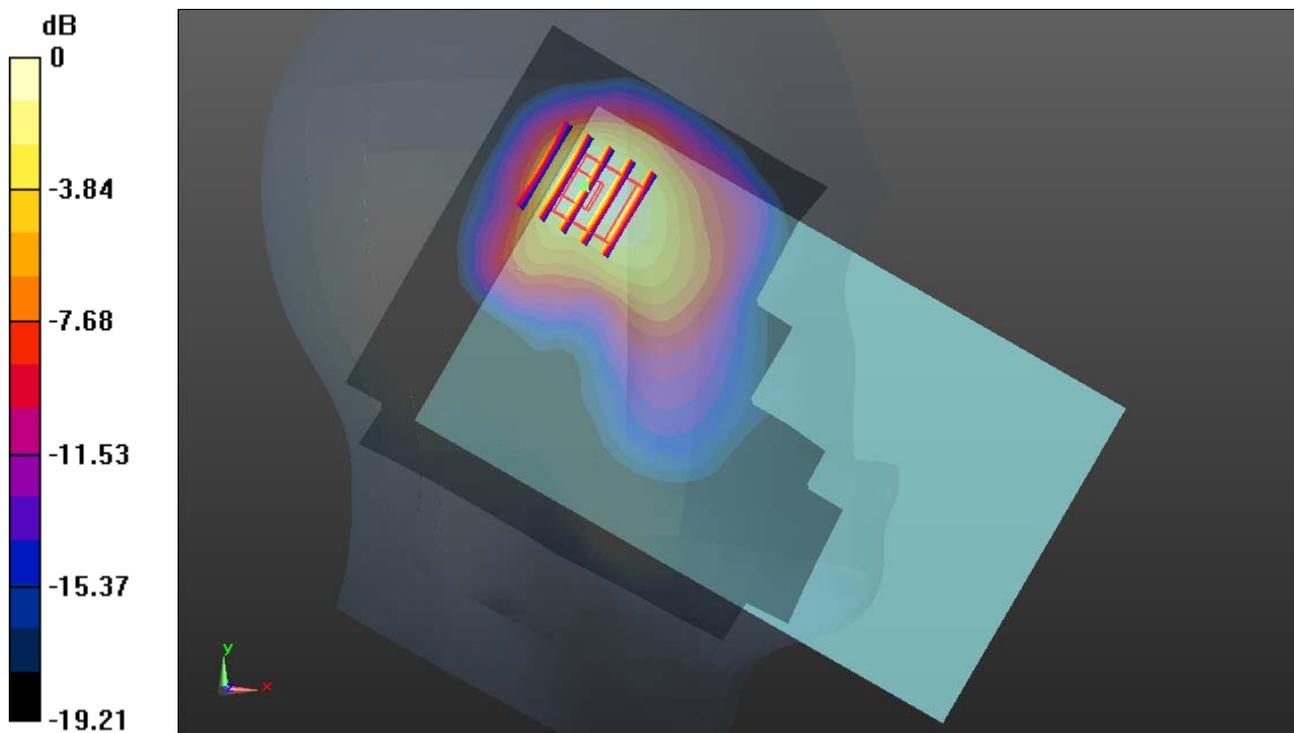

0 dB = 0.870mW/g

**#12\_GSM1900\_GSM Voice\_Left Cheek\_Ch661**


Communication System: General GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3  
 Medium: HSL\_1900\_131217 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.404$  mho/m;  $\epsilon_r = 38.992$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.9 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(8.04, 8.04, 8.04); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch661/Area Scan (101x161x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 1.210 mW/g

**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 9.448 V/m; Power Drift = 0.01 dB  
 Peak SAR (extrapolated) = 1.224 W/kg  
**SAR(1 g) = 0.702 mW/g; SAR(10 g) = 0.388 mW/g**  
 Maximum value of SAR (measured) = 0.953 mW/g

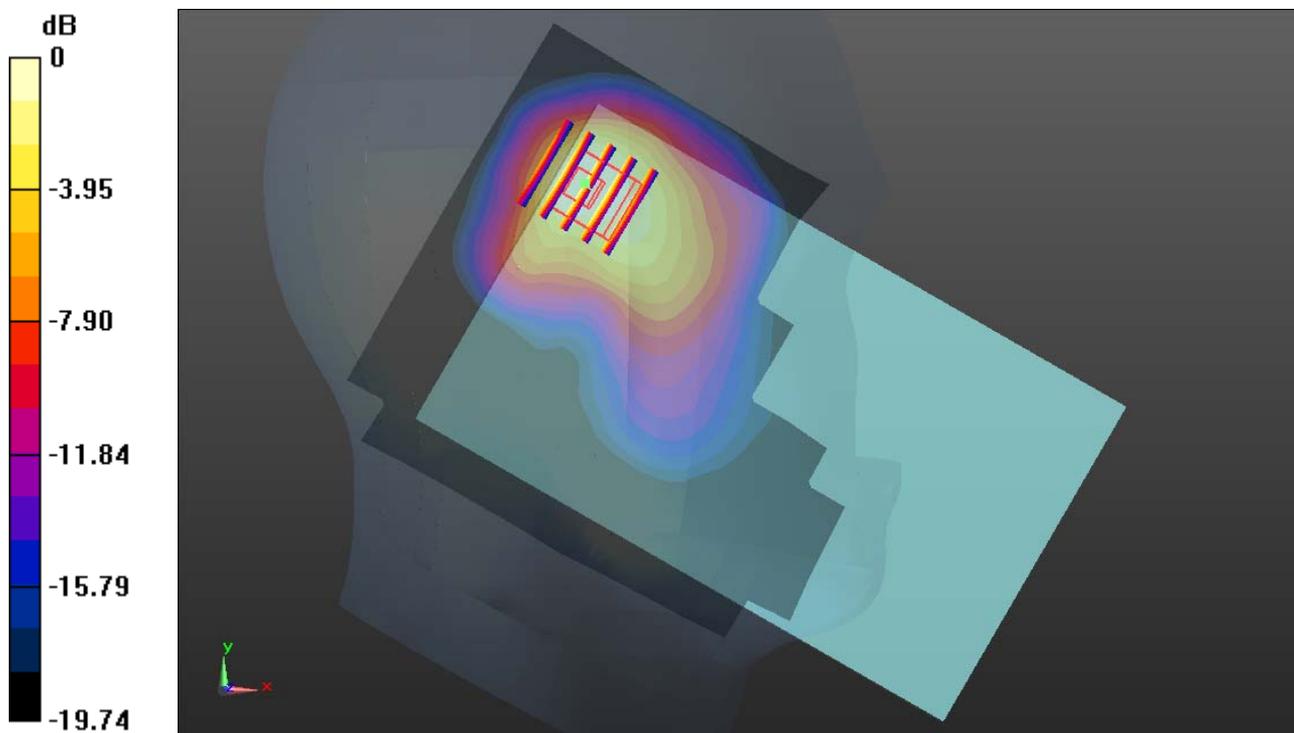

0 dB = 0.950mW/g

### #13\_WLAN2.4GHz\_802.11b\_1M\_Right Cheek\_Ch1

Communication System: WIFI; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: HSL\_2450\_131218 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.767$  mho/m;  $\epsilon_r =$

$39.968$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.05, 7.05, 7.05); Calibrated: 2013.06.20

- Sensor-Surface: 2mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19

- Phantom: SAM2; Type: SAM; Serial: TP-1477

- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch1/Area Scan (121x201x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.313 mW/g


**Ch1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.604 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.448 W/kg

**SAR(1 g) = 0.201 mW/g; SAR(10 g) = 0.091 mW/g**

Maximum value of SAR (measured) = 0.309 mW/g

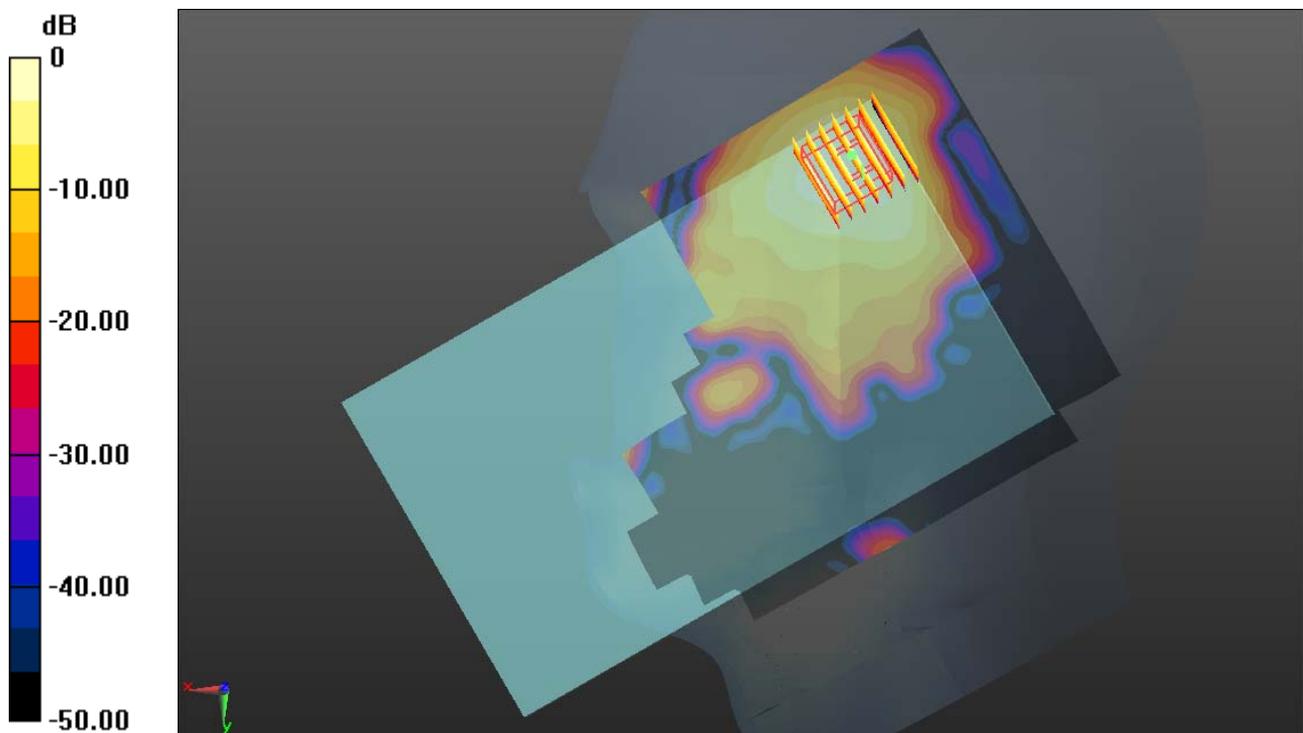

0 dB = 0.310mW/g

### #14\_WLAN2.4GHz\_802.11b\_1M\_Right Tilted\_Ch1

Communication System: WIFI; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: HSL\_2450\_131218 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.767$  mho/m;  $\epsilon_r =$

$39.968$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.05, 7.05, 7.05); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch1/Area Scan (121x201x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.198 mW/g


**Ch1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.829 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.261 W/kg

**SAR(1 g) = 0.124 mW/g; SAR(10 g) = 0.056 mW/g**

Maximum value of SAR (measured) = 0.183 mW/g

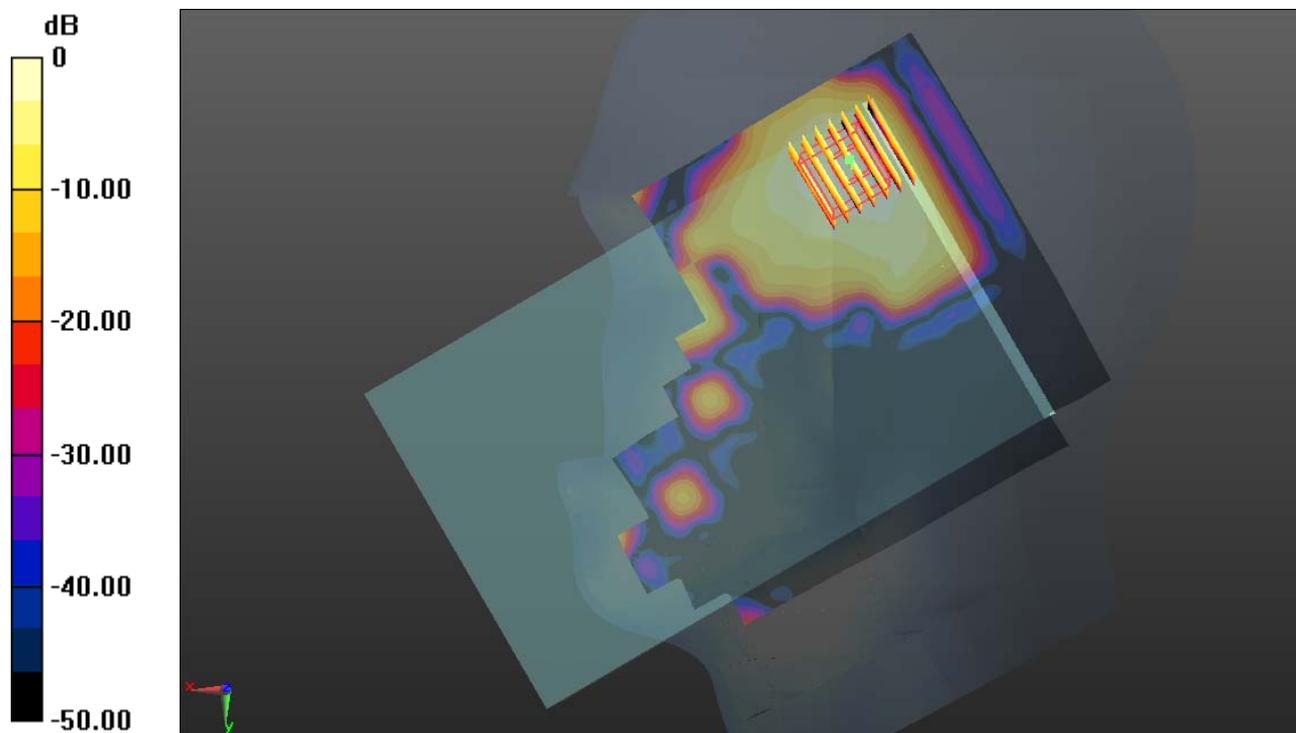

0 dB = 0.180mW/g

### #15\_WLAN2.4GHz\_802.11b\_1M\_Left Cheek\_Ch1

Communication System: WIFI; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: HSL\_2450\_131218 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.767$  mho/m;  $\epsilon_r =$

$39.968$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.05, 7.05, 7.05); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch1/Area Scan (121x201x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.055 mW/g


**Ch1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.487 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.078 W/kg

**SAR(1 g) = 0.038 mW/g; SAR(10 g) = 0.020 mW/g**

Maximum value of SAR (measured) = 0.057 mW/g

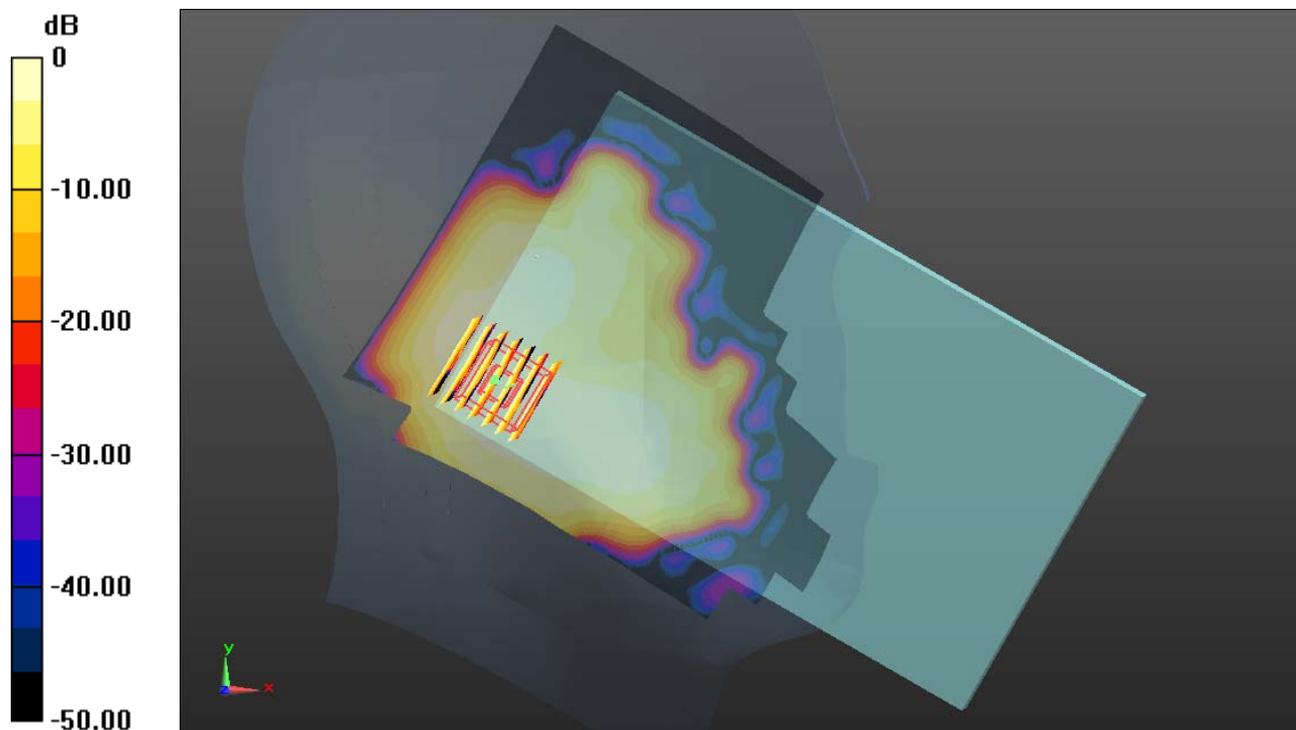

0 dB = 0.060mW/g

### #16\_WLAN2.4GHz\_802.11b\_1M\_Left Tilted\_Ch1

Communication System: WIFI; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: HSL\_2450\_131218 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.767$  mho/m;  $\epsilon_r =$

$39.968$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.05, 7.05, 7.05); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch1/Area Scan (121x201x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.058 mW/g


**Ch1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.932 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.081 W/kg

**SAR(1 g) = 0.041 mW/g; SAR(10 g) = 0.020 mW/g**

Maximum value of SAR (measured) = 0.062 mW/g

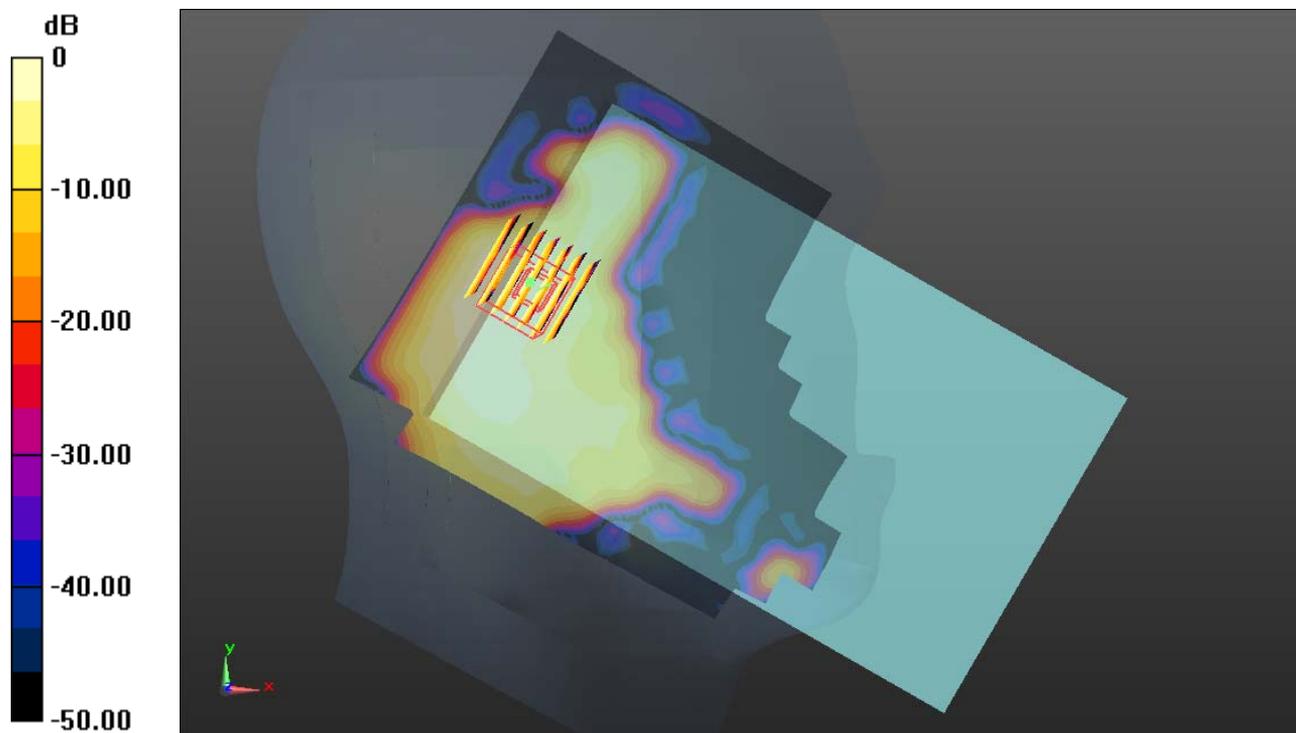

0 dB = 0.060mW/g

### #21\_GSM850\_GPRS (2 Tx slots)\_Bottom Face 0cm\_Ch251


Communication System: GPRS/EDGE (2 Tx slots); Frequency: 848.8 MHz; Duty Cycle: 1:4.15  
Medium: MSL\_835\_131217 Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.996$  mho/m;  $\epsilon_r = 54.706$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch251/Area Scan (101x81x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 1.478 mW/g

**Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 6.044 V/m; Power Drift = 0.09 dB  
Peak SAR (extrapolated) = 1.740 W/kg  
**SAR(1 g) = 0.939 mW/g; SAR(10 g) = 0.589 mW/g**  
Maximum value of SAR (measured) = 1.014 mW/g

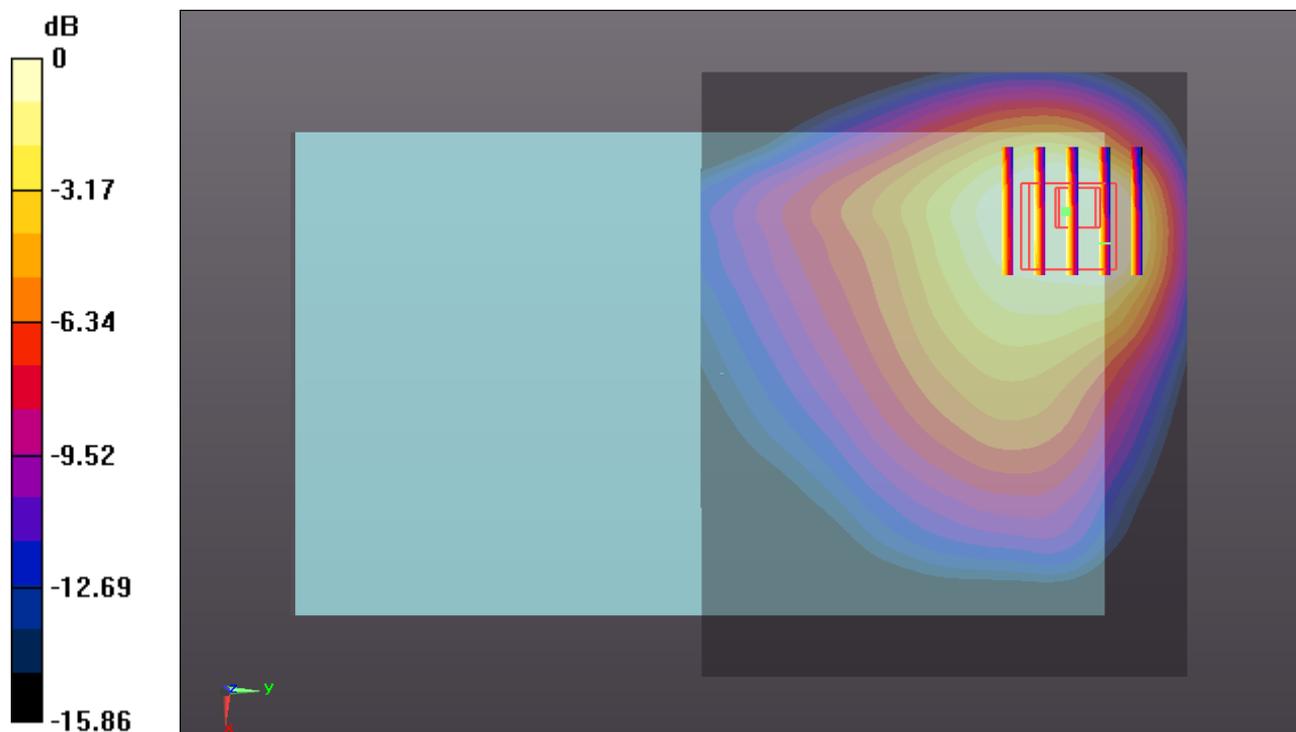

0 dB = 1.010mW/g

### #22\_GSM850\_GPRS (2 Tx slots)\_Edge1 0cm\_Ch251

Communication System: GPRS/EDGE (2 Tx slots); Frequency: 848.8 MHz; Duty Cycle: 1:4.15  
Medium: MSL\_835\_131217 Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.996$  mho/m;  $\epsilon_r = 54.706$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch251/Area Scan (31x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.461 mW/g


**Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.784 V/m; Power Drift = 0.0057 dB

Peak SAR (extrapolated) = 0.708 W/kg

**SAR(1 g) = 0.379 mW/g; SAR(10 g) = 0.226 mW/g**

Maximum value of SAR (measured) = 0.432 mW/g

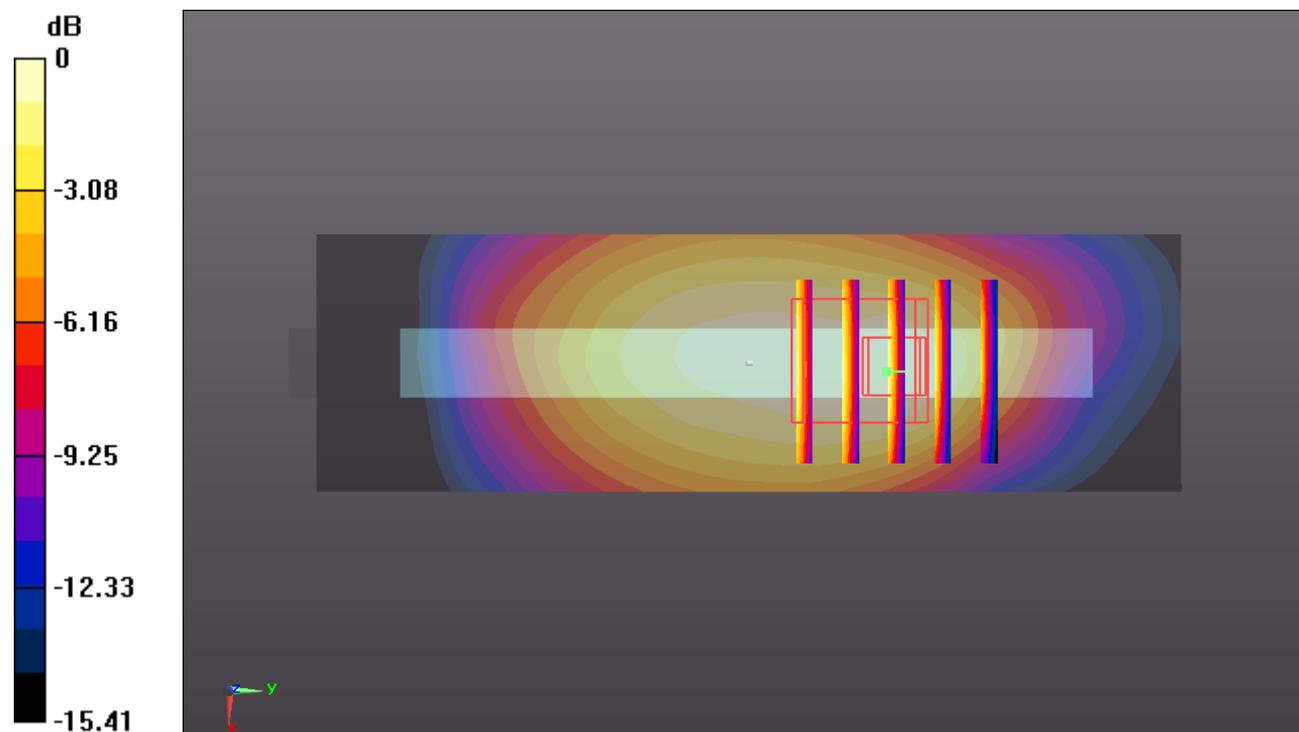

0 dB = 0.430mW/g

**#23\_GSM850\_GPRS (2 Tx slots)\_Edge2 0cm\_Ch251**


Communication System: GPRS/EDGE (2 Tx slots); Frequency: 848.8 MHz; Duty Cycle: 1:4.15  
Medium: MSL\_835\_131217 Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.996$  mho/m;  $\epsilon_r = 54.706$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch251/Area Scan (31x161x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.607 mW/g

**Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 8.078 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 0.679 W/kg  
**SAR(1 g) = 0.431 mW/g; SAR(10 g) = 0.263 mW/g**  
Maximum value of SAR (measured) = 0.474 mW/g

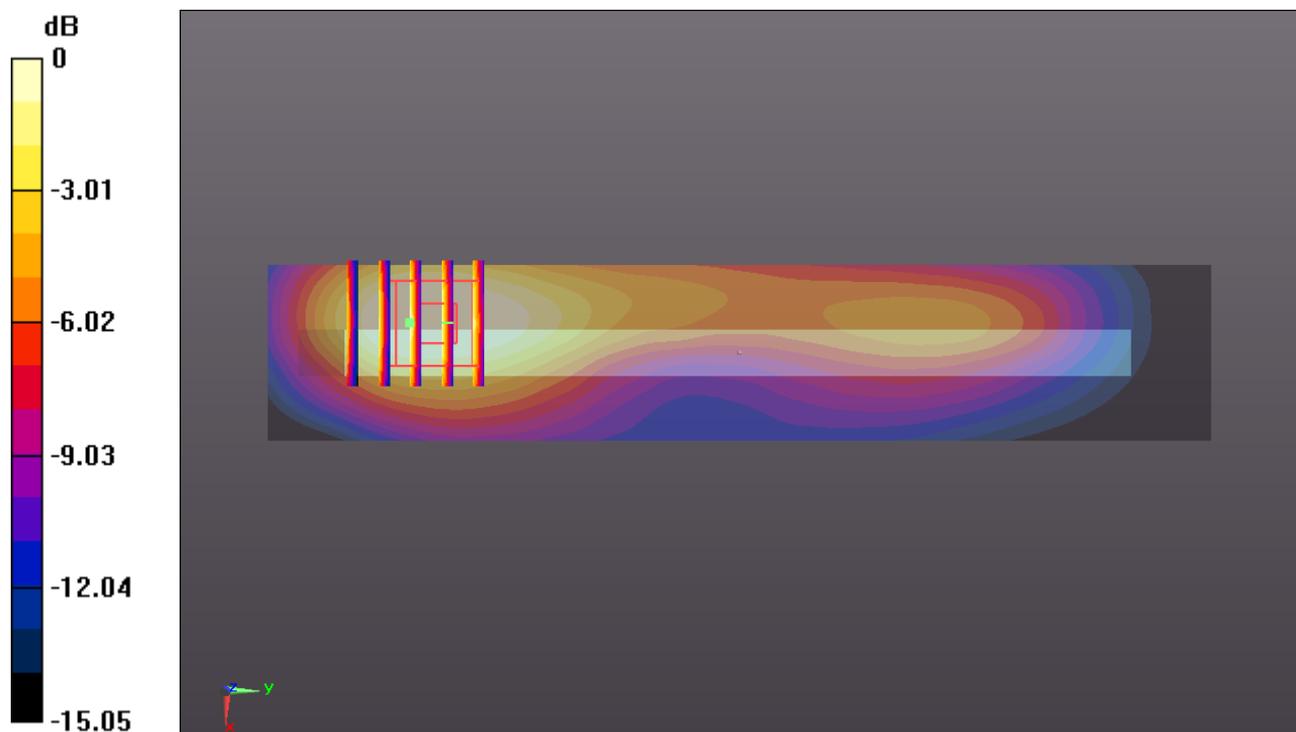

0 dB = 0.470mW/g

### #25\_GSM850\_GPRS (2 Tx slots)\_Bottom Face 0cm\_Ch128


Communication System: GPRS/EDGE (2 Tx slots); Frequency: 824.2 MHz; Duty Cycle: 1:4.15  
Medium: MSL\_835\_131217 Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.971$  mho/m;  $\epsilon_r = 54.947$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch128/Area Scan (101x81x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 1.526 mW/g

**Ch128/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 6.333 V/m; Power Drift = 0.03 dB  
Peak SAR (extrapolated) = 1.795 W/kg  
**SAR(1 g) = 0.978 mW/g; SAR(10 g) = 0.614 mW/g**  
Maximum value of SAR (measured) = 1.055 mW/g

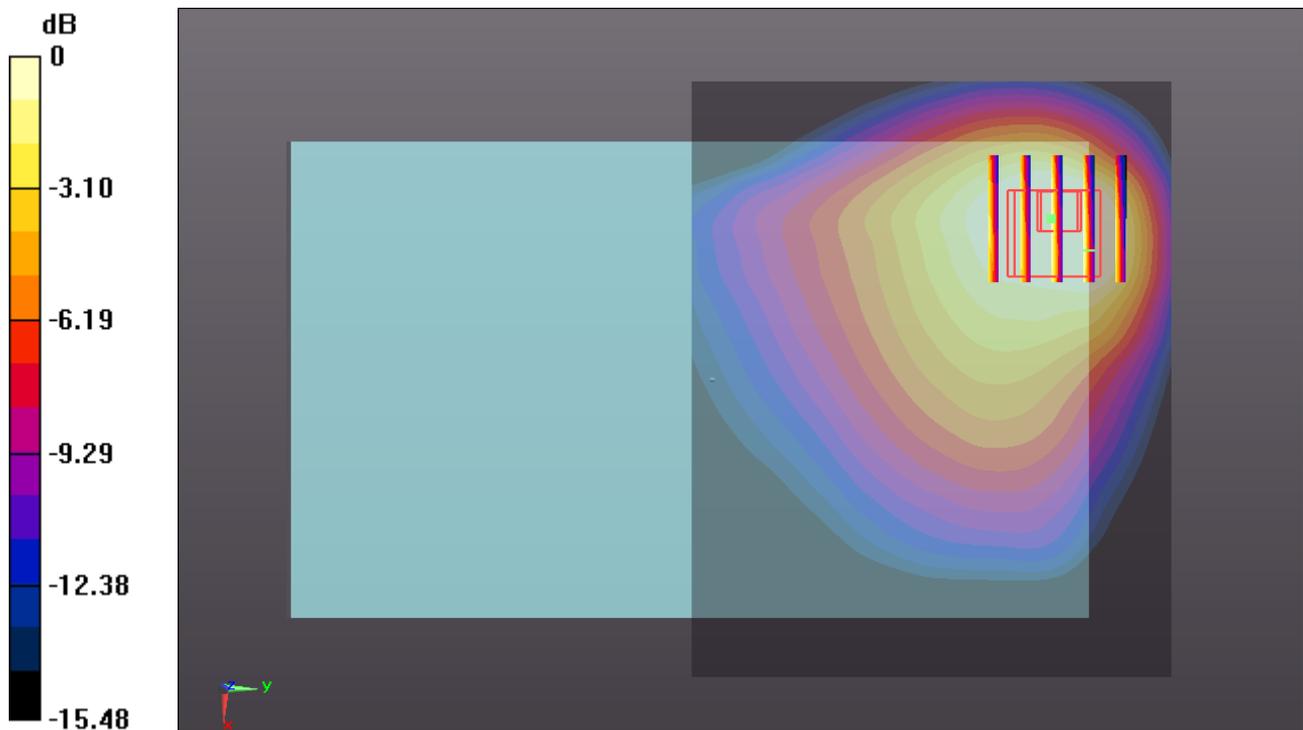

### #26\_GSM850\_GPRS (2 Tx slots)\_Bottom Face 0cm\_Ch128\_Repeat SAR


Communication System: GPRS/EDGE (2 Tx slots); Frequency: 824.2 MHz; Duty Cycle: 1:4.15  
Medium: MSL\_835\_131217 Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.971$  mho/m;  $\epsilon_r = 54.947$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch128/Area Scan (101x81x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 1.521 mW/g

**Ch128/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 6.302 V/m; Power Drift = 0.09 dB  
Peak SAR (extrapolated) = 1.776 W/kg  
**SAR(1 g) = 0.969 mW/g; SAR(10 g) = 0.614 mW/g**  
Maximum value of SAR (measured) = 1.054 mW/g

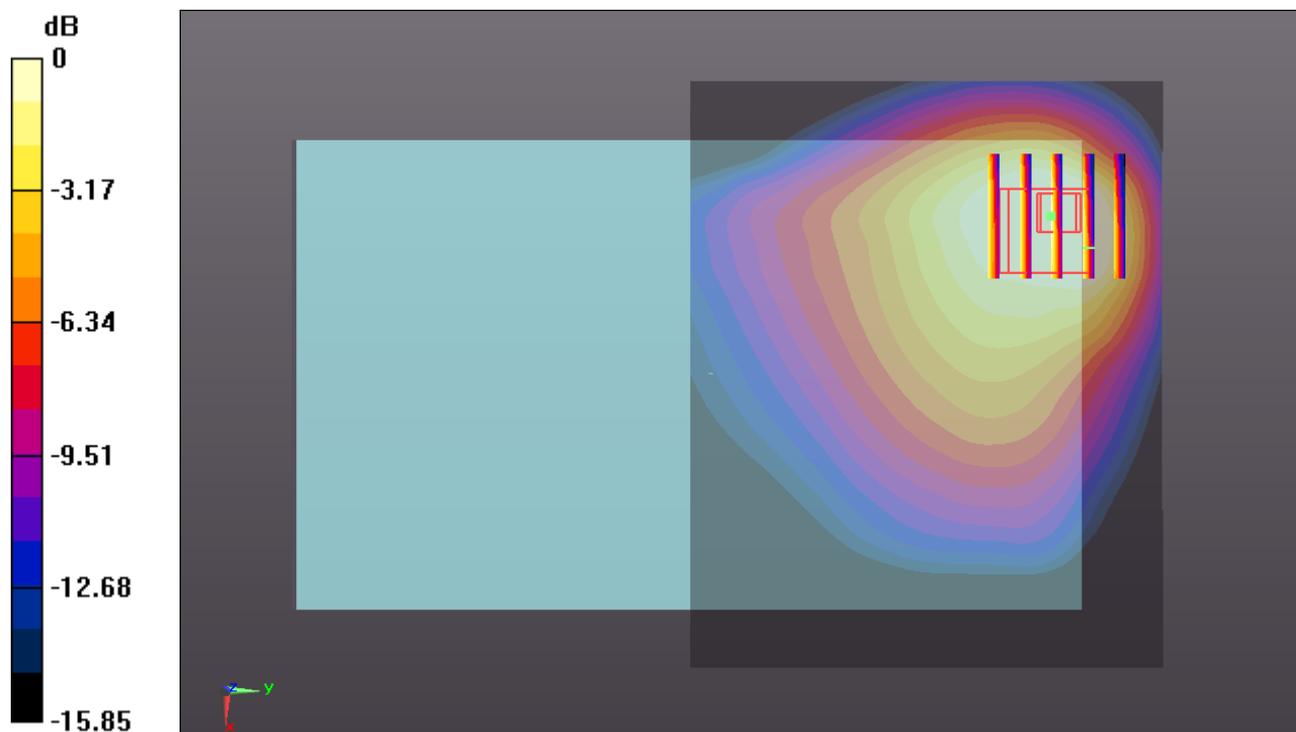

0 dB = 1.050mW/g

**#27\_GSM850\_GPRS (2 Tx slots)\_Bottom Face 0cm\_Ch189**


Communication System: GPRS/EDGE (2 Tx slots); Frequency: 836.4 MHz; Duty Cycle: 1:4.15  
Medium: MSL\_835\_131217 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.984$  mho/m;  $\epsilon_r = 54.833$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch189/Area Scan (101x81x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 1.487 mW/g

**Ch189/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 6.125 V/m; Power Drift = -0.04 dB  
Peak SAR (extrapolated) = 1.768 W/kg  
**SAR(1 g) = 0.959 mW/g; SAR(10 g) = 0.600 mW/g**  
Maximum value of SAR (measured) = 1.027 mW/g

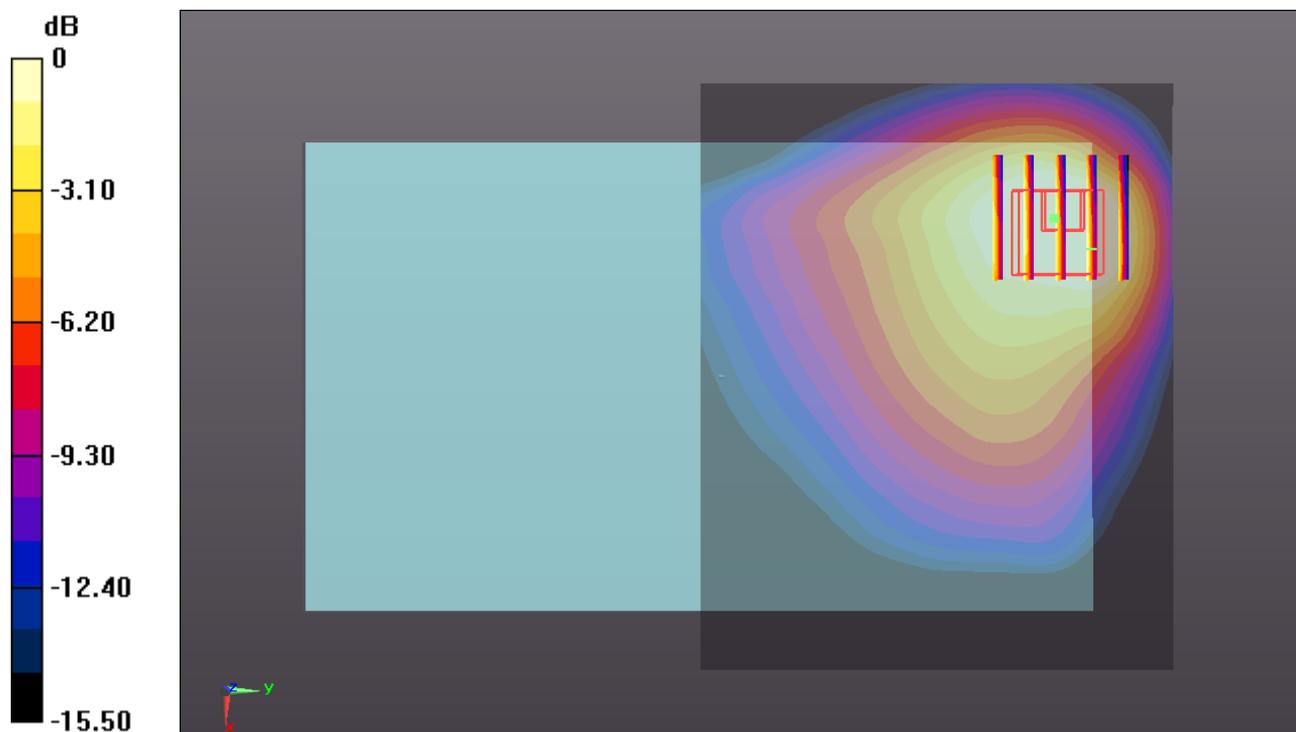

0 dB = 1.030mW/g

### #29\_GSM1900\_GPRS (2 Tx slots)\_Bottom Face 0cm\_Ch810


Communication System: GPRS/EDGE (2 Tx slots); Frequency: 1909.8 MHz; Duty Cycle: 1:4.15  
Medium: MSL\_1900\_131216 Medium parameters used:  $f = 1909.8 \text{ MHz}$ ;  $\sigma = 1.563 \text{ mho/m}$ ;  $\epsilon_r = 53.587$ ;  $\rho = 1000 \text{ kg/m}^3$   
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch810/Area Scan (101x81x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 1.926 mW/g

**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 2.843 V/m; Power Drift = 0.08 dB  
Peak SAR (extrapolated) = 2.313 W/kg  
**SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.592 mW/g**  
Maximum value of SAR (measured) = 1.301 mW/g

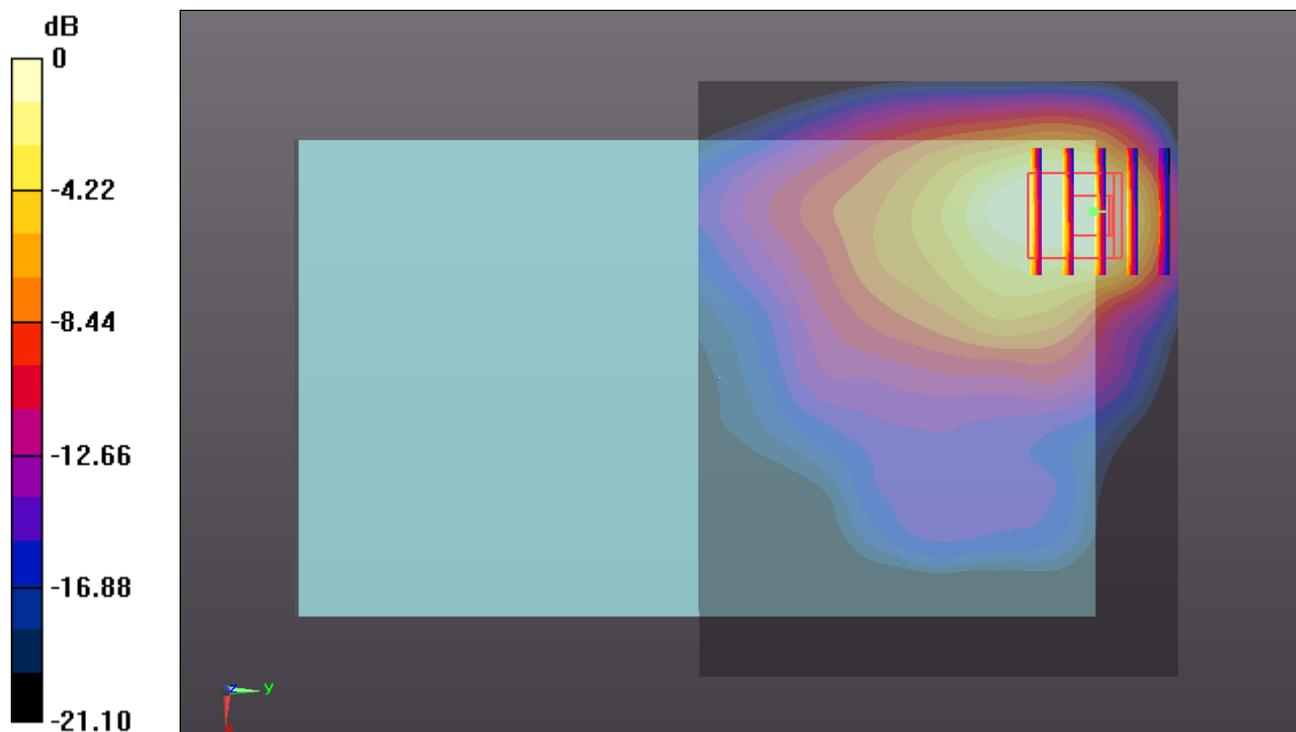

0 dB = 1.300mW/g

### #30\_GSM1900\_GPRS (2 Tx slots)\_Bottom Face 0cm\_Ch810\_Repeat SAR


Communication System: GPRS/EDGE (2 Tx slots); Frequency: 1909.8 MHz; Duty Cycle: 1:4.15  
Medium: MSL\_1900\_131216 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.563$  mho/m;  $\epsilon_r = 53.587$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch810/Area Scan (101x81x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 1.919 mW/g

**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 2.843 V/m; Power Drift = 0.08 dB  
Peak SAR (extrapolated) = 2.304 W/kg  
**SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.590 mW/g**  
Maximum value of SAR (measured) = 1.296 mW/g

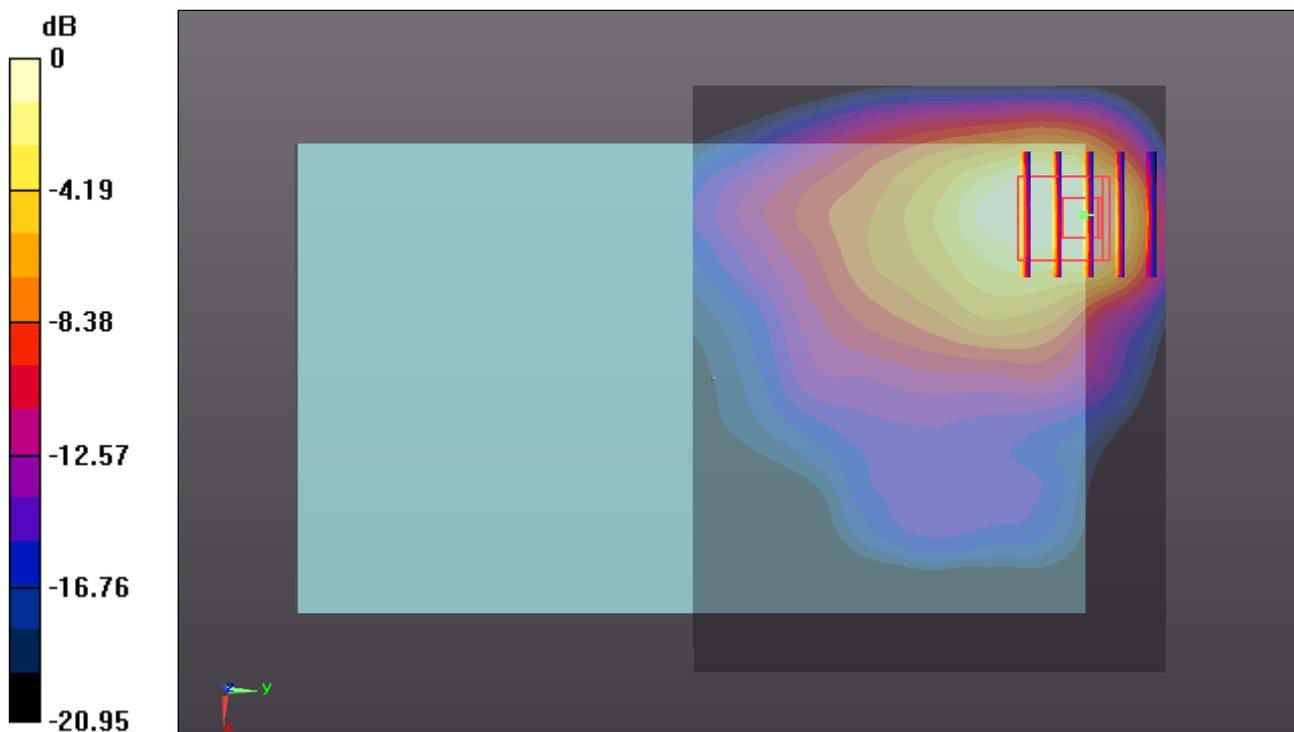

0 dB = 1.300mW/g

### #31\_GSM1900\_GPRS (2 Tx slots)\_Edge1 0cm\_Ch810


Communication System: GPRS/EDGE (2 Tx slots); Frequency: 1909.8 MHz; Duty Cycle: 1:4.15  
Medium: MSL\_1900\_131216 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.563$  mho/m;  $\epsilon_r = 53.587$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch810/Area Scan (31x101x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.756 mW/g

**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 13.541 V/m; Power Drift = -0.07 dB  
Peak SAR (extrapolated) = 1.439 W/kg  
**SAR(1 g) = 0.704 mW/g; SAR(10 g) = 0.319 mW/g**  
Maximum value of SAR (measured) = 1.044 mW/g

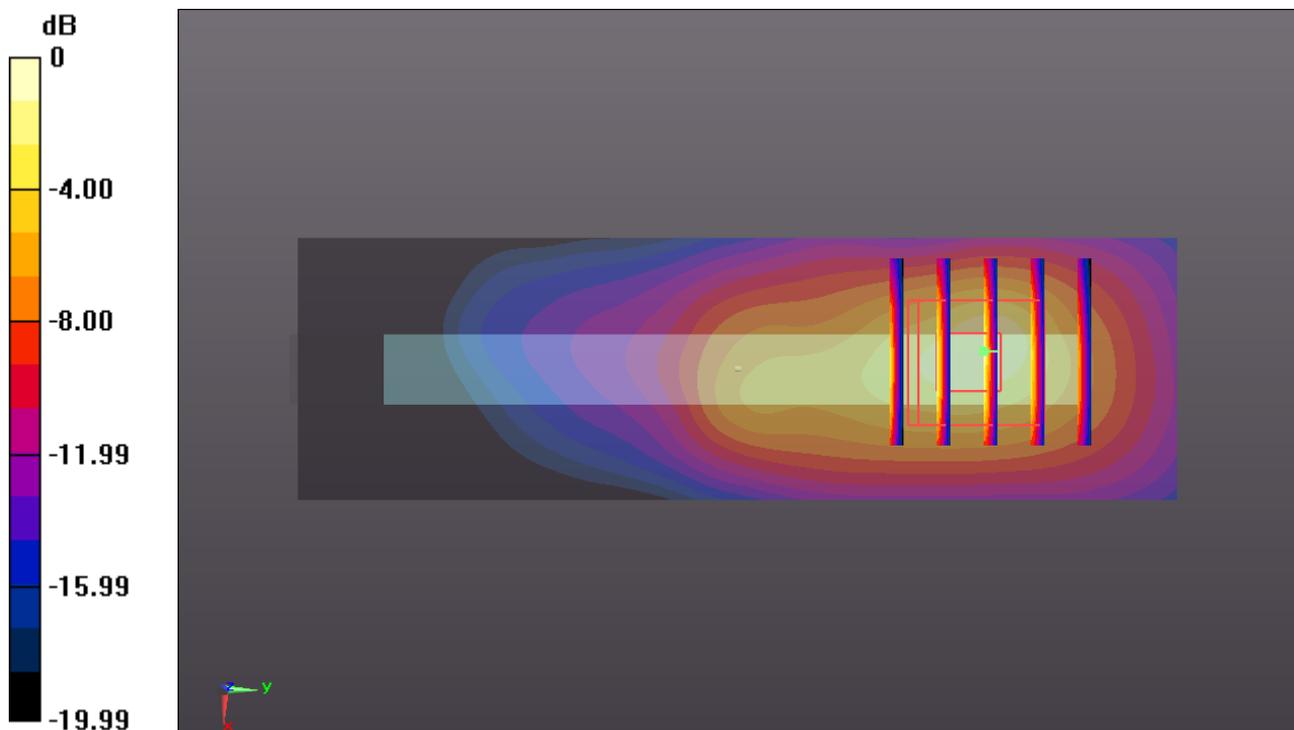

0 dB = 1.040mW/g

### #32\_GSM1900\_GPRS (2 Tx slots)\_Edge2 0cm\_Ch810

Communication System: GPRS/EDGE (2 Tx slots); Frequency: 1909.8 MHz; Duty Cycle: 1:4.15  
Medium: MSL\_1900\_131216 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.563$  mho/m;  $\epsilon_r =$

53.587;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch810/Area Scan (31x161x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.610 mW/g


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.780 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.851 W/kg

**SAR(1 g) = 0.470 mW/g; SAR(10 g) = 0.238 mW/g**

Maximum value of SAR (measured) = 0.645 mW/g

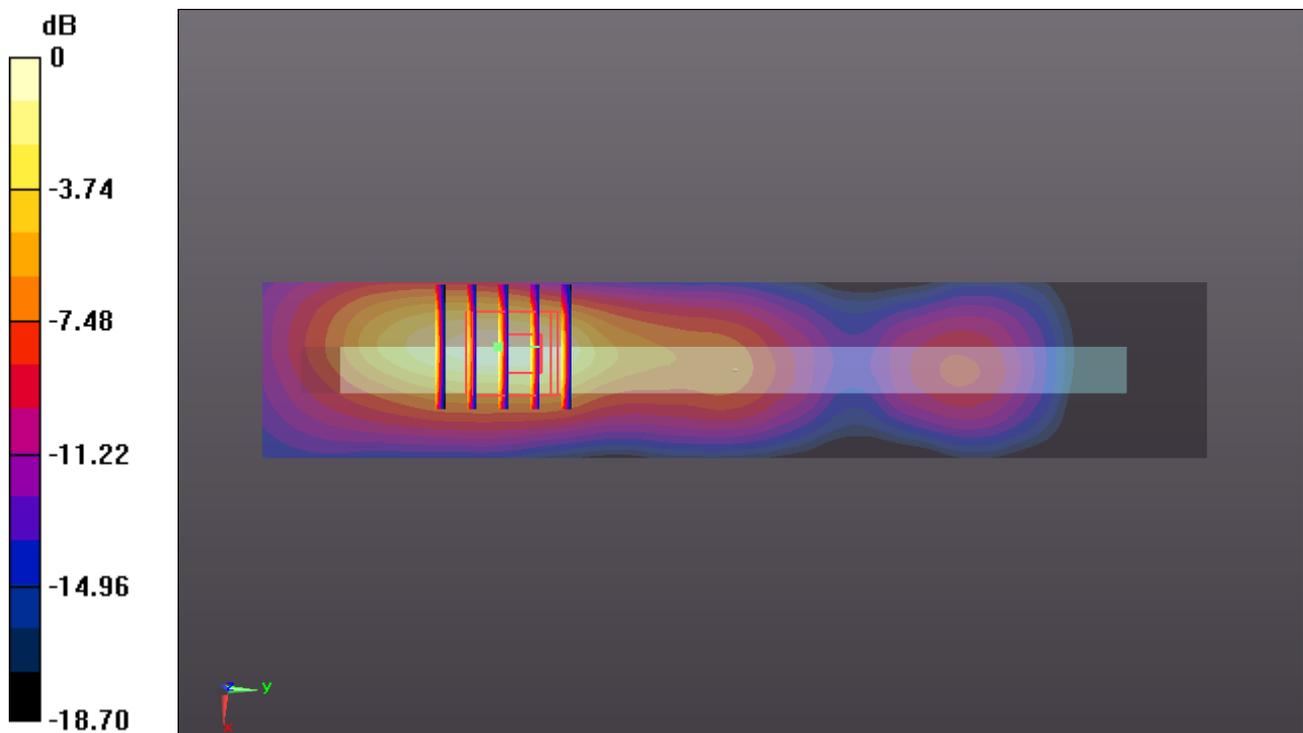

0 dB = 0.650mW/g

### #33\_GSM1900\_GPRS (2 Tx slots)\_Bottom Face 0cm\_Ch512


Communication System: GPRS/EDGE (2 Tx slots); Frequency: 1850.2 MHz; Duty Cycle: 1:4.15  
Medium: MSL\_1900\_131216 Medium parameters used:  $f = 1850.2$  MHz;  $\sigma = 1.497$  mho/m;  $\epsilon_r = 53.903$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch512/Area Scan (101x81x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 1.505 mW/g

**Ch512/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 2.728 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 1.817 W/kg  
**SAR(1 g) = 0.917 mW/g; SAR(10 g) = 0.497 mW/g**  
Maximum value of SAR (measured) = 1.018 mW/g

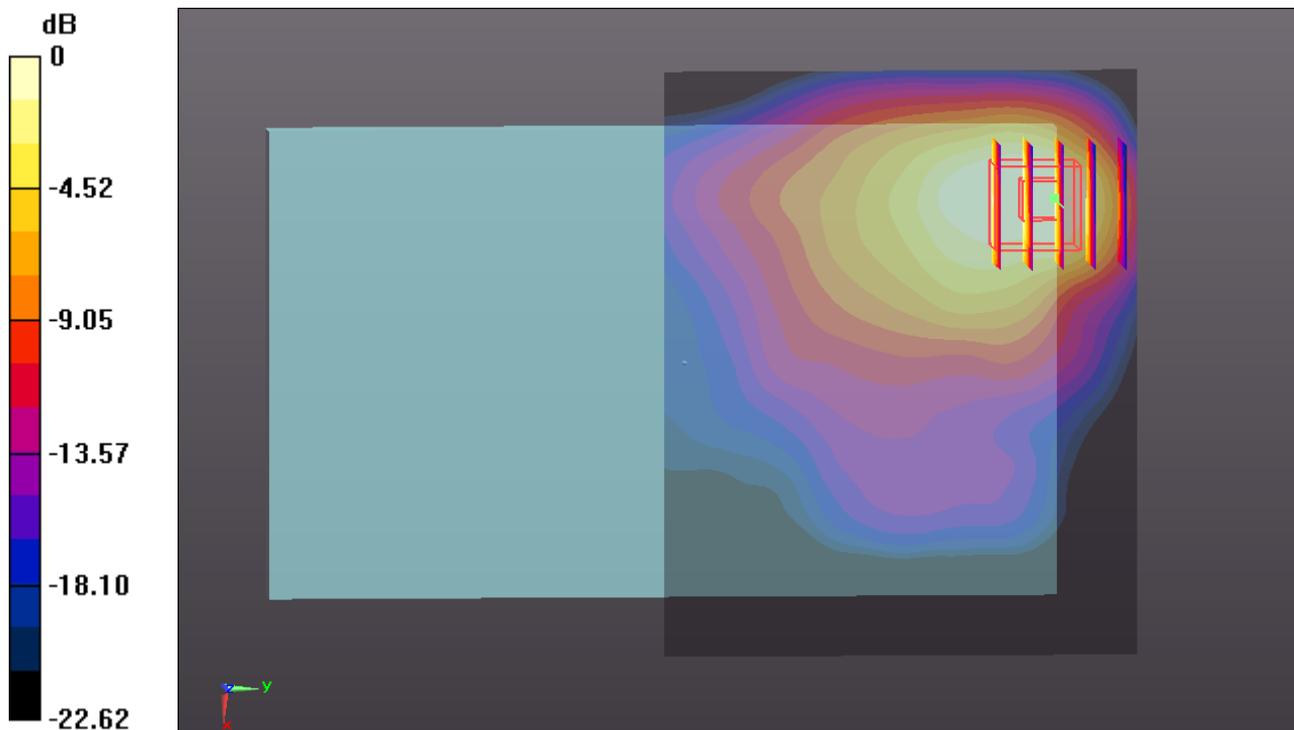

0 dB = 1.020mW/g

### #34\_GSM1900\_GPRS (2 Tx slots)\_Bottom Face 0cm\_Ch661


Communication System: GPRS/EDGE (2 Tx slots); Frequency: 1880 MHz; Duty Cycle: 1:4.15  
Medium: MSL\_1900\_131216 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.533$  mho/m;  $\epsilon_r = 53.837$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.52, 7.52, 7.52); Calibrated: 2013.06.20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch661/Area Scan (101x81x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 1.715 mW/g

**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 2.836 V/m; Power Drift = -0.06 dB  
Peak SAR (extrapolated) = 2.032 W/kg  
**SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.538 mW/g**  
Maximum value of SAR (measured) = 1.147 mW/g

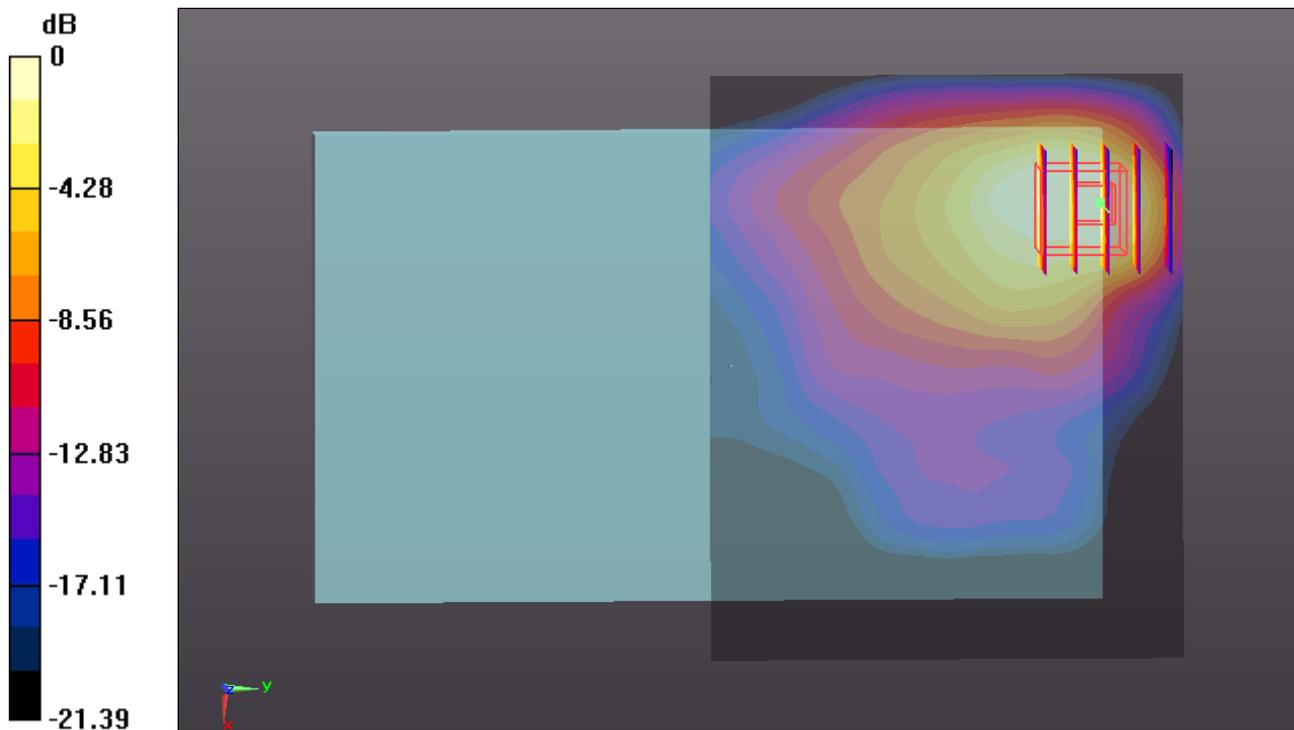

0 dB = 1.150mW/g

**#35\_WLAN2.4GHz\_802.11b\_1M\_Bottom Face 0cm\_Ch1**

Communication System: WIFI; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: MSL\_2450\_131218 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.876$  mho/m;  $\epsilon_r =$

$51.404$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature :  $23.5$  °C ; Liquid Temperature :  $22.7$  °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7, 7, 7); Calibrated: 2013.06.20

- Sensor-Surface: 2mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19

- Phantom: SAM3; Type: SAM; Serial: TP-1079

- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch1/Area Scan (131x91x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 1.634 mW/g


**Ch1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.575 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.203 W/kg

**SAR(1 g) = 0.823 mW/g; SAR(10 g) = 0.341 mW/g**

Maximum value of SAR (measured) = 1.345 mW/g

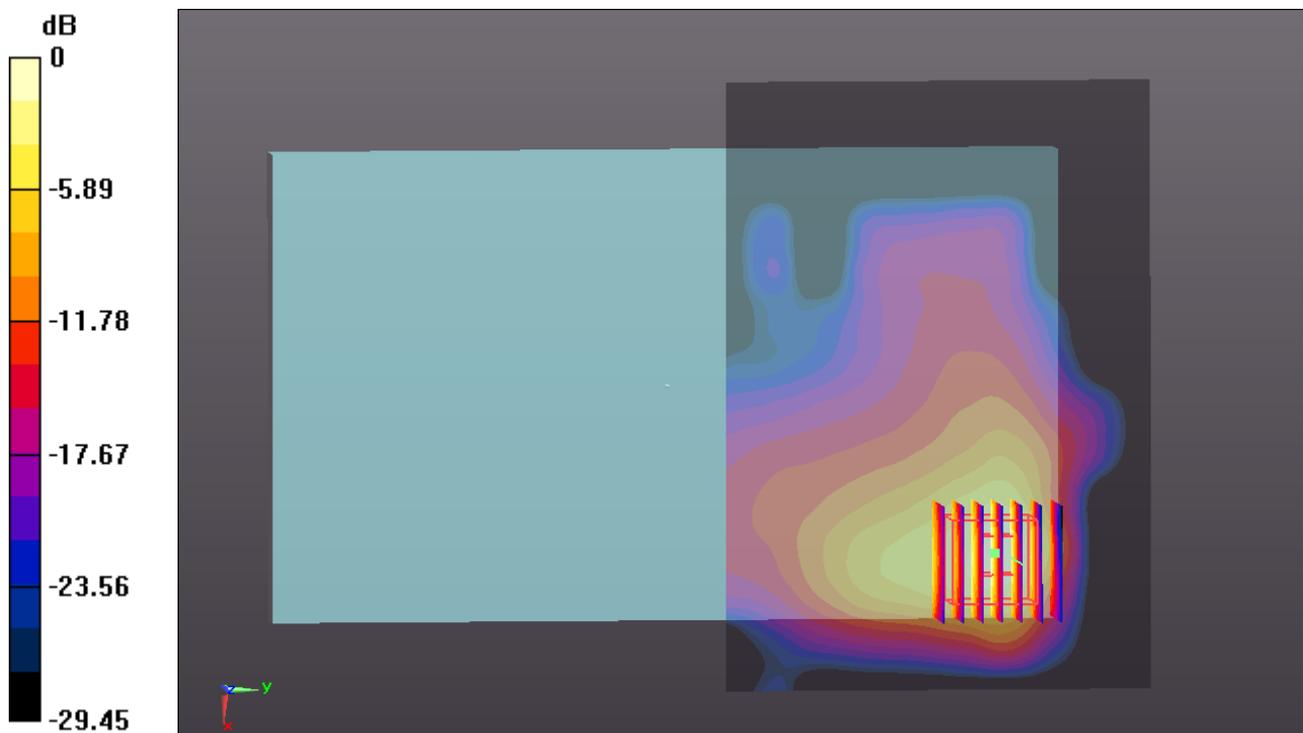

0 dB = 1.350mW/g

### #36\_WLAN2.4GHz\_802.11b\_1M\_Edge1 0cm\_Ch1

Communication System: WIFI; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: MSL\_2450\_131218 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.876$  mho/m;  $\epsilon_r =$

$51.404$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature :  $23.5$  °C ; Liquid Temperature :  $22.7$  °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7, 7, 7); Calibrated: 2013.06.20

- Sensor-Surface: 2mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19

- Phantom: SAM3; Type: SAM; Serial: TP-1079

- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch1/Area Scan (41x131x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.112 mW/g


**Ch1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.908 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.162 W/kg

**SAR(1 g) = 0.080 mW/g; SAR(10 g) = 0.037 mW/g**

Maximum value of SAR (measured) = 0.118 mW/g

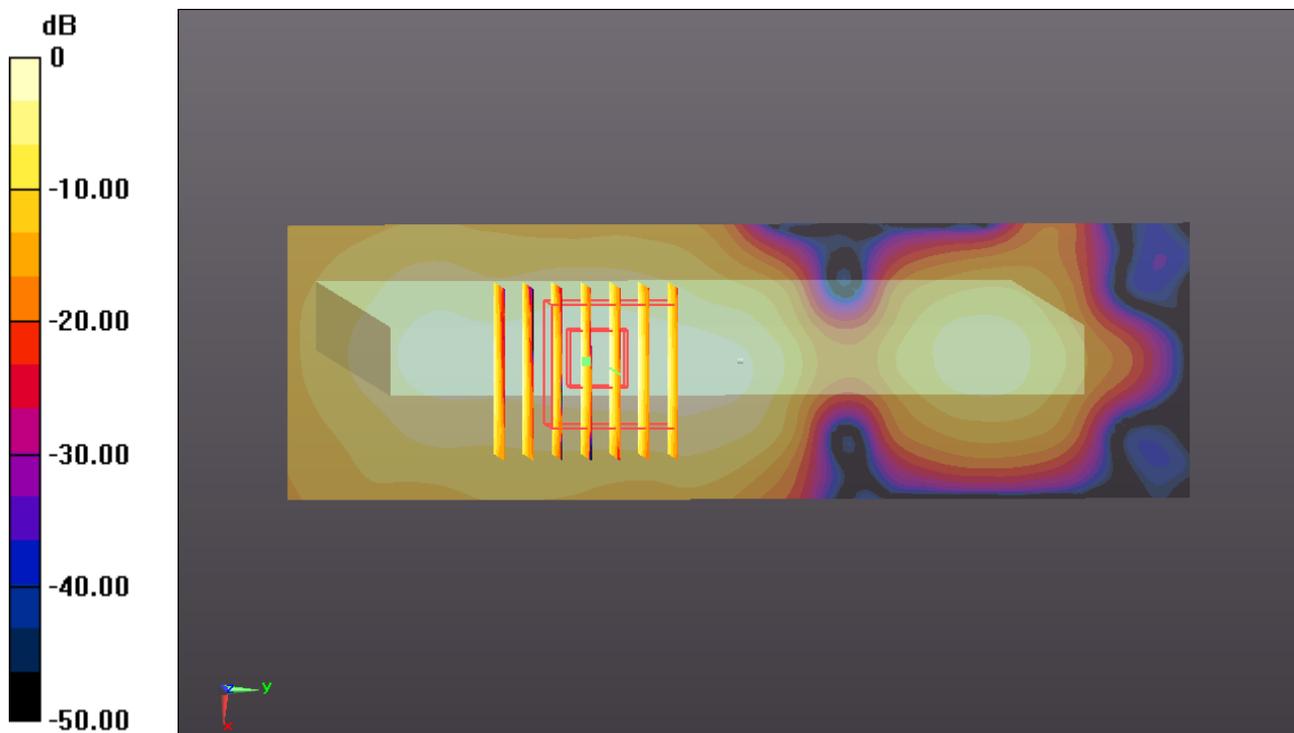

0 dB = 0.120mW/g

**#37\_WLAN2.4GHz\_802.11b\_1M\_Edge4 0cm\_Ch1**

Communication System: WIFI; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: MSL\_2450\_131218 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.876$  mho/m;  $\epsilon_r =$

$51.404$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature :  $23.5$  °C ; Liquid Temperature :  $22.7$  °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7, 7, 7); Calibrated: 2013.06.20

- Sensor-Surface: 2mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19

- Phantom: SAM3; Type: SAM; Serial: TP-1079

- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch1/Area Scan (41x191x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.357 mW/g


**Ch1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.951 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.513 W/kg

**SAR(1 g) = 0.238 mW/g; SAR(10 g) = 0.106 mW/g**

Maximum value of SAR (measured) = 0.388 mW/g

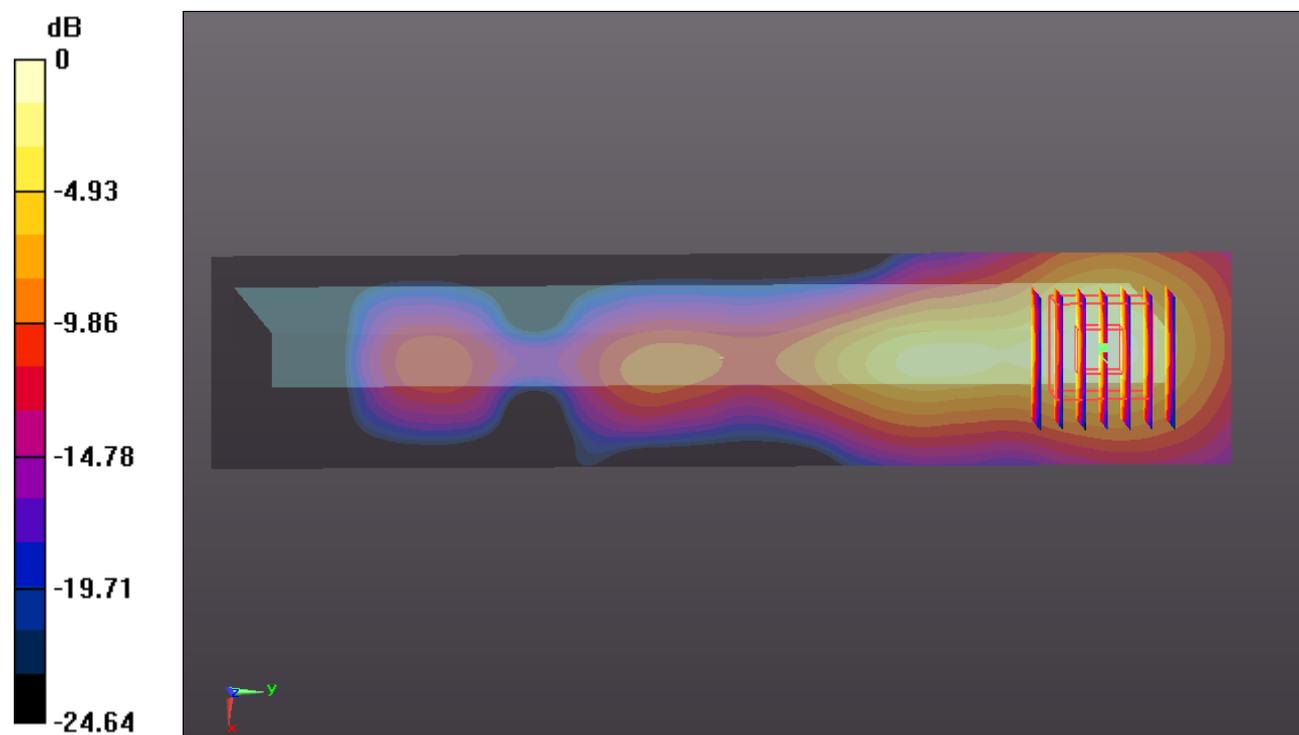

### #38\_WLAN2.4GHz\_802.11b\_1M\_Bottom Face 0cm\_Ch6

Communication System: WIFI; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: MSL\_2450\_131218 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.912$  mho/m;  $\epsilon_r =$

51.29;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7, 7, 7); Calibrated: 2013.06.20

- Sensor-Surface: 2mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19

- Phantom: SAM3; Type: SAM; Serial: TP-1079

- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch6/Area Scan (131x91x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 2.095 mW/g


**Ch6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.323 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 2.978 W/kg

**SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.433 mW/g**

Maximum value of SAR (measured) = 1.832 mW/g

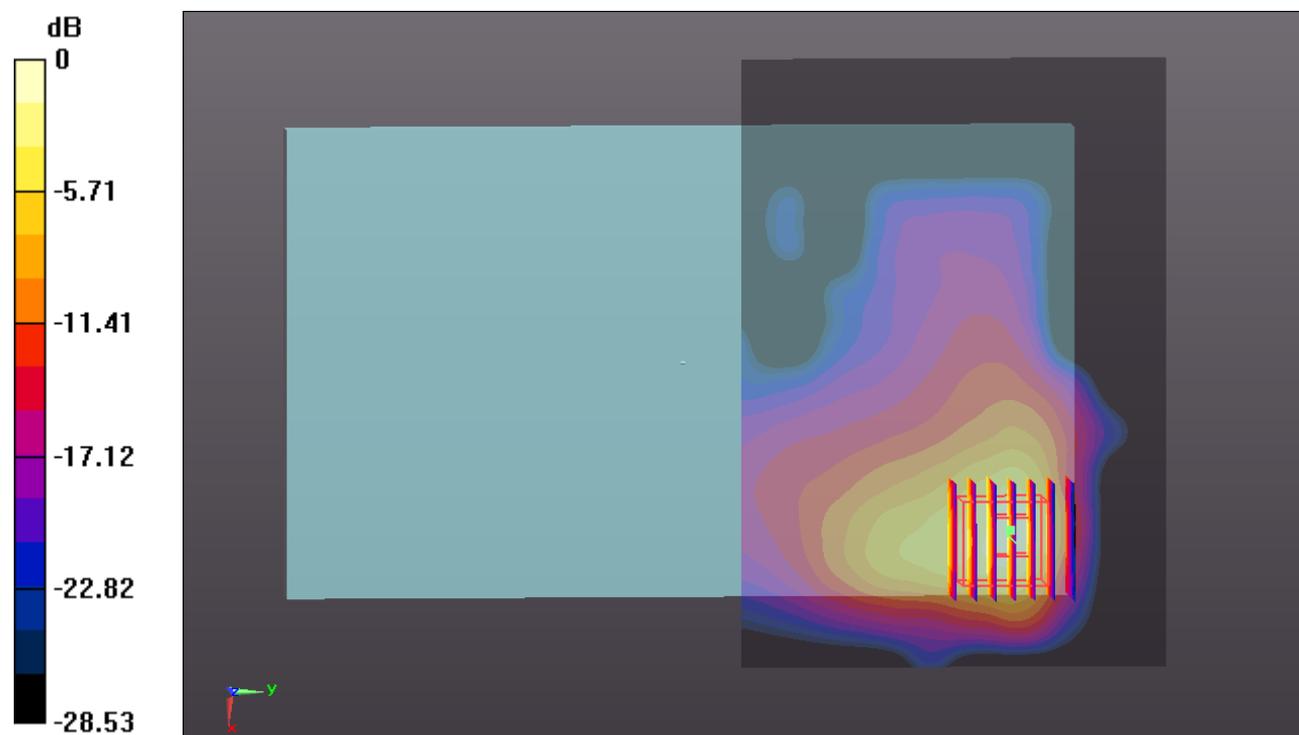

### #39\_WLAN2.4GHz\_802.11b\_1M\_Bottom Face 0cm\_Ch6\_Repeat SAR

Communication System: WIFI; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: MSL\_2450\_131218 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.912$  mho/m;  $\epsilon_r =$

51.29;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7, 7, 7); Calibrated: 2013.06.20

- Sensor-Surface: 2mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19

- Phantom: SAM3; Type: SAM; Serial: TP-1079

- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch6/Area Scan (131x91x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 2.063 mW/g


**Ch6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.309 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 2.978 W/kg

**SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.429 mW/g**

Maximum value of SAR (measured) = 1.825 mW/g

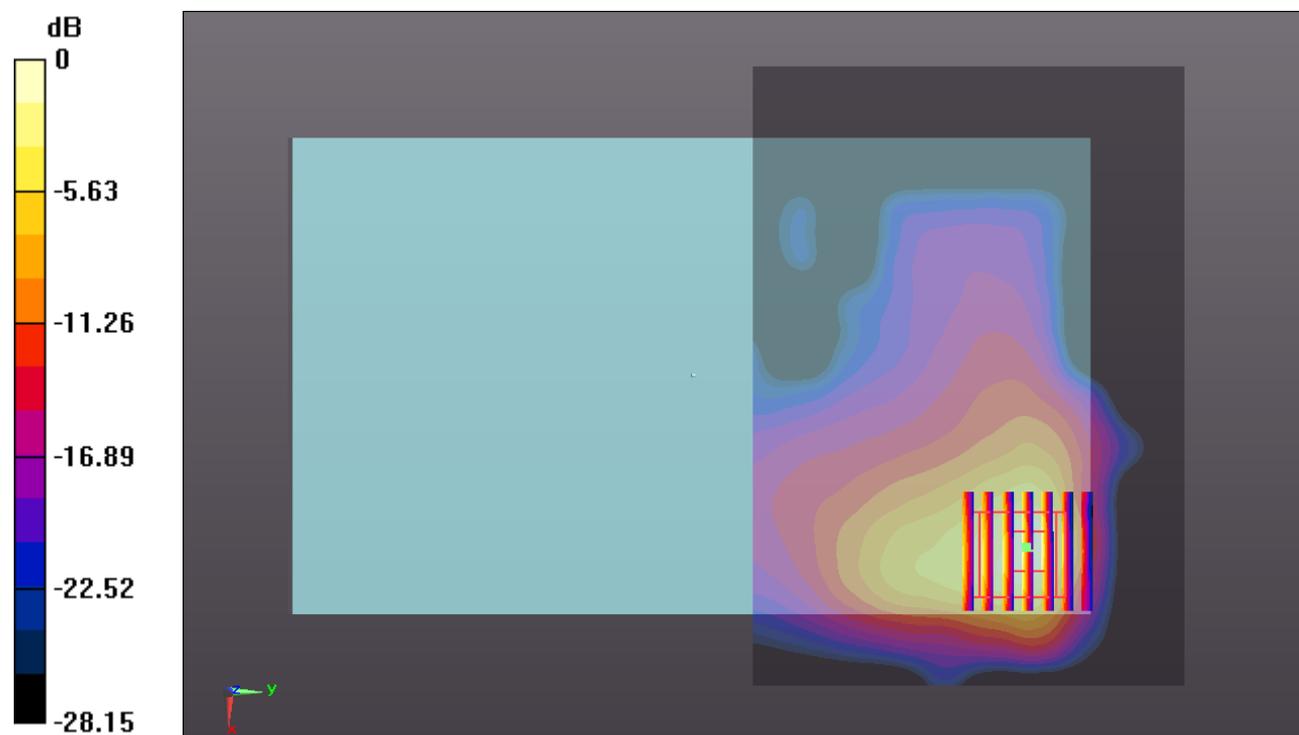

### #40\_WLAN2.4GHz\_802.11b\_1M\_Bottom Face 0cm\_Ch11

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL\_2450\_131218 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.947$  mho/m;  $\epsilon_r =$

$51.179$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7, 7, 7); Calibrated: 2013.06.20

- Sensor-Surface: 2mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1210; Calibrated: 2013.06.19

- Phantom: SAM3; Type: SAM; Serial: TP-1079

- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.4.5 (3634)

**Ch11/Area Scan (131x91x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 2.013 mW/g


**Ch11/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.836 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.820 W/kg

**SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.427 mW/g**

Maximum value of SAR (measured) = 1.740 mW/g

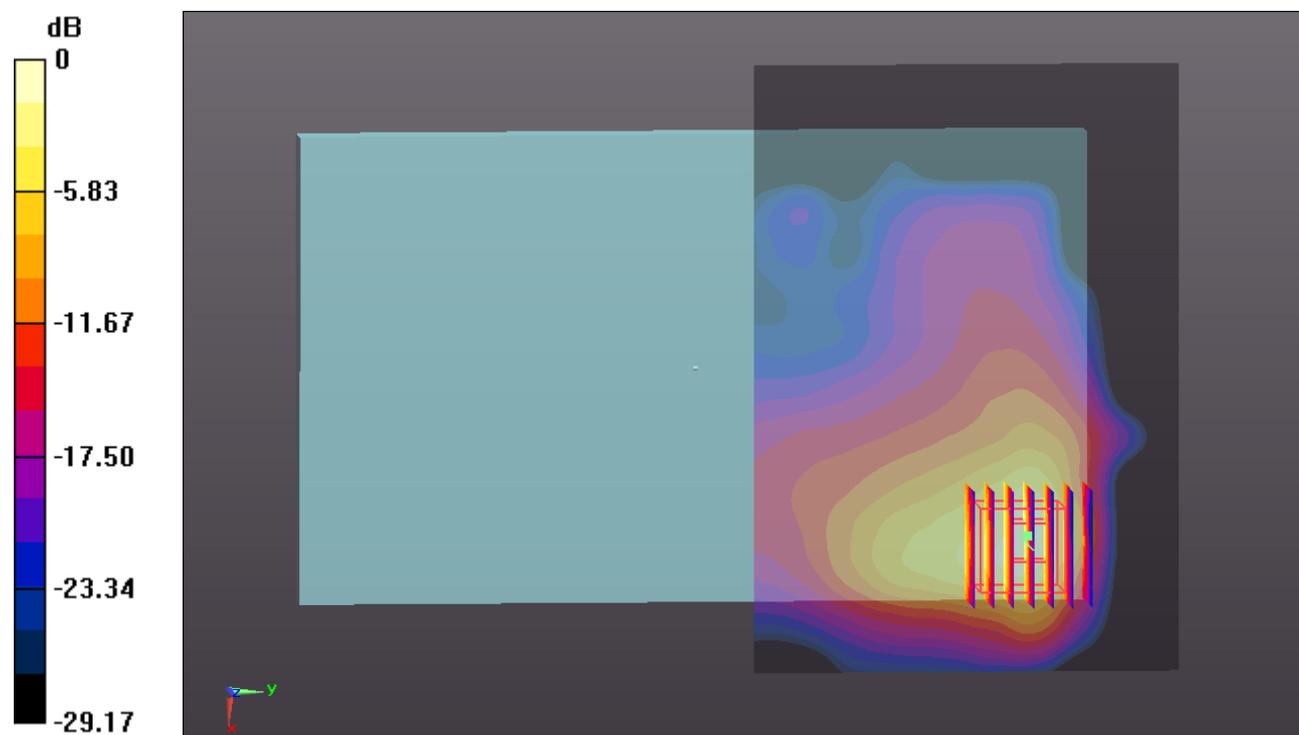

0 dB = 1.740mW/g