



# FCC Test Report

**APPLICANT** : Lenovo (Shanghai) Electronics Technology Co., Ltd.  
**EQUIPMENT** : dtab Compact  
**BRAND NAME** : NTT docomo  
**MODEL NAME** : d-42A  
**FCC ID** : O57ATHENA20L  
**STANDARD** : 47 CFR Part 15 Subpart B  
**CLASSIFICATION** : Certification

The product was received on May 09, 2020 and testing was completed on Jul. 30, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

*Jason Jia*

Reviewed by: Jason Jia / Supervisor

*James Huang*

Approved by: James Huang / Manager



**Sporton International (Kunshan) Inc.**

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1. GENERAL DESCRIPTION ..... 5**

    1.1. Applicant..... 5

    1.2. Manufacturer ..... 5

    1.3. Product Feature of Equipment Under Test ..... 5

    1.4. Product Specification of Equipment Under Test ..... 6

    1.5. Modification of EUT ..... 6

    1.6. Test Location ..... 7

    1.7. Test Software ..... 7

    1.8. Applicable Standards ..... 7

**2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 8**

    2.1. Test Mode ..... 8

    2.2. Connection Diagram of Test System ..... 10

    2.3. Support Unit used in test configuration and system ..... 11

    2.4. EUT Operation Test Setup ..... 12

**3. TEST RESULT ..... 13**

    3.1. Test of AC Conducted Emission Measurement ..... 13

    3.2. Test of Radiated Emission Measurement ..... 17

**4. LIST OF MEASURING EQUIPMENT ..... 21**

**5. UNCERTAINTY OF EVALUATION ..... 22**

**APPENDIX A. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 6.72 dB at 0.570 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 6.26 dB at 167.74 MHz

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1. General Description

## 1.1. Applicant

Lenovo (Shanghai) Electronics Technology Co., Ltd.  
Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone

## 1.2. Manufacturer

Lenovo PC HK Limited  
23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, P.R.China

## 1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	dtab Compact
Brand Name	NTT docomo
Model Name	d-42A
FCC ID	O57ATHENA20L
EUT supports Radios application	WCDMA/LTE WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE FM Receiver and GNSS
IMEI Code	Conduction: 860775040008126 for Sample 1 860775040049732 for Sample 2 Radiation: 860775040008118 for Sample 1 860775040049732 for Sample 2
HW Version	Tablet d-42A
SW Version	d-42A_RF04_200813
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx Frequency</b>	WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 38 : 2572.5 MHz ~ 2617.5 MHz LTE Band 41 : 2537.5 MHz ~ 2652.5 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz
<b>Rx Frequency</b>	WCDMA Band V: 871.4 MHz ~ 891.6 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41 : 2537.5 MHz ~ 2652.5 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz GNSS : 1559 MHz ~ 1610 MHz FM : 88 MHz ~ 108 MHz
<b>Antenna Type</b>	WWAN : FPC Antenna WLAN : FPC Antenna Bluetooth : FPC Antenna GNSS: FPC Antenna FM : External Earphone Antenna
<b>Type of Modulation</b>	WCDMA : BPSK HSPA : QPSK LTE: QPSK / 16QAM / 64QAM 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : π/4-DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK FM: FM

GNSS = GLONASS + GPS

### 1.5. Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6. Test Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International (Kunshan) Inc.		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-KS 03CH02-KS	CN1257	314309

### 1.7. Test Software

Item	Site	Manufacture	Name	Version
1.	03CH02-KS	AUDIX	E3	6.2009-8-24a
2.	CO01-KS	AUDIX	E3	6.2009-8-24

### 1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart B
- ANSI C63.4-2014

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.



## 2. Test Configuration of Equipment Under Test

### 2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: WCDMA Band V Rx (Middle) + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Earphone + Battery + Adapter With Cradle for Sample 1
	Mode 2: LTE Band 5 Rx (Low)+Bluetooth Idle+WLAN (5G) Idle+Camera(Front) + Earphone + Battery + Adapter With Cradle for Sample 1
	Mode 3: LTE Band 38 Rx + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone + Battery + Adapter With Cradle for Sample 1
	Mode 4: LTE Band 41 Rx + Bluetooth Idle + WLAN (5G) Idle + FM Rx(98MHz) + Earphone + Battery + Adapter With Cradle for Sample 1
	Mode 5: WCDMA Band V Rx (High) + Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + Earphone + Battery + USB Link With NB (Type-c Port) for Sample 1
	Mode 6: LTE Band 5 Rx (Low)+Bluetooth Idle+WLAN (5G) Idle+Camera(Front) + Earphone + Battery + USB Cable (Charging from Adapter )(Type-c Port) for Sample 1
	Mode 7: LTE Band 5 Rx (Low)+Bluetooth Idle+WLAN (5G) Idle+Camera(Front) + Earphone + Battery + Adapter With Cradle for Sample 2




Radiated Emissions	<p>Mode 1: WCDMA Band V Rx (Middle) + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Earphone + Battery + Adapter With Cradle for Sample 1</p> <p>Mode 2: LTE Band 5 Rx (Low)+Bluetooth Idle+WLAN (5G) Idle+Camera(Front) + Earphone + Battery + Adapter With Cradle for Sample 1</p> <p>Mode 3: LTE Band 38 Rx + Bluetooth Idle + WLAN (2.4G) Idle + MPEG4(Run Color Bar) + Earphone + Battery + Adapter With Cradle for Sample 1</p> <p>Mode 4: LTE Band 41 Rx + Bluetooth Idle + WLAN (5G) Idle + FM Rx(88MHz) + Earphone + Battery + Adapter With Cradle for Sample 1</p> <p>Mode 5: WCDMA Band V Rx (High) + Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + Earphone + Battery + USB Link With NB (Type-c Port) for Sample 1</p> <p>Mode 6: WCDMA Band V Rx (High) + Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + Earphone + Battery + USB Cable (Charging from Adapter )(Type-c Port) for Sample 1</p> <p>Mode 7: WCDMA Band V Rx (High) + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Front) + Earphone + Battery + USB Link With NB (Type-c Port) for Sample 2</p> <p>Mode 8: WCDMA Band V Rx (High) + Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + Earphone + Battery + USB Link With NB (Type-c Port) for Sample 2</p>
--------------------	--

**Remark:**

1. The worst case of AC is mode 2; only the test data of this mode is reported.
2. The worst case of RE is mode 8; only the test data of this mode is reported.
3. Data Link with Notebook means data application transferred mode between EUT and Notebook.
4. Pre-scanned Low/Middle/High channel for WCDMA Band V/LTE Band 5, the worst channel was recorded in this report.

## 2.2.Connection Diagram of Test System

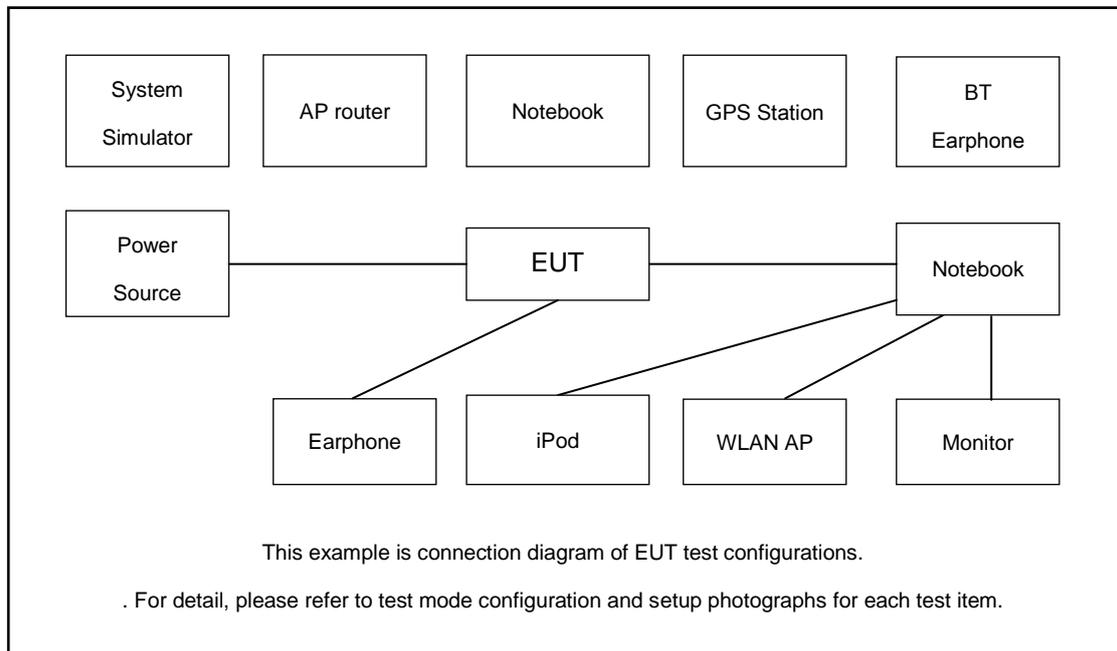

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application



### 2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritus	MT8821C	N/A	N/A	Unshielded,1.8m
2.	Base Station	R&S	CMU 200	N/A	N/A	Unshielded,1.8m
3.	LTE Base Station	Anritus	MT8820C	N/A	N/A	Unshielded,1.8m
4.	Signal Generator	R&S	SMBV100A	N/A	N/A	Unshielded,1.8m
5.	Vector Signal Generator	R&S	SMBV100A	258305	N/A	N/A
6.	WLAN AP	TP-Link	TL-WDR5600	N/A	N/A	Unshielded,1.8m
7.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
8.	Bluetooth Earphone	Xiaomi	LYEJ02LM	N/A	N/A	N/A
9.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
10.	Notebook	Lenovo	V130-141K B001	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
11.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
12.	SD Card	SanDisk	Uitra	N/A	N/A	N/A
13.	SD Card	Kingston	8GB	N/A	N/A	N/A
14.	Hard Disk	Lenovo	F310	DoC	Shielded, 1.2m	N/A
15.	Hard disk	KINGSHARE	KSP6120G	Fcc DoC	Shielded, 1.2m	N/A
16.	USB Cable	N/A	N/A	N/A	N/A	Shielded, 0.8 m
17.	Adaptor	N/A	N/A	N/A	N/A	N/A
18.	Earphone	N/A	N/A	N/A	N/A	Unshielded, 1.2 m



## **2.4. EUT Operation Test Setup**

The EUT was in WCDMA or LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on camera to capture images.
3. Turn on MPEG4 function.
4. Turn on FM receiver function to make the EUT receive continuous signals from FM station.
5. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.



### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.1.4 Test Setup

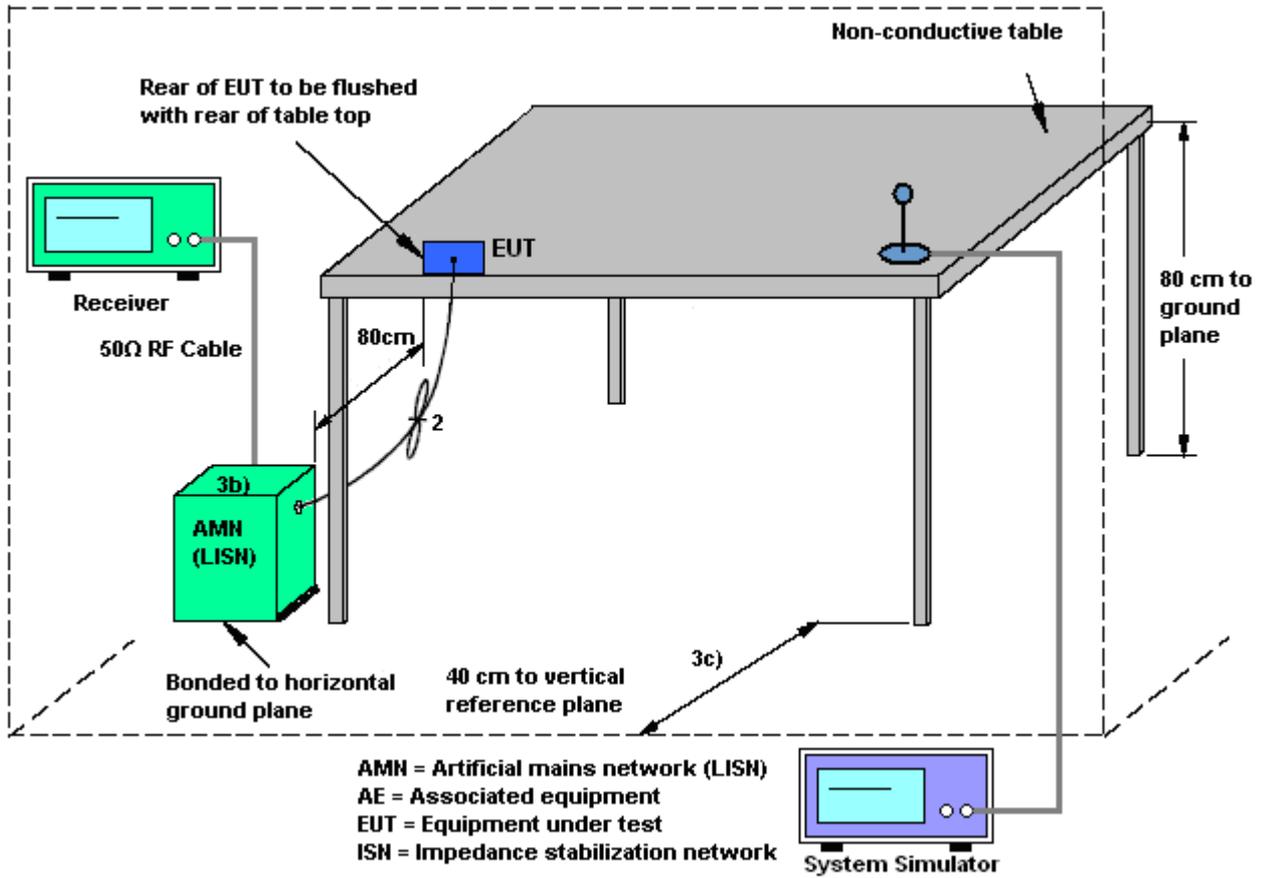




3.1.5 Test Result of AC Conducted Emission

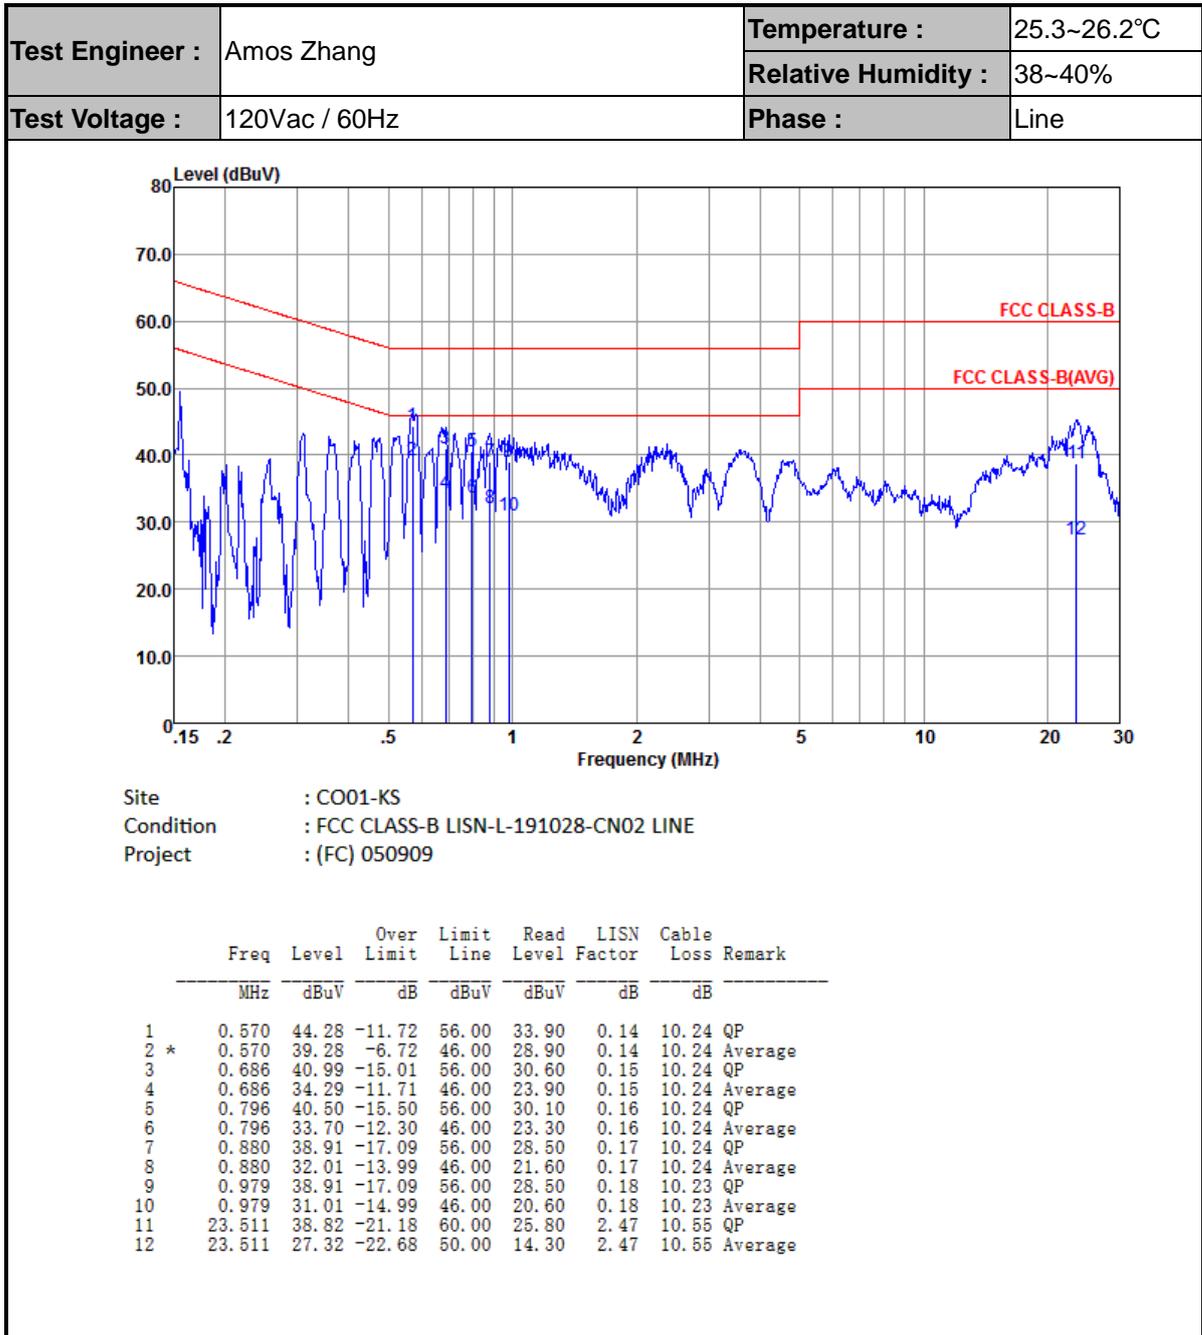



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

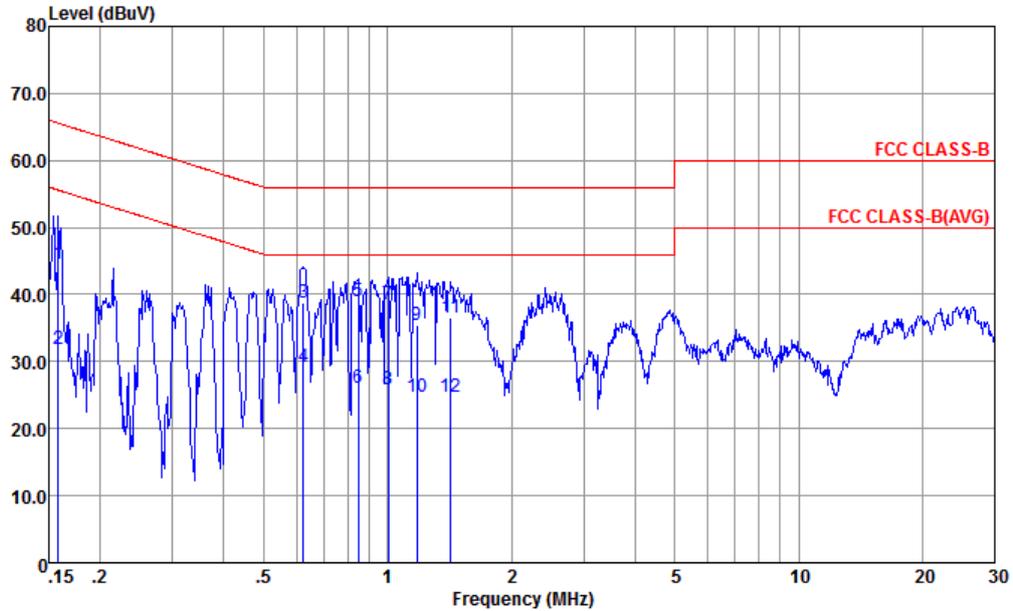

Site : CO01-KS  
 Condition : FCC CLASS-B LISN-N-191028-CN02 NEUTRAL  
 Project : (FC) 050909

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.158	44.51	-21.05	65.56	33.90	0.15	10.46	QP
2	0.158	31.81	-23.75	55.56	21.20	0.15	10.46	Average
3	0.624	38.68	-17.32	56.00	28.19	0.25	10.24	QP
4 *	0.624	29.08	-16.92	46.00	18.59	0.25	10.24	Average
5	0.848	39.01	-16.99	56.00	28.50	0.27	10.24	QP
6	0.848	26.01	-19.99	46.00	15.50	0.27	10.24	Average
7	1.005	38.62	-17.38	56.00	28.10	0.29	10.23	QP
8	1.005	25.82	-20.18	46.00	15.30	0.29	10.23	Average
9	1.178	35.48	-20.52	56.00	24.91	0.34	10.23	QP
10	1.178	24.78	-21.22	46.00	14.21	0.34	10.23	Average
11	1.426	36.44	-19.56	56.00	25.80	0.41	10.23	QP
12	1.426	24.74	-21.26	46.00	14.10	0.41	10.23	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



### 3.2. Test of Radiated Emission Measurement

#### 3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.2.2. Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

#### 3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dBµV/m) = 20 log Emission level (µV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

### 3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

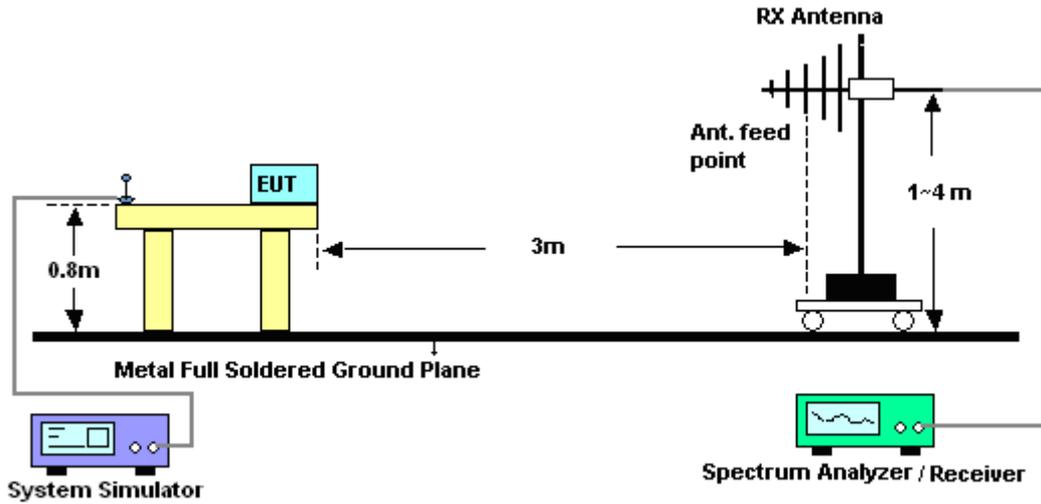


For radiated emissions above 1GHz

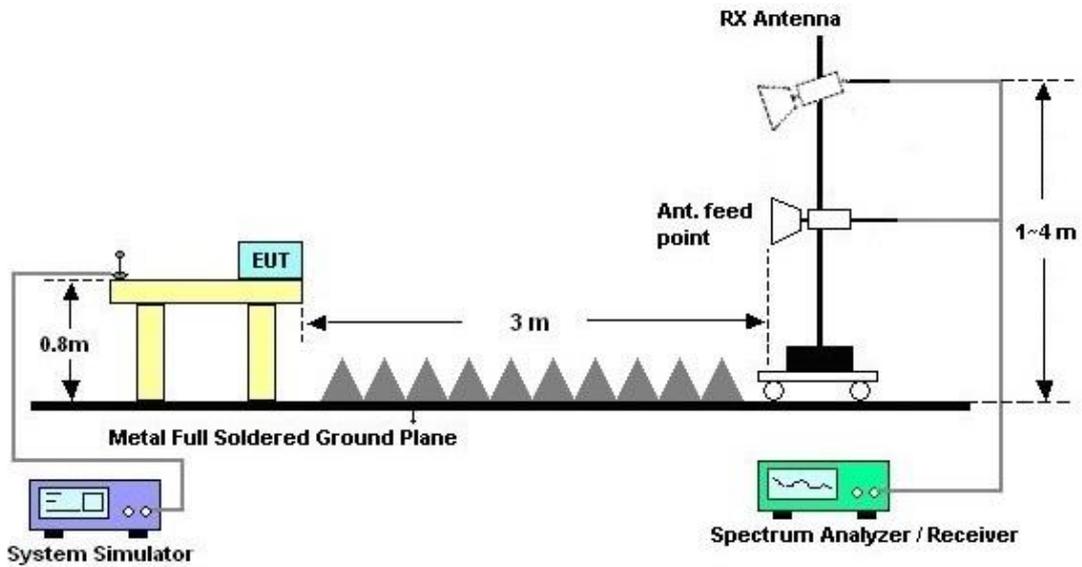



3.2.5. Test Result of Radiated Emission

Test Engineer :	Jack Guo	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal
Remark :	#7 is system simulator signal which can be ignored.		

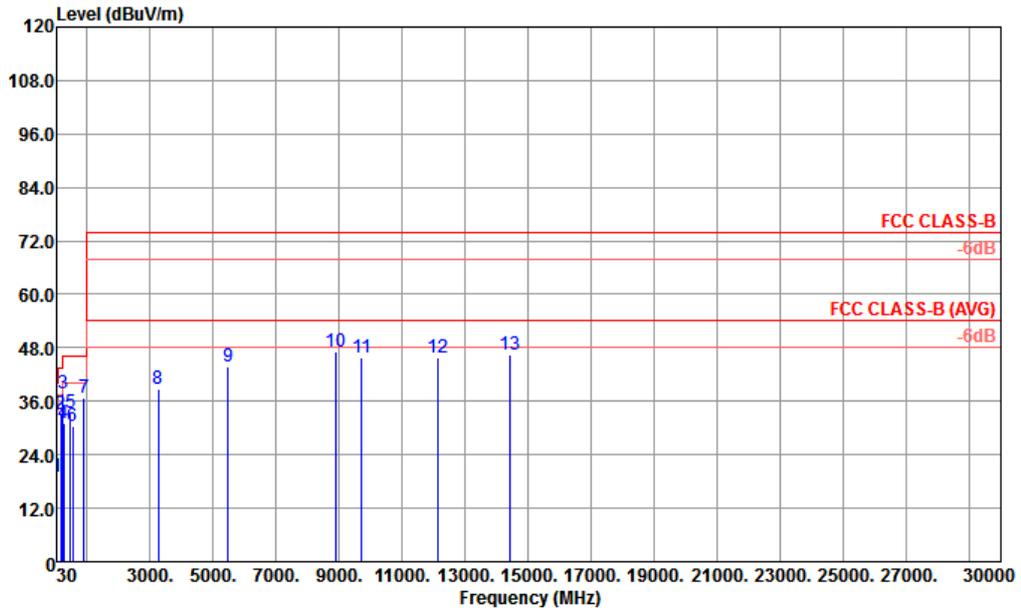


Site : 03CH02-KS  
 Condition : FCC CLASS-B 3m LF 44483-3M HORIZONTAL  
 Project : (FC)050909

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	42.61	19.12	-20.88	40.00	31.61	18.33	1.13	31.95	---	---	Peak
2	167.74	33.11	-10.39	43.50	46.61	15.86	2.57	31.93	---	---	Peak
3	232.73	37.77	-8.23	46.00	49.95	16.73	3.03	31.94	100	0	Peak
4	256.01	31.15	-14.85	46.00	40.09	19.85	3.18	31.97	---	---	Peak
5	480.08	33.48	-12.52	46.00	37.73	23.64	4.35	32.24	---	---	Peak
6	532.46	30.45	-15.55	46.00	33.27	24.91	4.58	32.31	---	---	Peak
7	891.36	36.67			33.14	29.13	5.92	31.52	---	---	Peak
8	3256.00	38.73	-35.27	74.00	26.71	32.84	12.88	33.70	---	---	Peak
9	5480.00	43.63	-30.37	74.00	25.08	34.51	16.83	32.79	---	---	Peak
10	8880.00	47.09	-26.91	74.00	23.54	36.27	21.71	34.43	---	---	Peak
11	9711.00	45.68	-28.32	74.00	20.62	36.86	22.74	34.54	---	---	Peak
12	12123.00	45.68	-28.32	74.00	16.71	38.68	25.43	35.14	---	---	Peak
13	14418.00	46.60	-27.40	74.00	14.54	39.41	28.03	35.38	---	---	Peak



Test Engineer :	Jack Guo	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical
Remark :	#7 is system simulator signal which can be ignored.		

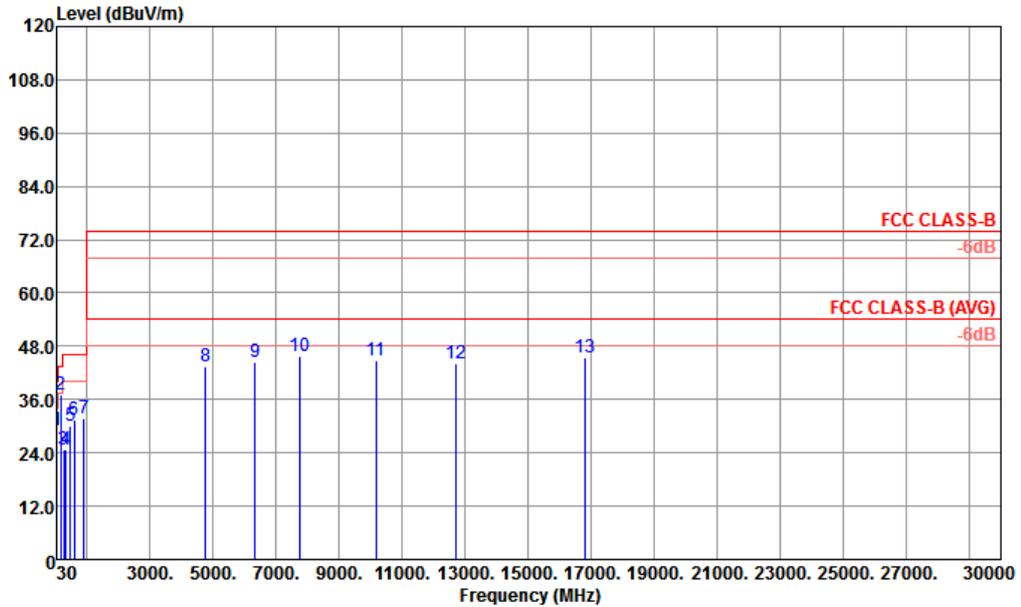

Site : 03CH02-KS  
 Condition : FCC CLASS-B 3m LF 44483-3M VERTICAL  
 Project : (FC)050909

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	
1	42.61	28.92	-11.08	40.00	41.41	18.33	1.13	31.95	---	Peak
2	167.74	37.24	-6.26	43.50	50.74	15.86	2.57	31.93	100	Peak
3	253.10	24.82	-21.18	46.00	34.20	19.43	3.16	31.97	---	Peak
4	337.49	24.69	-21.31	46.00	32.99	20.11	3.65	32.06	---	Peak
5	480.08	30.10	-15.90	46.00	34.35	23.64	4.35	32.24	---	Peak
6	599.39	31.34	-14.66	46.00	33.10	25.79	4.86	32.41	---	Peak
7	891.36	31.60			28.07	29.13	5.92	31.52	---	Peak
8	4760.00	43.41	-30.59	74.00	27.02	33.65	15.63	32.89	---	Peak
9	6328.00	44.48	-29.52	74.00	24.31	35.12	18.12	33.07	---	Peak
10	7760.00	45.83	-28.17	74.00	23.85	36.15	20.21	34.38	---	Peak
11	10170.00	44.84	-29.16	74.00	19.28	36.90	23.29	34.63	---	Peak
12	12681.00	44.28	-29.72	74.00	14.68	38.61	26.12	35.13	---	Peak
13	16794.00	45.29	-28.71	74.00	9.49	40.74	30.51	35.45	---	Peak

Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)



### 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Oct. 18, 2019	Jul. 30, 2020	Oct. 17,2020	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz-44G,MAX 30dB	Oct. 18, 2019	Jul. 30, 2020	Oct. 17, 2020	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz-1GHz	Dec. 30, 2019	Jul. 30, 2020	Dec. 29, 2020	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 10, 2019	Jul. 30, 2020	Nov. 09, 2020	Radiation (03CH02-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 10, 2019	Jul. 30, 2020	Nov. 09, 2020	Radiation (03CH02-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 08, 2020	Jul. 30, 2020	Jan. 07, 2021	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Aug. 06, 2019	Jul. 30, 2020	Aug. 05, 2020	Radiation (03CH02-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct. 18, 2019	Jul. 30, 2020	Oct.17, 2020	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Jul. 30, 2020	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Jul. 30, 2020	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Jul. 30, 2020	NCR	Radiation (03CH02-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 14, 2020	Jul. 21, 2020	Apr. 13, 2021	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 18, 2019	Jul. 21, 2020	Oct. 17, 2020	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Oct. 28, 2019	Jul. 21, 2020	Oct. 27, 2020	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 18, 2019	Jul. 21, 2020	Oct. 17, 2020	Conduction (CO01-KS)

NCR: No Calibration Required.



## 5. Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.9dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.9dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.0dB
---	-------