



FCC RF Test Report

APPLICANT : Lenovo(Shanghai) Electronics
Technology Co., Ltd.
EQUIPMENT : Portable Tablet Computer
BRAND NAME : Lenovo
MODEL NAME : TB520FU
FCC ID : O57TB520FU
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Aug. 17, 2024 ~ Sep. 04, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 6

 1.5 Modification of EUT 6

 1.6 Testing Location 7

 1.7 Test Software..... 7

 1.8 Applicable Standards..... 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Carrier Frequency and Channel 8

 2.2 Test Mode..... 9

 2.3 Connection Diagram of Test System 10

 2.4 Support Unit used in test configuration and system 11

 2.5 EUT Operation Test Setup 11

 2.6 Measurement Results Explanation Example..... 11

3 TEST RESULT 12

 3.1 6dB and 99% Bandwidth Measurement 12

 3.2 Output Power Measurement..... 13

 3.3 Power Spectral Density Measurement 20

 3.4 Conducted Band Edges and Spurious Emission Measurement 22

 3.5 Radiated Band Edges and Spurious Emission Measurement 23

 3.6 AC Conducted Emission Measurement..... 27

 3.7 Antenna Requirements 29

4 LIST OF MEASURING EQUIPMENT 30

5 MEASUREMENT UNCERTAINTY 31

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges	≤ 20dBc	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.81 dB at 2389.95 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 4.22 dB at 1.5110 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Lenovo(Shanghai) Electronics Technology Co., Ltd.

Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone

1.2 Manufacturer

Lenovo PC HK Limited

23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Portable Tablet Computer
Brand Name	Lenovo
Model Name	TB520FU
FCC ID	O57TB520FU
IMEI Code/SN	Conducted: HA21LBTJ Conduction: HA21JQA7 Radiation: 8SSP69A6R0KXHA1547R0028
HW Version	TB520FU
SW Version	TB520FU_RF01_240903
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	<MIMO ANT1+2> 802.11b : 27.18 dBm (0.5224 W) 802.11g : 27.63 dBm (0.5794 W) 802.11n HT20 : 28.15 dBm (0.6531 W) 802.11n HT40 : 26.29 dBm (0.4256 W) 802.11ax HE20 : 28.28 dBm (0.6730 W) 802.11ax HE40 : 26.45 dBm (0.4416 W) 802.11be EHT20 : 28.34 dBm (0.6823 W) 802.11be EHT40 : 26.52 dBm (0.4487 W)
99% Occupied Bandwidth	<MIMO ANT1+2> 802.11b : 13.227 MHz 802.11g : 17.662 MHz 802.11n HT20 : 18.661 MHz 802.11n HT40 : 37.403 MHz 802.11be EHT20 : 19.381 MHz 802.11be EHT40 : 38.601 MHz
Antenna Type / Gain	<ANT1> PIFA Antenna with gain -2.3 dBi <ANT2> Cavity Antenna with gain -3.0 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM) 802.11be: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM / 4096QAM)

Note:

1. The device supports WLAN MIMO CDD mode.
2. For WLAN SISO & MIMO mode, the whole testing has assessed only MIMO mode by referring to the higher normal output power.
3. For 802.11ax/11be mode, the whole testing have assessed only 802.11be EHT20/EHT40 by referring to the higher output power.
4. 802.11be support OFDMA full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) test output power, the full RU power/PSD > partial RU, therefore the full RU perform full, and partial RU verify bandedge/spurious.
5. 802.11be support OFDMA for small size RU, 52Tone + 26 Tone or 106Tone + 26Tone, test combination as below,
 - a. For Low channel, 52Tone_Index38 + 26Tone_Index1 and 106Tone_Index53 + 26Tone_Index4
 - b. For High channel, 52Tone_Index39 + 26Tone_Index7 and 106Tone_Index54 + 26Tone_Index4
6. The worse cases of RSE for partial RU and small size RU are shown in this report.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People’s Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH06-KS	AUDIX	E3	210616
3.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


MIMO Antenna

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11be EHT20 (Cover 11ax HE20)	MCS0
802.11be EHT40 (Cover 11ax HE40)	MCS0


Test Cases	
AC Conducted Emission	Mode 1 :Bluetooth Link + WLAN Link (2.4G) + USB Cable2 (Charging from Adapter2)
Remark: For Radiated Test Cases, The tests were performance with Adapter 1 and USB Cable 1.	

2.3 Connection Diagram of Test System

For AC conduction emission:

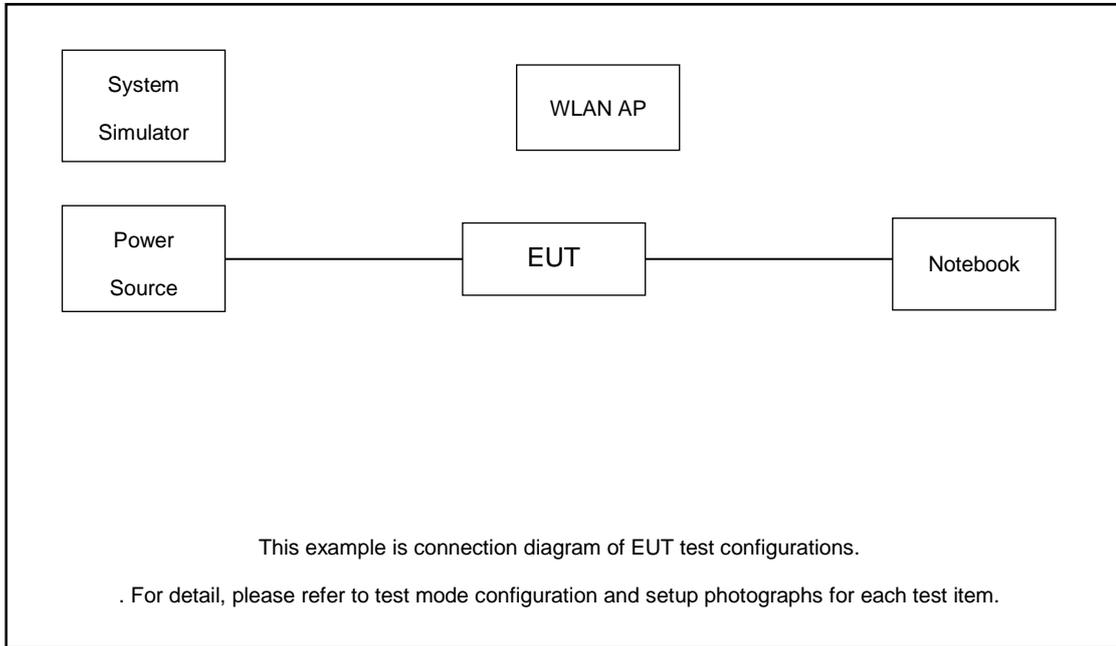

For radiated emission:

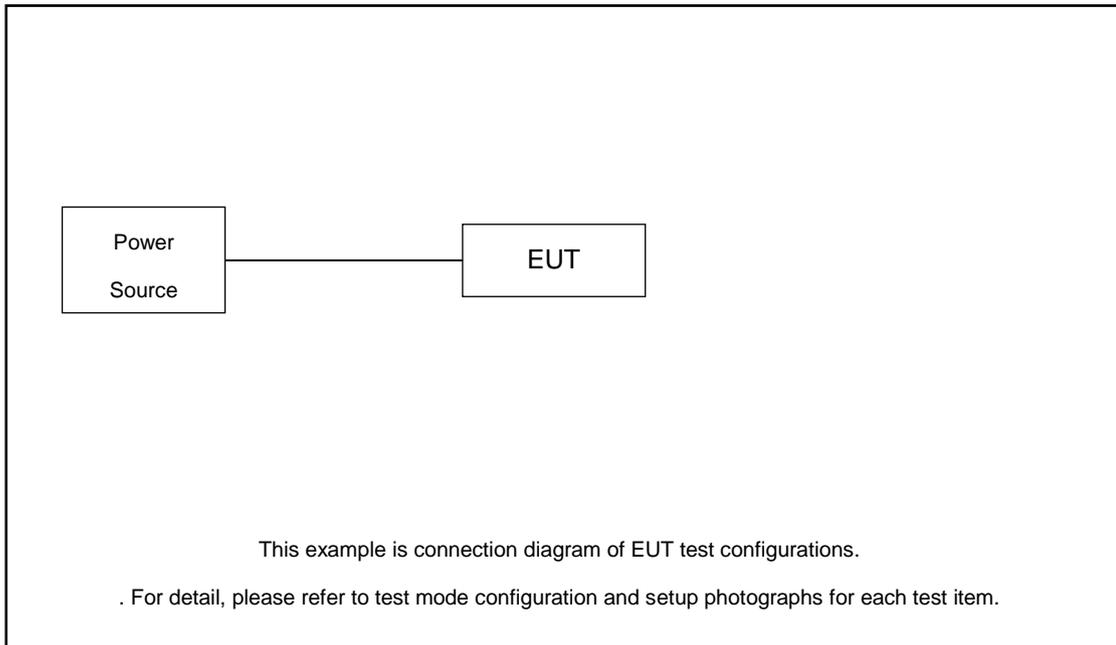

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
2.	Router	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
3.	SD Card	Kingston	8GB	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 1.92 dB and 20dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 1.92 + 20 = 21.92 (dB)

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) $\geq 3 \times \text{RBW}$. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) approximately three times the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup

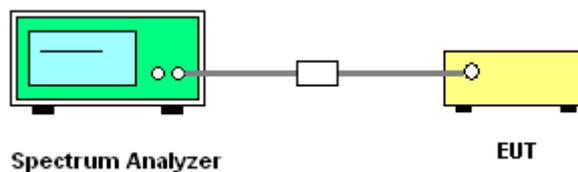

3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.2.4 Test Setup

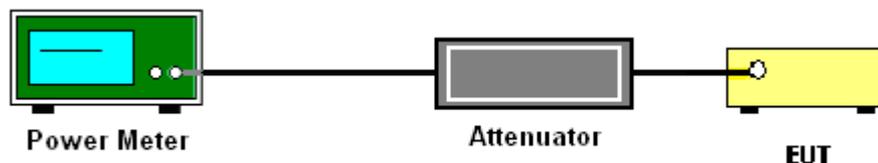



3.2.5 Test Result of Peak Output Power

2.4GHz Band MIMO																
Mod.	Data Rate	NTX	CH	Freq. (MHz)	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	2	1	2412	24.18	24.15	27.18	30.00		-2.30		24.88		36.00	Pass	
11b	1Mbps	2	6	2437	24.09	24.00	27.06	30.00		-2.30		24.76		36.00	Pass	
11b	1Mbps	2	11	2462	24.14	24.20	27.18	30.00		-2.30		24.88		36.00	Pass	
11g	6Mbps	2	1	2412	24.63	24.58	27.62	30.00		-2.30		25.32		36.00	Pass	
11g	6Mbps	2	6	2437	24.61	24.47	27.55	30.00		-2.30		25.25		36.00	Pass	
11g	6Mbps	2	11	2462	24.69	24.55	27.63	30.00		-2.30		25.33		36.00	Pass	
HT20	MCS0	2	1	2412	25.20	25.00	28.11	30.00		-2.30		25.81		36.00	Pass	
HT20	MCS0	2	6	2437	25.23	24.97	28.11	30.00		-2.30		25.81		36.00	Pass	
HT20	MCS0	2	11	2462	25.20	25.08	28.15	30.00		-2.30		25.85		36.00	Pass	
HT40	MCS0	2	3	2422	23.37	23.19	26.29	30.00		-2.30		23.99		36.00	Pass	
HT40	MCS0	2	6	2437	23.28	23.11	26.21	30.00		-2.30		23.91		36.00	Pass	
HT40	MCS0	2	9	2452	23.39	23.17	26.29	30.00		-2.30		23.99		36.00	Pass	



2.4GHz Band MIMO																	
Mod.	Data Rate	NTX	CH	Freq. (MHz)	RU Config	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
HE20	MCS0	2	1	2412	Full	25.30	25.15	28.24	30.00		-2.30		25.94		36.00	Pass	
HE20	MCS0	2	1	2412	26/0	18.13	17.92	21.04	30.00		-2.30		18.74		36.00	Pass	
HE20	MCS0	2	1	2412	52/37	20.40	20.31	23.36	30.00		-2.30		21.06		36.00	Pass	
HE20	MCS0	2	1	2412	106/53	23.21	23.05	26.14	30.00		-2.30		23.84		36.00	Pass	
HE20	MCS0	2	6	2437	Full	25.33	25.10	28.23	30.00		-2.30		25.93		36.00	Pass	
HE20	MCS0	2	11	2462	Full	25.34	25.20	28.28	30.00		-2.30		25.98		36.00	Pass	
HE20	MCS0	2	11	2462	26/8	18.47	17.94	21.22	30.00		-2.30		18.92		36.00	Pass	
HE20	MCS0	2	11	2462	52/40	20.62	20.34	23.49	30.00		-2.30		21.19		36.00	Pass	
HE20	MCS0	2	11	2462	106/54	23.12	23.03	26.09	30.00		-2.30		23.79		36.00	Pass	
HE40	MCS0	2	3	2422	Full	23.56	23.32	26.45	30.00		-2.30		24.15		36.00	Pass	
HE40	MCS0	2	6	2437	Full	23.44	23.31	26.39	30.00		-2.30		24.09		36.00	Pass	
HE40	MCS0	2	9	2452	Full	23.52	23.35	26.45	30.00		-2.30		24.15		36.00	Pass	



2.4GHz Band MIMO																	
Mod.	Data Rate	NTX	CH	Freq. (MHz)	RU Config.	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
EHT20	MCS0	2	1	2412	Full	25.38	25.22	28.31	30.00		-2.30	26.01	36.00	Pass			
EHT20	MCS0	2	1	2412	26/0	18.15	17.99	21.08	30.00		-2.30	18.78	36.00	Pass			
EHT20	MCS0	2	1	2412	52/37	20.47	20.34	23.41	30.00		-2.30	21.11	36.00	Pass			
EHT20	MCS0	2	1	2412	106/53	23.25	23.14	26.21	30.00		-2.30	23.91	36.00	Pass			
EHT20	MCS0	2	1	2412	52+26	21.93	21.81	24.88	30.00		-2.30	22.58	36.00	Pass			
EHT20	MCS0	2	1	2412	106+26	24.72	24.70	27.72	30.00		-2.30	25.42	36.00	Pass			
EHT20	MCS0	2	6	2437	Full	25.42	25.18	28.31	30.00		-2.30	26.01	36.00	Pass			
EHT20	MCS0	2	11	2462	Full	25.41	25.25	28.34	30.00		-2.30	26.04	36.00	Pass			
EHT20	MCS0	2	11	2462	26/8	18.49	17.96	21.24	30.00		-2.30	18.94	36.00	Pass			
EHT20	MCS0	2	11	2462	52/40	20.66	20.36	23.52	30.00		-2.30	21.22	36.00	Pass			
EHT20	MCS0	2	11	2462	106/54	23.15	23.11	26.14	30.00		-2.30	23.84	36.00	Pass			
EHT20	MCS0	2	11	2462	52+26	21.96	21.87	24.93	30.00		-2.30	22.63	36.00	Pass			
EHT20	MCS0	2	11	2462	106+26	25.02	24.90	27.97	30.00		-2.30	25.67	36.00	Pass			
EHT40	MCS0	2	3	2422	Full	23.61	23.40	26.52	30.00		-2.30	24.22	36.00	Pass			
EHT40	MCS0	2	6	2437	Full	23.50	23.38	26.45	30.00		-2.30	24.15	36.00	Pass			
EHT40	MCS0	2	9	2452	Full	23.57	23.43	26.51	30.00		-2.30	24.21	36.00	Pass			



3.2.6 Test Result of Average Output Power (Reporting Only)

2.4GHz Band MIMO																				
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Setting		Pass /Fail
					Ant1	Ant2	Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	2	1	2412	0.13	0.13	21.55	21.46	24.52	30.00	-2.30	Pass	36.00	22.00	Pass					
11b	1Mbps	2	6	2437	0.13	0.13	21.39	21.34	24.38	30.00	-2.30	Pass	36.00	22.00	Pass					
11b	1Mbps	2	11	2462	0.13	0.13	21.46	21.51	24.50	30.00	-2.30	Pass	36.00	22.00	Pass					
11g	6Mbps	2	1	2412	0.04	0.04	19.03	18.99	22.02	30.00	-2.30	Pass	36.00	20.00	Pass					
11g	6Mbps	2	6	2437	0.04	0.04	18.97	18.85	21.92	30.00	-2.30	Pass	36.00	20.00	Pass					
11g	6Mbps	2	11	2462	0.04	0.04	19.02	18.95	22.00	30.00	-2.30	Pass	36.00	20.00	Pass					
HT20	MCS0	2	1	2412	0.00	0.00	18.76	18.77	21.78	30.00	-2.30	Pass	36.00	20.00	Pass					
HT20	MCS0	2	6	2437	0.00	0.00	18.81	18.75	21.79	30.00	-2.30	Pass	36.00	20.00	Pass					
HT20	MCS0	2	11	2462	0.00	0.00	18.84	18.84	21.85	30.00	-2.30	Pass	36.00	20.00	Pass					
HT40	MCS0	2	3	2422	0.00	0.00	16.67	16.65	19.67	30.00	-2.30	Pass	36.00	18.00	Pass					
HT40	MCS0	2	6	2437	0.00	0.00	16.68	16.63	19.67	30.00	-2.30	Pass	36.00	18.00	Pass					
HT40	MCS0	2	9	2452	0.00	0.00	16.64	16.53	19.60	30.00	-2.30	Pass	36.00	18.00	Pass					



2.4GHz Band MIMO

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Setting		Pass /Fail		
						Ant1	Ant2	Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2		Ant1	Ant2
						HE20	MCS0	2	1	2412	Full	0.00	0.00	18.93	18.94	21.95	30.00		-2.30	19.65		36.00	36.00
HE20	MCS0	2	1	2412	26/0	0.00	0.00	11.00	11.37	14.20	30.00		-2.30	11.90	36.00	36.00	11.00			Pass			
HE20	MCS0	2	1	2412	52/37	0.00	0.00	12.81	12.80	15.82	30.00		-2.30	13.52	36.00	36.00	13.50			Pass			
HE20	MCS0	2	1	2412	106/53	0.00	0.00	15.19	15.12	18.17	30.00		-2.30	15.87	36.00	36.00	16.00			Pass			
HE20	MCS0	2	6	2437	Full	0.00	0.00	18.96	18.88	21.93	30.00		-2.30	19.63	36.00	36.00	20.00			Pass			
HE20	MCS0	2	11	2462	Full	0.00	0.00	18.95	18.98	21.98	30.00		-2.30	19.68	36.00	36.00	20.00			Pass			
HE20	MCS0	2	11	2462	26/8	0.00	0.00	10.64	10.35	13.51	30.00		-2.30	11.21	36.00	36.00	11.00			Pass			
HE20	MCS0	2	11	2462	52/40	0.00	0.00	13.01	12.82	15.93	30.00		-2.30	13.63	36.00	36.00	13.00			Pass			
HE20	MCS0	2	11	2462	106/54	0.00	0.00	15.31	15.23	18.28	30.00		-2.30	15.98	36.00	36.00	15.50			Pass			
HE40	MCS0	2	3	2422	Full	0.00	0.00	16.87	16.83	19.86	30.00		-2.30	17.56	36.00	36.00	18.00			Pass			
HE40	MCS0	2	6	2437	Full	0.00	0.00	16.84	16.77	19.82	30.00		-2.30	17.52	36.00	36.00	18.00			Pass			
HE40	MCS0	2	9	2452	Full	0.00	0.00	16.78	16.73	19.77	30.00		-2.30	17.47	36.00	36.00	18.00			Pass			



2.4GHz Band MIMO																					
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Setting		Pass /Fail
						Ant1	Ant2	Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
EHT20	MCS0	2	1	2412	Full	0.00	0.00	19.01	18.99	22.01	30.00	-2.30	19.71	36.00	20.00	Pass					
EHT20	MCS0	2	1	2412	26/0	0.00	0.00	11.08	11.40	14.25	30.00	-2.30	11.95	36.00	11.00	Pass					
EHT20	MCS0	2	1	2412	52/37	0.00	0.00	12.84	12.82	15.84	30.00	-2.30	13.54	36.00	13.50	Pass					
EHT20	MCS0	2	1	2412	106/53	0.00	0.00	15.22	15.16	18.20	30.00	-2.30	15.90	36.00	16.00	Pass					
EHT20	MCS0	2	1	2412	52+26	0.00	0.00	14.25	14.19	17.23	30.00	-2.30	14.93	36.00	15.00	Pass					
EHT20	MCS0	2	1	2412	106+26	0.00	0.00	16.77	16.67	19.73	30.00	-2.30	17.43	36.00	17.50	Pass					
EHT20	MCS0	2	6	2437	Full	0.00	0.00	19.05	18.96	22.02	30.00	-2.30	19.72	36.00	20.00	Pass					
EHT20	MCS0	2	11	2462	Full	0.00	0.00	19.03	19.04	22.05	30.00	-2.30	19.75	36.00	20.00	Pass					
EHT20	MCS0	2	11	2462	26/8	0.00	0.00	10.68	10.38	13.54	30.00	-2.30	11.24	36.00	11.00	Pass					
EHT20	MCS0	2	11	2462	52/40	0.00	0.00	13.05	12.88	15.98	30.00	-2.30	13.68	36.00	13.50	Pass					
EHT20	MCS0	2	11	2462	106/54	0.00	0.00	15.35	15.28	18.33	30.00	-2.30	16.03	36.00	16.00	Pass					
EHT20	MCS0	2	11	2462	52+26	0.00	0.00	14.33	14.27	17.31	30.00	-2.30	15.01	36.00	15.00	Pass					
EHT20	MCS0	2	11	2462	106+26	0.00	0.00	16.91	16.84	19.89	30.00	-2.30	17.59	36.00	17.50	Pass					
EHT40	MCS0	2	3	2422	Full	0.00	0.00	16.93	16.88	19.92	30.00	-2.30	17.62	36.00	18.00	Pass					
EHT40	MCS0	2	6	2437	Full	0.00	0.00	16.89	16.85	19.88	30.00	-2.30	17.58	36.00	18.00	Pass					
EHT40	MCS0	2	9	2452	Full	0.00	0.00	16.86	16.81	19.85	30.00	-2.30	17.55	36.00	18.00	Pass					



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01:

Method (b): Measure and sum spectral maxima across the outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs.

3.3.4 Test Setup

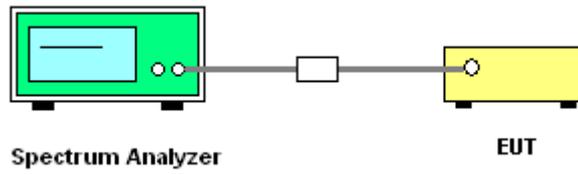

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

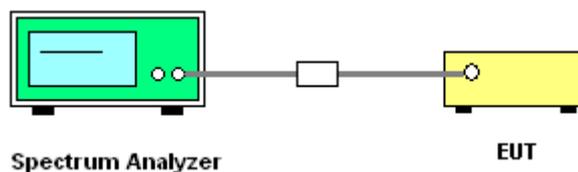

3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

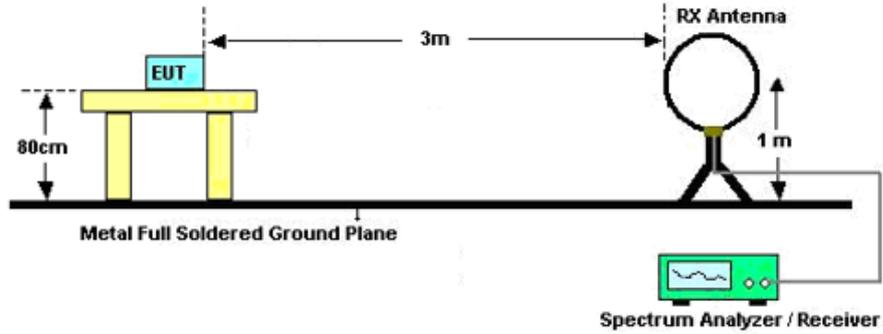

For radiated emissions from 30MHz to 1GHz

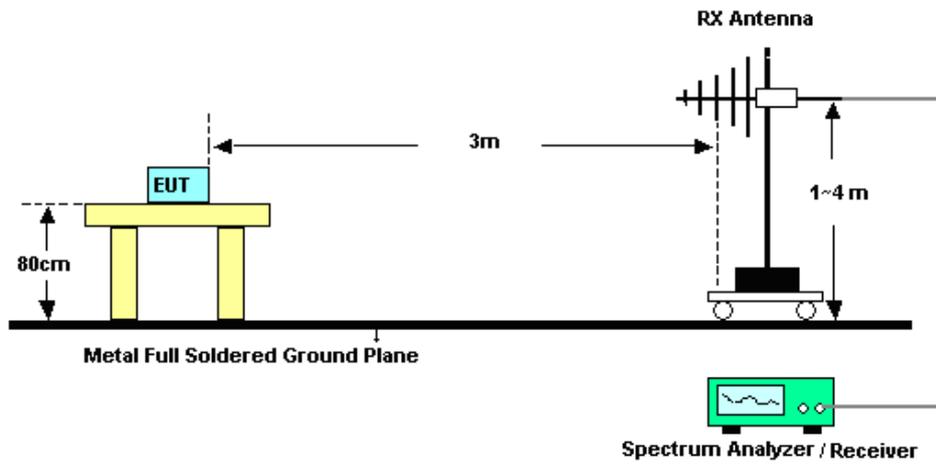

For radiated emissions above 1GHz

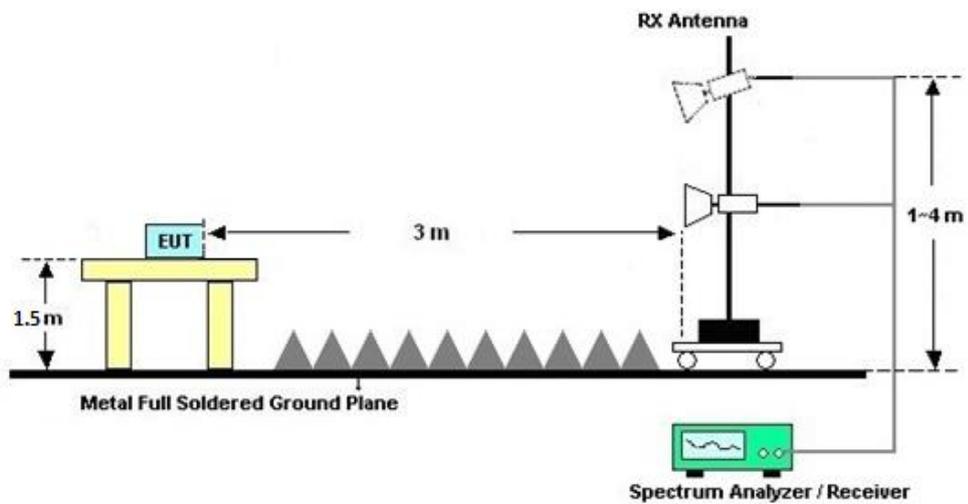



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

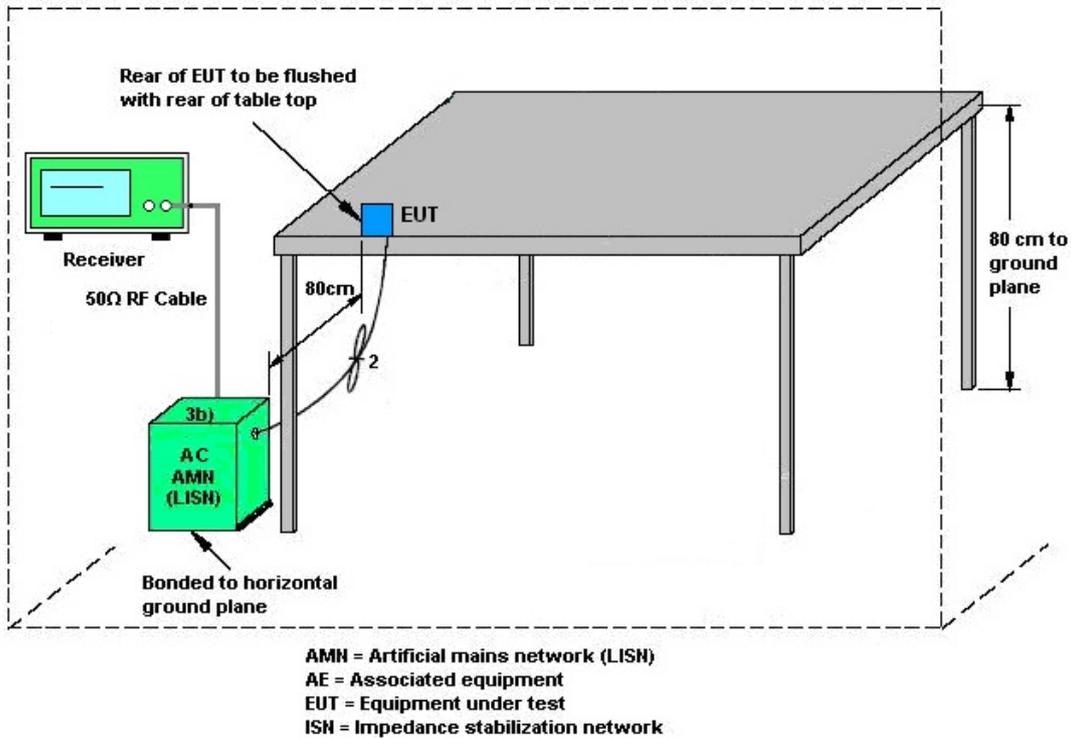

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(N_{ANT}/N_{SS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

	Ant. 1 (dBi)	Ant. 2 (dBi)	DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
2.4 GHz	-2.30	-3.00	-2.30	0.37	0.00	0.00

$Power\ Limit\ Reduction = DG(Power) - 6dBi, (min = 0)$

$PSD\ Limit\ Reduction = DG(PSD) - 6dBi, (min = 0)$



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Aug. 17, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Aug. 17, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Aug. 17, 2024	Jan. 01, 2025	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400023	3Hz~8.5GHz; Max 30dBm	Jan. 02, 2024	Aug. 30, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz~44GHz	Oct. 11, 2023	Aug. 30, 2024	Oct. 10, 2024	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	Aug. 30, 2024	Sep. 10, 2024	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz~1GHz	Dec. 06, 2023	Aug. 30, 2024	Dec. 05, 2024	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 11, 2024	Aug. 30, 2024	Apr. 10, 2025	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 06, 2024	Aug. 30, 2024	Jan. 05, 2025	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	372171	9KHz ~1GHZ	Jan. 02, 2024	Aug. 30, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Jan. 02, 2024	Aug. 30, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2082395	1Ghz-18Ghz	Jan. 02, 2024	Aug. 30, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270319	500MHz~26.5GHz	Oct. 11, 2023	Aug. 30, 2024	Oct. 10, 2024	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 30, 2024	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 30, 2024	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 30, 2024	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Sep. 04, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Sep. 04, 2024	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Sep. 04, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Sep. 04, 2024	Oct. 10, 2024	Conduction (CO01-KS)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.04ppm

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---------------------------------------------------------------------	---------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30 dB
---------------------------------------------------------------------	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.06 dB
---------------------------------------------------------------------	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.18 dB
---------------------------------------------------------------------	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.38 dB
---------------------------------------------------------------------	---------

----- THE END -----



Appendix A. Conducted Test Results



Ambient Condition: <u>25</u> °C, <u>45</u> %RH
Test Date: <u>2024.8.17</u> Test Engineer: <u>Jiang Jun</u>



DTS Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B-CDD	Ant1	2412	8.04	2408.00	2416.04	0.5	PASS
	Ant2	2412	8.04	2408.00	2416.04	0.5	PASS
	Ant1	2437	8.04	2433.00	2441.04	0.5	PASS
	Ant2	2437	8.08	2433.00	2441.08	0.5	PASS
	Ant1	2462	8.04	2458.00	2466.04	0.5	PASS
	Ant2	2462	7.60	2458.44	2466.04	0.5	PASS
11G-CDD	Ant1	2412	16.32	2403.88	2420.20	0.5	PASS
	Ant2	2412	16.36	2403.84	2420.20	0.5	PASS
	Ant1	2437	16.36	2428.84	2445.20	0.5	PASS
	Ant2	2437	16.36	2428.84	2445.20	0.5	PASS
	Ant1	2462	16.36	2453.84	2470.20	0.5	PASS
	Ant2	2462	16.36	2453.84	2470.20	0.5	PASS
11N20MIMO	Ant1	2412	17.64	2403.20	2420.84	0.5	PASS
	Ant2	2412	17.64	2403.20	2420.84	0.5	PASS
	Ant1	2437	17.60	2428.24	2445.84	0.5	PASS
	Ant2	2437	17.60	2428.24	2445.84	0.5	PASS
	Ant1	2462	17.60	2453.24	2470.84	0.5	PASS
	Ant2	2462	17.56	2453.24	2470.80	0.5	PASS
11N40MIMO	Ant1	2422	36.40	2403.84	2440.24	0.5	PASS
	Ant2	2422	36.40	2403.84	2440.24	0.5	PASS
	Ant1	2437	36.40	2418.84	2455.24	0.5	PASS
	Ant2	2437	36.40	2418.84	2455.24	0.5	PASS
	Ant1	2452	36.32	2433.84	2470.16	0.5	PASS
	Ant2	2452	36.32	2433.84	2470.16	0.5	PASS
11BE20MIMO	Ant1	2412	18.96	2402.56	2421.52	0.5	PASS
	Ant2	2412	19.00	2402.56	2421.56	0.5	PASS
	Ant1	2437	18.96	2427.52	2446.48	0.5	PASS
	Ant2	2437	18.96	2427.56	2446.52	0.5	PASS
	Ant1	2462	19.00	2452.52	2471.52	0.5	PASS
	Ant2	2462	19.00	2452.52	2471.52	0.5	PASS
11BE40MIMO	Ant1	2422	38.16	2403.04	2441.20	0.5	PASS
	Ant2	2422	38.00	2403.20	2441.20	0.5	PASS
	Ant1	2437	38.08	2417.96	2456.04	0.5	PASS
	Ant2	2437	38.00	2418.04	2456.04	0.5	PASS
	Ant1	2452	38.24	2432.88	2471.12	0.5	PASS
	Ant2	2452	38.16	2432.88	2471.04	0.5	PASS




Test Graphs

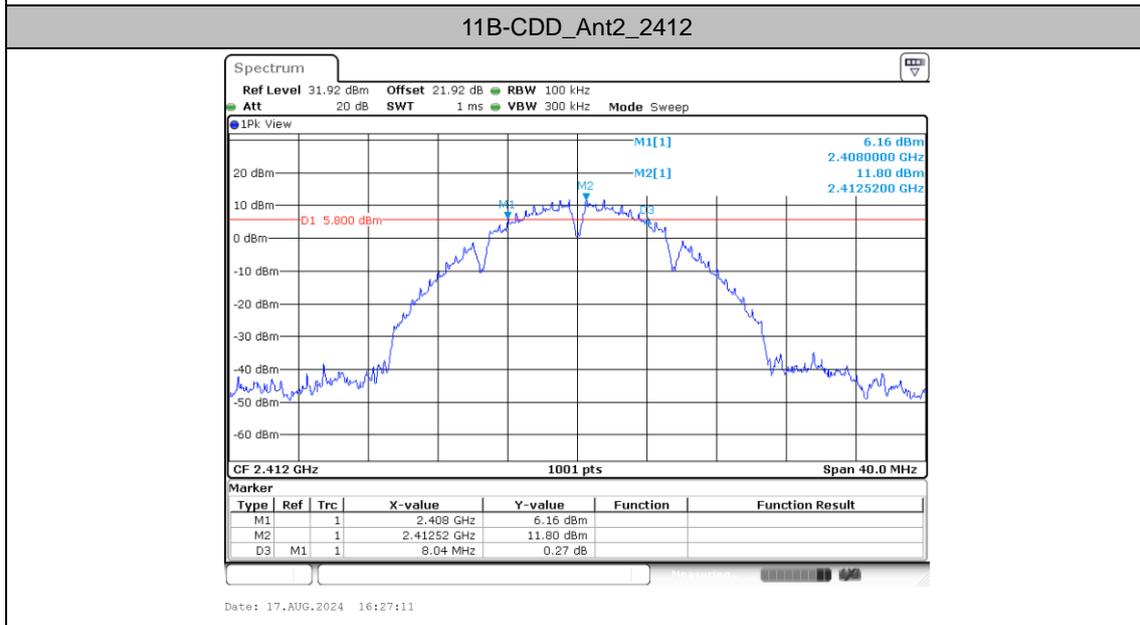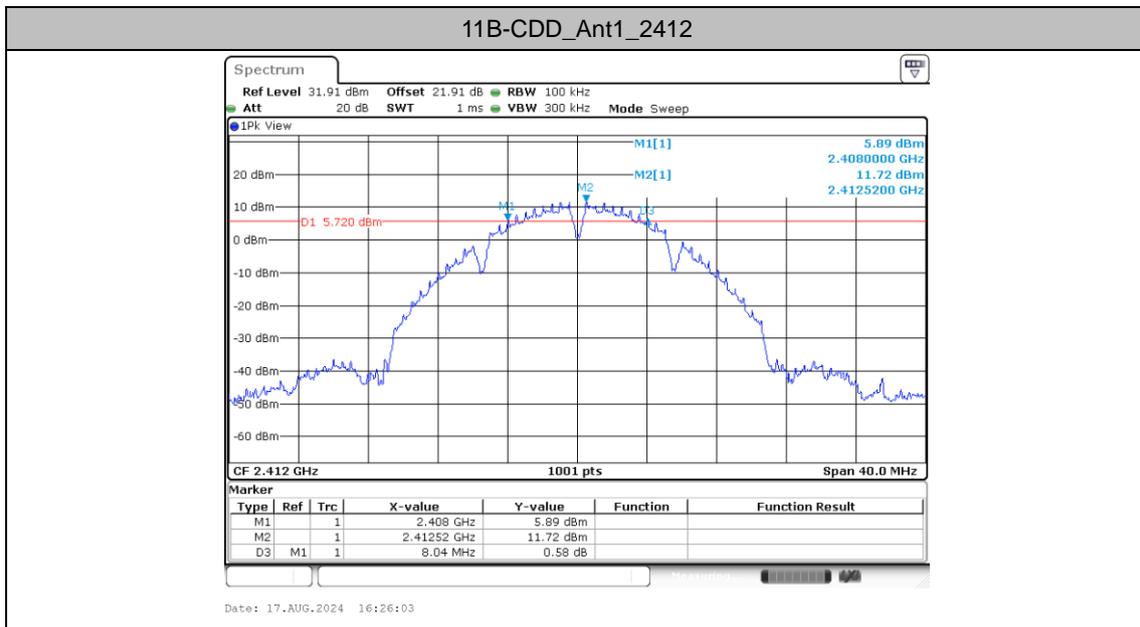





11B-CDD_Ant1_2437

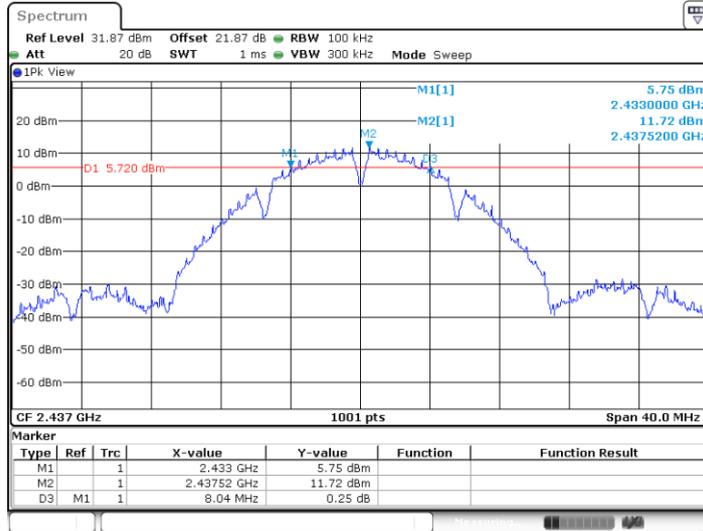


11B-CDD_Ant2_2437

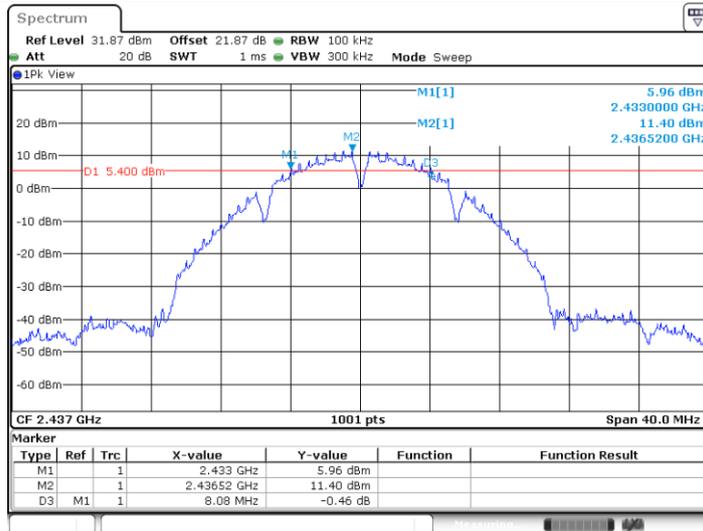

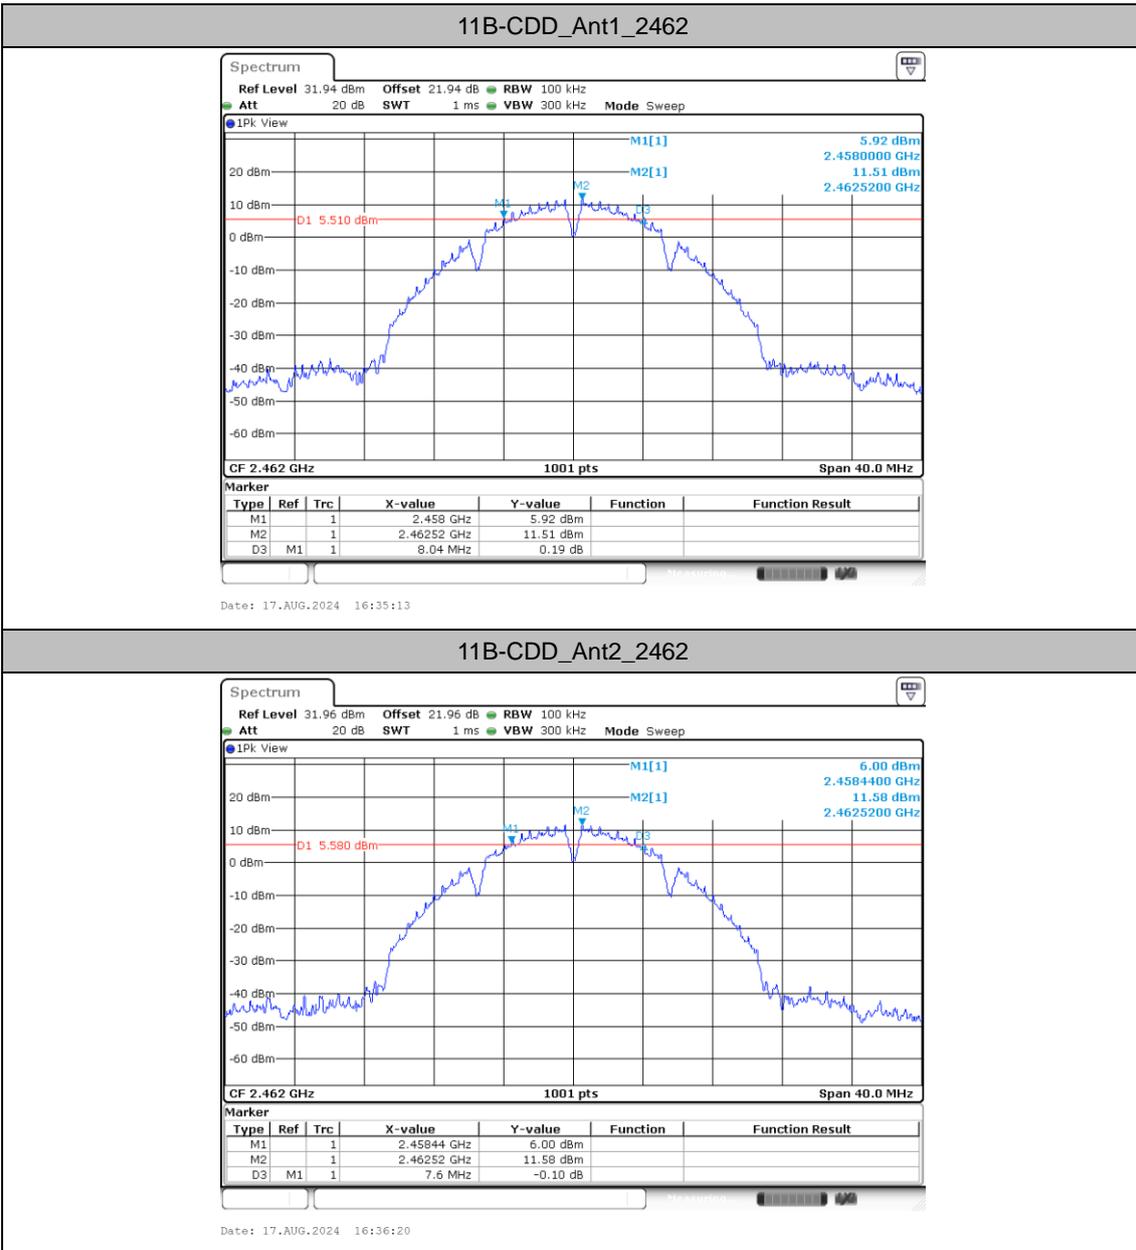

11B-CDD_Ant2_2462




11G-CDD_Ant1_2412

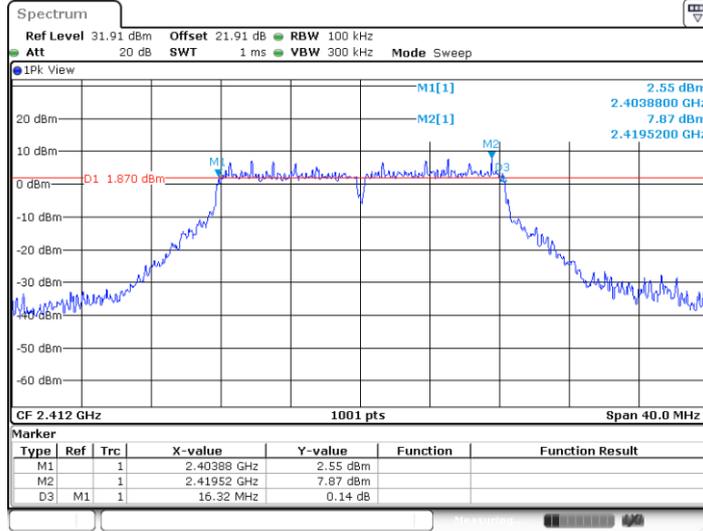


11G-CDD_Ant2_2412

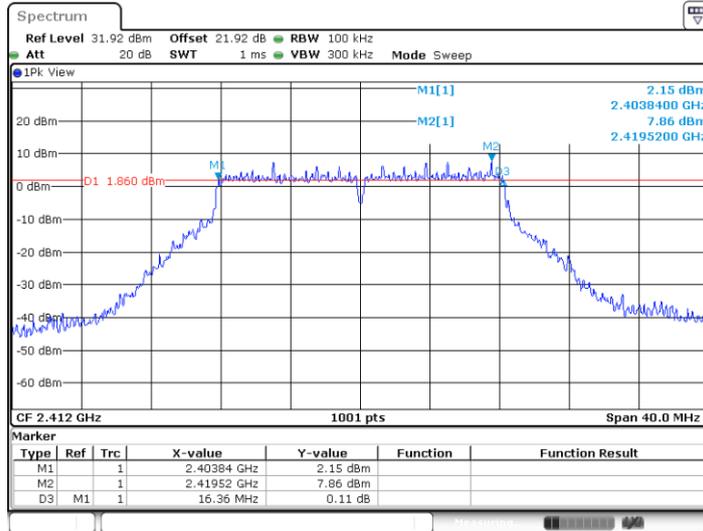

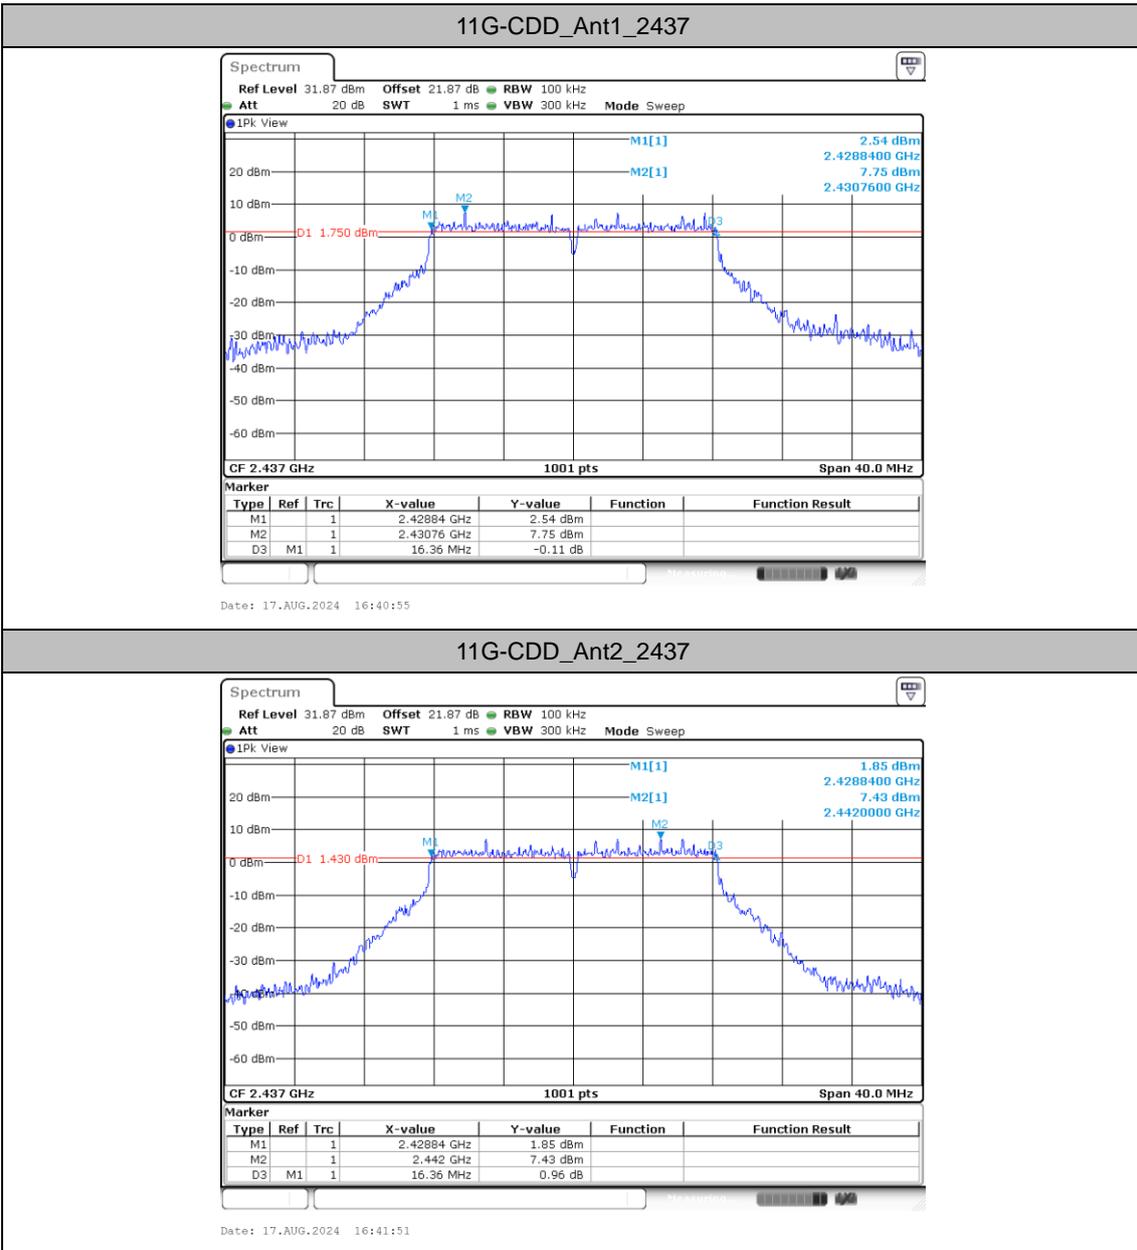

11G-CDD_Ant2_2437




11G-CDD_Ant1_2462

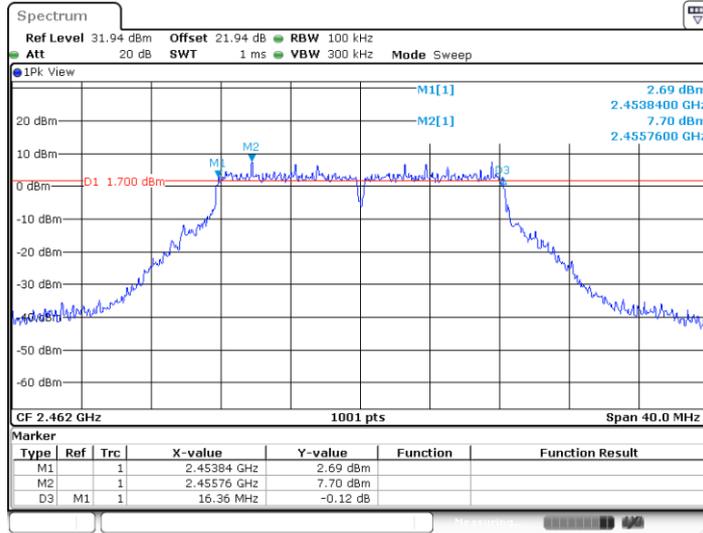


11G-CDD_Ant2_2462

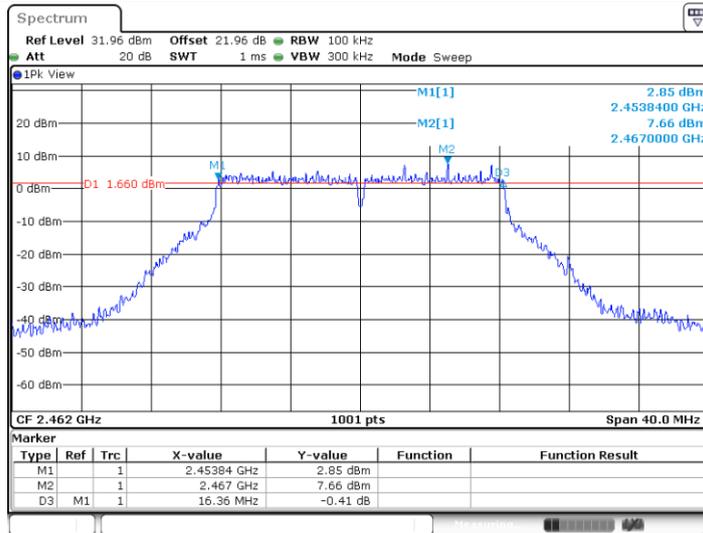

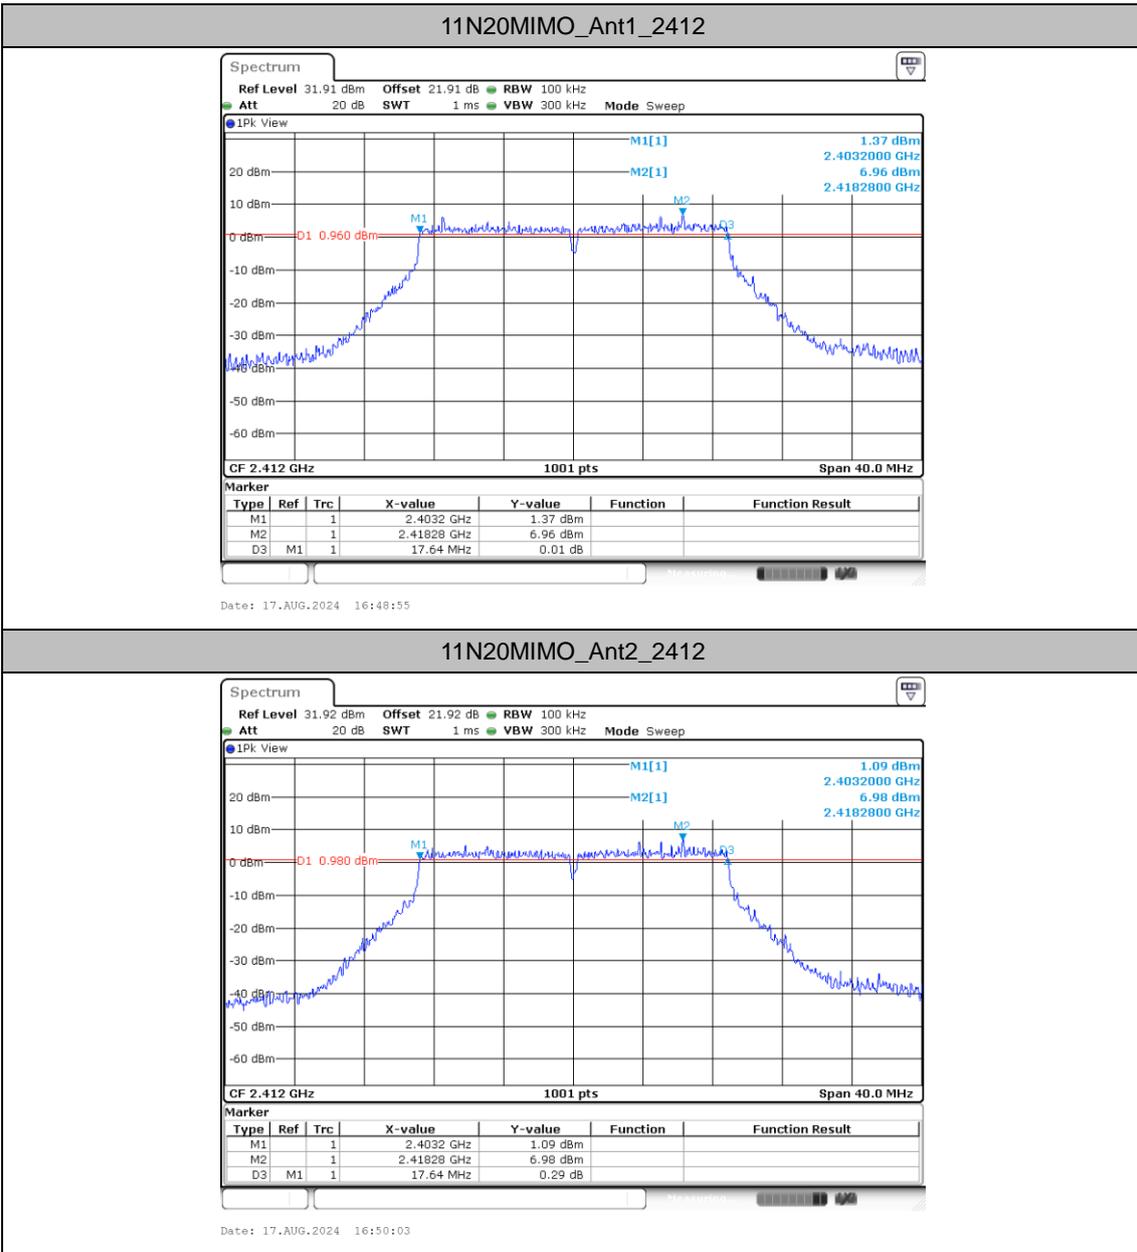





11N20MIMO_Ant1_2437

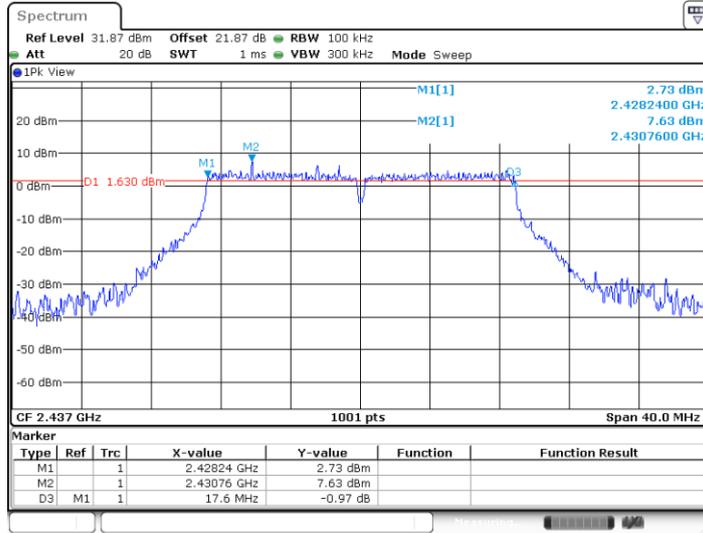


11N20MIMO_Ant2_2437

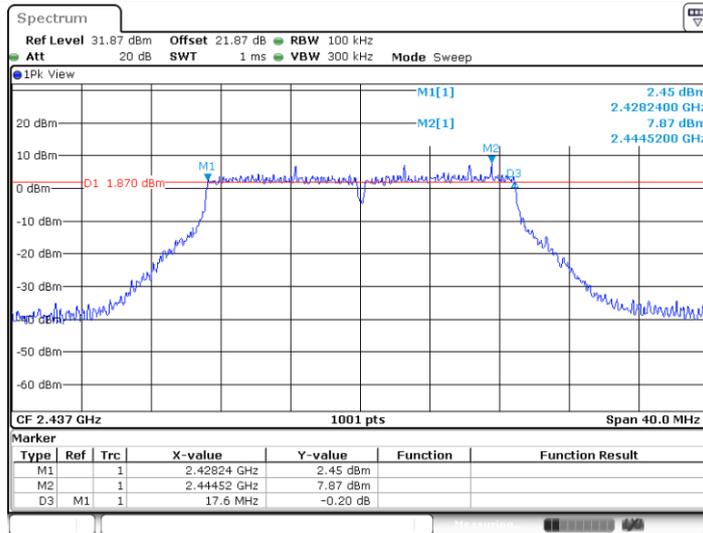

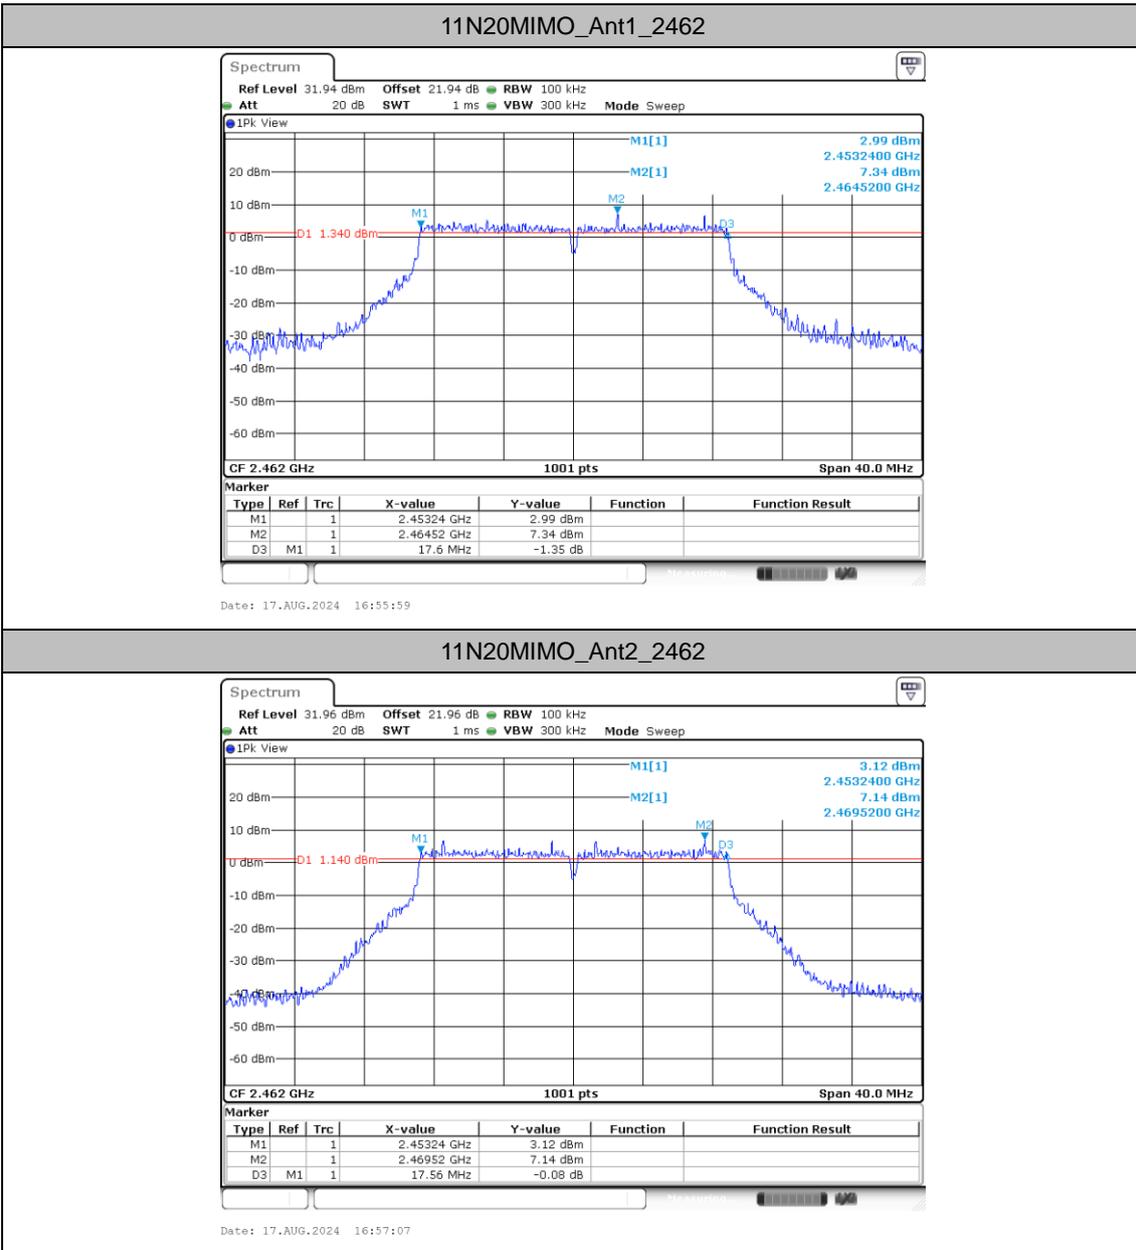




11N40MIMO_Ant1_2422

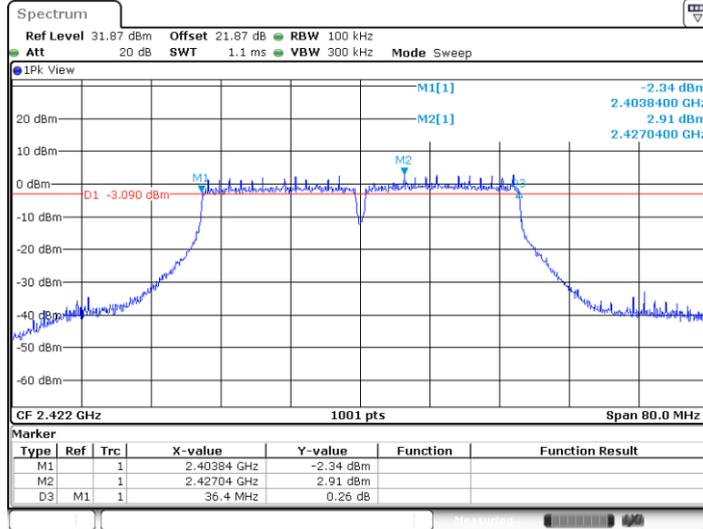


11N40MIMO_Ant2_2422

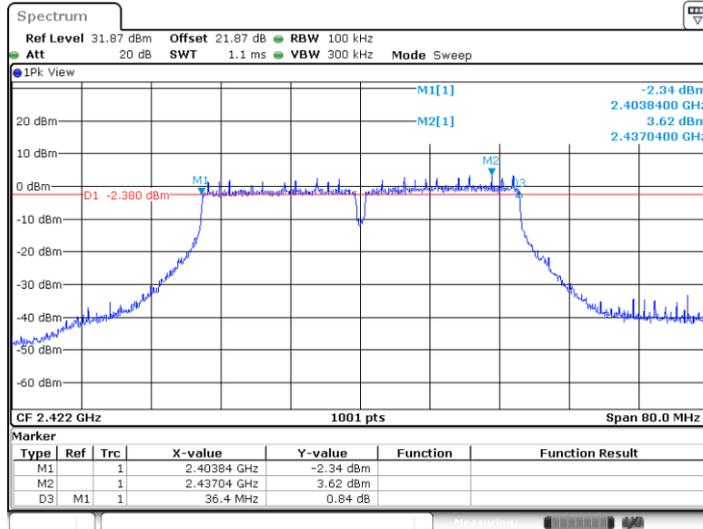




11N40MIMO_Ant1_2437

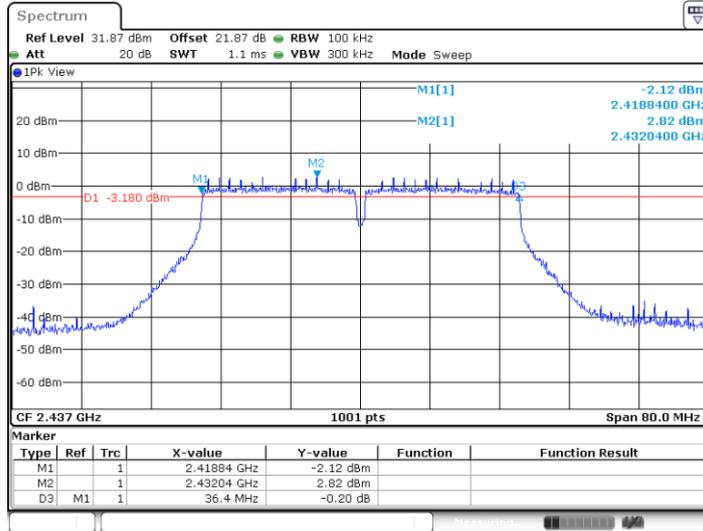


11N40MIMO_Ant2_2437

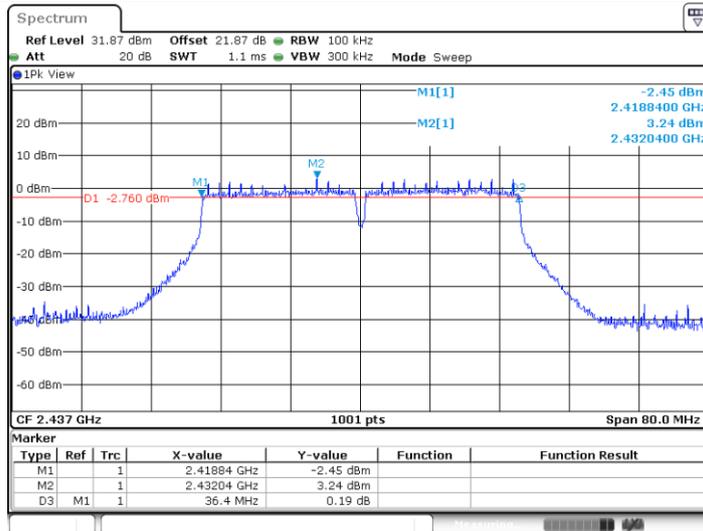






11N40MIMO_Ant1_2452

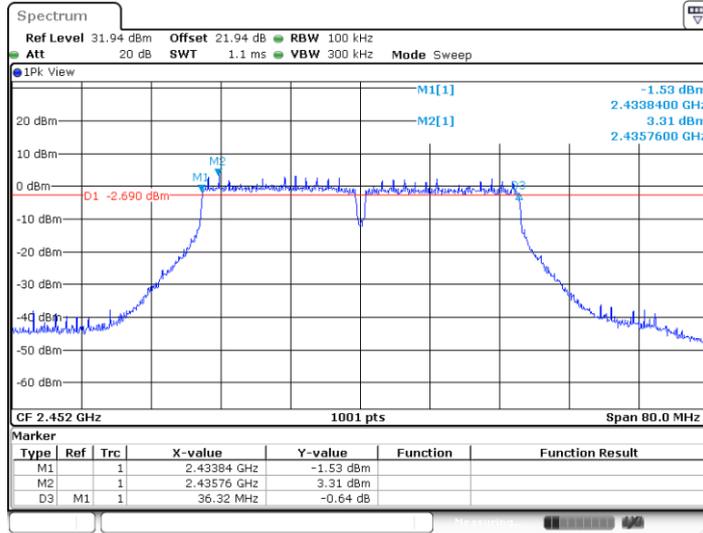


11N40MIMO_Ant2_2452

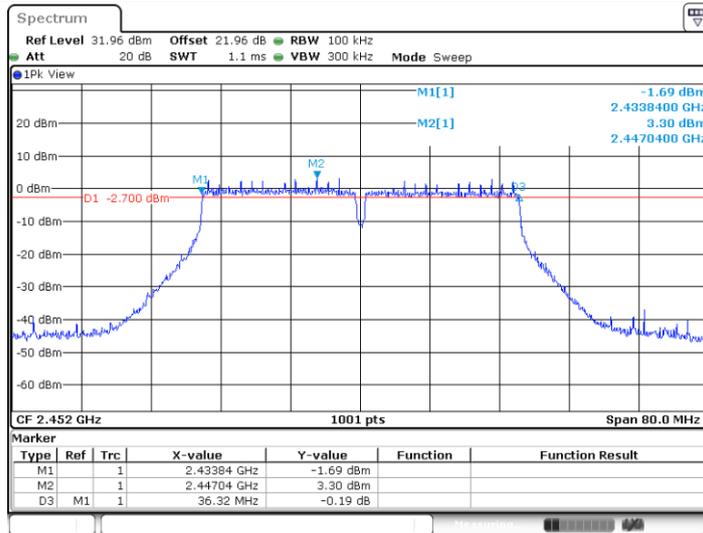

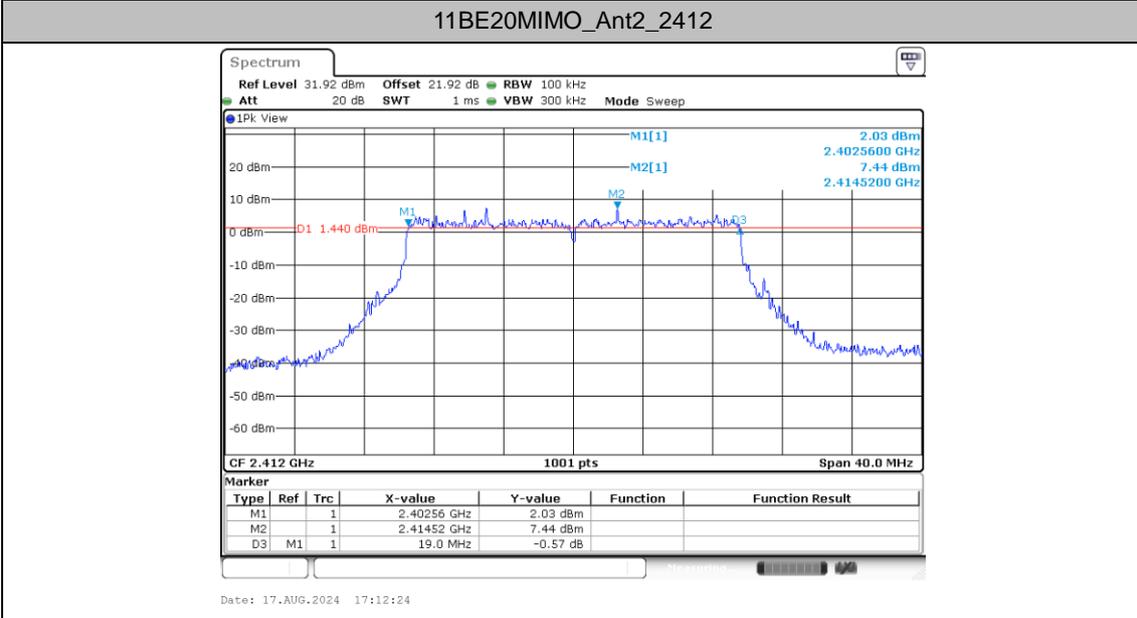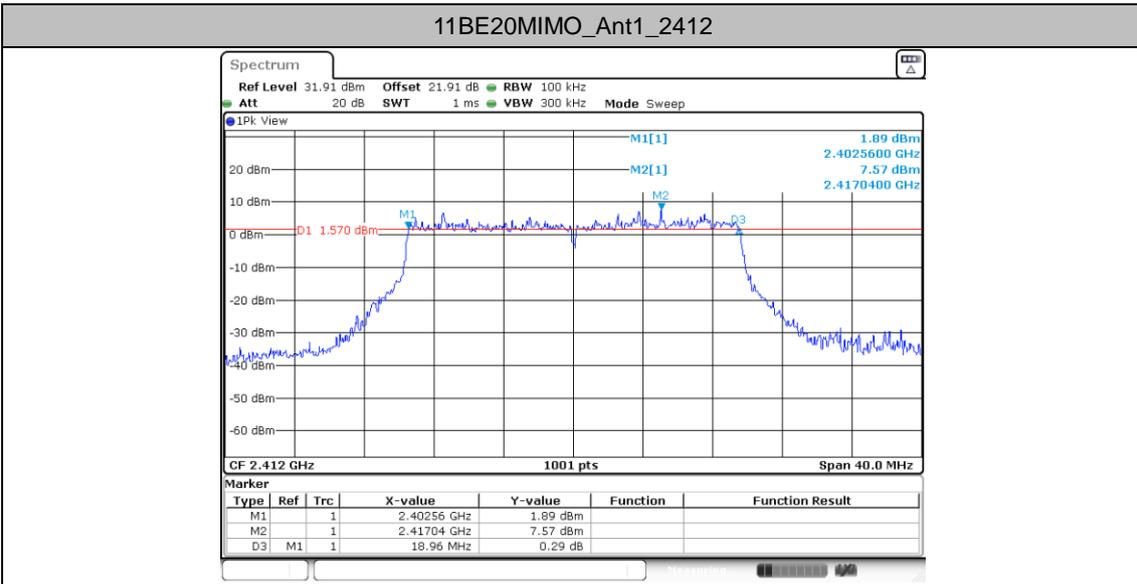




11BE20MIMO_Ant1_2437

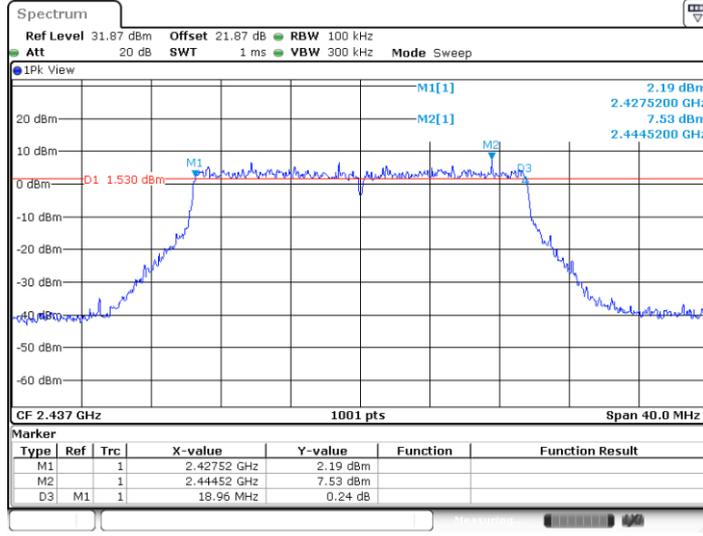


11BE20MIMO_Ant2_2437

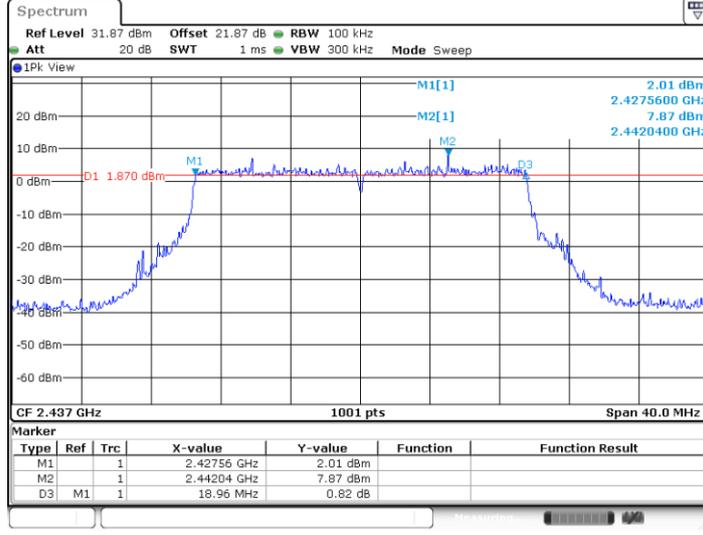




11BE20MIMO_Ant1_2462

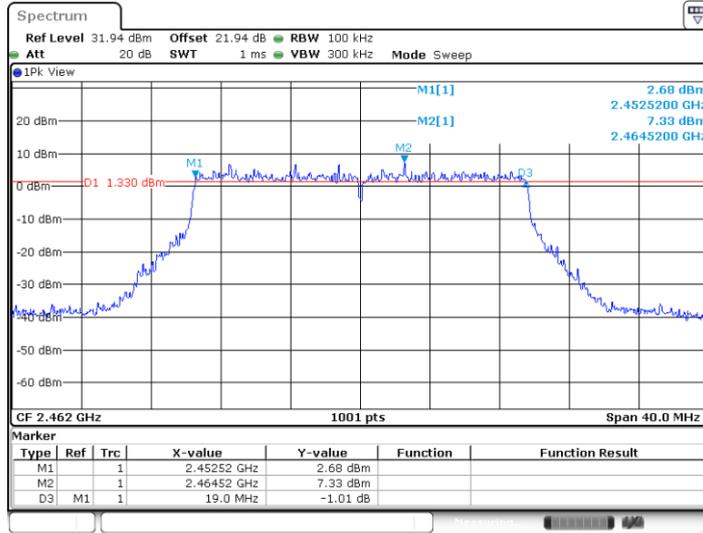


11BE20MIMO_Ant2_2462

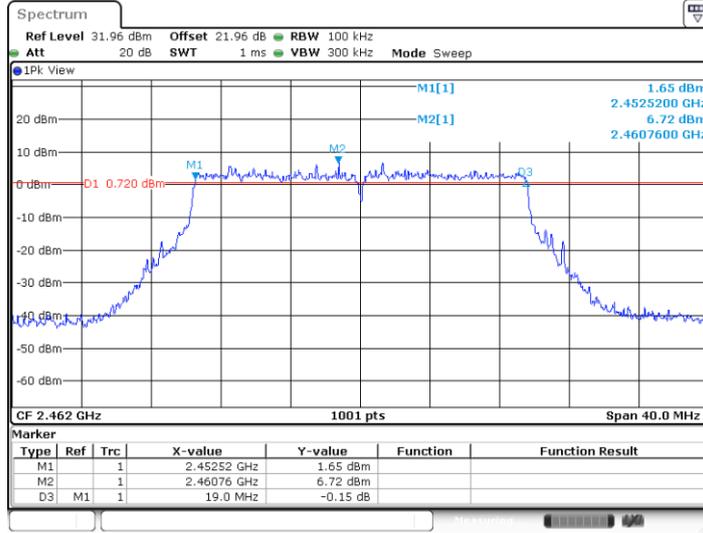





11BE40MIMO_Ant1_2422

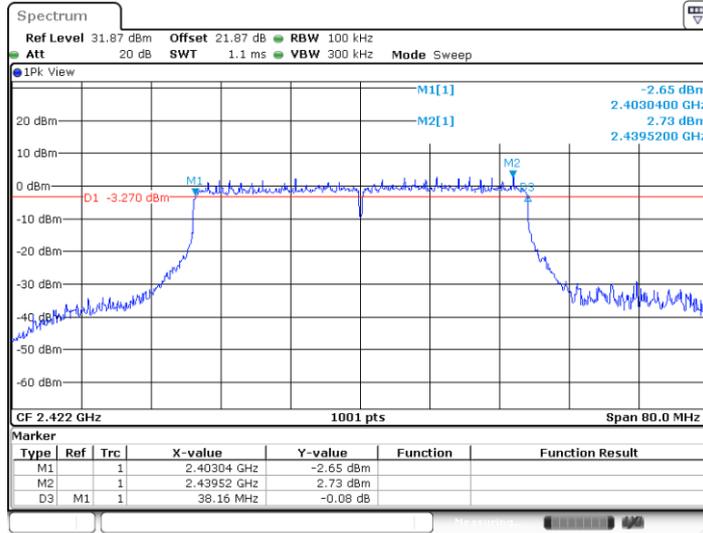


11BE40MIMO_Ant2_2422

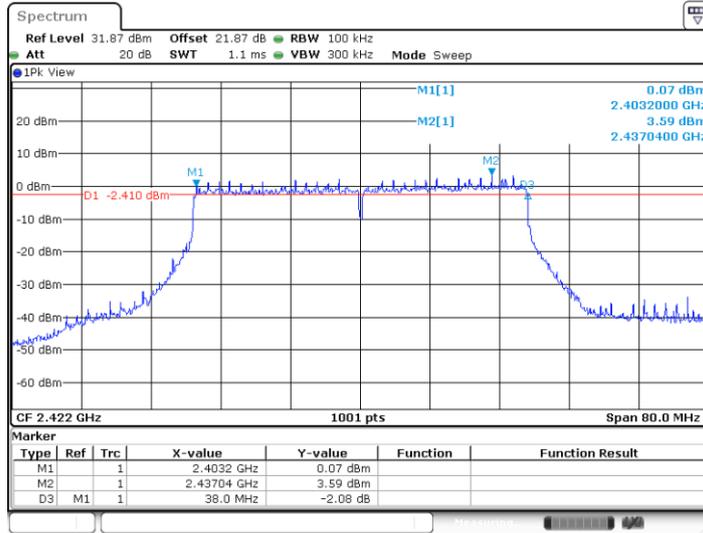

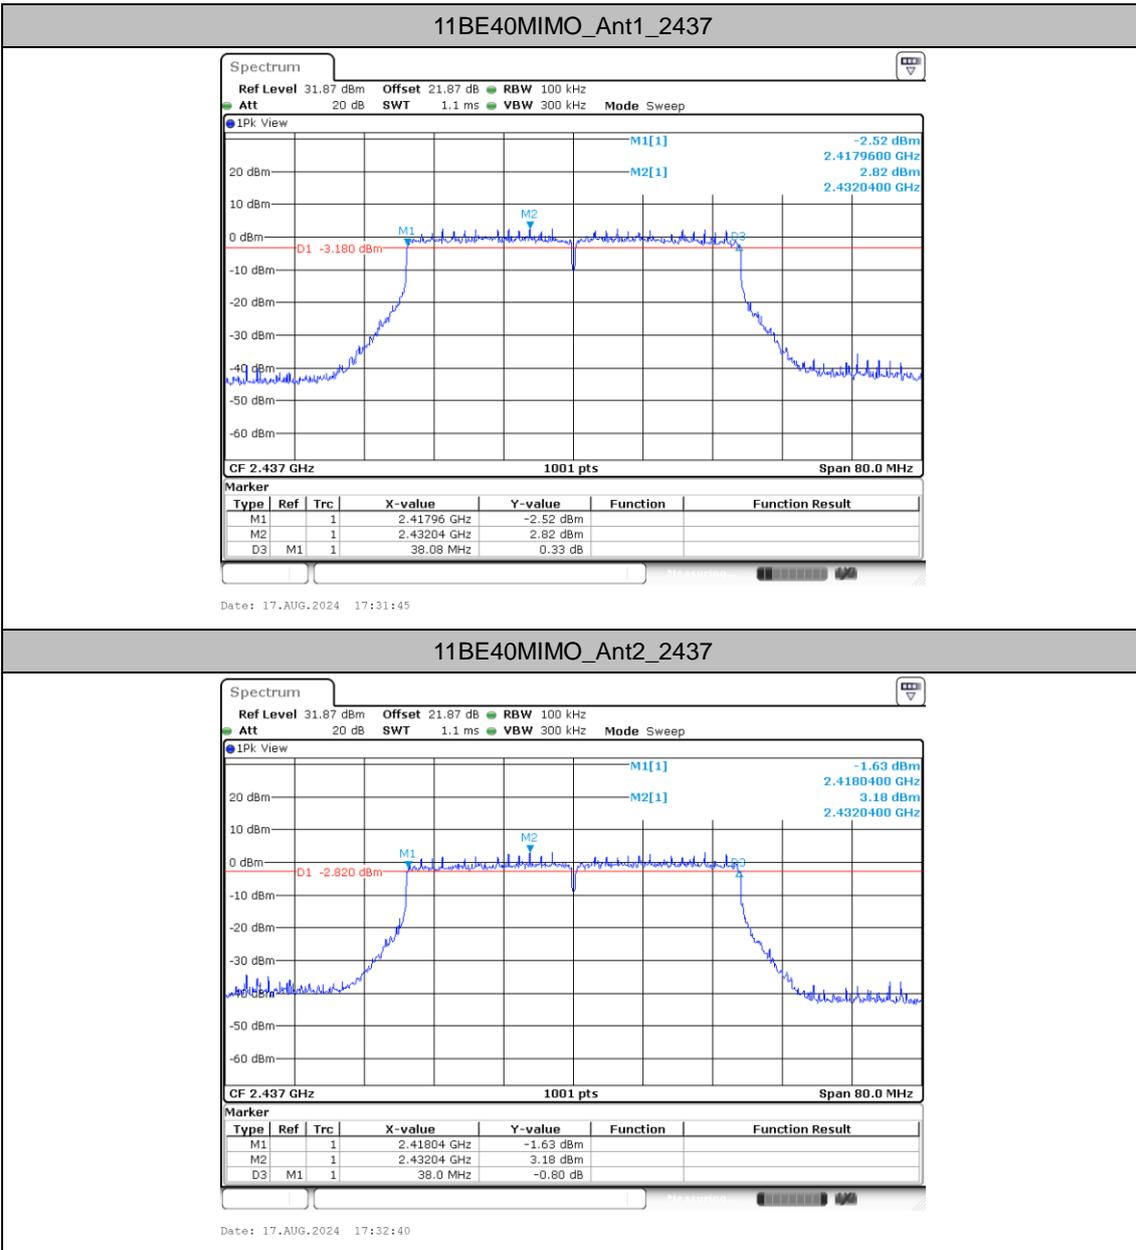




11BE40MIMO_Ant1_2452

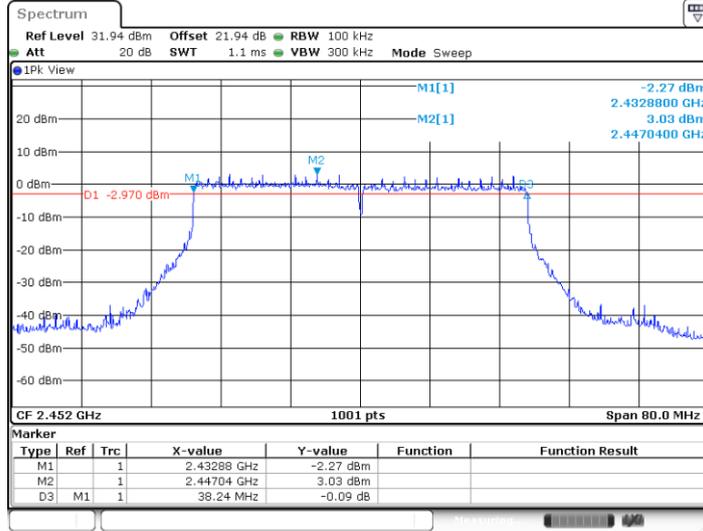

11BE40MIMO_Ant2_2452

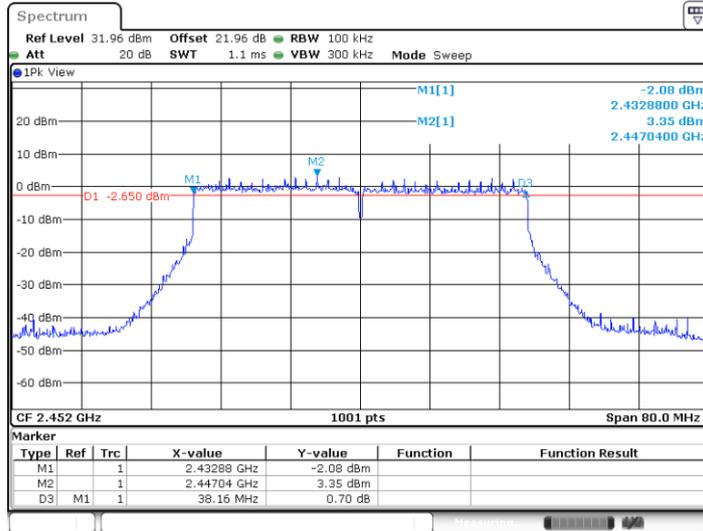




Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]
11B-CDD	Ant1	2412	13.227	2405.4865	2418.7133
	Ant2	2412	13.147	2405.4865	2418.6334
	Ant1	2437	13.227	2430.3666	2443.5934
	Ant2	2437	13.227	2430.4066	2443.6334
	Ant1	2462	13.187	2455.4066	2468.5934
	Ant2	2462	13.227	2455.3666	2468.5934
11G-CDD	Ant1	2412	17.542	2403.2088	2420.7512
	Ant2	2412	17.343	2403.3287	2420.6713
	Ant1	2437	17.582	2428.0889	2445.6713
	Ant2	2437	17.303	2428.3686	2445.6713
	Ant1	2462	17.662	2453.0090	2470.6713
	Ant2	2462	17.303	2453.2887	2470.5914
11N20MIMO	Ant1	2412	18.621	2402.7692	2421.3906
	Ant2	2412	18.541	2402.7692	2421.3107
	Ant1	2437	18.581	2427.7293	2446.3107
	Ant2	2437	18.462	2427.8092	2446.2707
	Ant1	2462	18.661	2452.6494	2471.3107
	Ant2	2462	18.541	2452.7293	2471.2707
11N40MIMO	Ant1	2422	37.323	2403.4585	2440.7812
	Ant2	2422	37.403	2403.4585	2440.8611
	Ant1	2437	37.243	2418.2987	2455.5415
	Ant2	2437	37.163	2418.4585	2455.6214
	Ant1	2452	37.403	2433.2188	2470.6214
	Ant2	2452	37.243	2433.2987	2470.5415
11BE20MIMO	Ant1	2412	19.341	2402.3696	2421.7103
	Ant2	2412	19.381	2402.3696	2421.7502
	Ant1	2437	19.341	2427.3297	2446.6703
	Ant2	2437	19.341	2427.3696	2446.7103
	Ant1	2462	19.381	2452.2897	2471.6703
	Ant2	2462	19.381	2452.3297	2471.7103
11BE40MIMO	Ant1	2422	38.521	2402.8192	2441.3407
	Ant2	2422	38.601	2402.8192	2441.4206
	Ant1	2437	38.362	2417.8192	2456.1808
	Ant2	2437	38.362	2417.8991	2456.2607
	Ant1	2452	38.521	2432.6593	2471.1808
	Ant2	2452	38.362	2432.8192	2471.1808




Test Graphs

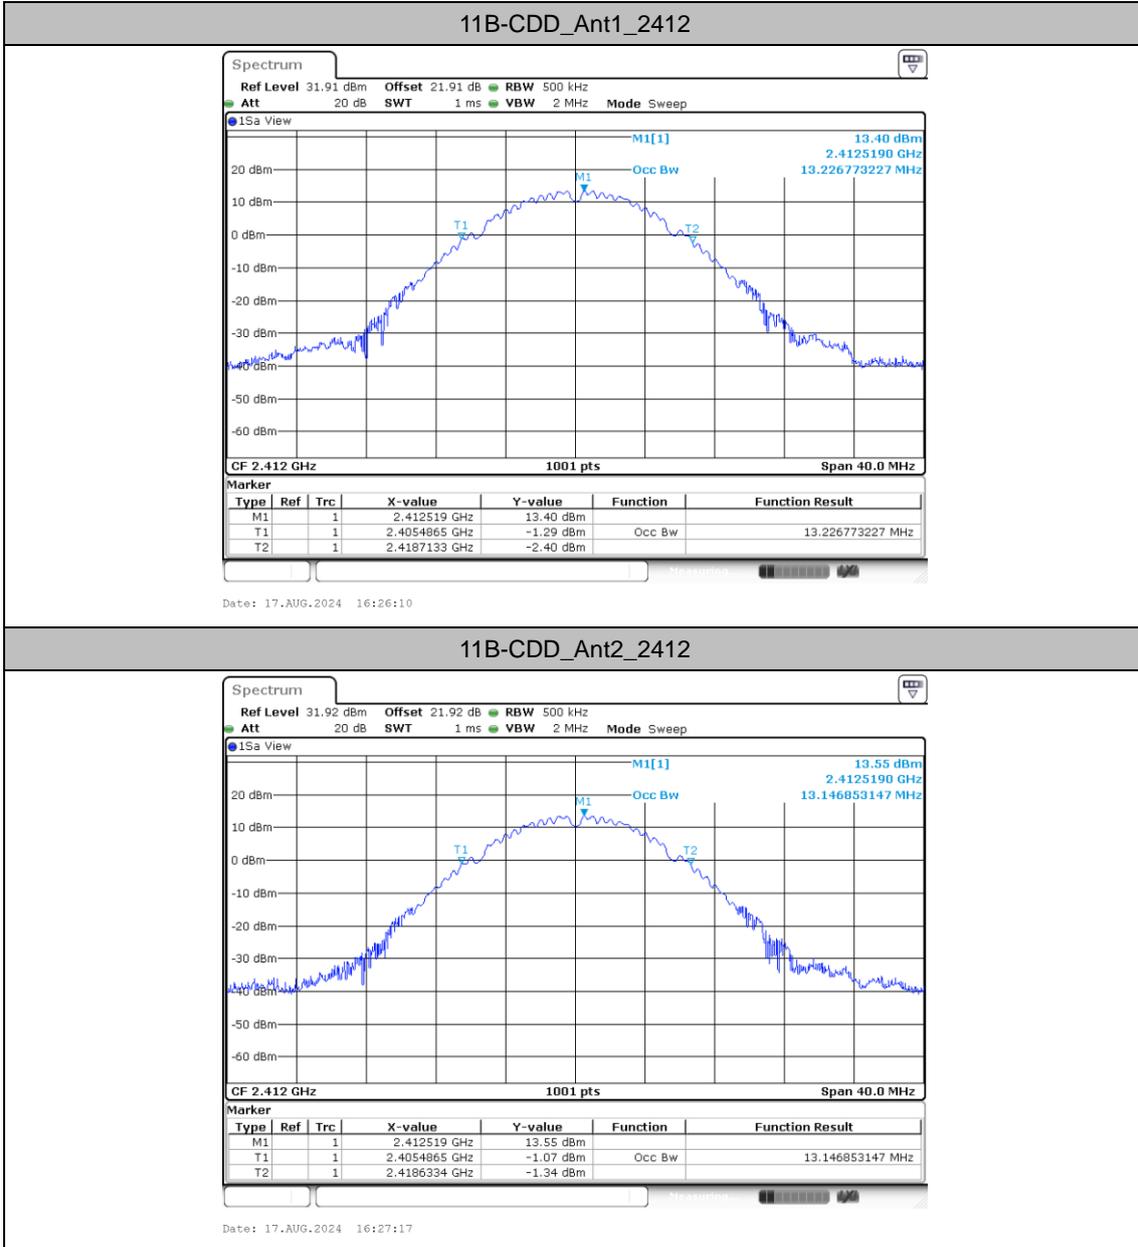




11B-CDD_Ant1_2437

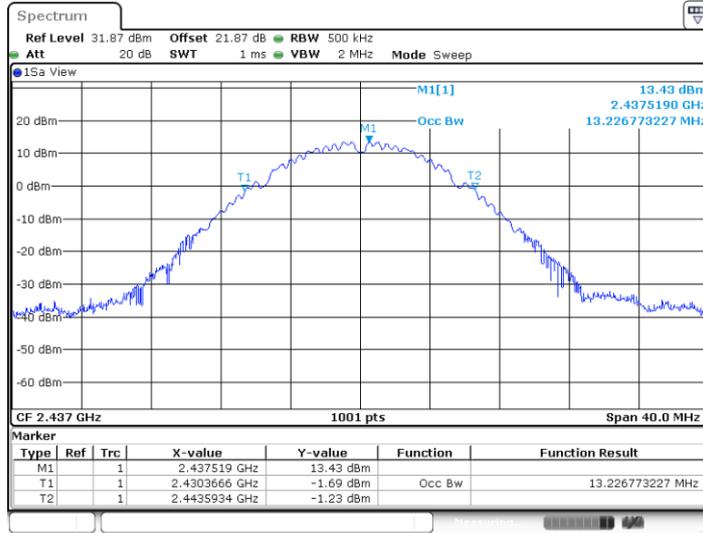


11B-CDD_Ant2_2437

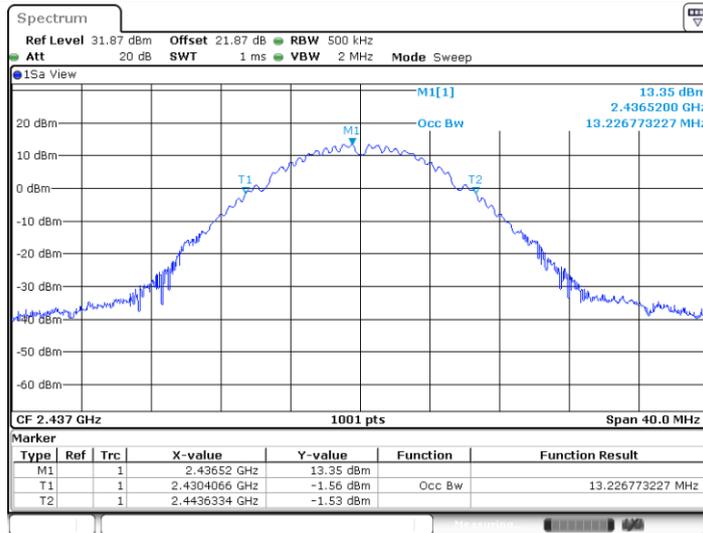




11B-CDD_Ant1_2462

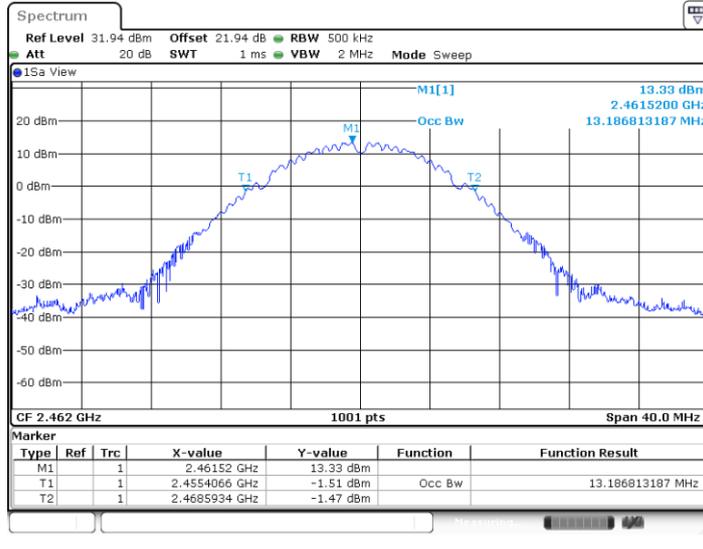


11B-CDD_Ant2_2462

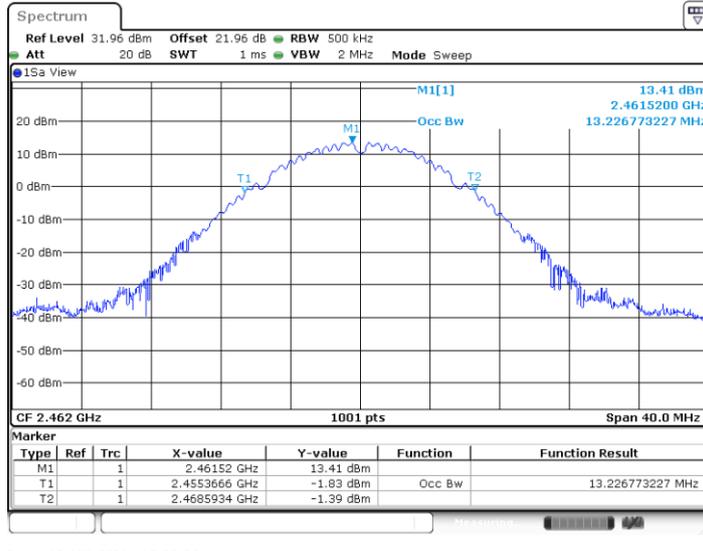




11G-CDD_Ant1_2412

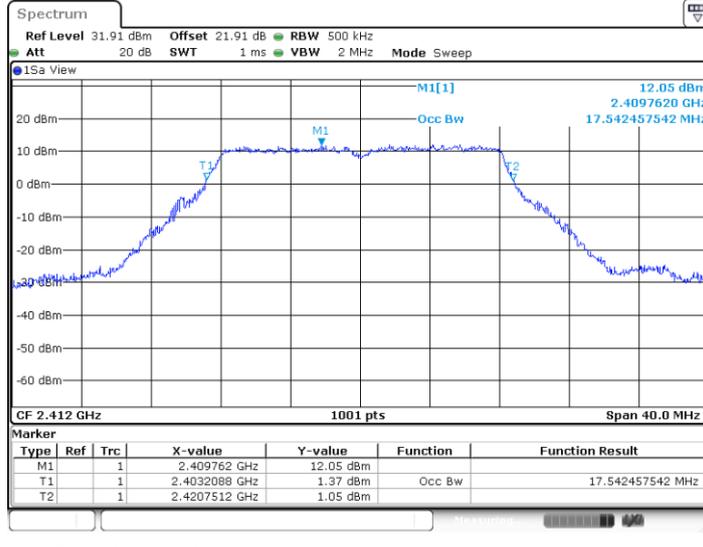

Date: 17.AUG.2024 16:38:36


11G-CDD_Ant2_2412

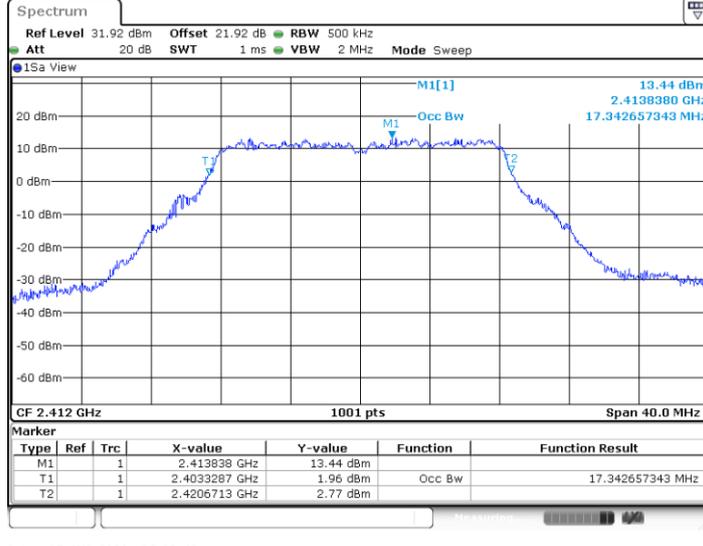

Date: 17.AUG.2024 16:39:43




11G-CDD_Ant1_2437

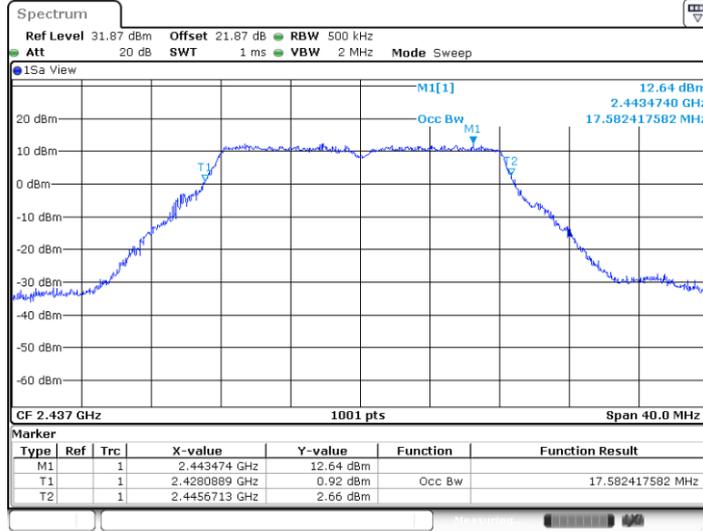

Date: 17.AUG.2024 16:41:01


11G-CDD_Ant2_2437

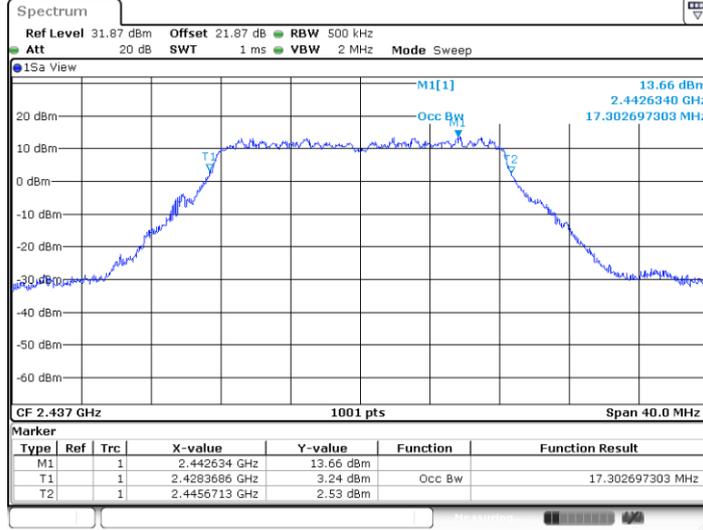

Date: 17.AUG.2024 16:41:56




11G-CDD_Ant1_2462

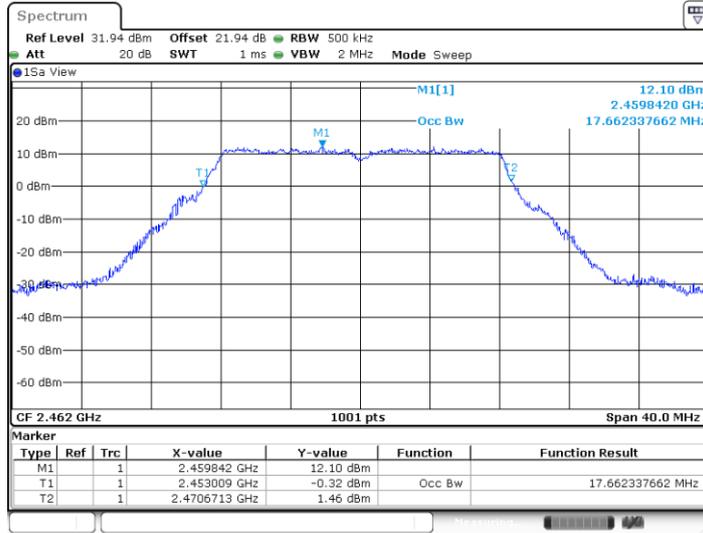


Date: 17.AUG.2024 16:43:35

11G-CDD_Ant2_2462

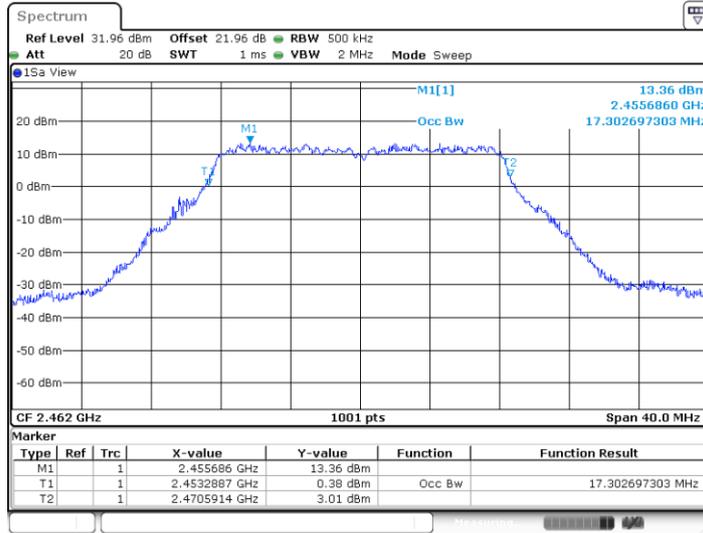


Date: 17.AUG.2024 16:44:44

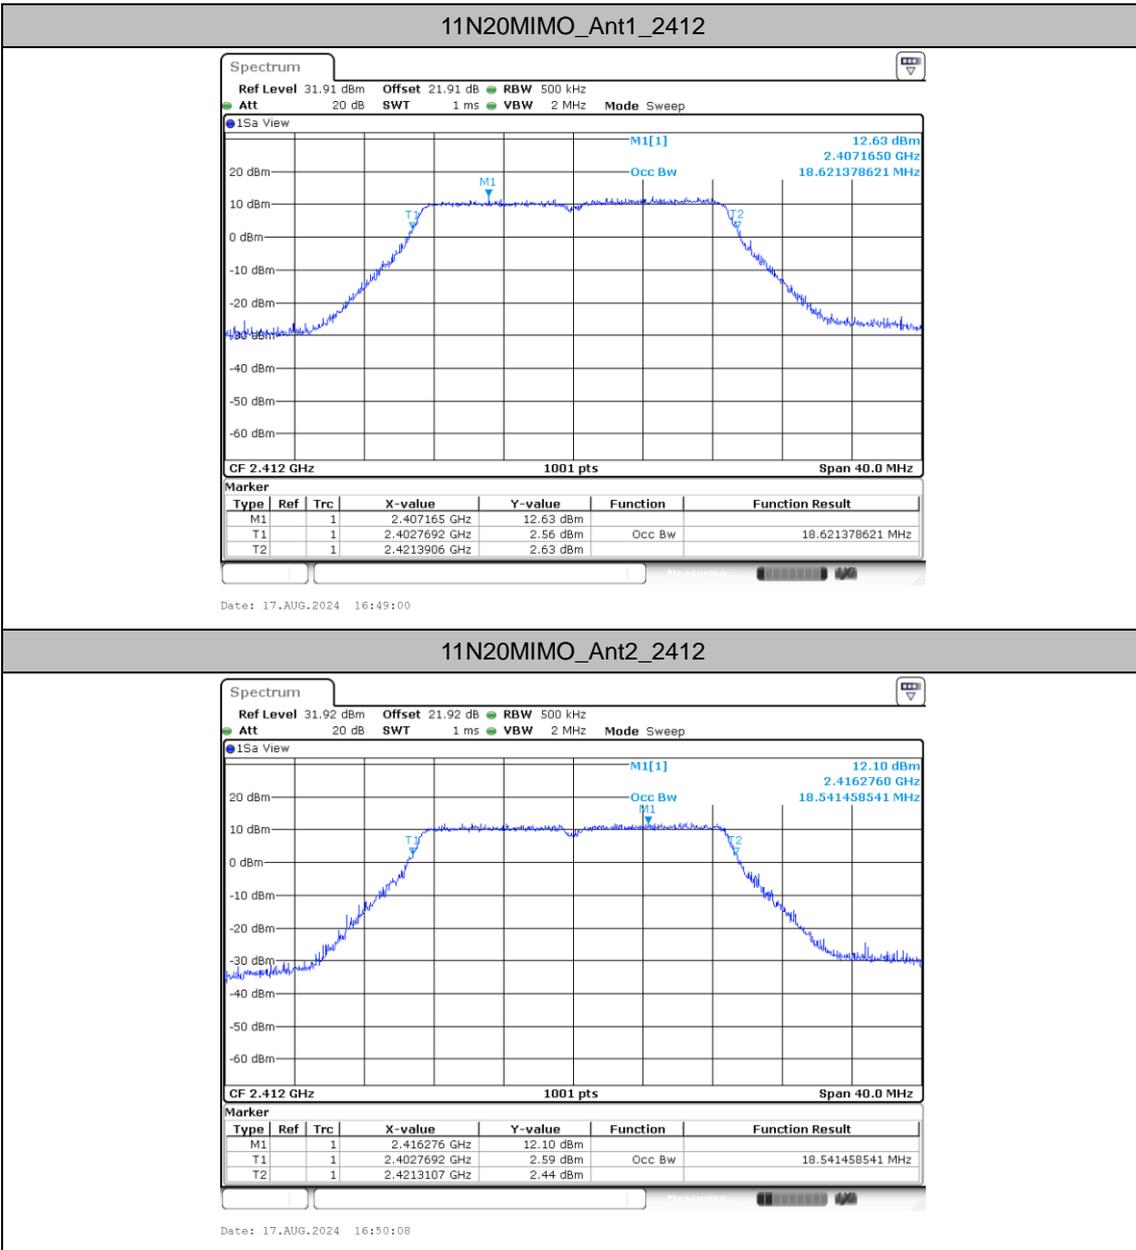




11N20MIMO_Ant1_2437

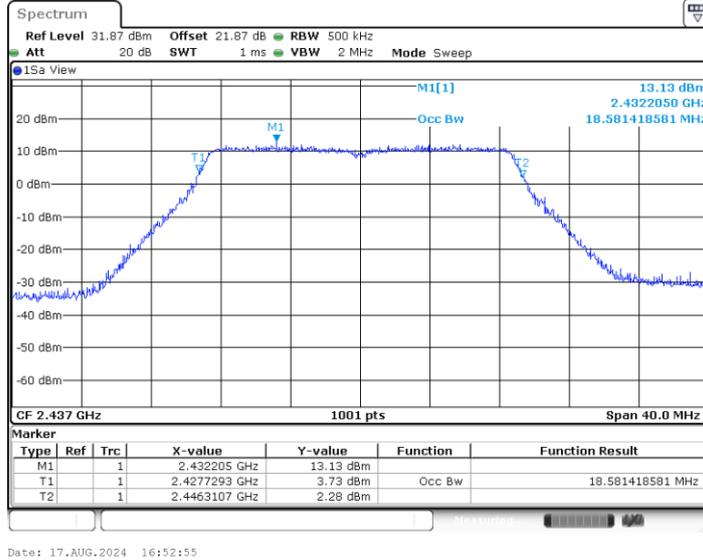


11N20MIMO_Ant2_2437

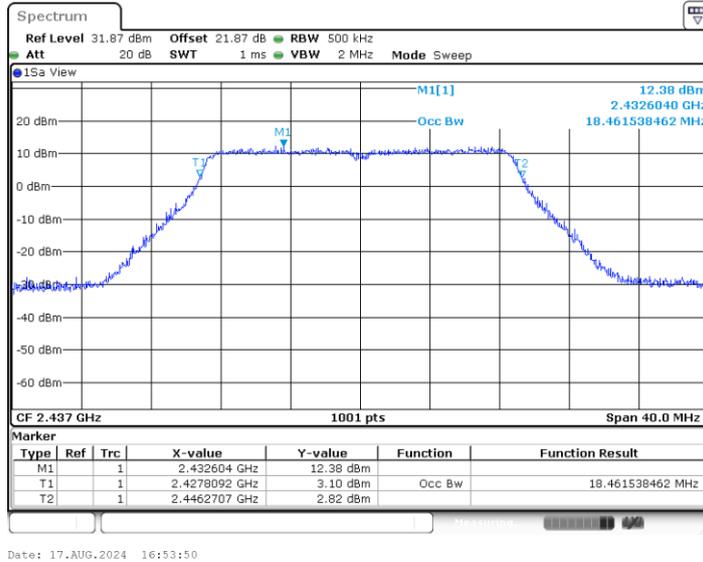




11N20MIMO_Ant1_2462

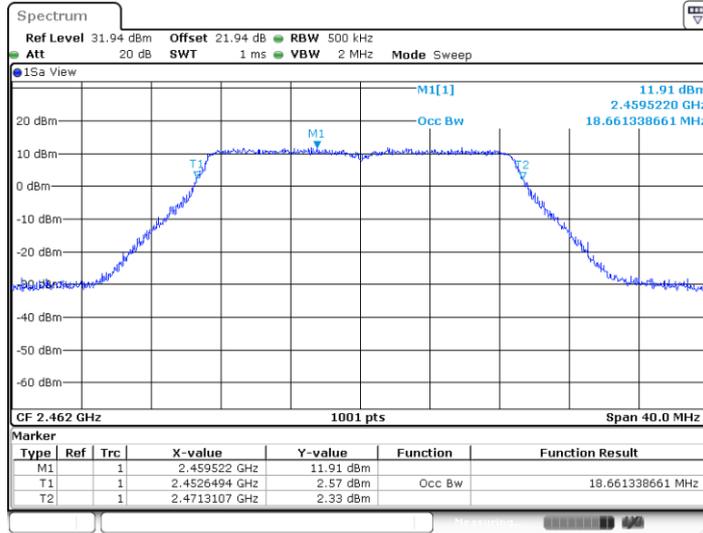

Date: 17.AUG.2024 16:56:04


11N20MIMO_Ant2_2462

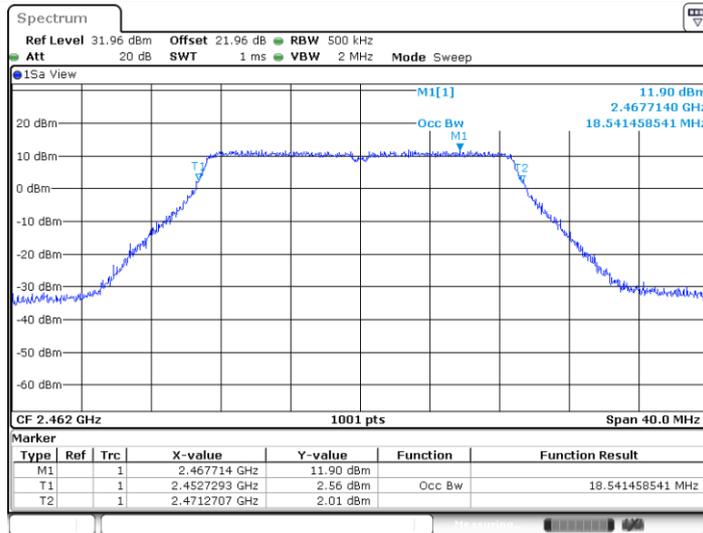

Date: 17.AUG.2024 16:57:12




11N40MIMO_Ant1_2422

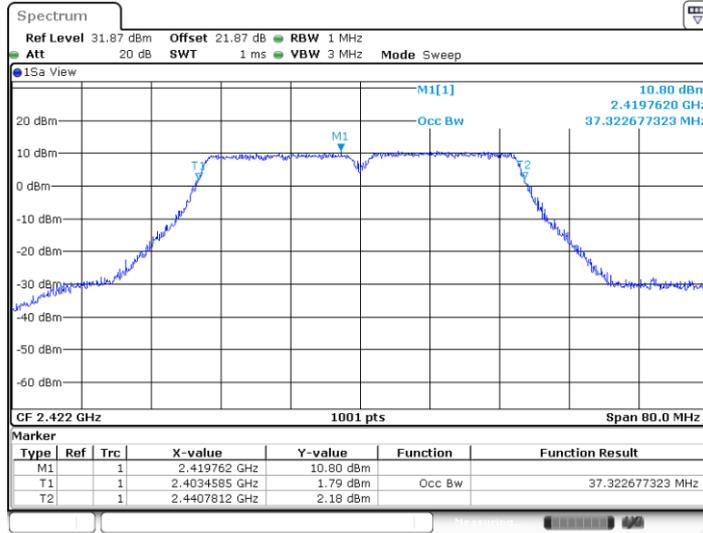


Date: 17.AUG.2024 17:02:10

11N40MIMO_Ant2_2422

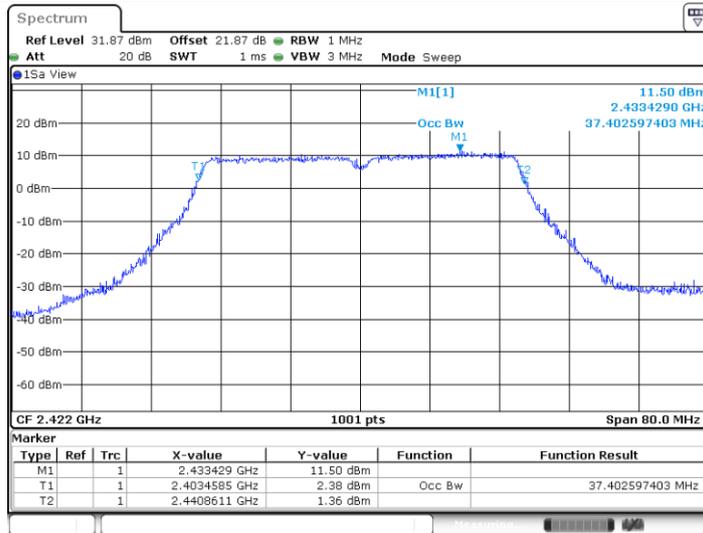


Date: 17.AUG.2024 17:03:16

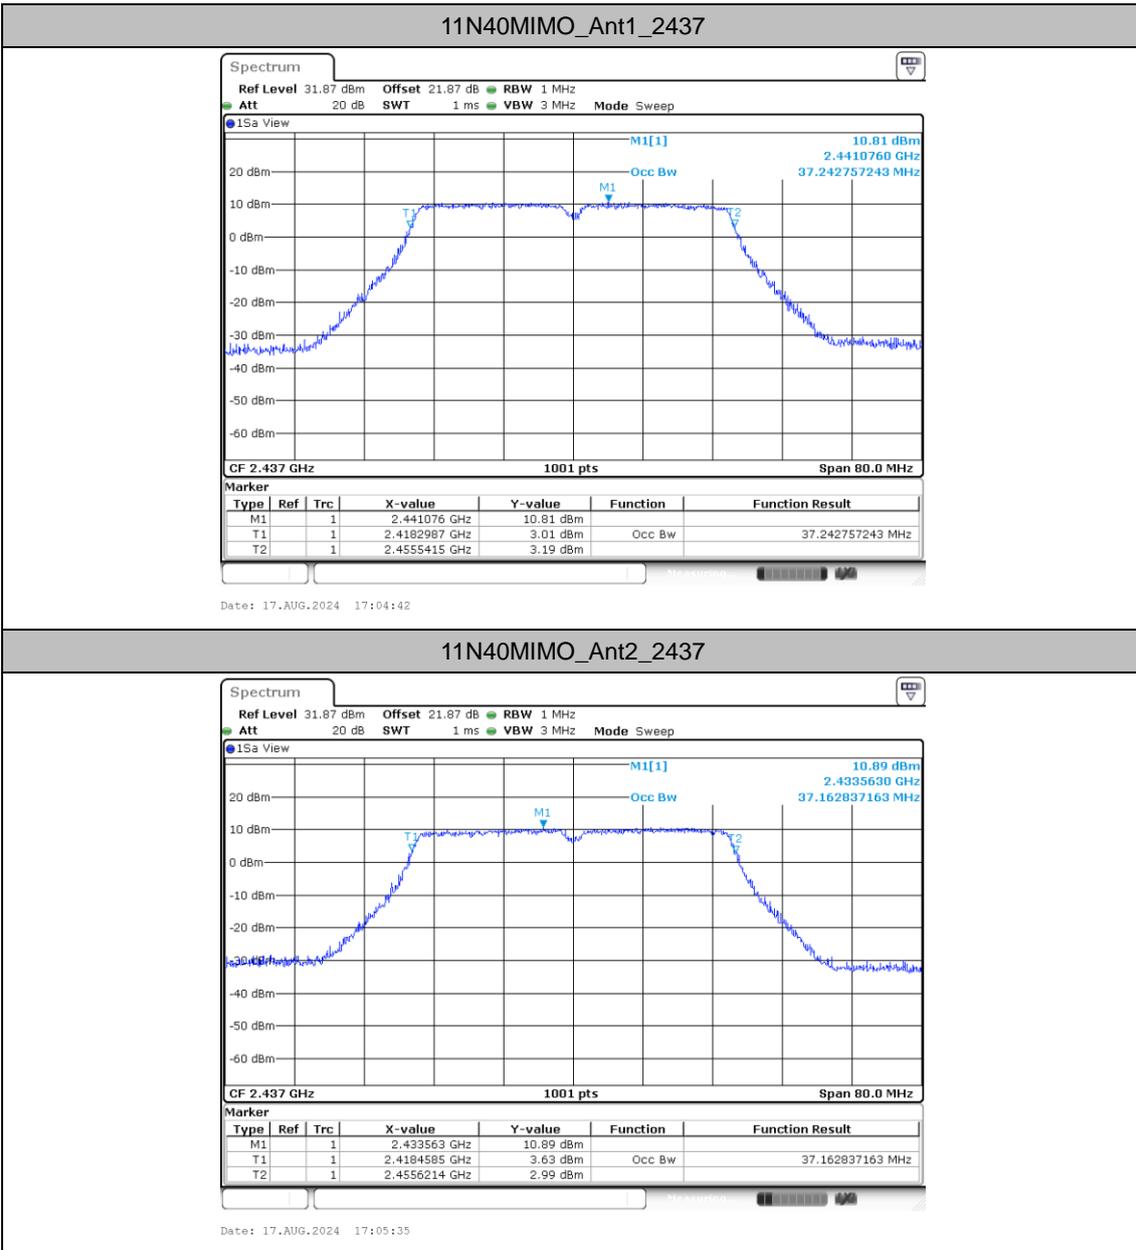




11N40MIMO_Ant1_2452

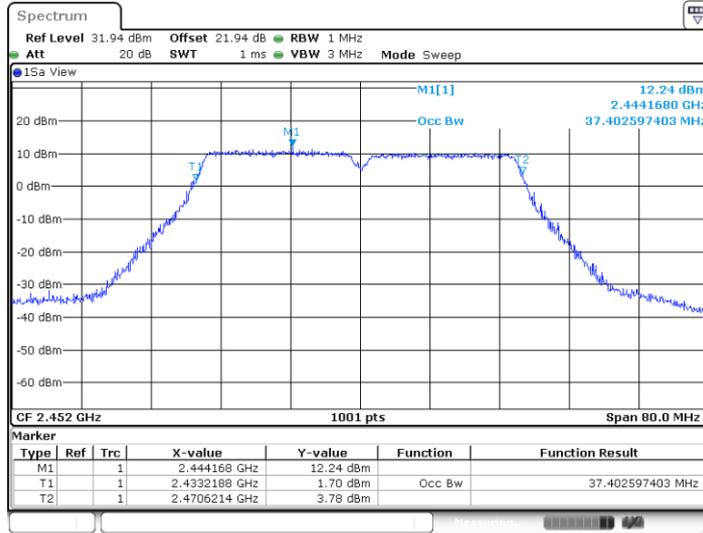

Date: 17.AUG.2024 17:06:52


11N40MIMO_Ant2_2452

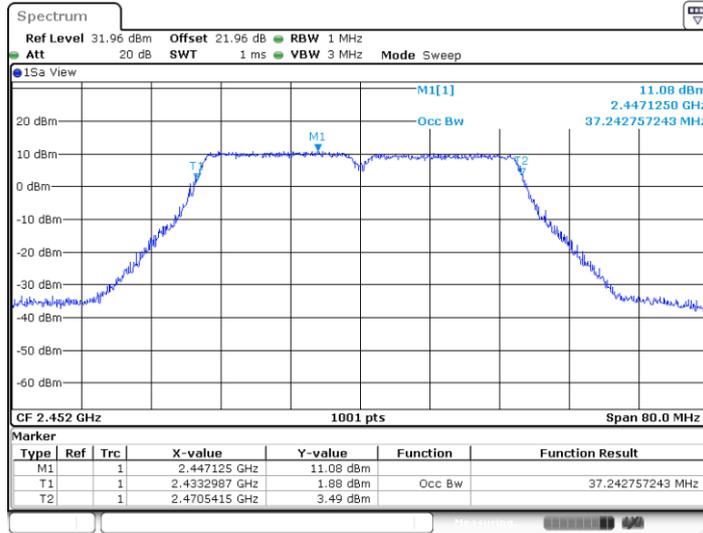


Date: 17.AUG.2024 17:07:59



11BE20MIMO_Ant1_2412

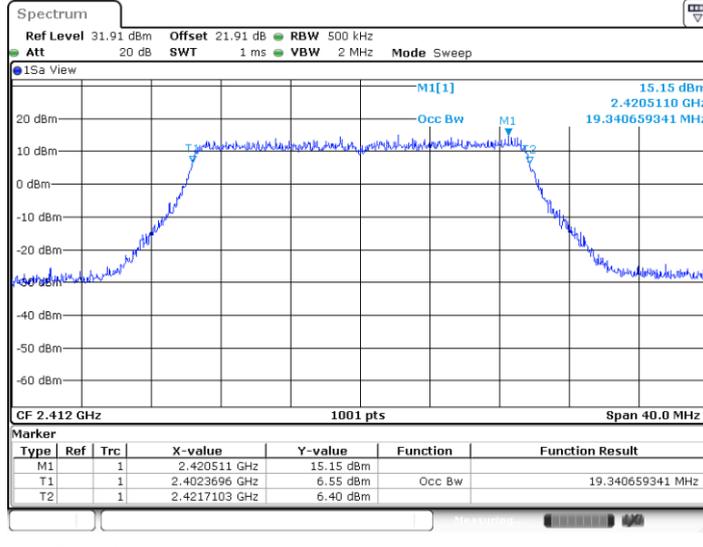


11BE20MIMO_Ant2_2412

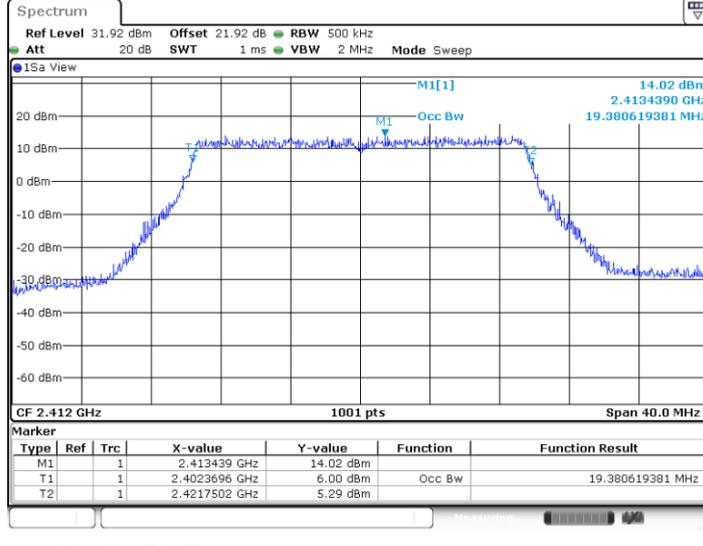




11BE20MIMO_Ant1_2437

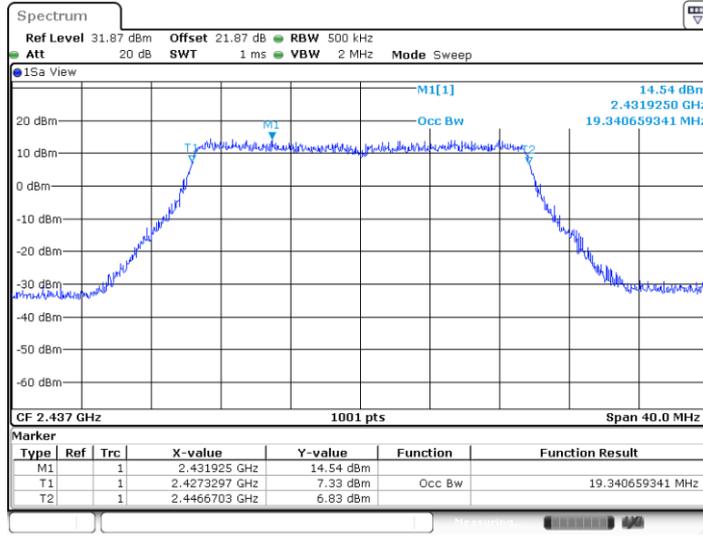


11BE20MIMO_Ant2_2437

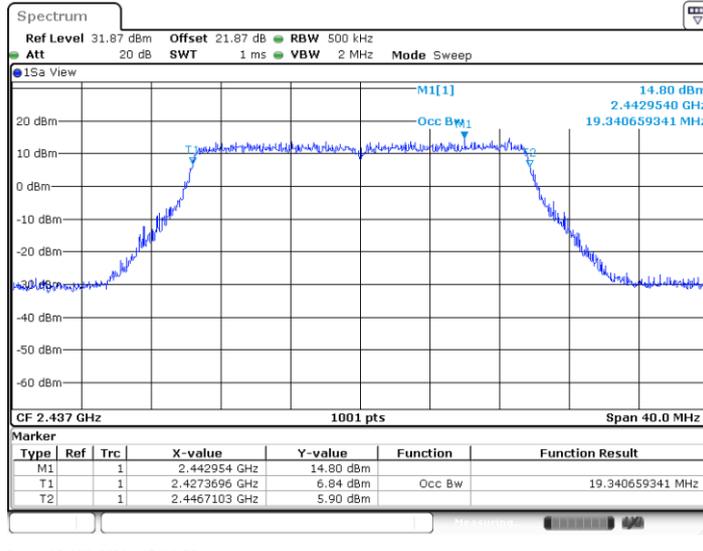




11BE20MIMO_Ant1_2462

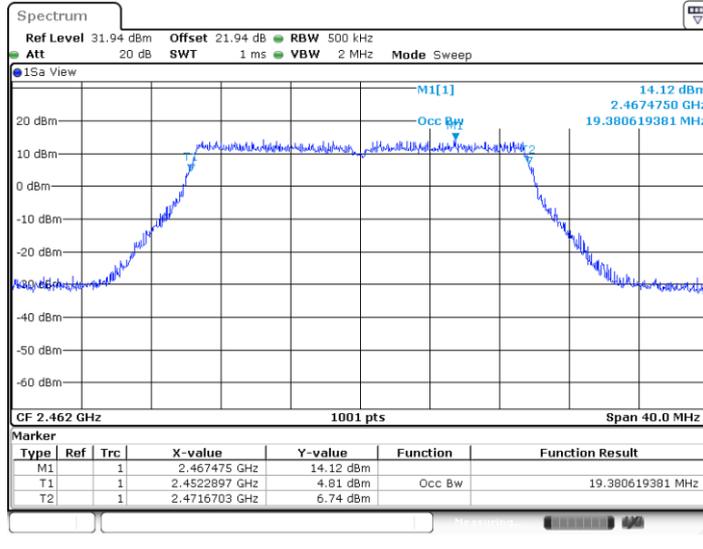


11BE20MIMO_Ant2_2462

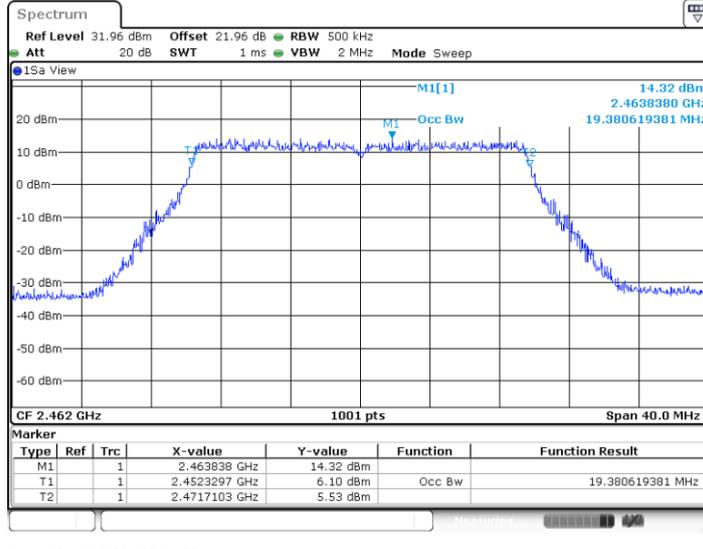




11BE40MIMO_Ant1_2422

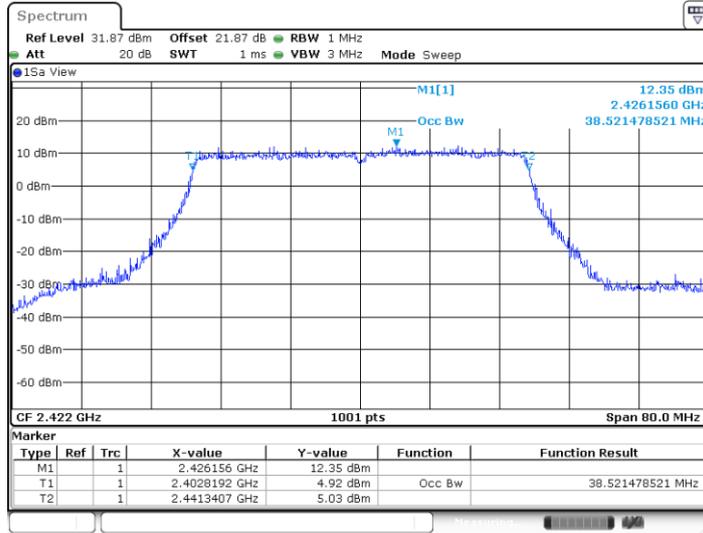

Date: 17.AUG.2024 17:29:27


11BE40MIMO_Ant2_2422

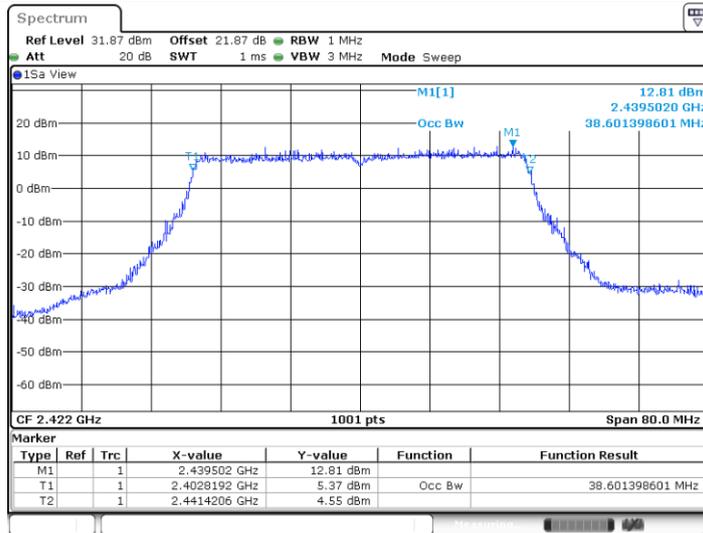

Date: 17.AUG.2024 17:30:34




11BE40MIMO_Ant1_2437

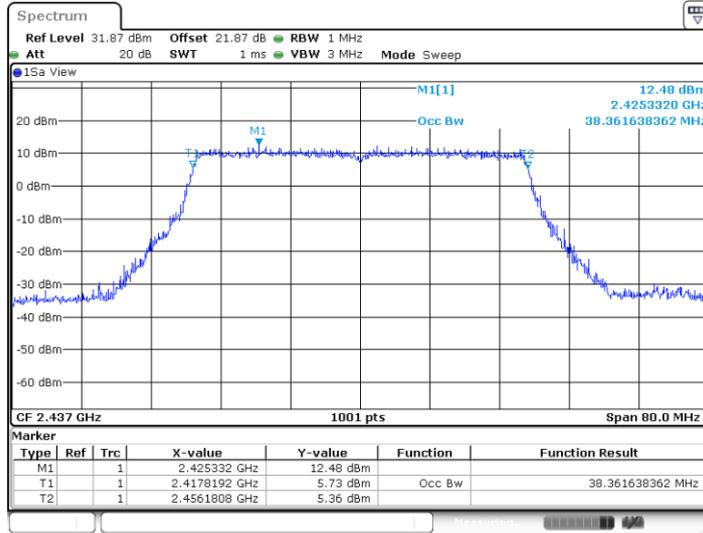


Date: 17.AUG.2024 17:31:51

11BE40MIMO_Ant2_2437

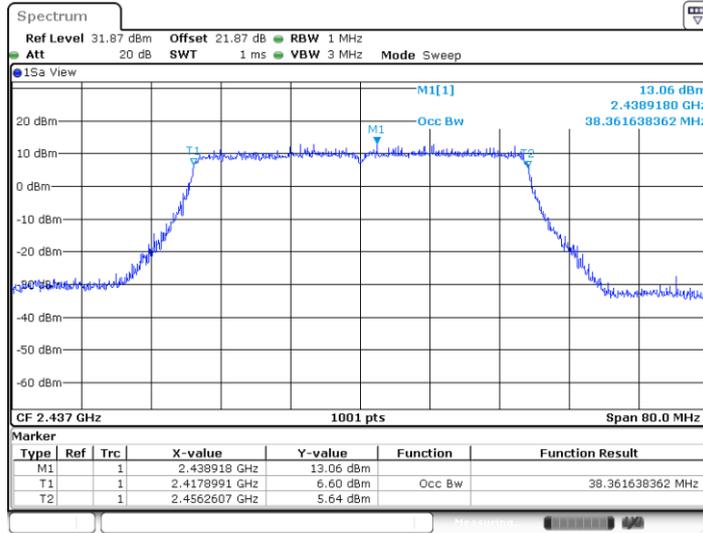

Date: 17.AUG.2024 17:32:46

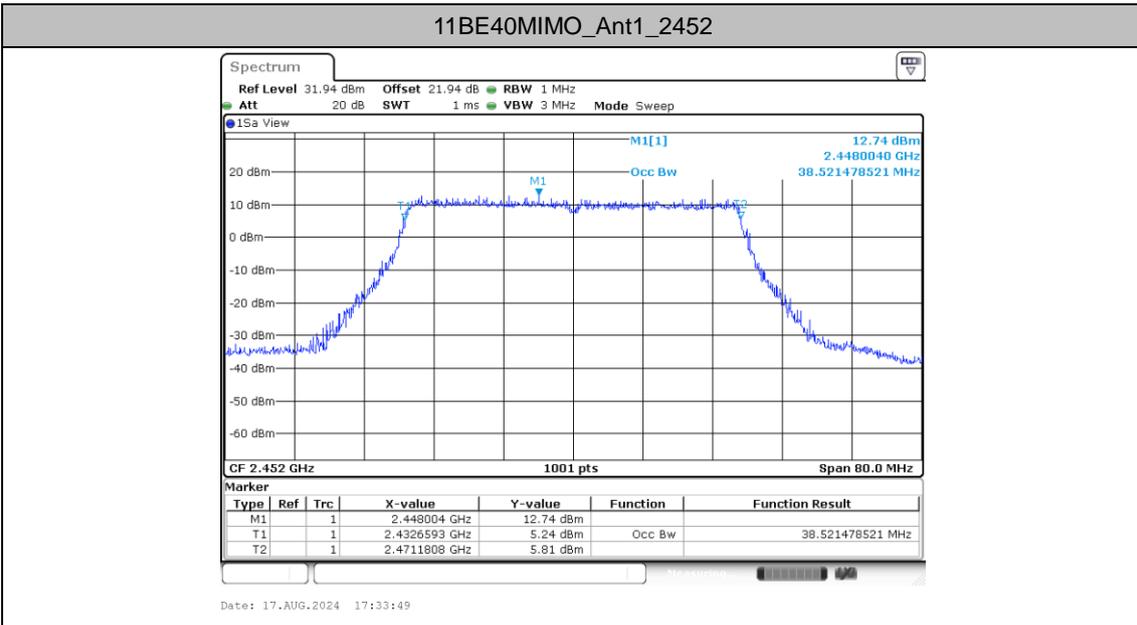



Maximum power spectral density

Test Result



TestMode	Antenna	Freq(MHz)	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11B-CDD	Ant1	2412	-1.85	≤8.00	PASS
	Ant2	2412	-1.73	≤8.00	PASS
	total	2412	1.22	≤8.00	PASS
	Ant1	2437	-1.97	≤8.00	PASS
	Ant2	2437	-1.99	≤8.00	PASS
	total	2437	1.03	≤8.00	PASS
	Ant1	2462	-3.11	≤8.00	PASS
	Ant2	2462	-2.96	≤8.00	PASS
	total	2462	-0.02	≤8.00	PASS
11G-CDD	Ant1	2412	-8.03	≤8.00	PASS
	Ant2	2412	-7.4	≤8.00	PASS
	total	2412	-4.69	≤8.00	PASS
	Ant1	2437	-6.95	≤8.00	PASS
	Ant2	2437	-7.57	≤8.00	PASS
	total	2437	-4.24	≤8.00	PASS
	Ant1	2462	-8.05	≤8.00	PASS
	Ant2	2462	-7.62	≤8.00	PASS
	total	2462	-4.82	≤8.00	PASS
11N20MIMO	Ant1	2412	-6.09	≤8.00	PASS
	Ant2	2412	-5.81	≤8.00	PASS
	total	2412	-2.94	≤8.00	PASS
	Ant1	2437	-6.39	≤8.00	PASS
	Ant2	2437	-6.61	≤8.00	PASS
	total	2437	-3.49	≤8.00	PASS
	Ant1	2462	-5.75	≤8.00	PASS
	Ant2	2462	-7.09	≤8.00	PASS
	total	2462	-3.36	≤8.00	PASS
11N40MIMO	Ant1	2422	-11.63	≤8.00	PASS
	Ant2	2422	-11.11	≤8.00	PASS
	total	2422	-8.35	≤8.00	PASS
	Ant1	2437	-11.68	≤8.00	PASS
	Ant2	2437	-11.72	≤8.00	PASS
	total	2437	-8.69	≤8.00	PASS
	Ant1	2452	-11.2	≤8.00	PASS
	Ant2	2452	-11.58	≤8.00	PASS
	total	2452	-8.38	≤8.00	PASS
11BE20MIMO	Ant1	2412	-7.14	≤8.00	PASS
	Ant2	2412	-7.25	≤8.00	PASS
	total	2412	-4.18	≤8.00	PASS
	Ant1	2437	-7.68	≤8.00	PASS
	Ant2	2437	-7.16	≤8.00	PASS
	total	2437	-4.40	≤8.00	PASS
	Ant1	2462	-6.95	≤8.00	PASS
	Ant2	2462	-7.1	≤8.00	PASS



	total	2462	-4.01	≤8.00	PASS
11BE40MIMO	Ant1	2422	-12.23	≤8.00	PASS
	Ant2	2422	-11.89	≤8.00	PASS
	total	2422	-9.05	≤8.00	PASS
	Ant1	2437	-11.29	≤8.00	PASS
	Ant2	2437	-12.3	≤8.00	PASS
	total	2437	-8.76	≤8.00	PASS
	Ant1	2452	-11.82	≤8.00	PASS
	Ant2	2452	-12.25	≤8.00	PASS
	total	2452	-9.02	≤8.00	PASS




Test Graphs

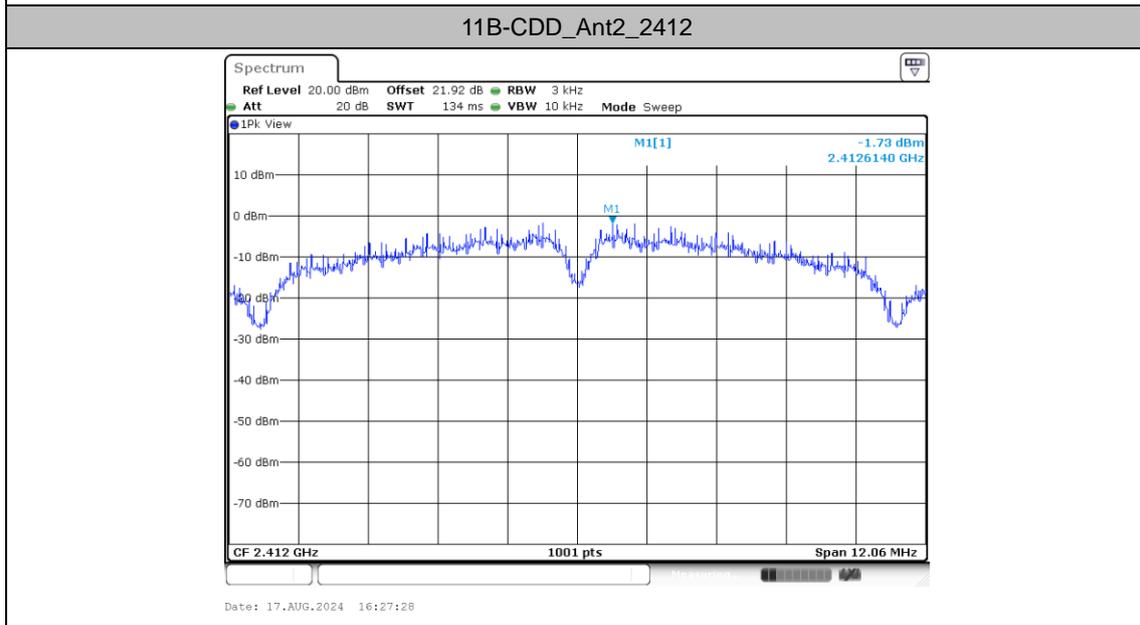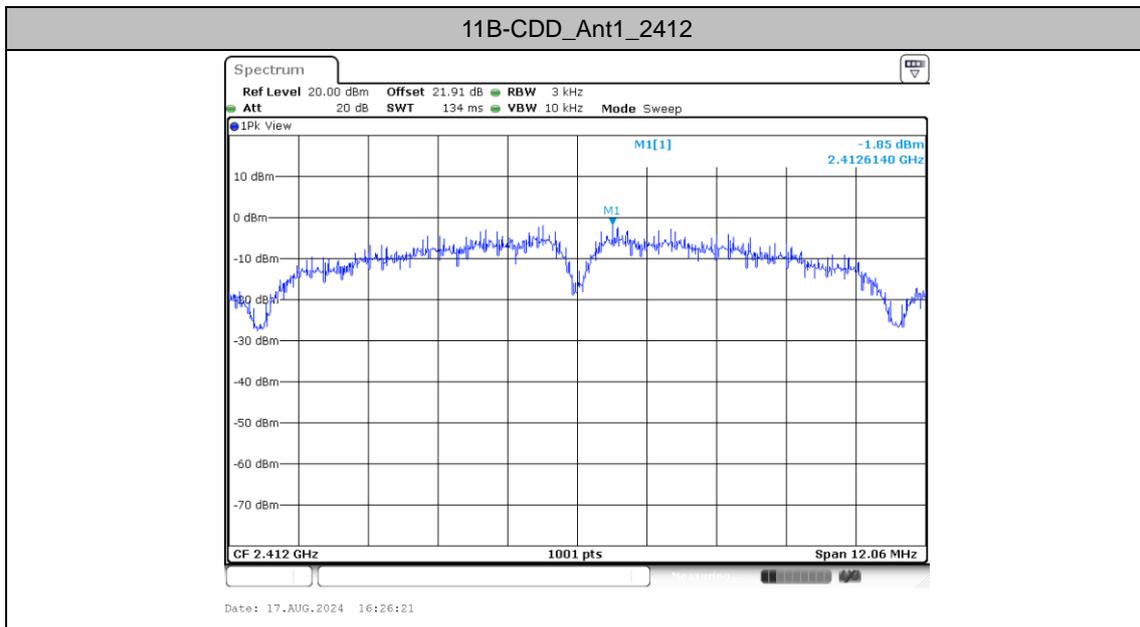




11B-CDD_Ant1_2437

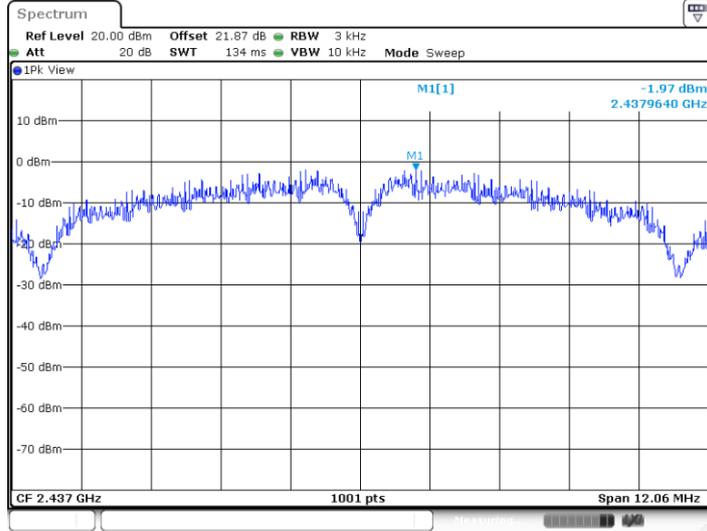


11B-CDD_Ant2_2437

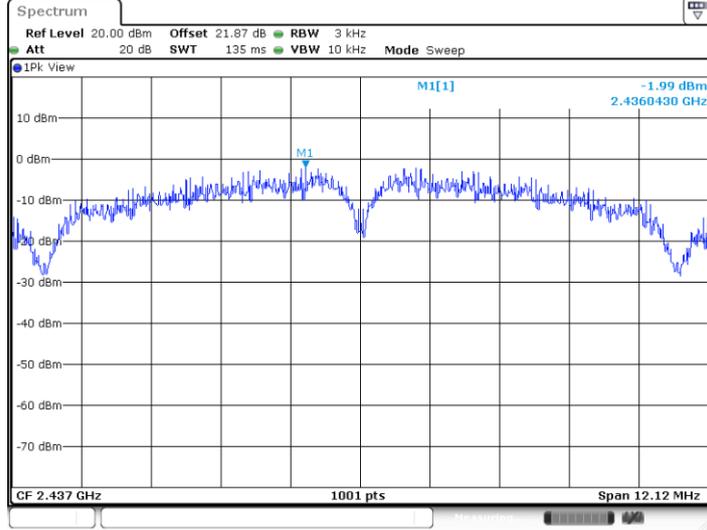




11B-CDD_Ant1_2462

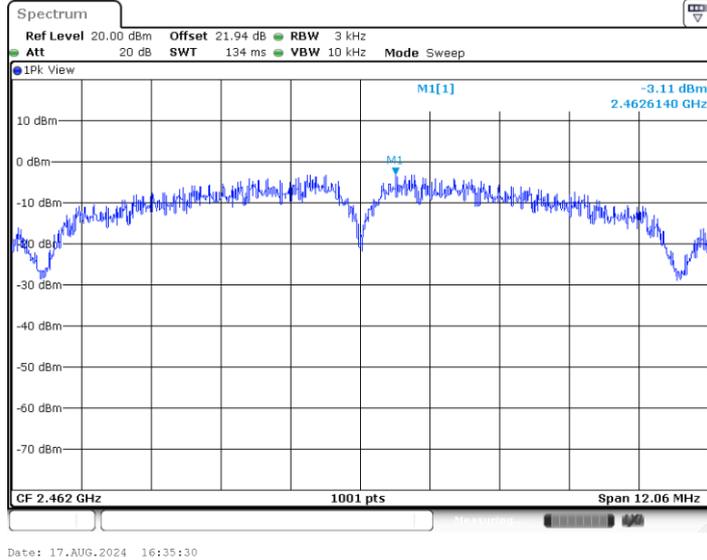


11B-CDD_Ant2_2462

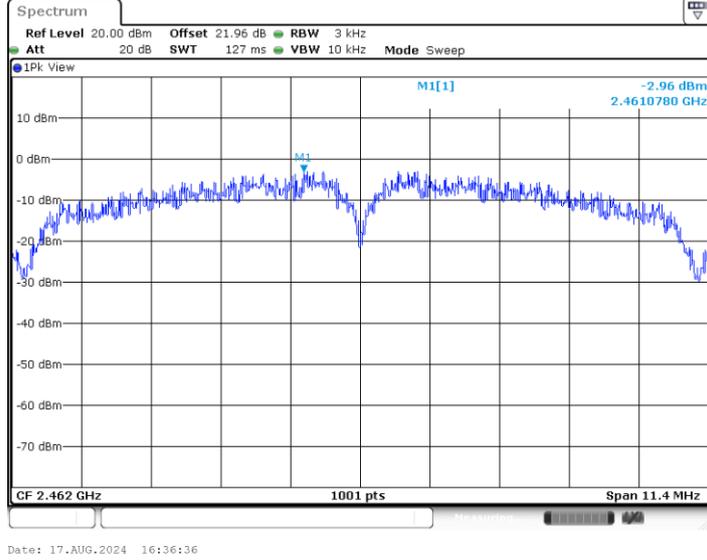



11G-CDD_Ant1_2412

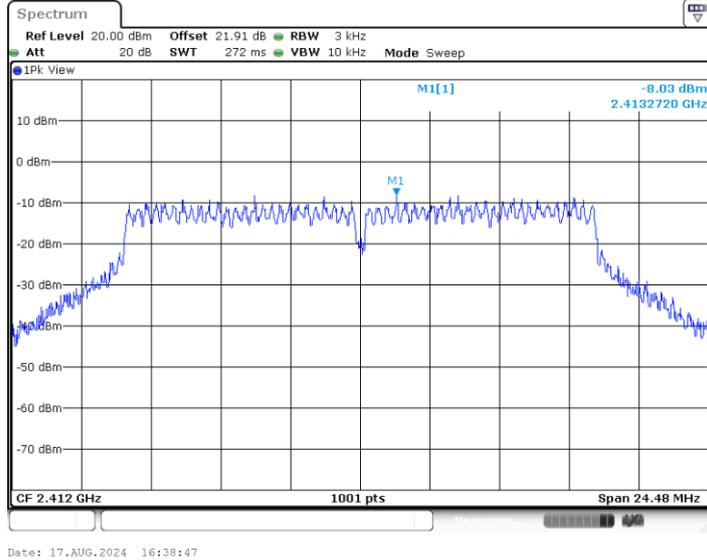

11G-CDD_Ant2_2412

