



FCC RF Test Report

APPLICANT : Lenovo(Shanghai) Electronics Technology Co., Ltd.
EQUIPMENT : Portable Tablet Computer
BRAND NAME : Lenovo
MODEL NAME : TB570FU
FCC ID : O57TB570FU
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Nov. 10, 2022 ~ Nov. 28, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 TEST RESULT	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	14
3.5 Radiated Band Edges and Spurious Emission Measurement	15
3.6 AC Conducted Emission Measurement.....	19
3.7 Antenna Requirements.....	21
4 LIST OF MEASURING EQUIPMENT.....	22
5 UNCERTAINTY OF EVALUATION.....	23
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR201214B	Rev. 01	Initial issue of report	Dec. 09, 2022

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report only	-
3.2	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.46 dB at 2483.50 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 6.07 dB at 0.162 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Lenovo(Shanghai) Electronics Technology Co., Ltd.

Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone

1.2 Manufacturer

Lenovo PC HK Limited

23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Portable Tablet Computer
Brand Name	Lenovo
Model Name	TB570FU
FCC ID	O57TB570FU
SN	Conducted: HA192AC0035 Conduction: HA1R5MJ7 Radiation: HA1R78HK
HW Version	TB570FU
SW Version	TB570FU_RF01_20221124
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel (37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	Bluetooth LE 1Mbps: 8.87 dBm (0.0077 W) Bluetooth LE 2Mbps: 8.93 dBm (0.0078 W)
99% Occupied Bandwidth	Bluetooth LE 1Mbps: 1.039 MHz Bluetooth LE 2Mbps: 2.066 MHz
Antenna Type / Gain	FPC Antenna Type with gain -0.3 dBi
Type of Modulation	Bluetooth LE : GFSK

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH07-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH07-KS	AUDIX	E3	6.2009-8-24a1
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-


2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps & 2Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps & 2Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps & 2Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps & 2Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps & 2Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps & 2Mbps
AC Conducted Emission	Mode 1: Bluetooth Link+ WLAN Link(2.4G)+ USB Cable1(Charging From Adapter)
Remark: For Radiated Test Cases, The tests were performed with Adapter, Earphone and USB Cable1	

2.3 Connection Diagram of Test System

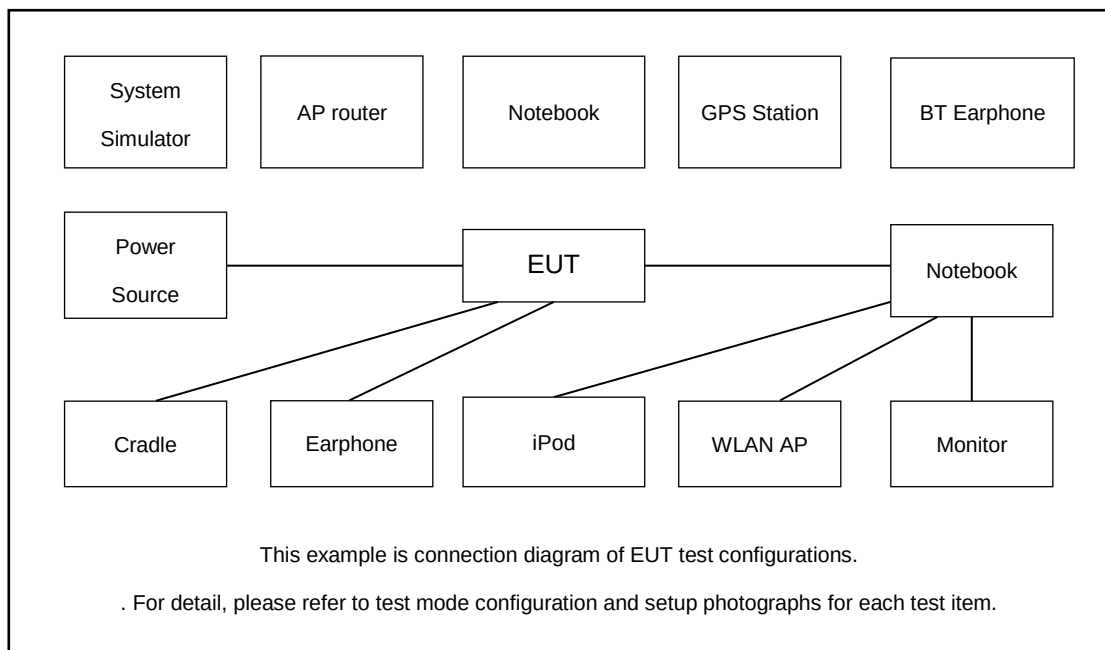

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
2.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
3.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
4.	SD Card	Kingston	8GB	N/A	N/A	N/A
5.	Earphone	Lenovo	P121	N/A	N/A	Unshielded,1.2m



2.5 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.89 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 2.89 + 10 = 12.89 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup

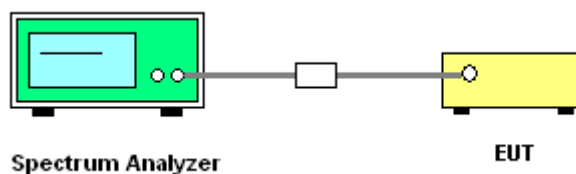

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

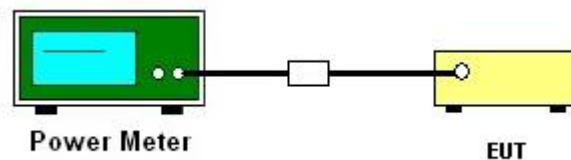

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

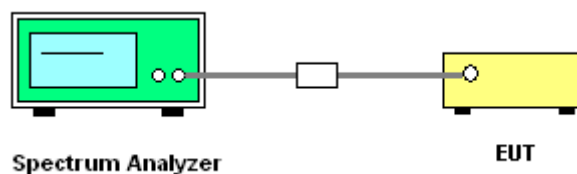

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

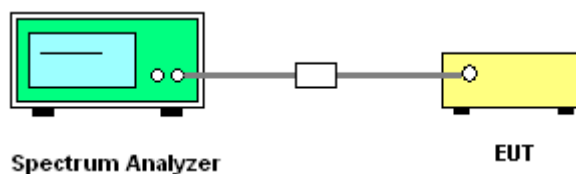

3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

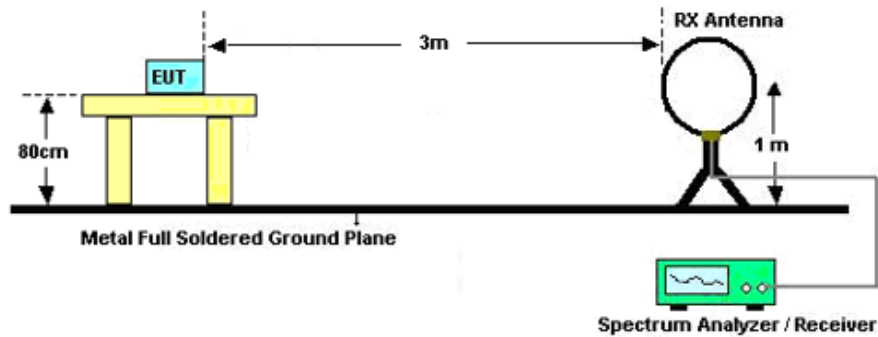

For radiated emissions from 30MHz to 1GHz

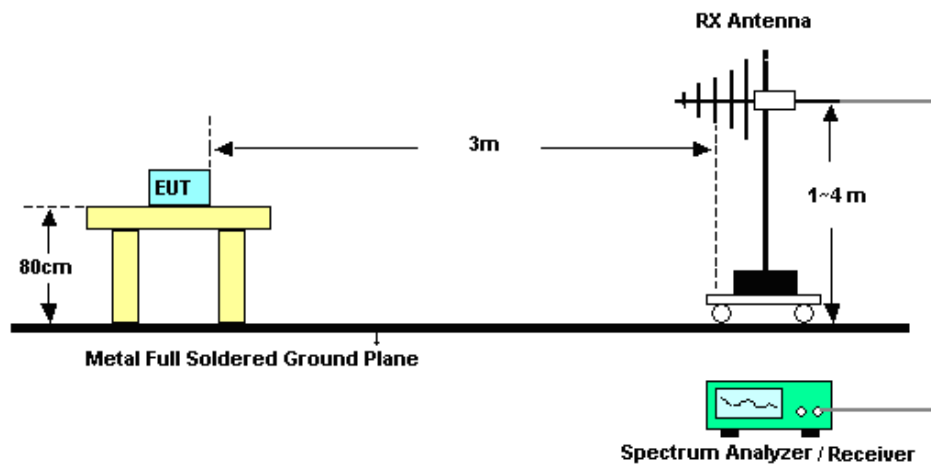

For radiated emissions above 1GHz

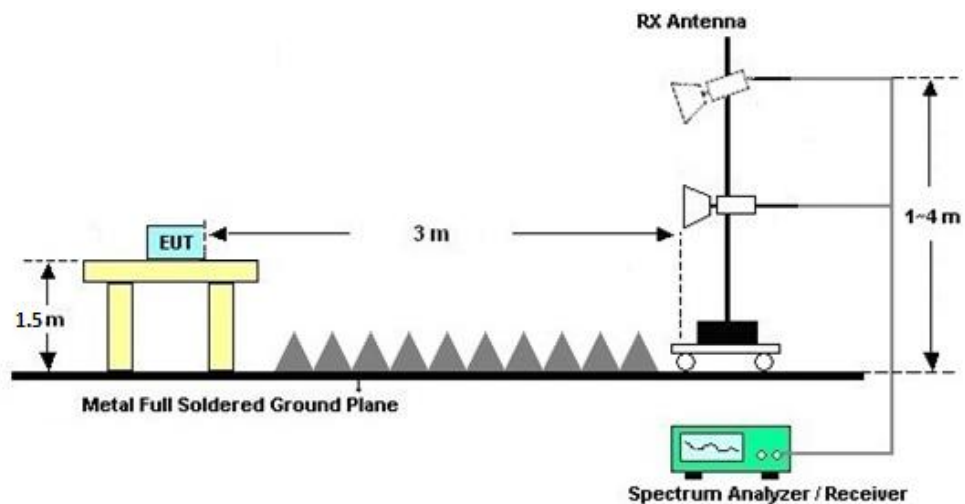

**3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

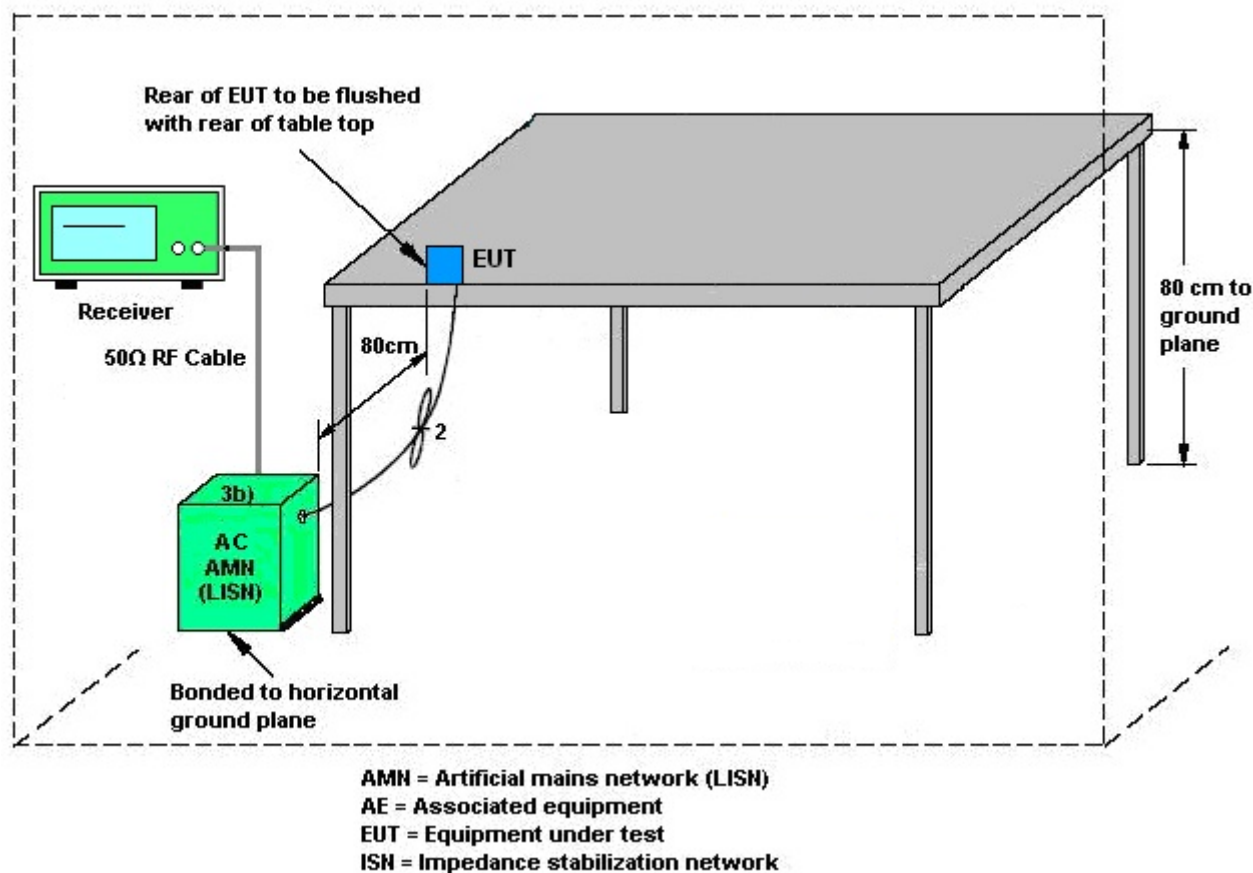

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Nov. 10, 2022	Oct. 11, 2023	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2022	Nov. 10, 2022	Jan. 04, 2023	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2022	Nov. 10, 2022	Jan. 04, 2023	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Oct. 12, 2022	Nov. 28, 2022	Oct. 11, 2023	Radiation (03CH07-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44G,MAX 30dB	Oct. 12, 2022	Nov. 28, 2022	Oct. 11, 2023	Radiation (03CH07-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Nov. 28, 2022	Oct. 15, 2023	Radiation (03CH07-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz~1GHz	Aug. 26, 2022	Nov. 28, 2022	Aug. 25, 2023	Radiation (03CH07-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 06, 2022	Nov. 28, 2022	Apr. 05, 2023	Radiation (03CH07-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Nov. 28, 2022	Jan. 04, 2023	Radiation (03CH07-KS)
Amplifier	SONOMA	310N	413740	9KHz~1GHz	Jan. 05, 2022	Nov. 28, 2022	Jan. 04, 2023	Radiation (03CH07-KS)
Amplifier	EM	EM01G18GA	060834	1Ghz~18Ghz	Oct. 12, 2022	Nov. 28, 2022	Oct. 11, 2023	Radiation (03CH07-KS)
high gain Amplifier	EM	EM01G18GA	060840	1Ghz~18Ghz	Oct. 12, 2022	Nov. 28, 2022	Oct. 11, 2023	Radiation (03CH07-KS)
Amplifier	MITEQ	EM18G40GG A	060728	18~40GHz	Jan. 05, 2022	Nov. 28, 2022	Jan. 04, 2023	Radiation (03CH07-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Nov. 28, 2022	NCR	Radiation (03CH07-KS)
Turn Table	EM	EM 1000-T	N/A	0~360 degree	NCR	Nov. 28, 2022	NCR	Radiation (03CH07-KS)
Antenna Mast	EM	EM 1000-A	N/A	1 m~4 m	NCR	Nov. 28, 2022	NCR	Radiation (03CH07-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 24, 2022	Nov. 16, 2022	May 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	Nov. 16, 2022	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 24, 2022	Nov. 16, 2022	May 23, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	Nov. 16, 2022	Oct. 11, 2023	Conduction (CO01-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	± 0.46 dB
Conducted Emissions	± 0.48 dB
Occupied Channel Bandwidth	± 0.1 %
Conducted Power Spectral Density	± 0.40 dB

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.78dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

----- THE END -----



Appendix A. Conducted Test Results

Bluetooth Low Energy

Test Engineer:	Jiang Jun	Temperature:	20~26	°C
Test Date:	2022.11.10	Relative Humidity:	40~51	%

TEST RESULTS DATA**Peak Power Table**

Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	8.42	30.00	-0.30	8.12	36.00	Pass
BLE	1Mbps	1	19	2440	8.87	30.00	-0.30	8.57	36.00	Pass
BLE	1Mbps	1	39	2480	7.96	30.00	-0.30	7.66	36.00	Pass

TEST RESULTS DATA**Average Power Table****(Reporting Only)**

Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	2.11	8.26
BLE	1Mbps	1	19	2440	2.11	8.55
BLE	1Mbps	1	39	2480	2.11	7.82

Bluetooth Low Energy

Test Engineer:	Jiang Jun	Temperature:	20~26	°C
Test Date:	2022.11.10	Relative Humidity:	40~51	%

TEST RESULTS DATA**Peak Power Table**

Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	8.46	30.00	-0.30	8.16	36.00	Pass
BLE	2Mbps	1	19	2440	8.93	30.00	-0.30	8.63	36.00	Pass
BLE	2Mbps	1	39	2480	7.98	30.00	-0.30	7.68	36.00	Pass

TEST RESULTS DATA**Average Power Table****(Reporting Only)**

Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	2Mbps	1	0	2402	4.96	8.25
BLE	2Mbps	1	19	2440	4.96	8.43
BLE	2Mbps	1	39	2480	4.96	7.71



DTS Bandwidth

Test Result

TestMode	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	2402	0.70	2401.64	2402.35	0.5	PASS
	2440	0.70	2439.65	2440.35	0.5	PASS
	2480	0.71	2479.64	2480.35	0.5	PASS
BLE_2M	2402	1.23	2401.36	2402.60	0.5	PASS
	2440	1.24	2439.36	2440.60	0.5	PASS
	2480	1.24	2479.36	2480.60	0.5	PASS




Test Graphs







BLE_2M_2440

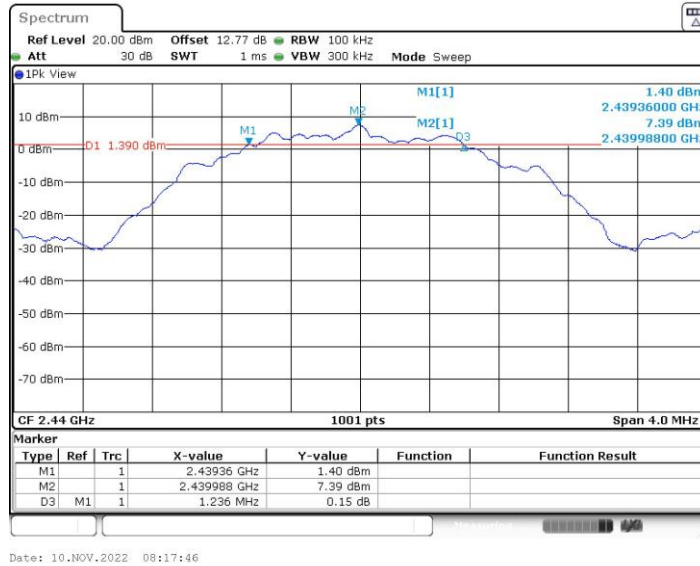

BLE_2M_2480






Occupied Channel Bandwidth


Test Result

TestMode	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	2402	1.039	2401.4885	2402.5275	---	---
	2440	1.039	2439.4885	2440.5275	---	---
	2480	1.039	2479.4885	2480.5275	---	---
BLE_2M	2402	2.062	2400.9850	2403.0470	---	---
	2440	2.066	2438.9850	2441.0509	---	---
	2480	2.062	2478.9850	2481.0470	---	---



Test Graphs

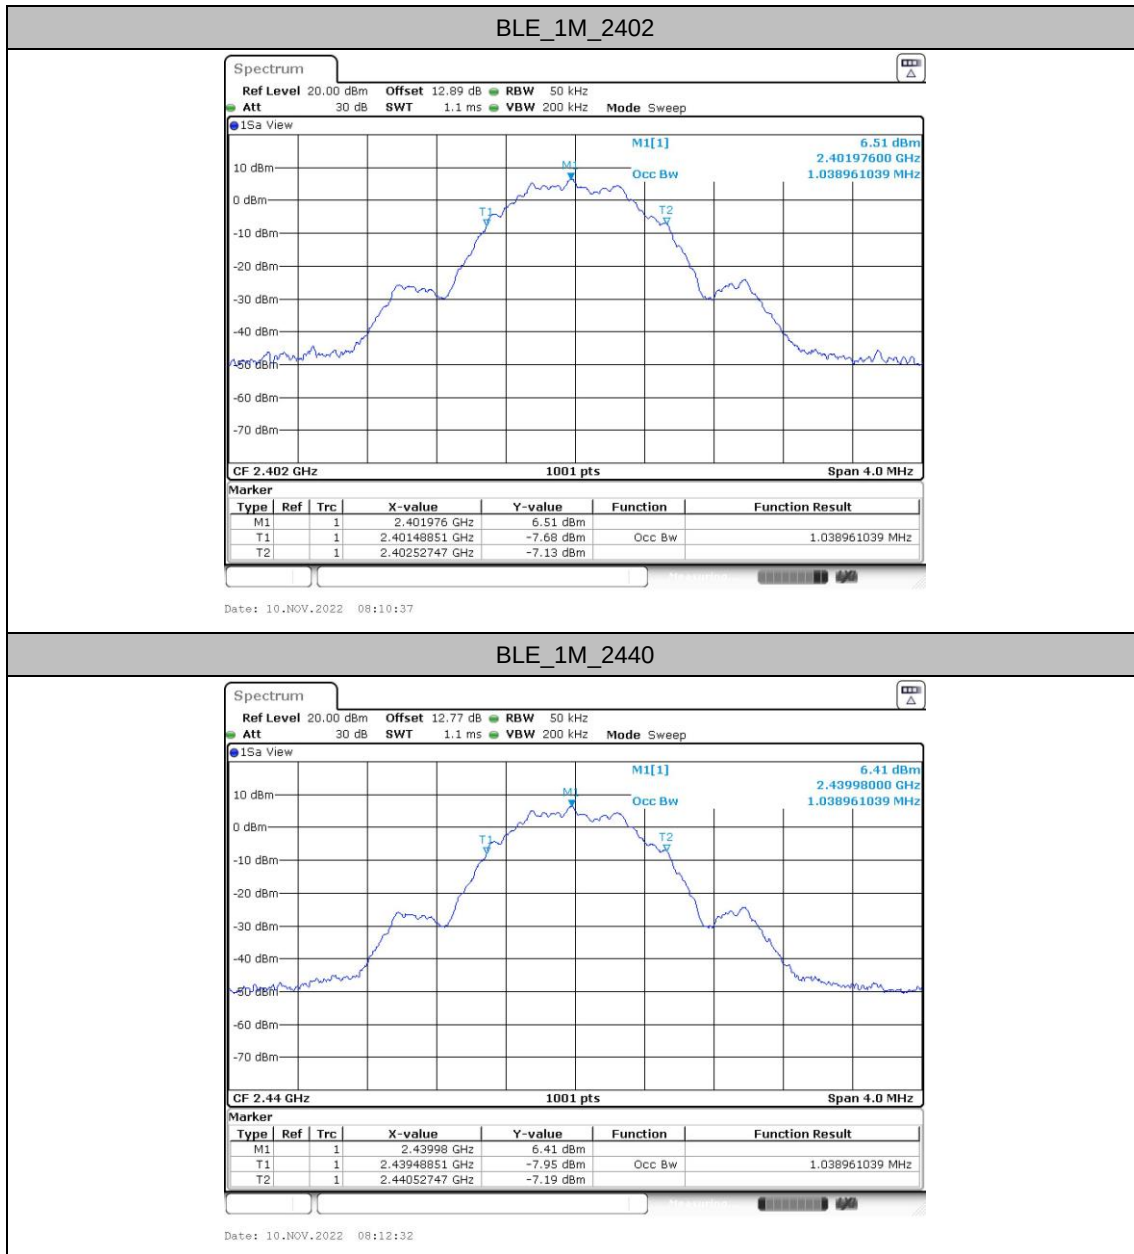

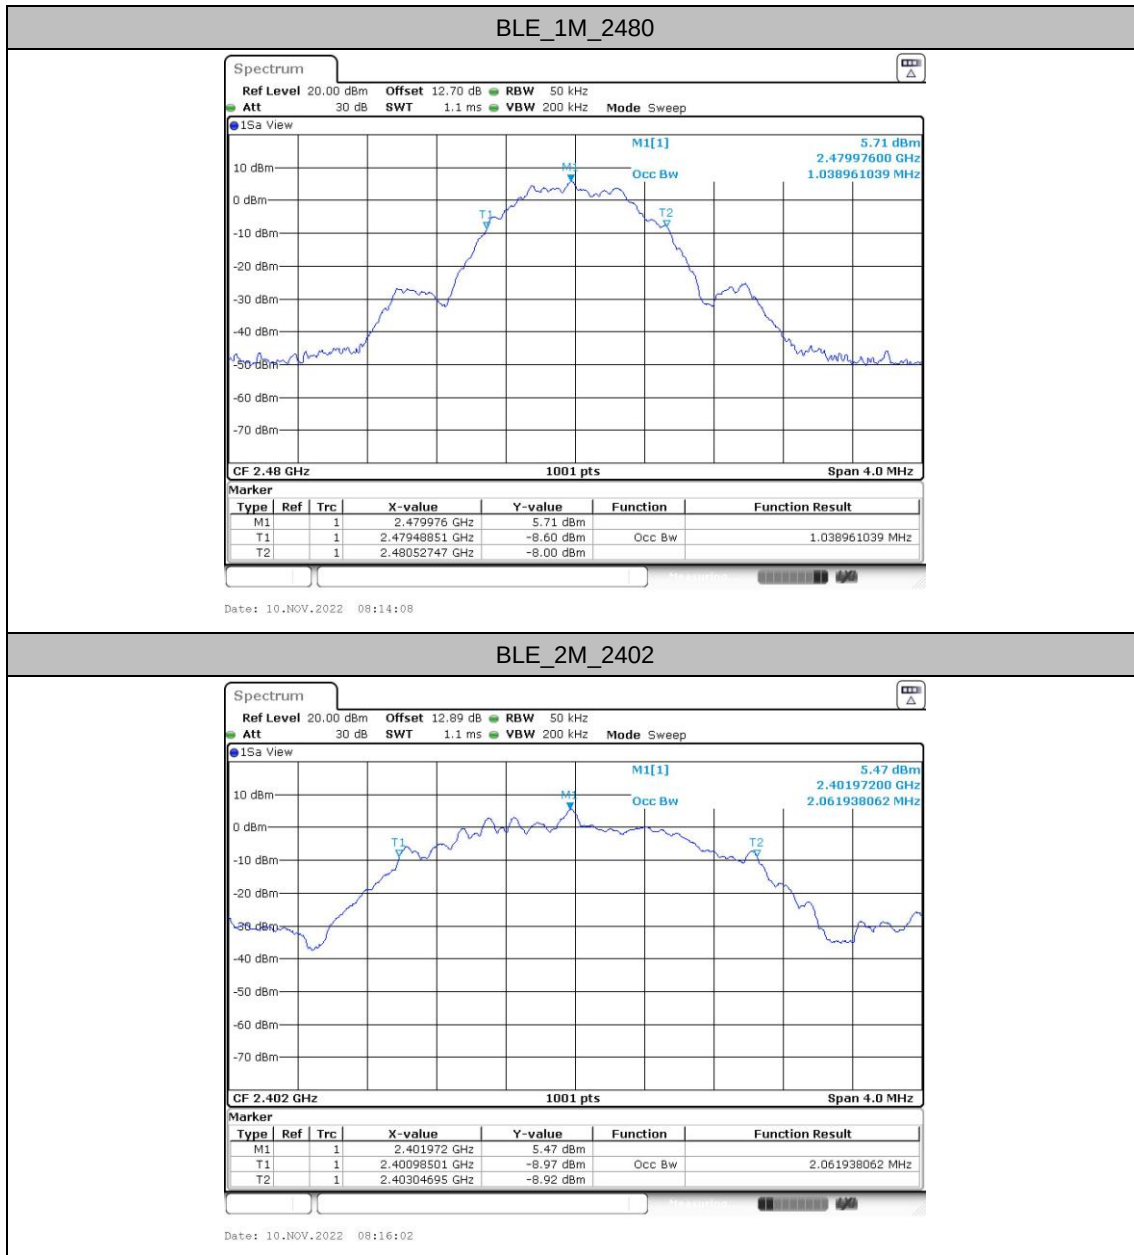






Maximum power spectral density


Test Result


TestMode	Freq(MHz)	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	2402	-6.64	≤8.00	PASS
	2440	-6.67	≤8.00	PASS
	2480	-7.42	≤8.00	PASS
BLE_2M	2402	-8.77	≤8.00	PASS
	2440	-8.82	≤8.00	PASS
	2480	-9.52	≤8.00	PASS



Test Graphs

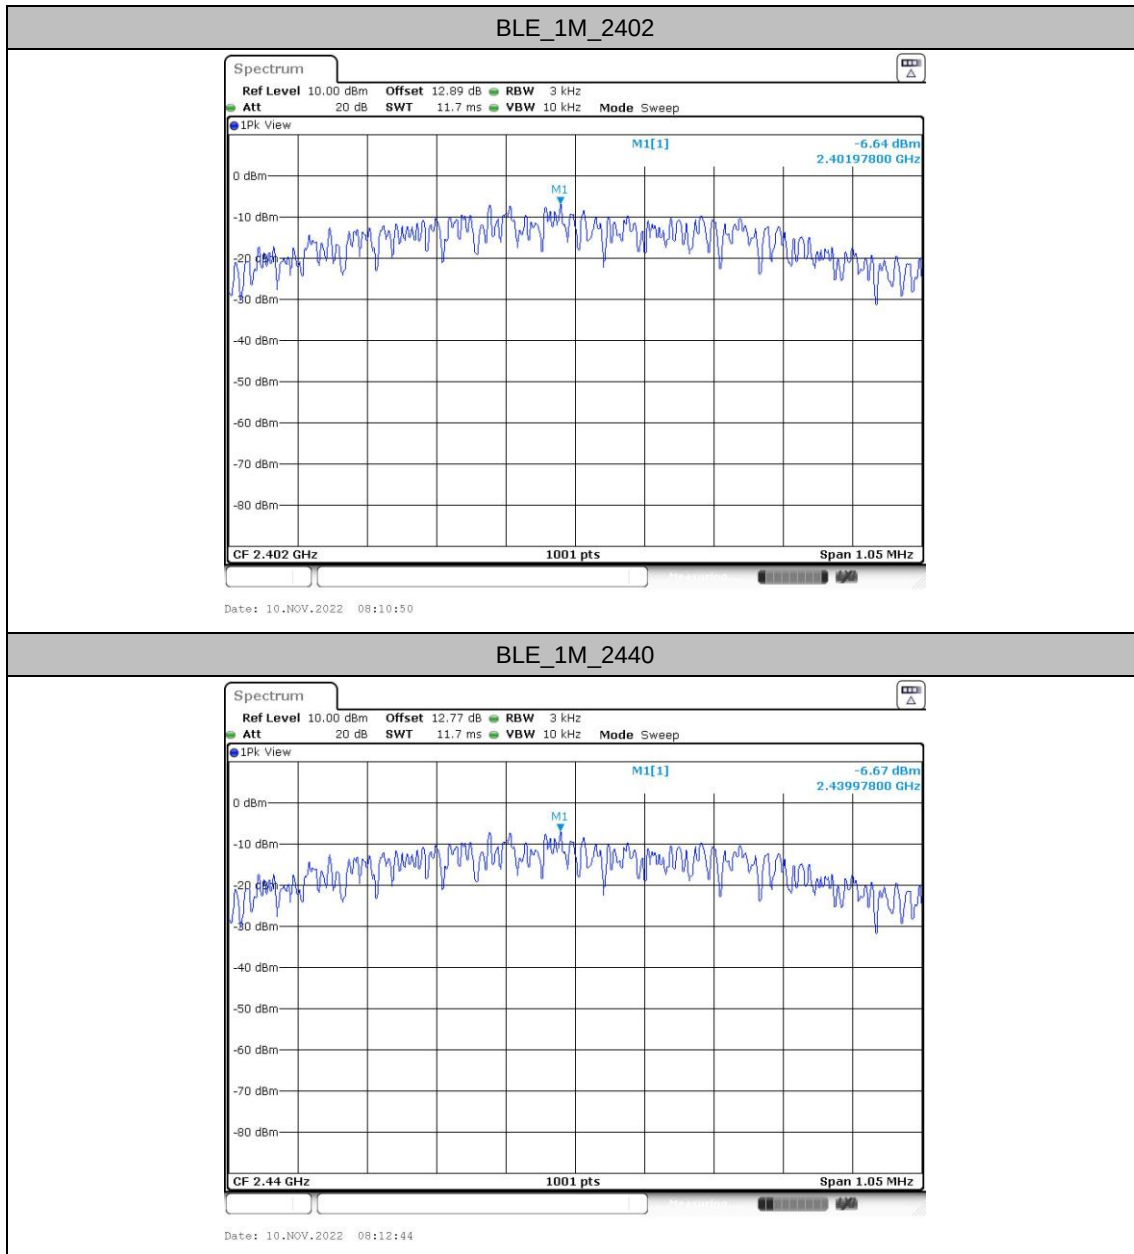

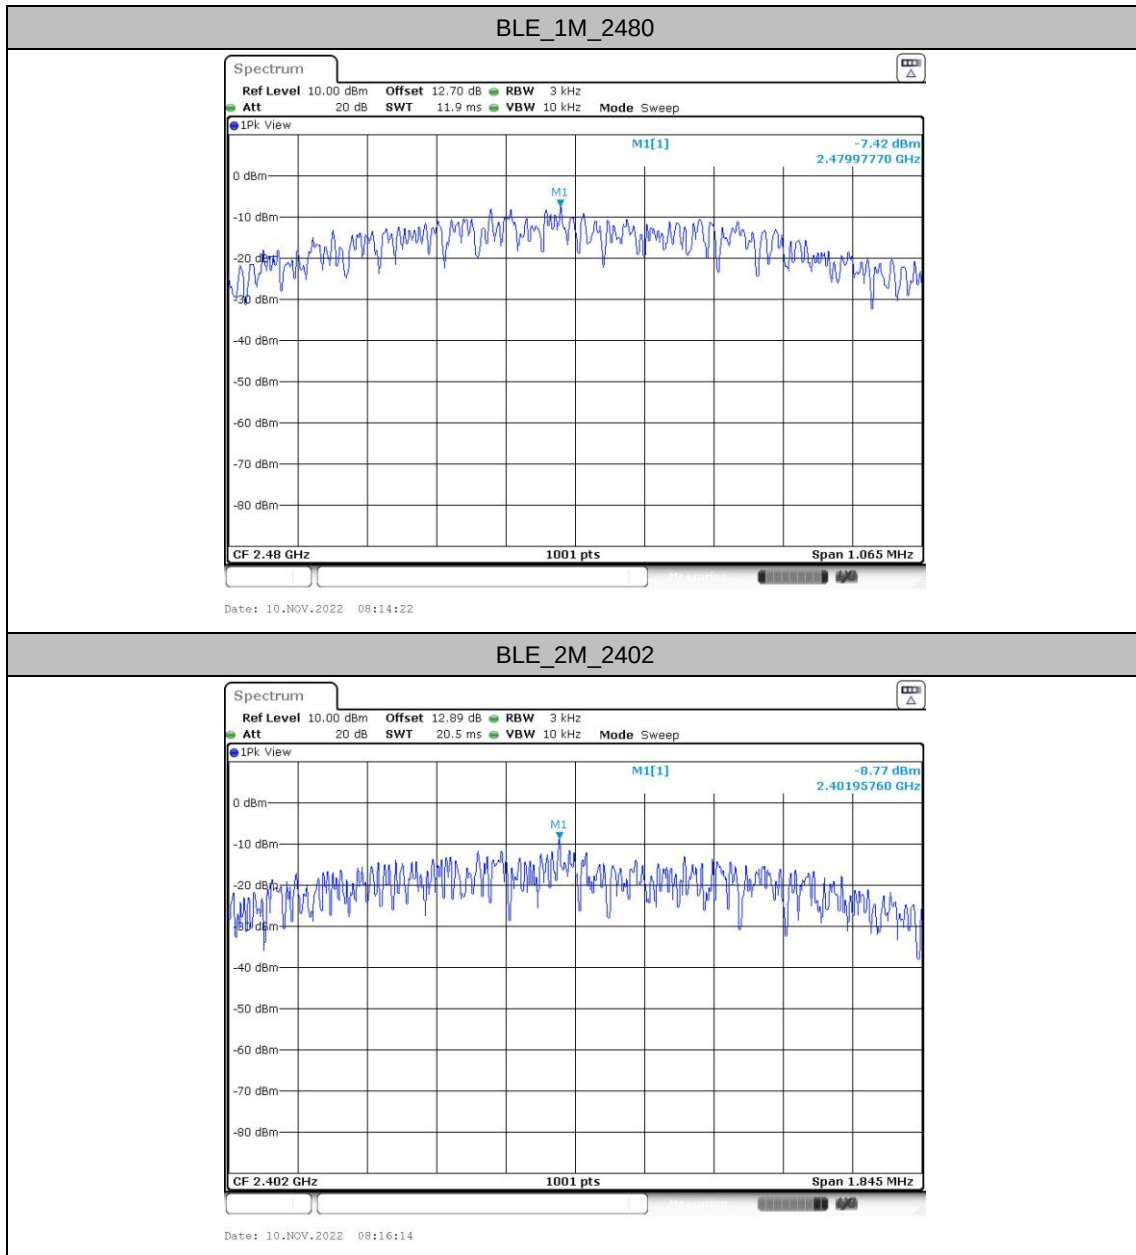

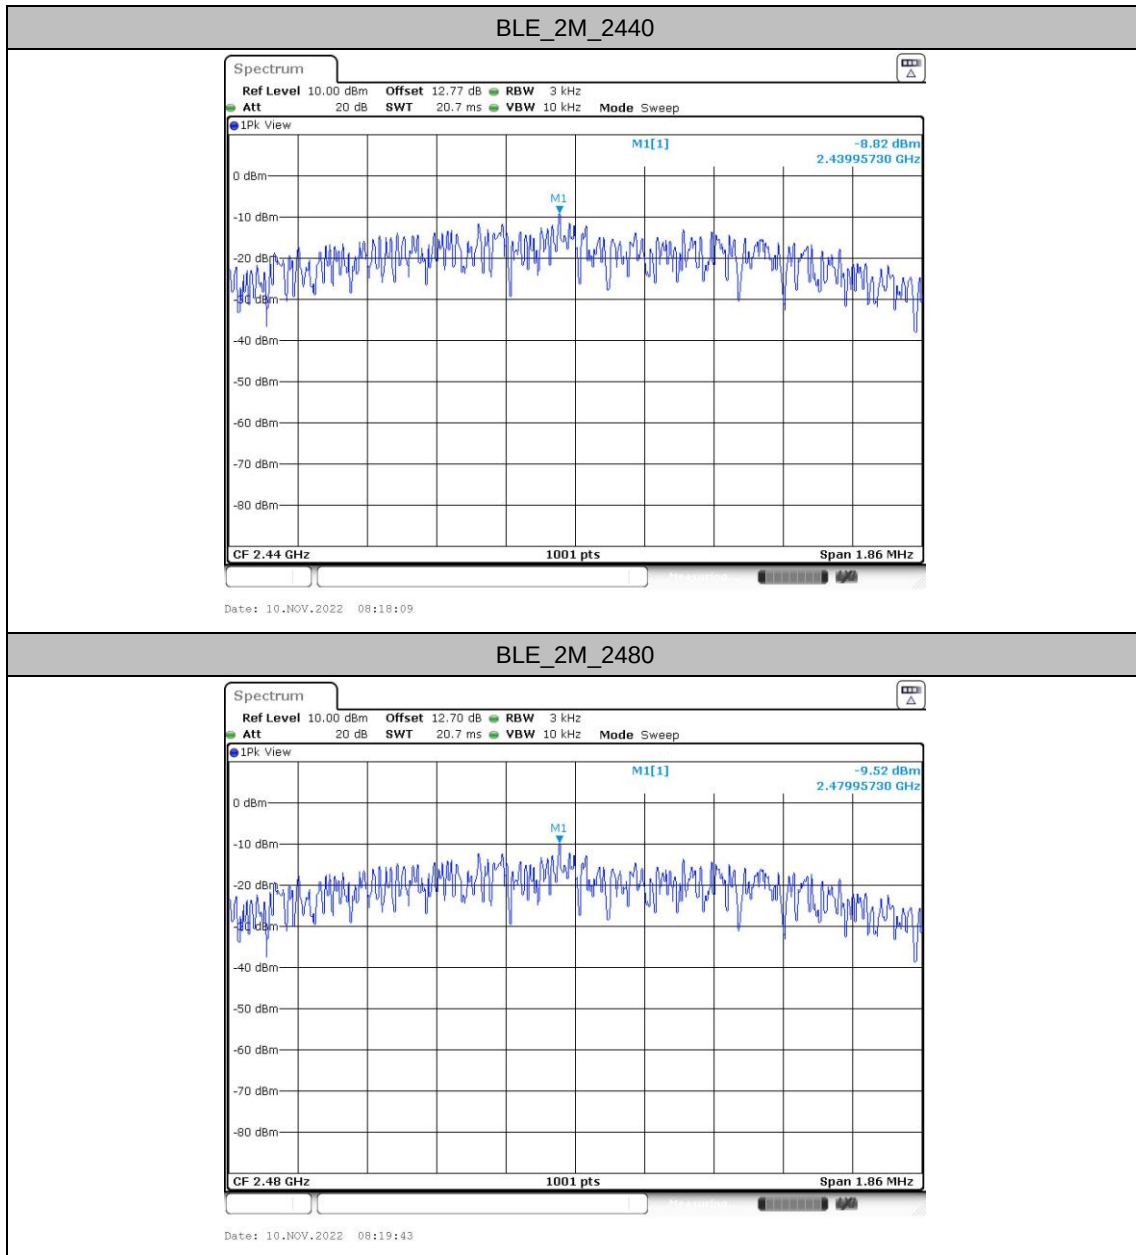




Reference level measurement

Test Result

TestMode	Freq(MHz)	Max.Point[MHz]	Result[dBm/100KHz]
BLE_1M	2402	2401.99	7.70
	2440	2439.99	7.60
	2480	2479.99	6.90
BLE_2M	2402	2401.99	7.46
	2440	2439.99	7.36
	2480	2479.99	6.69




Test Graphs

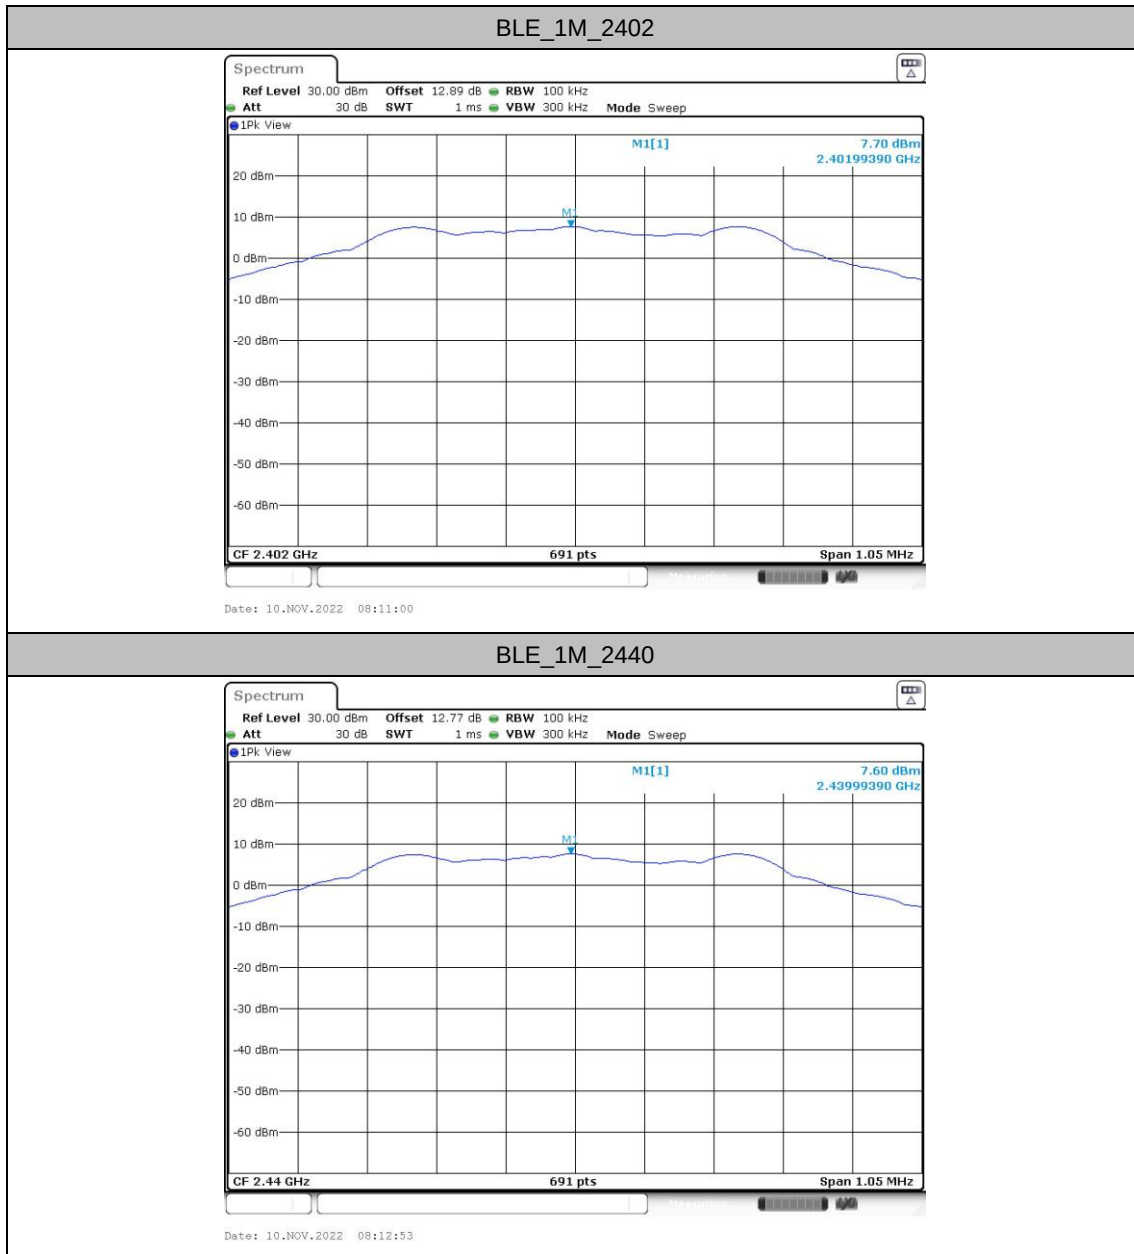




BLE_1M_2480

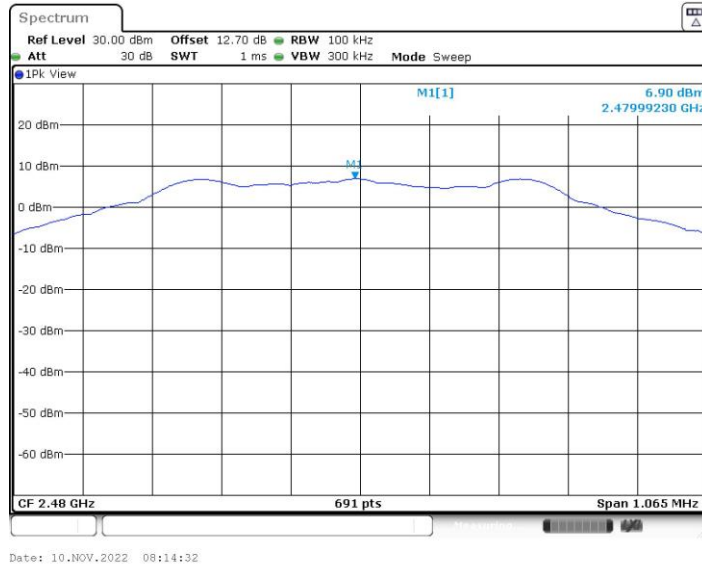


BLE_2M_2402

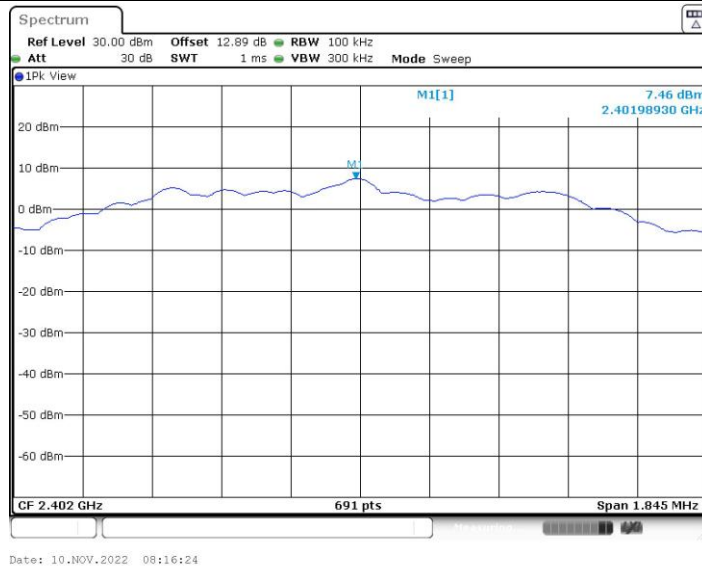




BLE_2M_2440

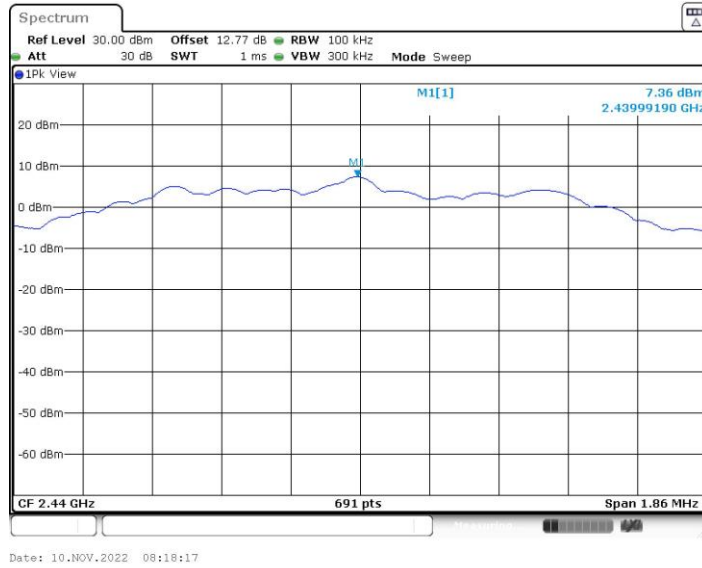

BLE_2M_2480

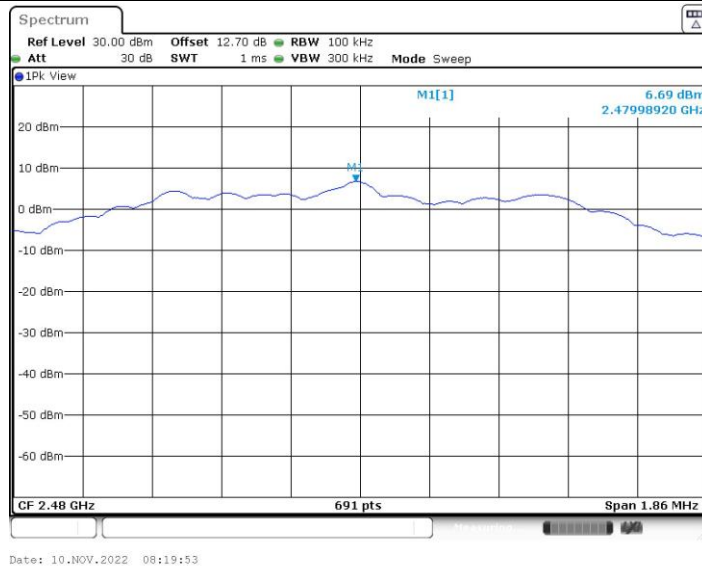




Band edge measurements

Test Result

TestMode	ChName	Freq(MHz)	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
BLE_1M	Low	2402	7.70	-43.42	≤-12.3	PASS
	High	2480	6.90	-42.98	≤-13.1	PASS
BLE_2M	Low	2402	7.46	-24.36	≤-12.54	PASS
	High	2480	6.69	-42.42	≤-13.31	PASS




Test Graphs

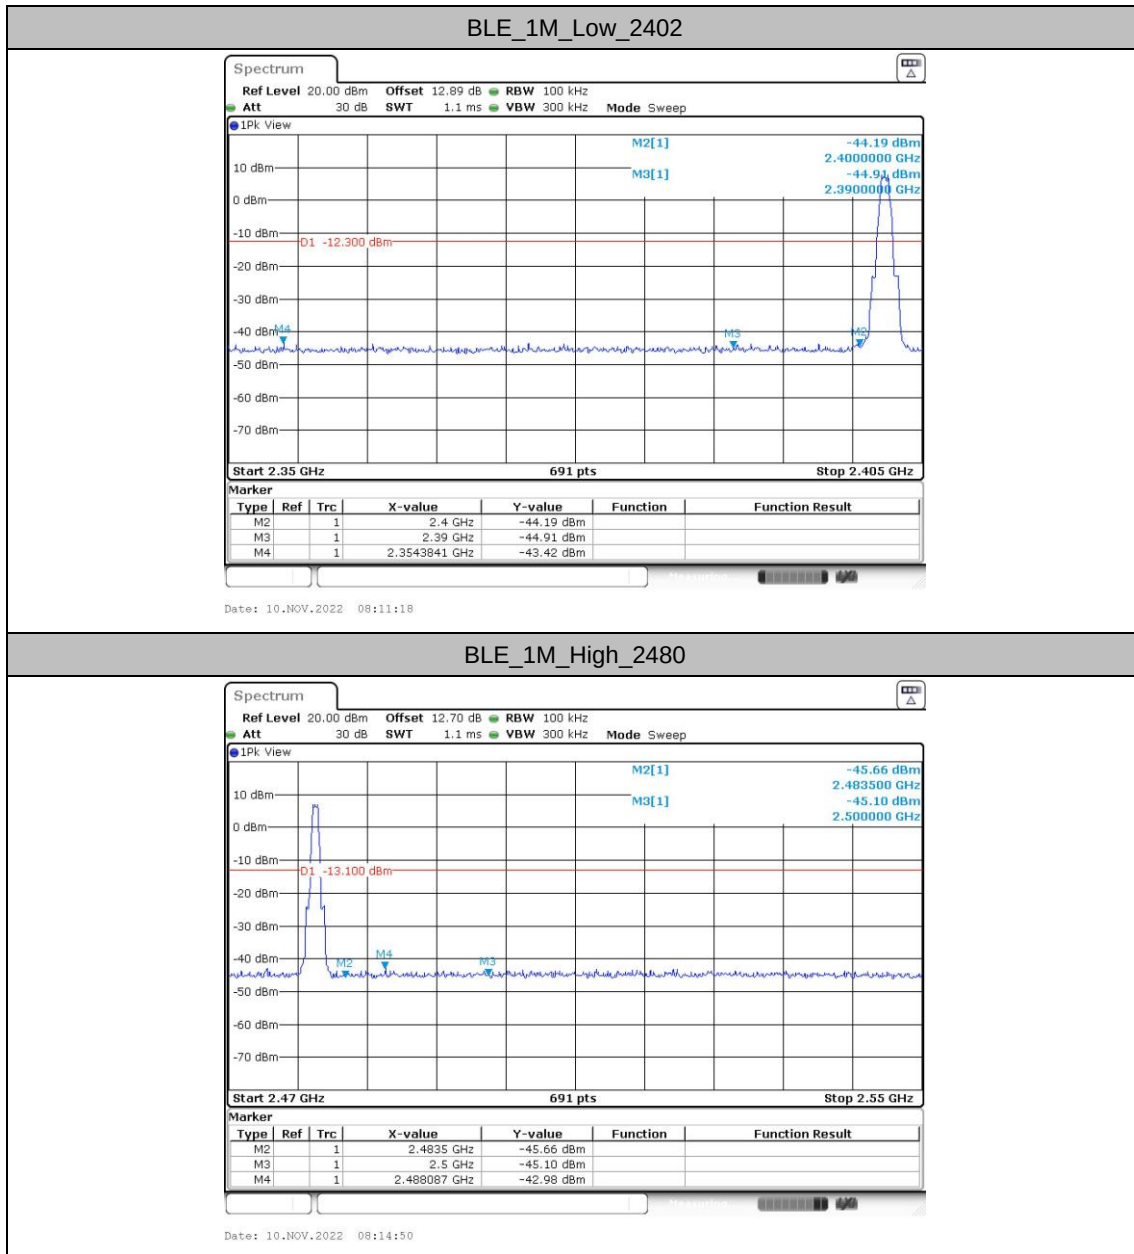




BLE_2M_Low_2402

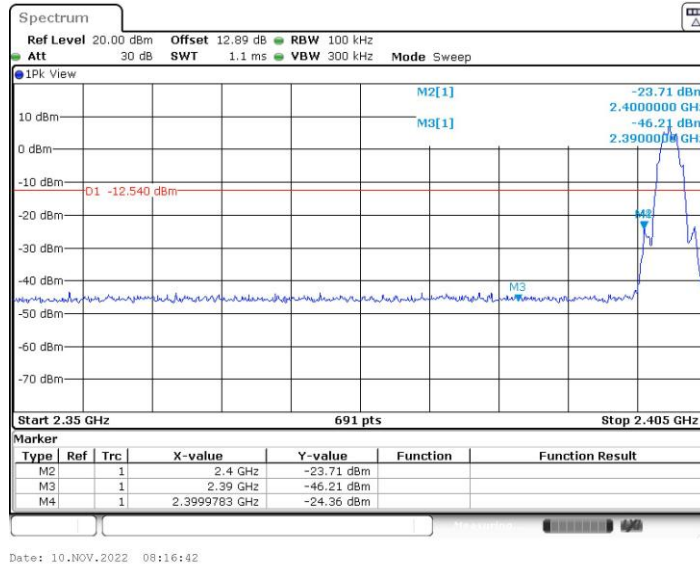

BLE_2M_High_2480

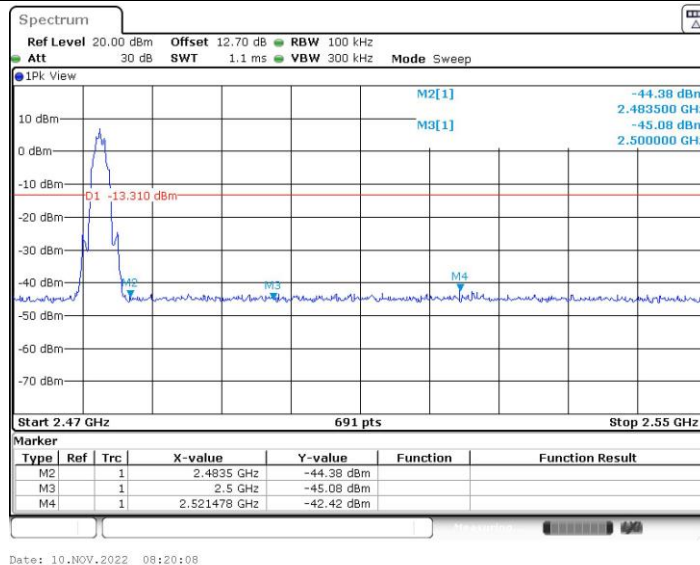




Conducted Spurious Emission

Test Result

TestMode	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
BLE_1M	2402	30~1000	7.70	-54.12	≤-12.3	PASS
		1000~26500	7.70	-45.19	≤-12.3	PASS
	2440	30~1000	7.60	-51.15	≤-12.4	PASS
		1000~26500	7.60	-46.03	≤-12.4	PASS
	2480	30~1000	6.90	-52.24	≤-13.1	PASS
		1000~26500	6.90	-45.52	≤-13.1	PASS
BLE_2M	2402	30~1000	7.46	-45.7	≤-12.54	PASS
		1000~26500	7.46	-46.1	≤-12.54	PASS
	2440	30~1000	7.36	-51.64	≤-12.64	PASS
		1000~26500	7.36	-45.35	≤-12.64	PASS
	2480	30~1000	6.69	-55.01	≤-13.31	PASS
		1000~26500	6.69	-45.41	≤-13.31	PASS




Test Graphs

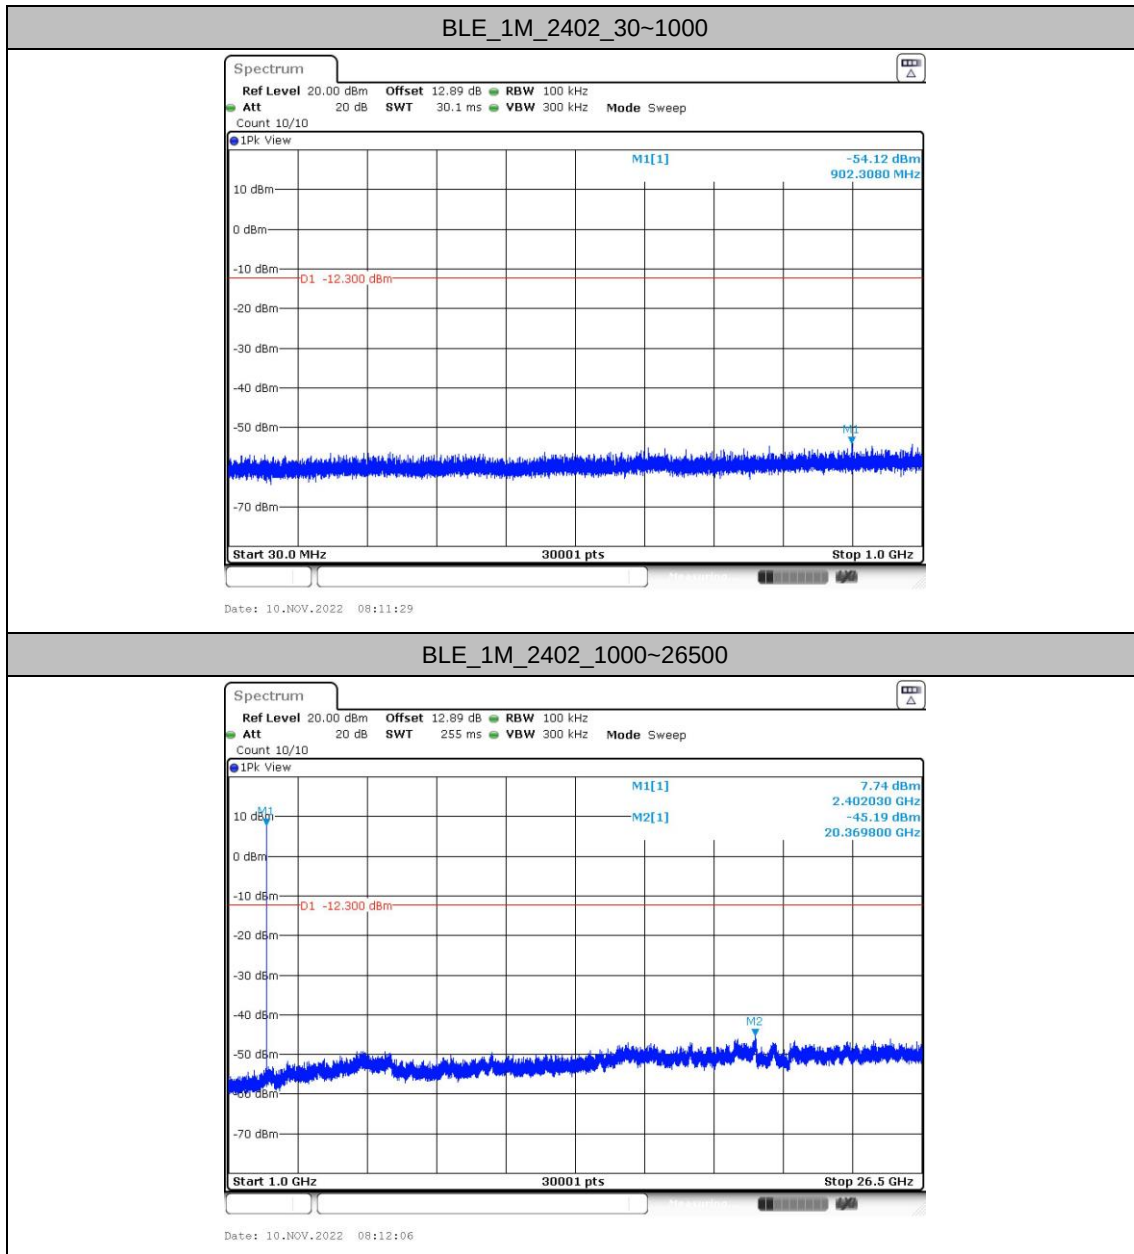




BLE_1M_2440_30~1000

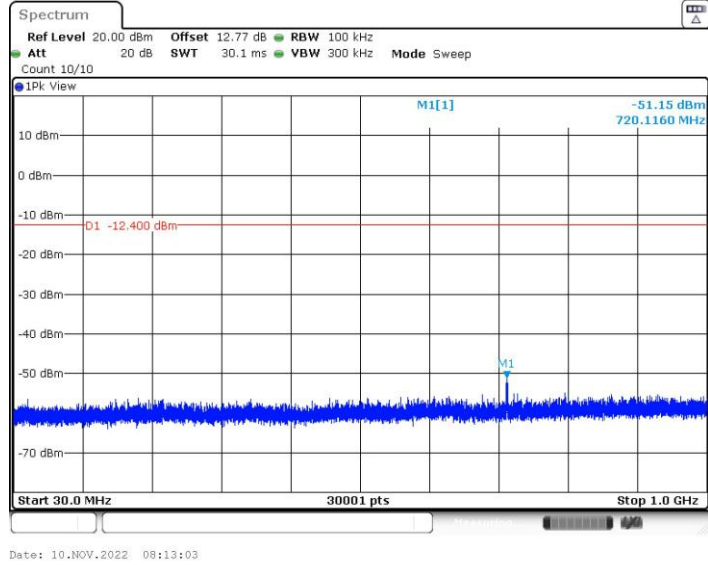


BLE_1M_2440_1000~26500

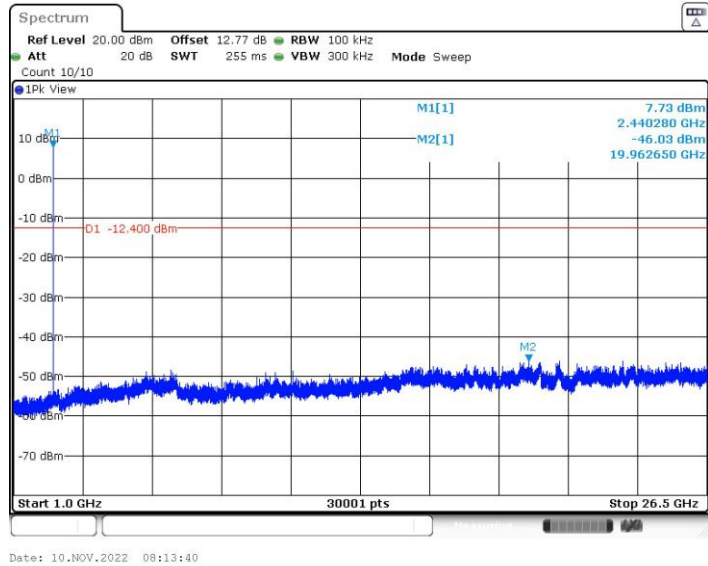




BLE_1M_2480_30~1000

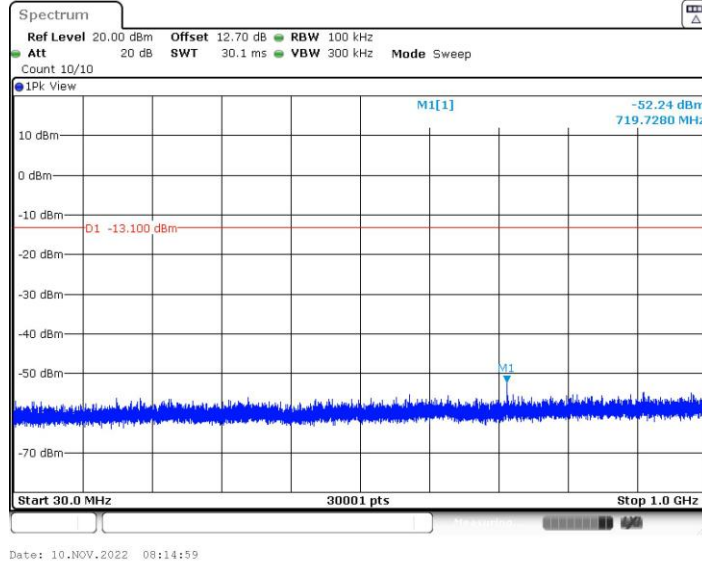


BLE_1M_2480_1000~26500

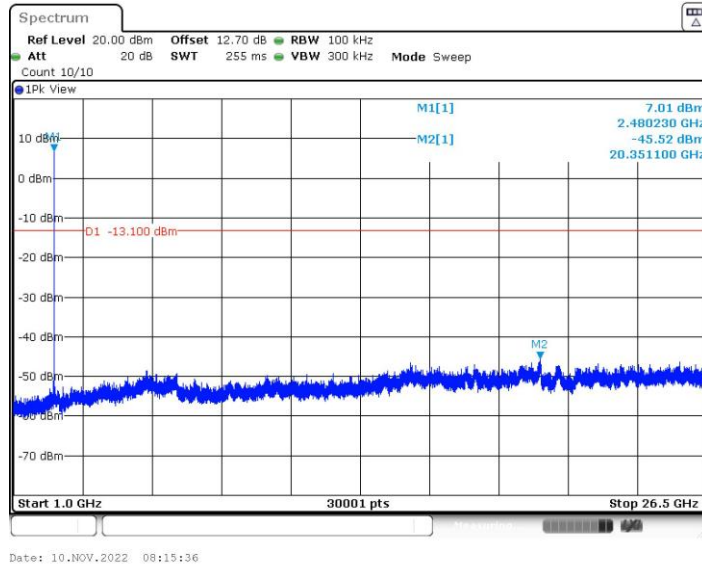




BLE_2M_2402_30~1000

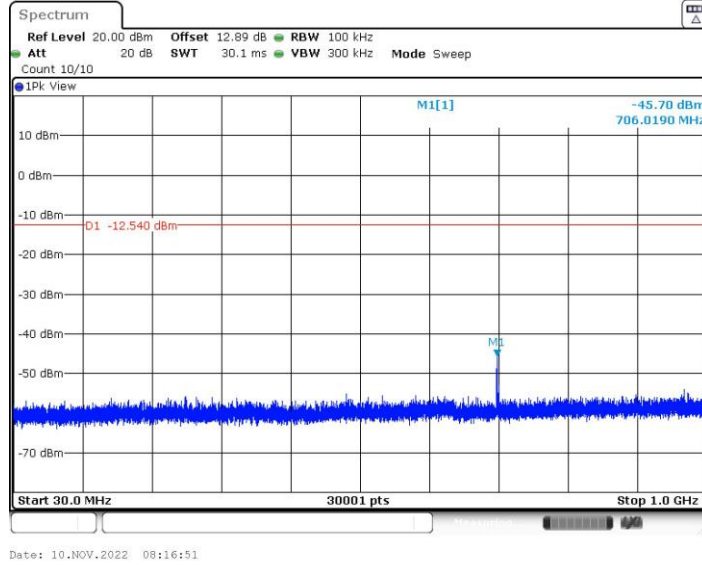


BLE_2M_2402_1000~26500

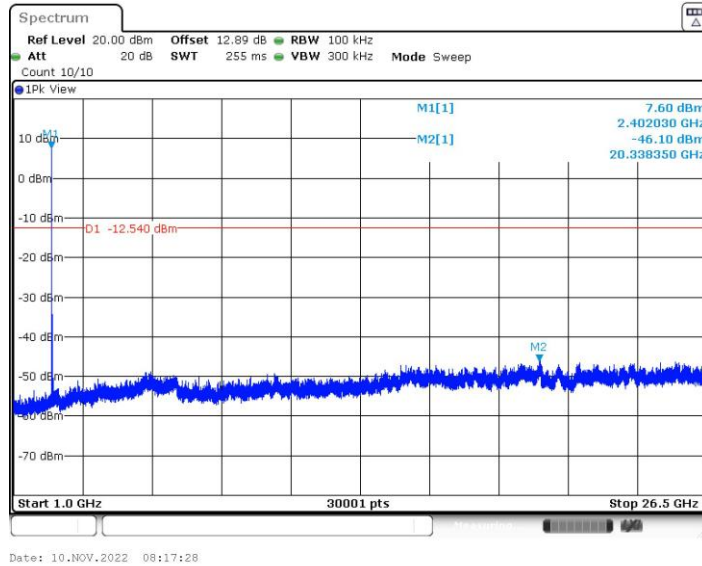




BLE_2M_2440_30~1000

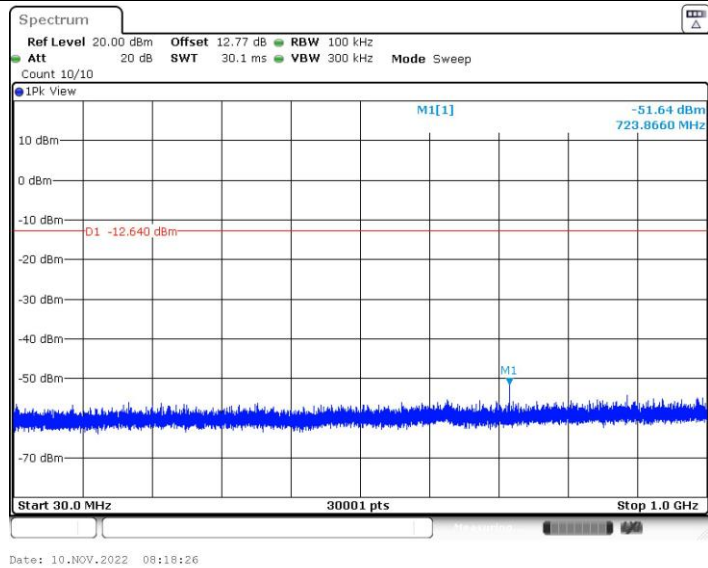


BLE_2M_2440_1000~26500

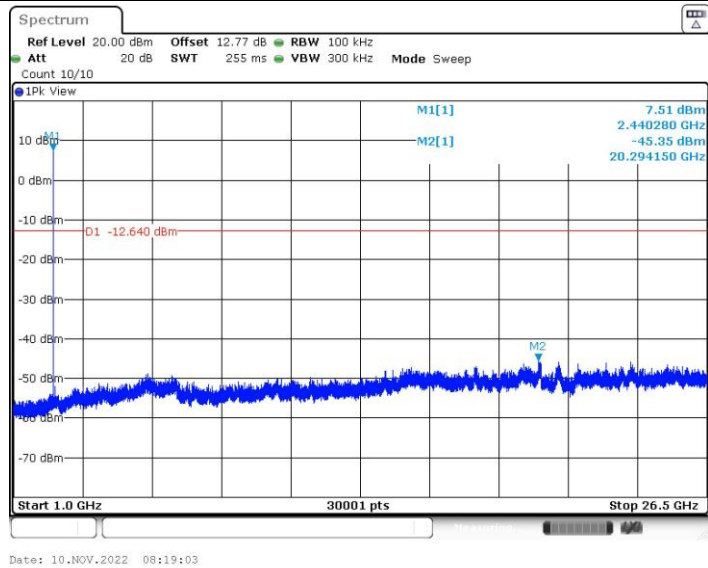




BLE_2M_2480_30~1000

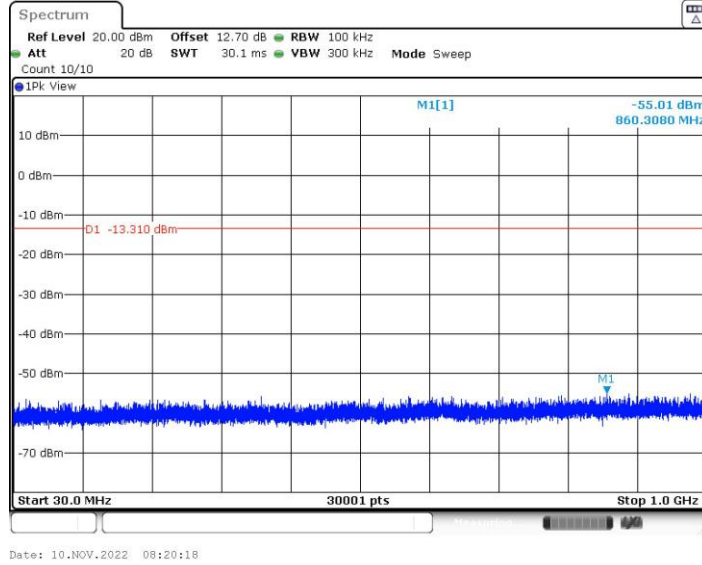


BLE_2M_2480_1000~26500

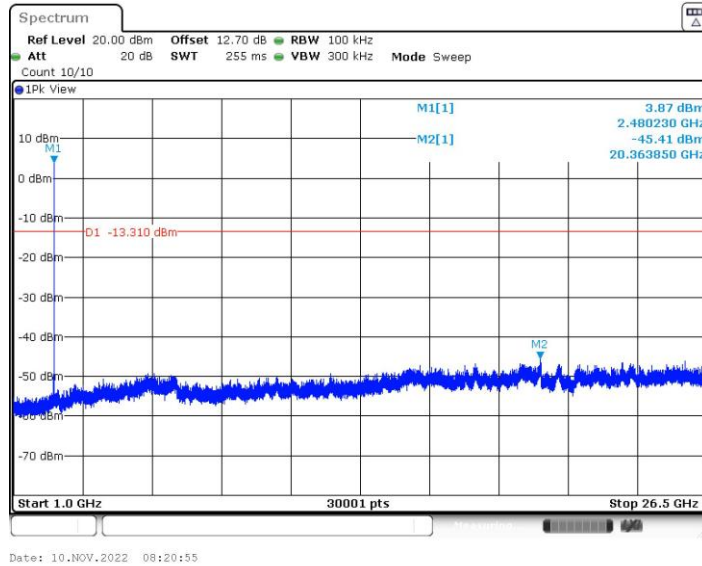



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

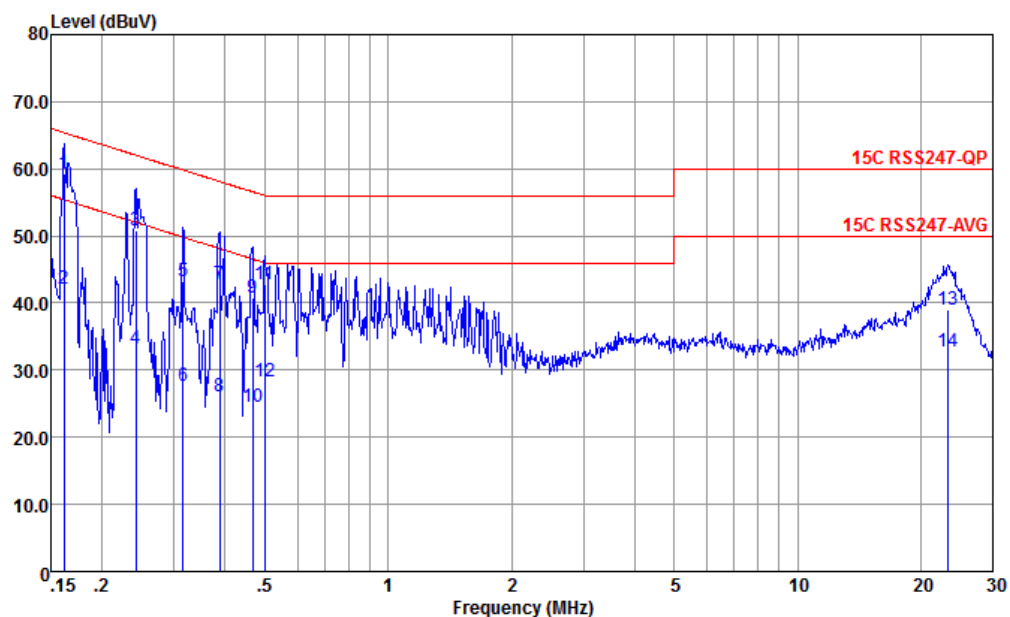


Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-LINE LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.162	59.31	-6.07	65.38	48.80	0.06	10.45	QP
2	0.162	42.11	-13.27	55.38	31.60	0.06	10.45	Average
3	0.242	50.88	-11.16	62.04	40.50	0.04	10.34	QP
4	0.242	33.28	-18.76	52.04	22.90	0.04	10.34	Average
5	0.315	43.15	-16.69	59.84	32.80	0.05	10.30	QP
6	0.315	27.55	-22.29	49.84	17.20	0.05	10.30	Average
7	0.387	42.78	-15.34	58.12	32.50	0.01	10.27	QP
8	0.387	26.08	-22.04	48.12	15.80	0.01	10.27	Average
9	0.466	40.73	-15.85	56.58	30.51	-0.02	10.24	QP
10	0.466	24.43	-22.15	46.58	14.21	-0.02	10.24	Average
11	0.499	42.70	-13.31	56.01	32.50	-0.03	10.23	QP
12	0.499	28.40	-17.61	46.01	18.20	-0.03	10.23	Average
13	23.263	39.01	-20.99	60.00	28.79	-0.33	10.55	QP
14	23.263	32.81	-17.19	50.00	22.59	-0.33	10.55	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

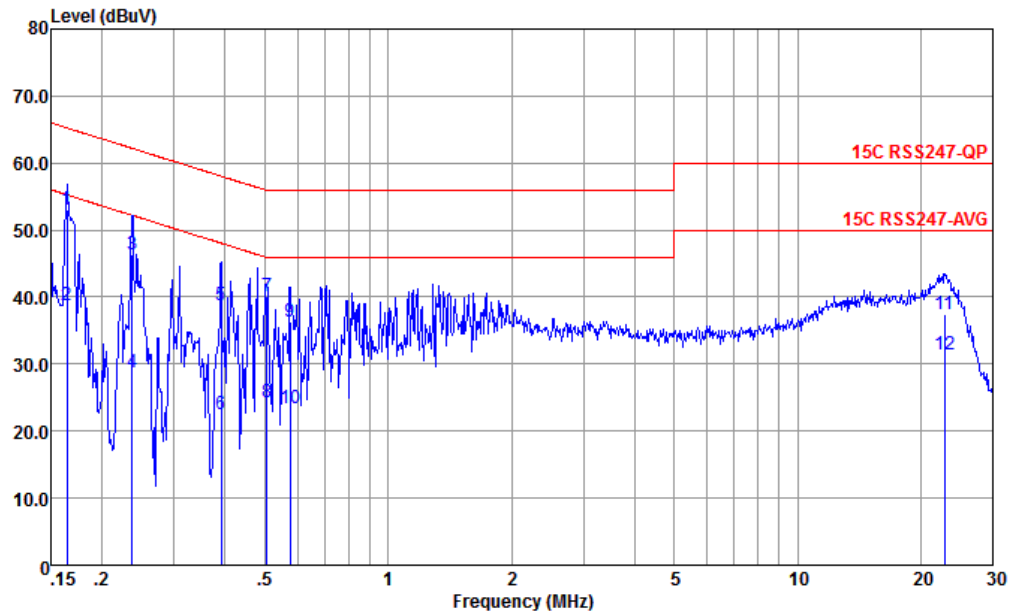

Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-NEUTRAL NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1 *	0.164	53.08	-12.17	65.25	42.60	0.04	10.44	QP
2	0.164	38.78	-16.47	55.25	28.30	0.04	10.44	Average
3	0.237	46.25	-15.97	62.22	35.90	0.01	10.34	QP
4	0.237	28.85	-23.37	52.22	18.50	0.01	10.34	Average
5	0.391	38.70	-19.33	58.03	28.50	-0.07	10.27	QP
6	0.391	22.40	-25.63	48.03	12.20	-0.07	10.27	Average
7	0.505	40.05	-15.95	56.00	29.89	-0.08	10.24	QP
8	0.505	24.35	-21.65	46.00	14.19	-0.08	10.24	Average
9	0.576	36.35	-19.65	56.00	26.19	-0.08	10.24	QP
10	0.576	23.45	-22.55	46.00	13.29	-0.08	10.24	Average
11	22.896	37.33	-22.67	60.00	27.10	-0.31	10.54	QP
12	22.896	31.43	-18.57	50.00	21.20	-0.31	10.54	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Carry Xu	Relative Humidity :	41 ~ 42 %
		Temperature :	22 ~ 23 °C

Radiated Spurious Emission Test Modes





Mode	Band (MHz)	Modulation	Channel	Frequency	Data Rate
Mode 1	2400-2483.5	Bluetooth-LE 1M_GSKF	00	2402	1Mbps
Mode 2	2400-2483.5	Bluetooth-LE 1M_GSKF	19	2440	1Mbps
Mode 3	2400-2483.5	Bluetooth-LE 1M_GSKF	39	2480	1Mbps
Mode 4	2400-2483.5	Bluetooth-LE 2M_GSKF	00	2402	2Mbps
Mode 5	2400-2483.5	Bluetooth-LE 2M_GSKF	19	2440	2Mbps
Mode 6	2400-2483.5	Bluetooth-LE 2M_GSKF	39	2480	2Mbps



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
Mode 1	Bluetooth-LE 1M	00	2375.91	43.87	54.00	-10.13	V	AVERAGE	Pass	Band Edge
Mode 2	Bluetooth-LE 1M	19	7320.00	45.06	74.00	-28.94	V	PEAK	Pass	Harmonic
Mode 3	Bluetooth-LE 1M	39	2483.80	45.34	54.00	-8.66	V	AVERAGE	Pass	Band Edge
Mode 4	Bluetooth-LE 2M	00	2383.06	44.61	54.00	-9.39	H	AVERAGE	Pass	Band Edge
Mode 5	Bluetooth-LE 2M	19	7320.00	44.09	74.00	-29.91	V	PEAK	Pass	Harmonic
Mode 6	Bluetooth-LE 2M	39	2483.50	50.54	54.00	-3.46	V	AVERAGE	Pass	Band Edge

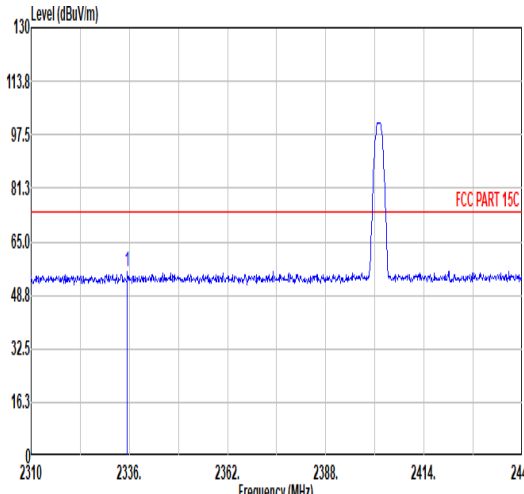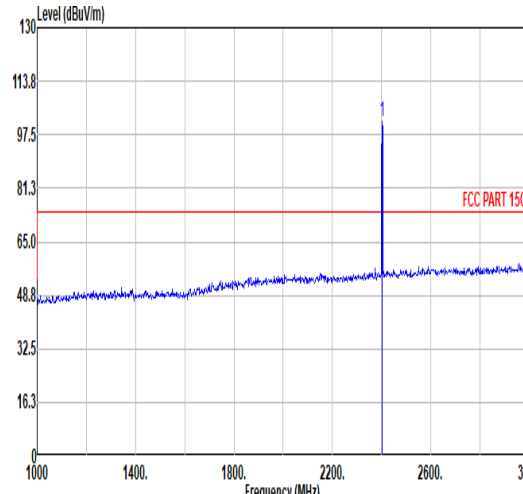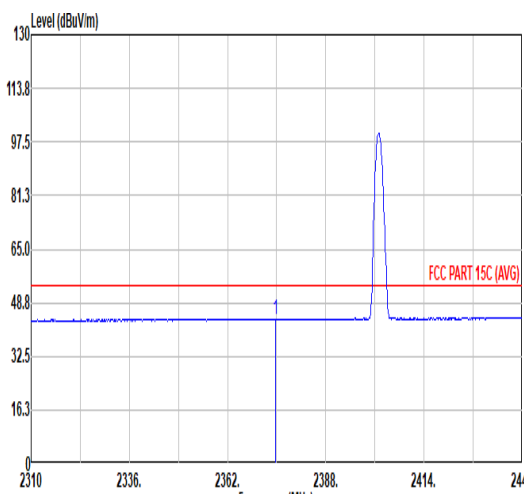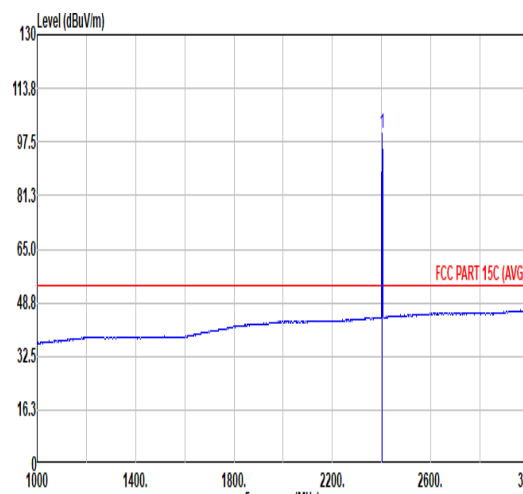

Mode	1																																																						
	Band Edge																																																						
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																						
Pol.	Horizontal						Fundamental																																																
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2335.48</td><td>56.10</td><td>74.00</td><td>-17.90</td><td>42.14</td><td>31.86</td><td>7.03</td><td>30.93</td><td>6.00</td><td>163</td><td>41</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2335.48	56.10	74.00	-17.90	42.14	31.86	7.03	30.93	6.00	163	41
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2335.48	56.10	74.00	-17.90	42.14	31.86	7.03	30.93	6.00	163	41	PEAK																																											
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>101.35</td><td>-----</td><td>-----</td><td>87.09</td><td>32.00</td><td>7.13</td><td>30.87</td><td>6.00</td><td>163</td><td>41</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	101.35	-----	-----	87.09	32.00	7.13	30.87	6.00	163	41
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2402.00	101.35	-----	-----	87.09	32.00	7.13	30.87	6.00	163	41	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2374.74</td><td>43.87</td><td>54.00</td><td>-10.13</td><td>29.74</td><td>31.94</td><td>7.09</td><td>30.90</td><td>6.00</td><td>163</td><td>41</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2374.74	43.87	54.00	-10.13	29.74	31.94	7.09	30.90	6.00	163	41
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2374.74	43.87	54.00	-10.13	29.74	31.94	7.09	30.90	6.00	163	41	AVERAGE																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>100.20</td><td>-----</td><td>-----</td><td>85.94</td><td>32.00</td><td>7.13</td><td>30.87</td><td>6.00</td><td>163</td><td>41</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	100.20	-----	-----	85.94	32.00	7.13	30.87	6.00	163	41
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2402.00	100.20	-----	-----	85.94	32.00	7.13	30.87	6.00	163	41	AVERAGE																																											



Mode	1										
	Band Edge										
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz										
Pol.	Fundamental										
Peak	<										



Mode	1																																																																																																			
	Harmonic																																																																																																			
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																																			
Pol.	Horizontal						Vertical																																																																																													
Peak	Horizontal Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes a blue signal line, a red limit line at 81.3 dBuV/m (FCC PART 15C), and a red average line at 65.0 dBuV/m (FCC PART 15C (AVG)). The signal level is approximately 48.8 dBuV/m at 4804.00 MHz. <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4804.00</td><td>42.16</td><td>74.00</td><td>-31.84</td><td>62.78</td><td>34.52</td><td>10.29</td><td>65.43</td><td>0.00</td><td>300</td><td>360</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	42.16	74.00	-31.84	62.78	34.52	10.29	65.43	0.00	300	360	PEAK	Vertical Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes a blue signal line, a red limit line at 81.3 dBuV/m (FCC PART 15C), and a red average line at 65.0 dBuV/m (FCC PART 15C (AVG)). The signal level is approximately 48.8 dBuV/m at 4804.00 MHz. <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4804.00</td><td>42.18</td><td>74.00</td><td>-31.82</td><td>62.80</td><td>34.52</td><td>10.29</td><td>65.43</td><td>0.00</td><td>100</td><td>360</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	42.18	74.00	-31.82	62.80	34.52	10.29	65.43	0.00	100	360	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	4804.00	42.16	74.00	-31.84	62.78	34.52	10.29	65.43	0.00	300	360	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	4804.00	42.18	74.00	-31.82	62.80	34.52	10.29	65.43	0.00	100	360	PEAK																																																																																								



Mode	2																																																																																																																													
	Harmonic																																																																																																																													
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																							
Peak	Horizontal Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a blue signal line with two vertical markers labeled 1 and 2. Two horizontal red lines represent FCC Part 15C limits: FCC PART 15C (upper) and FCC PART 15C (AVG) (lower). The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 3000 to 18000 MHz.						Vertical Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a blue signal line with two vertical markers labeled 1 and 2. Two horizontal red lines represent FCC Part 15C limits: FCC PART 15C (upper) and FCC PART 15C (AVG) (lower). The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 3000 to 18000 MHz.																																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>42.81</td><td>74.00</td><td>-31.19</td><td>63.21</td><td>34.65</td><td>10.39</td><td>65.44</td><td>0.00</td><td>300</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>7320.00</td><td>44.01</td><td>74.00</td><td>-29.99</td><td>59.88</td><td>36.56</td><td>12.82</td><td>65.25</td><td>0.00</td><td>300</td><td>360</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	42.81	74.00	-31.19	63.21	34.65	10.39	65.44	0.00	300	360	PEAK	2	7320.00	44.01	74.00	-29.99	59.88	36.56	12.82	65.25	0.00	300	360	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>43.35</td><td>74.00</td><td>-30.65</td><td>63.75</td><td>34.65</td><td>10.39</td><td>65.44</td><td>0.00</td><td>100</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>7320.00</td><td>45.06</td><td>74.00</td><td>-28.94</td><td>60.93</td><td>36.56</td><td>12.82</td><td>65.25</td><td>0.00</td><td>100</td><td>360</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	43.35	74.00	-30.65	63.75	34.65	10.39	65.44	0.00	100	360	PEAK	2	7320.00	45.06	74.00	-28.94	60.93	36.56	12.82	65.25	0.00	100	360	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4880.00	42.81	74.00	-31.19	63.21	34.65	10.39	65.44	0.00	300	360	PEAK																																																																																																																		
2	7320.00	44.01	74.00	-29.99	59.88	36.56	12.82	65.25	0.00	300	360	PEAK																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4880.00	43.35	74.00	-30.65	63.75	34.65	10.39	65.44	0.00	100	360	PEAK																																																																																																																		
2	7320.00	45.06	74.00	-28.94	60.93	36.56	12.82	65.25	0.00	100	360	PEAK																																																																																																																		



3

Mode

Band Edge


2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz

Pol.


Horizontal

Fundamental

Peak

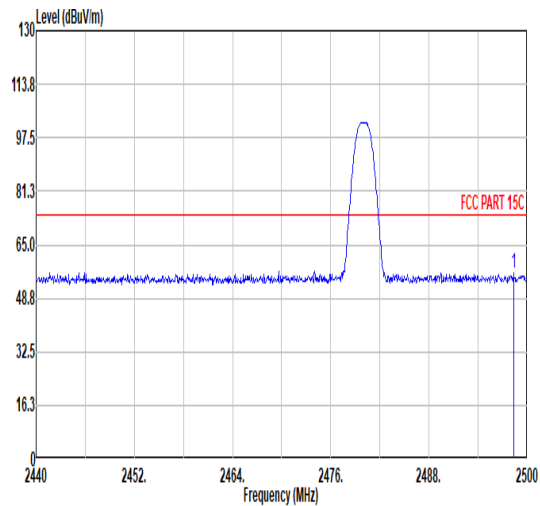


Freq	Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	cm	deg			
1	2498.32	56.63	74.00	-17.37	41.76	32.15	7.32	30.60	6.00	371	307	PEAK					

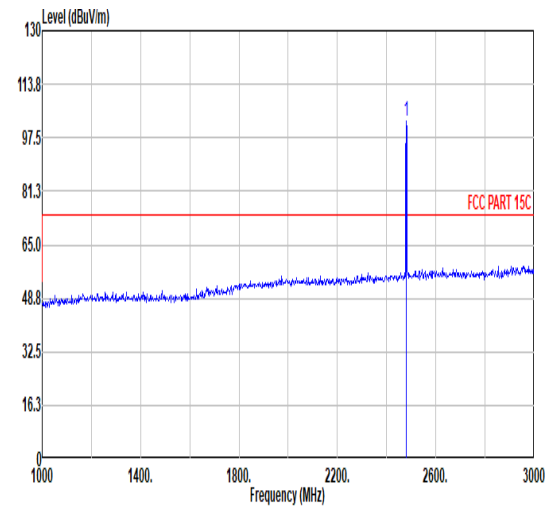


Freq	Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	cm	deg			
1	2480.00	102.39	-----	-----	87.65	32.12	7.28	30.66	6.00	371	307	PEAK					

Avg

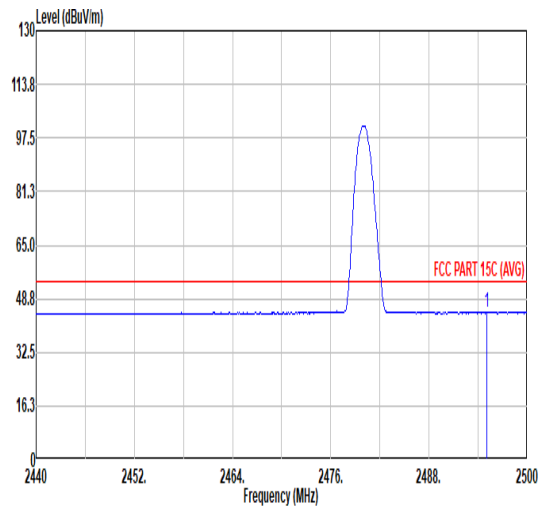

Freq	Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	cm	deg			
1	2495.08	44.82	54.00	-9.18	29.98	32.14	7.31	30.61	6.00	371	307	AVERAGE					

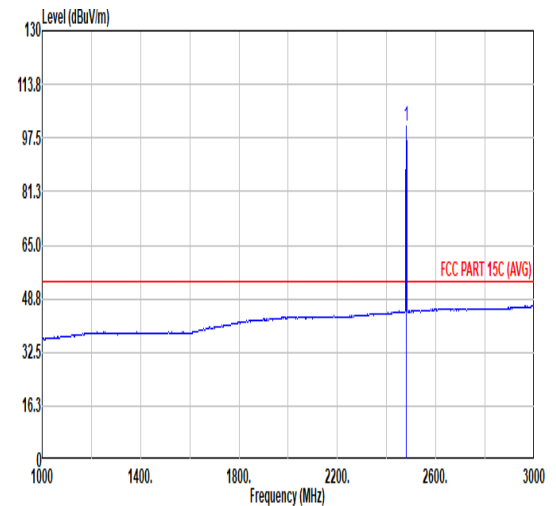

Freq	Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	cm	deg			
1	2480.00	100.85	-----	-----	86.11	32.12	7.28	30.66	6.00	371	307	AVERAGE					



3

Mode

Band Edge


2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz

Pol.


Vertical

Fundamental

Peak

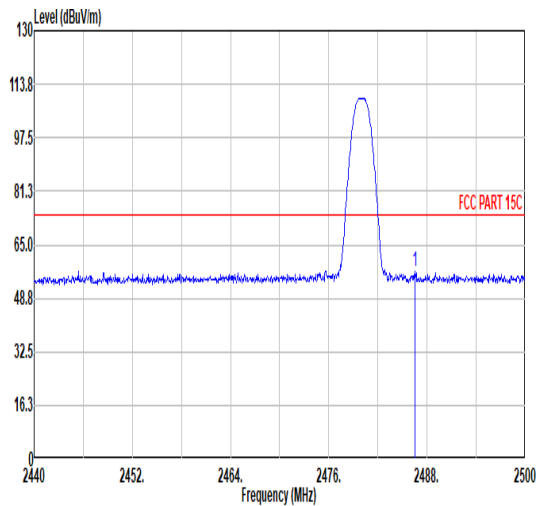


Freq	Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	cm	deg			
1	2486.50	56.71	74.00	-17.29	41.93	32.13	7.29	30.64	6.00	362	0	PEAK					

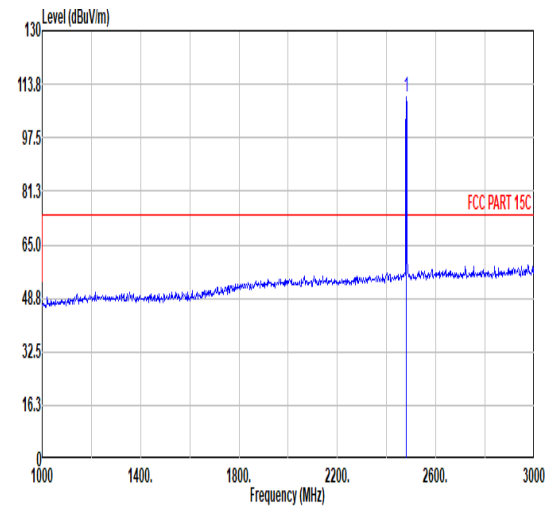


Freq	Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	cm	deg			
1	2480.00	109.83	-----	-----	95.09	32.12	7.28	30.66	6.00	362	0	PEAK					

Avg


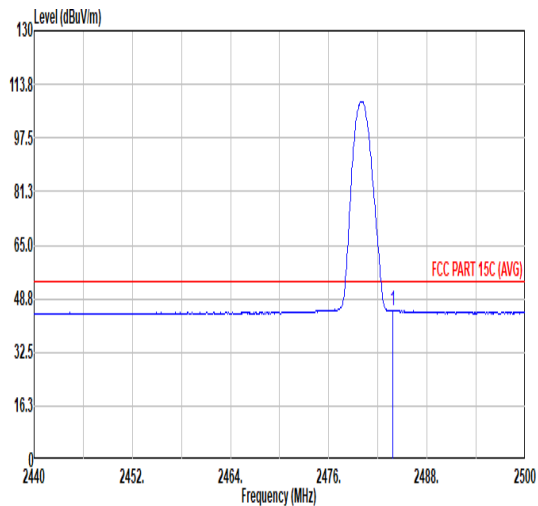


Freq	Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	cm	deg			
1	2483.80	45.34	54.00	-8.66	30.57	32.13	7.29	30.65	6.00	362	0	AVERAGE					

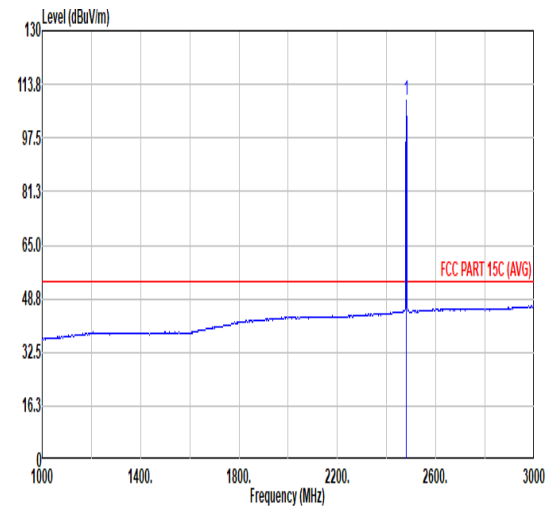

Freq	Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	cm	deg			
1	2480.00	108.69	-----	-----	93.95	32.12	7.28	30.66	6.00	362	0	AVERAGE					

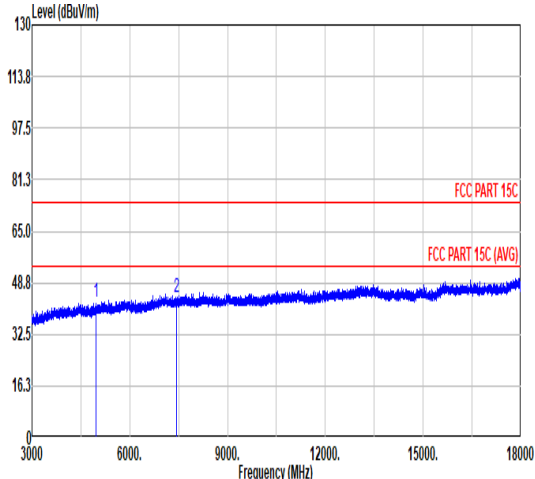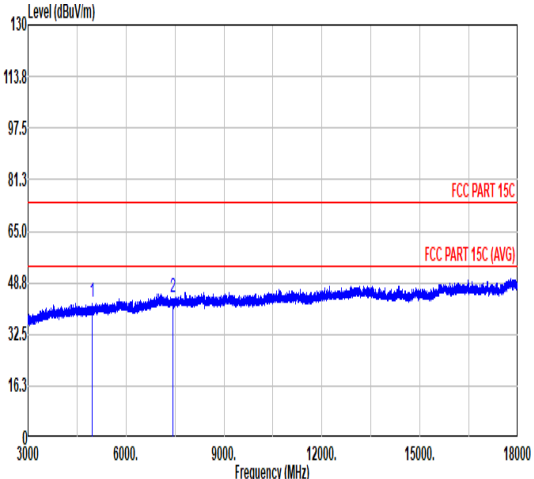

Mode	3																																																																				
	Harmonic																																																																				
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																				
Pol.	Horizontal						Vertical																																																														
Peak																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>42.56</td><td>74.00</td><td>-31.44</td><td>62.71</td><td>34.80</td><td>10.50</td><td>65.45</td><td>0.00</td><td>300</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>44.17</td><td>74.00</td><td>-29.83</td><td>60.04</td><td>36.59</td><td>12.87</td><td>65.33</td><td>0.00</td><td>300</td><td>360</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	42.56	74.00	-31.44	62.71	34.80	10.50	65.45	0.00	300	360	PEAK	2	7440.00	44.17	74.00	-29.83	60.04	36.59	12.87	65.33	0.00	300	360	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	4960.00	42.56	74.00	-31.44	62.71	34.80	10.50	65.45	0.00	300	360	PEAK																																																									
2	7440.00	44.17	74.00	-29.83	60.04	36.59	12.87	65.33	0.00	300	360	PEAK																																																									
																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>42.77</td><td>74.00</td><td>-31.23</td><td>62.92</td><td>34.80</td><td>10.50</td><td>65.45</td><td>0.00</td><td>100</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>44.20</td><td>74.00</td><td>-29.80</td><td>60.07</td><td>36.59</td><td>12.87</td><td>65.33</td><td>0.00</td><td>100</td><td>360</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	42.77	74.00	-31.23	62.92	34.80	10.50	65.45	0.00	100	360	PEAK	2	7440.00	44.20	74.00	-29.80	60.07	36.59	12.87	65.33	0.00	100	360	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	4960.00	42.77	74.00	-31.23	62.92	34.80	10.50	65.45	0.00	100	360	PEAK																																																									
2	7440.00	44.20	74.00	-29.80	60.07	36.59	12.87	65.33	0.00	100	360	PEAK																																																									



4

Mode

Band Edge


2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz

Pol.


Horizontal

Fundamental

Peak

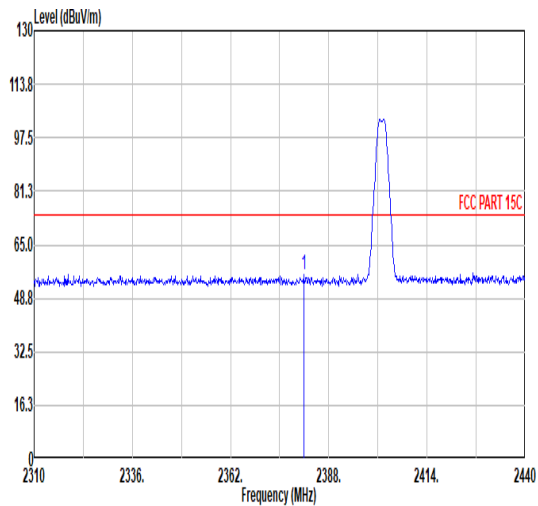


	Freq	Limit		Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	
		Level	Line Margin									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2381.37	55.90	74.00	-18.10	41.73	31.96	7.10	30.89	6.00	390	50	PEAK

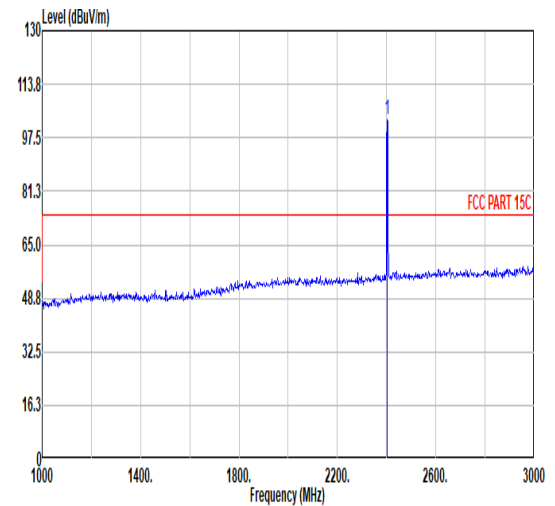


Freq	Limit		Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	
	Line	Margin									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1	2402.00	103.25	-----	-----	88.99	32.00	7.13	30.87	6.00	390	50 PEAK

Avg

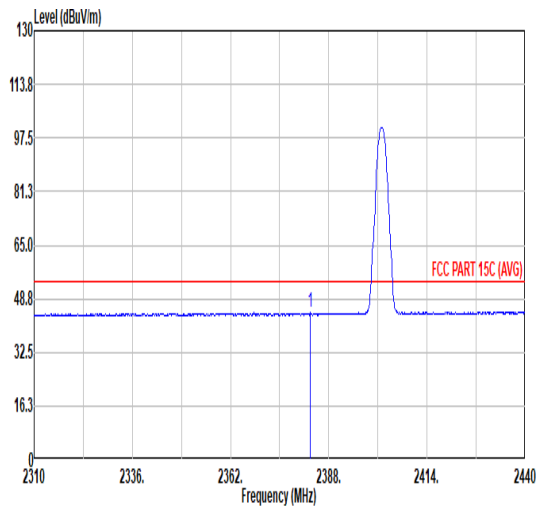

Freq	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	
	Level	Line Margin	Level	Factor	Loss	Factor	Factor				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1	2383.06	44.61	54.00	-9.39	30.44	31.96	7.10	30.89	6.00	390	50 AVERAGE

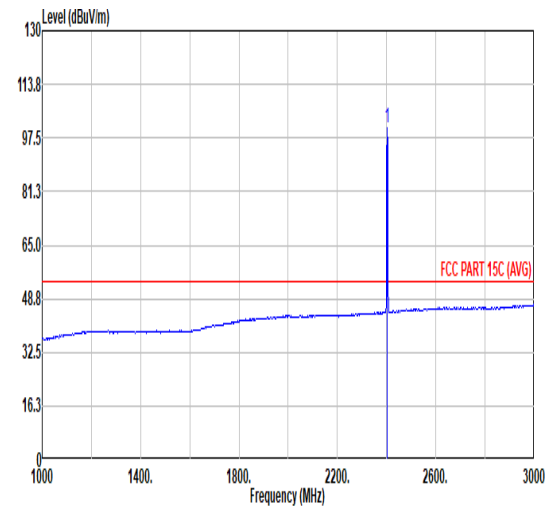

Freq	Limit		Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	Line	Margin								
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg
1	2402.00	100.75	-----	86.49	32.00	7.13	30.87	6.00	390	50 AVERAGE



4

Mode

Band Edge


2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz

Pol.


Vertical

Fundamental

Peak

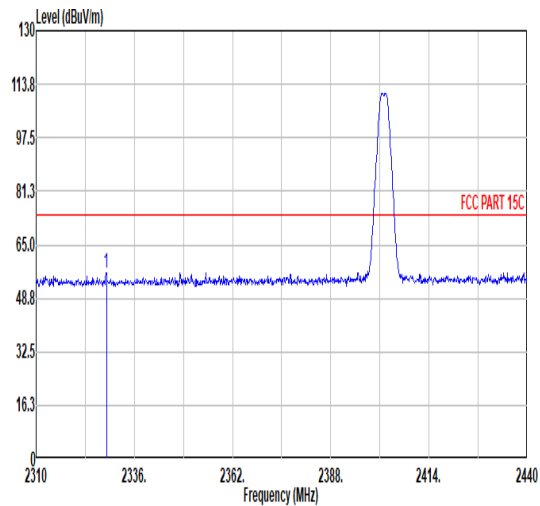


Freq	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Level	Line Margin	Level	Factor	Loss	Factor	Factor			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg
1	2388.78	56.59	74.00	-17.41	42.67	31.84	7.02	30.94	6.00	393
										20 PEAK

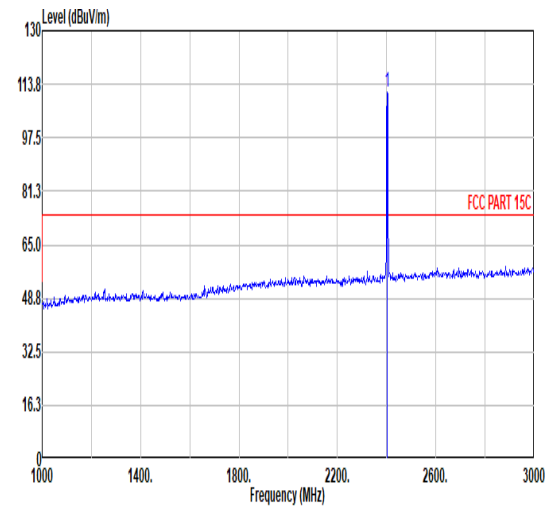


Freq	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Level	Line Margin	Level	Factor	Loss	Factor	Factor			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg
1	2402.00	111.24	-----	-----	96.98	32.00	7.13	30.87	6.00	393
										20 PEAK

Avg

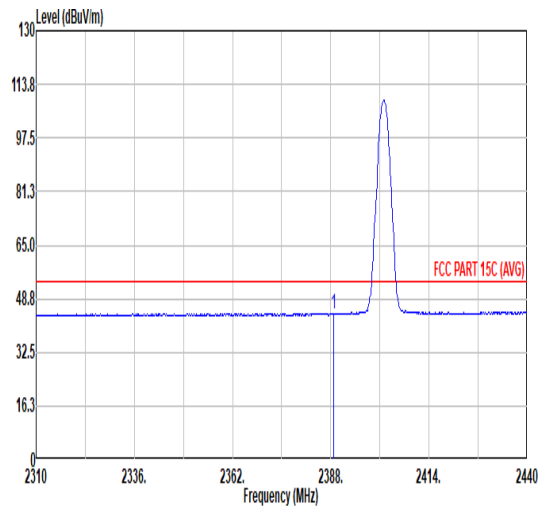

Freq	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Level	Line Margin	Level	Factor	Loss	Factor	Factor			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg
1	2388.78	44.34	54.00	-9.66	30.14	31.98	7.11	30.89	6.00	393
										20 AVERAGE

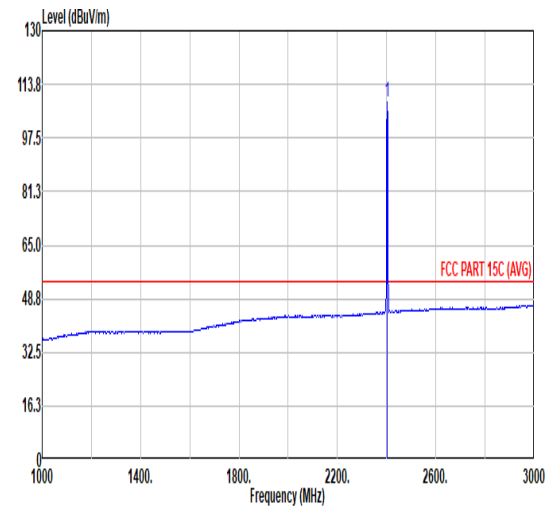

Freq	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Level	Line Margin	Level	Factor	Loss	Factor	Factor			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg
1	2402.00	108.64	-----	-----	94.38	32.00	7.13	30.87	6.00	393
										20 AVERAGE



Mode	4																																																							
	Harmonic																																																							
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																							
Pol.	Horizontal						Vertical																																																	
Peak																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>41.84</td><td>74.00</td><td>-32.16</td><td>62.46</td><td>34.52</td><td>10.29</td><td>65.43</td><td>0.00</td><td>300</td><td>360</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	41.84	74.00	-32.16	62.46	34.52	10.29	65.43	0.00	300	360	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	4804.00	41.84	74.00	-32.16	62.46	34.52	10.29	65.43	0.00	300	360	PEAK																																												
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>42.98</td><td>74.00</td><td>-31.02</td><td>63.60</td><td>34.52</td><td>10.29</td><td>65.43</td><td>0.00</td><td>100</td><td>360</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	42.98	74.00	-31.02	63.60	34.52	10.29	65.43	0.00	100	360	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	4804.00	42.98	74.00	-31.02	63.60	34.52	10.29	65.43	0.00	100	360	PEAK																																												



Mode	5																																																																																																																																											
	Harmonic																																																																																																																																											
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																																					
Peak Avg																																																																																																																																												
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4880.00</td><td>43.83</td><td>74.00</td><td>-30.17</td><td>64.23</td><td>34.65</td><td>10.39</td><td>65.44</td><td>0.00</td><td>300</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>7320.00</td><td>44.09</td><td>74.00</td><td>-29.91</td><td>59.96</td><td>36.56</td><td>12.82</td><td>65.25</td><td>0.00</td><td>300</td><td>360</td><td>PEAK</td></tr></table>								Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4880.00	43.83	74.00	-30.17	64.23	34.65	10.39	65.44	0.00	300	360	PEAK	2	7320.00	44.09	74.00	-29.91	59.96	36.56	12.82	65.25	0.00	300	360	PEAK	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4880.00</td><td>44.08</td><td>74.00</td><td>-29.92</td><td>64.48</td><td>34.65</td><td>10.39</td><td>65.44</td><td>0.00</td><td>100</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>7320.00</td><td>44.09</td><td>74.00</td><td>-29.91</td><td>59.96</td><td>36.56</td><td>12.82</td><td>65.25</td><td>0.00</td><td>100</td><td>360</td><td>PEAK</td></tr></table>								Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4880.00	44.08	74.00	-29.92	64.48	34.65	10.39	65.44	0.00	100	360	PEAK	2	7320.00	44.09	74.00	-29.91	59.96	36.56	12.82	65.25	0.00	100	360	PEAK
			Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	4880.00	43.83	74.00	-30.17	64.23	34.65	10.39	65.44	0.00	300	360	PEAK																																																																																																																																
2	7320.00	44.09	74.00	-29.91	59.96	36.56	12.82	65.25	0.00	300	360	PEAK																																																																																																																																
		Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	4880.00	44.08	74.00	-29.92	64.48	34.65	10.39	65.44	0.00	100	360	PEAK																																																																																																																																
2	7320.00	44.09	74.00	-29.91	59.96	36.56	12.82	65.25	0.00	100	360	PEAK																																																																																																																																



6

Mode

Band Edge


2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz

Pol.


Horizontal

Fundamental

Peak

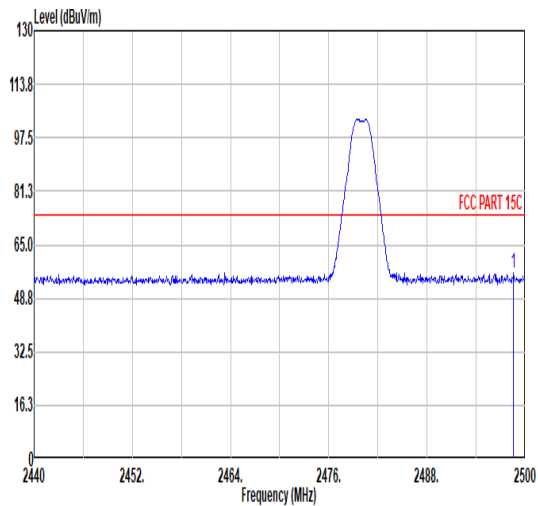


Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
		Line Margin								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1 2498.56	56.65	74.00	-17.35	41.78	32.15	7.32	30.60	6.00	328	315 PEAK

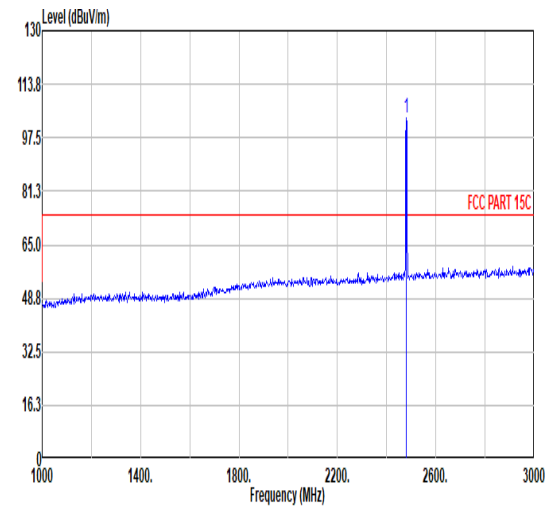


Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
		Line Margin								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1 2480.00	103.35	-----	-----	88.61	32.12	7.28	30.66	6.00	328	315 PEAK

Avg




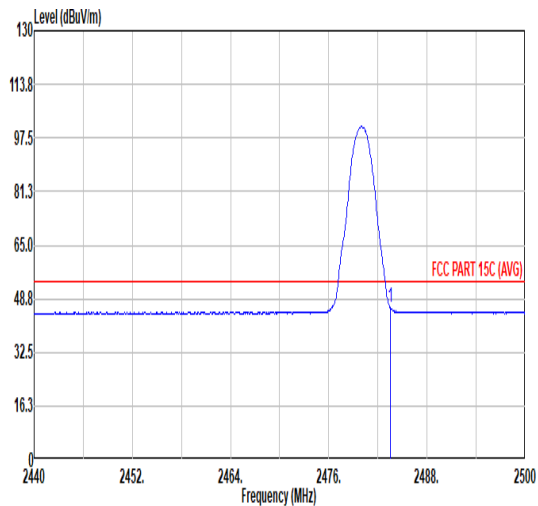


Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
		Line Margin								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1 2483.50	46.05	54.00	-7.95	31.28	32.13	7.29	30.65	6.00	328	315 AVERAGE




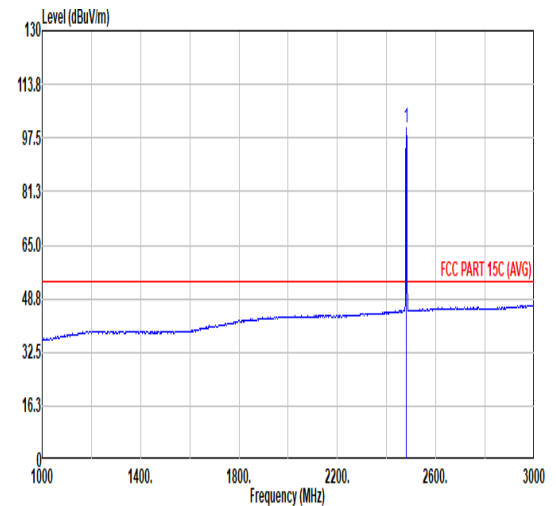


Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
		Line Margin								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1 2480.00	100.81	-----	-----	86.07	32.12	7.28	30.66	6.00	328	315 AVERAGE

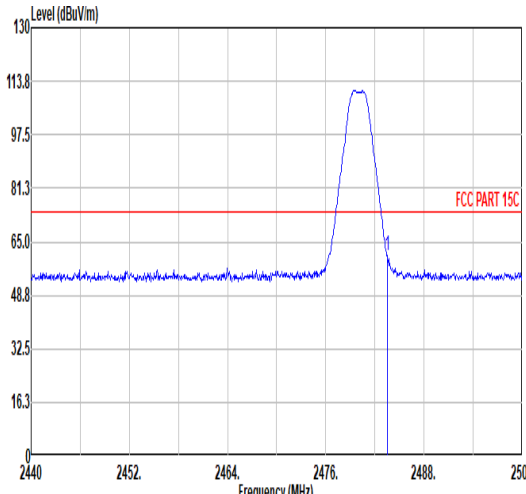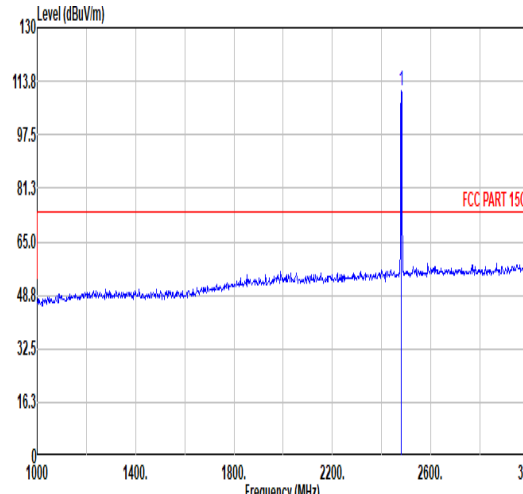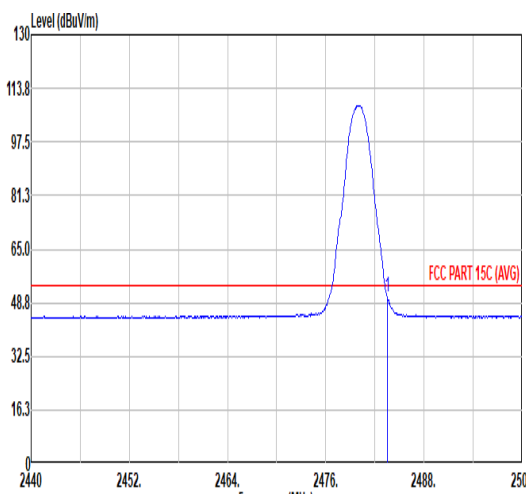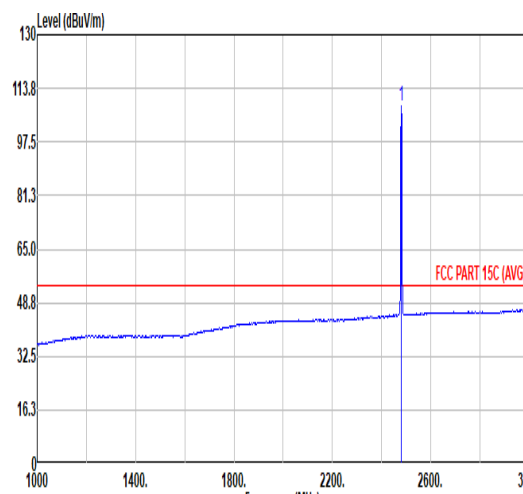

		6																																																																																																								
Mode		Band Edge																																																																																																								
		2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																								
Pol.		Vertical					Fundamental																																																																																																			
Peak																																																																																																										
		<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>60.86</td><td>74.00</td><td>-13.14</td><td>46.09</td><td>32.13</td><td>7.29</td><td>30.65</td><td>6.00</td><td>369</td><td>0 PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	60.86	74.00	-13.14	46.09	32.13	7.29	30.65	6.00	369	0 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>111.08</td><td>-----</td><td>-----</td><td>96.34</td><td>32.12</td><td>7.28</td><td>30.66</td><td>6.00</td><td>369</td><td>0 PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	111.08	-----	-----	96.34	32.12	7.28	30.66	6.00	369
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	2483.50	60.86	74.00	-13.14	46.09	32.13	7.29	30.65	6.00	369	0 PEAK																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	2480.00	111.08	-----	-----	96.34	32.12	7.28	30.66	6.00	369	0 PEAK																																																																																															
Avg																																																																																																										
		<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>50.54</td><td>54.00</td><td>-3.46</td><td>35.77</td><td>32.13</td><td>7.29</td><td>30.65</td><td>6.00</td><td>369</td><td>0 AVERAGE</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	50.54	54.00	-3.46	35.77	32.13	7.29	30.65	6.00	369	0 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>108.61</td><td>-----</td><td>-----</td><td>93.87</td><td>32.12</td><td>7.28</td><td>30.66</td><td>6.00</td><td>369</td><td>0 AVERAGE</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	108.61	-----	-----	93.87	32.12	7.28	30.66	6.00	369
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	2483.50	50.54	54.00	-3.46	35.77	32.13	7.29	30.65	6.00	369	0 AVERAGE																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	2480.00	108.61	-----	-----	93.87	32.12	7.28	30.66	6.00	369	0 AVERAGE																																																																																															

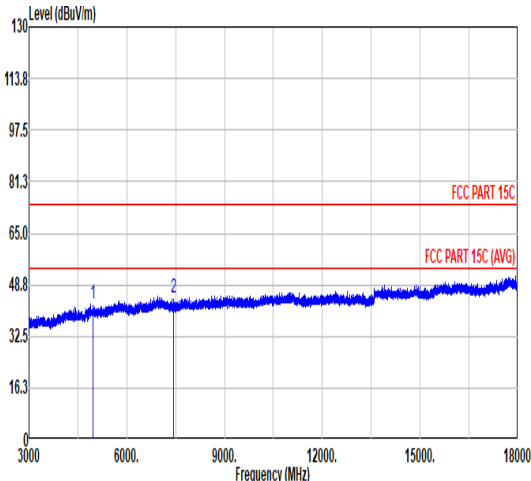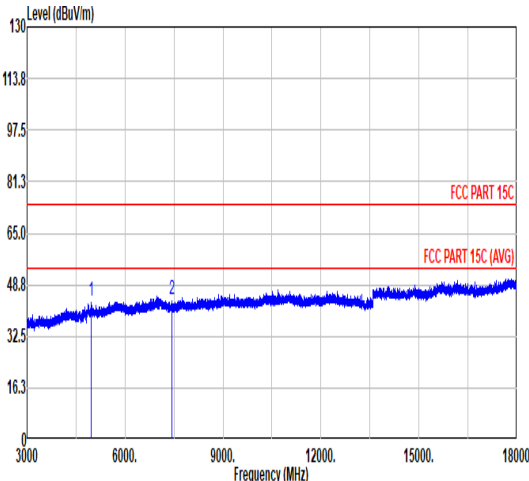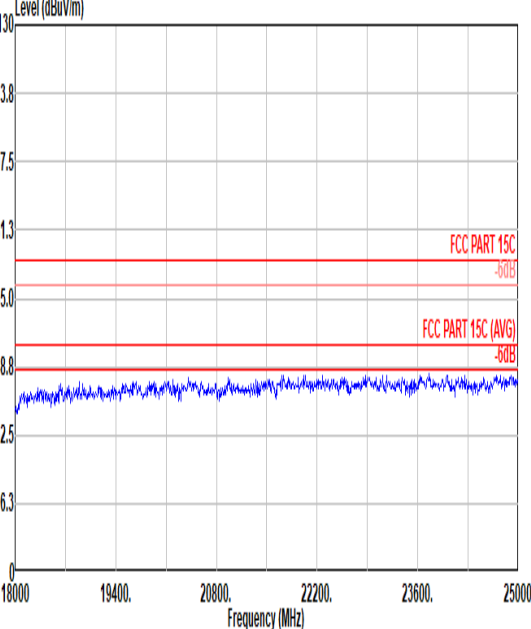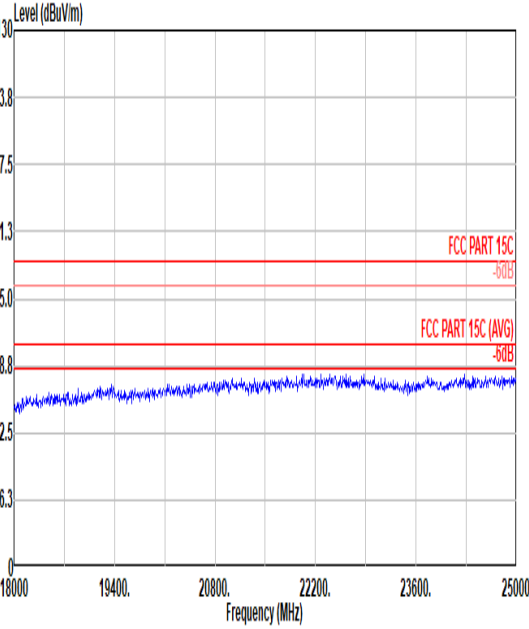

Mode	6																																																																																																												
	Harmonic																																																																																																												
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																												
Pol.	Horizontal					Vertical																																																																																																							
Peak Avg																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4960.00</td><td>42.75</td><td>74.00 -31.25</td><td>62.90</td><td>34.80</td><td>10.50</td><td>65.45</td><td>0.00</td><td>300</td><td>0 PEAK</td></tr><tr><td>2 7440.00</td><td>44.76</td><td>74.00 -29.24</td><td>60.63</td><td>36.59</td><td>12.87</td><td>65.33</td><td>0.00</td><td>300</td><td>0 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 4960.00	42.75	74.00 -31.25	62.90	34.80	10.50	65.45	0.00	300	0 PEAK	2 7440.00	44.76	74.00 -29.24	60.63	36.59	12.87	65.33	0.00	300	0 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4960.00</td><td>43.48</td><td>74.00 -30.52</td><td>63.63</td><td>34.80</td><td>10.50</td><td>65.45</td><td>0.00</td><td>100</td><td>0 PEAK</td></tr><tr><td>2 7440.00</td><td>44.08</td><td>74.00 -29.92</td><td>59.95</td><td>36.59</td><td>12.87</td><td>65.33</td><td>0.00</td><td>100</td><td>0 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 4960.00	43.48	74.00 -30.52	63.63	34.80	10.50	65.45	0.00	100	0 PEAK	2 7440.00	44.08	74.00 -29.92	59.95	36.59	12.87	65.33	0.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1 4960.00	42.75	74.00 -31.25	62.90	34.80	10.50	65.45	0.00	300	0 PEAK																																																																																																				
2 7440.00	44.76	74.00 -29.24	60.63	36.59	12.87	65.33	0.00	300	0 PEAK																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1 4960.00	43.48	74.00 -30.52	63.63	34.80	10.50	65.45	0.00	100	0 PEAK																																																																																																				
2 7440.00	44.08	74.00 -29.92	59.95	36.59	12.87	65.33	0.00	100	0 PEAK																																																																																																				
Peak Avg																																																																																																													




Mode	Emission below 1GHz										
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz										
	Pol.	Horizontal					Vertical				
Peak QP											



Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE 1M	61.57	0.386	2.594	2.7KHz
Bluetooth LE 2M	31.94	0.200	5.00	5.1KHz

Bluetooth LE 1Mbps

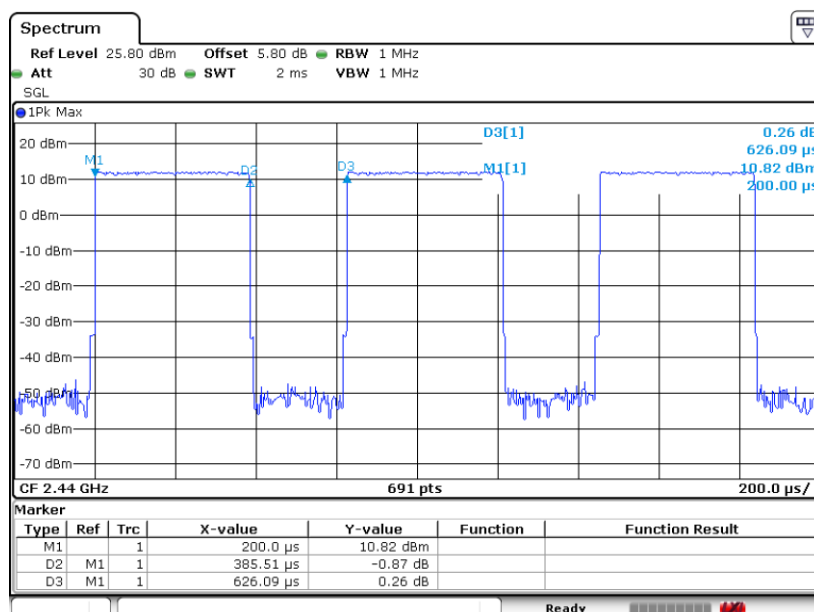

Bluetooth LE 2Mbps

