



# FCC Test Report

**APPLICANT** : Lenovo (Shanghai) Electronics Technology Co., Ltd.  
**EQUIPMENT** : Portable Tablet Computer  
**BRAND NAME** : Lenovo  
**MODEL NAME** : Lenovo TB-8505XS  
**FCC ID** : O57TB8505X  
**STANDARD** : 47 CFR Part 15 Subpart B  
**CLASSIFICATION** : Certification  
**TEST DATE(S)** : May 30, 2022 ~ May 31, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



**Sporton International Inc. (Kunshan)**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1. GENERAL DESCRIPTION ..... 5**

    1.1. Applicant..... 5

    1.2. Manufacturer ..... 5

    1.3. Product Feature of Equipment Under Test ..... 5

    1.4. Product Specification of Equipment Under Test ..... 6

    1.5. Modification of EUT ..... 7

    1.6. Test Location ..... 7

    1.7. Test Software ..... 7

    1.8. Applicable Standards ..... 7

**2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 8**

    2.1. Test Mode ..... 8

    2.2. Connection Diagram of Test System ..... 9

    2.3. Support Unit used in test configuration and system ..... 9

    2.4. EUT Operation Test Setup ..... 10

**3. TEST RESULT ..... 11**

    3.1. Test of AC Conducted Emission Measurement ..... 11

    3.2. Test of Radiated Emission Measurement ..... 15

**4. LIST OF MEASURING EQUIPMENT ..... 20**

**5. UNCERTAINTY OF EVALUATION ..... 21**

**APPENDIX A. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 5.05 dB at 0.690 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 6.99 dB at 51.340 MHz for Peak

**Note:**

This is a variant report for Lenovo TB-8505XS. The change note could be referred to the Class II permissive change letter which is exhibit separately. Based on the similarity between current and previous project, only the related test cases from original test report (Sporton Report Number FC981204-19) were verified for the differences.

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1. General Description

## 1.1. Applicant

**Lenovo (Shanghai) Electronics Technology Co., Ltd.**  
Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone

## 1.2. Manufacturer

**Lenovo PC HK Limited**  
23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, China

## 1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Portable Tablet Computer
Brand Name	Lenovo
Model Name	Lenovo TB-8505XS
FCC ID	O57TB8505X
EUT supports Radios application	GSM/WCDMA/LTE WLAN 2.4GHz 802.11b/g/n (HT20/HT40) WLAN 5GHz 802.11a/n (HT20/HT40) WLAN 5GHz 802.11ac (VHT20/VHT40/VHT80) Bluetooth BR/EDR/LE, GNSS, FM
IMEI Code	Conduction: 862977060034861/862977060041866 Radiation: 863763043818136
HW Version	Lenovo TB-8505XS
SW Version	TB-8505XS_RF01_220408
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx Frequency</b>	GSM850: 824 MHz ~ 849 MHz GSM1900: 1850MHz ~ 1910MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2 : 1850 MHz ~ 1910 MHz LTE Band 4 : 1710 MHz ~ 1755 MHz LTE Band 5 : 824 MHz ~ 849 MHz LTE Band 7 : 2500 MHz ~ 2570 MHz LTE Band 38 : 2570 MHz ~ 2620 MHz 802.11b/g/n: 2400 MHz ~ 2483.5 MHz 802.11a/n/ac: 5150 MHz ~ 5250 MHz; 5250 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz 5725 MHz ~ 5850 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz
<b>Rx Frequency</b>	GSM850: 869 MHz ~ 894 MHz GSM1900: 1930 MHz ~ 1990 MHz WCDMA Band II: 1930 MHz ~ 1990 MHz WCDMA Band V: 869 MHz ~ 894 MHz LTE Band 2 : 1930 MHz ~ 1990 MHz LTE Band 4 : 2110 MHz ~ 2155 MHz LTE Band 5 : 869 MHz ~ 894 MHz LTE Band 7 : 2620 MHz ~ 2690 MHz LTE Band 38: 2570 MHz ~ 2620 MHz 802.11b/g/n: 2400 MHz ~ 2483.5 MHz 802.11a/n/ac: 5150 MHz ~ 5250 MHz; 5250 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz 5725 MHz ~ 5850 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz GNSS : 1559 MHz ~ 1610 MHz FM : 88 MHz ~ 108 MHz
<b>Antenna Type</b>	WWAN : LDS Antenna WLAN : IFA Antenna Bluetooth : IFA Antenna GNSS: IFA Antenna FM : External Earphone Antenna
<b>Type of Modulation</b>	GSM/GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA : BPSK HSDPA/DC-HSDPA : QPSK HSUPA : QPSK HSPA+ : 16QAM (16QAM uplink is not supported) DC-HSDPA : 64QAM LTE: QPSK / 16QAM / 64QAM 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) Bluetooth LE : GFSK



	Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK FM
--	---

### 1.5. Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6. Test Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International Inc. (Kunshan)		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People’s Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-KS 03CH08-KS	CN1257	314309

### 1.7. Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH08-KS	AUDIX	E3	6.2009-8-24
2.	CO01-KS	AUDIX	E3	6.2009-8-24

### 1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart B
- ♦ ANSI C63.4-2014

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.



## 2. Test Configuration of Equipment Under Test


### 2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: PCS 1900 Rx+ USB Cable 2(Charging from Adapter3)+ Earphone1+ Battery1+ Bluetooth Idle+ WLAN Idle(5G)+ Camera(Rear)
	Mode 2: PCS 1900 Rx+ USB Cable 2(Charging from Adapter4)+ Earphone1+ Battery1+ Bluetooth Idle+ WLAN Idle(5G)+ Camera(Front)
Radiated Emissions	Mode 1: WCDMA Band V Rx(Low)+ USB Cable 1(Charging from Adapter3)+ Earphone1+ Battery 1+ Bluetooth Idle(Docking)+ WLAN Idle(2.4G)+ Camera(Rear)
	Mode 2: WCDMA Band V Rx(Low)+ USB Cable 1(Charging from Adapter4)+ Battery 1+ Earphone1+ Bluetooth Idle(Docking)+ WLAN Idle(2.4G)+ Camera(Front)
	Mode 3: WCDMA Band V Rx(Low)+ USB Cable 1(Charging from Adapter4)+ Earphone1+ Battery 1+ Bluetooth Idle(Docking)+ WLAN Idle(2.4G)+ MPEG4
<b>Remark:</b>	
<ol style="list-style-type: none"> <li>1. The worst case of AC is mode 2; only the test data of this mode is reported.</li> <li>2. The worst case of RE is mode 3; only the test data of this mode is reported.</li> <li>3. Pre-scanned Low/Middle/High channel for WCDMA Band V, the worst channel was recorded in this report.</li> </ol>	

## 2.2. Connection Diagram of Test System

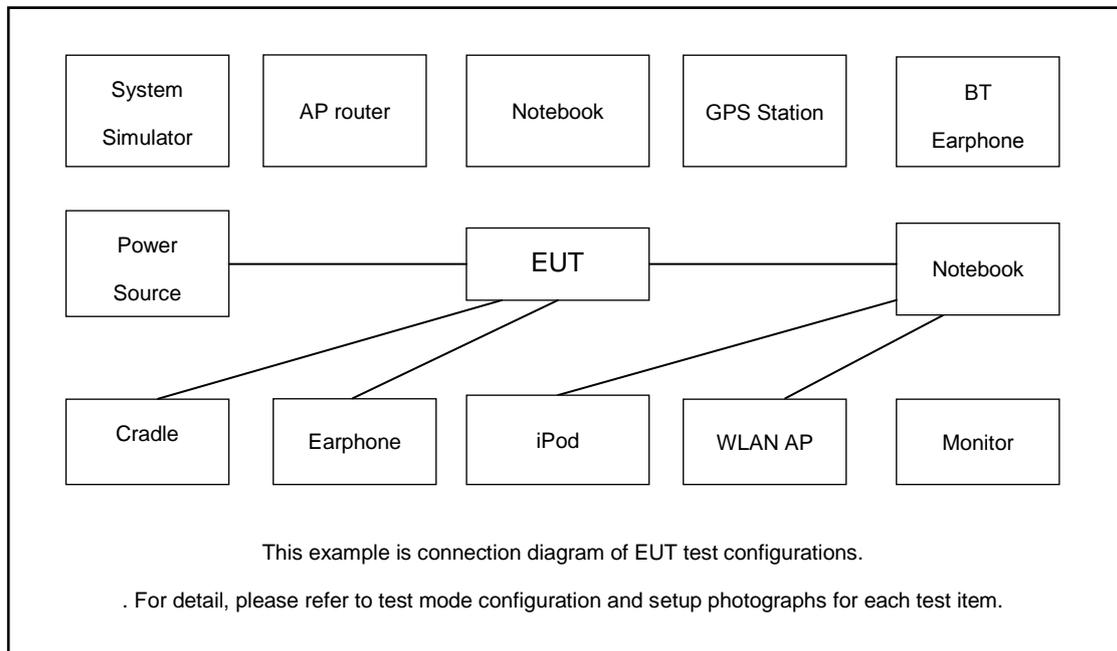

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

## 2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritus	MT8820C	N/A	N/A	Unshielded, 1.8m
2.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded, 1.8m
3.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
4.	Bluetooth Earphone	Xiaomi	LYEJ02LM	N/A	N/A	N/A
5.	Notebook	Lenovo	V130-15IKB005	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
6.	SD Card	Kingston	8GB	N/A	N/A	N/A
7.	Adapter	N/A	N/A	N/A	N/A	N/A



## **2.4. EUT Operation Test Setup**

The EUT was in GSM or WCDMA idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Turn on camera to capture images.
2. Turn on MPEG4 function.



### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


### 3.1.4 Test Setup

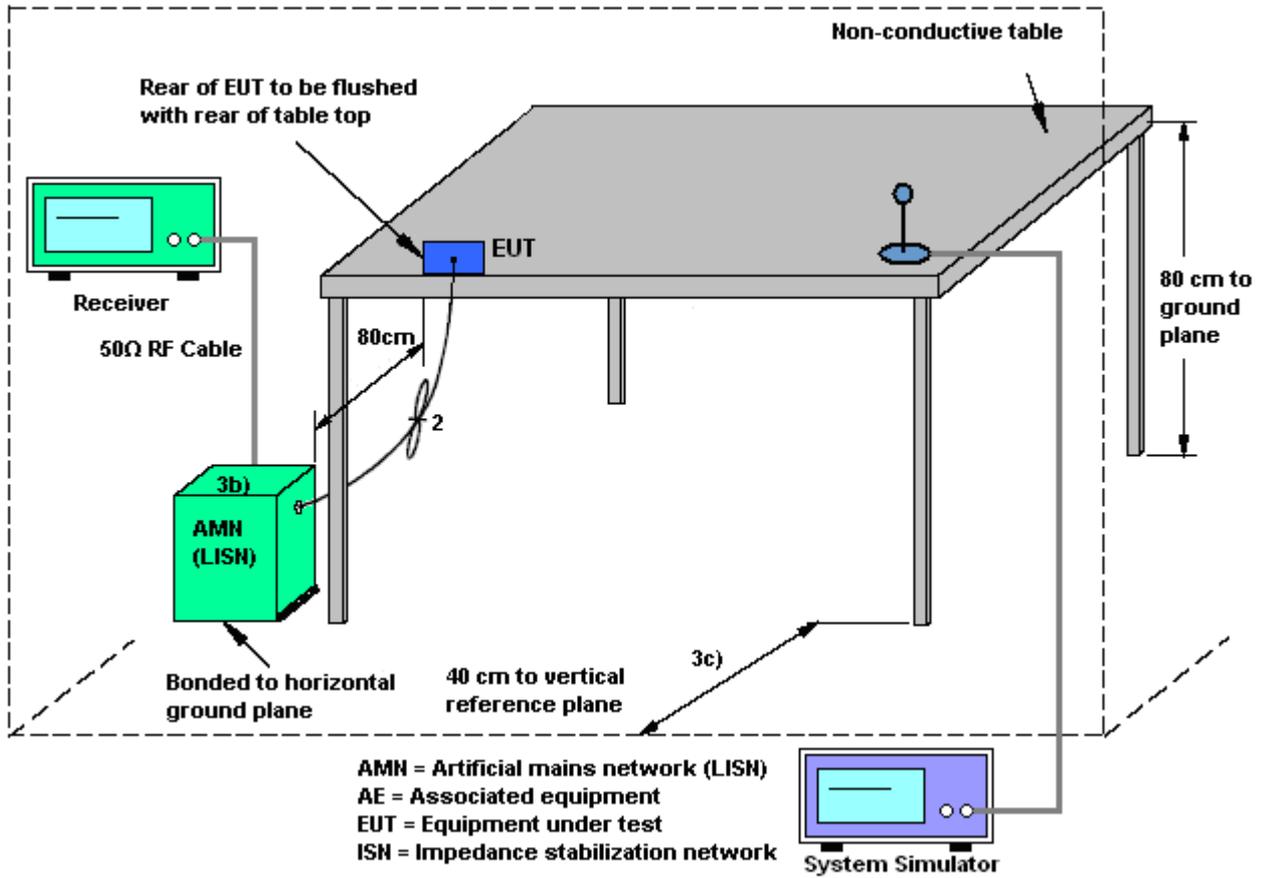



3.1.5 Test Result of AC Conducted Emission

Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

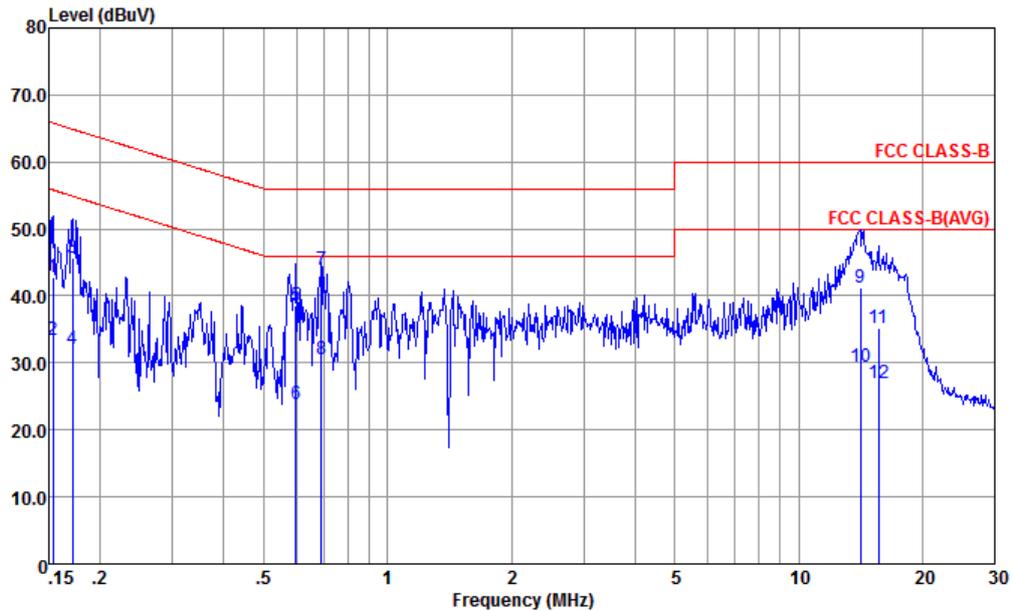


Site : CO01-KS  
 Condition : FCC CLASS-B LISN-060105-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.153	42.69	-23.13	65.82	32.20	0.02	10.47	QP
2	0.153	33.39	-22.43	55.82	22.90	0.02	10.47	Average
3	0.171	45.66	-19.24	64.90	35.20	0.03	10.43	QP
4	0.171	32.06	-22.84	54.90	21.60	0.03	10.43	Average
5	0.598	38.44	-17.56	56.00	28.09	0.11	10.24	QP
6	0.598	23.94	-22.06	46.00	13.59	0.11	10.24	Average
7 *	0.690	43.85	-12.15	56.00	33.50	0.11	10.24	QP
8	0.690	30.55	-15.45	46.00	20.20	0.11	10.24	Average
9	14.138	41.17	-18.83	60.00	30.49	0.29	10.39	QP
10	14.138	29.47	-20.53	50.00	18.79	0.29	10.39	Average
11	15.635	35.24	-24.76	60.00	24.50	0.33	10.41	QP
12	15.635	26.94	-23.06	50.00	16.20	0.33	10.41	Average



Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

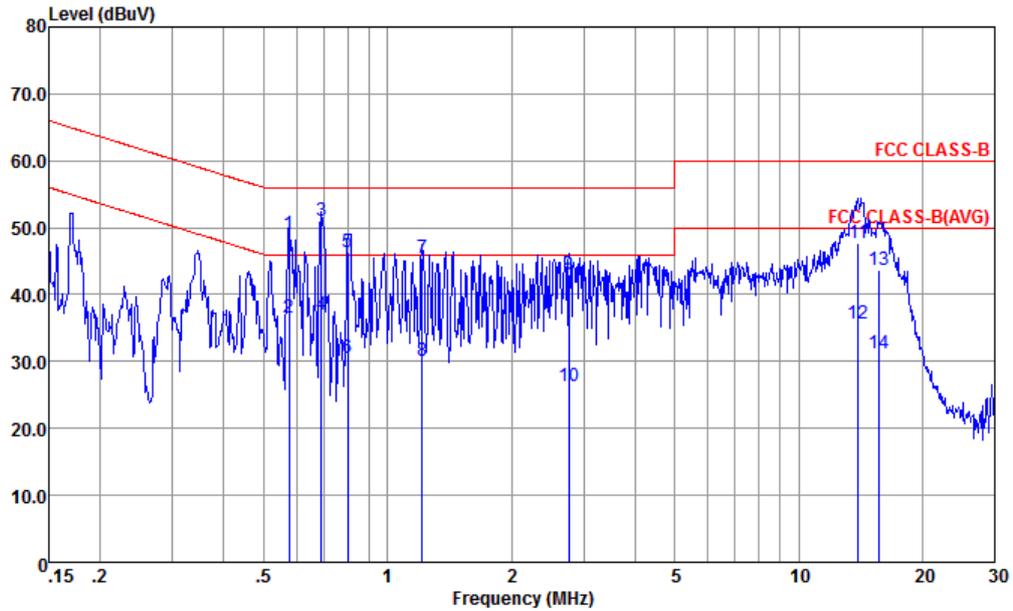

Site : CO01-KS  
 Condition : FCC CLASS-B LISN-060105-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.576	48.95	-7.05	56.00	38.60	0.11	10.24	QP
2	0.576	36.45	-9.55	46.00	26.10	0.11	10.24	Average
3 *	0.690	50.95	-5.05	56.00	40.60	0.11	10.24	QP
4	0.690	36.95	-9.05	46.00	26.60	0.11	10.24	Average
5	0.800	46.25	-9.75	56.00	35.90	0.11	10.24	QP
6	0.800	30.55	-15.45	46.00	20.20	0.11	10.24	Average
7	1.216	45.56	-10.44	56.00	35.20	0.13	10.23	QP
8	1.216	30.16	-15.84	46.00	19.80	0.13	10.23	Average
9	2.765	42.99	-13.01	56.00	32.60	0.15	10.24	QP
10	2.765	26.29	-19.71	46.00	15.90	0.15	10.24	Average
11	13.989	47.58	-12.42	60.00	36.89	0.30	10.39	QP
12	13.989	35.58	-14.42	50.00	24.89	0.30	10.39	Average
13	15.635	43.65	-16.35	60.00	32.90	0.34	10.41	QP
14	15.635	31.25	-18.75	50.00	20.50	0.34	10.41	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



### 3.2. Test of Radiated Emission Measurement

#### 3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### **3.2.3. Test Procedures**


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
10. Exploratory radiated emissions testing of handheld and/or body-worn devices shall include rotation of the EUT through three orthogonal axes (X/Y/Z Plane) to determine the orientation (attitude) that maximizes the emissions.

### 3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

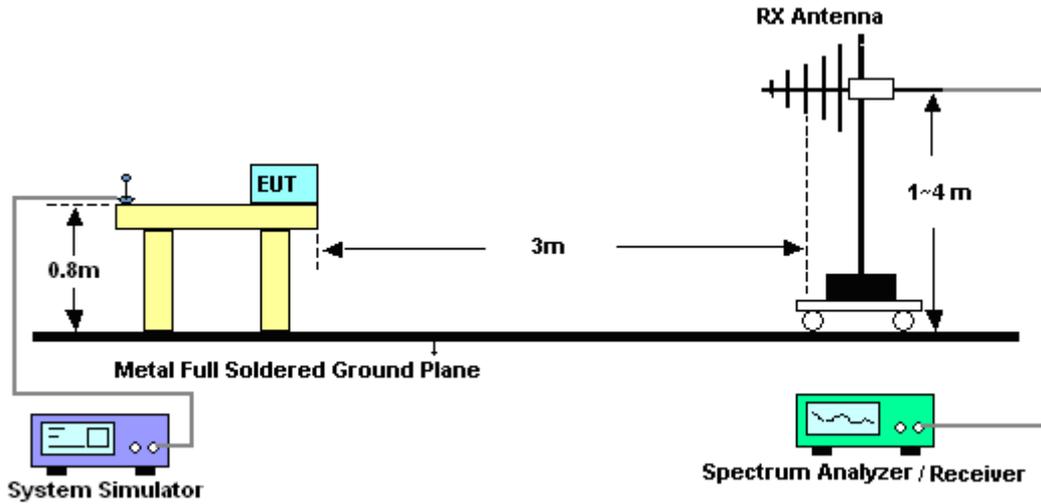


For radiated emissions above 1GHz

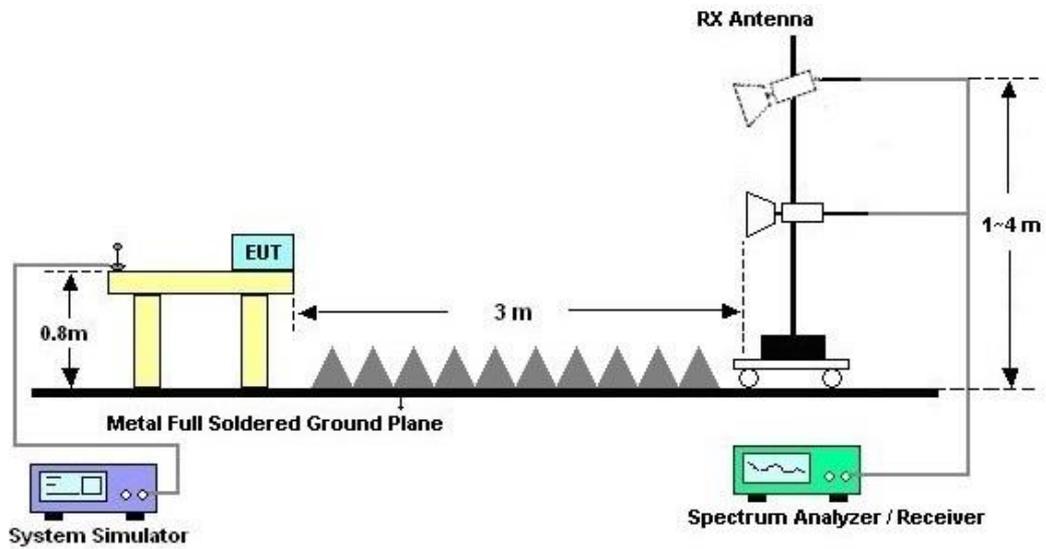



3.2.5. Test Result of Radiated Emission

Test Engineer :	Peng Zhang	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal
Remark :	#6 is system simulator signal which can be ignored.		

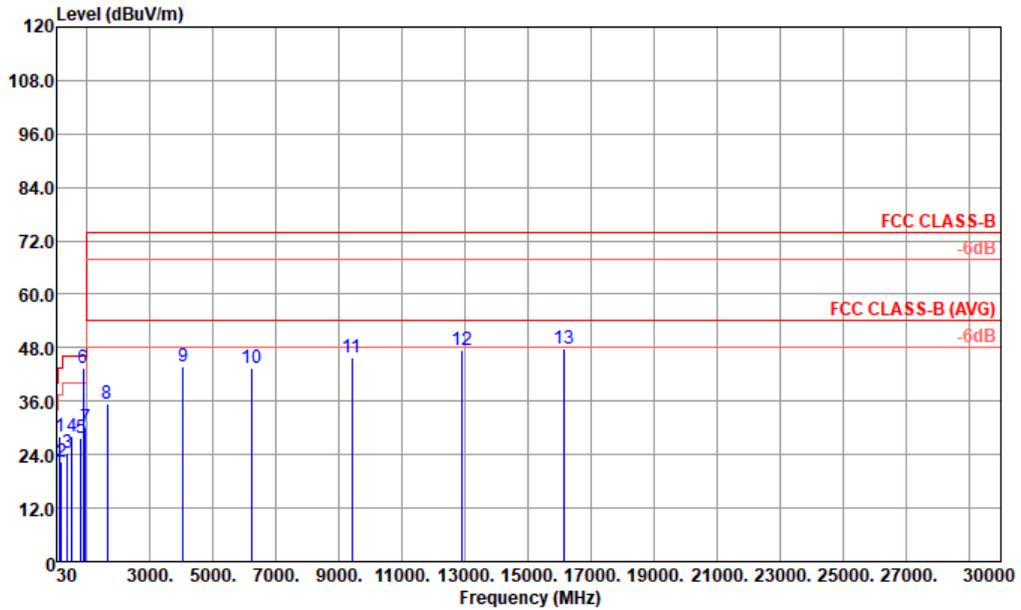


Site : 03CH08-KS  
 Condition : FCC CLASS-B 3m CBL 61110 59915 HORIZONTAL

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	131.85	28.16	-15.34	43.50	42.69	16.56	1.82	32.91	---	---	Peak
2	178.41	22.45	-21.05	43.50	37.52	15.75	2.13	32.95	---	---	Peak
3	384.05	24.38	-21.62	46.00	33.07	21.16	3.13	32.98	---	---	Peak
4	508.21	28.04	-17.96	46.00	33.81	24.00	3.60	33.37	---	---	Peak
5	812.79	27.61	-18.39	46.00	27.54	28.40	4.55	32.88	---	---	Peak
6 !	870.99	43.60			42.47	29.00	4.71	32.58	---	---	Peak
7	951.50	30.11	-15.89	46.00	26.45	30.59	4.91	31.84	---	---	Peak
8	1629.00	35.34	-38.66	74.00	65.63	26.81	6.44	63.54	---	---	Peak
9	4043.00	43.75	-30.25	74.00	64.14	32.56	11.69	64.64	---	---	Peak
10	6219.00	43.35	-30.65	74.00	59.89	35.06	12.87	64.47	---	---	Peak
11	9398.00	45.95	-28.05	74.00	57.08	36.15	16.19	63.47	---	---	Peak
12	12917.00	47.32	-26.68	74.00	52.40	38.82	18.84	62.74	---	---	Peak
13	16130.00	47.79	-26.21	74.00	51.24	40.58	21.34	65.37	---	---	Peak



Test Engineer :	Peng Zhang	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical
Remark :	#6 is system simulator signal which can be ignored.		

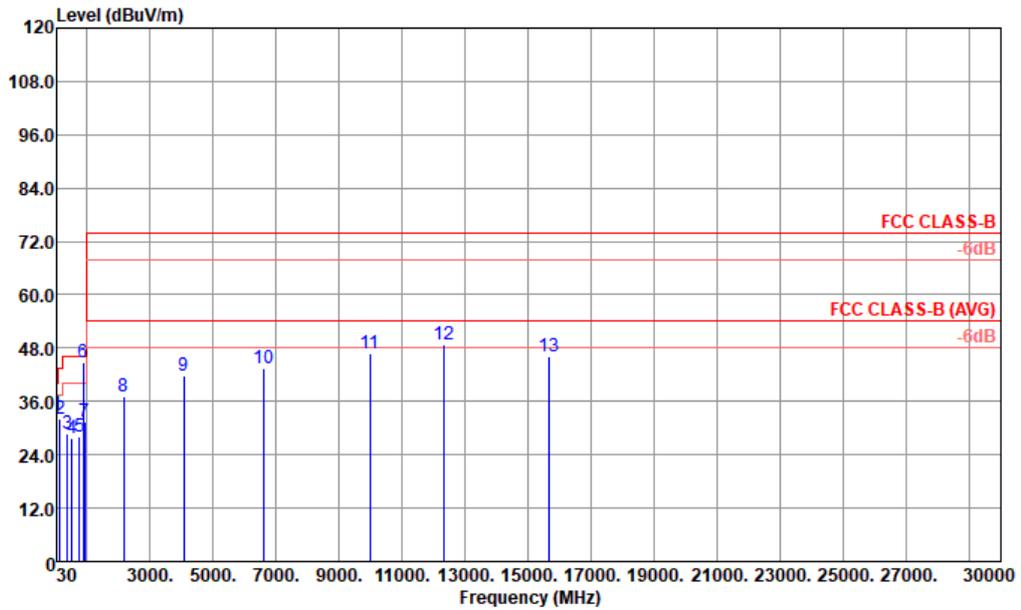

Site : 03CH08-KS  
 Condition : FCC CLASS-B 3m CBL 61110 59915 VERTICAL

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	51.34	33.01	-6.99	40.00	50.92	13.88	1.12	32.91	---	---	Peak
2	144.46	32.19	-11.31	43.50	46.32	16.86	1.91	32.90	---	---	Peak
3	384.05	28.80	-17.20	46.00	37.49	21.16	3.13	32.98	---	---	Peak
4	508.21	27.71	-18.29	46.00	33.48	24.00	3.60	33.37	---	---	Peak
5	755.56	27.94	-18.06	46.00	28.66	28.02	4.39	33.13	---	---	Peak
6 !	870.99	44.93			43.80	29.00	4.71	32.58	---	---	Peak
7	914.64	31.54	-14.46	46.00	29.48	29.47	4.82	32.23	---	---	Peak
8	2156.00	37.02	-36.98	74.00	63.73	29.69	7.46	63.86	---	---	Peak
9	4077.00	41.87	-32.13	74.00	62.08	32.58	11.85	64.64	---	---	Peak
10	6593.00	43.43	-30.57	74.00	59.23	35.27	13.25	64.32	---	---	Peak
11	9976.00	46.86	-27.14	74.00	56.76	36.80	16.55	63.25	---	---	Peak
12	12305.00	48.76	-25.24	74.00	54.26	38.58	18.38	62.46	---	---	Peak
13	15671.00	46.17	-27.83	74.00	50.58	40.02	20.97	65.40	---	---	Peak

Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)



### 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 21, 2022	May 30, 2022	Apr. 20, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 14, 2021	May 30, 2022	Oct. 13, 2022	Conduction (CO01-KS)
AC LISN	R&S	ENV216	100334	9kHz~30MHz	Oct. 14, 2021	May 30, 2022	Oct. 13, 2022	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 14, 2021	May 30, 2022	Oct. 13, 2022	Conduction (CO01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Oct. 16, 2021	May 31, 2022	Oct. 15, 2022	Radiation (03CH08-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471084	10Hz~44G,MAX 30dB	Jul. 12, 2021	May 31, 2022	Jul. 11, 2022	Radiation (03CH08-KS)
Bilog Antenna	TESEQ& VGT	CBL 61110	59915	30MHz-1GHz	Sep. 02, 2021	May 31, 2022	Sep. 01, 2022	Radiation (03CH08-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Dec. 24, 2021	May 31, 2022	Dec. 23, 2022	Radiation (03CH08-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	May 31, 2022	Jan. 04, 2023	Radiation (03CH08-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2022	May 31, 2022	Jan. 04, 2023	Radiation (03CH08-KS)
Amplifier	SONOMA	310N	413741	9KHz-1GHz	Jan. 13, 2022	May 31, 2022	Jan. 12, 2023	Radiation (03CH08-KS)
Amplifier	Keysight	83017A	MY53270389	500MHz~26.5G Hz	Jan. 05, 2022	May 31, 2022	Jan. 04, 2023	Radiation (03CH08-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	May 31, 2022	NCR	Radiation (03CH08-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	May 31, 2022	NCR	Radiation (03CH08-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	May 31, 2022	NCR	Radiation (03CH08-KS)

NCR: No Calibration Required



## 5. Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.9dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.9dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.0dB
---	-------