



PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA

Tel. 410.290.6652 / Fax 410.290.6554

<http://www.pctestlab.com>



CERTIFICATE OF COMPLIANCE FCC Part 22 & 24 Class II Permissive Change

Applicant Name:

Wavecom Inc.
430 Davis Drive, Suite 300
P.O. Box 13920
Research Triangle Park, NC 27709
United States

Date of Testing:

December 15, 2008

Test Site/Location:

PCTEST Lab., Columbia, MD, USA

Test Report Serial No.:

0812091718.O9E

FCC ID:**O9EGTM1****APPLICANT:****WAVECOM INC.**

Application Type: Class II Permissive Change
FCC Classification: PCS Licensed Transmitter (PCB)
FCC Rule Part(s): §2; §22(H), §24(E)
EUT Type: Cellular/PCS CDMA Module
Model(s): GTM-1
Tx Frequency Range: 824.70 - 848.31MHz (Cell. CDMA) / 1851.25 - 1908.75MHz (PCS CDMA)
Max. RF Output Power: 24.4 dBm Conducted (Cell. CDMA)
24.26 dBm conducted (PCS CDMA)
Emission Designator(s): 1M26F9W (CDMA) / 1M26F9W (PCS)
Test Device Serial No.: *identical prototype* [S/N: A1000004100B6A]
Class II Permissive Change: Please See FCC Change Document
Original Grant Date: 11/06/2007

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Grant Conditions: Power output listed is conducted.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.



Randy Ortanez
President




FCC ID: O9EGTM1		FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0812091718.O9E	Test Dates: December 15, 2008	EUT Type: Cellular/PCS CDMA Module		Page 1 of 19

T A B L E O F C O N T E N T S


FCC PART 22 & 24 MEASUREMENT REPORT	3
1.0 INTRODUCTION	4
1.1 SCOPE.....	4
1.2 TESTING FACILITY.....	4
2.0 PRODUCT INFORMATION.....	5
2.1 EQUIPMENT DESCRIPTION	5
2.2 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS	5
2.3 LABELING REQUIREMENTS.....	5
3.0 DESCRIPTION OF TESTS	6
3.1 MEASUREMENT PROCEDURE.....	6
3.2 OCCUPIED BANDWIDTH EMISSION LIMITS.....	6
3.3 CELLULAR - BASE FREQUENCY BLOCKS	6
3.4 CELLULAR - MOBILE FREQUENCY BLOCKS.....	7
3.5 PCS - BASE FREQUENCY BLOCKS.....	7
3.6 PCS - MOBILE FREQUENCY BLOCKS	7
3.7 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	7
3.8 RADIATED SPURIOUS AND HARMONIC EMISSIONS.....	8
4.0 TEST EQUIPMENT CALIBRATION DATA	9
5.0 SAMPLE CALCULATIONS	10
6.0 TEST RESULTS	11
6.1 SUMMARY	11
6.2 CONDUCTED OUTPUT POWER	12
6.3 CELLULAR CDMA RADIATED MEASUREMENTS	13
6.4 PCS CDMA RADIATED MEASUREMENTS	16
7.0 CONCLUSION	19

FCC ID: 09EGTM1		FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 Reviewed by: Quality Manager
Test Report S/N: 0812091718.O9E	Test Dates: December 15, 2008	EUT Type: Cellular/PCS CDMA Module	Page 2 of 19



MEASUREMENT REPORT

FCC Part 22 & 24



§2.1033 General Information


APPLICANT: Wavecom Inc.
APPLICANT ADDRESS: 430 Davis Drive, Suite 300
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 6660-B Dobbin Road, Columbia, MD 21045 USA
FCC RULE PART(S): §2; §22(H), §24(E)
BASE MODEL: GTM-1
FCC ID: O9EGTM1
FCC CLASSIFICATION: PCS Licensed Transmitter (PCB)
EMISSION DESIGNATOR(S): 1M26F9W (CDMA) / 1M26F9W (PCS)
MODE: CDMA
FREQUENCY TOLERANCE: ±0.00025 % (2.5 ppm)
Test Device Serial No.: A1000004100B6A Production Pre-Production Engineering
DATE(S) OF TEST: December 15, 2008
TEST REPORT S/N: 0812091718.O9E

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab. located in Columbia, MD 21045, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (IC-2451).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (IC-2451) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.



FCC ID: 09EGTM1		FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	Reviewed by: Quality Manager
Test Report S/N: 0812091718.O9E	Test Dates: December 15, 2008	EUT Type: Cellular/PCS CDMA Module	Page 3 of 19

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity are, the Baltimore-Washington Interntl (BWI) airport, the city of Baltimore and the Washington, DC area. (see *Figure 1-1*).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on January 27, 2006 and Industry Canada.

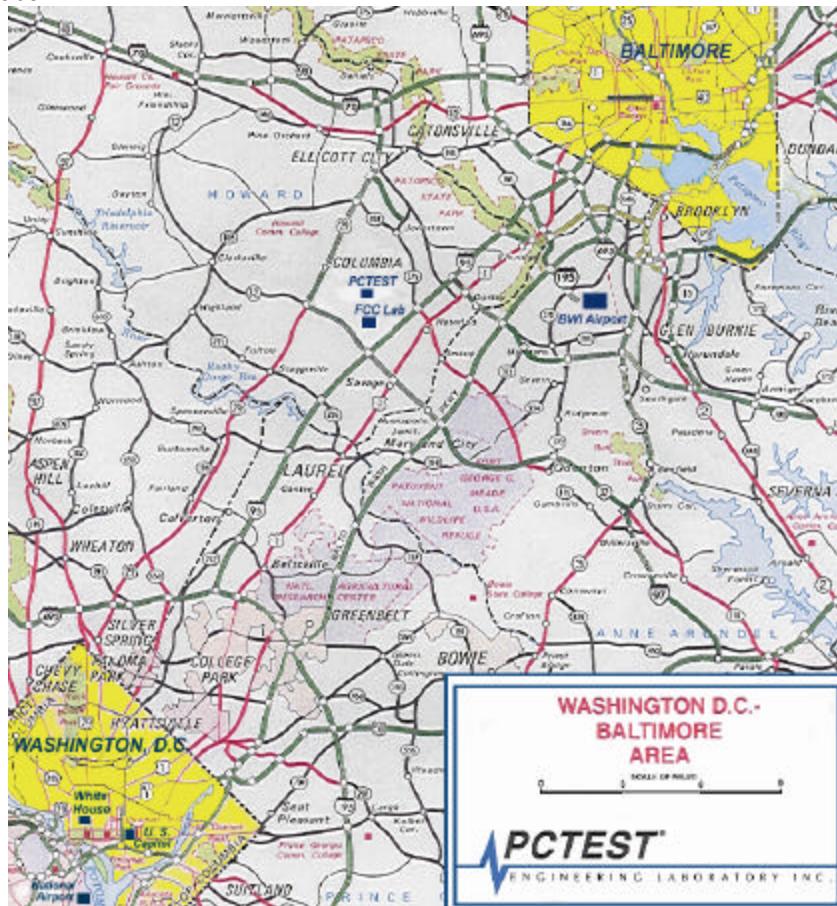


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: 09EGTM1		FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0812091718.O9E	Test Dates: December 15, 2008	EUT Type: Cellular/PCS CDMA Module		Page 4 of 19

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Wavecom Cellular/PCS CDMA Module FCC ID: O9EGTM1**. The EUT consisted of the following component(s):

Trade Name / Base Model	FCC ID	Description
Wavecom / Model: GTM-1	O9EGTM1	Cellular/PCS CDMA Module

Table 2-1. EUT Equipment Description

2.2 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

2.3 Labeling Requirements

Per 2.925

The FCC identifier shall be permanently affixed to the equipment and shall be readily visible to the purchaser at the time of purchase.

Per 15.19; Docket 95-19

In addition to this requirement, a device subject to certification shall be labeled as follows:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(b)(2).

Please see attachment for FCC ID label and label location.

FCC ID: O9EGTM1		FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0812091718.O9E	Test Dates: December 15, 2008	EUT Type: Cellular/PCS CDMA Module		Page 5 of 19

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The radiated spurious measurements were made outdoors at a 3-meter test range (see Figure 3-1). The equipment under test is placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

Deviation from Measurement Procedure.....None





Figure 3-1. Diagram of 3-meter outdoor test range

3.2 Occupied Bandwidth Emission Limits

§2.1049, 22.917(a), 24.238(a)

- On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

3.3 Cellular - Base Frequency Blocks

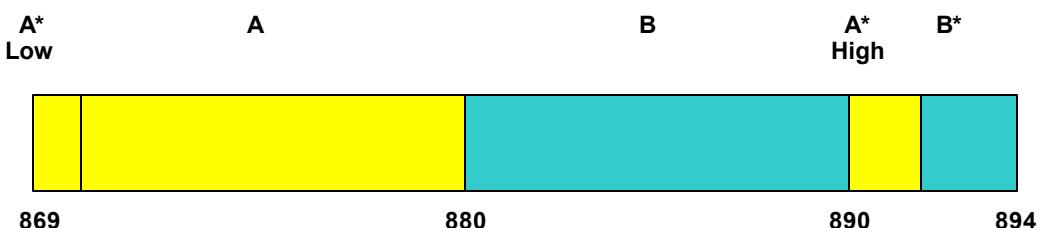

BLOCK 1: 869 – 880 MHz (A* Low + A)

BLOCK 3: 890 – 891.5 MHz (A* High)


BLOCK 2: 880 – 890 MHz (B)

BLOCK 4: 891.5 – 894 MHz (B*)

FCC ID: 09EGTM1		FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	Reviewed by: Quality Manager
Test Report S/N: 0812091718.O9E	Test Dates: December 15, 2008	EUT Type: Cellular/PCS CDMA Module	Page 6 of 19



3.4 Cellular - Mobile Frequency Blocks

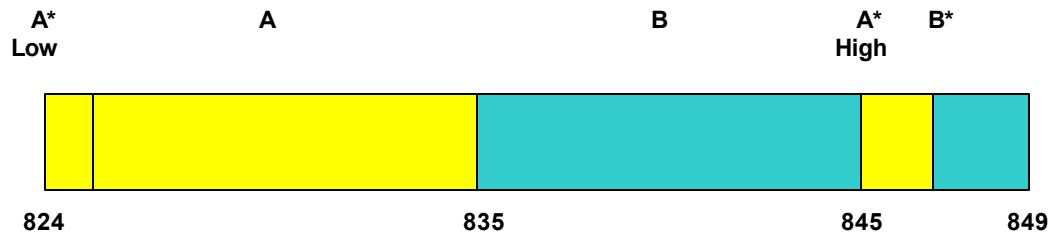


BLOCK 1: 824 – 835 MHz (A* Low + A)

BLOCK 3: 845 – 846.5 MHz (A* High)

BLOCK 2: 835 – 845 MHz (B)

BLOCK 4: 846.5 – 849 MHz (B*)

3.5 PCS - Base Frequency Blocks

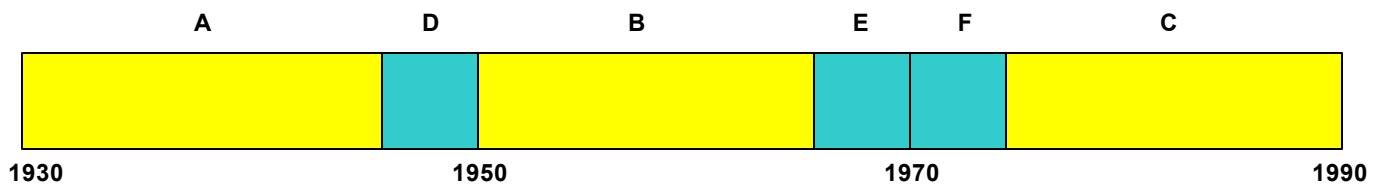

BLOCK 1: 1930 – 1945 MHz (A)

BLOCK 4: 1965 – 1970 MHz (E)


BLOCK 2: 1945 – 1950 MHz (D)

BLOCK 5: 1970 – 1975 MHz (F)

BLOCK 3: 1950 – 1965 MHz (B)

BLOCK 6: 1975 – 1990 MHz (C)

3.6 PCS - Mobile Frequency Blocks

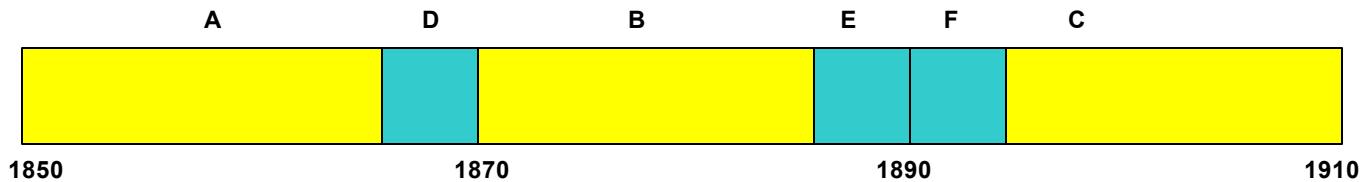

BLOCK 1: 1850 – 1865 MHz (A)

BLOCK 4: 1885 – 1890 MHz (E)

BLOCK 2: 1865 – 1870 MHz (D)

BLOCK 5: 1890 – 1895 MHz (F)

BLOCK 3: 1870 – 1885 MHz (B)

BLOCK 6: 1895 – 1910 MHz (C)

3.7 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051, 22.917(a), 24.238(a)

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.

FCC ID: 09EGTM1	 PCTEST Engineering Laboratory, Inc.	FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0812091718.09E	Test Dates: December 15, 2008	EUT Type: Cellular/PCS CDMA Module		Page 7 of 19
© 2009 PCTEST Engineering Laboratory, Inc.				



3.8 Radiated Spurious and Harmonic Emissions

§2.1053, 22.917(a), 24.238(a)

Spurious and harmonic radiated emissions are measured outdoors at our 3-meter test range. The equipment under test is placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration. This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.

FCC ID: 09EGTM1		FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0812091718.O9E	Test Dates: December 15, 2008	EUT Type: Cellular/PCS CDMA Module		Page 8 of 19

4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	263-10dB	(DC-18GHz) 10 dB Attenuator	N/A		N/A	N/A
-	No.165	(30MHz - 1000MHz) RG58 Coax Cable	N/A		N/A	N/A
-	No.166	(1000-26500MHz) Microwave RF Cable	N/A		N/A	N/A
-	No.167	(100kHz - 100MHz) RG58 Coax Cable	N/A		N/A	N/A
Agilent	11713A	Attenuation/Switch Driver	12/5/2008	Annual	12/5/2009	3439A02645
Agilent	8449B	(1-26.5GHz) Pre-Amplifier	12/5/2008	Annual	12/5/2009	3008A00985
Agilent	8495A	(0-70dB) DC-4GHz Attenuator	N/A		N/A	N/A
Agilent	85650A	Quasi-Peak Adapter	3/13/2008	Annual	3/13/2009	2043A00301
Agilent	8566B	(100Hz-22GHz) Spectrum Analyzer	12/5/2008	Annual	12/5/2009	3638A08713
Agilent	8566B	Opt. 462 Impulse Bandwidth	12/5/2008	Annual	12/5/2009	3701A22204
Agilent	8591A	(9kHz-1.8GHz) Spectrum Analyzer	8/19/2008	Annual	8/19/2009	3144A02458
Agilent	8648D	(9kHz-4GHz) Signal Generator	10/11/2007	Biennial	10/11/2009	3613A00315
Agilent	E4407B	ESA Spectrum Analyzer	3/13/2008	Annual	3/13/2009	US39210313
Agilent	E4432B	ESG-D Series Signal Generator	8/18/2008	Annual	8/18/2009	US40053896
Agilent	E4448A	(3Hz-50GHz) Spectrum Analyzer	1/24/2008	Annual	1/24/2009	US42510244
Agilent	E5515C	Wireless Communications Test Set	9/10/2008	Biennial	9/10/2010	GB41450275
Agilent	E8257D	(250kHz-20GHz) Signal Generator	3/8/2007	Biennial	3/8/2009	MY45470194
Emco	3115	Horn Antenna (1-18GHz)	9/24/2007	Biennial	9/24/2009	9704-5182
Emco	3115	Horn Antenna (1-18GHz)	10/4/2007	Biennial	10/4/2009	9205-3874
Emco	3121C-DB4	Dipole Antenna	1/23/2007	Biennial	1/23/2009	23951
Espec	ESX-2CA	Environmental Chamber	3/12/2008	Annual	3/12/2009	17620
Gigatronics	80701A	(0.05-18GHz) Power Sensor	8/18/2008	Annual	8/18/2009	1833460
Gigatronics	8651A	Universal Power Meter	8/18/2008	Annual	8/18/2009	8650319
MiniCircuits	VHF-1300+	High Pass Filter	N/A		N/A	30716
MiniCircuits	VHF-3100+	High Pass Filter	N/A		N/A	30721
Pasternack	PE2208-6	Bidirectional Coupler	N/A		N/A	N/A
Schwarzbeck	UHA9105	Dipole Antenna (400 - 1GHz) Rx	6/19/2007	Biennial	6/18/2009	9105-2404
Schwarzbeck	UHA9105	Dipole Antenna (400 - 1GHz) Tx	6/19/2007	Biennial	6/18/2009	9105-2403
Solar Electronics	8012-50-R-24-BNC	LISN	11/8/2007	Biennial	11/8/2009	310233
Sunol	DRH-118	Horn Antenna (1 - 18GHz)	5/9/2007	Biennial	5/9/2009	A050307

Table 4-1. Test Equipment

FCC ID: 09EGTM1		FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0812091718.O9E	Test Dates: December 15, 2008	EUT Type: Cellular/PCS CDMA Module		Page 9 of 19

5.0 SAMPLE CALCULATIONS

Emission Designator

Emission Designator = 1M25F9W

CDMA BW = 1.25 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data) (Measured at the 99.75% power bandwidth)

Spurious Radiated Emission - PCS Band

Example: Channel 25 PCS Mode 2nd Harmonic (3702.50 MHz)

The receive analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3702.50 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was $25.501 \text{ dBm} - (-24.80) = 50.3 \text{ dBc}$.

FCC ID: 09EGTM1		FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 Reviewed by: Quality Manager
Test Report S/N: 0812091718.O9E	Test Dates: December 15, 2008	EUT Type: Cellular/PCS CDMA Module	Page 10 of 19

6.0 TEST RESULTS

6.1 Summary

Company Name: Wavecom Inc.

FCC ID: O9EGTM1

FCC Classification: PCS Licensed Transmitter (PCB)

Mode(s): CDMA

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (TX)					
2.1049, 22.917(a), 24.238(a)	Occupied Bandwidth	N/A	CONDUCTED	PASS	Original Pt. 22/24 Test Report
2.1051, 22.917(a), 24.238(a)	Band Edge / Conducted Spurious Emissions	< $43 + 10\log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions		PASS	Original Pt. 22/24 Test Report
N/A	Conducted Power Measurements for 3G Devices	N/A		PASS	Section 6.2
2.1053, 22.917(a), 24.238(a)	Undesirable Emissions	< $43 + 10\log_{10}(P[\text{Watts}])$ for all out-of-band emissions	RADIATED	PASS	Sections 6.3, 6.4
RECEIVER MODE (RX) / DIGITAL EMISSIONS					
15.107	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.107 limits	LINE CONDUCTED	PASS	Pt. 15B Test Report
15.109	General Field Strength Limits (Restricted Bands and Radiated Emissions Limits)	< FCC 15.109 limits	RADIATED (30MHz-1GHz) (1-25 GHz)	PASS	Pt. 15B Test Report
RF EXPOSURE					
2.1091 / 2.1093	MPE Test	1 mW/cm ² (MPE Limit) @ 20 cm	MPE	PASS	MPE Report

Table 6-1. Summary of Test Results

FCC ID: O9EGTM1		FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0812091718.O9E	Test Dates: December 15, 2008	EUT Type: Cellular/PCS CDMA Module		Page 11 of 19

6.2 Conducted Output Power

A base station simulator (Agilent Model: E5515C) was used to establish communication with the **Wavecom Cellular/PCS CDMA Module FCC ID: O9EGTM1**. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. The CDMA conducted powers are reported below.

Band	Channel	Conducted Power
		[dBm]
Cellular	4132	24.3
	4183	24.4
	4233	24.4
PCS	9262	24.03
	9400	24.08
	9538	24.26

Table 6-2. CDMA Conducted Output Power

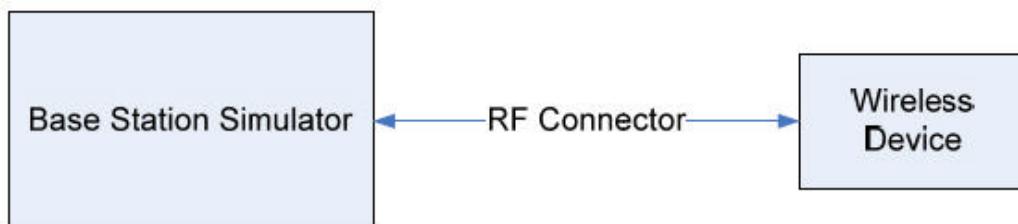


Figure 6-1. CDMA Conducted Power Test Setup Diagram

FCC ID: O9EGTM1		FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0812091718.O9E	Test Dates: December 15, 2008	EUT Type: Cellular/PCS CDMA Module		Page 12 of 19

6.3 Cellular CDMA Radiated Measurements

§2.1053, 22.917(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 824.70 MHz
 CHANNEL: 1013
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBD)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	Limit (dBm)	Margin
1649.40	-47.63	6.08	-41.54	H	-13.00	-28.5
2474.10	-54.33	6.08	-48.24	H	-13.00	-35.2
3298.80	-63.59	6.53	-57.06	H	-13.00	-44.1
4123.50	-68.77	6.87	-61.89	H	-13.00	-48.9
4948.20	-92.61	7.21	-85.40	H	-13.00	-72.4

Table 6-3. Radiated Spurious Data (Cellular CDMA Mode – Ch. 1013)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was powered by a DC power supply.

FCC ID: 09EGTM1		FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0812091718.O9E	Test Dates: December 15, 2008	EUT Type: Cellular/PCS CDMA Module		Page 13 of 19

Cellular CDMA Radiated Measurements (Cont'd)

§2.1053, 22.917(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 836.52 MHz
 CHANNEL: 384
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	Limit (dBm)	Margin
1673.04	-46.65	6.09	-40.56	H	-13.00	-27.6
2509.56	-53.67	6.55	-47.11	H	-13.00	-34.1
3346.08	-61.44	6.89	-54.55	H	-13.00	-41.5
4182.60	-65.39	7.43	-57.96	H	-13.00	-45.0
5019.12	-91.61	8.35	-83.26	H	-13.00	-70.3

Table 6-4. Radiated Spurious Data (Cellular CDMA Mode – Ch. 384)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was powered by a DC power supply.

FCC ID: 09EGTM1		FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0812091718.O9E	Test Dates: December 15, 2008	EUT Type: Cellular/PCS CDMA Module		Page 14 of 19

Cellular CDMA Radiated Measurements (Cont'd)

§2.1053, 22.917(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 848.31 MHz
 CHANNEL: 777
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	Limit (dBm)	Margin
1696.62	-47.33	6.09	-41.24	H	-13.00	-28.2
2544.93	-53.77	6.57	-47.21	H	-13.00	-34.2
3393.24	-60.76	6.91	-53.85	H	-13.00	-40.8
4241.55	-66.22	7.65	-58.58	H	-13.00	-45.6
5089.86	-91.28	8.33	-82.95	H	-13.00	-70.0

Table 6-5. Radiated Spurious Data (Cellular CDMA Mode – Ch. 777)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004.

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was powered by a DC power supply.

FCC ID: 09EGTM1		FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0812091718.O9E	Test Dates: December 15, 2008	EUT Type: Cellular/PCS CDMA Module		Page 15 of 19

6.4 PCS CDMA Radiated Measurements

§2.1053, 24.238(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1851.25 MHz
 CHANNEL: 25
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	Limit (dBm)	Margin
3702.50	-60.48	9.02	-51.47	H	-13.00	-38.5
5553.75	-63.10	10.40	-52.70	H	-13.00	-39.7
7405.00	-56.89	10.51	-46.38	H	-13.00	-33.4
9256.25	-56.30	11.84	-44.45	H	-13.00	-31.5
11107.50	-84.02	12.76	-71.26	H	-13.00	-58.3

Table 6-6. Radiated Spurious Data (PCS CDMA Mode – Ch. 25)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
 according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was powered by a DC power supply.

FCC ID: 09EGTM1		FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0812091718.O9E	Test Dates: December 15, 2008	EUT Type: Cellular/PCS CDMA Module		Page 16 of 19



PCS CDMA Radiated Measurements (Cont'd)

§2.1053, 24.238(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1880.00 MHz
CHANNEL: 600
MODULATION SIGNAL: CDMA (Internal)
DISTANCE: 3 meters

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	Limit (dBm)	Margin
3760.00	-53.68	8.99	-44.69	H	-13.00	-31.7
5640.00	-62.19	10.40	-51.79	H	-13.00	-38.8
7520.00	-57.74	10.62	-47.12	H	-13.00	-34.1
9400.00	-56.09	11.70	-44.39	H	-13.00	-31.4
11280.00	-83.30	12.69	-70.61	H	-13.00	-57.6

Table 6-7. Radiated Spurious Data (PCS CDMA Mode – Ch. 600)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was powered by a DC power supply.

FCC ID: 09EGTM1		FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0812091718.O9E	Test Dates: December 15, 2008	EUT Type: Cellular/PCS CDMA Module		Page 17 of 19



PCS CDMA Radiated Measurements (Cont'd)

§2.1053, 24.238(a)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1908.75 MHz
CHANNEL: 1175
MODULATION SIGNAL: CDMA (Internal)
DISTANCE: 3 meters

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	Limit (dBm)	Margin
3817.50	-48.39	8.97	-39.42	H	-13.00	-26.4
5726.25	-62.87	10.40	-52.47	H	-13.00	-39.5
7635.00	-58.93	10.71	-48.22	H	-13.00	-35.2
9543.75	-56.15	11.64	-44.52	H	-13.00	-31.5
11452.50	-82.60	12.62	-69.98	H	-13.00	-57.0

Table 6-8. Radiated Spurious Data (PCS CDMA Mode – Ch. 1175)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This unit was powered by a DC power supply.

FCC ID: 09EGTM1		FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0812091718.O9E	Test Dates: December 15, 2008	EUT Type: Cellular/PCS CDMA Module		Page 18 of 19

7.0 CONCLUSION

The data collected show that the **Wavecom Cellular/PCS CDMA Module FCC ID: O9EGTM1** complies with all the requirements of Parts 2, 22, and 24 of the FCC rules.

FCC ID: O9EGTM1	 PCTEST [®] ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 CDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 Reviewed by: Quality Manager
Test Report S/N: 0812091718.O9E	Test Dates: December 15, 2008	EUT Type: Cellular/PCS CDMA Module	Page 19 of 19