

TEST REPORT

Applicant: Spireon Inc
Address: 18881 Von Karman Ave., Suite #1500
Equipment Type: BLE Camera
Model Name: IS3-LN(refer to section 2.3)
Brand Name: SOLERA
FCC ID: O9YZIS3
ISED Number: 22952-ZIS3
Test Standard: 47 CFR Part 15 Subpart B
ICES-003 Issue 7
ANSI C63.4-2014
Sample Arrival Date: May 07, 2025
Test Date: May 08, 2025 - May 09, 2025
Date of Issue: Jun. 25, 2025

ISSUED BY:

Shanghai Tejet Communications Technology Co., Ltd. Testing Center



Prepared by: Chai Yong

Reviewed by: Huang Chengkun

Approved by: Zhang Yanqing
(Laboratory Manager)

Chai Yong

Huang Chengkun

Zhang Yanqing

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Jun. 20, 2025</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>Jun. 25, 2025</u>	<u>Change the Brand Name</u> <u>The original report is invalid</u>

TABLE OF CONTENTS

1 GENERAL INFORMATION	4
1.1 Test Laboratory	4
1.2 Test Location	4
2 PRODUCT INFORMATION	5
2.1 Applicant Information	5
2.2 Manufacturer Information	5
2.3 General Description for Equipment under Test (EUT)	5
2.4 Ancillary Equipment	6
2.5 Technical Information	6
3 SUMMARY OF TEST RESULTS	7
3.1 Test Standards	7
3.2 Verdict	7
3.3 Decision Rule	7
3.4 Test Uncertainty	7
4 GENERAL TEST CONFIGURATIONS	8
4.1 Test Enclosure List	8
4.2 Test Configurations	8
4.3 Test Setups	9
5 TEST ITEMS	11
5.1 Emission Tests	11
5.1.1 Radiated emission	11
5.1.2 Conducted emission	14
ANNEX A TEST RESULTS AND TEST EQUIPMENT LIST	15

A.1 Radiated emission	15
A.2 Conducted emission	22
ANNEX B TEST SETUP PHOTOS	25
ANNEX C EUT EXTERNAL PHOTOS	25
ANNEX D EUT INTERNAL PHOTOS	25

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shanghai Tejet Communications Technology Co., Ltd. Testing Center
Address	1-2/F., Building 1, No.222, Xuanlan Road, Xuanqiao, Pudong New District, Shanghai, China

1.2 Test Location

Name	Shanghai Tejet Communications Technology Co., Ltd. Testing Center
Location	1-2/F., Building 1, No.222, Xuanlan Road, Xuanqiao, Pudong New District, Shanghai, China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1352. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 29671.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Spireon Inc
Address	18881 Von Karman Ave., Suite #1500

2.2 Manufacturer Information

Manufacturer	N/A
Address	N/A

2.3 General Description for Equipment under Test (EUT)

Equipment Type	BLE Camera
Model Name Under Test	IS3-LN
Series Model Name	IS3-MN
Description of Model Name Differentiation	ALL models are same with PCB board, circuit, structure and internal, but only differ in model name. Details please refer to the difference declaration file.
Hardware Version	P1
Software Version	ESP32 1.0.1.28
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Ancillary Equipment

Note: Not applicable.

2.5 Technical Information

Network and wireless connectivity	Bluetooth,2.4G WIFI
Classification of equipment	Class B
Highest frequency generated or used in the device or on which the device operates or tunes(MHz)	2483.5 MHz

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B	Unintentional Radiators
2	ICES-003 Issue 7	Information Technology Equipment (Including Digital Apparatus)
3	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

3.2 Verdict

No.	Description	FCC Rule	ISED Rule	Test Verdict	Remark
1	Radiated Emission	15.109	ICES-003, 3.2.2	Pass	--
2	Conducted Emission, DC Ports	15.107	ICES-003, 3.2.1	Pass	--

3.3 Decision Rule

- ☐ No Need
- ☒ Use General conformity decision rule (Consider uncertainty or not ☒ No ☐ Yes)
- ☐ Use Special Conformity Decision Rule (Consider uncertainty or not ☐ No ☐ Yes)

3.4 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions (150 kHz-30 MHz)-AMN	2.6 dB
Radiated emissions (30 MHz-1 GHz)-966#1	4.2 dB
Radiated emissions (1 GHz-18 GHz) -966#1	5.3 dB

4 GENERAL TEST CONFIGURATIONS

4.1 Test Enclosure List

Description	Manufacturer	Model	Serial No.	Length	Description	Use
Laptop	DELL	N/A	N/A	N/A	N/A	☒
DC Power Supply	ITECH	N/A	N/A	N/A	N/A	☒


4.2 Test Configurations

All test modes of EUT are listed in the table below.


Test Mode Configuration	Description
Mode 1	<u>The Full System Test Mode</u> EUT + DC Power Supply + Laptop

4.3 Test Setups


Test Setup 1

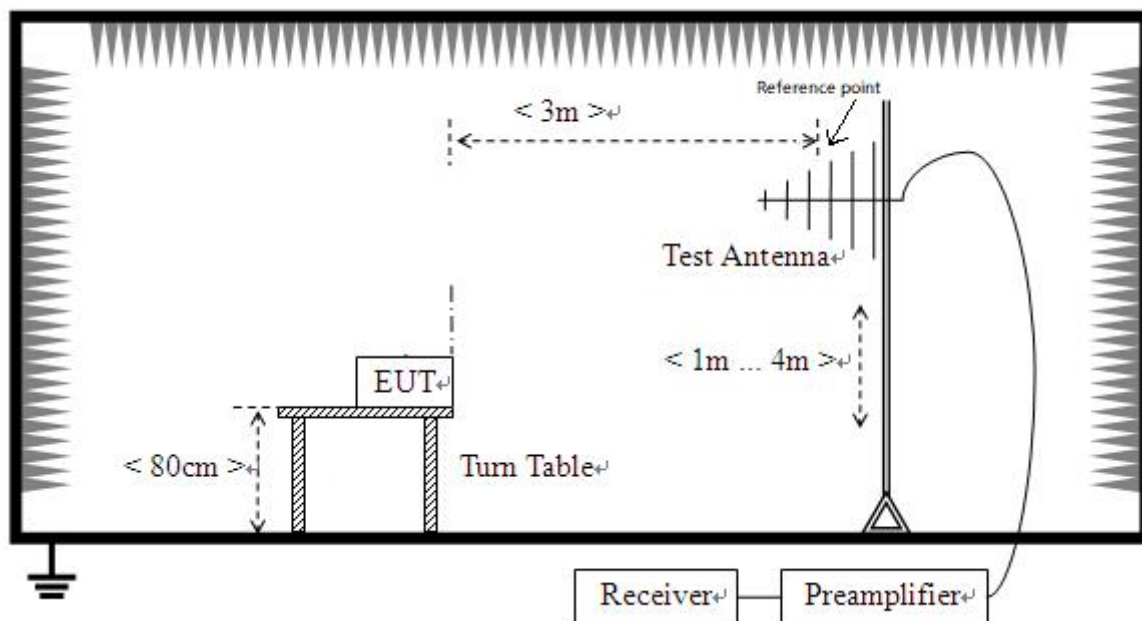

Radiated Emission (30 MHz-1 GHz)

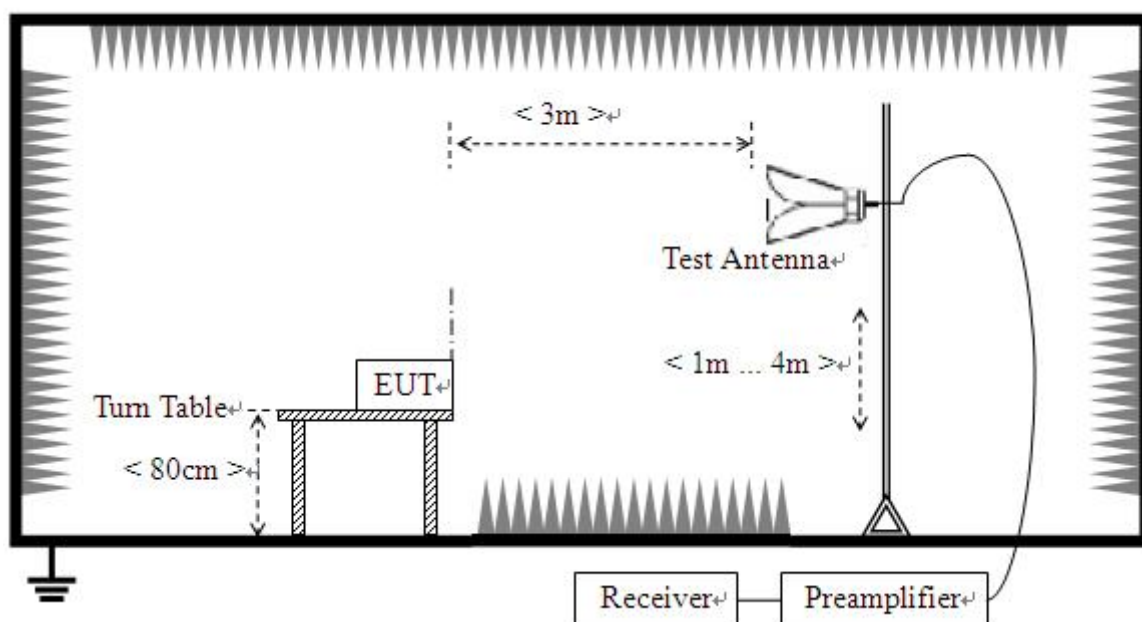

Radiated Emission (above 1 GHz)

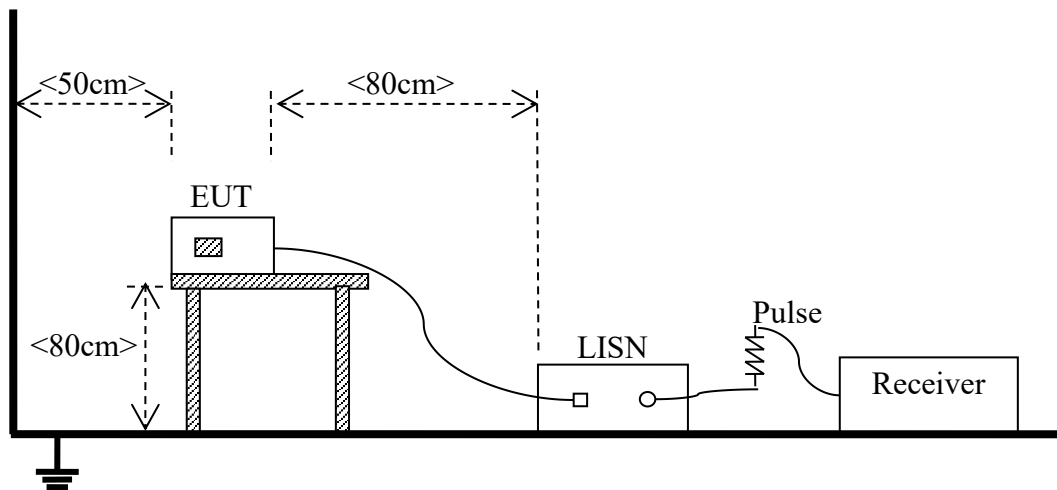Test Setup 2

Conducted emission, AC ports

5 TEST ITEMS

5.1 Emission Tests

5.1.1 Radiated emission

5.1.1.1 Limit

FCC:

Frequency range (MHz)	Class B (at 3 m)		Class A (at 3 m)
	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)
30 - 88	100	40	49.5
88 - 216	150	43.5	54
216 - 960	200	46	56.9
Above 960	500	54	60

Note:

- 1) Field Strength (dB $\mu\text{V/m}$) = $20 \cdot \log [\text{Field Strength } (\mu\text{V/m})]$.
- 2) In the emission tables above, the tighter limit applies at the band edges.
- 3) The limits using ANSI C63.4-2014.
- 4) For 30-1000 MHz, the CISPR quasi-peak is employed.

For above 1000 MHz, according to the requirements of FCC 15.35, unless otherwise specified, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

Frequency range (GHz)	Class B (at 3 m)			Class A (at 3 m)	
	Field Strength ($\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)
1 - F_M	500	54	74	60	80

Note 1: The highest measurement frequency, F_M , in GHz, shall be determined as next Table.

Note 2: Average Class A limit at 3m L_{3m} is determined by the following conversion formula:

$$L_{3m} = L_{10m} + 20 \cdot \log(d_{10m}/d_{3m})$$

Where:

L_{3m} is Average Class A limit at 3m;

L_{10m} is Average Class A limit at 10m;

d_{10m} is Measurement distance in 10m;

d_{3m} is Measurement distance in 3m.

For this case: $L_{3m} = 49.5 + 20 \cdot \log(10/3) = 60$ (dB $\mu\text{V/m}$).

Highest internal frequency (F_X)	Highest measurement frequency (F_M)
$F_X \leq 108 \text{ MHz}$	1 GHz
$108 \text{ MHz} \leq F_X \leq 500 \text{ MHz}$	2 GHz
$500 \text{ MHz} \leq F_X \leq 1 \text{ GHz}$	5 GHz
$F_X \geq 1 \text{ GHz}$	$5 * F_X$ or 40 GHz, whichever is lower.
Note: F_X is Highest frequency generated or used in the device or on which the device operates or tunes.	

ISED:

Frequency range (MHz)	Class A (at 3 m) Quasi-peak (dB μ V/m)	Class B (at 3 m) Quasi-peak (dB μ V/m)
30 - 88	50.0	40.0
88 - 216	54.0	43.5
216 - 230	56.9	46.0
230 - 960	57.0	47.0
960 - 1000	60.0	54.0
Note: The more stringent limit applies at transition frequencies.		

Frequency range (GHz)	Class A (3 m) Average (dB μ V/m)	Class A (3 m) Peak (dB μ V/m)	Class B (3 m) Average (dB μ V/m)	Class B (3 m) Peak (dB μ V/m)
1 - F_M	60	80	54	74
Note: 1. The highest measurement frequency, F_M , in GHz, shall be determined as next Table. 2. The measurement bandwidth shall be 1 MHz or greater. 3. These limit levels apply for a measurement distance of 3 m. If using a different measurement distance, the measured levels shall be extrapolated to the 3 m limit distance using a factor of 20 dB per decade of distance. The measurement distance shall place the measurement antenna in the far field of the ITE or digital apparatus under test. 4. The test site shall have been validated at the distance used for radiated emission measurements on the ITE or digital apparatus under test				

Highest internal frequency (F_X)	Highest measurement frequency (F_M)
$F_X \leq 108 \text{ MHz}$	1GHz
$108 \text{ MHz} \leq F_X \leq 500 \text{ MHz}$	2GHz
$500 \text{ MHz} \leq F_X \leq 1 \text{ GHz}$	5GHz
$F_X \geq 1 \text{ GHz}$	$5 * F_X$ up to a maximum of 40 GHz
Note: F_X is the highest fundamental frequency generated and/or used in the ITE or digital apparatus under test.	

5.1.1.2 Test setup

Please refer to 4.2 section description of test setup of test setup 1. The photo of test setup please refer to ANNEX B.

5.1.1.3 Test procedure

1. The test employing the methods of measurement described in the publication referenced in Section 3(b) (ANSI C63.4);
2. All Radiated Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.
3. An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.
4. The measurement frequency range is from 30 MHz to the 5th harmonic of the maximum frequency of the EUT internal source. The Turn Table is actuated to turn from 0° to 360° , and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.
5. Use the following spectrum analyzer settings:
 Span = wide enough to fully capture the emission being measured
 RBW = 1 MHz for $f \geq 1 \text{ GHz}$, 100 kHz for $f < 1 \text{ GHz}$
 VBW $\geq$ RBW
 Sweep = auto
 Detector function = peak for $f < 1 \text{ GHz}$, peak & RMS Average for $f \geq 1 \text{ GHz}$
 Trace = max hold

5.1.1.4 Test result and test equipment list

Please refer to ANNEX A.1.

Note:

1. Results (dB μ V/m) = Reading (dB μ V/m) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain (dB)
3. Margin = Limit – Results

5.1.2 Conducted emission

5.1.2.1 Limit

Frequency range (MHz)	Class A		Class B	
	Quasi-peak (dB μ V)	Average (dB μ V)	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	79	66	66 to 56	56 to 46
0.50 - 5	73	60	56	46
5 - 30	73	60	60	50

Note:

- 1) The lower limit shall apply at the band edges.
- 2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.
- 3) The limit using ANSI C63.4.

5.1.2.2 Test setup

Please refer to 4.2 section description of test setup of test setup 2. The photo of test setup please refer to ANNEX B.

5.1.2.3 Test procedure

1. The test employing the methods of measurement described in the publication referenced in Section 3(b) (ANSI C63.4);
2. The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.
3. Use the following spectrum analyzer settings:
 RBW = 9 kHz
 VBW $\geq$ RBW
 Sweep = 10ms
 Detector function = Peak & Average
 Trace = max hold

5.1.2.4 Test result and test equipment list

Please refer to ANNEX A.2.

Note:

1. Results (dB μ V) = Reading (dB μ V) + Factor (dB)

The reading level is calculated by software which is not shown in the sheet

2. Factor = Insertion loss + Cable loss

3. Margin = Limit – Results

ANNEX A TEST RESULTS AND TEST EQUIPMENT LIST

A.1 Radiated emission

Note 1: Measurements shall be made with a quasi-peak measuring receiver in the frequency range 30 MHz to 1000 MHz. To reduce the testing time, a peak measuring receiver may be used instead of a quasi-peak measuring receiver. In case of dispute, measurement with a quasi-peak measuring receiver will take precedence.


Note 2: The FCC limit is stricter than the IC and only reflects FCC Radiated Emission test data.

Sample No.	SC-SH2540086-S05	Temperature	20.9°C
Humidity	50%RH	Test Voltage	DC 12V
Test Engineer	Hao Longda	Test Date	2025.05.09

Test Mode 1

A.1.1 Test Antenna Vertical, 30 MHz – 1 GHz (FCC)


RE Test case_FCC Part 15B_FCC Part 15B Class B 30MHz-1GHz

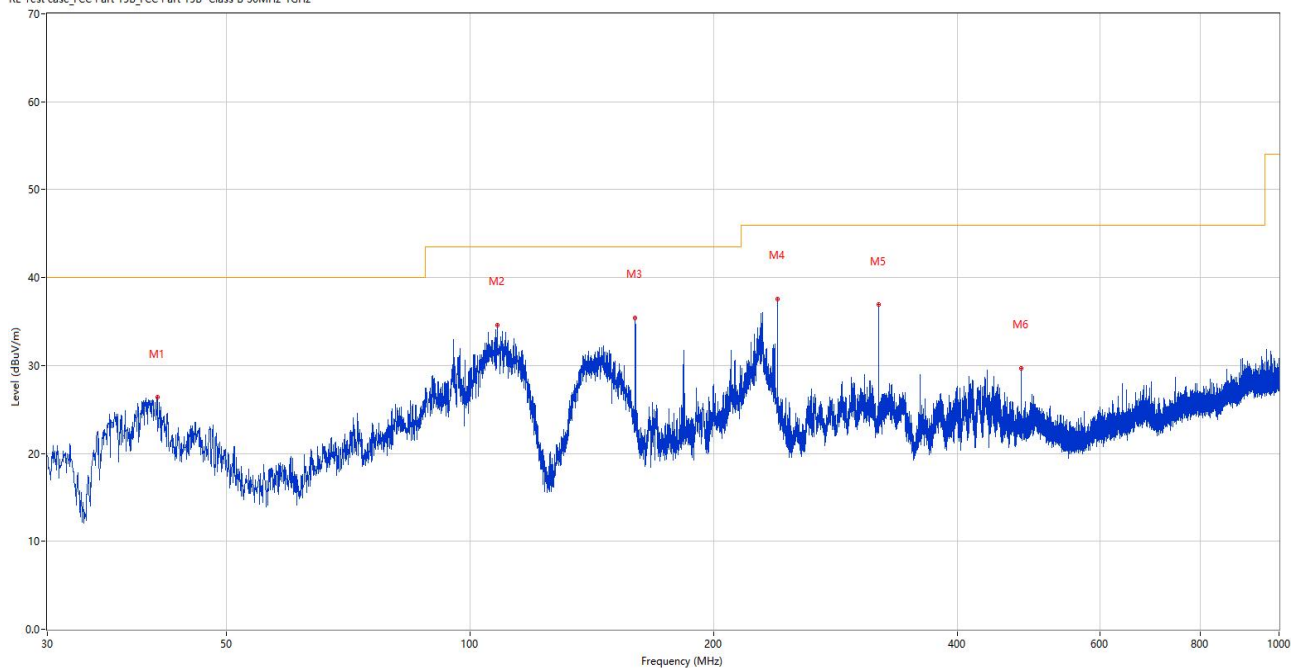

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	41.058	26.37	-26.88	40.0	13.63	Peak	239.00	100	Vertical	Pass
2	107.988	34.62	-27.16	43.5	8.88	Peak	287.00	100	Vertical	Pass
3	160.028	35.43	-29.54	43.5	8.07	Peak	335.00	100	Vertical	Pass
4	240.005	37.56	-25.34	46.0	8.44	Peak	234.00	100	Vertical	Pass
5	320.030	36.90	-23.53	46.0	9.10	Peak	360.00	100	Vertical	Pass
6	480.031	29.69	-19.27	46.0	16.31	Peak	326.00	100	Vertical	Pass

A.1.2 Test Antenna Horizontal, 30 MHz – 1 GHz (FCC)

RE Test case_FCC Part 15B_FCC Part 15B Class B 30MHz-1GHz

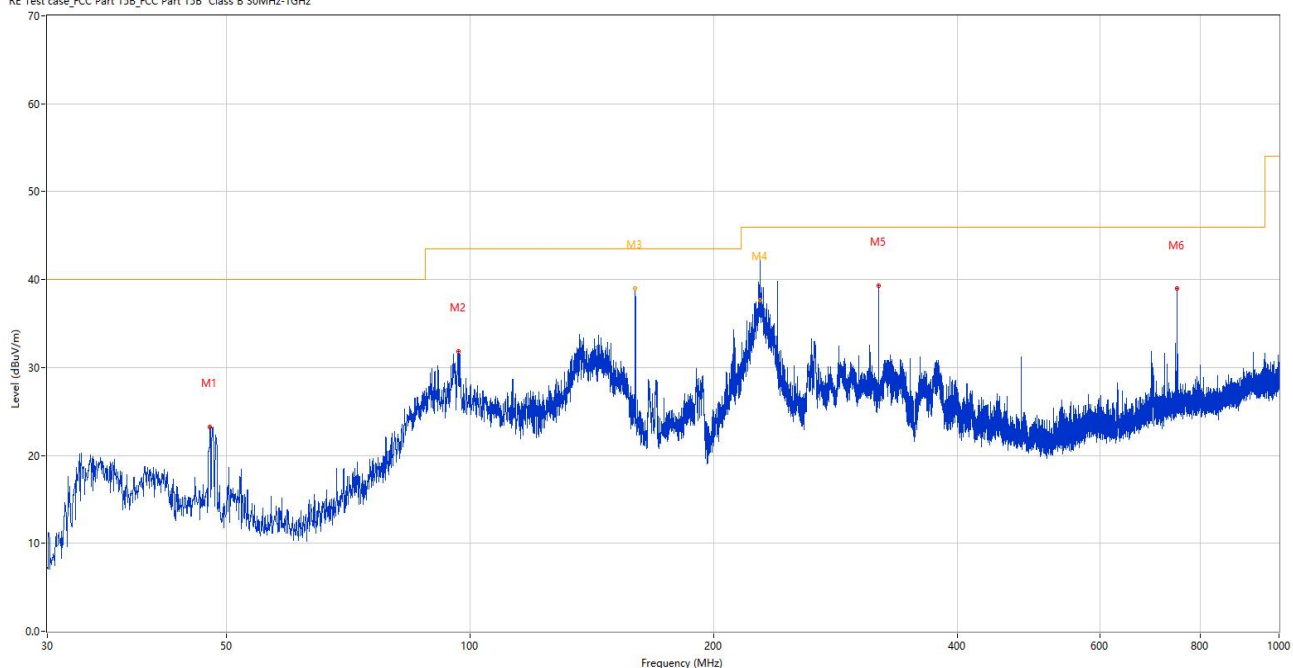

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	47.654	23.28	-25.76	40.0	16.72	Peak	358.00	200	Horizontal	Pass
2	96.590	31.80	-27.31	43.5	11.70	Peak	339.00	200	Horizontal	Pass
3	160.002	40.07	-29.54	43.5	3.43	Peak	334.00	159	Horizontal	N/A
3*	160.002	39.01	-29.54	43.5	4.49	QP	334.00	159	Horizontal	Pass
4	228.119	45.71	-25.95	46.0	0.29	Peak	222.00	103	Horizontal	N/A
4*	228.119	37.66	-25.95	46.0	8.34	QP	222.00	103	Horizontal	Pass
5	320.030	39.32	-23.53	46.0	6.68	Peak	188.00	100	Horizontal	Pass
6	748.188	38.94	-12.55	46.0	7.06	Peak	0.00	100	Horizontal	Pass


Equipment Information						
Equipment Name	Manufacturer	Model	Equipment No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038A	BH-EMC-L127	2025.02.12	2026.02.11	☒
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9163	BH-EMC-L132	2024.03.11	2027.03.10	☒
Anechoic Chamber	YiHeng	9m*6m*6m	BH-EMC-L001	2024.04.18	2027.04.17	☒
Description	Manufacturer	Name	Version	/		Use
Test Software	BALUN	BL410-E	V21.919	/		☒

Sample No.	SC-SH2540086-S05	Temperature	20.9°C
Humidity	50%RH	Test Voltage	DC 12V
Test Engineer	Hao Longda	Test Date	2025.05.09

Test Mode 1

A.1.3 Test Antenna Vertical, 1 GHz – 18 GHz


RE Test case_FCC Part 15B_FCC Part 15B Class B 1GHz-18GHz

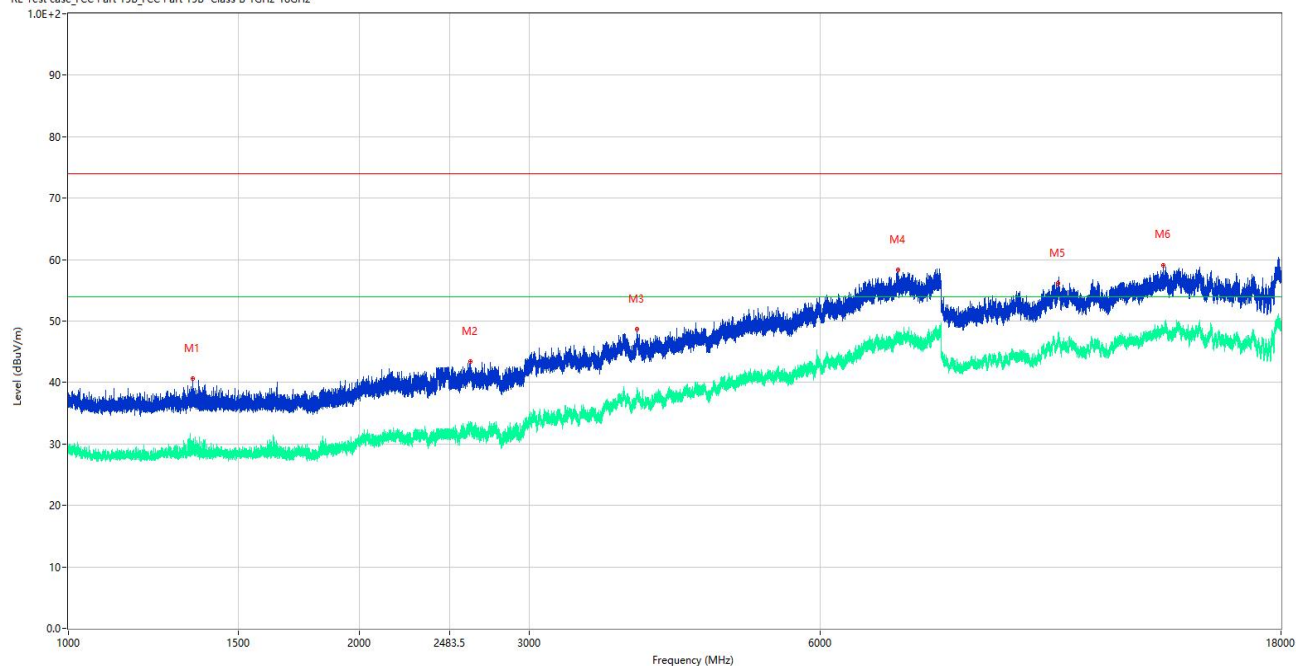

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1344.500	40.59	-15.92	74.0	33.41	Peak	298.00	100	Vertical	Pass
1**	1344.500	29.55	-15.92	54.0	24.45	AV	298.00	100	Vertical	Pass
2	2609.200	43.45	-10.17	74.0	30.55	Peak	197.00	100	Vertical	Pass
2**	2609.200	33.20	-10.17	54.0	20.80	AV	197.00	100	Vertical	Pass
3	3878.000	48.69	-2.69	74.0	25.31	Peak	9.00	100	Vertical	Pass
3**	3878.000	38.03	-2.69	54.0	15.97	AV	9.00	100	Vertical	Pass
4	7219.250	58.37	6.23	74.0	15.63	Peak	51.00	100	Vertical	Pass
4**	7219.250	47.11	6.23	54.0	6.89	AV	51.00	100	Vertical	Pass
5	10589.000	56.09	5.01	74.0	17.91	Peak	52.00	100	Vertical	Pass
5**	10589.000	46.79	5.01	54.0	7.21	AV	52.00	100	Vertical	Pass
6	13604.000	59.07	8.60	74.0	14.93	Peak	151.00	100	Vertical	Pass
6**	13604.000	48.00	8.60	54.0	6.00	AV	151.00	100	Vertical	Pass

A.1.4 Test Antenna Horizontal, 1 GHz – 18 GHz

RE Test case_FCC Part 15B_FCC Part 15B Class B 1GHz-18GHz

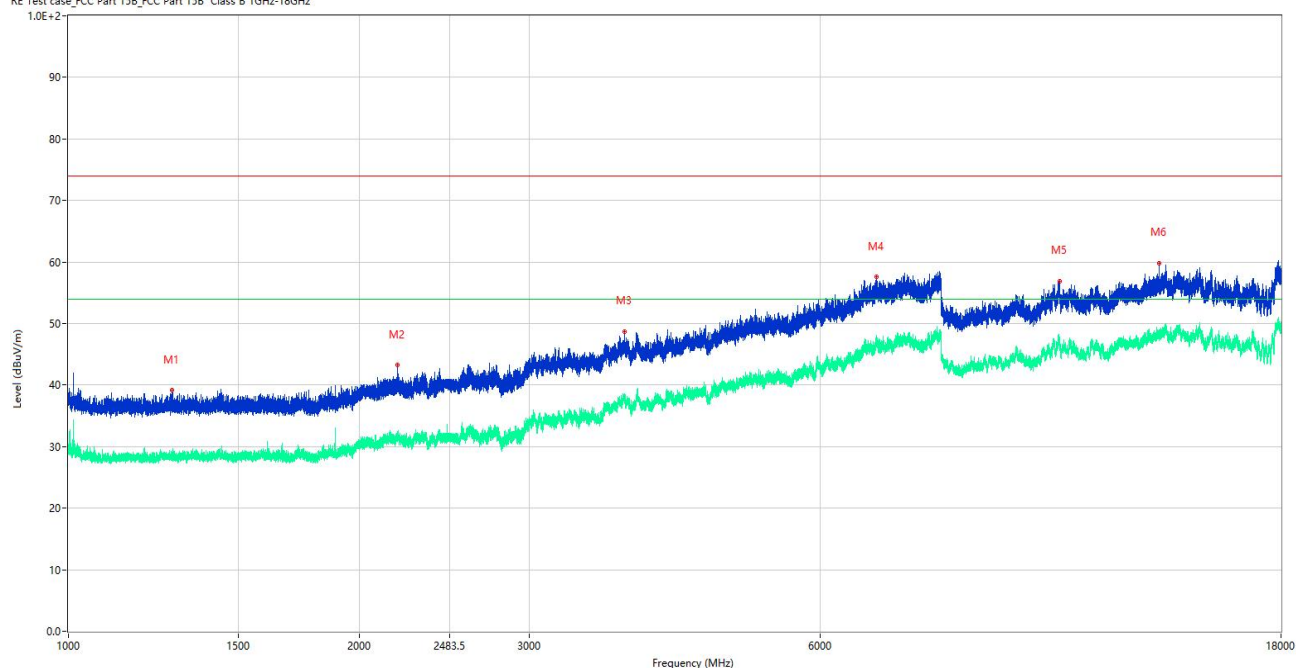

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1279.600	39.18	-15.99	74.0	34.82	Peak	74.00	100	Horizontal	Pass
1**	1279.600	28.49	-15.99	54.0	25.51	AV	74.00	100	Horizontal	Pass
2	2189.300	43.22	-12.78	74.0	30.78	Peak	27.00	100	Horizontal	Pass
2**	2189.300	31.59	-12.78	54.0	22.41	AV	27.00	100	Horizontal	Pass
3	3761.250	48.69	-3.00	74.0	25.31	Peak	292.00	100	Horizontal	Pass
3**	3761.250	37.43	-3.00	54.0	16.57	AV	292.00	100	Horizontal	Pass
4	6859.250	57.56	4.79	74.0	16.44	Peak	309.00	100	Horizontal	Pass
4**	6859.250	46.89	4.79	54.0	7.11	AV	309.00	100	Horizontal	Pass
5	10614.000	56.93	4.02	74.0	17.07	Peak	143.00	100	Horizontal	Pass
5**	10614.000	46.18	4.02	54.0	7.82	AV	143.00	100	Horizontal	Pass
6	13457.500	59.85	8.55	74.0	14.15	Peak	81.00	100	Horizontal	Pass
6**	13457.500	47.79	8.55	54.0	6.21	AV	81.00	100	Horizontal	Pass


Equipment Information						
Equipment Name	Manufacturer	Model	Equipment No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038A	BH-EMC-L127	2025.02.12	2026.02.11	☒
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	BH-EMC-L111	2024.03.11	2027.03.10	☒
Anechoic Chamber	YiHeng	9m*6m*6m	BH-EMC-L001	2024.04.18	2027.04.17	☒
Description	Manufacturer	Name	Version	/		Use
Test Software	BALUN	BL410-E	V21.919	/		☒

A.2 Conducted emission

Sample No.	SC-SH2540086-S05	Temperature	24.4°C
Humidity	53%RH	Test Voltage	AC 120V/60Hz
Test Engineer	Tong Yingying	Test Date	2025.05.08

Test Mode 1


A.2.1 AC ports - L Phase

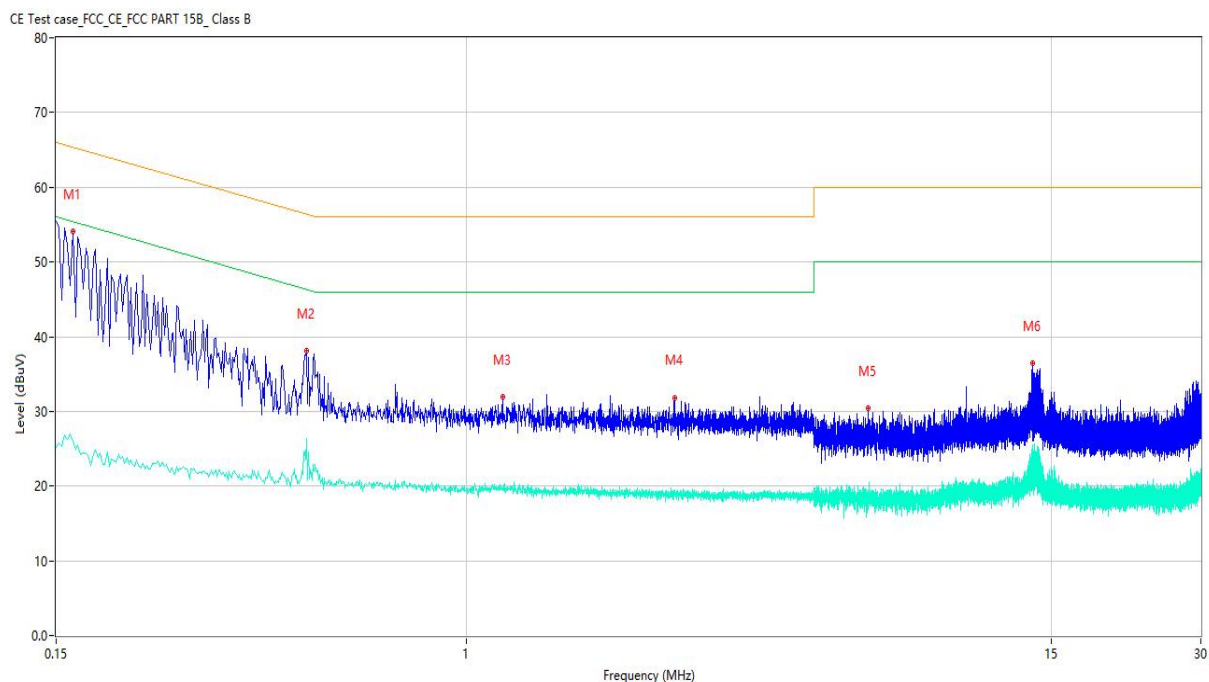

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.162	54.12	9.82	65.36	11.24	Peak	L	Pass
1**	0.162	26.04	9.82	55.36	29.32	AV	L	Pass
2	0.478	38.09	9.77	56.37	18.28	Peak	L	Pass
2**	0.478	26.42	9.77	46.37	19.95	AV	L	Pass
3	1.184	31.89	9.76	56.00	24.11	Peak	L	Pass
3**	1.184	19.44	9.76	46.00	26.56	AV	L	Pass
4	2.632	31.75	9.64	56.00	24.25	Peak	L	Pass
4**	2.632	18.97	9.64	46.00	27.03	AV	L	Pass
5	6.432	30.48	9.43	60.00	29.52	Peak	L	Pass
5**	6.432	19.30	9.43	50.00	30.70	AV	L	Pass
6	13.800	36.47	8.98	60.00	23.53	Peak	L	Pass
6**	13.800	25.50	8.98	50.00	24.50	AV	L	Pass

A.2.2 AC ports - N Phase

CE Test case_FCC_CE_FCC PART 15B_Class B

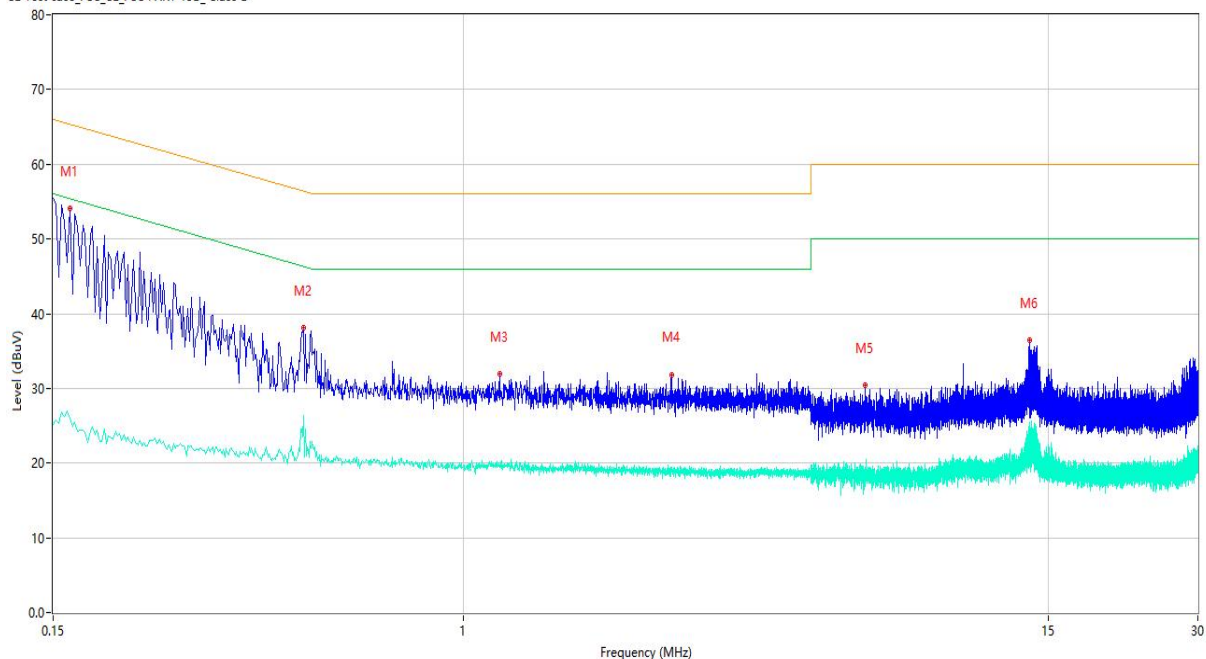

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.162	54.12	9.82	65.36	11.24	Peak	L	Pass
1**	0.162	26.04	9.82	55.36	29.32	AV	L	Pass
2	0.478	38.09	9.77	56.37	18.28	Peak	L	Pass
2**	0.478	26.42	9.77	46.37	19.95	AV	L	Pass
3	1.184	31.89	9.76	56.00	24.11	Peak	L	Pass
3**	1.184	19.44	9.76	46.00	26.56	AV	L	Pass
4	2.632	31.75	9.64	56.00	24.25	Peak	L	Pass
4**	2.632	18.97	9.64	46.00	27.03	AV	L	Pass
5	6.432	30.48	9.43	60.00	29.52	Peak	L	Pass
5**	6.432	19.30	9.43	50.00	30.70	AV	L	Pass
6	13.800	36.47	8.98	60.00	23.53	Peak	L	Pass
6**	13.800	25.50	8.98	50.00	24.50	AV	L	Pass

Equipment Information						
Equipment Name	Manufacturer	Model	Equipment No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038A	TJEMC144	2025.02.12	2026.02.11	☒
LISN	SCHWARZBECK	NSLK 8127	BH-EMC-L011	2025.02.11	2026.02.10	☒
10dB Limiter	SCHWARZBECK	VTSD 9561-F	BH-EMC-L014	2025.02.11	2026.02.10	☒
Shielded Room	YiHeng	4.1m*4.0m *3.2m	BH-EMC-L006	2024.02.22	2027.02.21	☒
Description	Manufacturer	Name	Version	/		Use
Test Software	BALUN	BL410-E	V21.919	/		☒

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SH2540444-AE.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SH2540444-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SH2540444-AI.PDF”.

Statement

1. The Testing Center guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. For the report with Accreditation Symbol, the items marked with "☆" are not within the accredited scope.
3. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the test report stamp.
4. The test data and results are only valid for the tested samples provided by the customer.
5. This report shall not be partially reproduced without the written permission of the Testing Center.
6. Any objection shall be raised to the Testing Center within 30 days after receiving the report.

--END OF REPORT--