



Shenzhen CTL Electromagnetic Technology Co., Ltd.
Tel: +86-755-89486194 Fax: +86-755-89486187

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15B

Report Reference No. **CTL120510411-WFR**

Compiled by

(position+printed name+signature) ... File administrators Andy Zhang

Andy Zhang

Name of the organization performing
the tests

Test Engineer Nie Quan

Nie Quan

(position+printed name+signature) ...

Approved by

(position+printed name+signature) ... Manager Tracy Qi

Tracy Qi

Date of issue June 08, 2012

Testing Laboratory Name **Shenzhen CTL Electromagnetic Technology Co., Ltd.**

Address Zone B, 4/F, Block 20, Guangqian Industrial Park, Longzhu Road, Nanshan, Shenzhen 518055 China.

Test Firm **Bontek Compliance Testing Laboratory Ltd**

Address 1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China

Applicant's name **Jetrich Electronic Co.,Ltd**

Address 7th Floor Zhixiang Building, 71st District Bao'an, Shenzhen 518101 China

Test specification:

Standard **FCC Part 15B**

ANSI C63.4: 2003

TRF Originator Shenzhen CTL Electromagnetic Technology Co., Ltd.

Master TRF Dated 2011-01

Shenzhen CTL Electromagnetic Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Electromagnetic Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Electromagnetic Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description Remote Dog Trainer

Operation Frequency 433.92MHz

Modulation mode: /

Model/Type reference JR-D008

Power Supply DC 3.7V

Antenna Type Integral without external RF Port

Result **Positive**

FCC ID **OBYJR-D008R**

TEST REPORT

Test Report No. :	CTL120510411-WFR	June 08, 2012
		Date of issue

Equipment under Test : Remote Dog Trainer

Model /Type : JR-D008(Receiver)

Listed Models : /

Difference description: /

Applicant : **Jetrich Electronic Co.,Ltd**

Address : 7th Floor Zhixiang Building, 71st District Bao'an, Shenzhen
518101 China

Manufacturer : **Jetrich Electronic Co.,Ltd**

Address : 7th Floor Zhixiang Building, 71st District Bao'an, Shenzhen
518101 China

Test Result according to the
standards on page 4:

Positive

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

<u>1.</u>	<u>TEST STANDARDS</u>	<u>4</u>
<u>2.</u>	<u>SUMMARY</u>	<u>5</u>
2.1.	General Remarks	5
2.2.	Equipment Under Test	5
2.3.	Short description of the Equipment under Test (EUT)	5
2.4.	EUT operation mode	5
2.5.	EUT configuration	5
2.6.	Related Submittal(s) / Grant (s)	6
2.7.	Modifications	6
2.8.	Test Result Summary	6
<u>3.</u>	<u>TEST ENVIRONMENT</u>	<u>7</u>
3.1.	Address of the test laboratory	7
3.2.	Test Facility	7
3.3.	Environmental conditions	7
3.4.	Configuration of Tested System	7
3.5.	Statement of the measurement uncertainty	8
3.6.	Equipments Used during the Test	8
<u>4.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>9</u>
4.1.	Radiated Emission Test	9
4.2.	Conducted Emissions Test	13
<u>5.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>16</u>
<u>6.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>17</u>

1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15 Subpart B - Unintentional Radiators](#)

[ANSI C63.4: 2003](#)



2. SUMMARY

2.1. General Remarks

Date of receipt of test sample : May 14, 2012

Testing commenced on : May 15, 2012

Testing concluded on : May 25, 2012

2.2. Equipment Under Test

Power supply system utilised

Power supply voltage : 120V / 60 Hz 115V / 60Hz
 12 V DC 24 V DC
 Other (specified in blank below)

DC 3.7 V from Battery

2.3. Short description of the Equipment under Test (EUT)

433.92MHz Receiver

For more details, refer to the user's manual of the EUT.

Serial number: Prototype

2.4. EUT operation mode

The EUT has been tested under typical operating condition.

2.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- supplied by the manufacturer

- supplied by the lab

Notebook Computer

Manufacturer : Samsung

Model No. : R428

Manufacturer : /

Model No. : /

2.6. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: OBYJR-D008R** filing to comply with the FCC Part 15, Subpart B Rules.

2.7. Modifications

No modifications were implemented to meet testing criteria.

2.8. Test Result Summary

Test Item	Test Requirement	Standard Paragraph	Result
Radiated Emission	FCC PART 15	Section 15.109	PASS
Conducted Emission	FCC PART 15	Section 15.107	PASS



3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Bontek Compliance Testing Laboratory Ltd
1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 22/EN 55022 requirements

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 338263

Bontek Compliance Testing Laboratory Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 338263, March 24, 2008.

IC Registration No.: 7631A

The 3m alternate test site of Bontek Compliance Testing Laboratory Ltd EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 7631A on March, 2011.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 °C

Humidity: 30-60 %

Atmospheric pressure: 950-1050mbar

3.4. Configuration of Tested System

Fig. 2-1 Configuration of Tested System

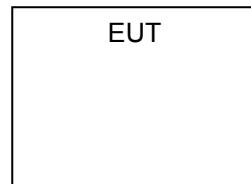


Table 2-1 Equipment Used in Tested System

3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Bontek Compliance Testing Laboratory Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Bontek laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	1~12.75GHz	4.32dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.6. Equipments Used during the Test


Radiated Emission						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
1	ULTRA-BROADBAND ANTENNA	ROHDE & SCHWARZ	HL562	100015	2012/04/11	2013/04/10
2	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESI 26	100009	2012/04/10	2013/04/09
3	RF TEST PANEL	ROHDE & SCHWARZ	TS / RSP	335015/ 0017	2012/04/10	2013/04/09
4	TURNTABLE	ETS	2088	2149	2012/04/10	2013/04/09
5	ANTENNA MAST	ETS	2075	2346	2012/04/13	2013/04/12
6	EMI TEST SOFTWARE	ROHDE & SCHWARZ	ESK1	N/A	2012/04/10	2013/04/09
7	Loop Antenna	ROHDE & SCHWARZ	HFH2-Z2	8335211/0035	2012/04/15	2013/04/14
8	Horn Antenna	Schwarzbeck	BBHA9120 A	512	2012/04/15	2013/04/14

4. TEST CONDITIONS AND RESULTS


4.1. Radiated Emission Test

Test Configuration


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

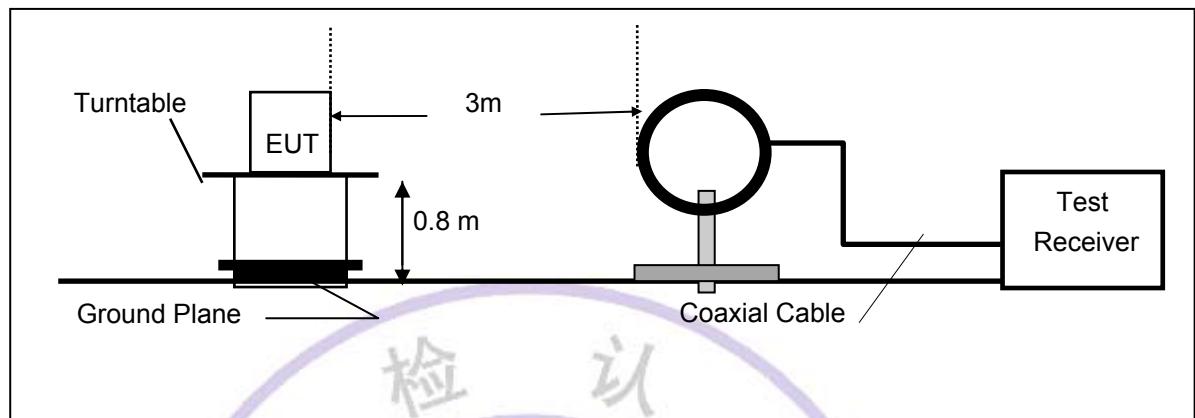

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

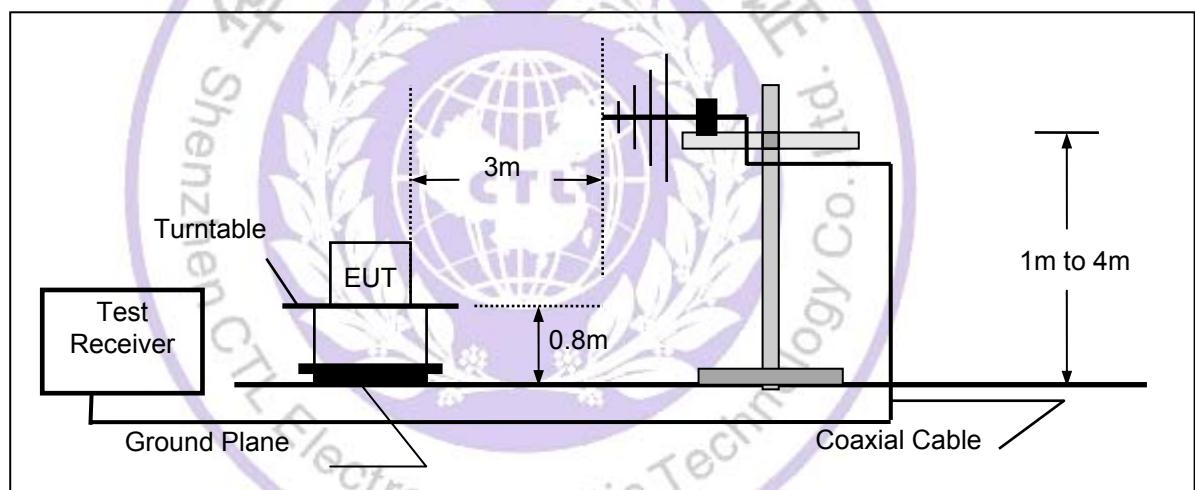

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

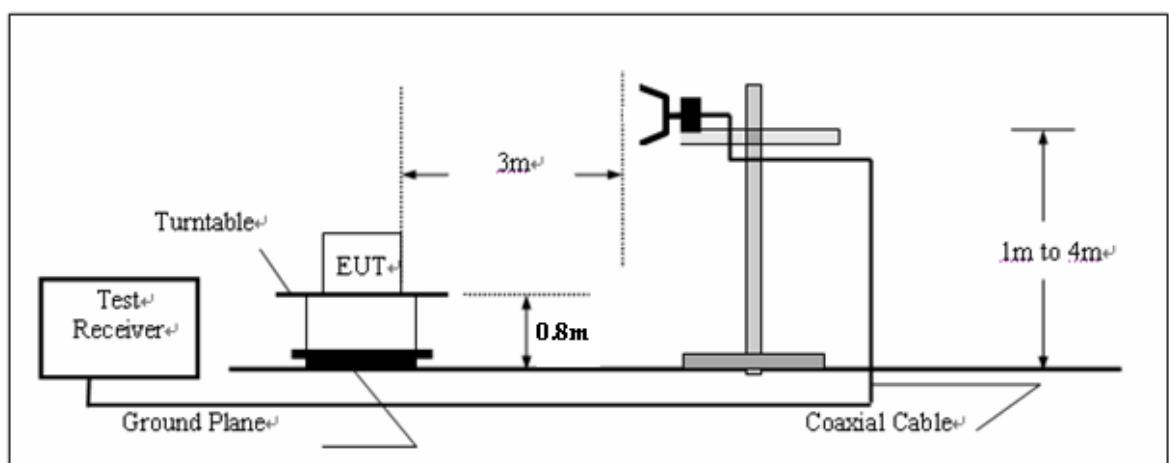

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$\mathbf{FS = RA + AF + CL - AG}$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

Radiation Limit

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

Note:


Three axes are chosen for pretest, the Z axis is the worst mode for final test.

For battery operated equipment, the equipment tests shall be performed using a new battery.

Radiation Test Result

SWEET TABLE: "test (30M-1G)"

Short Description: Field Strength
 Start Stop Detector Meas. IF Transducer
 Frequency Frequency Time Bandw.
 30.0 MHz 1.0 GHz MaxPeak Coupled 100 kHz VULB9163 NEW

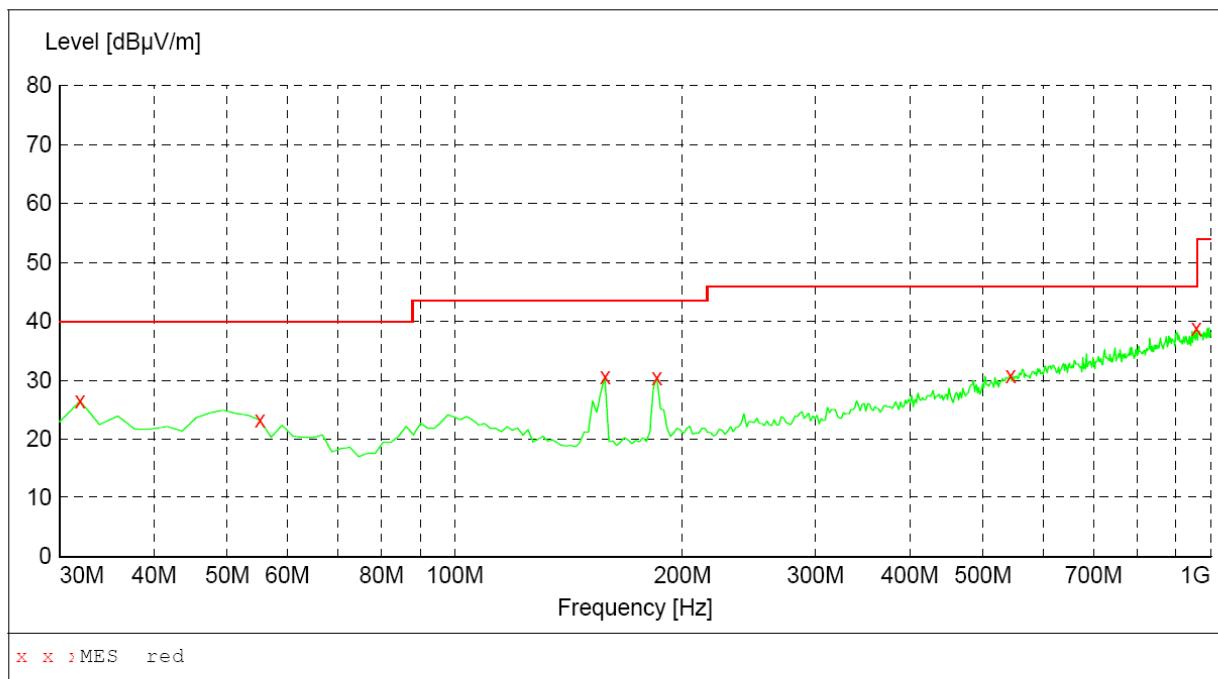


MEASUREMENT RESULT:

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
31.940000	26.50	14.4	40.0	13.5	Peak	100.0	130.00	VERTICAL
55.220000	23.30	15.6	40.0	16.7	Peak	100.0	54.00	VERTICAL
158.040000	30.70	13.7	43.5	12.8	Peak	100.0	216.00	VERTICAL
185.200000	30.50	15.6	43.5	13.0	Peak	100.0	50.00	VERTICAL
544.100000	30.90	25.0	46.0	15.1	Peak	100.0	170.00	VERTICAL
957.320000	38.80	31.9	46.0	7.2	Peak	100.0	330.00	VERTICAL

SWEET TABLE: "test (30M-1G)"

Short Description: Field Strength
 Start Stop Detector Meas. IF Transducer
 Frequency Frequency Time Bandw.
 30.0 MHz 1.0 GHz MaxPeak Coupled 100 kHz VULB9163 NEW

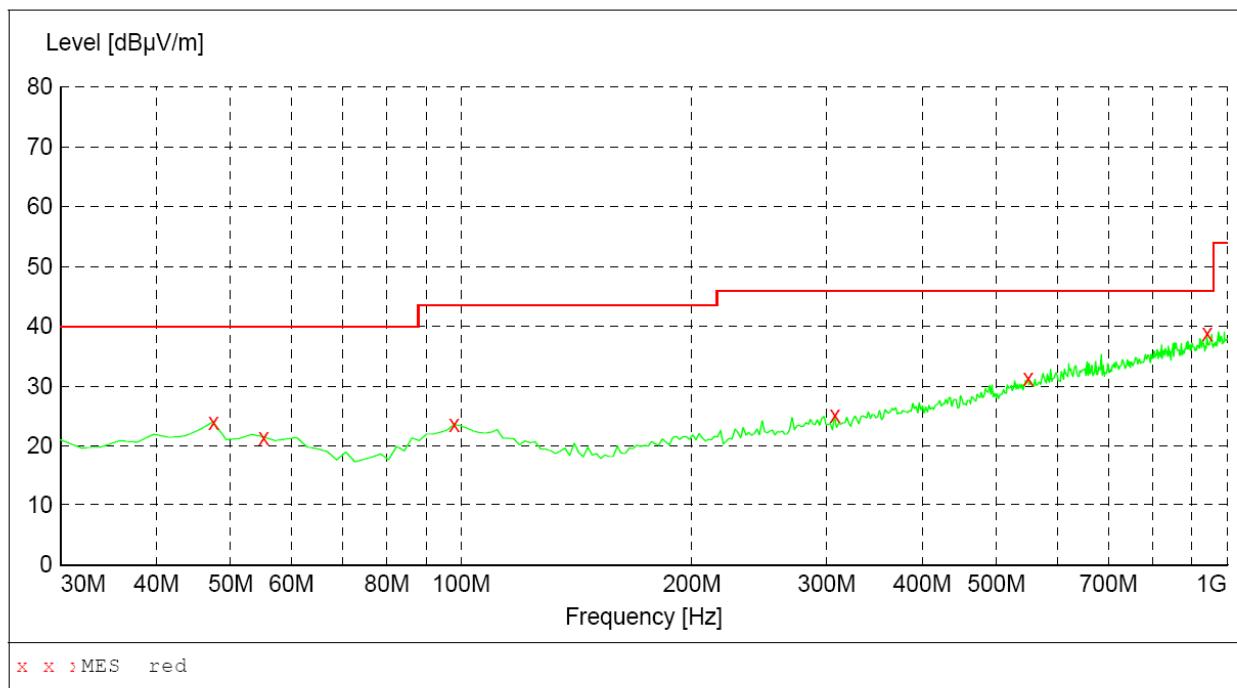***MEASUREMENT RESULT:***


Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	24.10	15.8	40.0	15.9	Peak	300.0	25.00	HORIZONTAL
55.220000	21.50	15.6	40.0	18.5	Peak	300.0	47.00	HORIZONTAL
97.900000	23.60	17.4	43.5	19.9	Peak	300.0	217.00	HORIZONTAL
307.420000	25.10	18.9	46.0	20.9	Peak	300.0	320.00	HORIZONTAL
549.920000	31.40	25.2	46.0	14.6	Peak	100.0	170.00	HORIZONTAL
941.800000	38.90	31.7	46.0	7.1	Peak	100.0	40.00	HORIZONTAL

Remark:

- (1) Measuring frequencies from 9 KHz to the 2 GHz, loop antenna used below 30MHz. See Section 3.6 table. Radiated emission test 9KHz to 25MHz and above 1GHz was verified, and no any emission was found except system noise floor.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “—” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of EMI Test Receiver was 120KHz for measuring from 30 MHz to 1 GHz and 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.

4.2. Conducted Emissions Test

Test Configuration

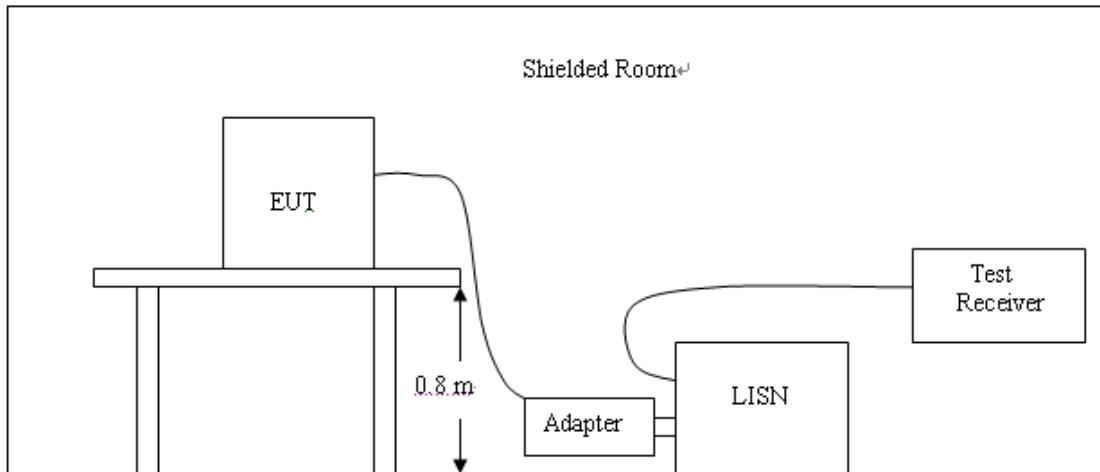

Test Procedure

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4.
- 2 Support equipment, if needed, was placed as per ANSI C63.4.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4 The EUT received DC6V power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

Conducted Power Line Emission Limit

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following :


Frequency (MHz)	Maximum RF Line Voltage (dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

Test Results

SCAN TABLE: "Voltage (9K-30M) FIN"
Short Description: 150K-30M Voltage

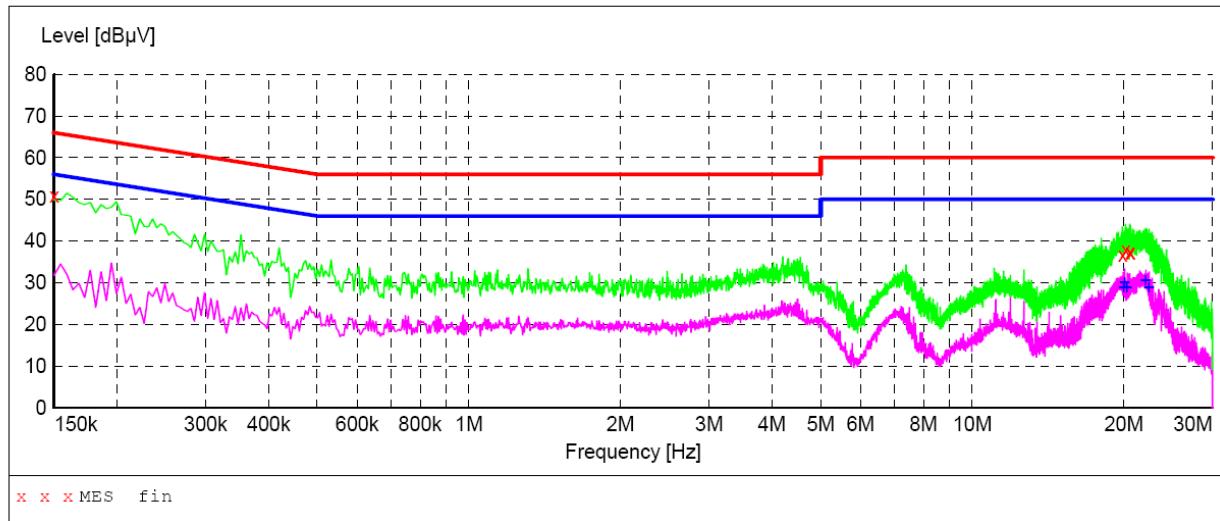


MEASUREMENT RESULT:

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.150000	50.80	10.2	66	15.2	QP	L1	GND
19.887000	36.70	10.9	60	23.3	QP	L1	GND
20.179500	37.90	11.0	60	22.1	QP	L1	GND
20.566500	37.30	11.0	60	22.7	QP	L1	GND
20.611500	37.10	11.0	60	22.9	QP	L1	GND

MEASUREMENT RESULT:

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
19.986000	28.90	10.9	50	21.1	AV	L1	GND
20.062500	29.90	11.0	50	20.1	AV	L1	GND
20.292000	28.90	11.0	50	21.1	AV	L1	GND
22.083000	30.60	11.0	50	19.4	AV	L1	GND
22.416000	28.80	11.0	50	21.2	AV	L1	GND

SCAN TABLE: "Voltage (9K-30M) FIN"
 Short Description: 150K-30M Voltage

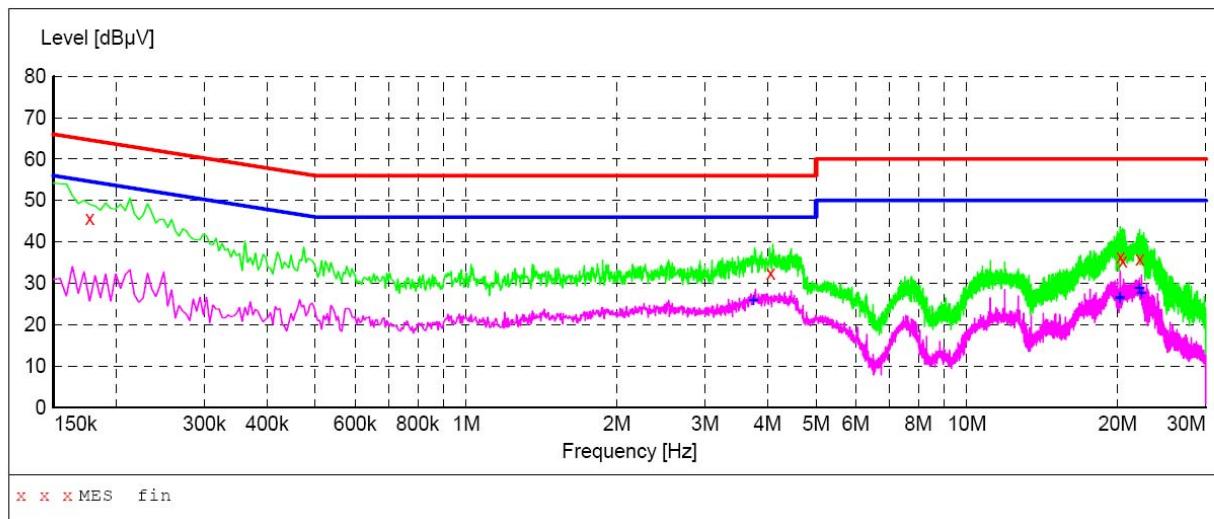

MEASUREMENT RESULT:

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.177000	45.60	10.2	65	19.0	QP	N	GND
4.051500	32.40	10.4	56	23.6	QP	N	GND
20.265000	36.40	11.0	60	23.6	QP	N	GND
20.476500	35.50	11.0	60	24.5	QP	N	GND
22.173000	36.00	11.0	60	24.0	QP	N	GND

MEASUREMENT RESULT:

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
3.750000	25.90	10.4	46	20.1	AV	N	GND
20.224500	26.30	11.0	50	23.7	AV	N	GND
20.251500	26.60	11.0	50	23.4	AV	N	GND
22.078500	28.80	11.0	50	21.2	AV	N	GND
22.321500	27.60	11.0	50	22.4	AV	N	GND

5. Test Setup Photos of the EUT







6. External and Internal Photos of the EUT

External Photos



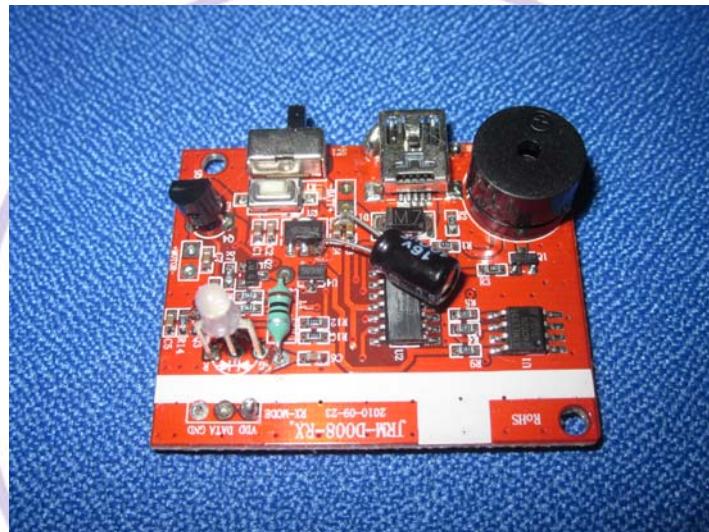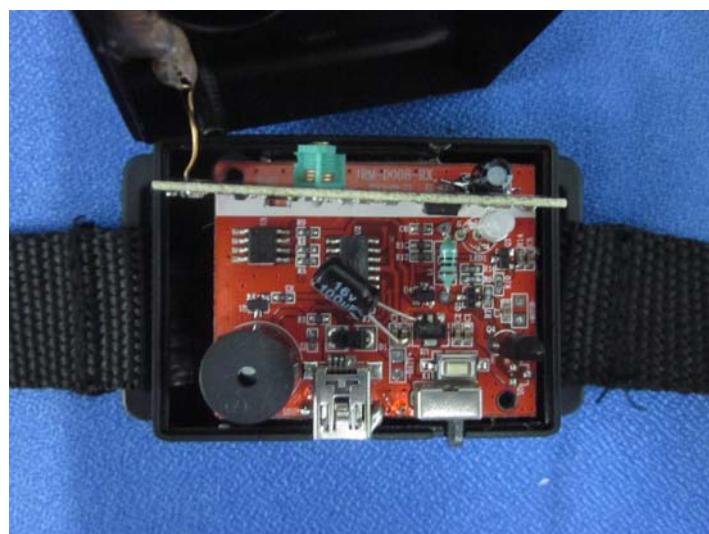

Internal Photos

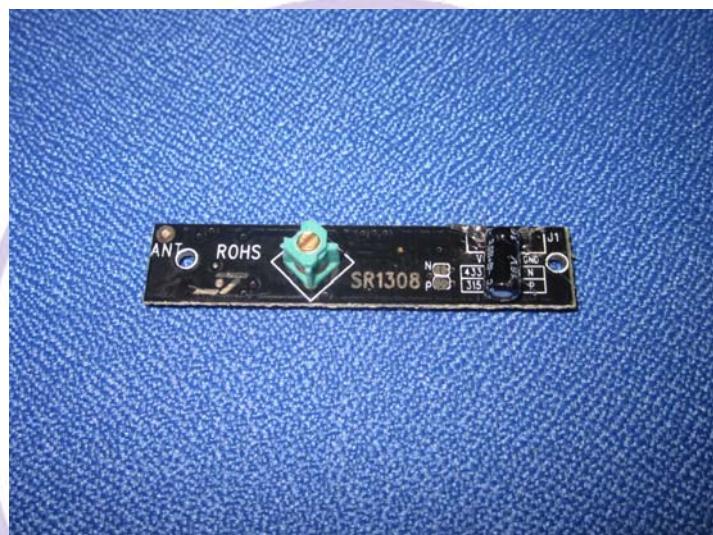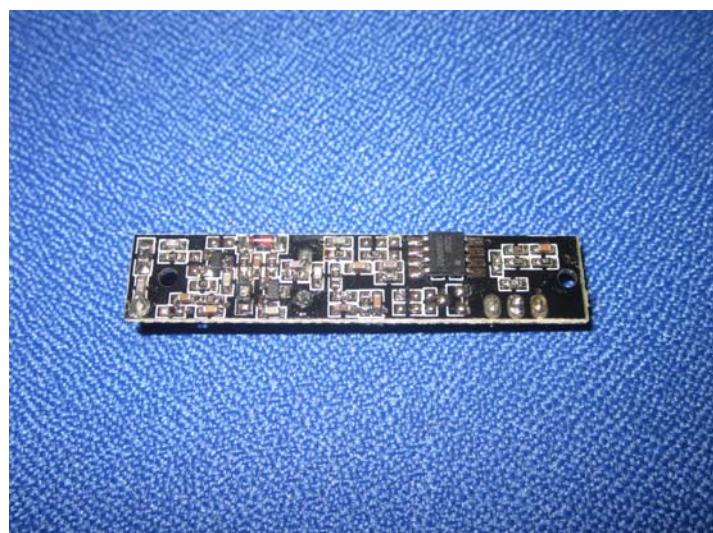

.....End of Report.....

A faint watermark of a circular logo is visible in the background. The text "CTL Electromagnetic Technology" is written in a circular path around the center. In the center of the circle is a stylized emblem featuring a globe and some other graphical elements.