

FCC PART 15.247 TEST REPORT

For

Cyber Acoustics (HK) Ltd.

Unit A-B, 8/F, Yue Hing Building, 101-105 Hennessy Road, Wanchai, Hong Kong

FCC ID: ODL-CA2806

Report Type: Original Report	Product Type: Bluetooth Speaker System
Test Engineer: Edison Hu	Edison Hu
Report Number: RSHA171227001-00A	
Report Date: 2018-01-31	
Reviewed By: Oscar Ye RF Leader	Oscar Ye
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,Jiangsu province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
FCC §1.1310& §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	11
APPLICABLE STANDARD	11
CALCULATED FORMULARY:.....	11
CALCULATED DATA:.....	11
FCC §15.203 – ANTENNA REQUIREMENT	12
APPLICABLE STANDARD	12
ANTENNA CONNECTOR CONSTRUCTION	12
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	13
APPLICABLE STANDARD	13
EUT SETUP	13
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE	13
CORRECTED FACTOR & MARGIN CALCULATION	14
TEST RESULTS SUMMARY	14
TEST DATA	14
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	17
APPLICABLE STANDARD	17
EUT SETUP	17
EMI TEST RECEIVER SETUP.....	18
TEST PROCEDURE	18
CORRECTED AMPLITUDE & MARGIN CALCULATION	18
TEST RESULTS SUMMARY	18
TEST DATA	19
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	25
APPLICABLE STANDARD	25
TEST PROCEDURE	25
TEST DATA	25

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	31
APPLICABLE STANDARD	31
TEST PROCEDURE	31
TEST DATA	31
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	37
APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST DATA	37
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	40
APPLICABLE STANDARD	40
TEST PROCEDURE	40
TEST DATA	40
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	56
APPLICABLE STANDARD	56
TEST PROCEDURE	56
TEST DATA	56
FCC §15.247(d) - BAND EDGES TESTING	62
APPLICABLE STANDARD	62
TEST PROCEDURE	62
TEST DATA	62

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	Cyber Acoustics (HK) Ltd.
Tested Model	CA-2806BT
Product Type	Bluetooth Speaker System
Dimension	59mm(L)×54mm(W)×13mm(H)
Power Supply	DC 5.0V

Adapter Information:

Model: ABT010050

Input: AC 100-240V, 50/60 Hz, 0.5A

Output: DC 5.0V, 1000mA

**All measurement and test data in this report was gathered from production sample serial number: 20171227001.
(Assigned by the BACL. The EUT supplied by the applicant was received on 2017-12-27)*

Objective

This test report is prepared on behalf of Cyber Acoustics (HK) Ltd. in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

N/A

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0℃
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road,Kunshan,Jiangsu province,China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Channel list for Bluetooth:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	40	2442
1	2403	...	...
...	...	...	...
...	...	77	2479
39	2441	78	2480

EUT was tested with Channel 0, 39 and 78.

EUT Exercise Software

RF test tool: BK32xx RF Test V1.4

GFSK Power level: 2

$\pi/4$ -DQPSK Power level: 2

8DPSK Power level: 2

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	Notebook	GX620	D65874152
Cyber	Serial Board	FT232	/

External I/O Cable


Cable Description	Shielding Type	Length (m)	From Port	To
Serial Cable	Unshielding	0.8	Serial Board	EUT
USB Cable	Unshielding	0.8	EUT	Adapter

Block Diagram of Test Setup


For Conducted Emissions:

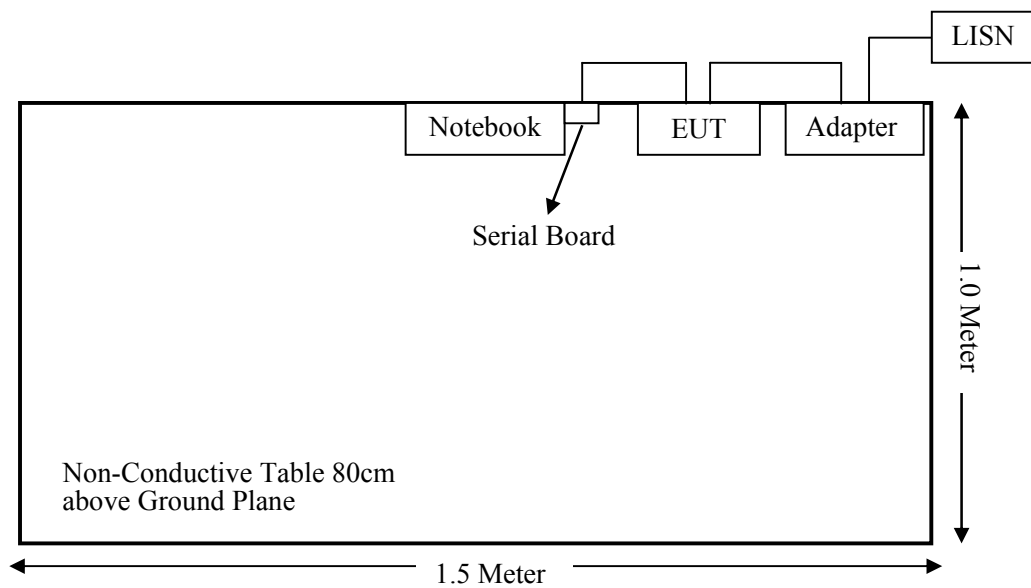

For Radiated Emissions(Below 1GHz):

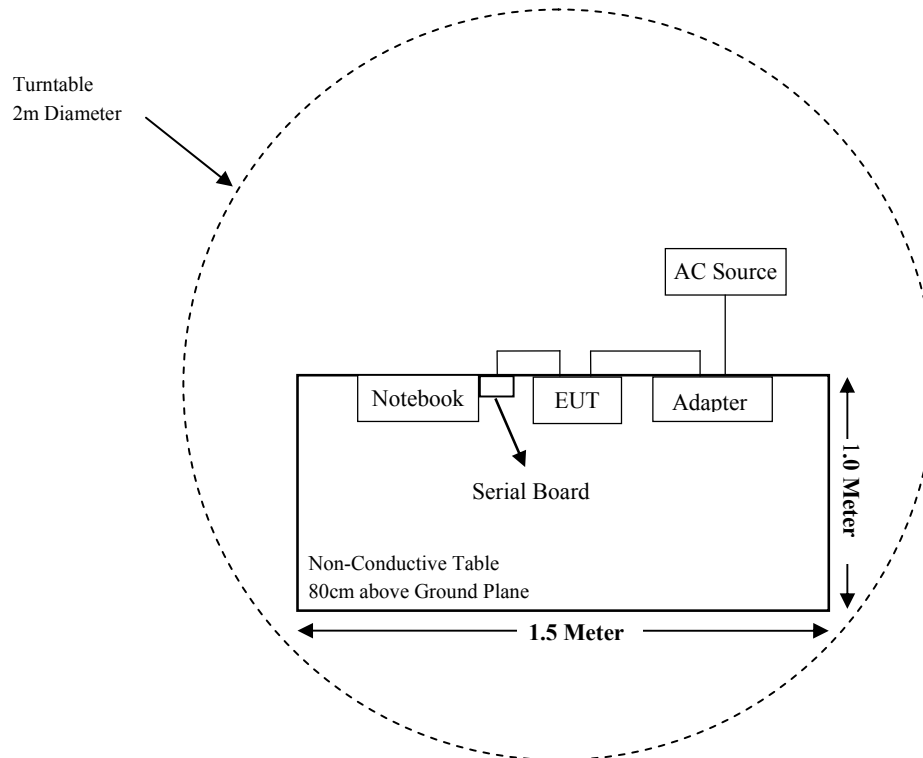

For Radiated Emissions(Above 1GHz):

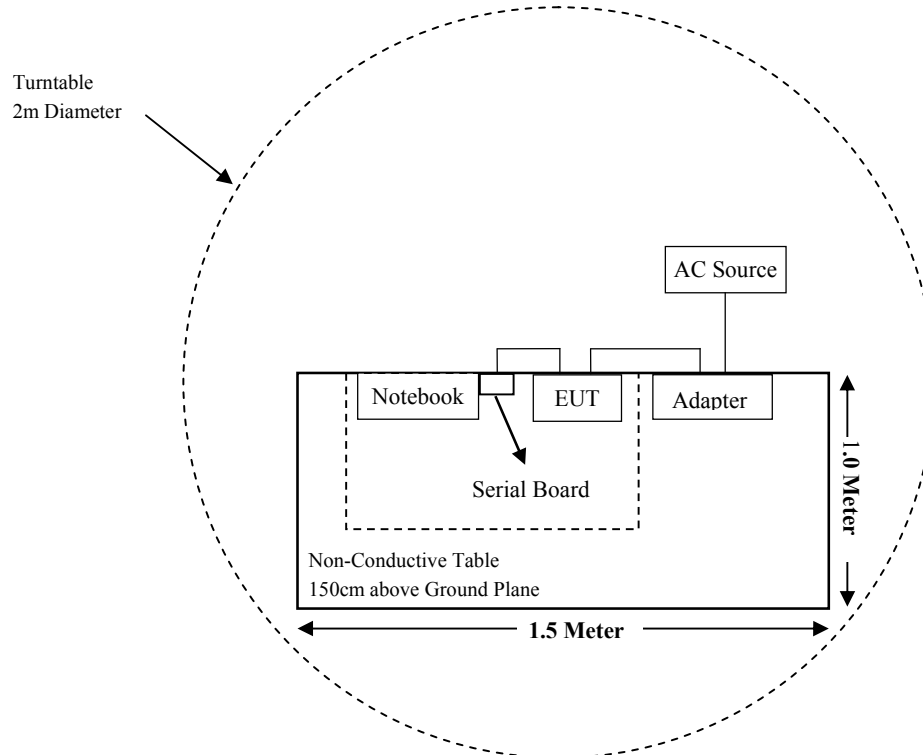

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2017-11-12	2018-11-11
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2017-08-15	2018-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2017-08-15	2018-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2017-08-27	2018-08-26
ETS-LINDGREN	Horn Antenna	3115	6229	2016-01-11	2019-01-10
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-10-18	2019-10-17
Narda	Pre-amplifier	AFS42-00101800	2001270	2017-12-12	2018-12-11
Quinstar	Amplifier	QLW-18405536-J0	15964001009	2017-12-12	2018-12-11
SINOSCITE	Band Reject Filter	BSF2402-2480MN-0898	/	2017-08-05	2018-08-04
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2017-08-15	2018-08-14
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2017-09-21	2018-09-20
Picosecond	DC Block	5500A-110	131047	2017-09-23	2018-09-22
Cyber	RF Cable	/	/	/	/
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	834115/007	2017-11-12	2018-11-11
Rohde & Schwarz	LISN	ESH3-Z5	862770/011	2017-11-12	2018-11-11
Rohde & Schwarz	LISN	ENV216	3560655016	2017-11-12	2018-11-11
BACL	Auto test Software	BACL-EMC	CE001	/	/
Narda	Attenuator/6dB	10690812-2	26850-6	2017-01-10	2018-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2017-08-15	2018-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310& §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Frequency Range (MHz)	Antenna Gain		Target Output Power		Evaluation Distance (cm)	Power Density (mW/cm²)	MPE Limit (mW/cm²)
	(dBi)	(numeric)	(dBm)	(mW)			
2402~2482	0.00	1.00	-7.00	0.20	20	0.00004	1.0

Note: The target output power is declared by the manufacturer.

Result: The device meet FCC MPE at 20 cm distance.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has a PCB antenna arrangement for Bluetooth, which the antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

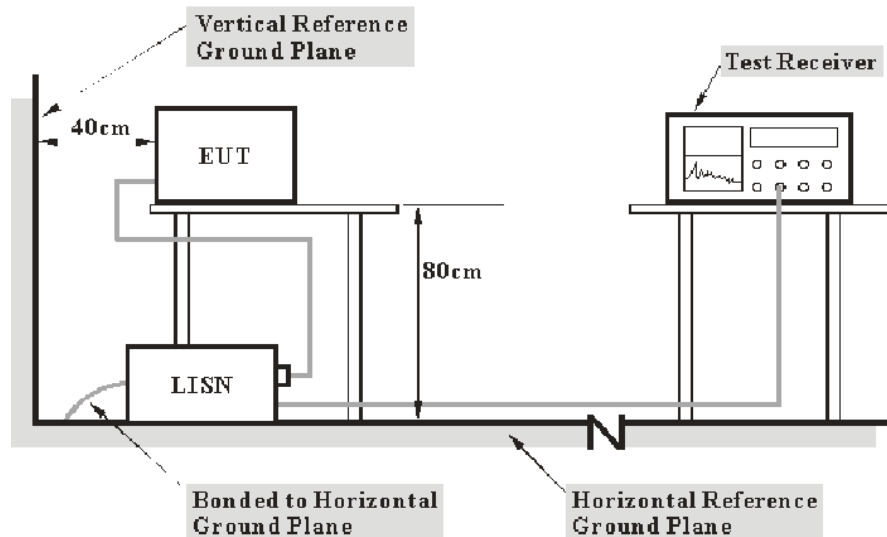

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Reading}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data


Environmental Conditions

Temperature:	22.1 °C
Relative Humidity:	52 %
ATM Pressure:	101.2 kPa

The testing was performed by Edison Hu on 2018-01-04.


EUT operation mode: Transmitting in low channel of GFSK mode (Worst case)

AC 120V/60 Hz, Line

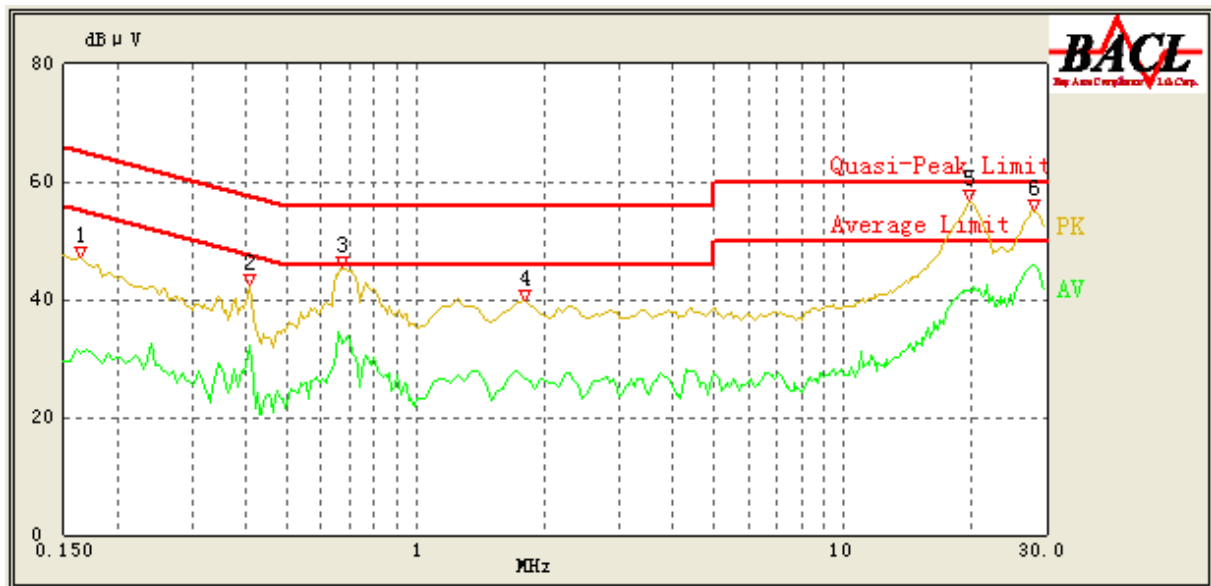

Frequency (MHz)	Reading (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.165	47.03	QP	9.000	L1	16.05	65.57	18.54	Compliance
0.165	30.94	AV	9.000	L1	16.05	55.57	24.63	Compliance
0.410	42.50	QP	9.000	L1	16.06	58.57	16.07	Compliance
0.410	32.22	AV	9.000	L1	16.06	48.57	16.35	Compliance
0.670	45.48	QP	9.000	L1	15.97	56.00	10.52	Compliance
0.670	33.11	AV	9.000	L1	15.97	46.00	12.89	Compliance
1.800	39.69	QP	9.000	L1	15.86	56.00	16.31	Compliance
1.800	26.37	AV	9.000	L1	15.86	46.00	19.63	Compliance
19.750	56.75	QP	9.000	L1	16.43	60.00	3.25	Compliance
19.650	41.62	AV	9.000	L1	16.42	50.00	8.38	Compliance
27.900	55.10	QP	9.000	L1	16.54	60.00	4.90	Compliance
28.050	45.86	AV	9.000	L1	16.54	50.00	4.14	Compliance

AC 120V/60 Hz, Neutral

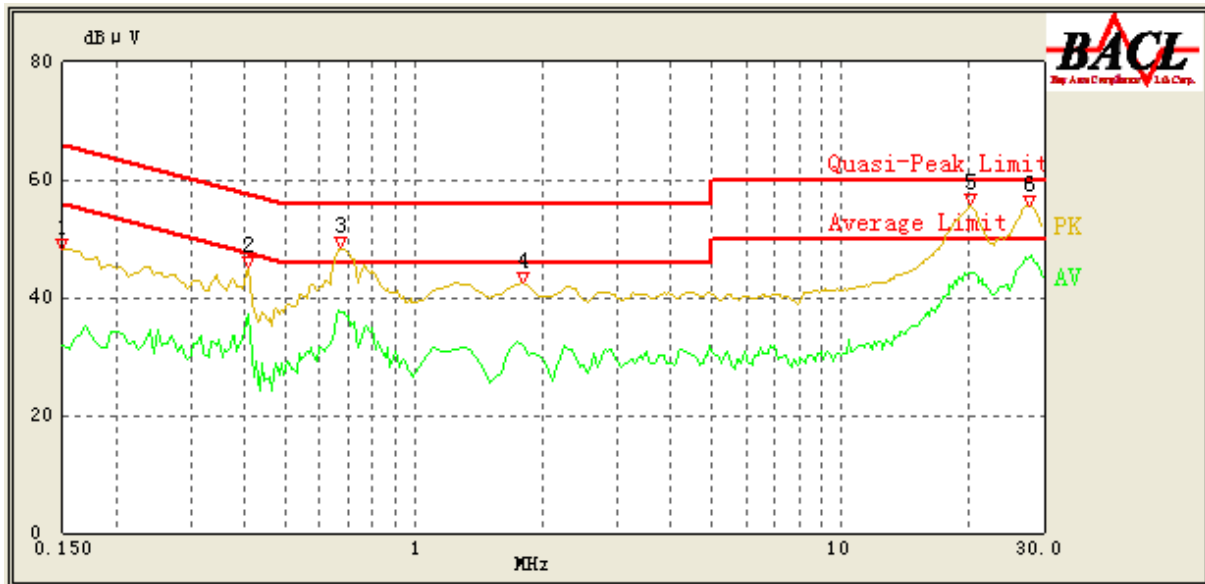



Frequency (MHz)	Reading (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.150	48.17	QP	9.000	N	16.06	66.00	17.83	Compliance
0.150	31.69	AV	9.000	N	16.06	56.00	24.31	Compliance
0.410	45.09	QP	9.000	N	16.09	58.57	13.48	Compliance
0.410	37.33	AV	9.000	N	16.09	48.57	11.24	Compliance
0.670	48.36	QP	9.000	N	16.01	56.00	7.64	Compliance
0.665	37.84	AV	9.000	N	16.01	46.00	8.16	Compliance
1.800	42.39	QP	9.000	N	15.92	56.00	13.61	Compliance
1.800	31.79	AV	9.000	N	15.92	46.00	14.21	Compliance
20.150	55.68	QP	9.000	N	16.16	60.00	4.32	Compliance
20.000	44.13	AV	9.000	N	16.16	50.00	5.87	Compliance
27.650	55.64	QP	9.000	N	16.29	60.00	4.36	Compliance
27.350	46.45	AV	9.000	N	16.29	50.00	3.55	Compliance

Note:

- 1) Correction Factor = LISN VDF + Cable Loss + Transient Limiter Attenuation
- 2) Margin = Limit – Reading

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS**Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

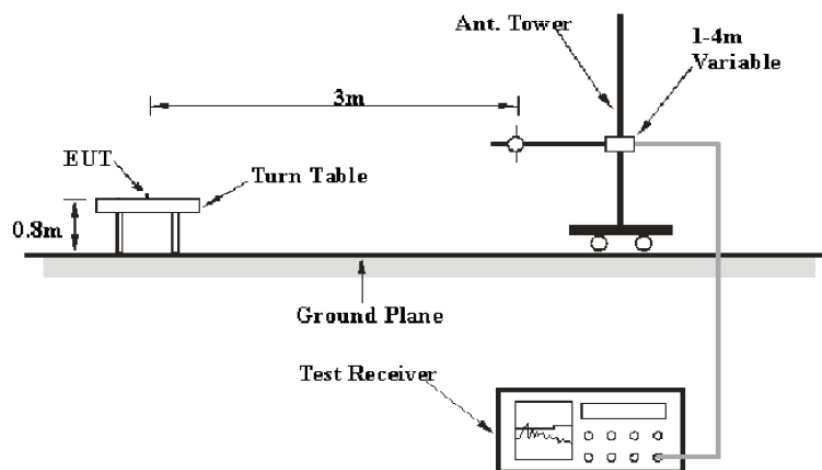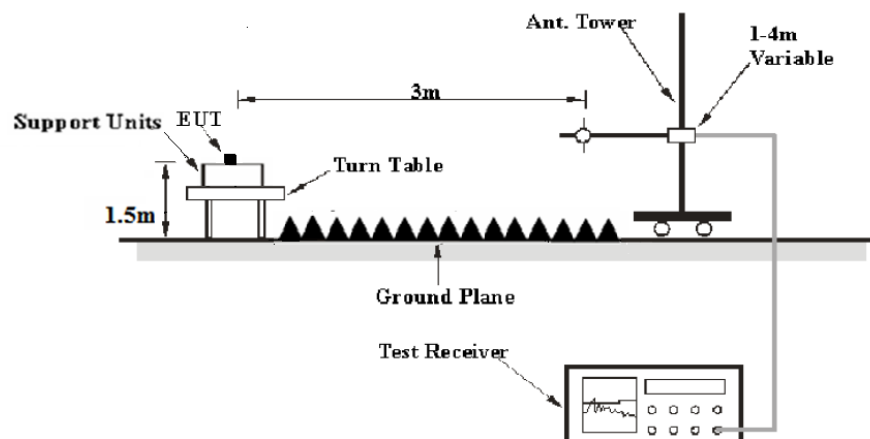EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data**Environmental Conditions**


Temperature:	22.1 °C
Relative Humidity:	52 %
ATM Pressure:	101.2 kPa

The testing was performed by Edison Hu on 2018-01-15.

EUT operation mode: Transmitting

Spurious Emission Test:**30MHz-1GHz:**

Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case GFSK Mode(channel 0:2402MHz) in X-axis of orientation was recorded

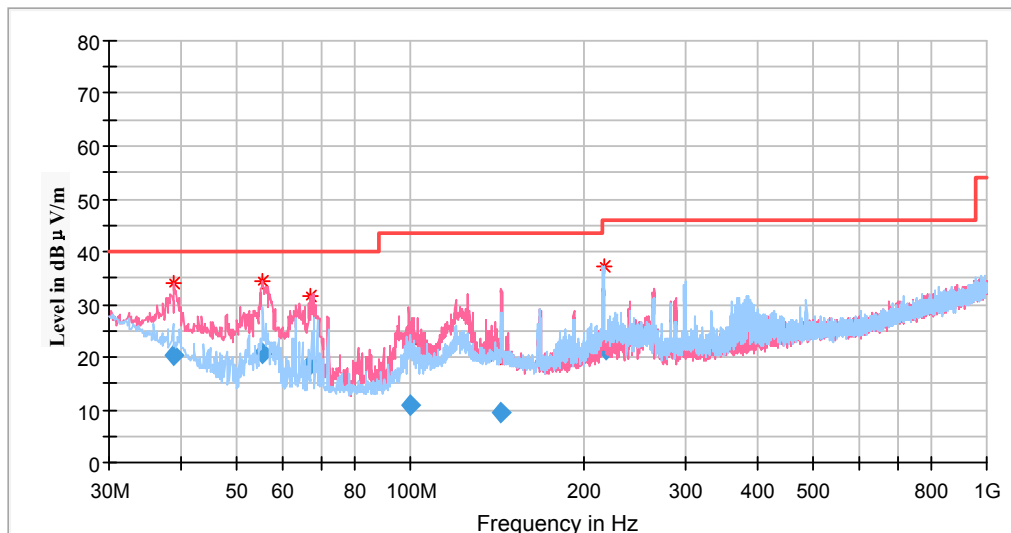

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	QuasiPeak (dB μ V/m)	Height (cm)	Polar (H/V)				
38.90	20.46	121.0	V	190.0	-10.4	40.00	19.54
55.18	20.60	135.0	V	54.0	-18.2	40.00	19.40
66.91	18.57	106.0	V	160.0	-17.9	40.00	21.43
99.57	10.88	128.0	V	10.0	-15.5	43.50	32.62
143.47	9.46	147.0	V	195.0	-12.5	43.50	34.04
217.82	21.32	112.0	H	180.0	-12.7	46.00	24.68

1GHz-18GHz:


Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation,, the worst case GFSK Mode in X-axis of orientation was recorded

Note:

1. This test was performed with the 2.402-2.48GHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

Low Channel: 2402MHz


Full Spectrum

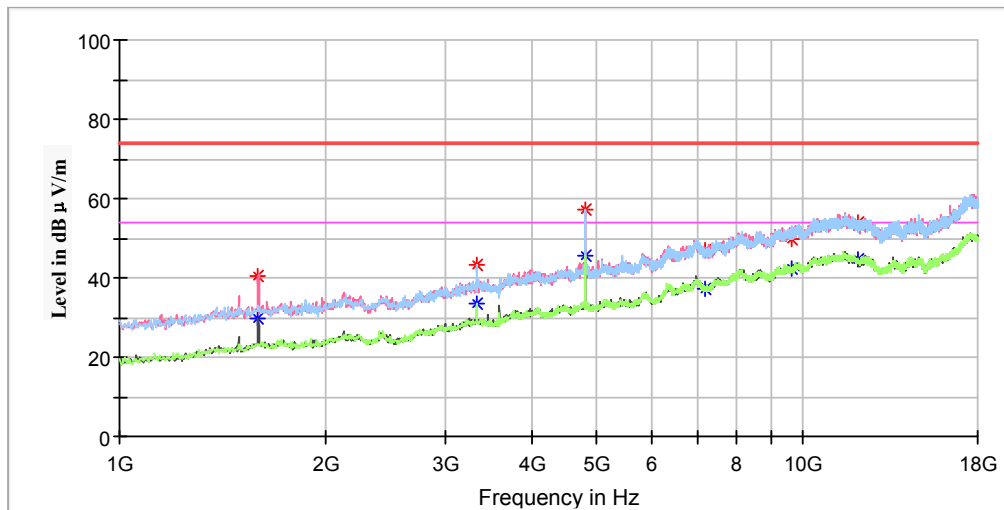

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1595.00	40.25	---	200.0	V	188.0	-7.6	74.00	33.75
1595.00	---	29.83	200.0	V	188.0	-7.6	54.00	24.17
3325.60	43.21	---	250.0	H	100.0	-1.3	74.00	30.79
3325.60	---	33.48	250.0	H	100.0	-1.3	54.00	20.52
4804.00	57.37	---	100.0	V	288.0	2.5	74.00	16.63
4804.00	---	45.46	100.0	V	288.0	2.5	54.00	8.54
7206.00	46.91	---	250.0	V	233.0	9.8	74.00	27.09
7206.00	---	37.29	250.0	V	233.0	9.8	54.00	16.71
9608.80	49.68	---	100.0	H	7.0	14.9	74.00	24.32
9608.80	---	42.14	100.0	H	7.0	14.9	54.00	11.86
12009.20	53.98	---	120.0	H	66.0	16.5	74.00	20.02
12009.20	---	44.64	120.0	H	66.0	16.5	54.00	9.36

Middle Channel: 2441MHz


Full Spectrum

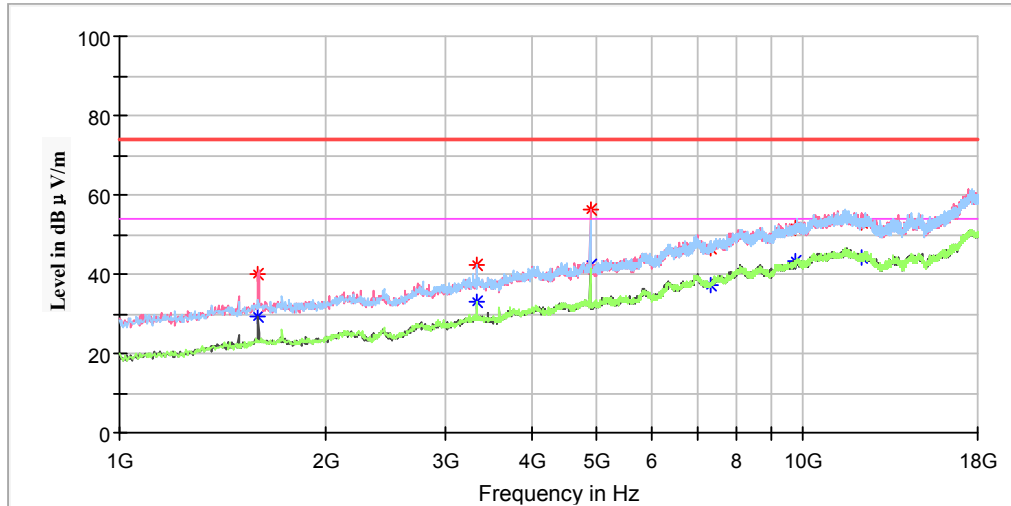

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1595.00	---	29.08	150.0	V	179.0	-7.6	54.00	24.92
1595.00	40.11	---	150.0	V	179.0	-7.6	74.00	33.89
3325.60	42.30	---	250.0	H	94.0	-1.3	74.00	31.70
3325.60	---	33.03	250.0	H	94.0	-1.3	54.00	20.97
4882.00	56.30	---	200.0	V	349.0	2.7	74.00	17.70
4882.00	---	42.42	200.0	V	349.0	2.7	54.00	11.58
7323.00	---	37.31	150.0	V	181.0	10.0	54.00	16.69
7323.00	46.42	---	150.0	V	181.0	10.0	74.00	27.58
9765.20	51.83	---	250.0	H	179.0	14.9	74.00	22.17
9765.20	---	43.06	250.0	H	179.0	14.9	54.00	10.94
12206.40	53.11	---	200.0	H	317.0	16.8	74.00	20.89
12206.40	---	44.40	200.0	H	317.0	16.8	54.00	9.60

High Channel: 2480MHz


Full Spectrum

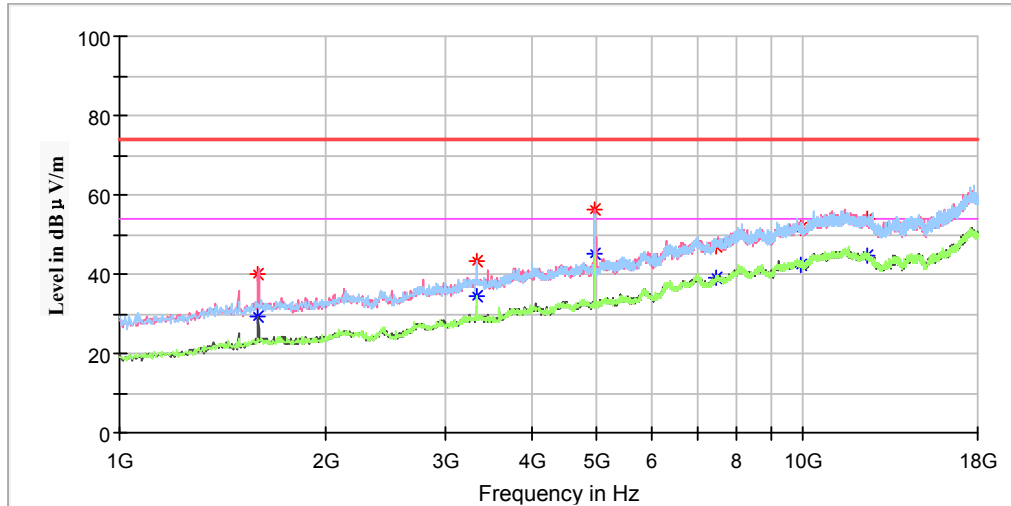


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1595.00	40.04	---	200.0	V	187.0	-7.6	74.00	33.96
1595.00	---	29.27	200.0	V	187.0	-7.6	54.00	24.73
3325.60	43.34	---	250.0	H	100.0	-1.3	74.00	30.66
3325.60	---	34.22	250.0	H	100.0	-1.3	54.00	19.78
4960.00	---	44.97	150.0	V	65.0	2.8	54.00	9.03
4960.00	56.20	---	150.0	V	65.0	2.8	74.00	17.80
7440.00	---	39.18	250.0	V	317.0	10.1	54.00	14.82
7440.00	47.05	---	250.0	V	317.0	10.1	74.00	26.95
9921.60	---	42.46	150.0	H	150.0	14.9	54.00	11.54
9921.60	51.40	---	150.0	H	150.0	14.9	74.00	22.60
12400.20	---	44.48	100.0	H	181.0	17.0	54.00	9.52
12400.20	54.09	---	100.0	H	181.0	17.0	74.00	19.91

18GHz-25GHz:

Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case GFSK Mode(channel 0:2402MHz) in X-axis of orientation was recorded

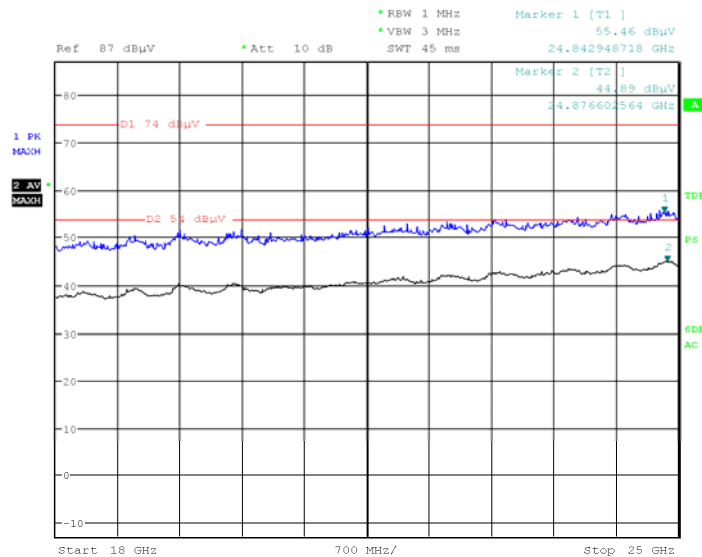Horizontal

Date: 15.JAN.2018 15:33:40

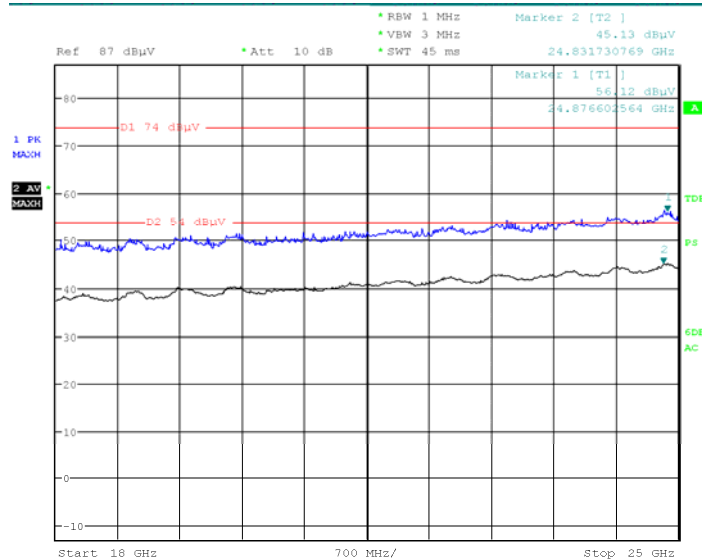Vertical

Date: 15.JAN.2018 15:51:53

Fundamental Test & Restricted Bands Emissions Test:

Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case GFSK Mode in X-axis of orientation was recorded

Note:

1. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel								
2402.00	---	84.27	250.0	V	190.0	5.1	/	/
2402.00	87.63	---	250.0	V	190.0	5.1	/	/
2390.00	---	43.01	250.0	V	290.0	5.1	54.00	10.99
2390.00	52.29	---	250.0	V	290.0	5.1	74.00	21.71
Middle Channel								
2441.00	87.27	---	200.0	V	169.0	5.2	/	/
2441.00	---	84.19	200.0	V	169.0	5.2	/	/
High Channel								
2480.00	---	83.18	150.0	V	87.0	5.3	/	/
2480.00	86.11	---	150.0	V	87.0	5.3	/	/
2483.52	---	50.80	150.0	V	99.0	5.3	54.00	3.20
2483.52	58.10	---	150.0	V	99.0	5.3	74.00	15.90

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST**Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

Test Data**Environmental Conditions**

Temperature:	22.3 °C
Relative Humidity:	51 %
ATM Pressure:	101.2 kPa

The testing was performed by Edison Hu on 2018-01-09.

EUT operation mode: Transmitting


Test Result: Compliance.

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
BDR (GFSK)	Low	2402	1.08	0.74	Pass
	Adjacent	2403			
	Middle	2441	1.00	0.73	Pass
	Adjacent	2442			
	High	2480	1.00	0.73	Pass
	Adjacent	2479			
EDR ($\pi/4$ -DQPSK)	Low	2402	1.03	0.86	Pass
	Adjacent	2403			
	Middle	2441	0.95	0.86	Pass
	Adjacent	2442			
	High	2480	1.06	0.85	Pass
	Adjacent	2479			
EDR (8DPSK)	Low	2402	0.98	0.89	Pass
	Adjacent	2403			
	Middle	2441	0.99	0.89	Pass
	Adjacent	2442			
	High	2480	1.02	0.89	Pass
	Adjacent	2479			


BDR (GFSK): Low Channel




BDR (GFSK): Middle Channel

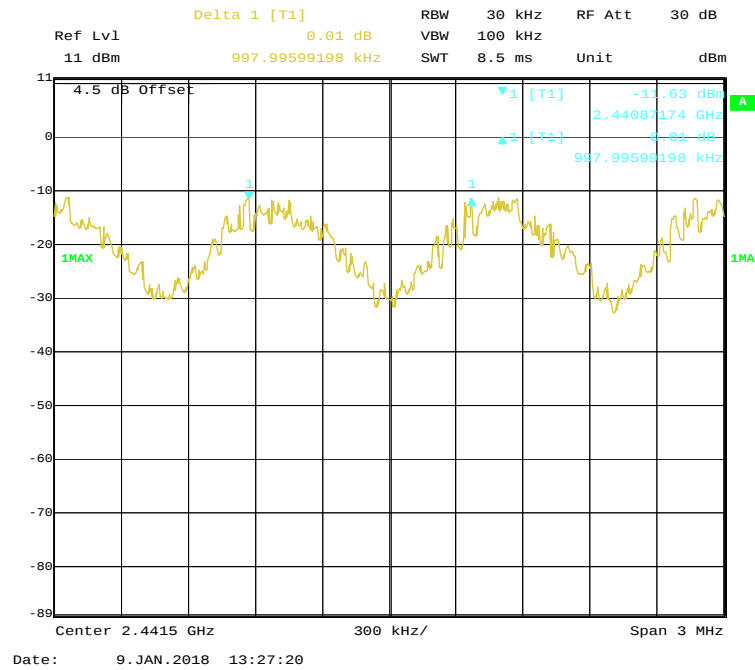


BDR (GFSK): High Channel

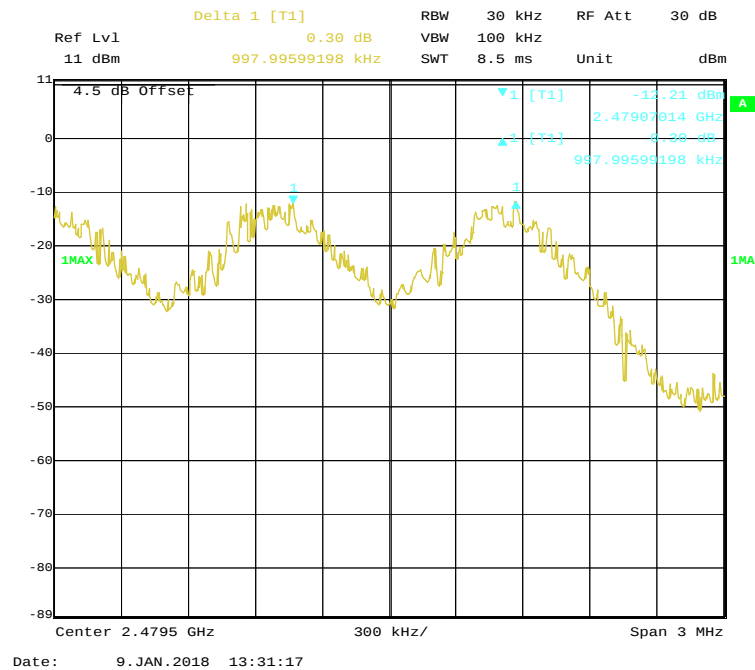


EDR ($\pi/4$ -DQPSK): Low Channel

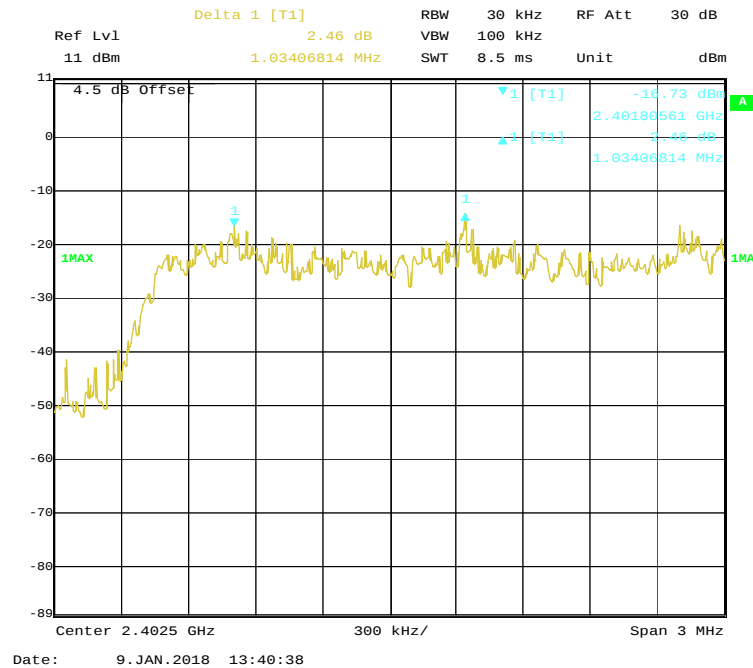


EDR ($\pi/4$ -DQPSK): Middle Channel

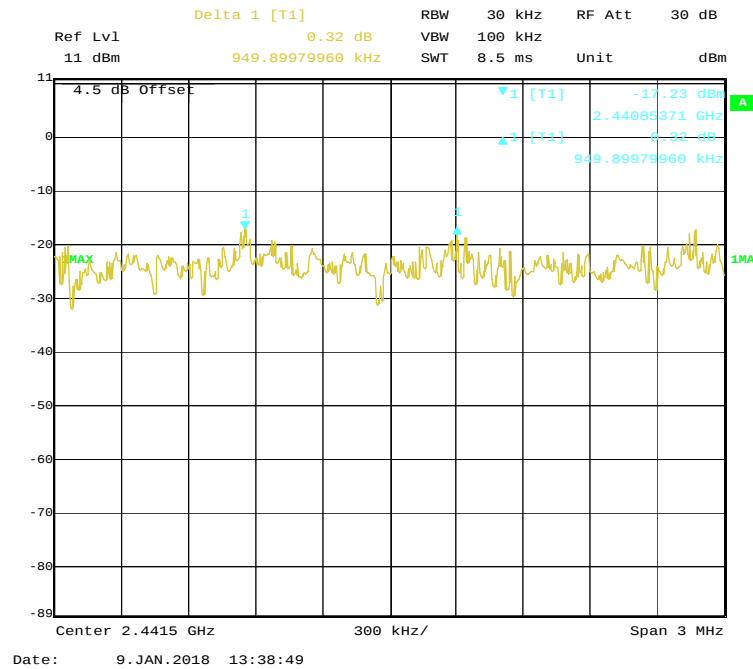


EDR ($\pi/4$ -DQPSK): High Channel

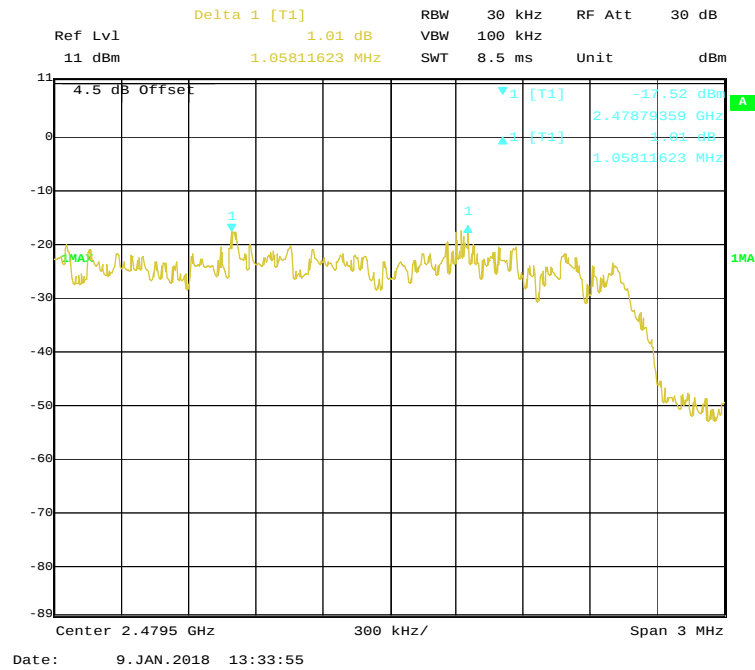


EDR (8DPSK): Low Channel

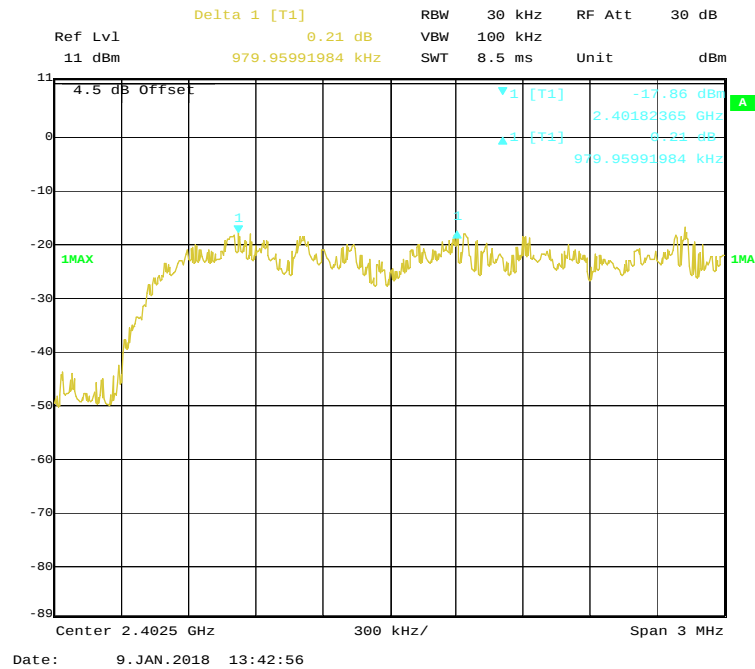

EDR (8DPSK): Middle Channel

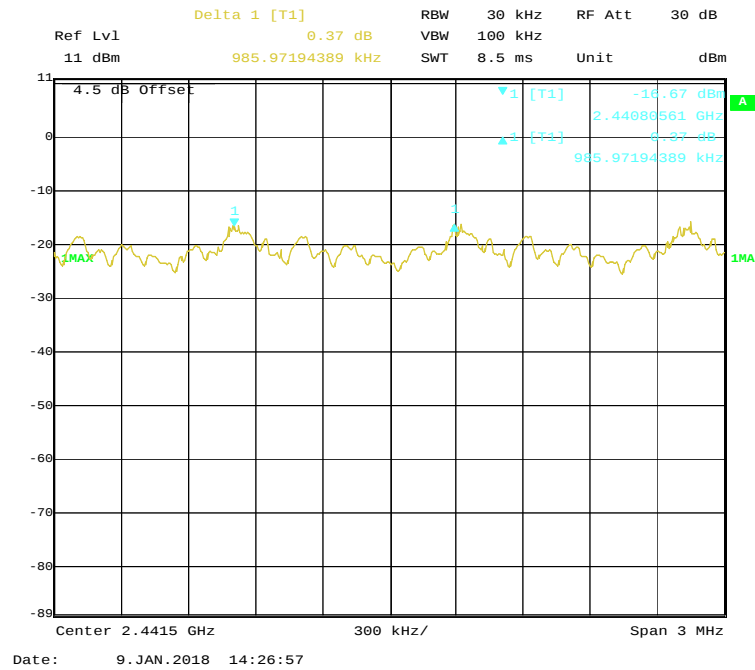

EDR (8DPSK): High Channel

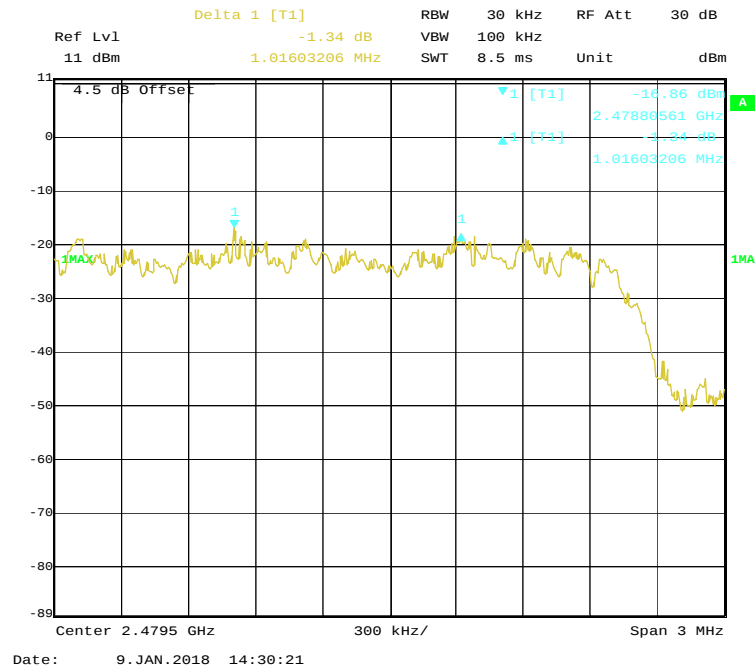

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data**Environmental Conditions**

Temperature:	22.4 °C
Relative Humidity:	53 %
ATM Pressure:	101.3 kPa

The testing was performed by Edison Hu on 2018-01-08 to 2018-01-15.

EUT operation mode: Transmitting

Test Result: Compliance.

Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	1.11
	Middle	2441	1.09
	High	2480	1.10
EDR ($\pi/4$-DQPSK)	Low	2402	1.29
	Middle	2441	1.29
	High	2480	1.28
EDR (8DPSK)	Low	2402	1.34
	Middle	2441	1.33
	High	2480	1.33

Ref Lvl 11 dBm Delta 1 [T1] 0.52 dB RBW 30 kHz RF Att 40 dB
 11 dBm 1.10621242 MHz SWT 8.5 ms Unit dBm

4.5 dB Offset

-10.85 dBm D1 -10.85 dBm

1MAX


-30.85 dBm D2 -30.85 dBm

1 [T1] -31.07 dBm
 2.40145591 GHz
 1.10621242 MHz


Center 2.402 GHz 300 kHz/ Span 3 MHz

Date: 15. JAN. 2018 16:36:11


BDR (GFSK): Middle Channel

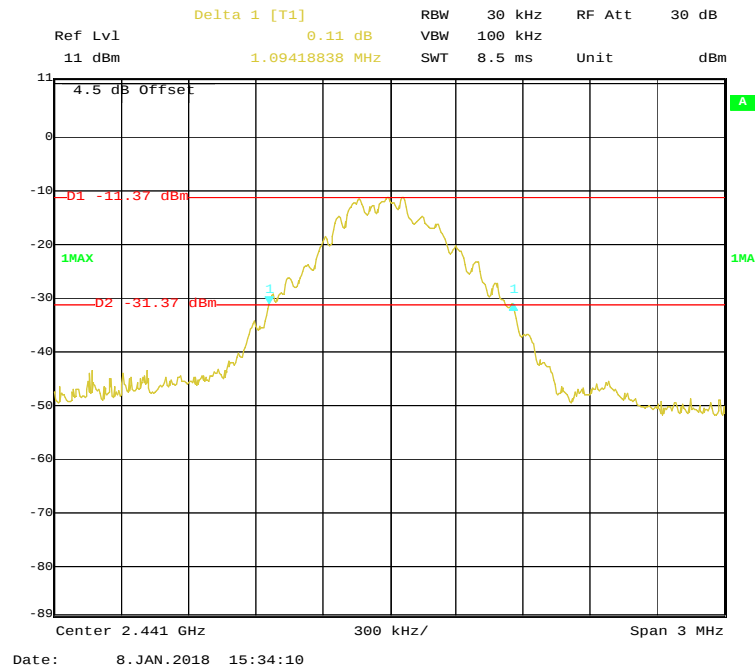


BDR (GFSK): High Channel

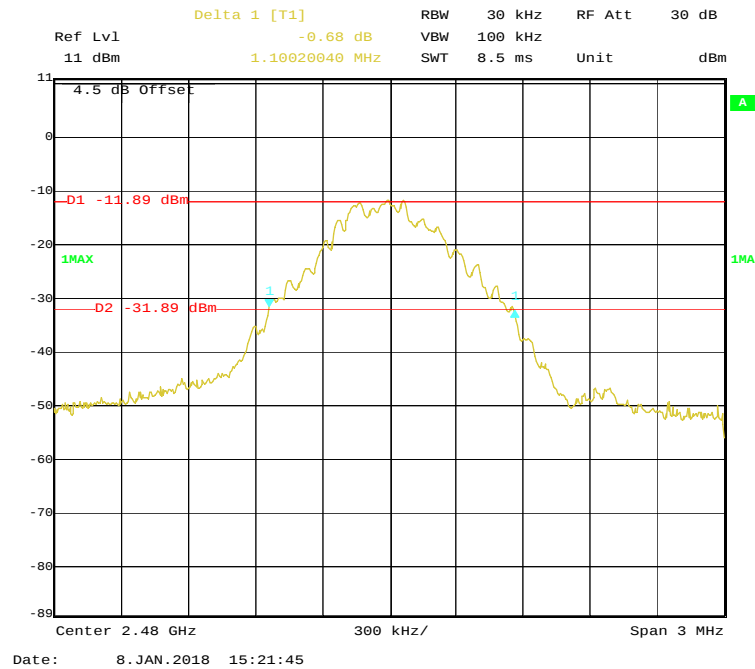


EDR ($\pi/4$ -DQPSK): Low Channel

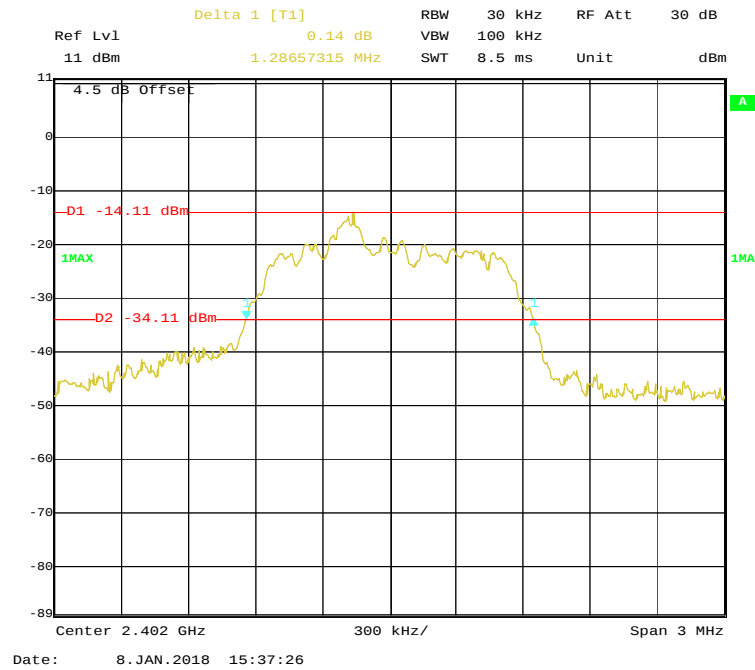


EDR($\pi/4$ -DQPSK): Middle Channel

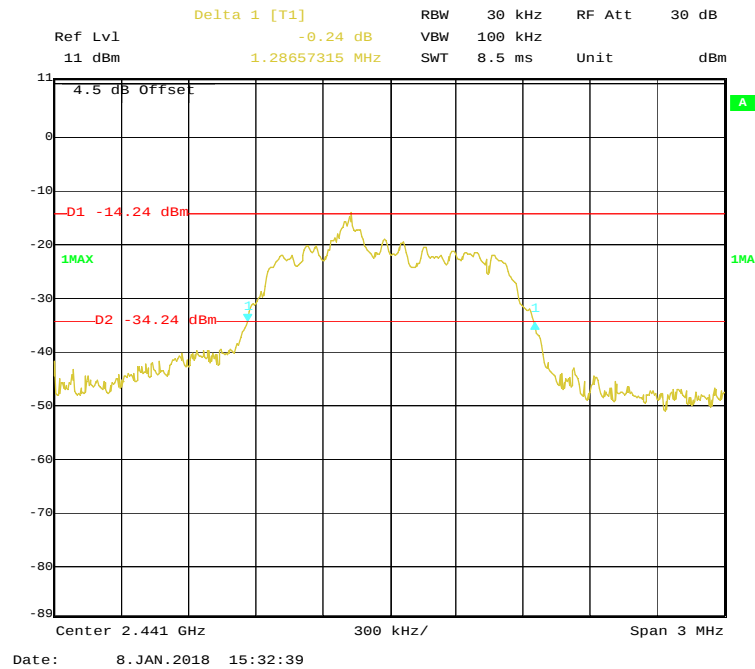


EDR ($\pi/4$ -DQPSK): High Channel

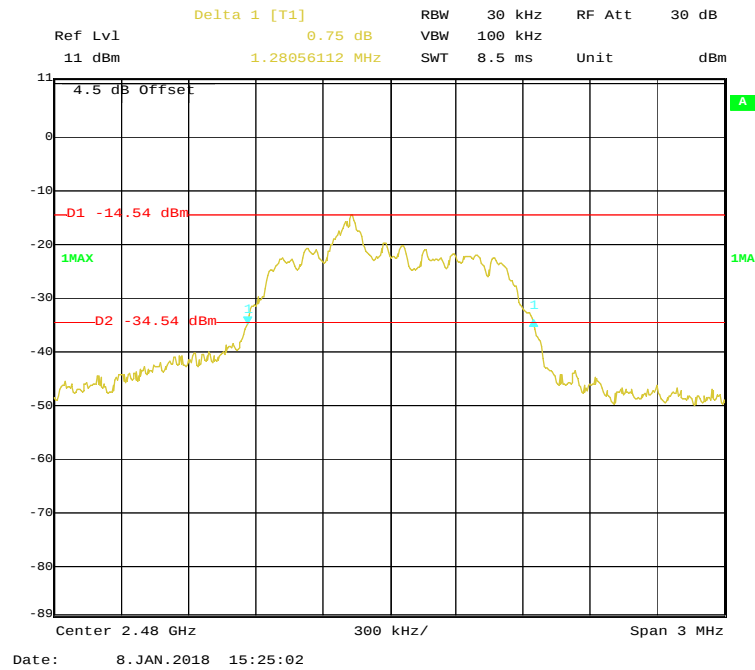


EDR (8DPSK): Low Channel

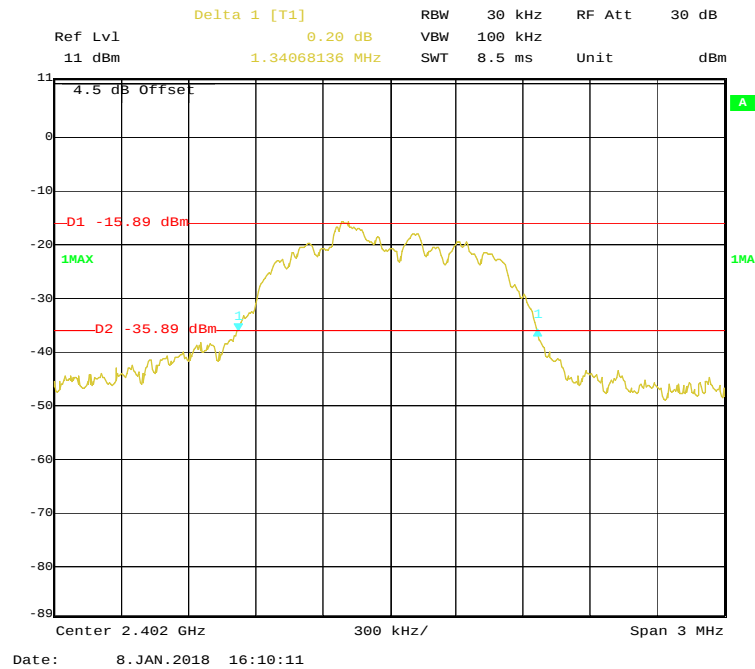

EDR (8DPSK): Middle Channel

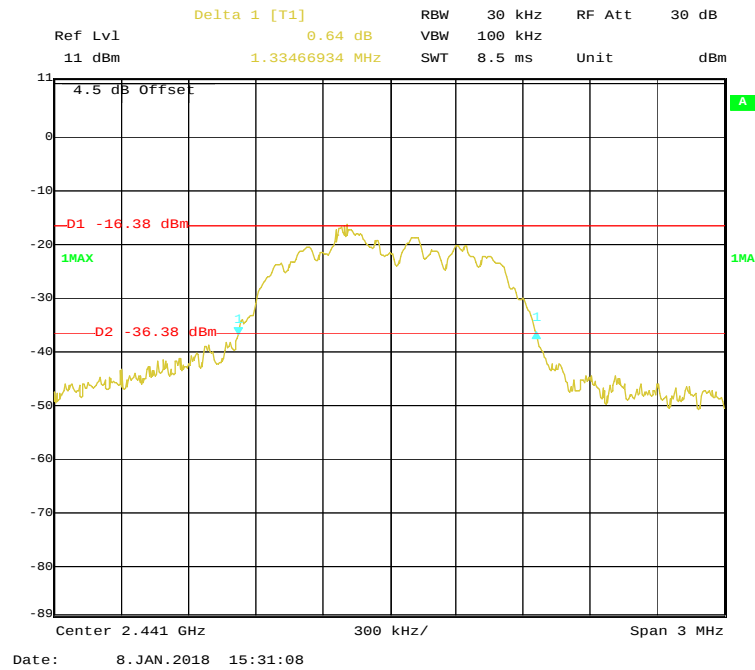

EDR (8DPSK): High Channel

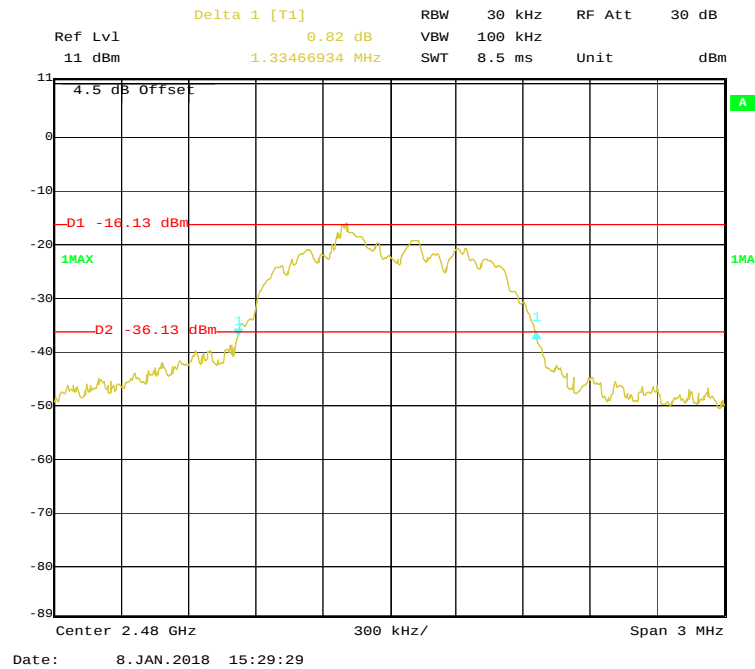

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Data**Environmental Conditions**

Temperature:	22.4 °C
Relative Humidity:	53 %
ATM Pressure:	101.3 kPa

The testing was performed by Edison Hu on 2018-01-08.

EUT operation mode: Hopping

Test Result: Compliance.

Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥15
EDR ($\pi/4$ -DQPSK)	2400-2483.5	79	≥15
EDR (8DPSK)	2400-2483.5	79	≥15

Delta 1 [T1] RBW 100 kHz RF Att 30 dB
Ref Lvl -0.69 dB VBW 300 kHz
11 dBm 78.33567134 MHz SWT 21 ms Unit dBm

4.5 dB Offset


1

1MAX


Start 2.4 GHz 8.35 MHz/ Stop 2.4835 GHz

Date: 8.JAN.2018 17:12:30

EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

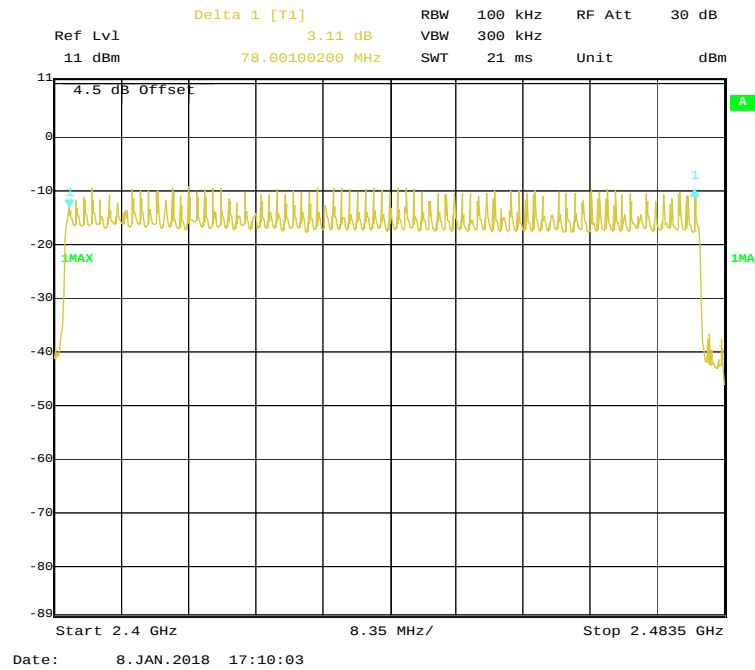

EDR (8DPSK): Number of Hopping Channels

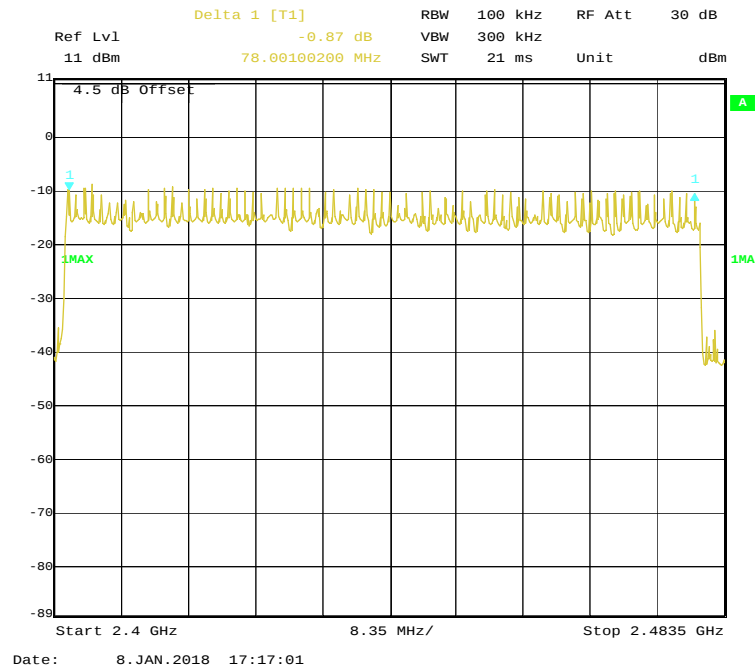

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1 Span: Zero span, centered on a hopping channel.

2 RBW shall be $\leq$ channel spacing and where possible RBW should be set $\geq 1 / T$, where T is the expected dwell time per channel.

3 Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.

4 Detector function: Peak.

5 Trace: Max hold.

Test Data**Environmental Conditions**


Temperature:	22.3 °C
Relative Humidity:	51 %
ATM Pressure:	101.2 kPa

The testing was performed by Edison Hu on 2018-01-09.


EUT operation mode: Hopping

Mode		Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
BDR (GFSK)	DH1	Low	0.411	0.132	0.4	Pass
		Middle	0.411	0.132	0.4	Pass
		High	0.409	0.131	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH3	Low	1.683	0.269	0.4	Pass
		Middle	1.683	0.269	0.4	Pass
		High	1.683	0.269	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH5	Low	2.966	0.316	0.4	Pass
		Middle	2.966	0.316	0.4	Pass
		High	2.966	0.316	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR ($\pi/4$ -DQPSK)	2DH1	Low	0.409	0.131	0.4	Pass
		Middle	0.409	0.131	0.4	Pass
		High	0.409	0.131	0.4	Pass
		Note: 2DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	2DH3	Low	1.699	0.272	0.4	Pass
		Middle	1.699	0.272	0.4	Pass
		High	1.699	0.272	0.4	Pass
		Note: 2DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	2DH5	Low	2.958	0.316	0.4	Pass
		Middle	2.958	0.316	0.4	Pass
		High	2.958	0.316	0.4	Pass
		Note: 2DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR (8DPSK)	3DH1	Low	0.409	0.131	0.4	Pass
		Middle	0.409	0.131	0.4	Pass
		High	0.409	0.131	0.4	Pass
		Note: 3 DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	3DH3	Low	1.683	0.269	0.4	Pass
		Middle	1.683	0.269	0.4	Pass
		High	1.683	0.269	0.4	Pass
		Note: 3DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	3DH5	Low	2.958	0.316	0.4	Pass
		Middle	2.958	0.316	0.4	Pass
		High	2.958	0.316	0.4	Pass
		Note: 3DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				


BDR (GFSK): Pulse time, Low Channel, DH1

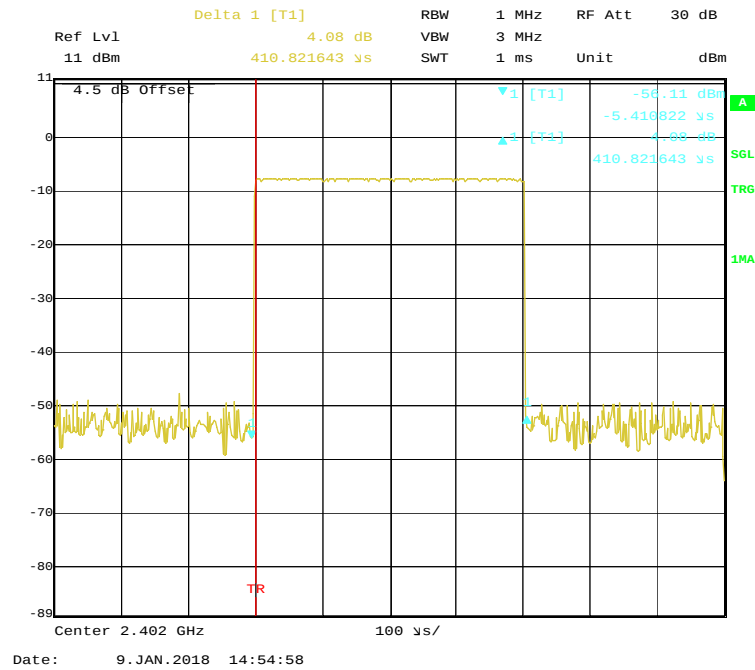


BDR (GFSK): Pulse time, Middle Channel, DH1

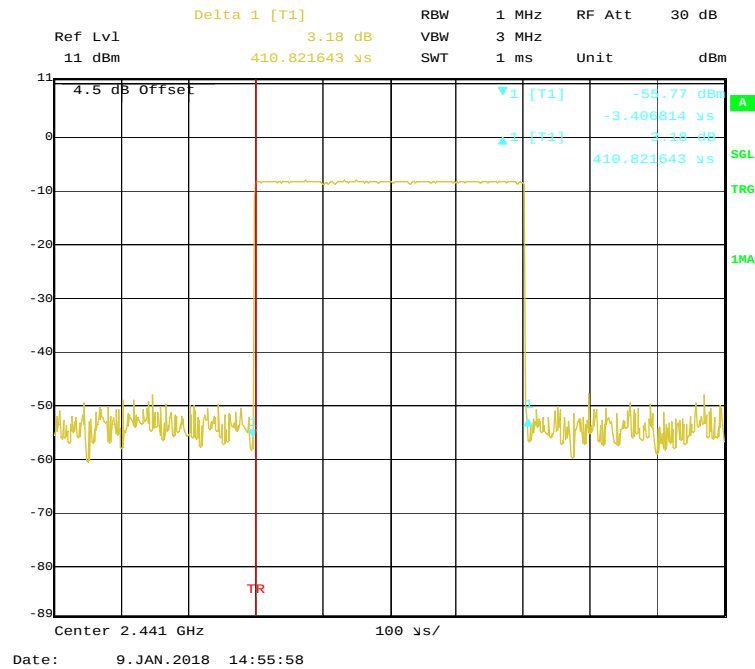


BDR (GFSK): Pulse time, High Channel, DH1

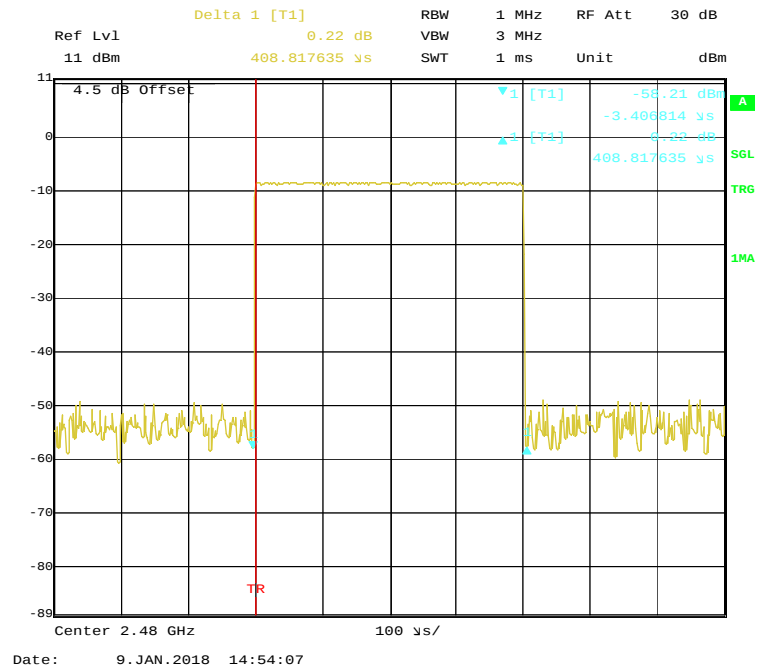


BDR (GFSK): Pulse time, Low Channel, DH3

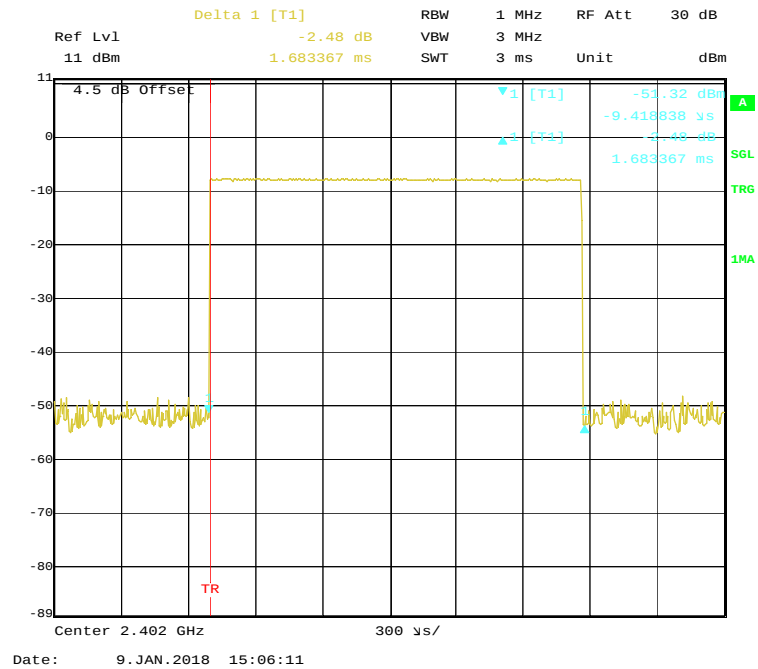


BDR (GFSK): Pulse time, Middle Channel, DH3

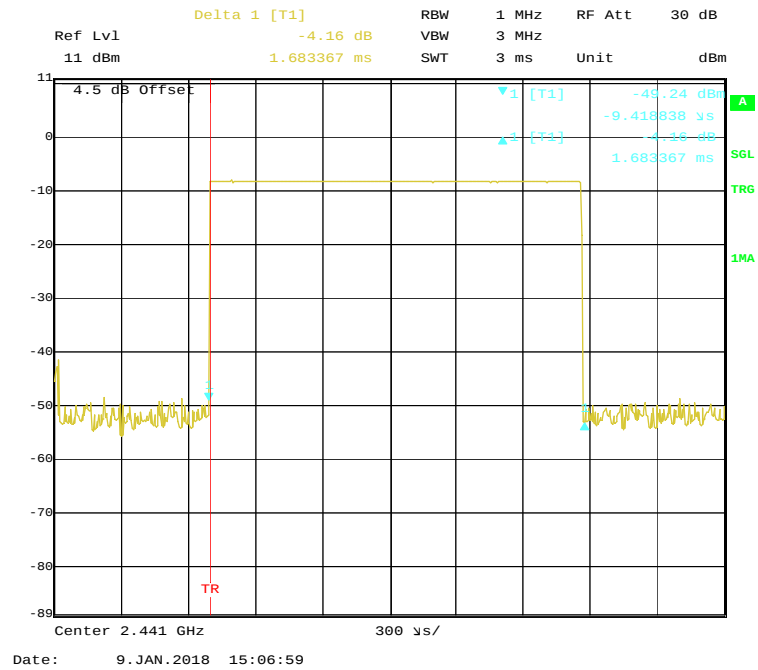


BDR (GFSK): Pulse time, High Channel, DH3

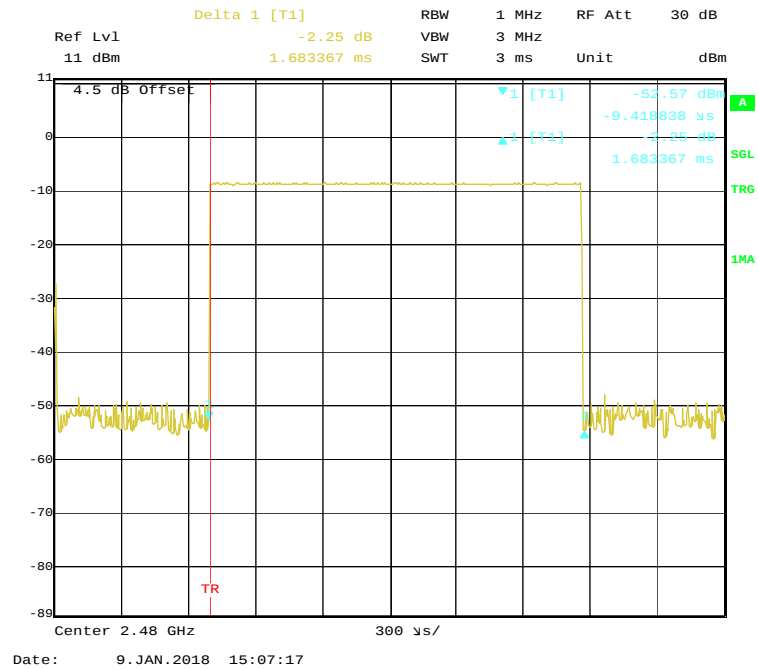


BDR (GFSK): Pulse time, Low Channel, DH5

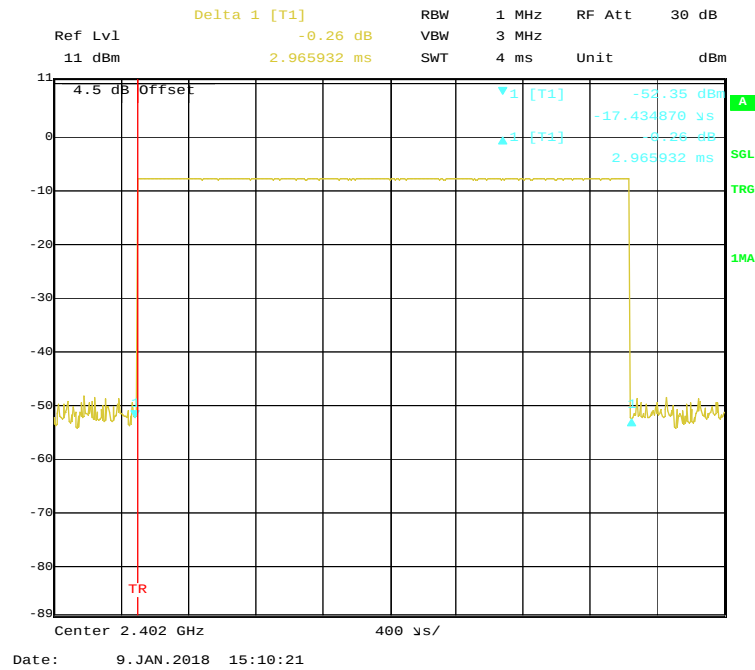


BDR (GFSK): Pulse time, Middle Channel, DH5

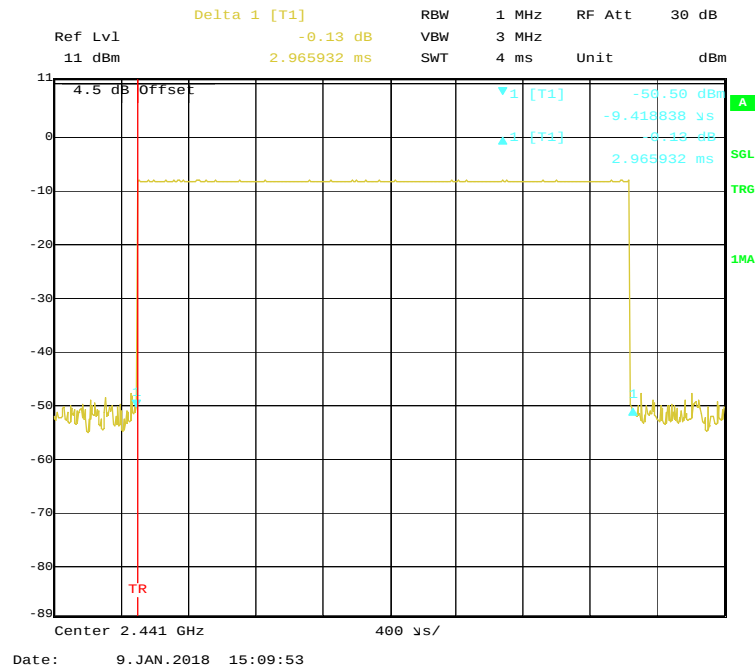


BDR (GFSK): Pulse time, High Channel, DH5

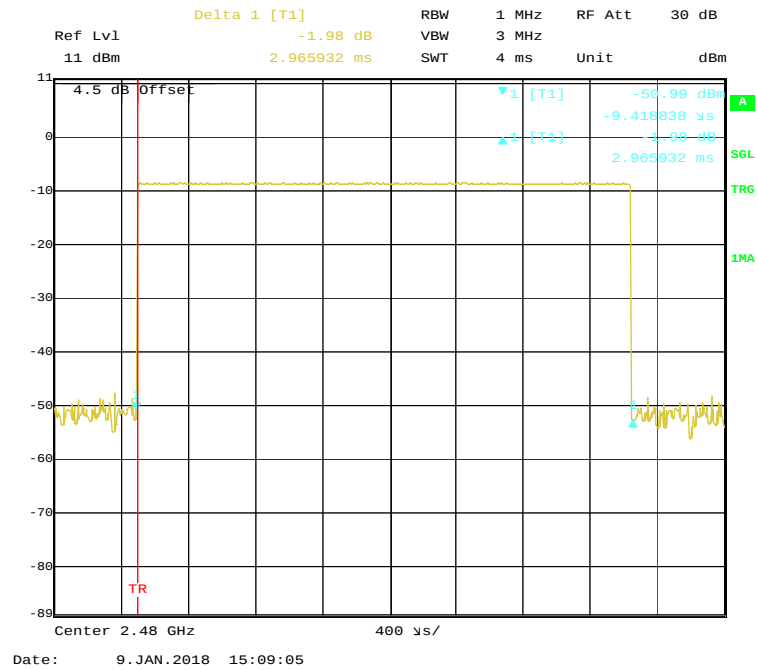


EDR ($\pi/4$ -DQPSK): Pulse time, Low Channel, 2DH1


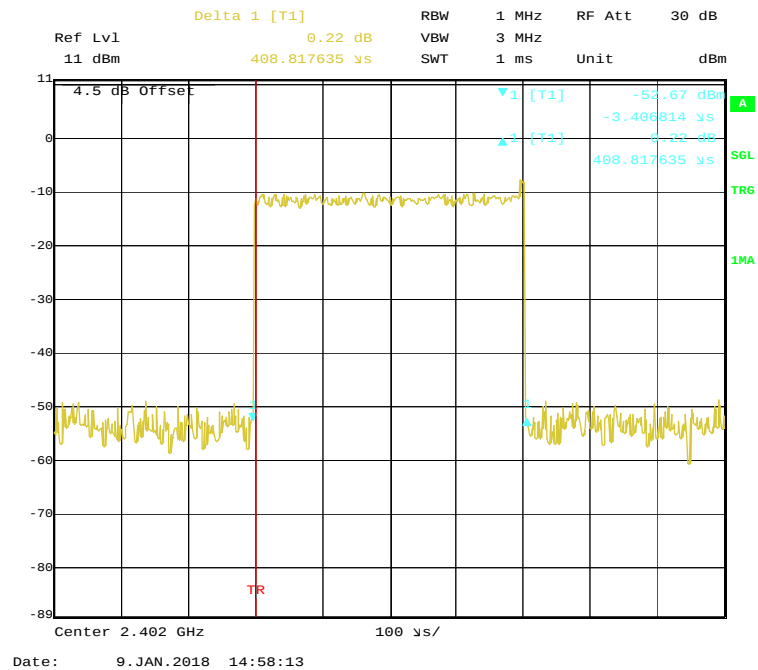


EDR ($\pi/4$ -DQPSK):Pulse time, Middle Channel, 2DH1

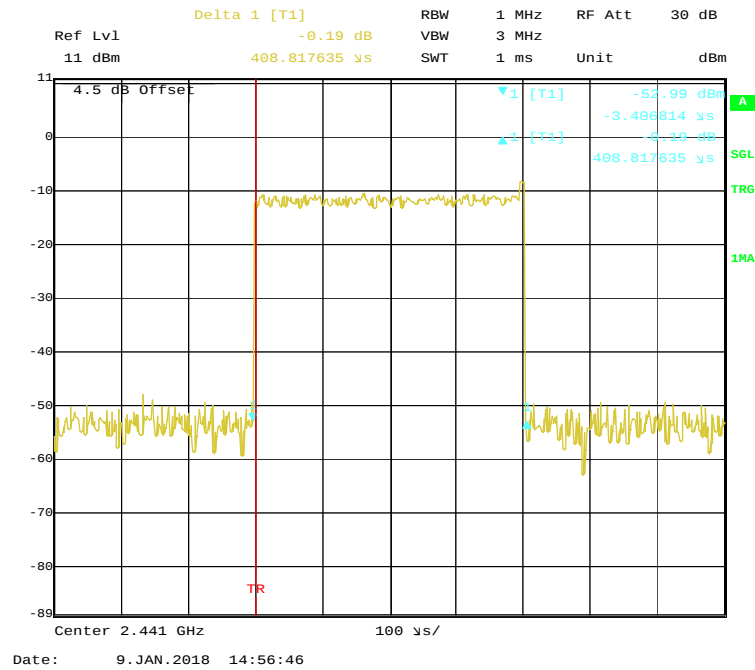

EDR ($\pi/4$ -DQPSK):Pulse time, High Channel, 2DH1

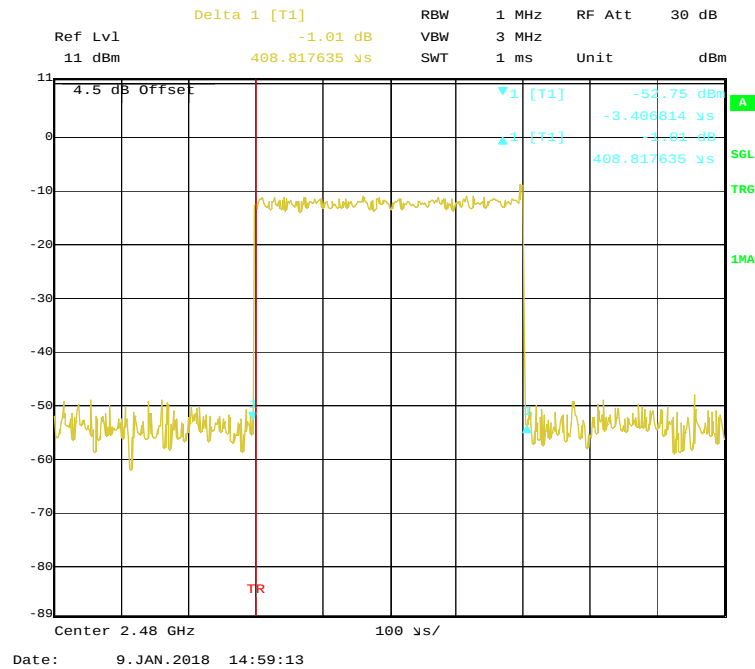

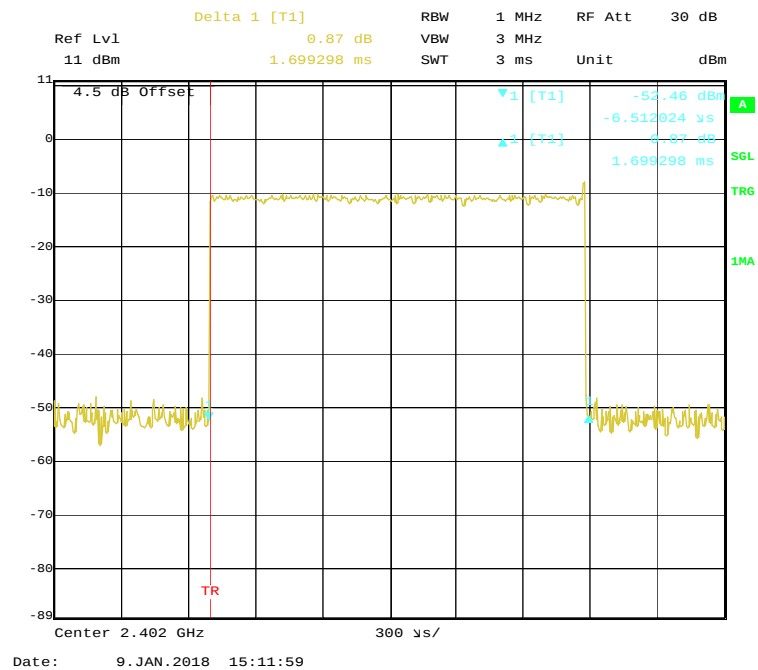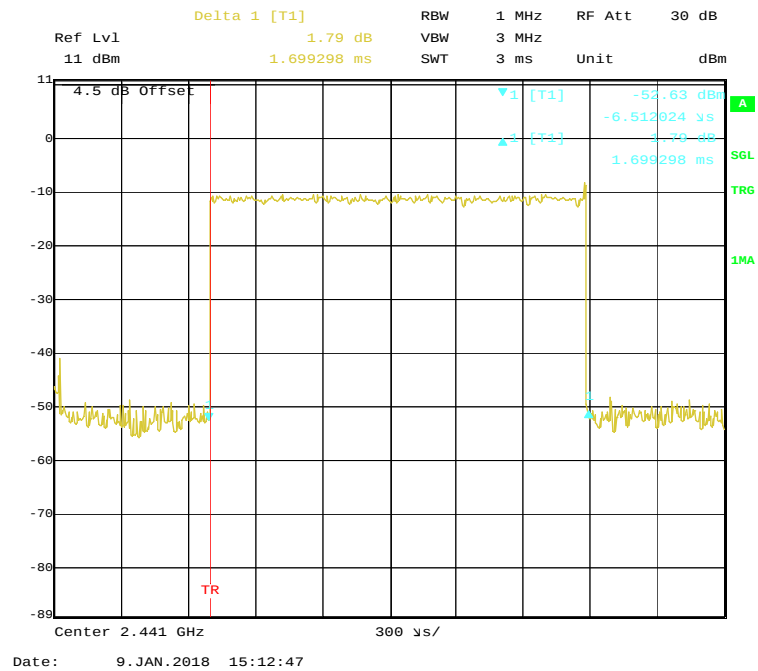EDR ($\pi/4$ -DQPSK):Pulse time, Low Channel, 2DH3**EDR ($\pi/4$ -DQPSK):Pulse time, Middle Channel, 2DH3**

Delta 1 [T1]

Ref Lvl 11 dBm

RBW 1 MHz

RF Att 30 dB

SWT 3 ms

Unit dBm

4.5 dB Offset

TR

1 [T1]

2 [T1]

-51.28 dBm

-6.512024 μ s

-0.97 dB

1.699298 ms

Center 2.48 GHz

300 μ s/

Date: 9.JAN.2018 15:13:12


Ref Lvl 11 dBm Delta 1 [T1] -1.07 dB RBW 1 MHz RF Att 30 dB
 11 dBm 2.957815 ms VBW 3 MHz 4 ms Unit dBm

4.5 dB Offset -52.03 dBm -14.528056 dBm
 -1.07 dB 2.957815 ms


Center 2.402 GHz 400 uS/

Date: 9. JAN. 2018 15:15:31


EDR ($\pi/4$ -DQPSK):Pulse time, Middle Channel, 2DH5

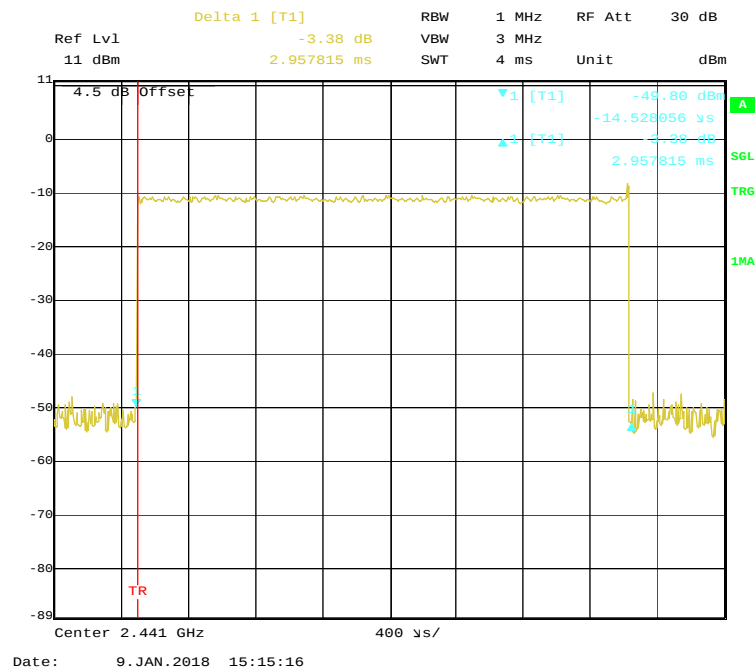


EDR ($\pi/4$ -DQPSK):Pulse time, High Channel, 2DH5

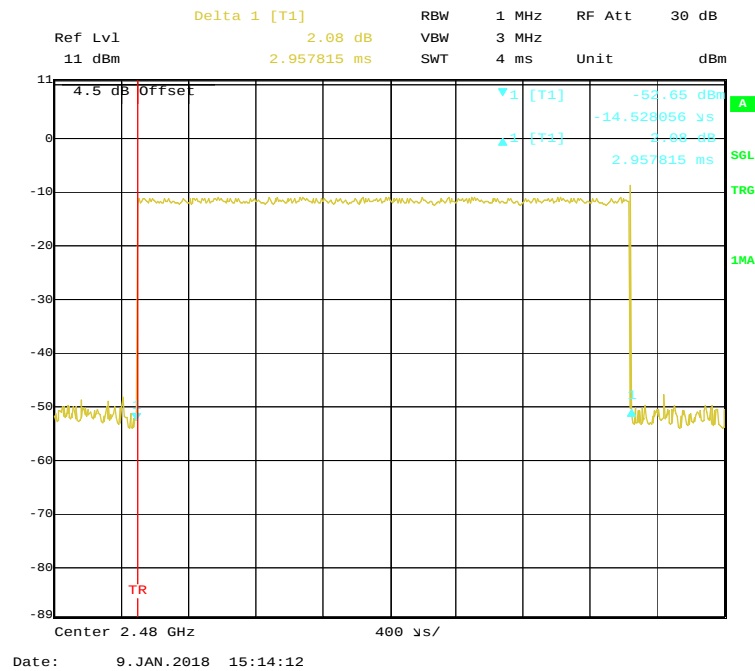


EDR (8DPSK): Pulse time, Low Channel, 3DH1

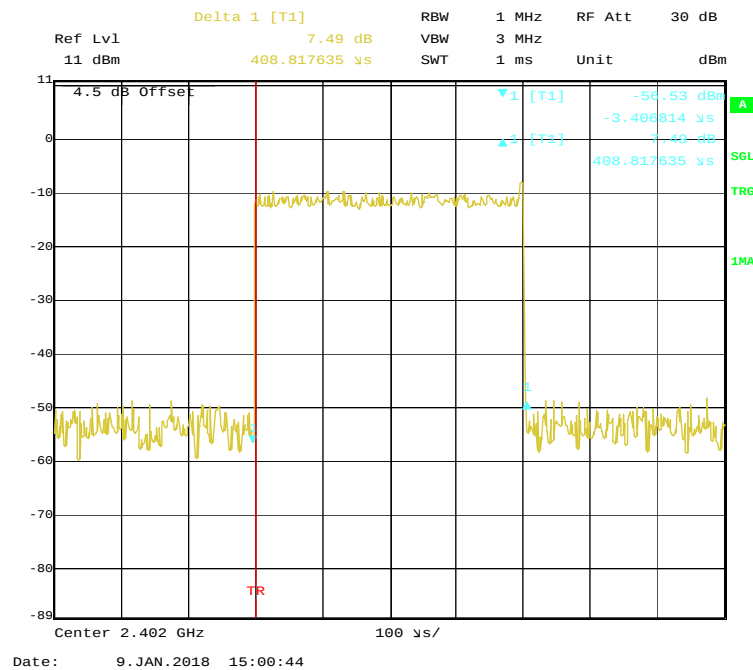


EDR (8DPSK): Pulse time, Middle Channel, 3DH1

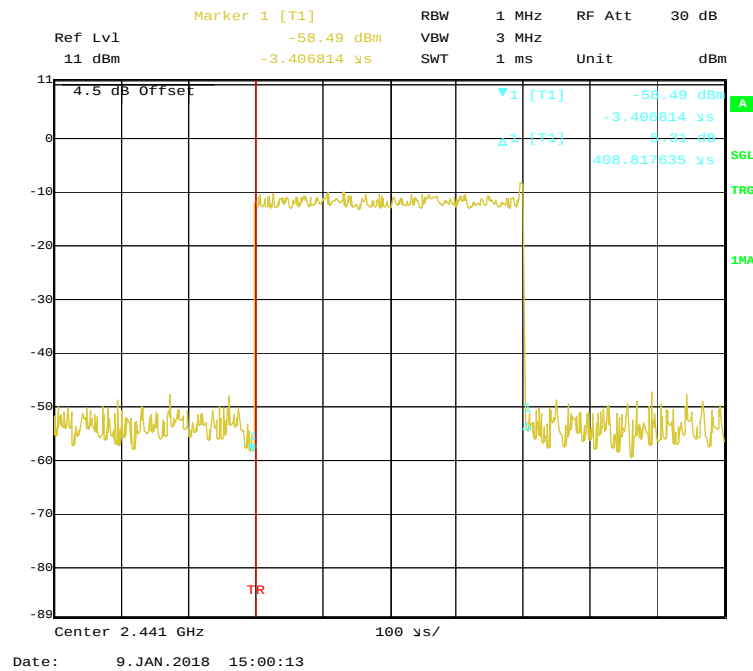


EDR (8DPSK): Pulse time, High Channel, 3DH1

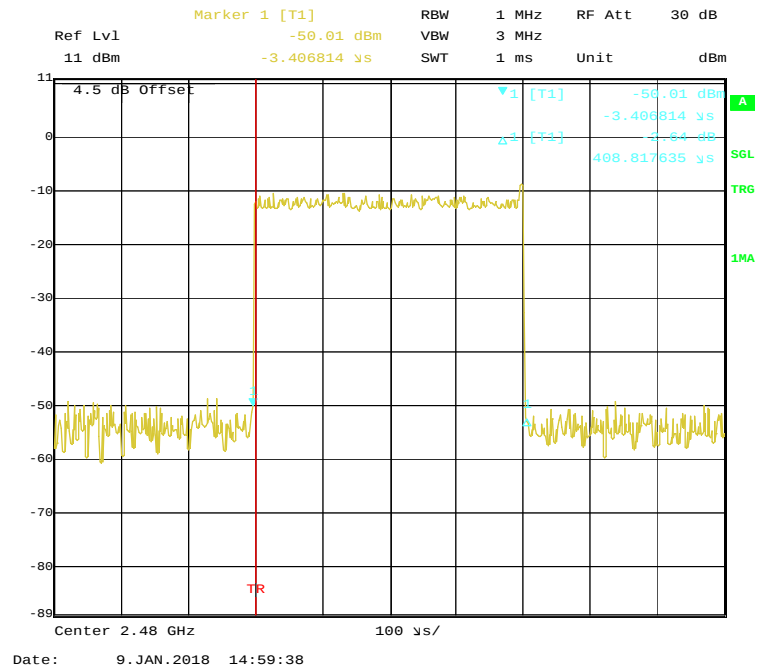


EDR (8DPSK): Pulse time, Low Channel, 3DH3

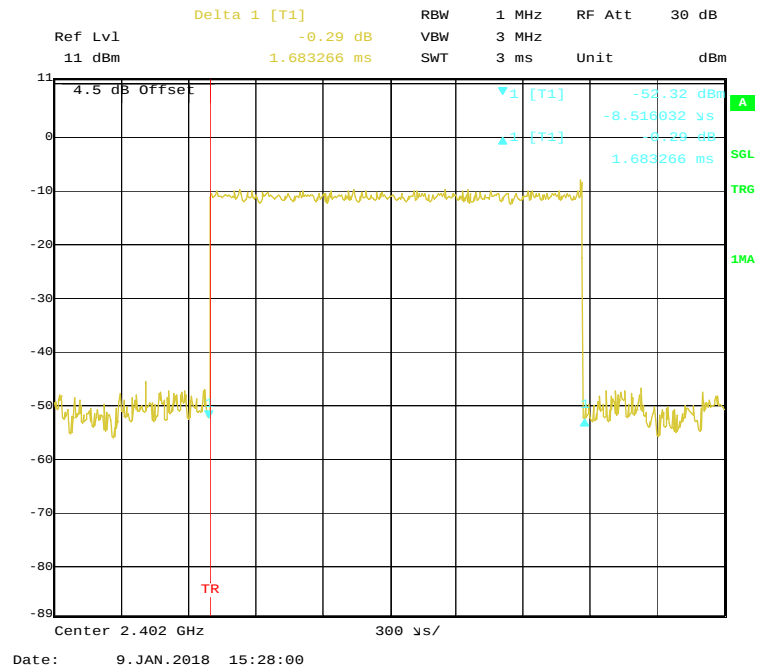


EDR (8DPSK): Pulse time, Middle Channel, 3DH3

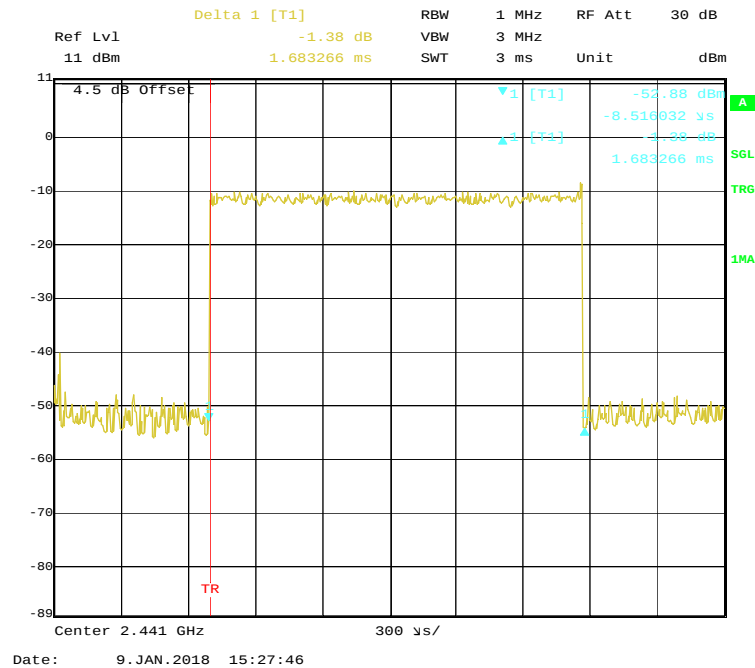


EDR (8DPSK): Pulse time, High Channel, 3DH3

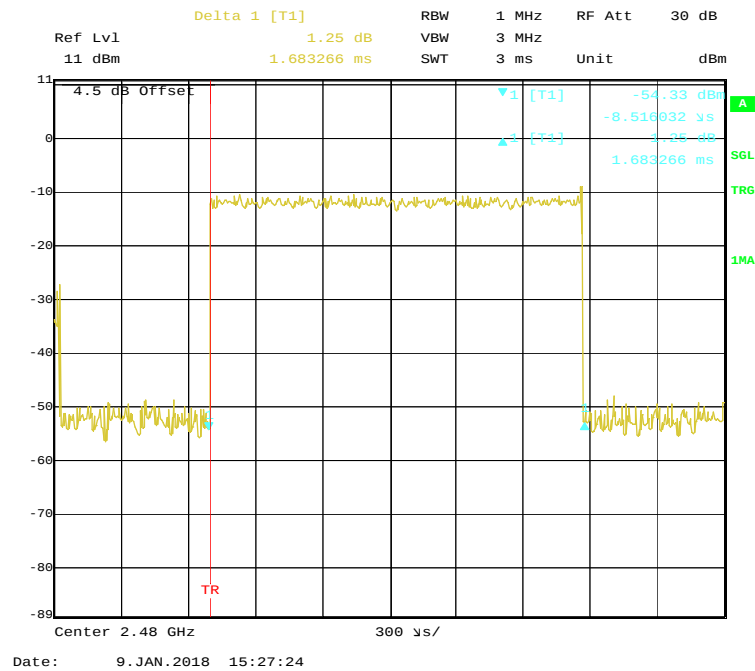


EDR (8DPSK): Pulse time, Low Channel, 3DH5

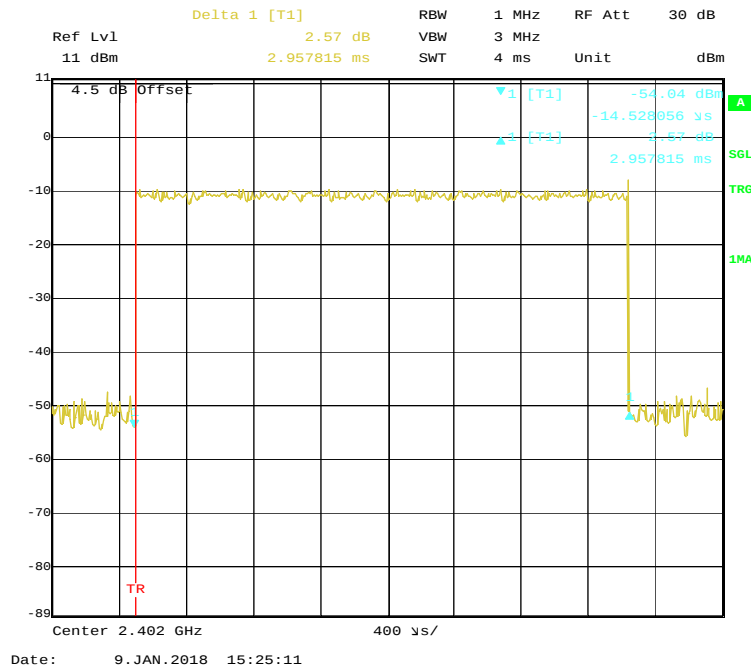

EDR (8DPSK): Pulse time, Middle Channel, 3DH5

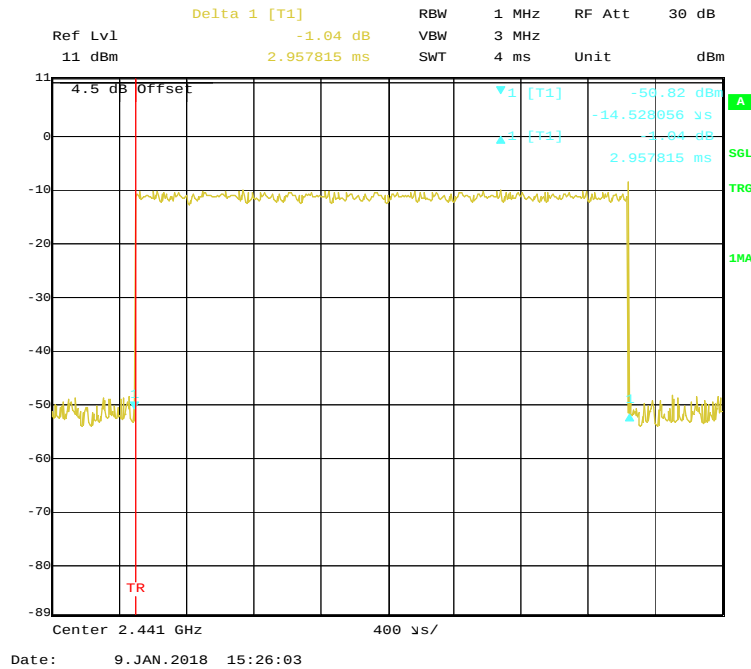

EDR (8DPSK): Pulse time, High Channel, 3DH5

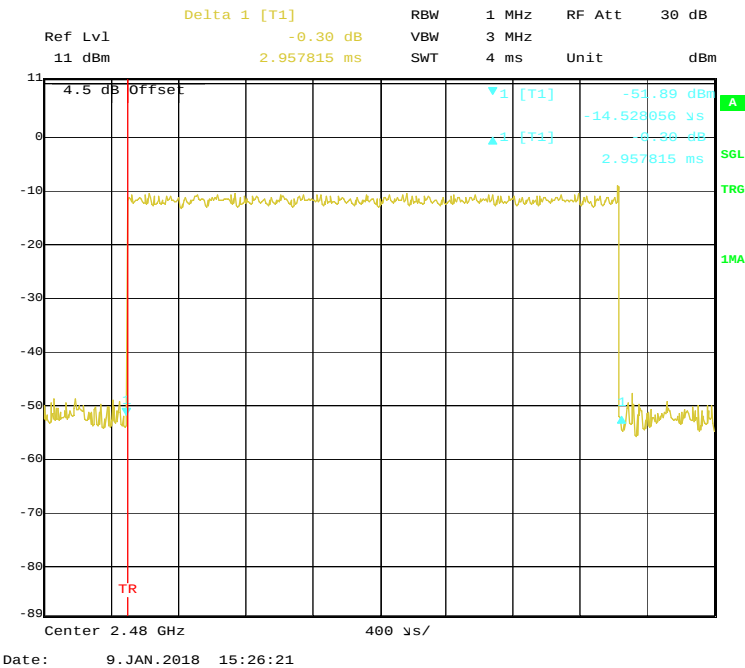

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT**Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

- a) Use the following spectrum analyzer settings:
 - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - 2) RBW > 20 dB bandwidth of the emission being measured.
 - 3) VBW $\geq$ RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
- b) Allow trace to stabilize.
- c) Use the marker-to-peak function to set the marker to the peak of the emission.
- d) The indicated level is the peak output power, after any corrections for external attenuators and cables.

Test Data**Environmental Conditions**


Temperature:	22.3 °C
Relative Humidity:	51 %
ATM Pressure:	101.2 kPa

The testing was performed by Edison Hu on 2018-01-09.


EUT operation mode: Transmitting

Test Result: Compliance.


Mode	Frequency (MHz)	Output Power		Limit (mW)
		(dBm)	(mW)	
BDR (GFSK)	2402	-7.37	0.18	125
	2441	-7.68	0.17	125
	2480	-8.27	0.15	125
EDR ($\pi/4$ -DQPSK)	2402	-7.48	0.18	125
	2441	-7.49	0.18	125
	2480	-8.27	0.15	125
EDR (8DPSK)	2402	-7.48	0.18	125
	2441	-7.74	0.17	125
	2480	-8.50	0.14	125

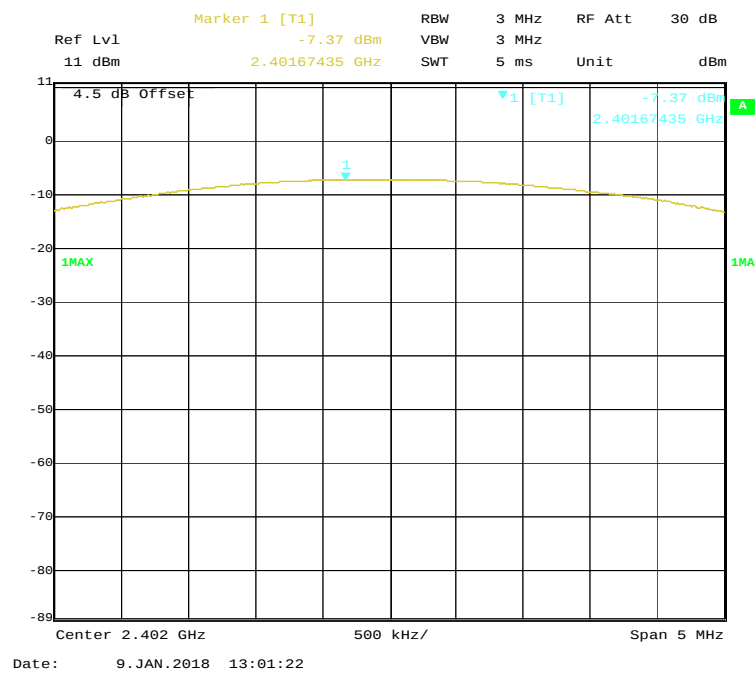BDR (GFSK): 2402MHz


BDR (GFSK): 2441MHz

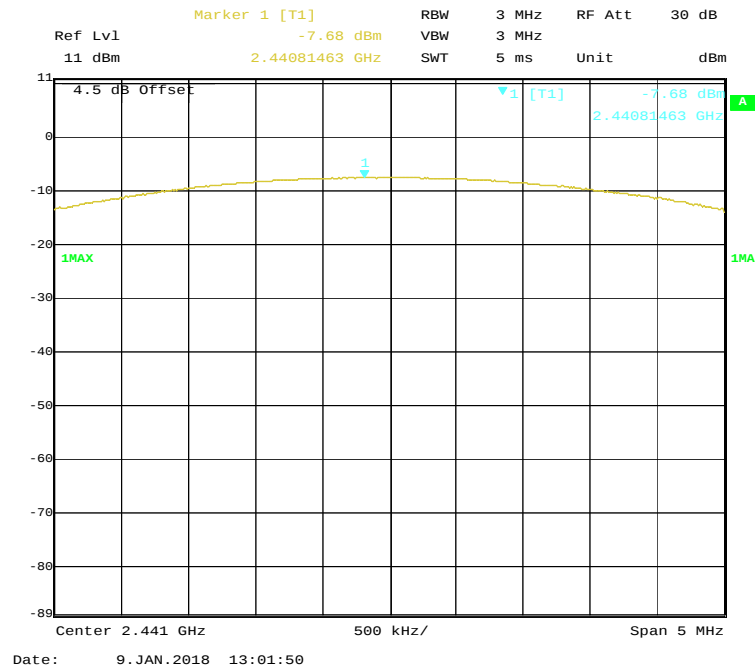


BDR (GFSK): 2480MHz

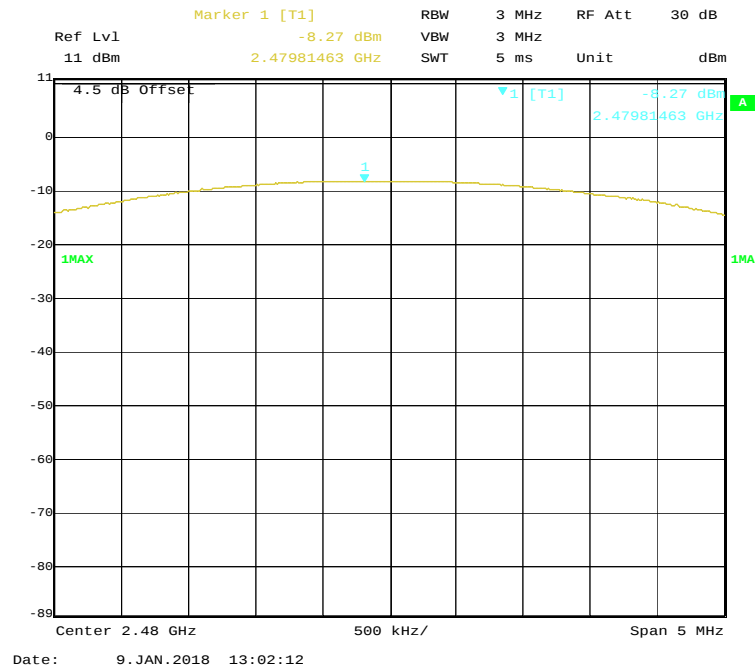


EDR($\pi/4$ -DQPSK): 2402MHz

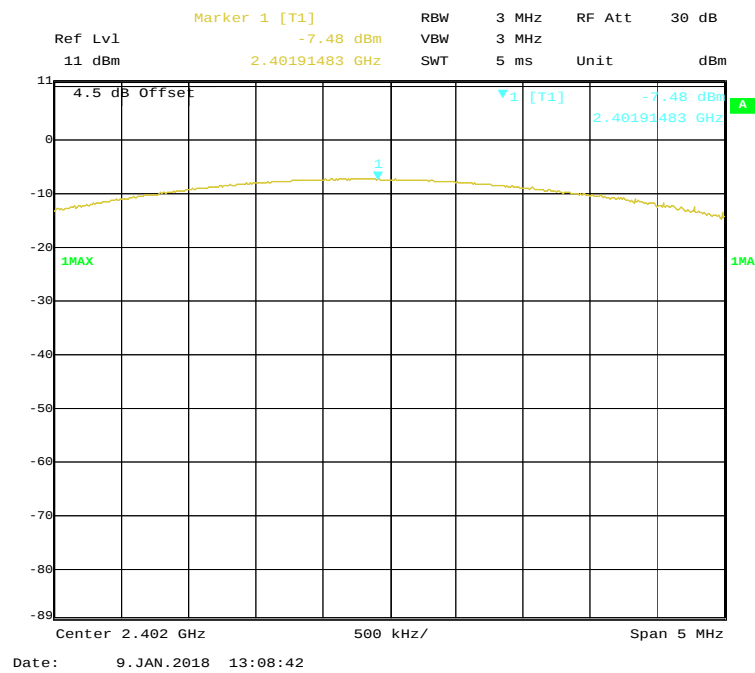


EDR($\pi/4$ -DQPSK): 2441MHz

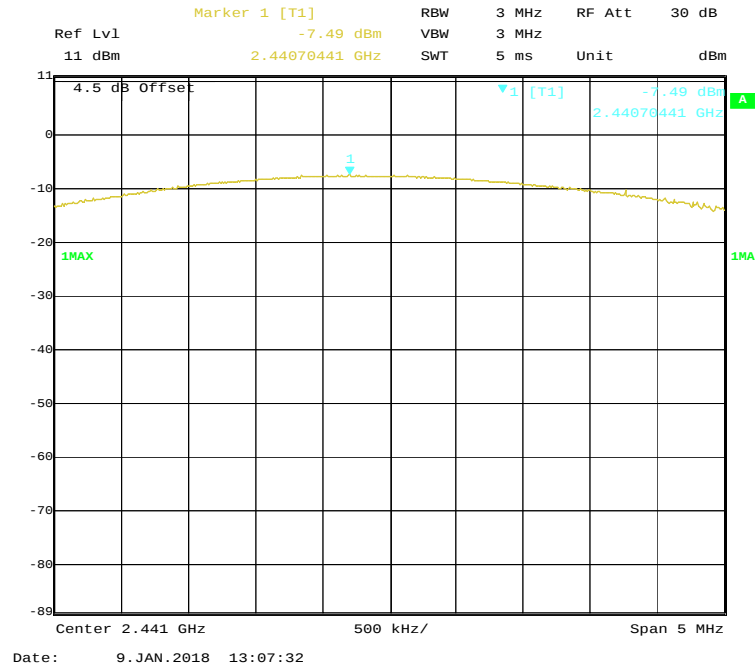


EDR($\pi/4$ -DQPSK): 2480MHz

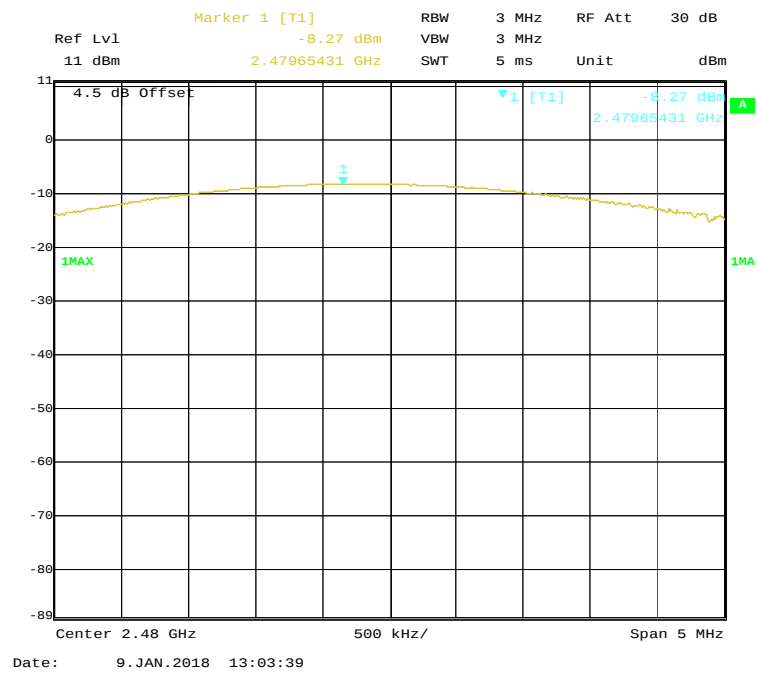


EDR(8DPSK): 2402MHz

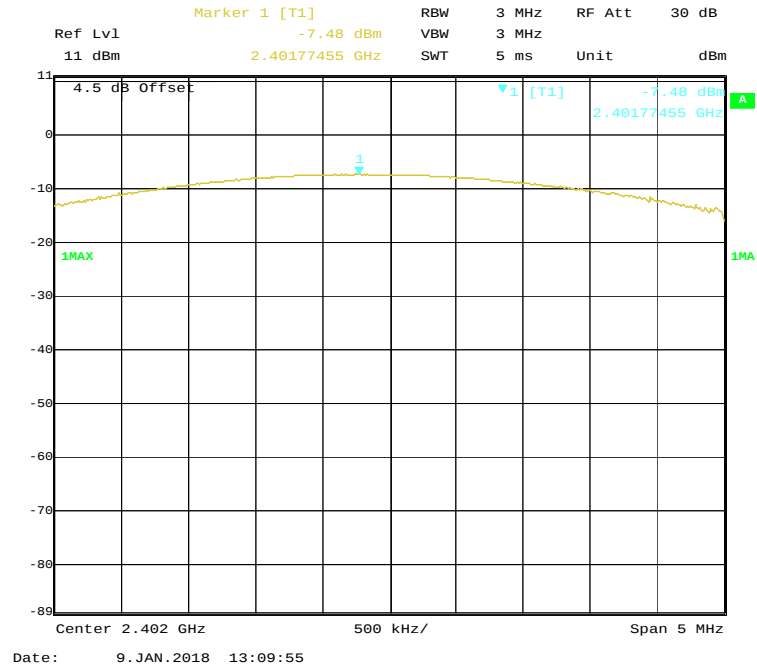

EDR(8DPSK): 2441MHz

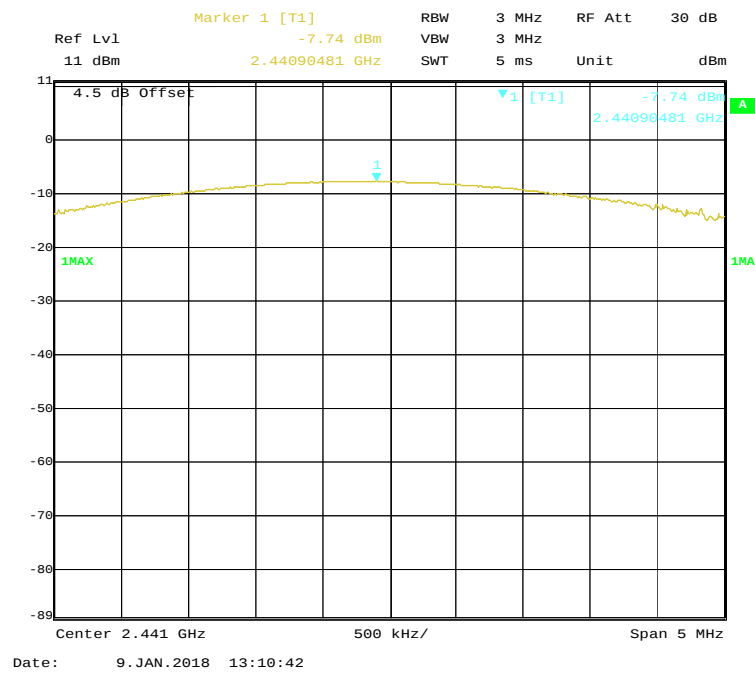

EDR(8DPSK):2480MHz

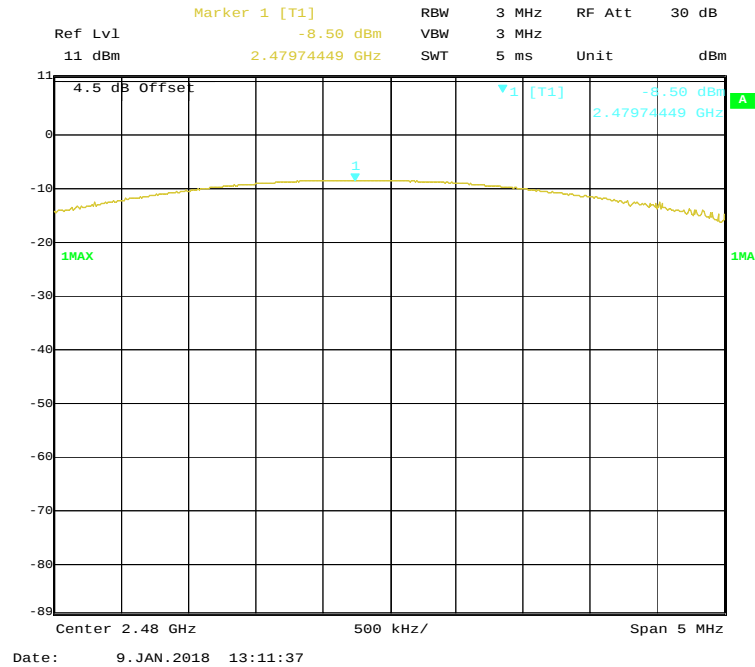

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions


Temperature:	22.3 °C
Relative Humidity:	51 %
ATM Pressure:	101.2 kPa

The testing was performed by Edison Hu on 2018-01-09.


EUT operation mode: Transmitting&Hopping

Test Result: Compliance.


BDR (GFSK): Left Side

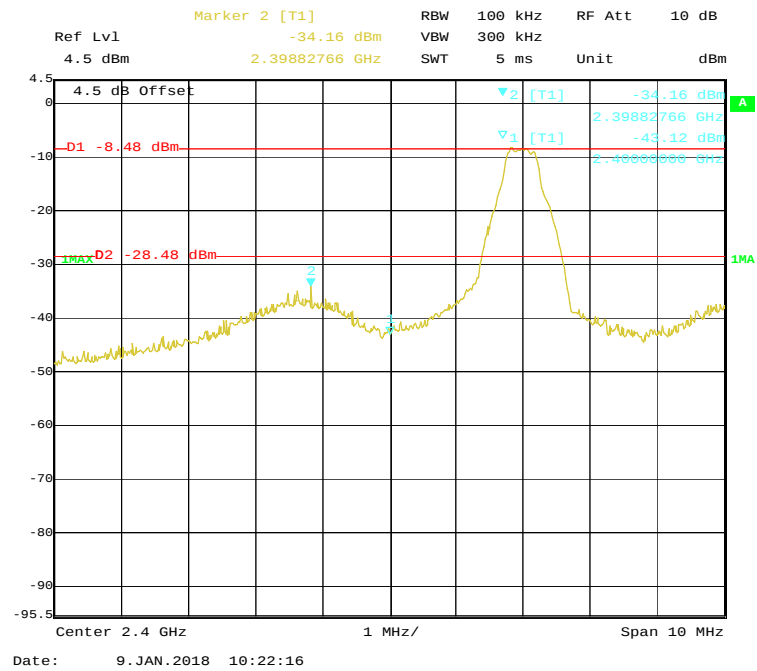


BDR (GFSK): Right Side

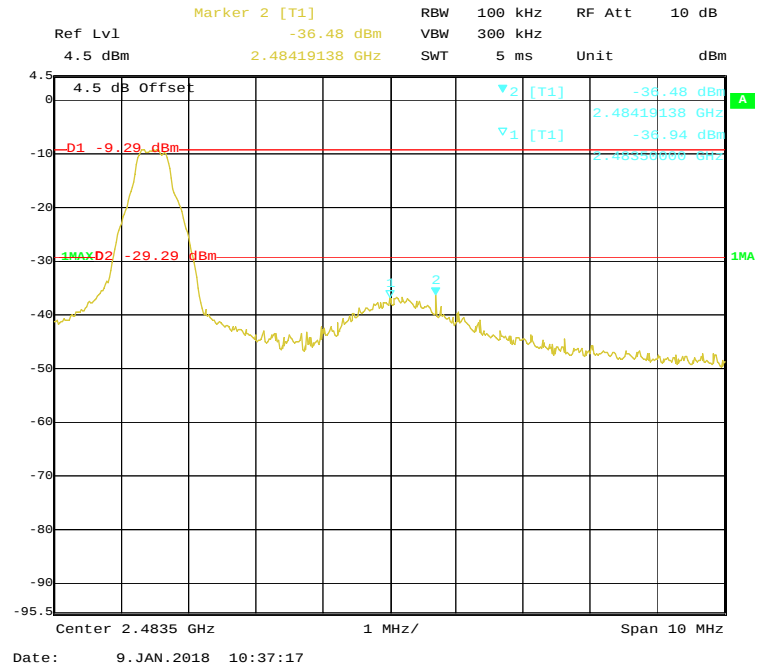

EDR ($\pi/4$ -DQPSK): Left Side

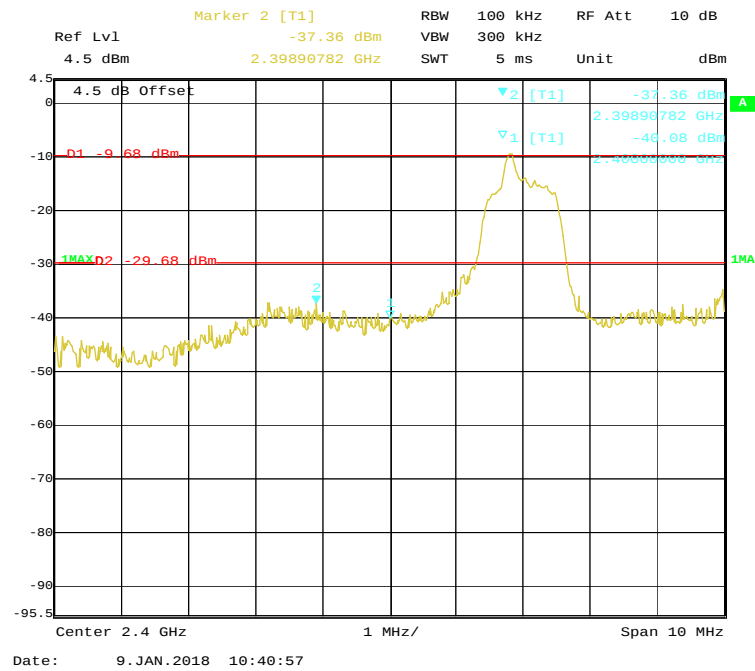

EDR ($\pi/4$ -DQPSK): Right Side

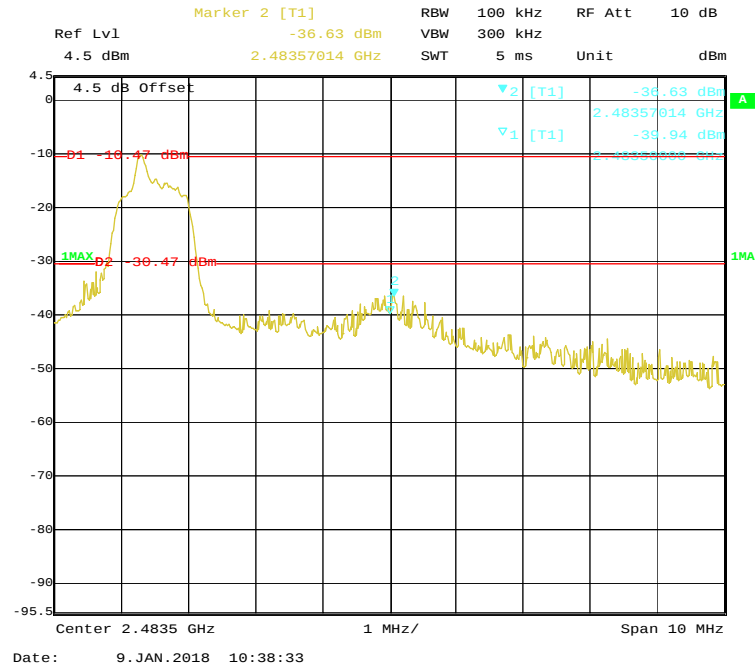

[illegible]

Ref Lvl 4.5 dBm
 RBW 100 kHz
 VBW 300 kHz
 SWT 5 ms
 RF Att 10 dB
 Unit dBm

Marker 2 [T1]
 -35.22 dBm
 2.48336974 GHz


4.5 dB Offset

10.1 dBm
 -30.1 dBm
 -35.22 dBm
 -35.03 dBm


Center 2.4835 GHz
 1 MHz/
 Span 10 MHz



Date: 9. JAN. 2018 10:45:01

BDR (GFSK): Left Side - Hopping

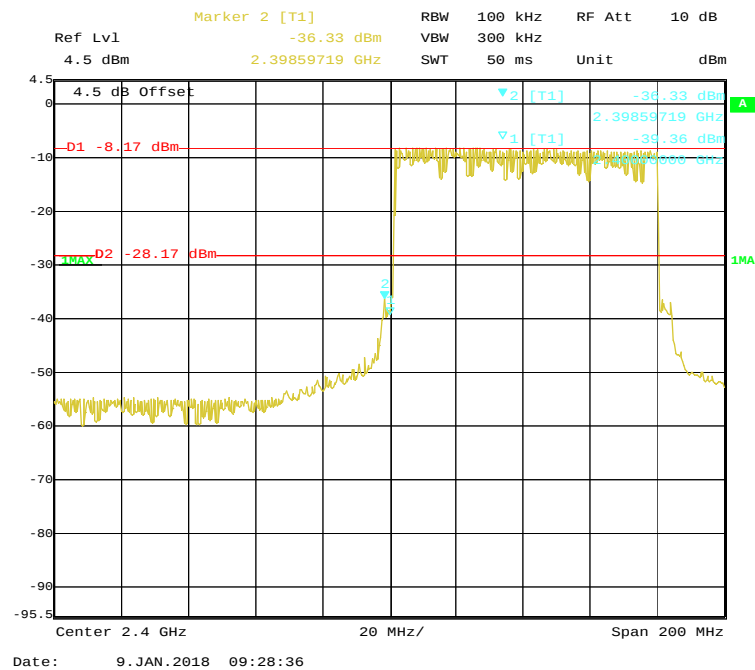


BDR (GFSK): Right Side- Hopping

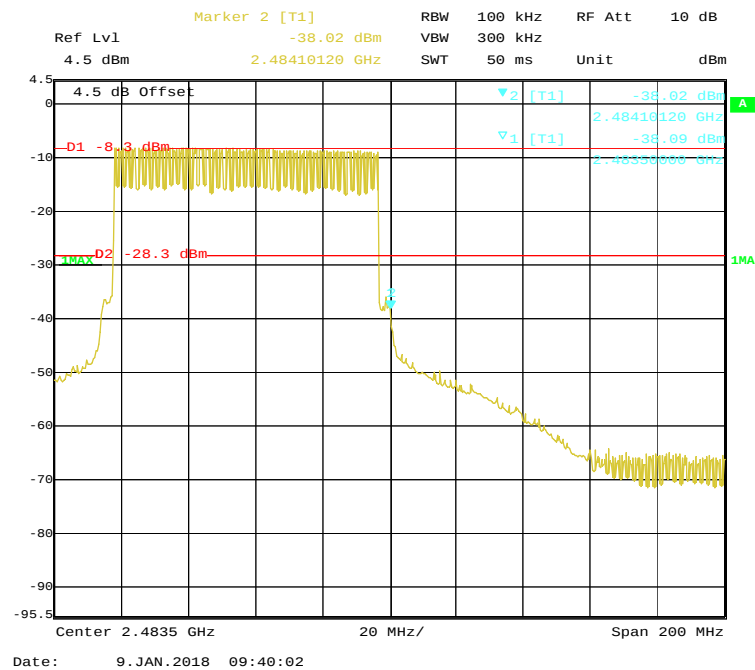


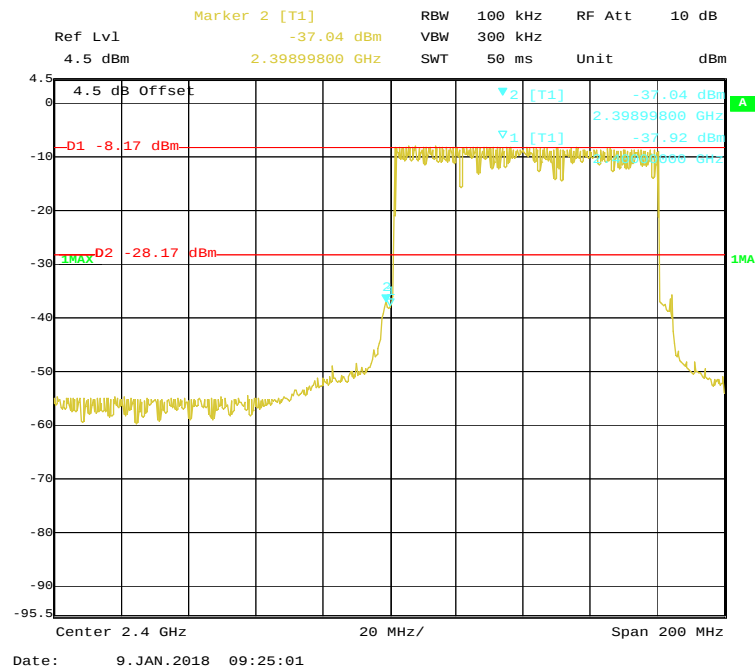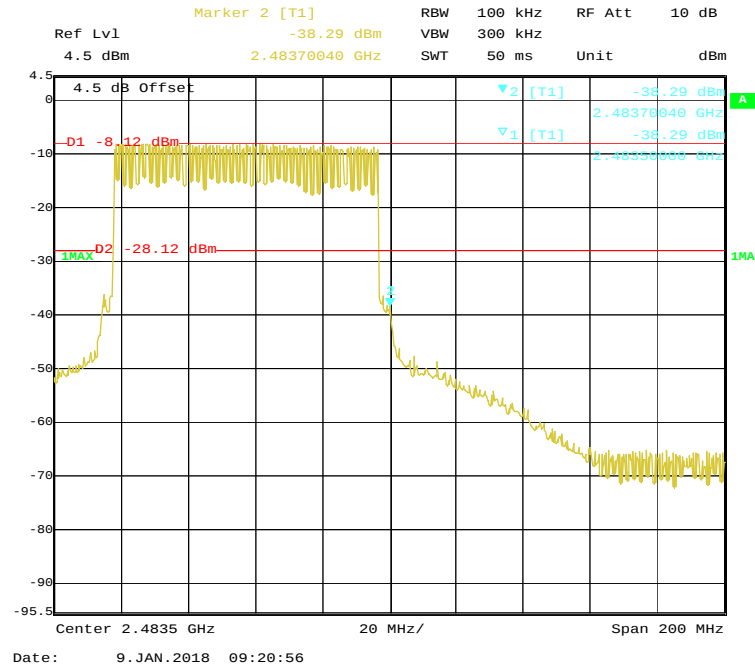EDR ($\pi/4$ -DQPSK): Left Side- Hopping**EDR ($\pi/4$ -DQPSK): Right Side- Hopping**

EDR (8DPSK): Left Side- Hopping

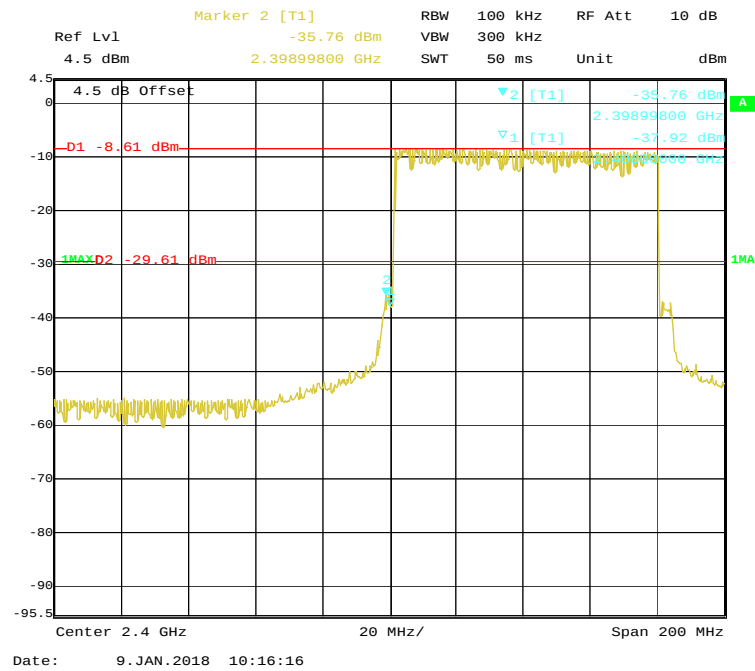

EDR (8DPSK): Right Side- Hopping

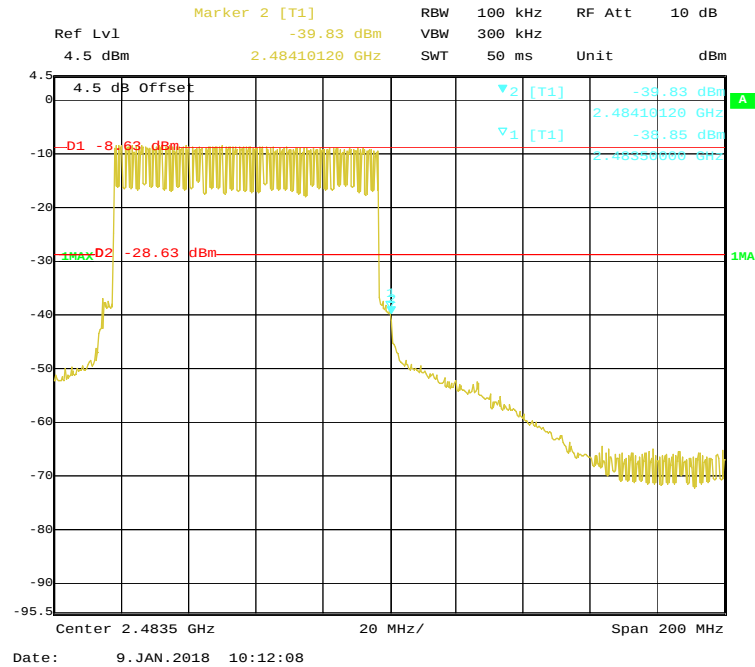

***** END OF REPORT *****