



FCC Test Report

APPLICANT : TELINK SEMICONDUCTOR (SHANG HAI) CO., LTD.
EQUIPMENT : ML7218D1-MERCURY-M0-PE11
BRAND NAME : TELINK SEMICONDUCTOR (SHANG HAI) CO., LTD.
MODEL NAME : ML7218D1-MERCURY-M0-PE11
FCC ID : OEOM7218D1MRM0
STANDARD : 47 CFR Part 15 Subpart B
CLASSIFICATION : Certification
TEST DATE(S) : May 09, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (Shenzhen)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sportun International Inc. (Kunshan)
No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1. GENERAL DESCRIPTION.....	5
1.1. Applicant.....	5
1.2. Manufacturer	5
1.3. Product Feature of Equipment Under Test	5
1.4. Product Specification of Equipment Under Test	5
1.5. Modification of EUT	6
1.6. Test Location.....	6
1.7. Test Software	6
1.8. Applicable Standards	7
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	8
2.1. Test Mode	8
2.2. Connection Diagram of Test System	8
2.3. Support Unit used in test configuration and system.....	9
3. TEST RESULT.....	10
3.1. Test of AC Conducted Emission Measurement	10
3.2. Test of Radiated Emission Measurement	14
4. LIST OF MEASURING EQUIPMENT.....	19
5. MEASUREMENT UNCERTAINTY	20

APPENDIX A. SETUP PHOTOGRAPHS



REVISION HISTORY



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 12.69 dB at 0.18 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 8.17 dB at 240.01 MHz for Quasi-Peak

Conformity Assessment Condition:

The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account. Please refer to each test results in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1. General Description

1.1. Applicant

TELINK SEMICONDUCTOR (SHANG HAI) CO., LTD.

10-11/F, Building 1, 61 Shengxia Road, PuDongDistrict,Shanghai, China 201203

1.2. Manufacturer

Dongguan Shengmengtai Surface Mount Technology Co.,Ltd

Room 301, Building 7, No. 45 Kangyi Road, QingxiTown, Dongguan City

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	ML7218D1-MERCURY-M0-PE11
Brand Name	TELINK SEMICONDUCTOR (SHANG HAI) CO., LTD.
Model Name	ML7218D1-MERCURY-M0-PE11
FCC ID	OEOM7218D1MRM0
EUT supports Radios application	Bluetooth LE/Zigbee/RF4CE/Thread
SN Code	Radiation/Conduction: EV13WL24035410702
HW Version	V1.3
SW Version	V1.0
EUT Stage	Production Unit

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The device supports IEEE 802.15.4 include Zigbee/RF4CE/Thread, the characteristic is the same. Thus, we evaluate full tests for Zigbee mode.

1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx / Rx Frequency	Bluetooth LE: 2402 MHz ~ 2480 MHz Zigbee: 2405 MHz ~ 2480 MHz
Antenna Type	Bluetooth: PCB Antenna Zigbee : PCB Antenna
Type of Modulation	Bluetooth LE : GFSK Zigbee : O-QPSK



1.5. Modification of EUT

No modifications are made to the EUT during all test items.

1.6. Test Location

Sportun International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sportun International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sportun Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH08-KS	CN1257	314309

Sportun International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sportun International Inc. (Shenzhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sportun Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO02-SZ ;	CN1256	421272

Note: Test data subcontracted: AC Conducted Emission test case in section 3.1 of this report.

1.7. Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH08-KS	AUDIX	E3	210616
2.	CO02-SZ	AUDIX	E3	6.120613b



1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart B
- ♦ ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2. Test Configuration of Equipment Under Test


2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: BLE Idle + Zigbee Idle + Charging from test Jig
Radiated Emissions	Mode 1: BLE Idle + Zigbee Idle + Charging from test Jig

2.2. Connection Diagram of Test System

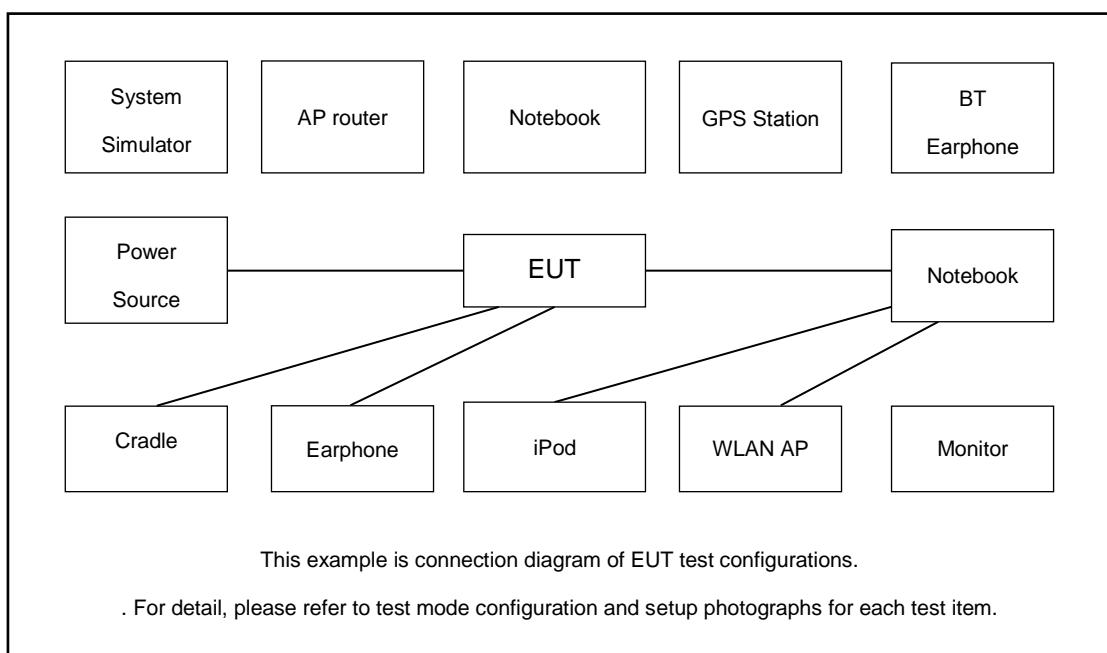

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application



2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Ipod	apple	MC69029/A	KA21R655B1	N/A	N/A
2.	WLAN AP	Dlink	DIR-820L	KA21R820LA1	N/A	Unshielded,1.8m
3.	Notebook	Lenovo	V130-14IKB001	N/A	N/A	N/A
4.	Notebook	DELL	Latiude 3400	N/A	N/A	Unshielded,1.8m
5.	Test Jig	NA	NA	NA	NA	NA



3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.1.4 Test Setup

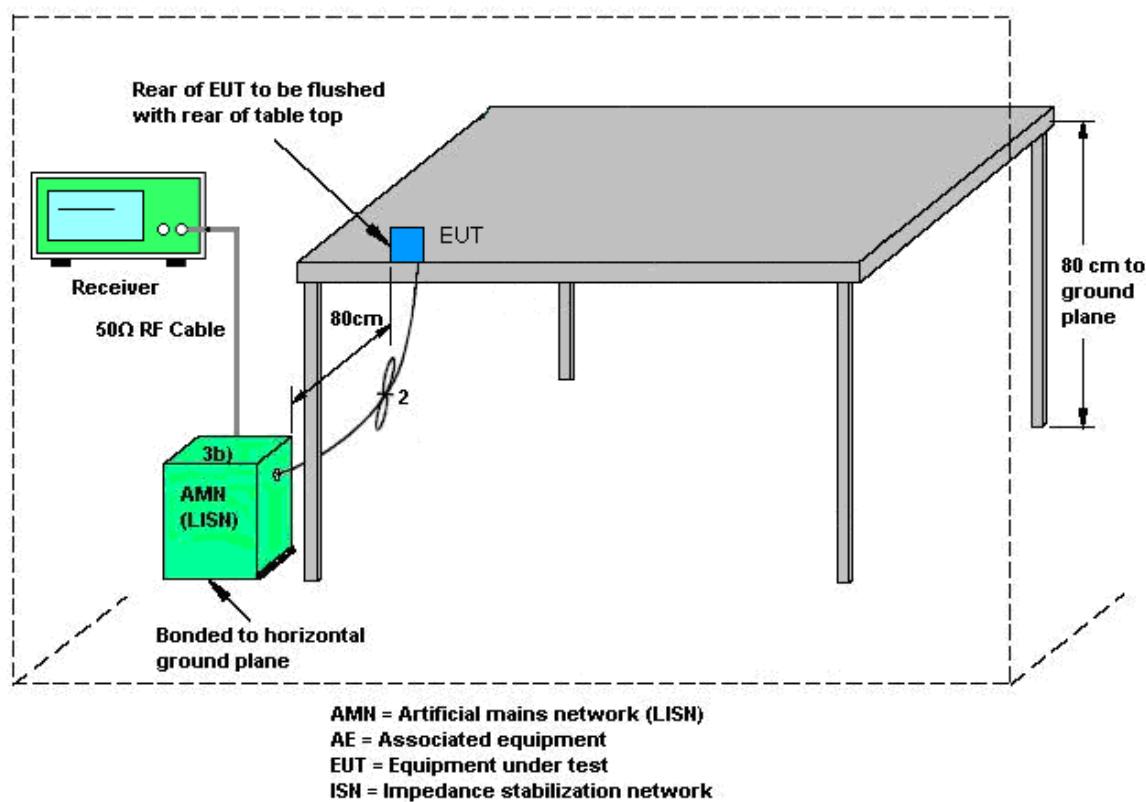

3.1.5 Test Result of AC Conducted Emission

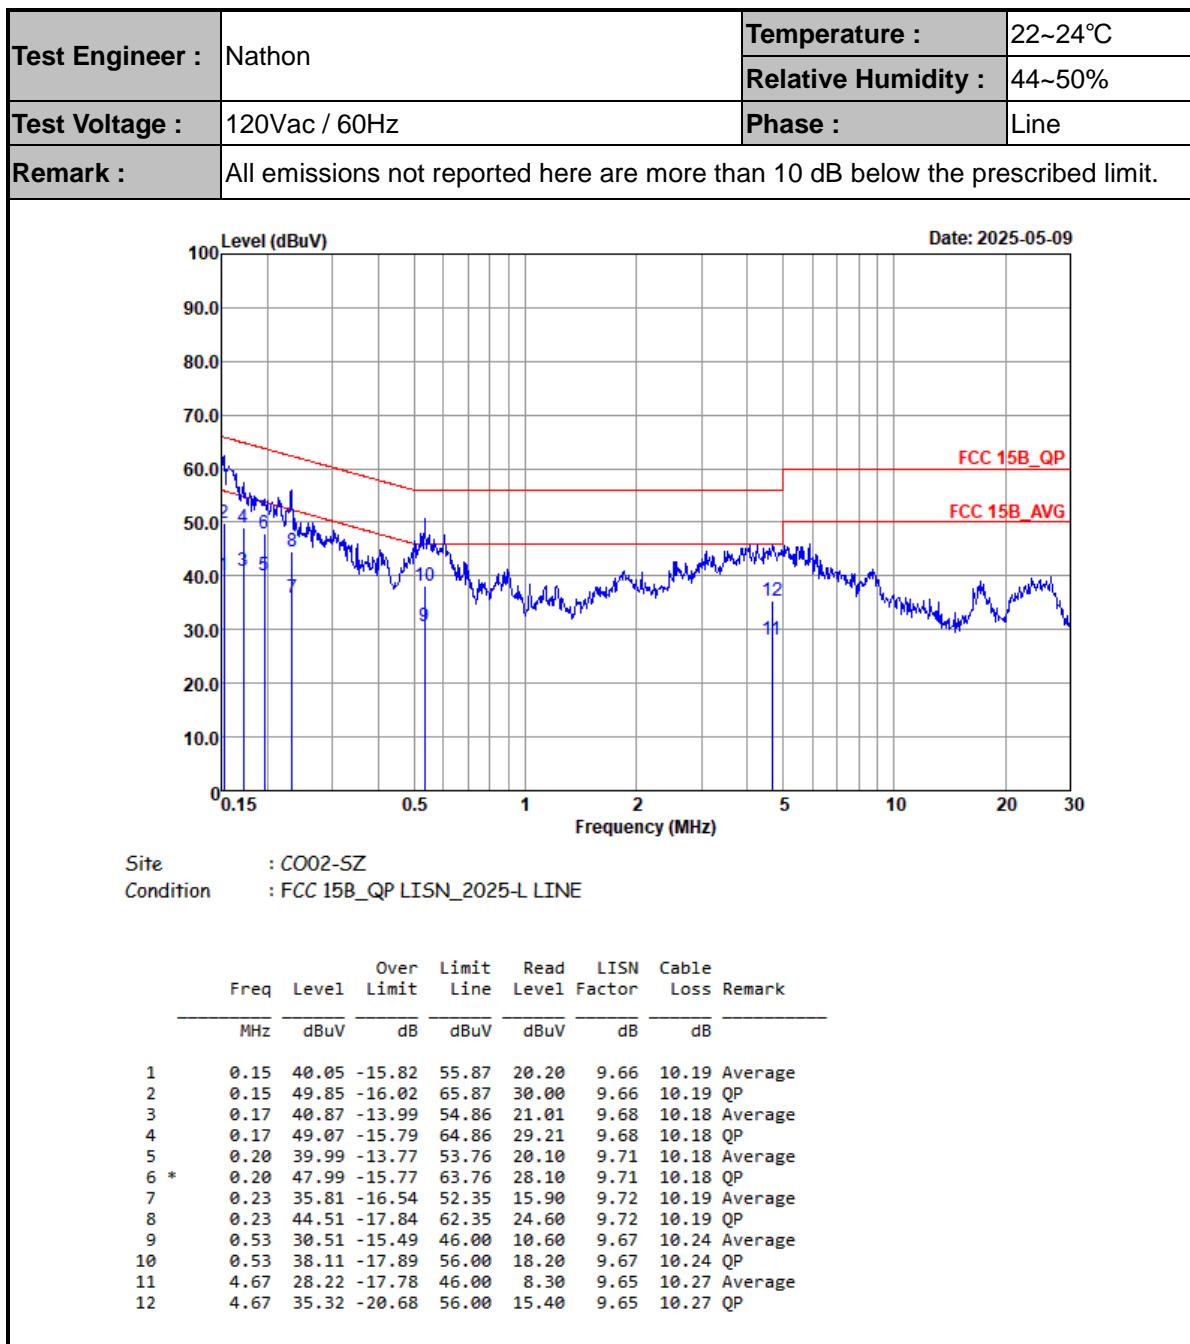

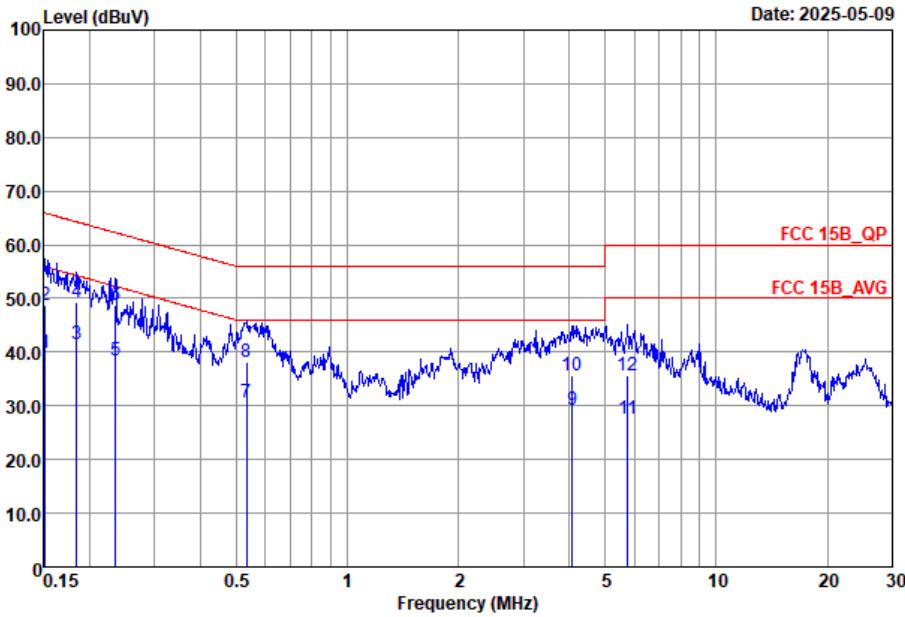

Test Engineer :	Nathon	Temperature :	22~24°C																																																																																																																														
		Relative Humidity :	44~50%																																																																																																																														
Test Voltage :	120Vac / 60Hz	Phase :	Neutral																																																																																																																														
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.																																																																																																																																
																																																																																																																																	
Site	: C002-SZ																																																																																																																																
Condition	: FCC 15B_QP LISN_2025-N NEUTRAL																																																																																																																																
<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>Read Level</th><th>LISN Factor</th><th>Cable Loss</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV</th><th>dB</th><th>dBuV</th><th>dBuV</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>0.15</td><td>39.95</td><td>-15.96</td><td>55.91</td><td>20.20</td><td>9.56</td><td>10.19</td><td>Average</td></tr><tr><td>2</td><td>0.15</td><td>48.85</td><td>-17.06</td><td>65.91</td><td>29.10</td><td>9.56</td><td>10.19</td><td>QP</td></tr><tr><td>3</td><td>0.18</td><td>41.59</td><td>-12.69</td><td>54.28</td><td>21.60</td><td>9.81</td><td>10.18</td><td>Average</td></tr><tr><td>4</td><td>0.18</td><td>49.39</td><td>-14.89</td><td>64.28</td><td>29.40</td><td>9.81</td><td>10.18</td><td>QP</td></tr><tr><td>5</td><td>0.24</td><td>38.31</td><td>-13.95</td><td>52.26</td><td>18.50</td><td>9.62</td><td>10.19</td><td>Average</td></tr><tr><td>6 *</td><td>0.24</td><td>48.61</td><td>-13.65</td><td>62.26</td><td>28.80</td><td>9.62</td><td>10.19</td><td>QP</td></tr><tr><td>7</td><td>0.53</td><td>30.56</td><td>-15.44</td><td>46.00</td><td>10.70</td><td>9.62</td><td>10.24</td><td>Average</td></tr><tr><td>8</td><td>0.53</td><td>38.06</td><td>-17.94</td><td>56.00</td><td>18.20</td><td>9.62</td><td>10.24</td><td>QP</td></tr><tr><td>9</td><td>4.07</td><td>29.13</td><td>-16.87</td><td>46.00</td><td>9.20</td><td>9.66</td><td>10.27</td><td>Average</td></tr><tr><td>10</td><td>4.07</td><td>35.63</td><td>-20.37</td><td>56.00</td><td>15.70</td><td>9.66</td><td>10.27</td><td>QP</td></tr><tr><td>11</td><td>5.74</td><td>27.48</td><td>-22.52</td><td>50.00</td><td>7.50</td><td>9.73</td><td>10.25</td><td>Average</td></tr><tr><td>12</td><td>5.74</td><td>35.78</td><td>-24.22</td><td>60.00</td><td>15.80</td><td>9.73</td><td>10.25</td><td>QP</td></tr></tbody></table>					Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark		MHz	dBuV	dB	dBuV	dBuV	dB	dB		1	0.15	39.95	-15.96	55.91	20.20	9.56	10.19	Average	2	0.15	48.85	-17.06	65.91	29.10	9.56	10.19	QP	3	0.18	41.59	-12.69	54.28	21.60	9.81	10.18	Average	4	0.18	49.39	-14.89	64.28	29.40	9.81	10.18	QP	5	0.24	38.31	-13.95	52.26	18.50	9.62	10.19	Average	6 *	0.24	48.61	-13.65	62.26	28.80	9.62	10.19	QP	7	0.53	30.56	-15.44	46.00	10.70	9.62	10.24	Average	8	0.53	38.06	-17.94	56.00	18.20	9.62	10.24	QP	9	4.07	29.13	-16.87	46.00	9.20	9.66	10.27	Average	10	4.07	35.63	-20.37	56.00	15.70	9.66	10.27	QP	11	5.74	27.48	-22.52	50.00	7.50	9.73	10.25	Average	12	5.74	35.78	-24.22	60.00	15.80	9.73	10.25	QP
	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark																																																																																																																									
	MHz	dBuV	dB	dBuV	dBuV	dB	dB																																																																																																																										
1	0.15	39.95	-15.96	55.91	20.20	9.56	10.19	Average																																																																																																																									
2	0.15	48.85	-17.06	65.91	29.10	9.56	10.19	QP																																																																																																																									
3	0.18	41.59	-12.69	54.28	21.60	9.81	10.18	Average																																																																																																																									
4	0.18	49.39	-14.89	64.28	29.40	9.81	10.18	QP																																																																																																																									
5	0.24	38.31	-13.95	52.26	18.50	9.62	10.19	Average																																																																																																																									
6 *	0.24	48.61	-13.65	62.26	28.80	9.62	10.19	QP																																																																																																																									
7	0.53	30.56	-15.44	46.00	10.70	9.62	10.24	Average																																																																																																																									
8	0.53	38.06	-17.94	56.00	18.20	9.62	10.24	QP																																																																																																																									
9	4.07	29.13	-16.87	46.00	9.20	9.66	10.27	Average																																																																																																																									
10	4.07	35.63	-20.37	56.00	15.70	9.66	10.27	QP																																																																																																																									
11	5.74	27.48	-22.52	50.00	7.50	9.73	10.25	Average																																																																																																																									
12	5.74	35.78	-24.22	60.00	15.80	9.73	10.25	QP																																																																																																																									

Note:

1. Level(dB μ V) = Read Level(dB μ V) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dB μ V) – Limit Line(dB μ V)



3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
10. Exploratory radiated emissions testing of handheld and/or body-worn devices shall include rotation of the EUT through three orthogonal axes (X/Y/Z Plane) to determine the orientation (attitude) that maximizes the emissions.

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

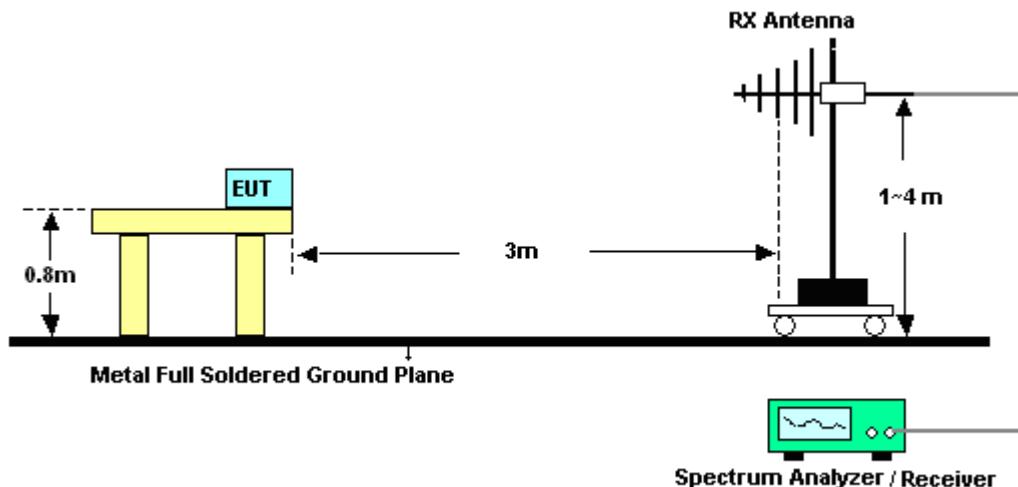



For radiated emissions above 1GHz

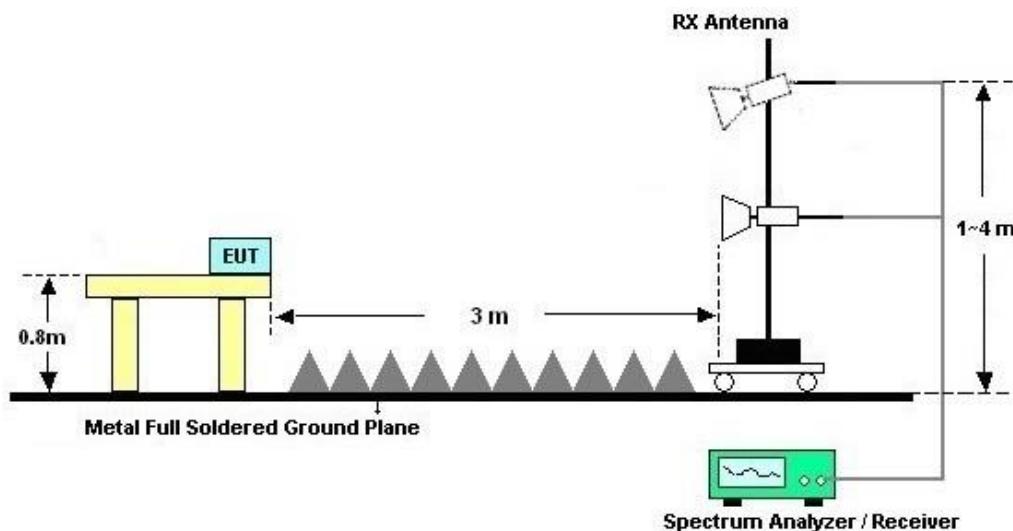



3.2.5. Test Result of Radiated Emission

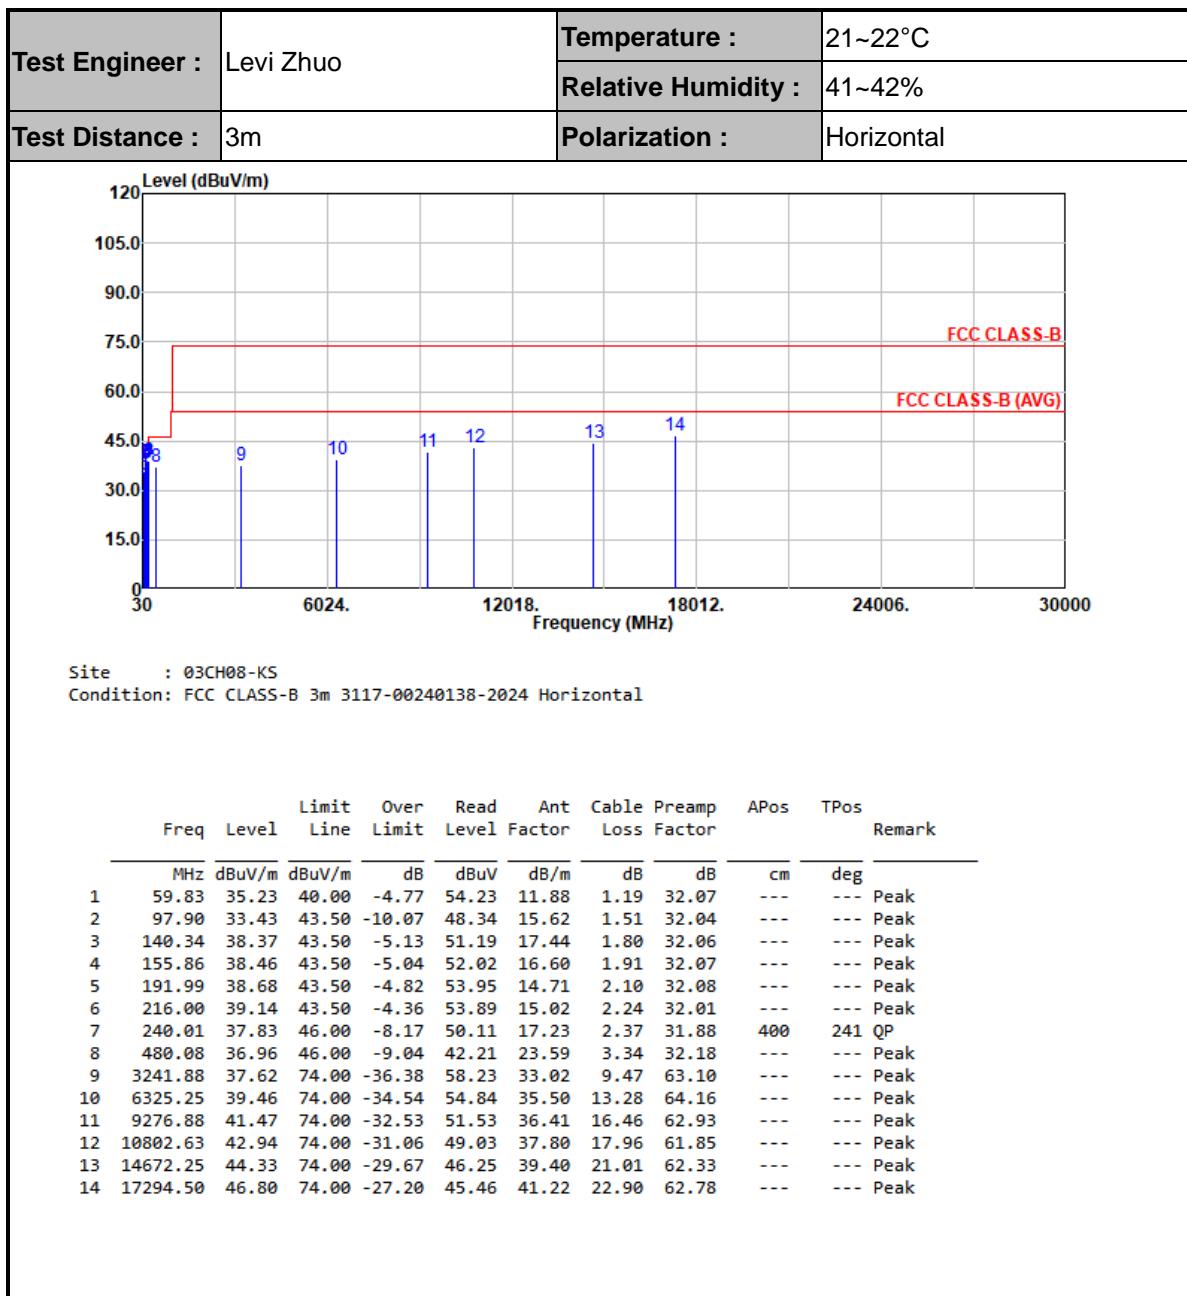

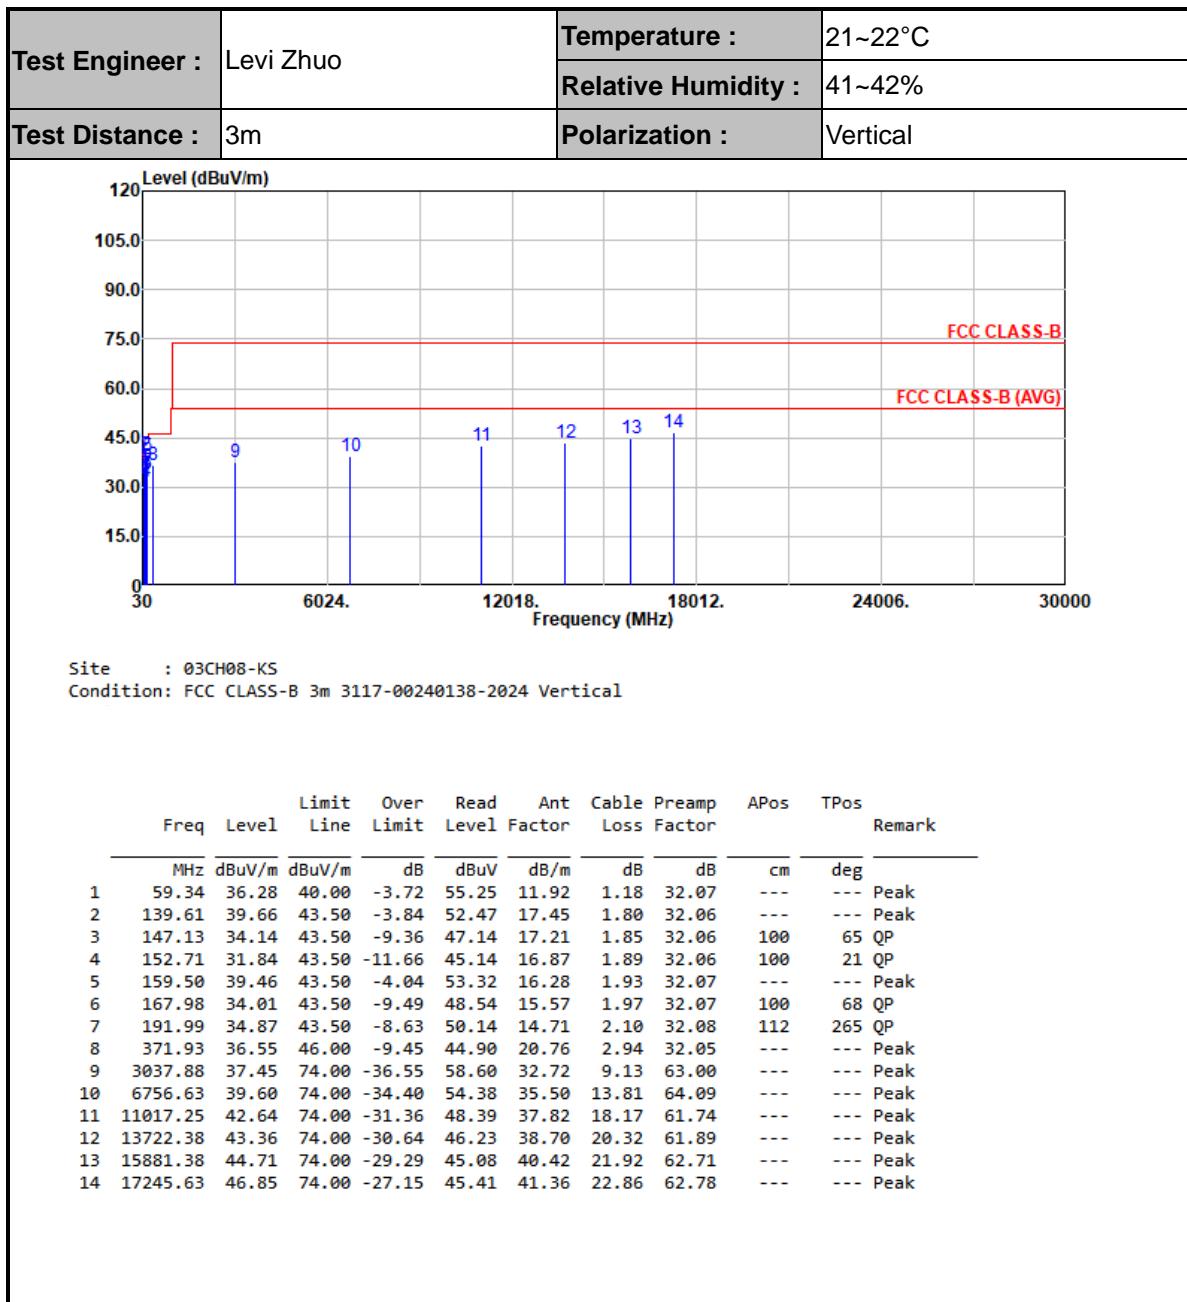

Note:

1. Level(dB μ V/m) = Read Level(dB μ V) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
2. Over Limit(dB) = Level(dB μ V/m) – Limit Line(dB μ V/m)



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY57290151	3Hz~8.5GHz; Max 30dBm	Jul. 04, 2024	May 09, 2025	Jul. 03, 2025	Radiation (03CH08-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57441079	10Hz-44GHz	Oct. 09, 2024	May 09, 2025	Oct. 08, 2025	Radiation (03CH08-KS)
Bilog Antenna	TESEQ	CBL 6111D	59915	30MHz-1GHz	Aug. 18, 2024	May 09, 2025	Aug.17, 2025	Radiation (03CH08-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00240138	1GHz~18GHz	Jul. 06, 2024	May 09, 2025	Jul. 05, 2025	Radiation (03CH08-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Oct. 22, 2024	May 09, 2025	Oct. 21, 2025	Radiation (03CH08-KS)
Amplifier	EM	EM18G40GGA	060737	18~40GHz	Jan. 03, 2025	May 09, 2025	Jan. 02, 2026	Radiation (03CH08-KS)
Amplifier	SONOMA	310N	380826	9KHz-1GHz	Jul. 03, 2024	May 09, 2025	Jul. 02, 2025	Radiation (03CH08-KS)
Amplifier	Keysight	83017A	MY53270417	500MHz~26.5GHz	Oct. 09, 2024	May 09, 2025	Oct. 08, 2025	Radiation (03CH08-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	May 09, 2025	NCR	Radiation (03CH08-KS)
Turn Table	EM	EM 1000-T	N/A	0~360 degree	NCR	May 09, 2025	NCR	Radiation (03CH08-KS)
Antenna Mast	EM	EM 1000-A	N/A	1 m~4 m	NCR	May 09, 2025	NCR	Radiation (03CH08-KS)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 03, 2024	May 09, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2024	May 09, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002470	100Vac~250Vac	Dec.25, 2024	May 09, 2025	Dec. 24, 2025	Conduction (CO02-SZ)

NCR: No Calibration Required



5. Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5 dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.04 dB
--	---------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.26 dB
--	---------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.40 dB
--	---------

----- THE END -----