

# Ke Mei Ou **L**aboratory Co., Ltd.

E506, 5th Floor, No.39 Keji Middle 2nd Rd, Science & Technology Park, Nanshan District, Shenzhen, P. R. China  
Tel: + 86 755 83642690      Fax: + 86 755 83297077  
www.kmolab.com

## **FCC TEST REPORT**

Under  
FCC 15 Subpart C, Paragraph 15.247

Operating in 2400 ~ 2483.5 MHz Band

Prepared For :

### **ILIFE TECHNOLOGY(HK) LIMITED**

3rd Floor, Bld. 3, Lijincheng Industrial Park, The East of Gongye Road, Longhua, Shenzhen China.

<b>FCC ID: OI2K977</b>
<b>EUT: Tablet PC</b>
<b>Model: K977</b>

November 14, 2012
<b>Issue Date:</b>
Original Report
<b>Report Type:</b>
<i>Eric Guo</i>
<b>Test Engineer:</b> Eric Guo
<i>Apollo Liu</i>
<b>Review By:</b> Apollo Liu / Manager

The test report consists 56 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of Ke Mei Ou Laboratory Corporation. The test result in the report only applied to the tested sample.

## TABLE OF CONTENTS

<b>1. General Information.....</b>	<b>3</b>
1. 1 Notes.....	3
1. 2 Testing Laboratory .....	3
1. 3 Details of Applicant .....	3
1. 4 Application Details .....	3
1. 5 Test Item .....	3
1. 6 Test Standards.....	3
<b>2. Technical Test.....</b>	<b>4</b>
2. 1 Summary of Test Results .....	4
2. 2 Antenna Requirement .....	4
<b>3. EUT Modifications .....</b>	<b>4</b>
<b>4. Conducted Power Line Test .....</b>	<b>5</b>
4. 1 Test Equipment .....	5
4. 2 Test Procedure .....	5
4. 3 Test Setup .....	5
4. 4 Configuration of the EUT .....	6
4. 5 EUT Operating Condition.....	8
4. 6 Conducted Power Line Emission Limits .....	8
4. 7 Conducted Power Line Test Result.....	9
<b>5. FCC Part 15.247 Requirements for 802.11b/g/n and FHSS Systems.....</b>	<b>11</b>
5. 1 Test Equipment .....	11
5. 2 Test Procedure .....	11
5. 3 Test Setup .....	12
5. 4 Configuration of the EUT .....	12
5. 5 EUT Operating Condition.....	12
5. 6 Limit .....	12
7 Test Result .....	13
<b>6. Transmitter Spurious Radiated Emission at 3 Meters.....</b>	<b>37</b>
6. 1 Test Equipment .....	37
6. 2 Test Procedure .....	37
6. 3 Test Setup .....	37
6. 4 Configuration of the EUT .....	38
6. 5 EUT Operating Condition.....	38
6. 6 Limit .....	39
6. 7 Test Result .....	40
<b>7. RF Exposure Requirements .....</b>	<b>46</b>
7. 1 Test Equipment .....	46
7. 2 Limit .....	46
7. 3 Test Result .....	46
<b>8. Photos of Testing .....</b>	<b>47</b>
8. 1 EUT Test Photographs .....	47
8. 2 EUT Detailed Photographs .....	49
<b>9. FCC ID Label.....</b>	<b>55</b>
<b>10. Test Equipment .....</b>	<b>56</b>

## 1. General Information

### 1. 1 Notes

The test results of this report relate exclusively to the test item specified in 1.5. The KMO Lab does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the KMO Lab.

### 1. 2 Testing Laboratory

Sintek Laboratory Co., Ltd.

Site on File with the Federal Communications Commission – United States

Registration Number: 963441

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: 7353A

### 1. 3 Details of Applicant

Name : ILIFE TECHNOLOGY(HK) LIMITED  
 Address : 3rd Floor, Bld. 3, Lijincheng Industrial Park, The East of Gongye Road, Longhua, Shenzhen China.  
 Contact : Chris Yu  
 Tel : 86 755 22200901  
 Fax : N/A

### 1. 4 Application Details

Date of Receipt of Application : September 19, 2012  
 Date of Receipt of Test Item : October 17, 2012  
 Date of Test : October 17, 2012~November 14, 2012

### 1. 5 Test Item

Manufacturer : Same Applicant  
 Address : Same Applicant  
 Trade Name : N/A  
 Model No.(Base) : K977  
 Model No.(Extension) : N/A  
 Description : Tablet PC

### Additional Information

Product Type : WLAN & Bluetooth (1TX, 1RX)  
 Radio Type : Intentional Transceiver  
 Power Type : DC 5V(Battery)  
 Modulation : see the below tables  
 Data Modulation : IEEE 802.11b: DQPSK, DBPSK, DSSS, and CCK  
 IEEE 802.11g: BPSK, QPSK, 16QAM, 64QAM  
 IEEE 802.11n: HT20: OFDM (64QAM, 16QAM, QPSK, BPSK)  
 Bluetooth: GFSK (1Mbps);  $\pi/4$ -DQPSK (2Mbps); 8DPSK (3Mbps)  
 Date Rate (Mbps) : see the below table  
 Frequency Range : 2412~2462MHz-802.11b/g/n; 2402~2480MHz-FHSS  
 Channel Number : For 2.4GHz Band: 11 for 20MHz bandwidth; For FHSS 79  
 Antenna : Internal

802.11b/g/n

Antenna	Single (TX)		Two (TX)	
Band width Mode	20 MHz	40 MHz	20 MHz	40 MHz
802.11a	X	X	X	X
802.11b / 11,5.5.2 and 1 Mbps with auto-rate fall back	✓	X	X	X
802.11g / 54,48,36,24,18,12,9&6 Mbps	✓	X	X	X
Draft n / up to 72Mbps	✓	X	X	X

Bluetooth

Type of Modulation	Data Rate
GFSK	1Mbps
$\pi/4$ -DQPSK	2Mbps
8DPSK	3Mbps

### 1. 6 Test Standards

FCC 15 Subpart C, Paragraph 15.247

Note: All radiated measurements were made in all three orthogonal planes. The values reported are the maximum values.

## 2. Technical Test

### 2. 1 Summary of Test Results

**The EUT has been tested according to the following specifications:**

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.203	Antenna Requirement	PASS	Complies
FCC Part 15, Paragraph 15.107, 15.207	Conducted Test	PASS	Complies
FCC Part 15.205	Radiated Emission (Restricted Band Requirements)	PASS	Complies
FCC Part 15.109, 15.209	Radiated Emission (Spurious Emission)	PASS	Complies.
FCC Part 15, Paragraph 15.247(a)	20dB Bandwidth	PASS	Complies.
FCC Part 15, Paragraph 15.247(a)(1)	Frequency Separation	PASS	Complies
FCC Part 15, Paragraph 15.247(a)(1)(iii)	Number of Hopping Frequency	PASS	Complies
FCC Part 15, Paragraph 15.247(a)(1)(iii)	Time of Occupancy	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.247(a)(2)	Spectrum Bandwidth (6dB Bandwidth Measurement)	PASS	Complies.
FCC Part 15 Subpart C Paragraph 15.247(b)(3)	Maximum Peak Power	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.247(c)	100kHz Bandwidth of Frequency Band Edges	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.247(d)	Peak Power Spectral Density	PASS	Complies

\* The digital circuit porting of the EUT has been tested and verified to comply with FCC Part 15, Subpart B., Class B Digital Devices and the associated Radio Receiver has also been tested and found to comply with FCC Part 15, Subpart B – Radio Receivers.

### 2. 2 Antenna Requirement

#### A. Regulation

FCC section 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of Part 15C. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

#### B. Result

The antenna type used in this product is internal Antenna and fixed in the EUT and without connector. That no antenna other than furnished by the responsible party shall be used with the device. The EUT as tested meets the criteria of this rule by being antenna being permanently attached and professionally installed. The EUT is compliant with Section 15.203.

### 3. EUT Modifications

No modification by test lab.

## 4. Conducted Power Line Test

### 4. 1 Test Equipment


Please refer to Section 10 this report.

### 4. 2 Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination.

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission., the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4:2003 on conducted measurement. Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

### 4. 3 Test Setup

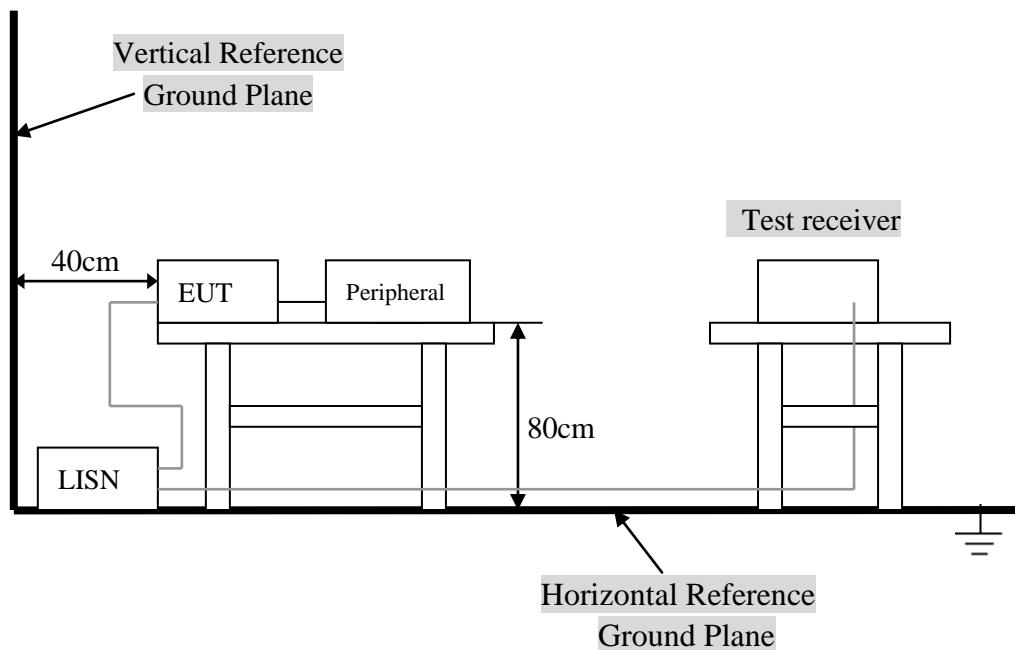

For the actual test configuration, Please refer to the related items – Photos of Testing.

#### 4.4 Configuration of the EUT

The EUT was configured according to ANSI C63.4-2003. EUT was used DC5V. The operation frequency is from 2400MHz~2483.5MHz. Enable the signal transmitted from the EUT to Notebook PC. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

Note:

802.11b/g/n

- 1) Operating Modes: Each of lowest, middle and highest channel frequencies transmits continuously for emissions measurements. The EUT operates in normal 802.11b/g/n for occupancy duration and frequency separation.
- 2) Special Test Software & Hardware: Special firmware and hardware provided by the Applicant are installed to allow the EUT to operates in 802.11b/g/n or at each channel frequency continuously. For example, the transmitter will be operated at each of lowest, middle and highest frequencies individually continuously during testing.
- 3) Transmitter Test Antenna: The EUT is tested with the antenna fitted in a manner typical of normal intended use as an integral / non-integral antenna equipment as describe with the test results.
- 4) Frequency(ies) Tested: 2412MHz, 2437MHz and 2462MHz were pre-tested, The worst case one, was chosen for conducted emission test.
- 5) Above 1GHz, the 2412MHz, 2437MHz and 2462MHz were tested individually.
- 6) Normal Test Modulation: 802.11b/g/n
- 7) Modulating Signal Source: Internal

Bluetooth

- 1) Operating Modes: Each of lowest, middle and highest channel frequencies transmits continuously for emissions measurements. The EUT operates in normal FHSS.
- 2) Special Test Software & Hardware: Special firmware and hardware provided by the Applicant are installed to allow the EUT to operates in FHSS at each channel frequency continuously. For example, the transmitter will be operated at each of lowest, middle and highest frequencies individually continuously during testing.
- 3) Transmitter Test Antenna: The EUT is tested with the antenna fitted in a manner typical of normal intended use as an integral / non-integral antenna equipment as describe with the test results.
- 4) Frequency(ies) Tested: 2402MHz, 2441MHz and 2480MHz were pre-tested, The worst case one, was chosen for conducted emission test.
- 5) Above 1GHz, the 2402MHz, 2441MHz and 2480MHz were tested individually.
- 6) Normal Test Modulation: FHSS
- 7) Modulating Signal Source: Internal


\* Associated Antenna Descriptions: The antenna used in this product is embedded antenna.

#### A. EUT

Device	Manufacturer	Model #	FCC ID
Tablet PC	Same Applicant	K977	OI2K977

#### Field Antenna For 2.4GHz Band

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Remark
0	Unictron	WIFI & BT FPC Antenna 3130FPC	Internal	NA	2.48	TX/RX

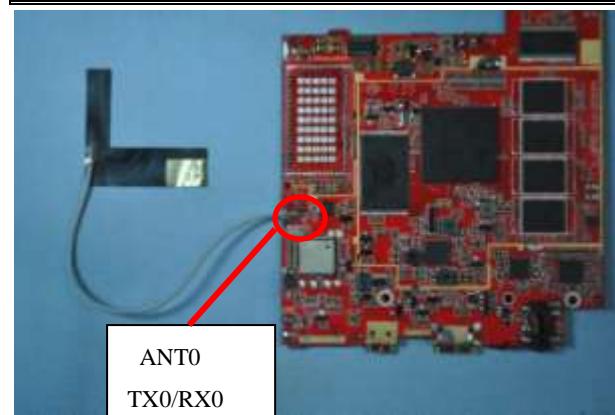

Note:

The EUT incorporates a WiFi function with 802.11b, 802.11g, dfaft 802.11n and Bluetooth GFSK (1Mbps);  $\pi/4$ -DQPSK (2Mbps) ; 8DPSK (3Mbps). Physically, the EUT provides one completed transmit and receiver. The device was tested in a 802.11b/g/n and FHSS type operation .

**802.11b/g/n Carrier Frequencies For 2.4GHz Band**

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5Mhz	1	2412MHz	7	2442MHz
	2	2417MHz	8	2447MHz
	3	2422MHz	9	2452MHz
	4	2427MHz	10	2457MHz
	5	2432MHz	11	2462MHz
	6	2437MHz		

**802.11b/g/n Test Modes For 2.4GHz Band**

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Normal Link	Auto	-	-
Maximum Peak Conducted Output Power Power Spectral Density 6dB Spectrum Bandwidth	MCS0/20MHz	7.2 Mbps	1/6/11	0
	-	-	-	-
	11b/BPSK	1 Mbps	1/6/11	0
	11g/BPSK	6 Mbps	1/6/11	0
Radiated Emissions 9kHz~1GHz	Normal Link	Auto	-	-
Radiated Emissions 1GHz~10 <sup>th</sup> Harmonic	MCS0/20MHz	7.2 Mbps	1/6/11	0
	-	-	-	-
	11b/BPSK	1 Mbps	1/6/11	0
	11g/BPSK	6 Mbps	1/6/11	0
Band Edge Emissions	MCS0/20MHz	7.2 Mbps	1/11	0
	-	-	-	-
	11b/BPSK	1 Mbps	1/11	0
	11g/BPSK	6 Mbps	1/11	0

**Bluetooth Test Modes For 2.4GHz Band**

Worst Modulation Mode	Number of Transmit (Ntx)	Frequency (MHz)	Power Setting	Data Rate
BT-1M	1	2402	63	1 Mbps
BT-1M	1	2441	63	1 Mbps
BT-1M	1	2480	63	1 Mbps
BT-2M	1	2402	120	2 Mbps
BT-2M	1	2441	120	2 Mbps
BT-2M	1	2480	120	2 Mbps
BT-3M	1	2402	120	3 Mbps
BT-3M	1	2441	120	3 Mbps
BT-3M	1	2480	120	3 Mbps

Note: Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate show in the table above is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level, The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

**B. Internal Devices**

Device	Manufacturer	Model #	FCC ID
N/A			


**C. Peripherals**

Device	Manufacturer	Model #/Serial #	FCC ID/DoC	Cable
Printer	HP	HP930C	DoC	1.5m unshielded power cord 1.2m unshielded data cable.
Modem	GVC	N/A	DoC	1.5m unshielded power cord 1.2m unshielded data cable.
Notebook	DELL	PP10L	DoC	1.5m unshielded power cord
PC	Dell	2400n	DoC	1.5m unshielded power cord

#### 4.5 EUT Operating Condition

Operating condition is according to ANSI C63.4 - 2003.

- A. Setup the EUT and simulators as shown on follow.
- B. Enable RF signal and confirm EUT active.
- C. Modulate output capacity of EUT up to specification.

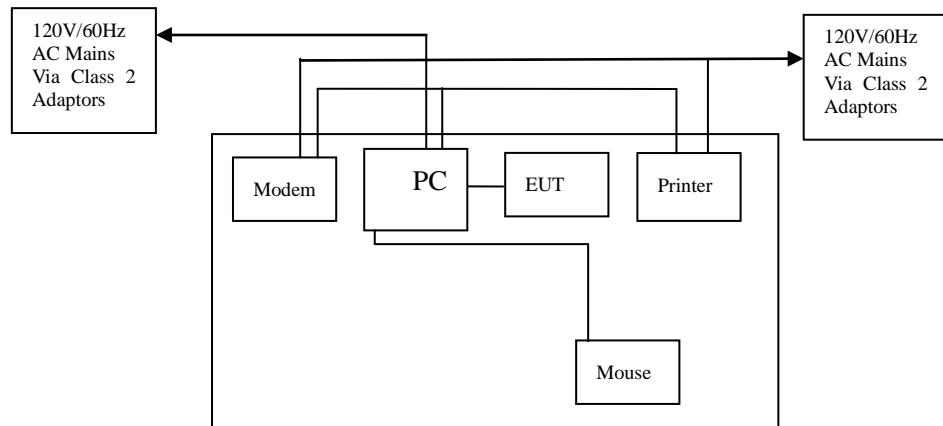

#### 4.6 Conducted Power Line Emission Limits

FCC Part 15 Paragraph 15.207 (dBuV)		
Frequency Range (MHz)	Class A QP/AV	Class B QP/AV
0.15 – 0.5	79/66	66-56/56-46
0.5 – 5.0	73/60	56/46
5.0 - 30	73/60	60/50

**NOTE** : In the above table, the tighter limit applies at the band edges.

#### 4.7 Conducted Power Line Test Result

Product	: Tablet PC	Test Mode	: Normal Link / Auto
Test Item	: Conducted Emission Data	Temperature	: 25 °C
Test Voltage	: DC 5V (From Host)	Humidity	: 56%RH
Test Result	: <b>PASS</b>	Adapter Model	:

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All readings are quasi -peak values with a resolution bandwidth of 9 KHz.

- Temperature : 26 °C
- Humidity : 53 % RH

FCC Part 15 Paragraph 15.207							
Frequency (MHz)	Emission (dBuV) QP AV		LINE/ NEUTRAL	Limit (dBuV) QP AV		Margin (dB) QP AV	
0.154	58.18	43.22	Line	65.78	55.78	-7.60	-12.56
0.154	55.36	41.38	Neutral	65.78	55.78	-10.42	-14.40
0.174	52.78	37.79	Line	64.77	54.77	-11.99	-16.98
0.158	54.07	40.87	Neutral	65.57	55.57	-11.50	-14.70
0.182	52.09	38.57	Line	64.39	54.39	-12.30	-15.82
0.198	48.78	36.46	Neutral	63.69	53.69	-14.91	-17.23

**Note: NF = No Significant Peak was Found.**

**Note:**

- 1.Uncertainty in conducted emission measured is <+/-2dB.
- 2.The emission levels of other frequencies were very low against the limit.
- 3.All Reading Levels are Quasi-Peak and Average value.
- 4.Emission = Meter Reading + Factor; Factor = Insertion Loss + Cable Loss.
- 5.Margin Value = Emission Level - Limit Value.

**Conducted Emission****EN55022**

EUT: Tablet PC

M/N: K977

Manufacturer: Same Applicant


Operating Condition: Transmitter

Test Site: Normal Data Transfer

Operator: Eric

Test Specification: LINE&NEUTRAL

Comment:

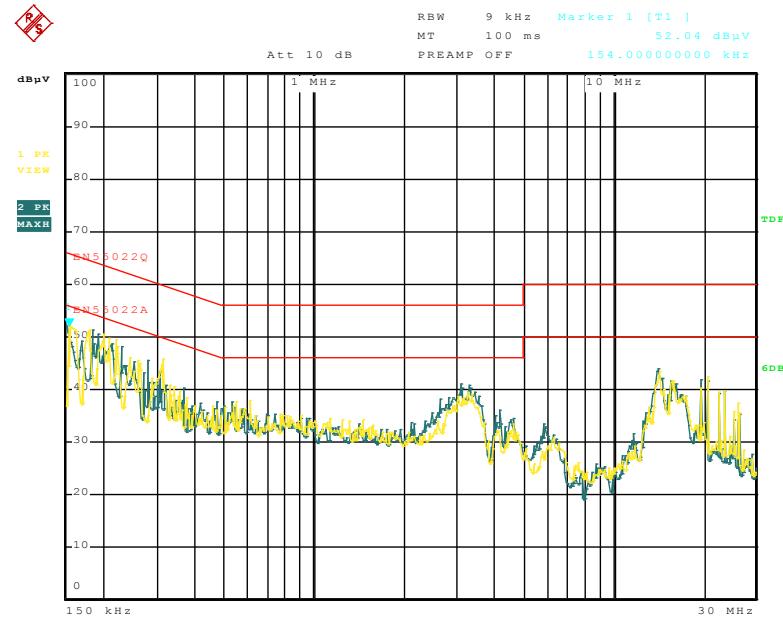

Date: 18.OCT.2012 17:07:07

## 5. FCC Part 15.247 Requirements for 802.11b/g/n and FHSS Systems

### 5. 1 Test Equipment

Please refer to Section 10 this report.

### 5. 2 Test Procedure

Refer to FCC 15.247(a)(2), ANSI C63.4: 2003

#### A.802.11b/g/n

##### 6 dB Bandwidth:

1. Set resolution bandwidth (RBW) = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.

7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

##### Peak Power:

1. Set the RBW  $\geq$  DTS bandwidth.
2. Set VBW  $\geq 3 \times$  RBW.
3. Set span  $\geq$  RBW.
4. Sweep time = auto couple.
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.

##### Band Edges Measurement:

- a. The transmitter output was connected to the spectrum analyzer via a low loss cable.
- b. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100kHz bandwidth from band edge.
- c. The band edges was measured and recorded.

##### Peak Power Spectral Density:

- a. The testing follows Measurement Procedure 5.3.1 (Peak PSD) of FCC KDB Publication No.558074 D01 DTS Meas. Guidance and TCB Workshop 2012,April.
- b. The RF output of EUT was connected to the spectrum analyzer by a low loss cable. The path loss was compensated to the results for each measurement.
- c. Record the measurement data derived from the spectrum analyzer.
- d. Make the measurement with the spectrum analyzer's resolution bandwidth(RBW)=100kHz. Video bandwidth(VBW)  $\geq$  300KHz. In order to make an accurate measurement, set the span to 5-30% greater than Emission Bandwidth(EBW).
- e. Detector = peak, Sweep time = auto couple, Trace mode = max hold. Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- f. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where  $BWCF = 10\log(3\text{kHz}/100\text{ kHz}) = -15.2\text{dB}$ .

### B.FHSS

#### 20 dB Bandwidth:

- a. Place the EUT on the table and set it in the transmitting mode.
- b. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- c. Set the spectrum analyzer as RBW = 30 kHz, VBW = 100 kHz, Span = 2 MHz, Sweep = 100ms.
- d. Mark the peak frequency and  $-20\text{dB}$  (upper and lower) frequency.
- e. Repeat until all the rest channels are investigated.

##### Peak Power:

The transmitter output is connected to the test receiver. The test receiver is set to the peak power detection. The power is equal to the reading level on test receiver plus cable loss at the EUT RF output terminal.

##### 100kHz Bandwidth of Band Edges Measurement:

- a. The transmitter output was connected to the spectrum analyzer via a low loss cable.
- b. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100kHz bandwidth from band edge.
- c. The band edges was measured and recorded.

##### Peak Power Spectral Density:

- a. The transmitter output is connected to a test receiver, The spectrum analyzer's resolution bandwidth was set at 3kHz RBW and 30kHz VBW as that of the fundamental frequency. Set the sweep time=100s.
- b. The power spectral density was measured and recorded.
- c. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

**Frequency Separation:**

- a. Place the EUT on the table and set it in the transmitting mode.
- b. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- c. Set the spectrum analyzer as RBW = 100 kHz, VBW = 100 kHz, Span = 2 MHz, Sweep = 100ms.
- d. Set center frequency spectrum analyzer = middle of hopping channel.

**Number of Hopping Frequency:**

- a. Place the EUT on the table and set it in the transmitting mode.
- b. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- c. Set spectrum analyzer Start=2400MHz, Stop=2483.5MHz, RBW = 100 kHz, VBW = 300 kHz, Sweep=100ms
- d. Max hold, view and count how many channel in the band.

**Time of Occupancy (Dwell Time):**

- a. Place the EUT on the table and set it in the transmitting mode.
- b. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- c. Set center frequency of spectrum analyzer = operating frequency, RBW = 100 kHz, VBW = 300 kHz, Sweep=2ms
- d. Repeat above procedures until all frequency measured were complete.

## 5. 3 Test Setup



## 5. 4 Configuration of the EUT

Same as section 4.4 of this report

## 5. 5 EUT Operating Condition

Same as section 4.5 of this report.

## 5. 6 Limit

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 ~ 928 MHz, 2400 ~ 2483.5 MHz, and 5725 ~ 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.

According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

**20 dB Bandwidth:** For frequency hopping systems operating in the 2400MHz~2483.5MHz no limit for 20dB bandwidth

**Peak Power:** For frequency hopping systems operating in the 2400~2483.5MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725~5850MHz band: 1Watt. For all other frequency hopping systems in the 2400~2483.5MHz band: 0.125Watts.

**100kHz Bandwidth of Band Edges Measurement:** According to §15.247(c), in any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.3209(a).

**Peak Power Spectral Density:** According to §15.247(d), for direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission

**Frequency Separation:** According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

**Number of Hopping Frequency:** According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400~2483.5MHz bands shall use at least 15 hopping frequencies.

**Time of Occupancy (Dwell Time):** According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400~2483.5MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

## 7 Test Result

### A. 6 dB Bandwidth

Product	: Tablet PC	Test Mode	: IEEE 802.11b/g/Draft n
Test Item	: 6 dB BW	Temperature	: 25 °C
Test Voltage	: DC 5V	Humidity	: 56%RH
Test Result	: <b>PASS</b>		

#### IEEE 802.11b

Channel	Frequency (MHz)	Bandwidth (MHz)	FCC Limit (kHz)	Result
Low	2412	7.32	>500 kHz	<b>PASS</b>
Mid	2437	7.40		<b>PASS</b>
High	2462	7.20		<b>PASS</b>

#### IEEE 802.11g


Channel	Frequency (MHz)	Bandwidth (MHz)	FCC Limit (kHz)	Result
Low	2412	15.64	>500 kHz	<b>PASS</b>
Mid	2437	15.96		<b>PASS</b>
High	2462	15.72		<b>PASS</b>

#### Draft n MCS0 20MHz Ant.0


Channel	Frequency (MHz)	Bandwidth (MHz)	FCC Limit (kHz)	Result
Low	2412	17.00	>500 kHz	<b>PASS</b>
Mid	2437	17.12		<b>PASS</b>
High	2462	17.00		<b>PASS</b>

#### IEEE 802.11b


##### 6dB Bandwidth (CH Low)

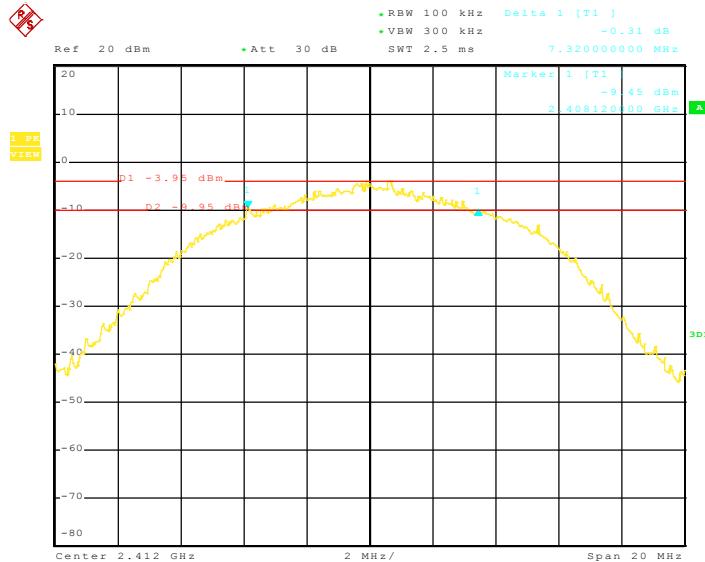

Date: 3.NOV.2012 15:30:57

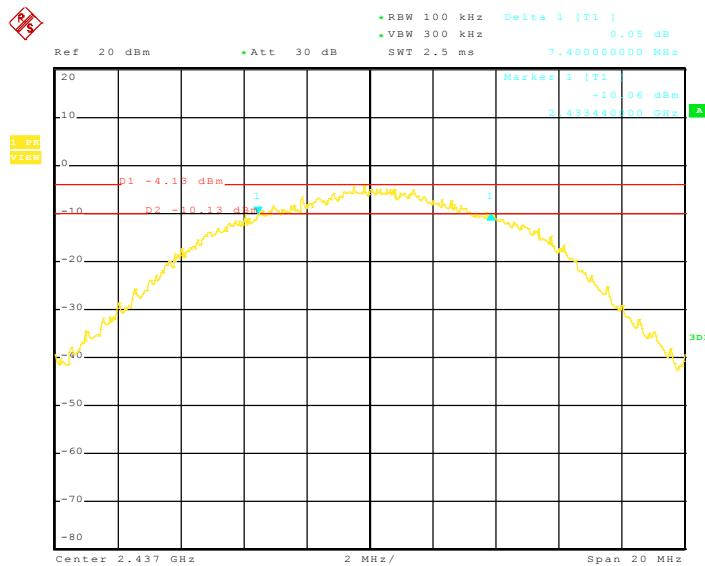**6dB Bandwidth (CH Mid)**


Date: 3.NOV.2012 15:36:00

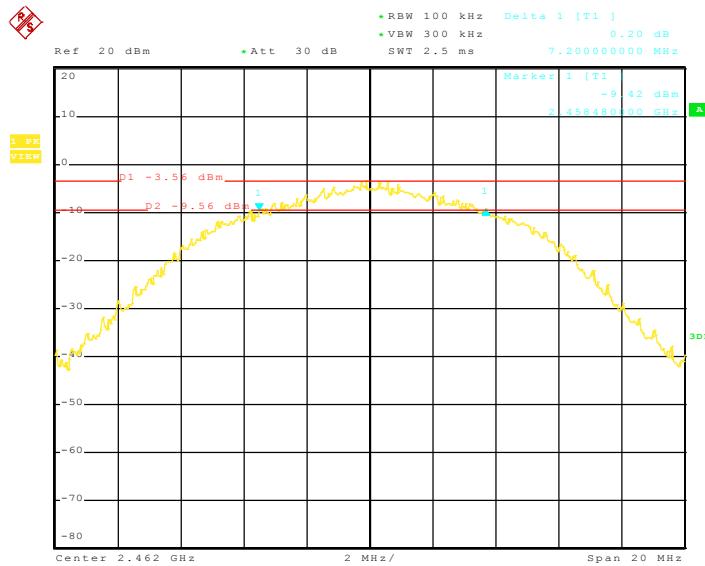**6dB Bandwidth (CH High)**

Date: 3.NOV.2012 15:37:13


## IEEE 802.11g

## 6dB Bandwidth (CH Low)

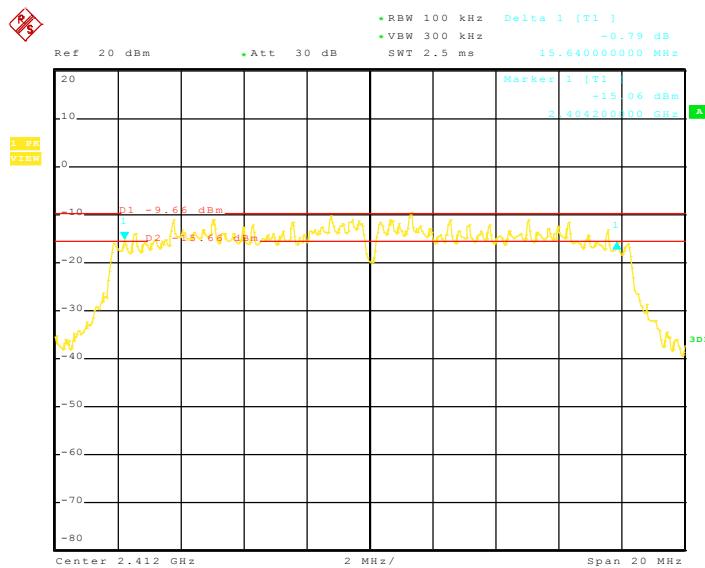


Date: 3.NOV.2012 15:39:51


## 6dB Bandwidth (CH Mid)

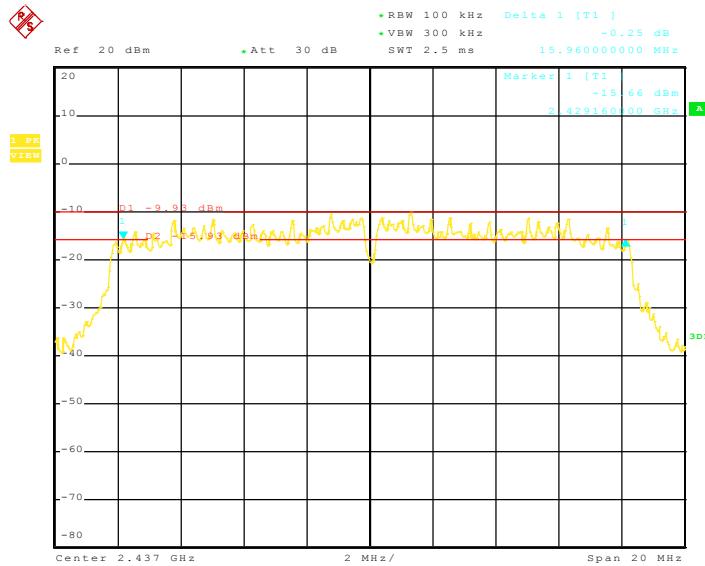


Date: 3.NOV.2012 15:41:48

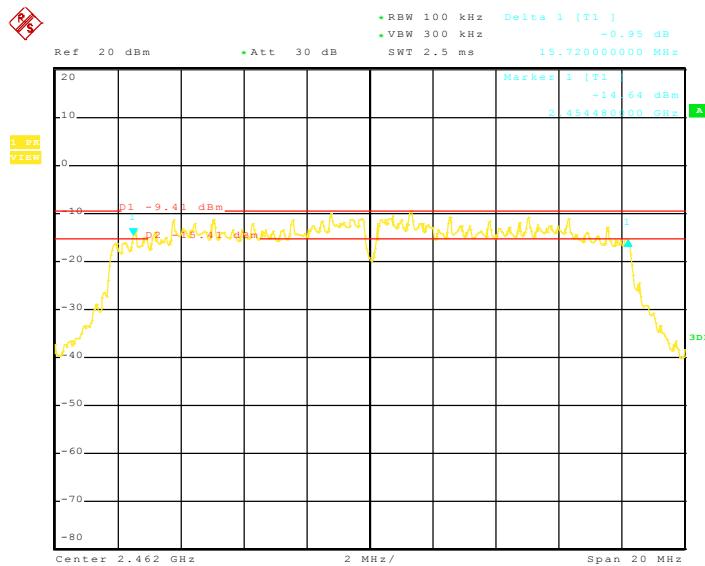**6dB Bandwidth (CH High)**


Date: 3.NOV.2012 15:59:26

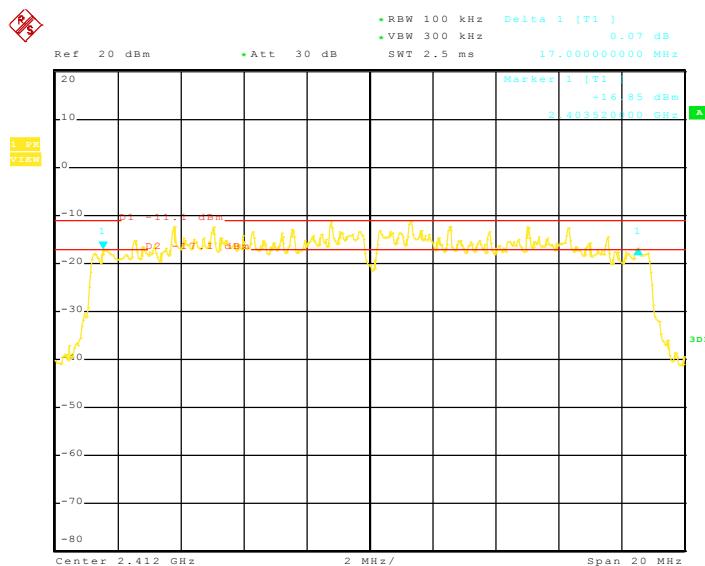**Draft n MCS0 20MHz Ant.0****6dB Bandwidth (CH Low)**

Date: 3.NOV.2012 16:00:55

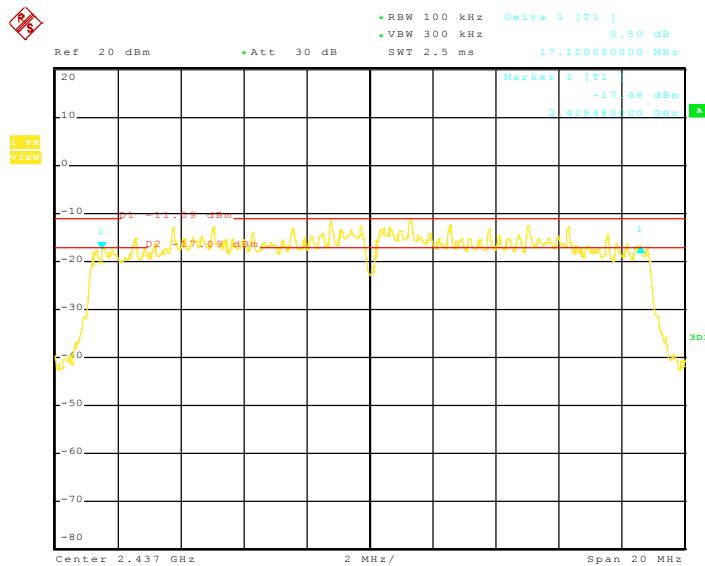**6dB Bandwidth (CH Mid)**

Date: 3.NOV.2012 16:02:53

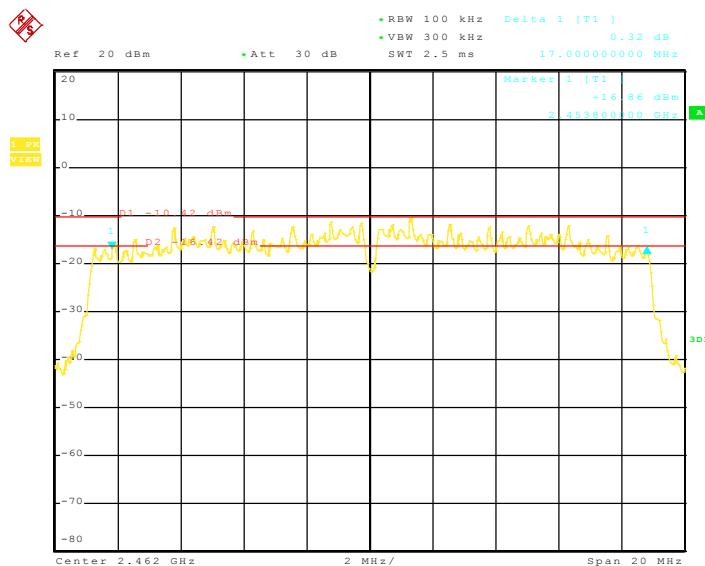
**6dB Bandwidth (CH High)**

Date: 3.NOV.2012 16:04:26

## 20 dB Bandwidth


Product	: Tablet PC	Test Mode	: CH Low ~ CH High (FHSS)
Test Item	: 20 dB BW	Temperature	: 25 °C
Test Voltage	: DC 5V	Humidity	: 56%RH
Test Result	: PASS		

Channel	Channel Frequency	20 dB Down BW (kHz)
Low	2402	1016
Mid	2441	1020
High	2480	1024

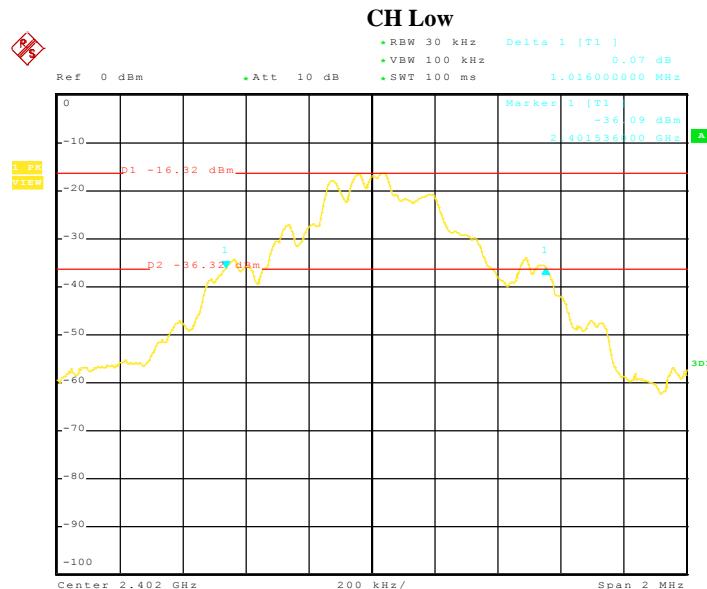


Date: 12.NOV.2012 11:05:22

## CH Mid

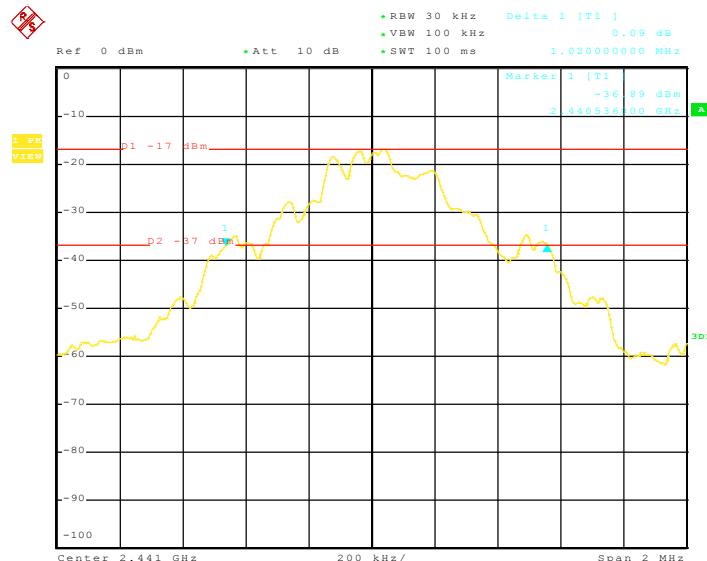

Date: 12.NOV.2012 11:04:15

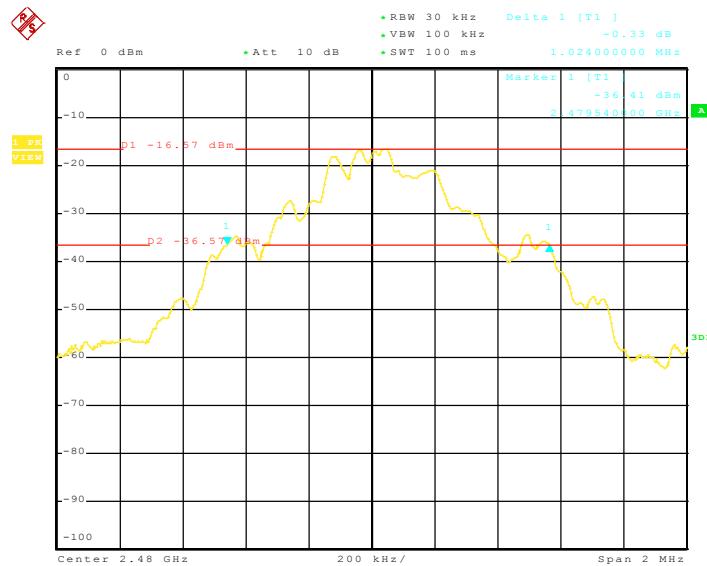**CH High**

Date: 12.NOV.2012 11:02:16

**B. Peak Power**

Product	: Tablet PC	Test Mode	: IEEE 802.11b/g/Draft n
Test Item	: Peak Power	Temperature	: 25 °C
Test Voltage	: DC 5V	Humidity	: 56%RH
Test Result	: PASS		

**IEEE 802.11b**

Channel	Frequency (MHz)	Output Power (dBm)	FCC Limit (W/dBm)	Result
Low	2412	10.15	1.00/30.00	PASS
Mid	2437	10.53		PASS
High	2462	10.15		PASS

**IEEE 802.11g**

Channel	Frequency (MHz)	Output Power (dBm)	FCC Limit (W/dBm)	Result
Low	2412	6.80	1.00/30.00	PASS
Mid	2437	7.65		PASS
High	2462	7.24		PASS

**Draft n MCS0 20MHz Ant.0**

Channel	Frequency (MHz)	Output Power (dBm)	FCC Limit (W/dBm)	Result
Low	2412	5.44	1.00/30.00	PASS
Mid	2437	6.42		PASS
High	2462	6.30		PASS

Product	: Table PC	Test Mode	: CH Low ~ CH High - FHSS
Test Item	: Peak Power	Temperature	: 25 °C
Test Voltage	: DC5V	Humidity	: 56%RH
Test Result	: PASS		

Channel	Frequency (MHz)	Output Power (dBm)	FCC Limit (W/dBm)	Result
Low	2402	-21.44	1.00/30.00	PASS
Mid	2441	-21.35		PASS
High	2480	-21.58		PASS

### C. Band Edges Measurement

Product	: Tablet PC		Test Mode	: IEEE 802.11b/g/n	
Test Item	: Band Edges Measurement		Temperature	: 25 °C	
Test Voltage	: DC 5V		Humidity	: 56%RH	
Test Result	: PASS				

IEEE 802.11b-low

Freq. (MHz)	Emission (dBuV/m)		HORIZ / VERT	Limits (dBuV/m)		Margin (dB)	
	Peak	Average		Peak	Average		
2350.040	56.65	46.81	HORIZ	74	54	-17.35	-7.19
2384.280	58.88	47.39	VERT	74	54	-15.12	-6.61
2390.460	57.49	48.15	HORIZ	74	54	-16.51	-5.85
2390.640	57.04	48.17	VERT	74	54	-16.96	-5.83

IEEE 802.11b-High

Freq. (MHz)	Emission (dBuV/m)		HORIZ / VERT	Limits (dBuV/m)		Margin (dB)	
	Peak	Average		Peak	Average		
2483.540	60.43	50.60	HORIZ	74	54	-13.57	-3.40
2484.460	60.73	51.41	VERT	74	54	-13.27	-2.59
2485.520	60.46	50.83	HORIZ	74	54	-13.54	-3.17
2486.640	60.29	49.94	VERT	74	54	-13.71	-4.06

IEEE 802.11g-Low

Freq. (MHz)	Emission (dBuV/m)		HORIZ / VERT	Limits (dBuV/m)		Margin (dB)	
	Peak	Average		Peak	Average		
2352.140	56.85	46.91	HORIZ	74	54	-17.15	-7.09
2385.260	59.06	48.63	VERT	74	54	-14.94	-5.37
2390.780	64.22	51.43	HORIZ	74	54	-9.78	-2.57
2390.840	64.22	51.43	VERT	74	54	-9.78	-2.57

IEEE 802.11g-High

Freq. (MHz)	Emission (dBuV/m)		HORIZ / VERT	Limits (dBuV/m)		Margin (dB)	
	Peak	Average		Peak	Average		
2483.640	61.93	51.95	HORIZ	74	54	-12.07	-2.05
2483.720	61.93	51.95	VERT	74	54	-12.07	-2.05
2485.420	60.54	49.88	HORIZ	74	54	-13.46	-4.12
2486.560	58.73	49.39	VERT	74	54	-15.27	-4.61


IEEE 802.11n MCS0 20MHz Ant.0-Low

Freq. (MHz)	Emission (dBuV/m)		HORIZ / VERT	Limits (dBuV/m)		Margin (dB)	
	Peak	Average		Peak	Average		
2351.040	55.70	46.73	HORIZ	74	54	-18.30	-7.27
2385.260	57.72	48.30	VERT	74	54	-16.28	-5.70
2390.540	60.92	49.51	HORIZ	74	54	-13.08	-4.49
2390.720	63.21	50.57	VERT	74	54	-10.79	-3.43

IEEE 802.11n MCS0 20MHz Ant.0-High


Freq. (MHz)	Emission (dBuV/m)		HORIZ / VERT	Limits (dBuV/m)		Margin (dB)	
	Peak	Average		Peak	Average		
2484.840	62.21	50.53	HORIZ	74	54	-11.79	-3.47
2485.144	61.27	50.60	VERT	74	54	-12.73	-3.40
2485.420	61.47	49.71	HORIZ	74	54	-12.53	-4.29
2487.140	59.53	49.06	VERT	74	54	-14.47	-4.94

## IEEE 802.11b Channel: Low

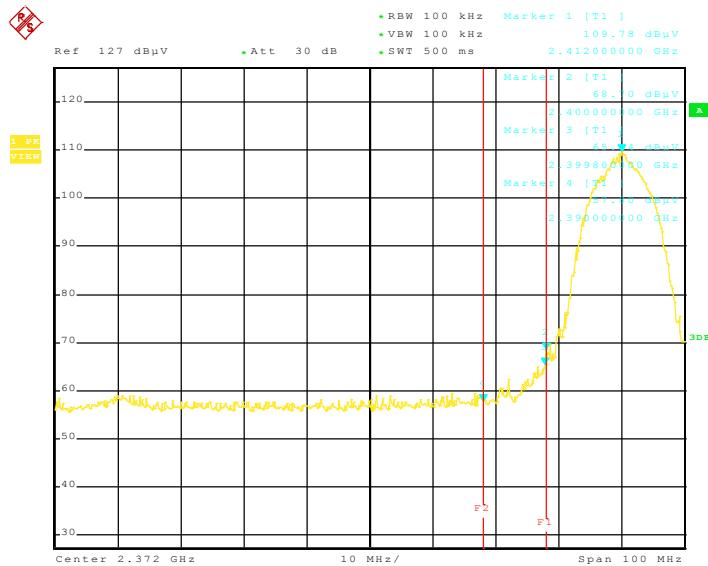


Date: 24.OCT.2012 09:50:47

## IEEE 802.11b Channel: High

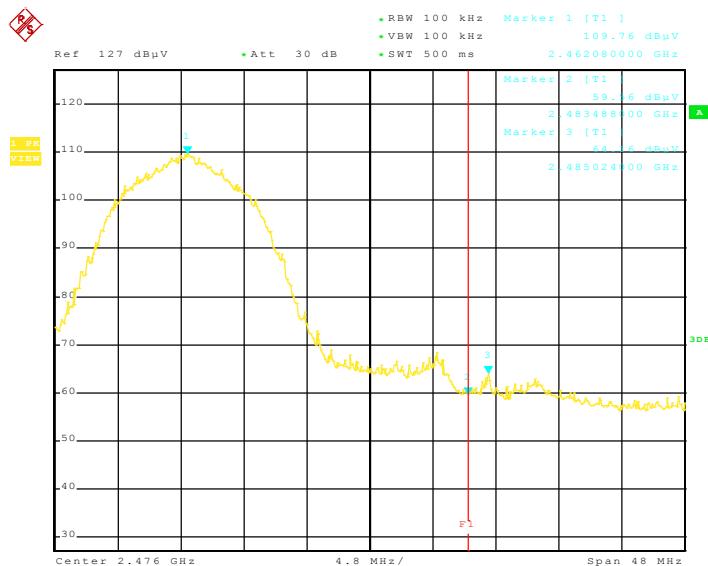


Date: 24.OCT.2012 10:13:16

## IEEE 802.11g Channel: Low

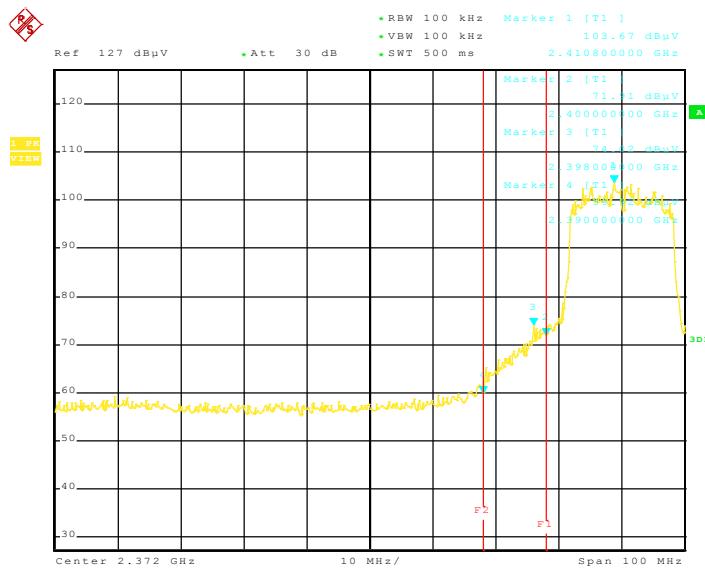


Date: 24.OCT.2012 10:20:06

## IEEE 802.11g Channel: High

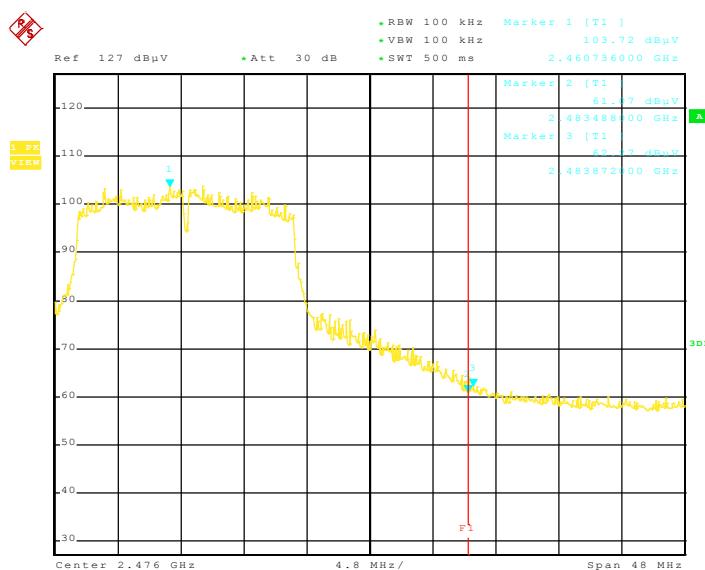


Date: 24.OCT.2012 10:45:05

**IEEE 802.11n MCS0 20MHz Ant.0**  
**Channel: Low**

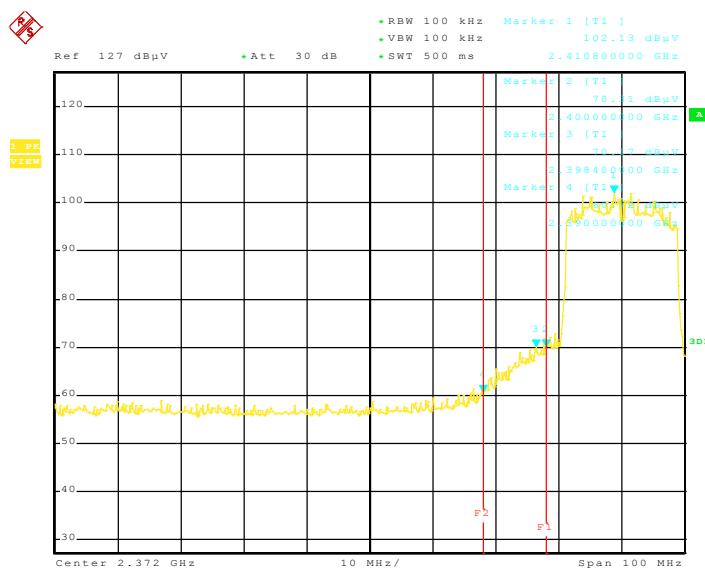

Date: 24.OCT.2012 11:01:34

**IEEE 802.11n MCS0 20MHz Ant.0**  
**Channel: High**

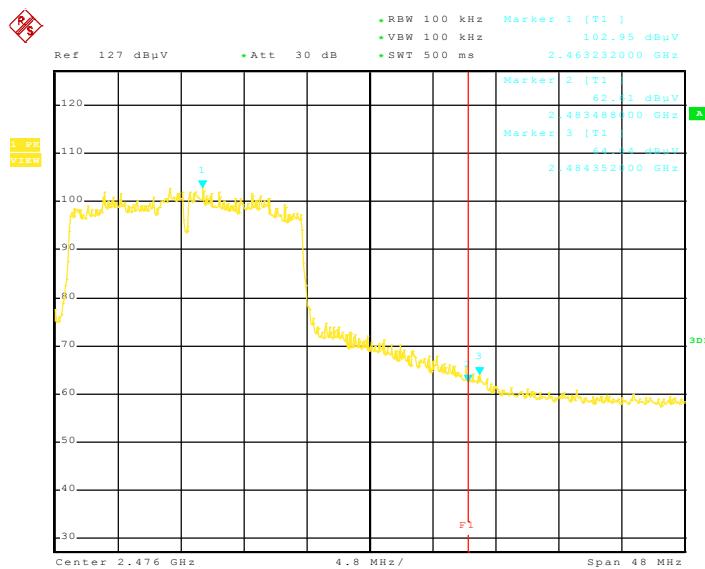

Date: 24.OCT.2012 11:14:42

## 100kHz Band Edges Measurement

Product	: Table PC	Test Mode	: CH Low ~ CH High - FHSS
Test Item	: Band Edges Measurement	Temperature	: 25 °C
Test Voltage	: DC 5V	Humidity	: 56%RH
Test Result	: <b>PASS</b>		

Channel	Detector	Radiated Method Max. Field Strength of Fundamental (dBuV/m)	Conducted Method Between Carrier Max. Power and Local Max. Emission in Restrict Band(dBc)	The Max. Field Strength in Restrict Band (dBuV/m)	Limit @3m (dBuVm) Peak / Average	Margin (dB)
Low	Peak	80.42	55.69	24.73	74	49.27
High	Peak	80.10	54.47	25.63	74	48.37


**Note:** (1) According to step 2 of Marker-Delta Method DA 00-705 (following plots included).

(2) According to step 3 of Marker-Delta Method:


The Max. Field Strength in Restrict Band = Filed Strength of Fundamental – Between Carrier Max Power and Local Max. Emission in Restrict Band

(3) The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

### Channel: Low

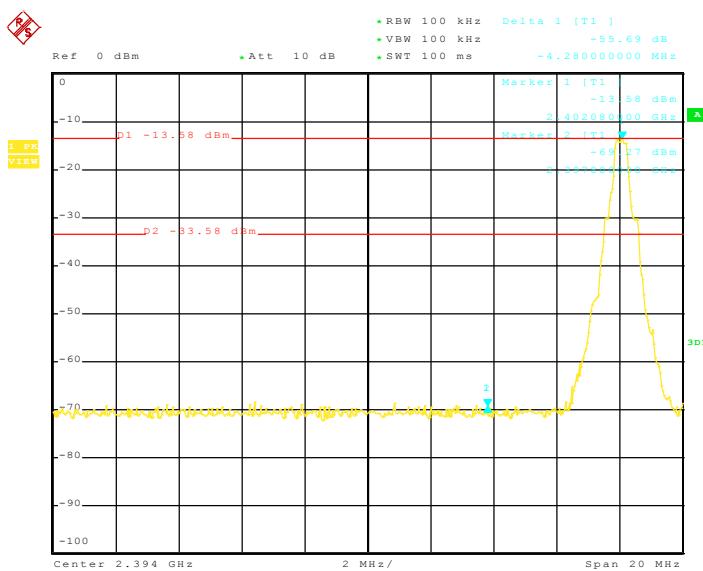

Date: 12.NOV.2012 10:51:57

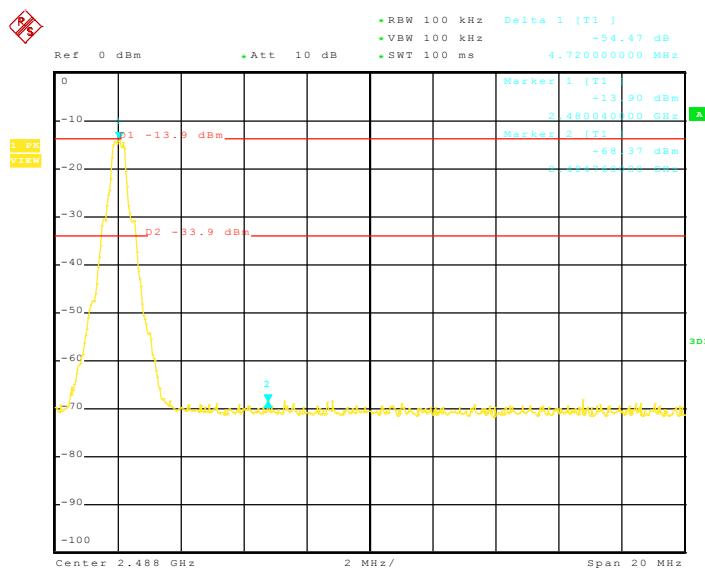**Channel: High**

Date: 12.NOV.2012 10:45:58

## D. Peak Power Spectral Density

Product	: Tablet PC	Test Mode	: IEEE 802.11b/g/Draft n
Test Item	: Peak Power Spectral Density	Temperature	: 25 °C
Test Voltage	: DC 5V	Humidity	: 56%RH
Test Result	: PASS		

### IEEE 802.11b

Channel	Frequency (MHz)	100kHz PPSD (dBm)	BWCF Factor 100kHz to 3kHz	FCC Limit (dBm)	Result
Low	2412	-3.90	-15.23	8.00	PASS
Mid	2437	-3.85	-15.23		PASS
High	2462	-2.98	-15.23		PASS


### IEEE 802.11g

Channel	Frequency (MHz)	100kHz PPSD (dBm)	BWCF Factor 100kHz to 3kHz	FCC Limit (dBm)	Result
Low	2412	-10.74	-15.23	8.00	PASS
Mid	2437	-10.92	-15.23		PASS
High	2462	-10.39	-15.23		PASS

### Draft n MCS0 20MHz Ant.0


Channel	Frequency (MHz)	100kHz PPSD (dBm)	BWCF Factor 100kHz to 3kHz	FCC Limit (dBm)	Result
Low	2412	-12.09	-15.23	8.00	PASS
Mid	2437	-11.93	-15.23		PASS
High	2462	-11.41	-15.23		PASS

### IEEE 802.11b Channel: Low

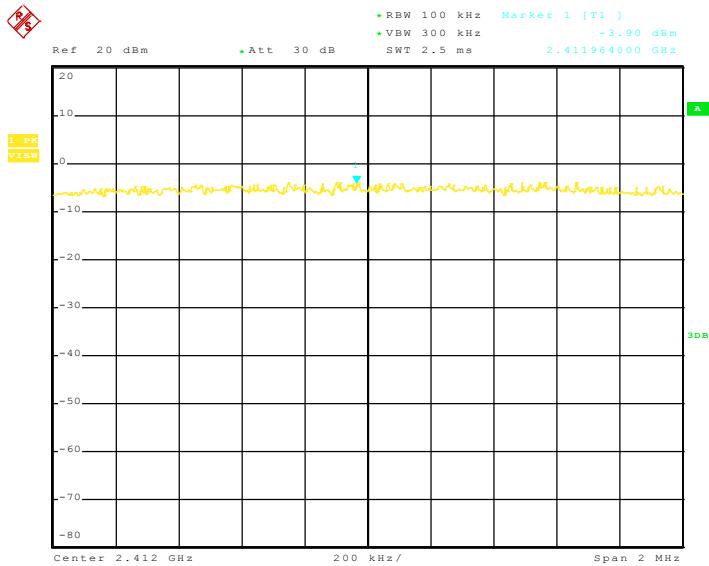


Date: 3.NOV.2012 15:33:39

## IEEE 802.11b Channel: Mid

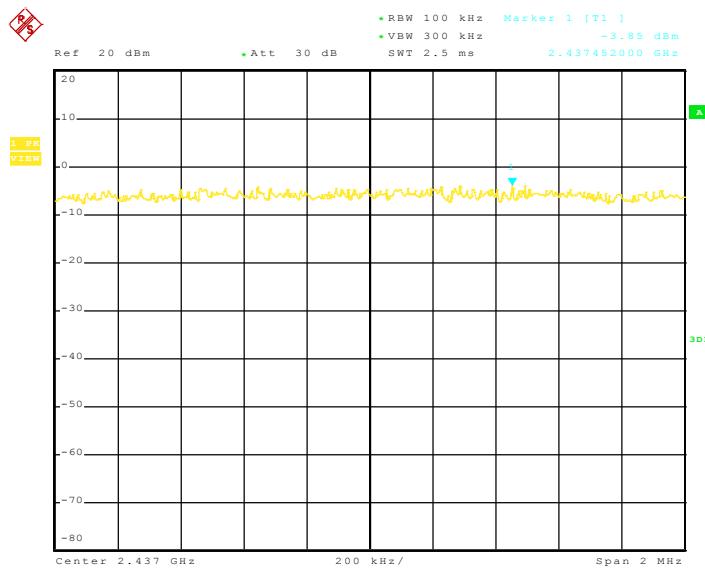


Date: 3.NOV.2012 15:34:49


## IEEE 802.11b Channel: High

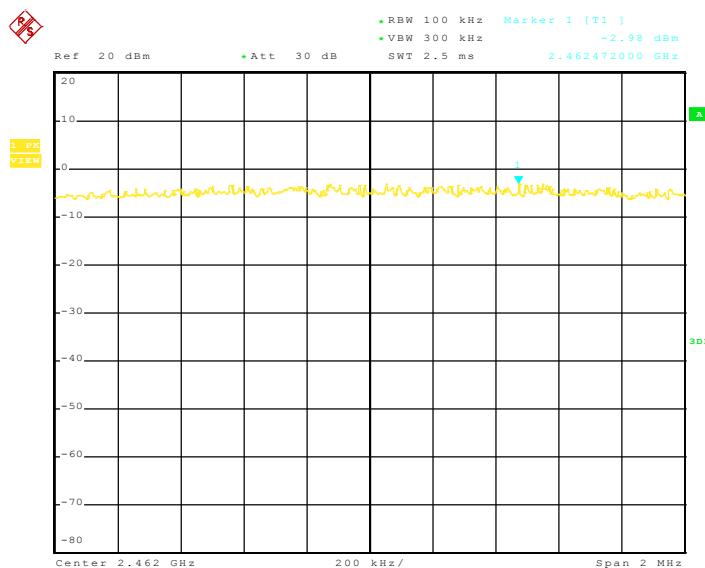

Date: 3.NOV.2012 15:37:52

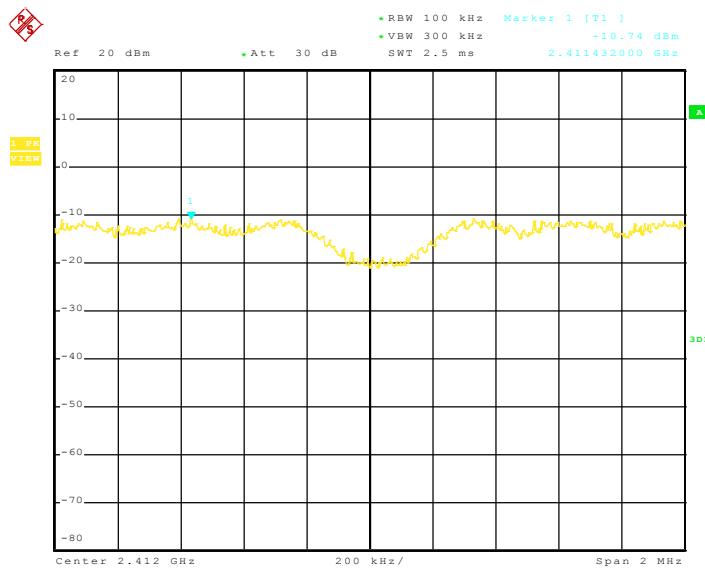
**IEEE 802.11g Channel: Low**

Date: 3.NOV.2012 15:38:31

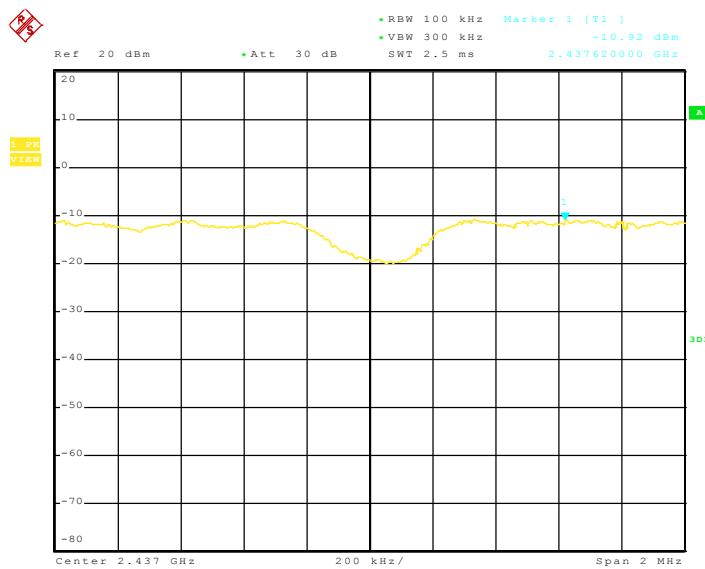
**IEEE 802.11g Channel: Mid**

Date: 3.NOV.2012 15:57:38

## IEEE 802.11g Channel: High

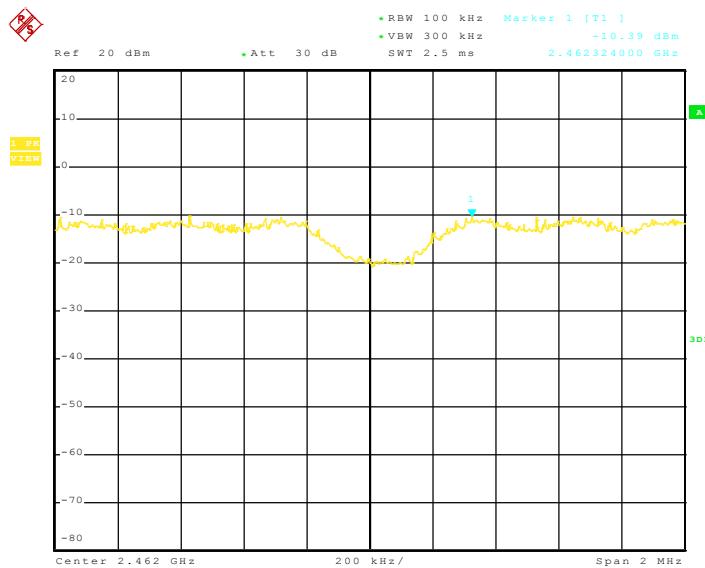


Date: 3.NOV.2012 15:58:16

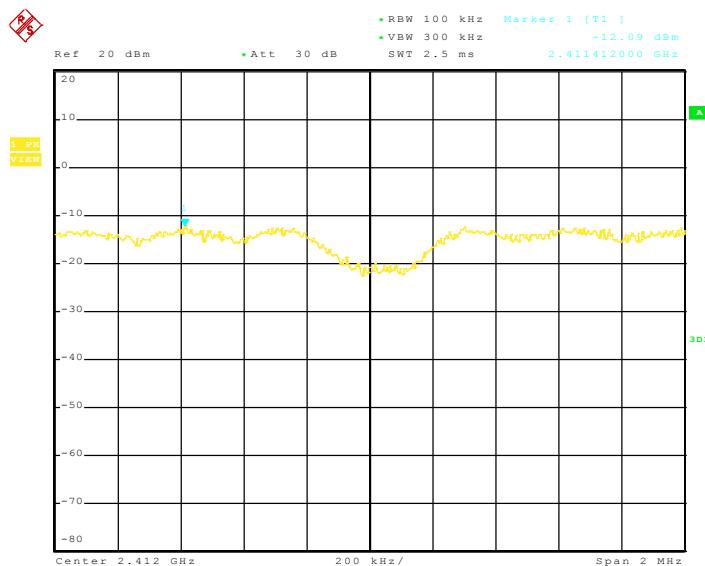Draft n MCS0 20MHz Ant.0/2412MHz  
(Channel: Low)


Date: 3.NOV.2012 16:01:23

**Draft n MCS0 20MHz Ant.0/2437MHz**  
**(Channel: Mid)**

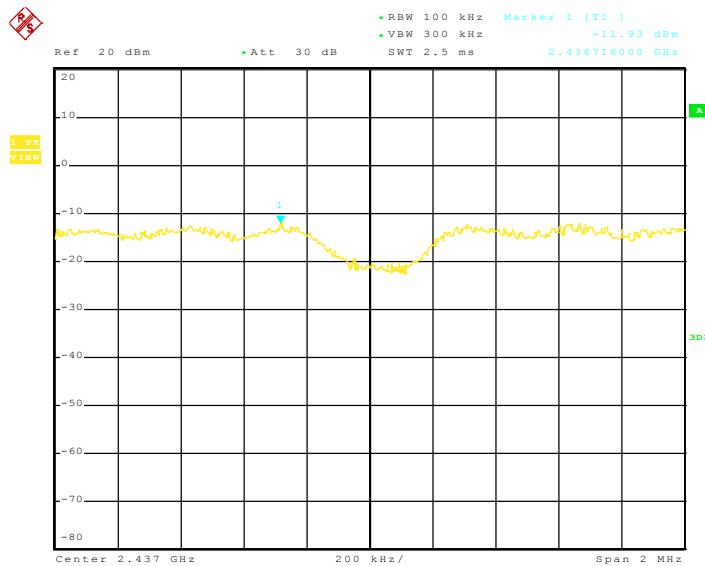

Date: 3.NOV.2012 16:02:01

**Draft n MCS0 20MHz Ant.0/2462MHz**  
**(Channel: High)**

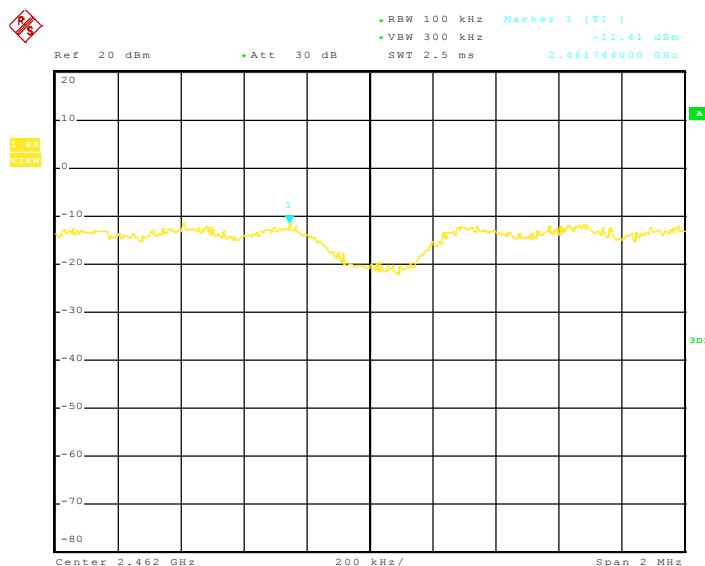


Date: 3.NOV.2012 16:04:55

## E. Frequency Separation


Product	: Table PC	Test Mode	: CH Low ~ CH High - FHSS
Test Item	: Frequency Separation	Temperature	: 25 °C
Test Voltage	: DC 5V	Humidity	: 56%RH
Test Result	: PASS		

Channel	Channel Frequency (MHz)	Separation Read Value (kHz)	Separation Limit (kHz)
Low	2402	1000	>25kHz
Mid	2441	1000	>25kHz
High	2480	1000	>25kHz


### Channel: Low

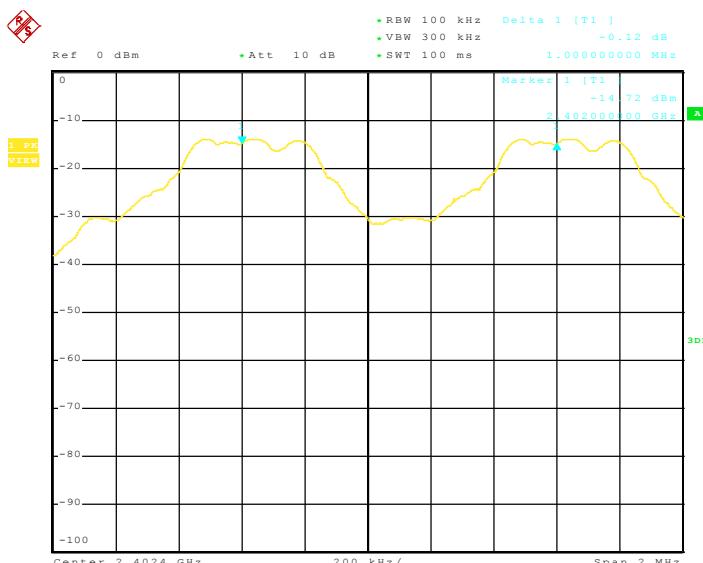

Date: 12.NOV.2012 09:43:01

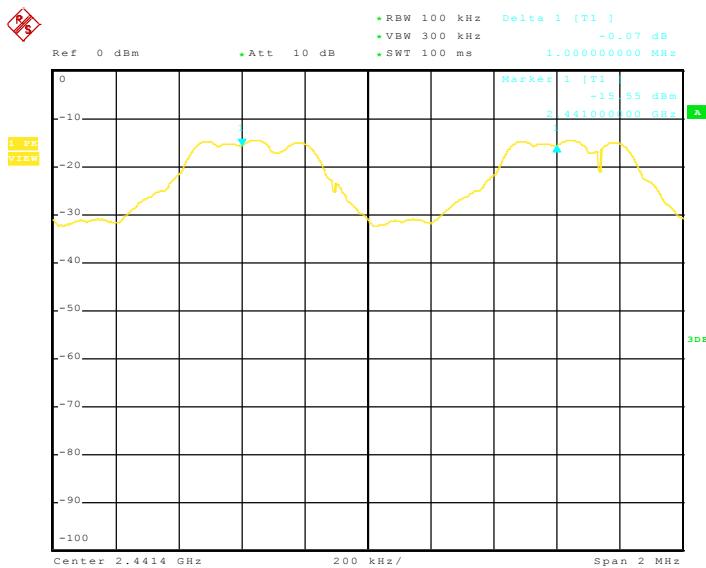**Channel: Mid**

Date: 12.NOV.2012 09:53:01

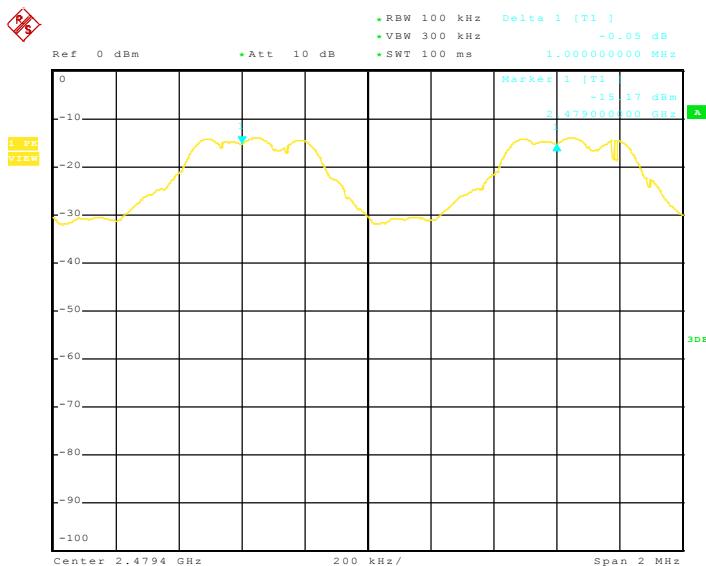**Channel: High**


Date: 12.NOV.2012 09:57:05

## F. Number of Hopping Frequency

Product	: Table PC	Test Mode	: CH Low ~ CH High - FHSS
Test Item	: Number of Hopping Frequency	Temperature	: 25 °C
Test Voltage	: DC 5V	Humidity	: 56%RH
Test Result	: PASS		


Hopping Channel Frequency Range	Quantity Hopping Channel Read Value	Quantity of Hopping Channel Limit
2402~2480	79	15

Channel: Low

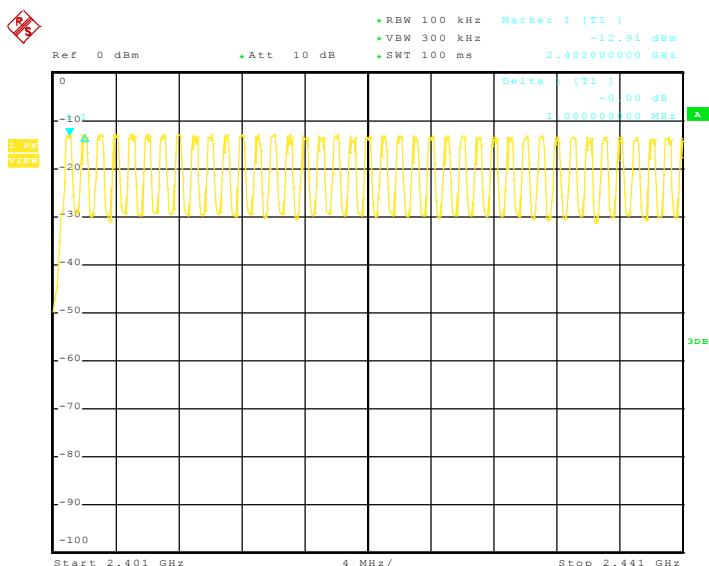

Date: 12.NOV.2012 13:28:12

Channel: High

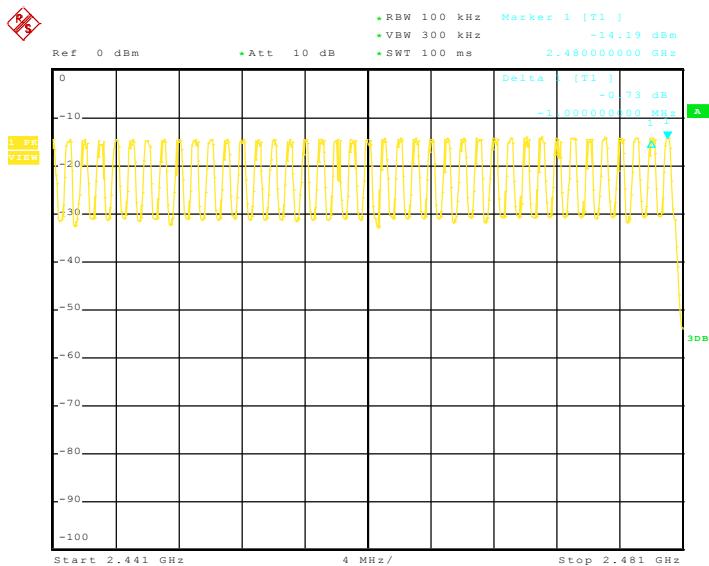

Date: 12.NOV.2012 09:06:07

## G. Time of Occupancy (Dwell Time)

Product	: Table PC	Test Mode	: CH Low~CH High - FHSS
Test Item	: Time of Occupancy	Temperature	: 25 °C
Test Voltage	: DC 5V	Humidity	: 56%RH
Test Result	: PASS		


Channel	Channel Frequency(MHz)	Dwell Time (ms)	Time of occupancy on the Tx channel in 31.6sec	Average time of occupancy Limit(ms)
DH1	2441	0.500	159.99	400
DH3	2441	1.720	275.20	400
DH5	2441	3.080	328.53	400

DH1 Dwell time = 0.500 ms x (1600/2)/79 x 31.6 = 159.99 (ms)


DH3 Dwell time = 1.720 ms x (1600/4)/79 x 31.6 = 275.20(ms)

DH5 Dwell time = 3.080 ms x (1600/6)/79 x 31.6 = 328.53(ms)


DH1

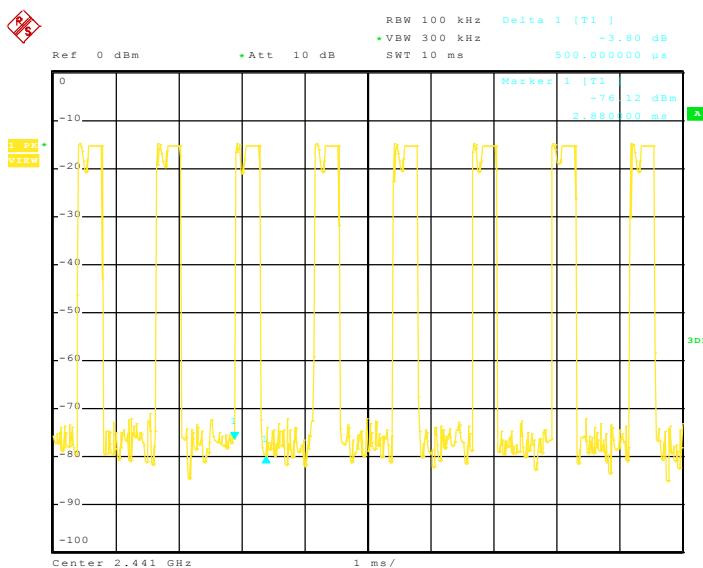

Date: 14.NOV.2012 08:47:59

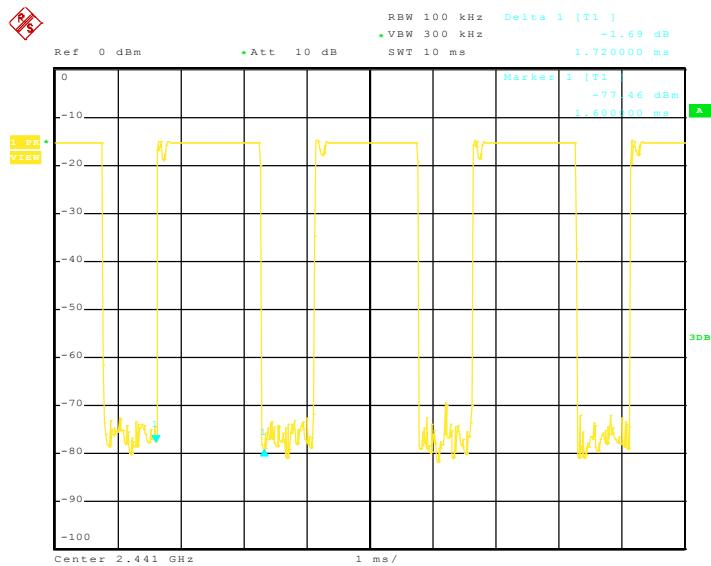**DH3**

Date: 14.NOV.2012 08:48:42

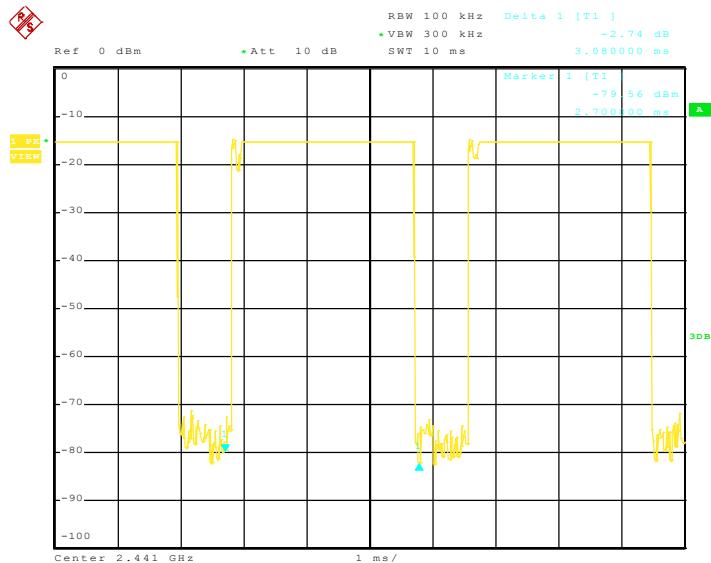**DH5**

Date: 14.NOV.2012 08:46:40

## 6. Transmitter Spurious Radiated Emission at 3 Meters

### 6. 1 Test Equipment


Please refer to Section 10 this report.

### 6. 2 Test Procedure


1. The EUT was tested according to ANSI C63.4 - 2003.
2. The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
3. The frequency spectrum from 2 kHz to 25 GHz was investigated. All readings from 2 kHz to 150 kHz are quasi-peak values with a resolution bandwidth of 200 Hz. All readings from 150 kHz to 30 MHz are quasi-peak values with a resolution bandwidth of 2 KHz. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 KHz. All readings are above 1 GHz , peak values with a resolution bandwidth of 1 MHz . Measurements were made at 3 meters.
4. The emissions from the EUT were measured continuously at every azimuth by rotating the turntable. The Receiving antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency. Emissions below 30MHz were measured with a loop antenna while emission above 30MHz were measured using a broadband E-field antenna.
5. Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 8 and 13 of ANSI C63.4 - 2003.

### 6. 3 Test Setup

#### For Frequencies below 30 MHz

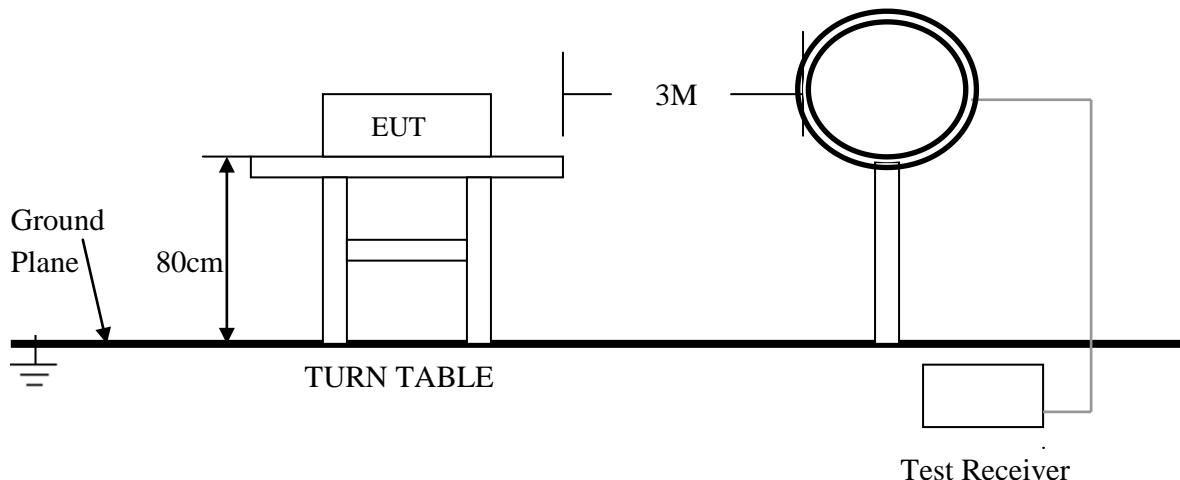

For the actual test configuration , please refer to the related items – Photos of Testing

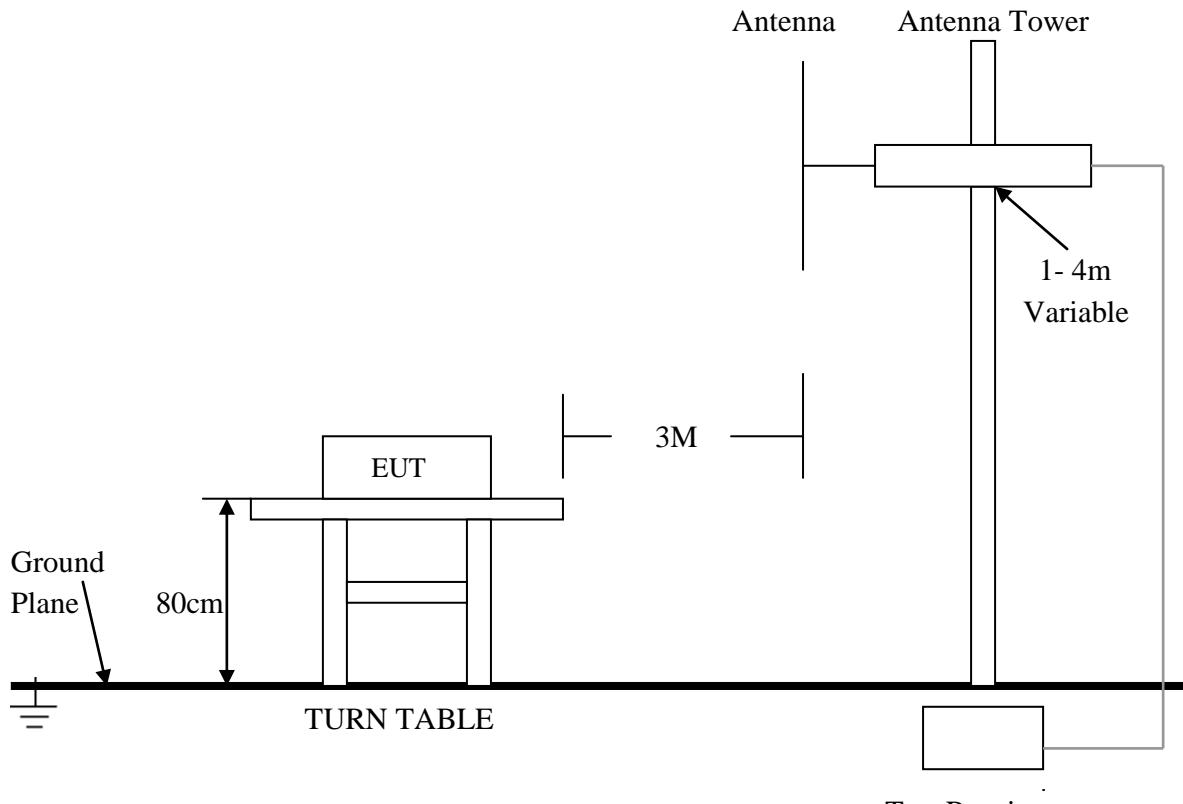**For Frequencies above 30 MHz**

For the actual test configuration , please refer to the related items – Photos of Testing

**6. 4 Configuration of the EUT**

Same as section 4.4 of this report

**6. 5 EUT Operating Condition**

Same as section 4.5 of this report.

## 6. 6 Limit

In any 100 KHz bandwidth outside the operating frequency band, the radio frequency power that is produced by modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 KHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in section 15.209(a), which lesser attenuation.

All other emissions inside restricted bands specified in section 15.205(a) shall not exceed the general radiated emission limits specified in section 15.209(a)

### Note:

Applies to harmonics/spurious emissions that fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

47 CFR § 15.237(c): The emission limits as specified above are based on measurement instrument employing an average detector. The provisions in section 15.35 for limiting peak emissions apply.

FCC CFR 47, Part 15, Subpart C, Para, 15.205(a) – Restricted Frequency Bands

MHz	MHz	MHz	GHz
0.090–0.110 .....	16.42–16.423	399.9–410	4.5–5.15
10.495–0.505 .....	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905 .....	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128 .....	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775 .....	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775 .....	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218 .....	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825 .....	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225 .....	123–138	2200–2300	14.47–14.5
8.291–8.294 .....	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366 .....	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675 .....	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475 .....	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293 .....	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025 .....	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725 .....	322–335.4	3600–4400	( <sup>2</sup> )
13.36–13.41.			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490–0.510 MHz.

<sup>2</sup> Above 38.6

FCC 47 CFR, Part 15.209(a) – Field Strength Limits within Restricted Frequency Bands

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490 .....	2400/F(kHz)	300
0.490–1.705 .....	24000/F(kHz)	30
1.705–30.0 .....	30	30
30–88 .....	100**	3
88–216 .....	150**	3
216–960 .....	200**	3
Above 960 .....	500	3

## 6. 7 Test Result

Product	: Tablet PC	Test Mode	: IEEE 802.11b/g/Draftn
Test Item	: Spurious Radiated Emissions	Temperature	: 25 °C
Test Voltage	: DC 5V	Humidity	: 56%RH
Test Result	: <b>PASS</b>		

### IEEE 802.11b Channel: Low

Freq. (MHz)	Emission (dBuV/m) Peak Detector	HORIZ / VERT	Limits (dBuV/m) Peak / Average	Margin (dB)
4824.00	51.26	HORZ	74.0 / 54.0	-22.74
4824.00	51.82	VERT	74.0 / 54.0	-22.18
7236.00	51.44	HORZ	74.0 / 54.0	-22.56
7236.08	51.87	VERT	74.0 / 54.0	-22.13
9648.02	50.99	HORZ	74.0 / 54.0	-23.01
9648.10	52.37	VERT	74.0 / 54.0	-21.63
24120.04	-	HORZ	74.0 / 54.0	-
24120.20	-	VERT	74.0 / 54.0	-

### IEEE 802.11b Channel: Mid

Freq. (MHz)	Emission (dBuV/m) Peak Detector	HORIZ / VERT	Limits (dBuV/m) Peak / Average	Margin (dB)
4874.00	50.83	HORZ	74.0 / 54.0	-23.17
4874.00	50.92	VERT	74.0 / 54.0	-23.08
7311.00	50.12	HORZ	74.0 / 54.0	-23.88
7311.02	50.87	VERT	74.0 / 54.0	-23.13
9748.10	50.15	HORZ	74.0 / 54.0	-23.85
9748.00	50.89	VERT	74.0 / 54.0	-23.11
24370.10	-	HORZ	74.0 / 54.0	-
24370.00	-	VERT	74.0 / 54.0	-

### IEEE 802.11b Channel: High

Freq. (MHz)	Emission (dBuV/m) Peak Detector	HORIZ / VERT	Limits (dBuV/m) Peak / Average	Margin (dB)
4924.00	50.22	HORZ	74.0 / 54.0	-23.78
4924.00	51.68	VERT	74.0 / 54.0	-22.32
7386.12	50.74	HORZ	74.0 / 54.0	-23.26
7368.00	50.48	VERT	74.0 / 54.0	-23.52
9848.00	49.19	HORZ	74.0 / 54.0	-24.81
9848.00	51.88	VERT	74.0 / 54.0	-22.12
24620.11	-	HORZ	74.0 / 54.0	-
24620.00	-	VERT	74.0 / 54.0	-

**Note:**

- (1) All Reading Levels below 1GHz are Quasi-Peak, above are peak and average value.
- (2) Emission Level = Reading Level + Probe Factor + Cable Loss.
- (3) Receiver setting (Peak Detector) : RBW=1MHz; VBW=1MHz; Span=100MHz
- (4) Receiver setting (AVG Detector): RBW=1MHz; VBW=30Hz; Span=20MHz
- (5) The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
- (6) Where an emission level is indicated by a -, levels had a margin greater than 20 dB when compared to the limit.

**IEEE 802.11g Channel: Low**

Freq. (MHz)	Emission (dBuV/m) Peak	HORIZ / VERT	Limits (dBuV/m) Peak / Average	Margin (dB)
4824.00	51.54	HORZ	74.0 / 54.0	-22.46
4824.00	51.22	VERT	74.0 / 54.0	-22.78
7236.00	50.36	HORZ	74.0 / 54.0	-23.64
7236.08	51.79	VERT	74.0 / 54.0	-22.21
9648.02	50.18	HORZ	74.0 / 54.0	-23.82
9648.10	51.87	VERT	74.0 / 54.0	-22.13
24120.04	-	HORZ	74.0 / 54.0	-
24120.20	-	VERT	74.0 / 54.0	-

**IEEE 802.11g Channel: Mid**

Freq. (MHz)	Emission (dBuV/m) Peak	HORIZ / VERT	Limits (dBuV/m) Peak / Average	Margin (dB)
4874.00	51.75	HORZ	74.0 / 54.0	-22.25
4874.00	50.94	VERT	74.0 / 54.0	-23.06
7311.00	49.87	HORZ	74.0 / 54.0	-24.13
7311.02	50.76	VERT	74.0 / 54.0	-23.24
9748.10	50.14	HORZ	74.0 / 54.0	-23.86
9748.00	51.86	VERT	74.0 / 54.0	-22.14
24370.10	-	HORZ	74.0 / 54.0	-
24370.00	-	VERT	74.0 / 54.0	-

**IEEE 802.11g Channel: High**

Freq. (MHz)	Emission (dBuV/m) Peak	HORIZ / VERT	Limits (dBuV/m) Peak / Average	Margin (dB)
4924.00	50.26	HORZ	74.0 / 54.0	-23.74
4924.00	51.44	VERT	74.0 / 54.0	-22.56
7386.12	50.35	HORZ	74.0 / 54.0	-23.65
7368.00	51.85	VERT	74.0 / 54.0	-22.15
9848.00	50.11	HORZ	74.0 / 54.0	-23.89
9848.00	51.25	VERT	74.0 / 54.0	-22.75
24620.11	-	HORZ	74.0 / 54.0	-
24620.00	-	VERT	74.0 / 54.0	-

**Note:**

- (1) All Reading Levels below 1GHz are Quasi-Peak, above are peak and average value.
- (2) Emission Level = Reading Level + Probe Factor + Cable Loss.
- (3) Receiver setting (Peak Detector) : RBW=1MHz; VBW=1MHz; Span=100MHz
- (4) Receiver setting (AVG Detector): RBW=1MHz; VBW=30Hz; Span=20MHz
- (5) The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
- (6) Where an emission level is indicated by a -, levels had a margin greater than 20 dB when compared to the limit.

**Draft n MCS0 20MHz Ant.0 Channel: Low**

Freq. (MHz)	Emission (dBuV/m) Peak /Av	HORIZ / VERT	Limits (dBuV/m) Peak / Average	Margin (dB)
4824.00	49.74	HORZ	74.0 / 54.0	-24.26
4824.00	48.45	VERT	74.0 / 54.0	-25.55
7236.00	49.77	HORZ	74.0 / 54.0	-24.23
7236.08	48.25	VERT	74.0 / 54.0	-25.75
9648.02	49.83	HORZ	74.0 / 54.0	-24.17
9648.10	49.16	VERT	74.0 / 54.0	-24.84
24120.04	-	HORZ	74.0 / 54.0	-
24120.20	-	VERT	74.0 / 54.0	-

**Draft n MCS0 20MHz Ant.0 Channel: Mid**

Freq. (MHz)	Emission (dBuV/m) Peak	HORIZ / VERT	Limits (dBuV/m) Peak / Average	Margin (dB)
4874.00	49.26	HORZ	74.0 / 54.0	-24.74
4874.00	49.65	VERT	74.0 / 54.0	-24.35
7311.00	48.24	HORZ	74.0 / 54.0	-25.76
7311.02	49.78	VERT	74.0 / 54.0	-24.22
9748.10	48.22	HORZ	74.0 / 54.0	-25.78
9748.00	50.22	VERT	74.0 / 54.0	-23.78
24370.10	-	HORZ	74.0 / 54.0	-
24370.00	-	VERT	74.0 / 54.0	-

**Draft n MCS0 20MHz Ant.0 Channel: High**

Freq. (MHz)	Emission (dBuV/m) Peak /Av	HORIZ / VERT	Limits (dBuV/m) Peak / Average	Margin (dB)
4924.00	48.53	HORZ	74.0 / 54.0	-25.47
4924.00	49.81	VERT	74.0 / 54.0	-24.19
7386.12	48.67	HORZ	74.0 / 54.0	-25.33
7368.00	49.81	VERT	74.0 / 54.0	-24.19
9848.00	48.52	HORZ	74.0 / 54.0	-25.48
9848.00	50.32	VERT	74.0 / 54.0	-23.68
24620.11	-	HORZ	74.0 / 54.0	-
24620.00	-	VERT	74.0 / 54.0	-

**Note:**

- (1) All Reading Levels below 1GHz are Quasi-Peak, above are peak and average value.
- (2) Emission Level = Reading Level + Probe Factor + Cable Loss.
- (3) Receiver setting (Peak Detector) : RBW=1MHz; VBW=1MHz; Span=100MHz
- (4) Receiver setting (AVG Detector): RBW=1MHz; VBW=30Hz; Span=20MHz
- (5) The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
- (6) Where an emission level is indicated by a -, levels had a margin greater than 20 dB when compared to the limit.

Product	: Table PC	Test Mode	: CH Low ~ CH High - FHSS
Test Item	: Spurious Radiated Emissions	Temperature	: 25 °C
Test Voltage	: DC 5V	Humidity	: 56%RH
Test Result	: PASS		

**CH Low**

Freq. (MHz)	Emission (dBuV/m) Peak Detector	HORIZ / VERT	Limits (dBuV/m) Peak / Average	Margin (dB)
4804.00	48.72	HORZ	74.0 / 54.0	-25.28
4804.00	46.57	VERT	74.0 / 54.0	-27.43
7206.00	48.03	HORZ	74.0 / 54.0	-25.97
7206.00	46.12	VERT	74.0 / 54.0	-27.88
24020.00		HORZ	74.0 / 54.0	
24020.00		VERT	74.0 / 54.0	

**CH Middle**

Freq. (MHz)	Emission (dBuV/m) Peak Detector	HORIZ / VERT	Limits (dBuV/m) Peak / Average	Margin (dB)
4882.00	48.21	HORZ	74.0 / 54.0	-25.79
4882.00	46.06	VERT	74.0 / 54.0	-27.94
7323.00	48.53	HORZ	74.0 / 54.0	-25.47
7323.00	46.19	VERT	74.0 / 54.0	-27.81
24410.00		HORZ	74.0 / 54.0	
24410.00		VERT	74.0 / 54.0	

**CH High**

Freq. (MHz)	Emission (dBuV/m) Peak Detector	HORIZ / VERT	Limits (dBuV/m) Peak / Average	Margin (dB)
4960.00	48.24	HORZ	74.0 / 54.0	-25.76
4960.00	46.76	VERT	74.0 / 54.0	-27.24
7440.00	48.15	HORZ	74.0 / 54.0	-25.85
7440.00	46.53	VERT	74.0 / 54.0	-27.47
24800.00		HORZ	74.0 / 54.0	
24800.00		VERT	74.0 / 54.0	

**Note:**

- (1) All Reading Levels below 1GHz are Quasi-Peak, above are peak and average value.
- (2) Emission Level = Reading Level + Probe Factor + Cable Loss.
- (3) Receiver setting (Peak Detector) : RBW=1MHz; VBW=1MHz; Span=100MHz
- (4) Receiver setting (AVG Detector): RBW=1MHz; VBW=30Hz; Span=20MHz
- (5) The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
- (6) Where an emission level is indicated by a -, levels had a margin greater than 20 dB when compared to the limit.

**General Radiated Emission Data**

Product	: Tablet PC	Test Mode	: Normal Link (802.11b.g/n)
Test Item	: Fundamental Radiated Emission Data	Temperature	: 25 °C
Test Voltage	: DC 5V	Humidity	: 56%RH
Test Result	: <b>PASS</b>	Model	:

**For Frequency Below 30MHz**

Freq. (MHz)	Emission (dBuV/m) QP Detector	HORIZ / VERT	Limits (dBuV/m)	Margin (dB)
N/A	N/A	N/A	N/A	N/A

**Note:**

- (1) All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
- (2) "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- (3) Emission Level = Reading Level + Probe Factor + Cable Loss.

**For Frequency Above 30MHz**

Freq. (MHz)	Emission (dBuV/m) QP Detector	HORIZ / VERT	Limits (dBuV/m)	Margin (dB)
189.000	40.98	HORZ	43.5	-2.52
126.000	32.78	VERT	43.5	-10.72
252.000	40.64	HORZ	46.0	-5.36
189.000	32.14	VERT	43.5	-11.36
302.880	39.14	HORZ	46.0	-6.86
399.080	27.91	VERT	46.0	-18.09

**Note:**

- (1) All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
- (2) Emission Level = Reading Level + Probe Factor + Cable Loss.

**General Radiated Emission Data**

Product	: Tablet PC	Test Mode	: Normal Link (FHSS)
Test Item	: Fundamental Radiated Emission Data	Temperature	: 25 °C
Test Voltage	: DC 5V	Humidity	: 56%RH
Test Result	: <b>PASS</b>	Model	:

**For Frequency Below 30MHz**

Freq. (MHz)	Emission (dBuV/m) QP Detector	HORIZ / VERT	Limits (dBuV/m)	Margin (dB)
N/A	N/A	N/A	N/A	N/A

**Note:**

- (1) All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
- (2) "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- (3) Emission Level = Reading Level + Probe Factor + Cable Loss.

**For Frequency Above 30MHz**

Freq. (MHz)	Emission (dBuV/m) QP Detector	HORIZ / VERT	Limits (dBuV/m)	Margin (dB)
120.000	39.78	HORZ	43.5	-3.72
132.000	39.81	VERT	43.5	-3.69
311.680	41.12	HORZ	46.0	-4.88
194.360	40.22	VERT	43.5	-3.28
406.440	42.69	HORZ	46.0	-3.31
354.760	41.03	VERT	46.0	-4.97

**Note:**

- (1) All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
- (2) Emission Level = Reading Level + Probe Factor + Cable Loss.

## 7. RF Exposure Requirements

### 7.1 Test Equipment

Please refer to Section 10 this report.

### 7.2 Limit

According to FCC 15.247(e)(i) and FCC 1.1307(b)(1), Systems operating under provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commissions guidelines.

According to KDB 447498(2)(a)(i)

Frequency Range		Maximum measured transmitter power frequency(MHz)	60/f SAR Limitation (mW)
Low Frequency(MHz)	High Frequency(MHz)		
2412	2462	2437	24.62

### 7.3 Test Result

Product	: Tablet PC	Test Mode	: IEEE 802.11b/g/n
Test Item	: RF Exposure	Temperature	: 25 °C
Test Voltage	: DC 5V	Humidity	: 56%RH
Test Result	: <b>PASS</b>		

RF Exposure Requirements	Compliance with FCC Rules
<p>EIRP=PxG</p> <p>Where:</p> <p>P=Power input to antenna</p> <p>G=Power gain of the antenna relative to an isotropic radiator</p>	<p>Maximum output power at antenna input terminal:            10.53 dBm = 11.30 mW (802.11b/g, 2437MHz)            6.42 dBm = 4.39 mW (Draft n, 2437MHz)</p> <p>Prediction distance: &lt;2.5 cm</p> <p>Antenna gain : 2.48 dBi</p> <p>Limit 60/f is 24.62 mw for 2437MHz</p> <p>802.11b/g: 20.00 mW</p> <p>Draft n : 7.77 mW</p> <p>The max. output power E.I.R.P &lt; 24.62mW</p> <p>Conclusion: No SAR is required.</p>

## 8. Photos of Testing

### 8. 1 EUT Test Photographs

Conducted emission test view



Radiated emission test view





## 8.2 EUT Detailed Photographs

EUT top view



EUT bottom view







EUT inside whole view





Main & RF board component side

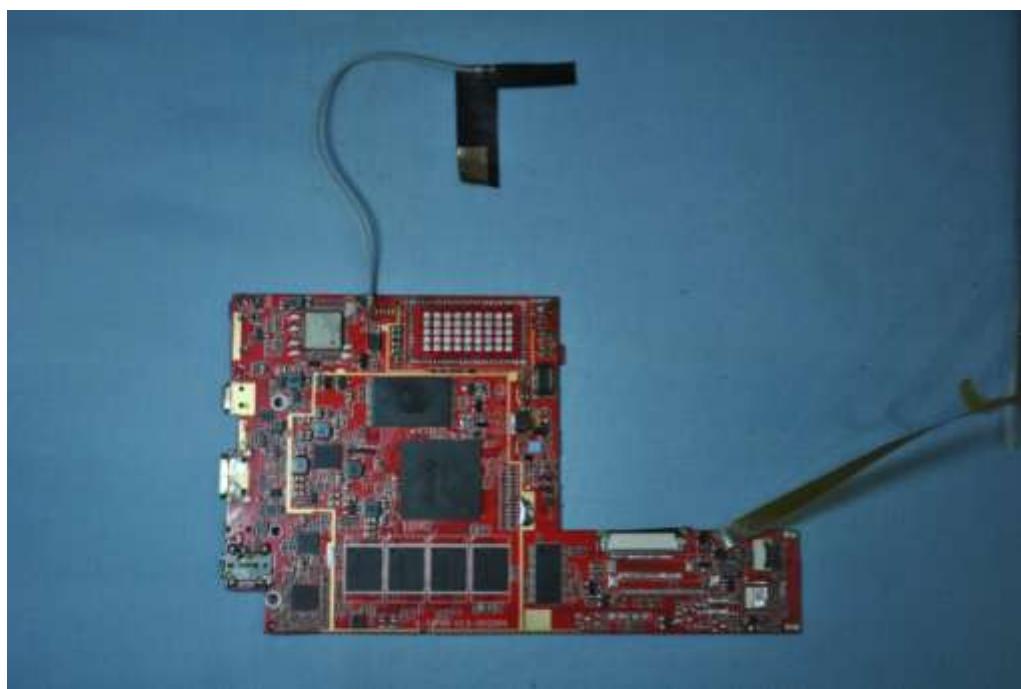

WiFi & BT module + Antenna

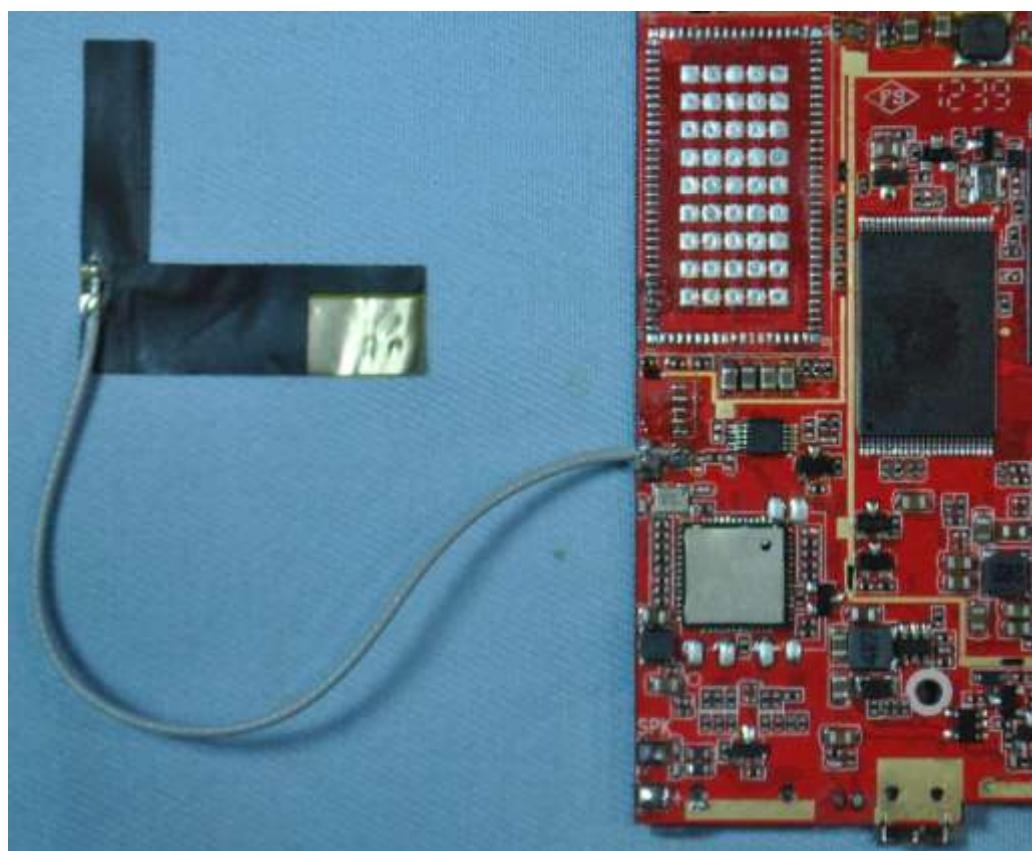

Main & RF board solder side

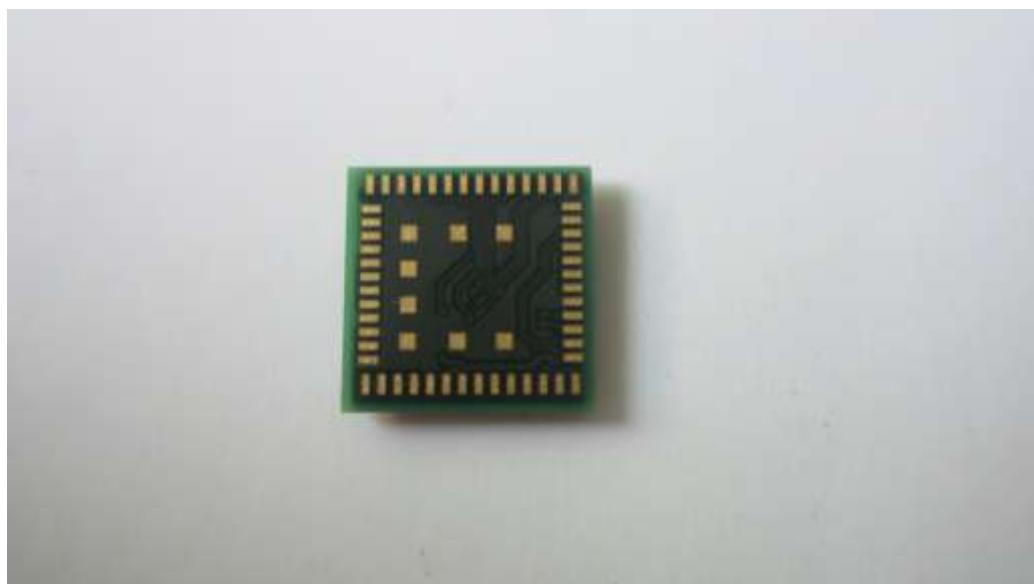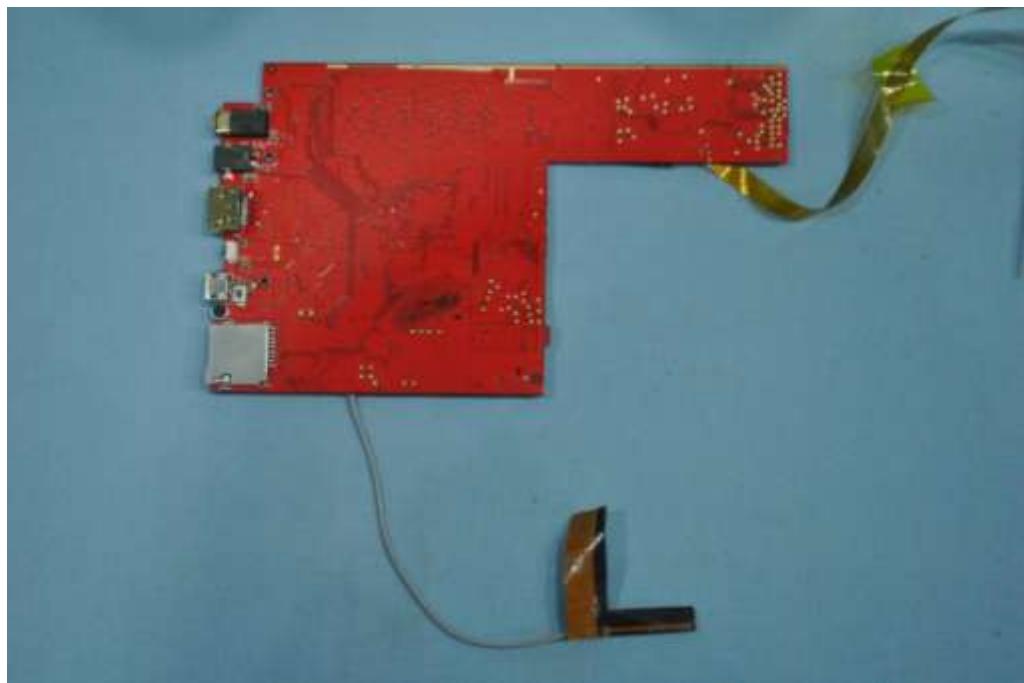

## 9. FCC ID Label


FCC ID: OI2K977

**This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.**

The Label must not be a stick-on paper label. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

### Proposed Label Location on EUT

EUT Bottom View/Proposed FCC ID Label Location

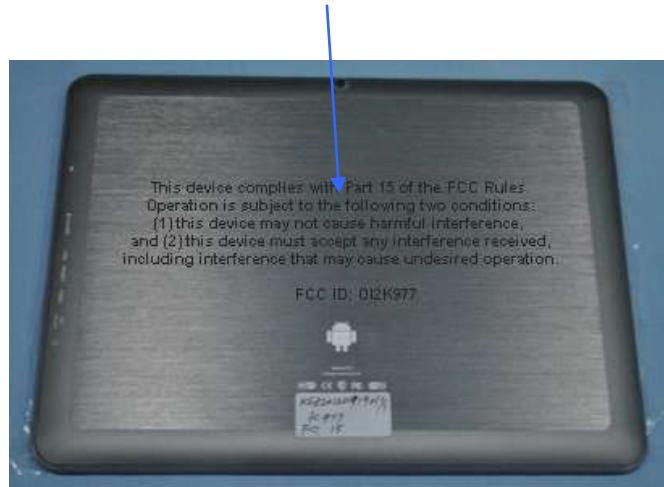

## 10. Test Equipment

The following test equipments were used during the radiated & conducted emission test:

Equipment/ Facilities	Manufacturer	Model #	Serial No.	Due Date
Turntable	SinTek	N/A	N/A	NCR
Antenna Tower	SinTek	N/A	N/A	NCR
OATS	SinTek	N/A	N/A	Sep.28, 2013
Bilog Antenna	SCHAFFNER	CBL6111C	2775	June 12, 2013
Pre-Amplifier	HP	8449B	3008B00965	June 12, 2013
Horn Antenna	EMCO	3115	9602-4659	June 12, 2013
Horn Antenna	Rohde & Schwarz	AT4560	SB3435/03	May 4, 2013
EMI Test Receiver	Rohde & Schwarz	ESPI7	100013	June 01, 2013
Spectrum Analyzer	Rohde & Schwarz	FSP40	100273	May 27, 2013
Signal Generator	FLUKE	PM5418+Y/C	LO747012	May 27, 2013
Loop Antenna	Rohde & Schwarz	HFH2-Z2	872096/16	Jan. 30, 2013
Trilog-Super Broadband Antenna	SCHWARZBECK	VULB9161	9161-4079	Sep.18, 2013
Trilog-Super Broadband Antenna	SCHWARZBECK	VULB9161	9161-4080	Sep.18, 2013
Broad-Band Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-564	Sep.18, 2013
Broad-Band Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-565	Sep.18, 2013
AMN	Rohde & Schwarz	ESH3-Z5	100197	May 27, 2013
Pulse Limiter	SCHWARZBECK	VTSD 9561-F	9604	Nov.29, 2012
ISN	SCHWARZBECK	NTFM 8158 CAT3	CAT 3 8158-0010	Nov.19, 2012
ISN	SCHWARZBECK	NTFM 8158 CAT5	CAT 5 8158-0009	Nov.19, 2012
ISN	SCHWARZBECK	NTFM 8158 CAT6	CAT 6 8158-0012	Nov.19, 2012
KMO Shielded Room	KMO	KMO-001	N/A	N/A
Coaxial Cable with N-Connectors	SCHWARZBECK	AK9515H	95549	Sep.18, 2013
SOHO Telephone Switching System	IKE	2000-108C	N/A	NCR
3m Anechoic Chamber	KMO	KMO-3AC	KMO-3AC-1	May 29, 2013
Temperature Chamber	TABAI	PSL-4GTW	N/A	Feb.10, 2013