



Test Report:

5W44304, issue 2

Applicant:

Dekolink Wireless Ltd.
16 Bazel St. Qiryat Arie
Petah Tikva, Israel
49510

**Equipment Under Test:
(EUT)**

MW-CBDA-SMR-10W80-PS8

FCC ID:

OIW CBDAPS810W80

In Accordance With:

FCC Part 90
Private Land Mobile Repeater

Tested By:

Nemko Canada Inc.
303 River Road, R.R. 5
Ottawa, Ontario K1V 1H2

A handwritten signature in blue ink, appearing to read 'Jason Nixon', is written over a light blue horizontal line.

Authorized By:

Jason Nixon, Telecommunications Specialist

Date:

1 June 2005

Total Number of Pages:

28

Table of Contents

Section 1.	Summary of Test Results	3
Section 2.	General Equipment Specification.....	5
Section 3.	RF Power Output.....	6
Section 4.	Occupied Bandwidth	8
Section 5.	Spurious Emissions at Antenna Terminals	13
Section 6.	Field Strength of Spurious Emissions	17
Section 7.	Out of Band Rejection	23
Section 8.	Test Equipment List	24
Annex A	Test Diagrams.....	26

EQUIPMENT: MW-CBDA-SMR-10W80-PS8

Section 1. Summary of Test Results

General

All measurements are traceable to national standards.

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 90, Subpart I.



New Submission




Production Unit



Class II Permissive Change




Pre-Production Unit



Equipment Code

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST
SPECIFICATIONS HAVE BEEN MADE.
See " Summary of Test Data".



TESTED BY: _____ DATE: 1 June 2005

Xu Jin, Wireless Specialist

Nemko Canada Inc., a testing laboratory, is accredited by the Standards Council of Canada. The tests included in this report are within the scope of this accreditation.

Nemko Canada Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

This report applies only to the items tested.

EQUIPMENT: MW-CBDA-SMR-10W80-PS8

Summary Of Test Data

Name Of Test	Clause	Test Method	Result
RF Power Output	90.205	2.1046	Complies
Occupied Bandwidth	2-11-04/EAB/RF	2.1049	Complies
Spurious Emissions at Antenna Terminals	90.210	2.1051	Complies
Field Strength of Spurious Emissions	90.210	2.1053	Complies
Frequency Stability	90.213	2.1055	N/A(1)
Transient Frequency Behavior	90.214	-----	N/A(2)
Out of band rejection	2-11-04/EAB/RF		Complies

Footnotes

1. The EUT does not contain any frequency conversion circuitry.
2. The EUT does not operate in the 150-174 MHz and 421-512 MHz frequency bands

Indoor Temperature: 23°C
 Humidity: 39%

Outdoor Temperature: 20°C
 Humidity: 48%

EQUIPMENT: MW-CBDA-SMR-10W80-PS8

Section 2. General Equipment Specification


Manufacturer:	Dekolink Wireless Ltd.
Model No.:	MW-CBDA-SMR-10W80-PC8
Serial No.:	05029142
Date Received In Laboratory:	May 11, 2005
Nemko Identification No.:	1
Supply Voltage Input:	110 to 220VAC, 50-60Hz
Frequency Range:	UpLink: 806-824 MHz DownLink: 851-869 MHz.
Type(s) of Modulation:	iDEN, FM
RF Power Output (rated):	UpLink: 24dBm DownLink: 30dBm
Gain(rated)	UpLink: 80dB DownLink: 80dB
Emission Designator:	GXW, F3E

EQUIPMENT: MW-CBDA-SMR-10W80-PS8

Theory of Operation

The MW-CBDA-SMR-10W80-PS8 is a repeater/booster used to extend the coverage area of radio communication in building and RF shielded environment. The EUT is based on a duplexed path configuration. The Downlink path received the RF signal from base station, amplifies the signal and transmits to the subscriber. The Uplink path receives the RF signals from the subscriber, amplifier and transmits the signal to the base station. Two duplexers separate the signals to the proper amplifying path and isolate the two signals.

Block Diagram of the EUT

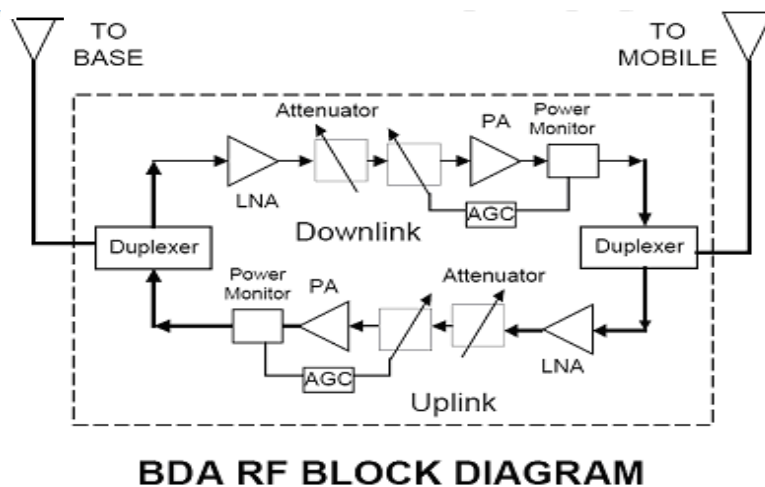

EQUIPMENT: MW-CBDA-SMR-10W80-PS8

Section 3. RF Power Output**Para. No.: 2.1046**

Test Performed By: Xu Jin	Date of Test: May 16, 2005
----------------------------------	-----------------------------------

Minimum Standard: Para. No. 90. 205 (a).**Test Results:** Complies**Measurement Data:** See attached charts. The maximum RF output power is within ± 1 dB of the manufacturer's rating.**UpLink**

Channel Frequency (MHz)	Measured Power (dBm)	Rated Power (dBm)
806	24.10	24
815	24.15	24
824	23.22	24

DownLink

Channel Frequency (MHz)	Measured Power (dBm)	Rated Power (dBm)
851	29.57	30
860	30.23	30
869	29.87	30

EQUIPMENT: MW-CBDA-SMR-10W80-PS8

Section 4. Occupied Bandwidth

Para. No.: 2.1049

Test Performed By: Xu Jin	Date of Test: May 16, 2005
----------------------------------	-----------------------------------

Minimum Standard: Para. No. 90.210


Test Results: Complies

Measurement Data: See attached graph(s).

The occupied bandwidth was measured by comparison of input from the signal generator to the output signal from the amplifier. This was done in order to determine if there was any degradation to the output signal due to the amplification and conversion through the repeater.


EQUIPMENT: MW-CBDA-SMR-10W80-PS8

iDEN UpLink_Output

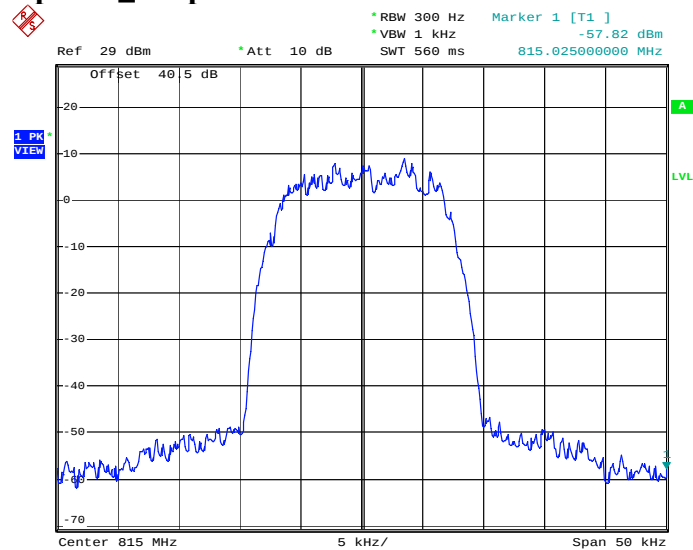

Date: 16.MAY.2005 20:20:02


UpLink_Input

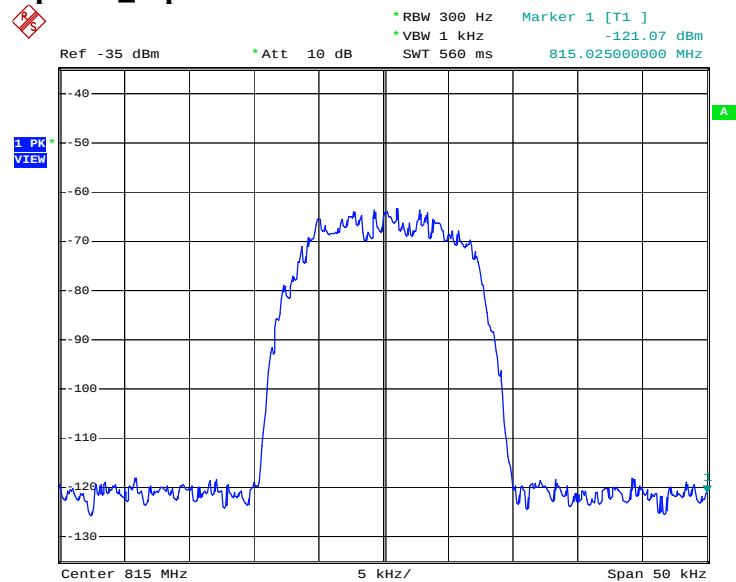

Date: 16.MAY.2005 20:25:03


EQUIPMENT: MW-CBDA-SMR-10W80-PS8

DownLink_Output

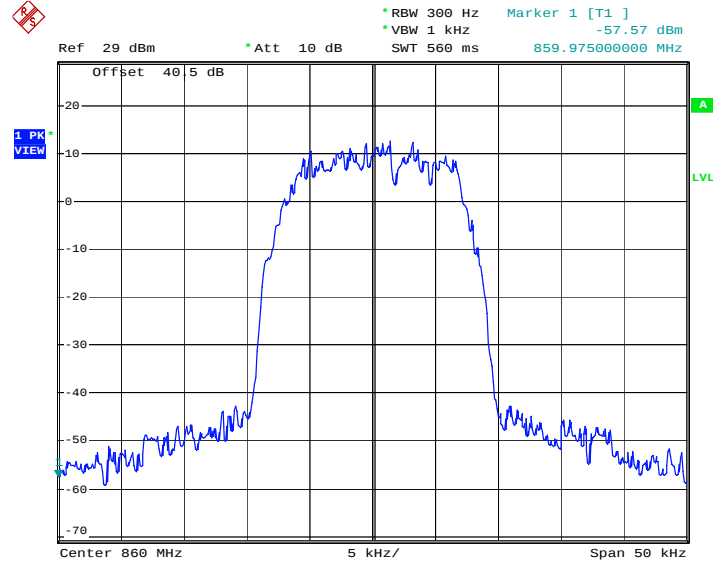

Date: 16.MAY.2005 20:21:49


Downlink_Input

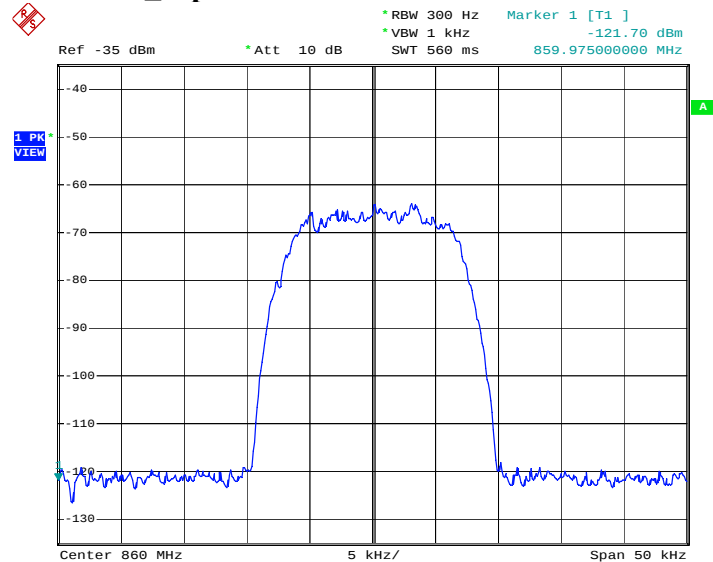

Date: 16.MAY.2005 20:24:13


EQUIPMENT: MW-CBDA-SMR-10W80-PS8

FM UpLink_Output

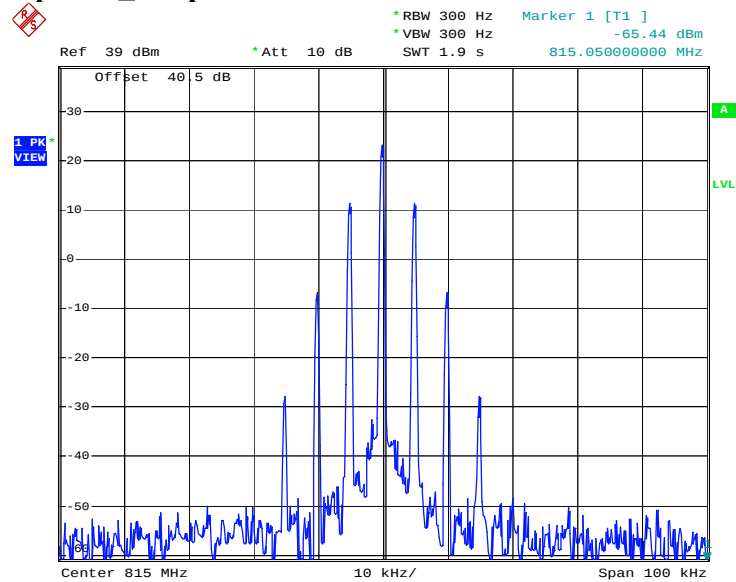

Date: 16.MAY.2005 20:47:47


UpLink_Input

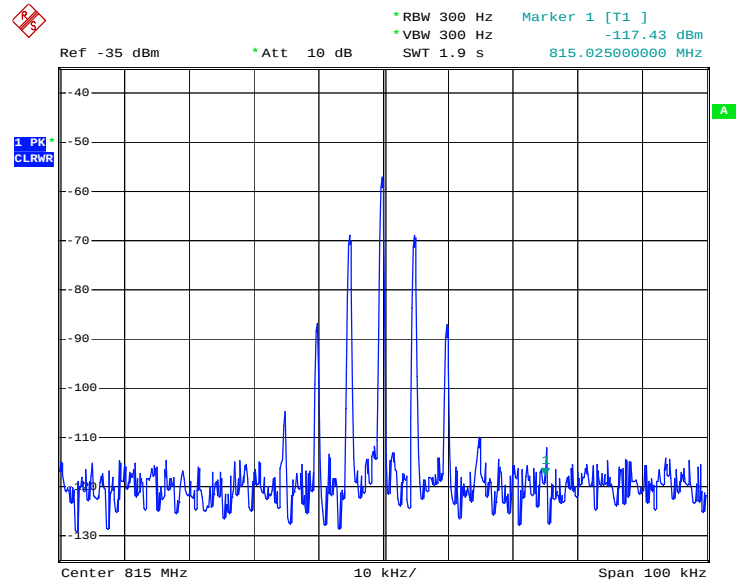

Date: 16.MAY.2005 20:41:56


EQUIPMENT: MW-CBDA-SMR-10W80-PS8

DownLink_Output

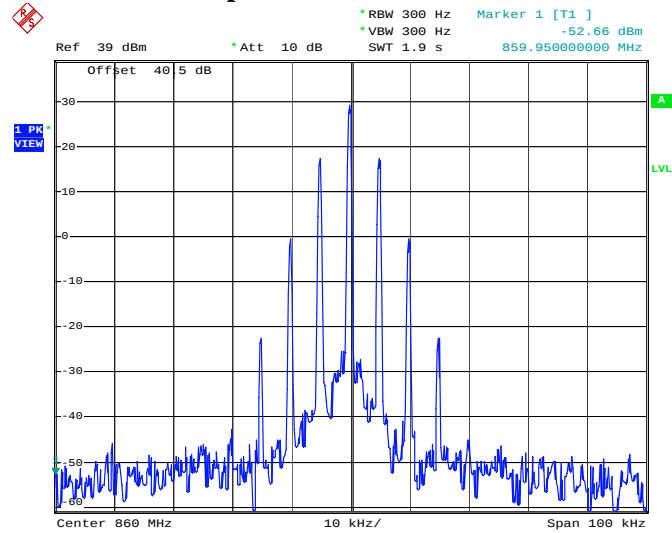

Date: 16.MAY.2005 20:45:33

DownLink_Input

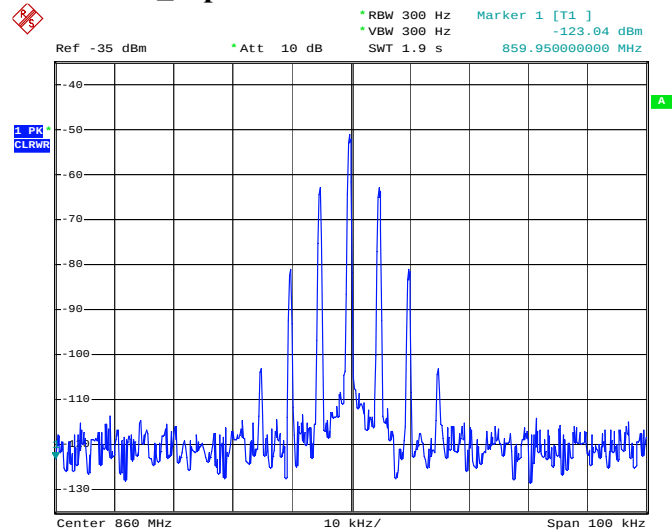

Date: 16.MAY.2005 20:43:13

EQUIPMENT: MW-CBDA-SMR-10W80-PS8

Section 5. Spurious Emissions at Antenna Terminals

Para. No.: 2.1051

Test Performed By: Xu Jin	Date of Test: May 17, 2005
----------------------------------	-----------------------------------

Minimum Standard: -13dBm

Test Results: Complies


Measurement Data: See attached graphs.

Conducted measurement was performed from 30MHz to 10GHz.
See attached graph(s). Worst cases have been presented.

EQUIPMENT: MW-CBDA-SMR-10W80-PS8


iDEN

UpLink Conducted Emissions

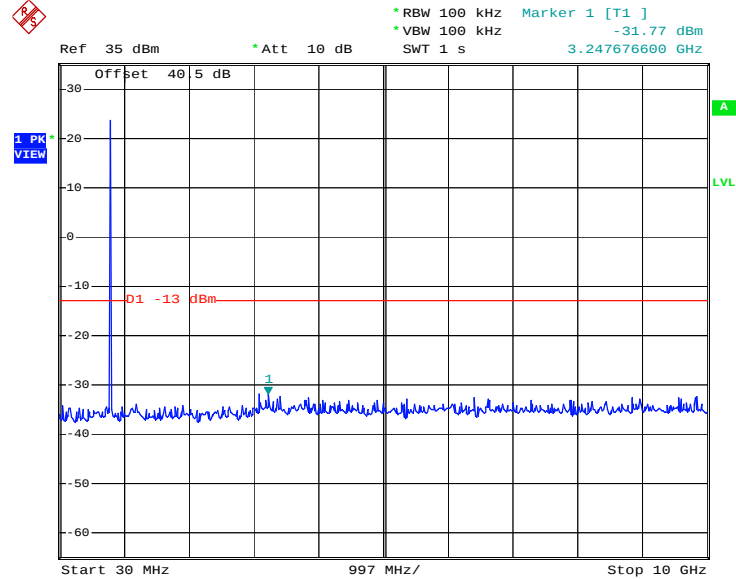

Date: 17.MAY.2005 19:39:29


DownLink Conducted Emissions

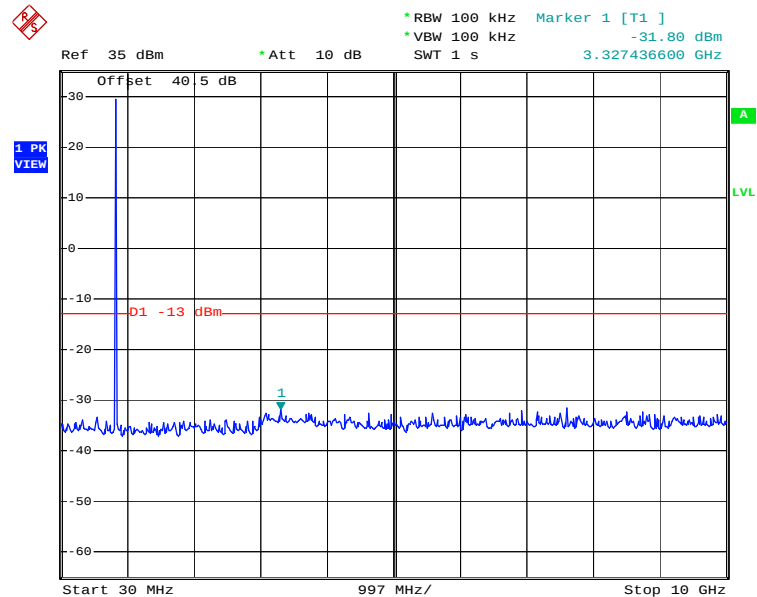


Date: 17.MAY.2005 19:42:17

EQUIPMENT: MW-CBDA-SMR-10W80-PS8

3rd Order Inter-modulation __iDEN UpLink

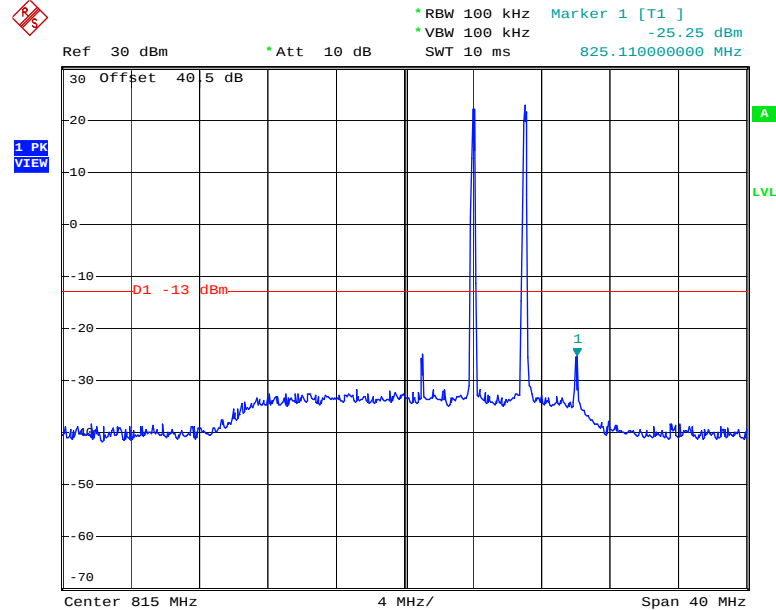


Date: 17.MAY.2005 14:31:14

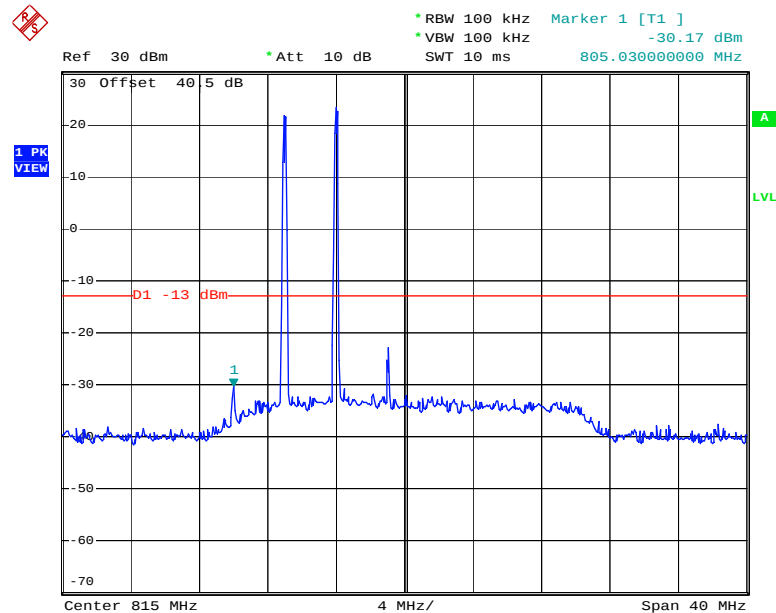


Date: 17.MAY.2005 14:32:33

EQUIPMENT: MW-CBDA-SMR-10W80-PS8

DownLink

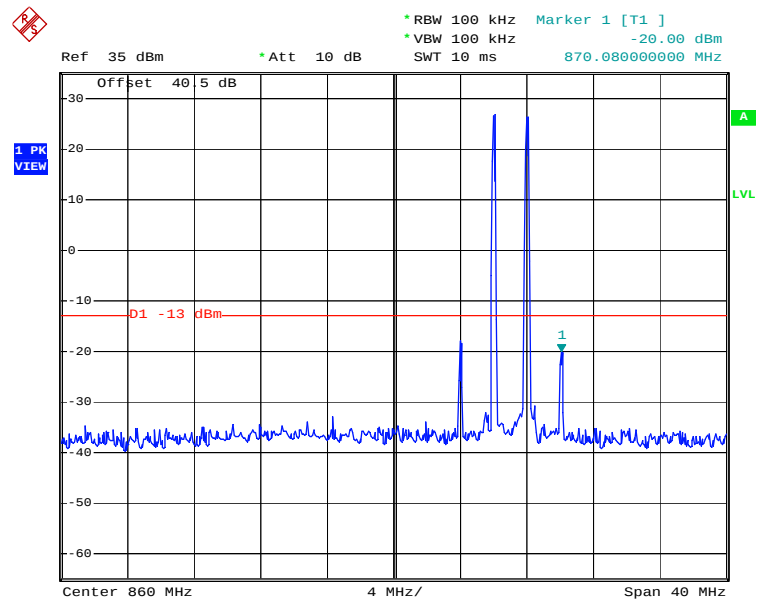


Date: 17.MAY.2005 14:44:40

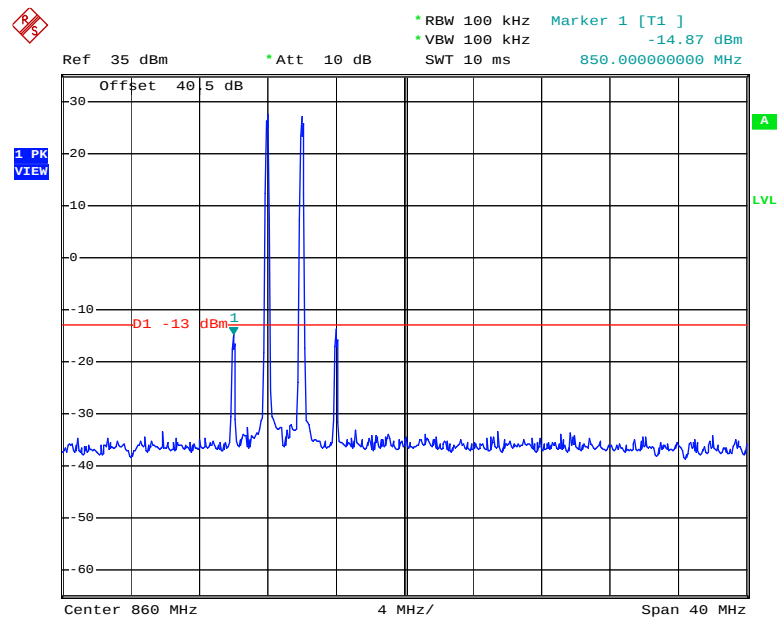

Date: 17.MAY.2005 14:54:34


EQUIPMENT: MW-CBDA-SMR-10W80-PS8

FM UpLink Conducted Emissions

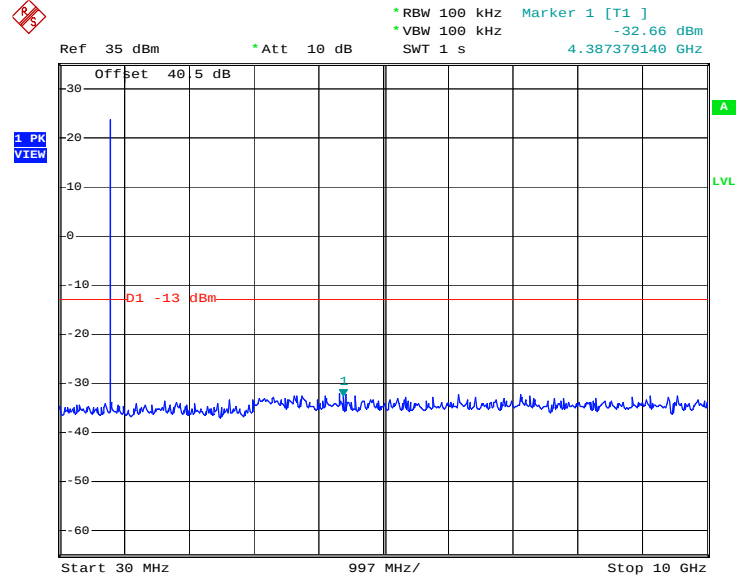

Date: 17.MAY.2005 19:29:59


DownLink Conducted Emissions

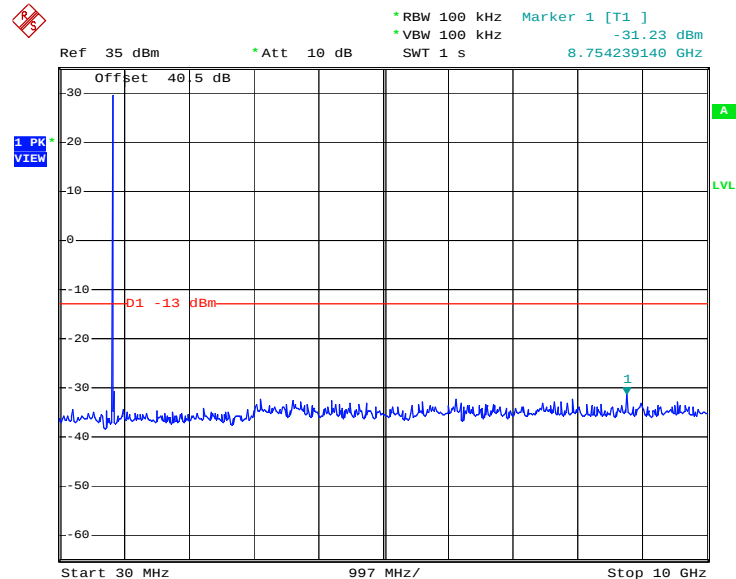


Date: 17.MAY.2005 19:27:28

EQUIPMENT: MW-CBDA-SMR-10W80-PS8

3rd Order Inter-modulation __FM Up-Link

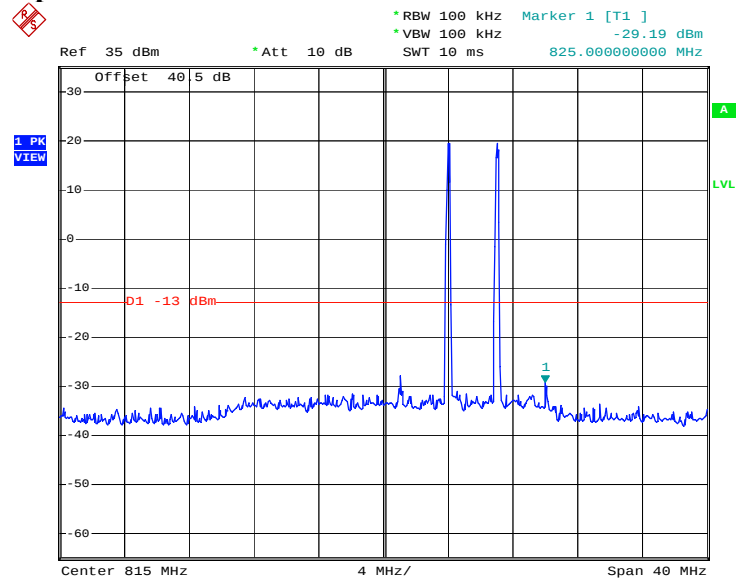


Date: 17.MAY.2005 16:02:46

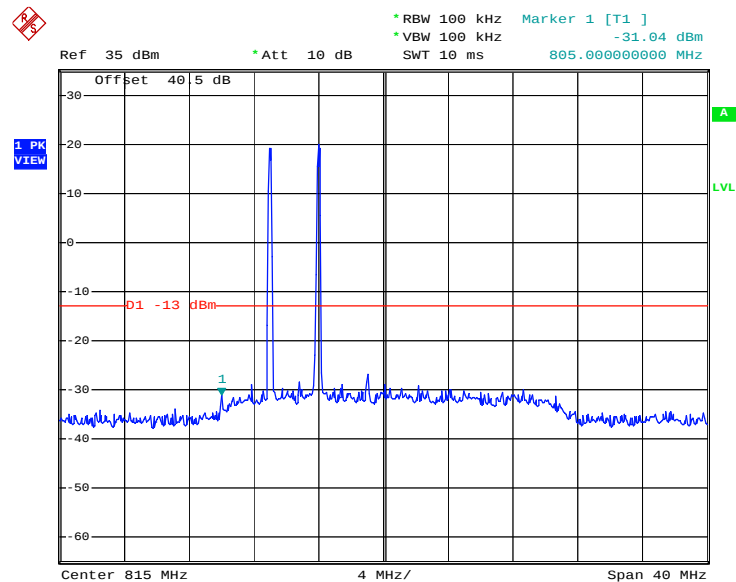


Date: 17.MAY.2005 16:01:28

EQUIPMENT: MW-CBDA-SMR-10W80-PS8

Down-Link

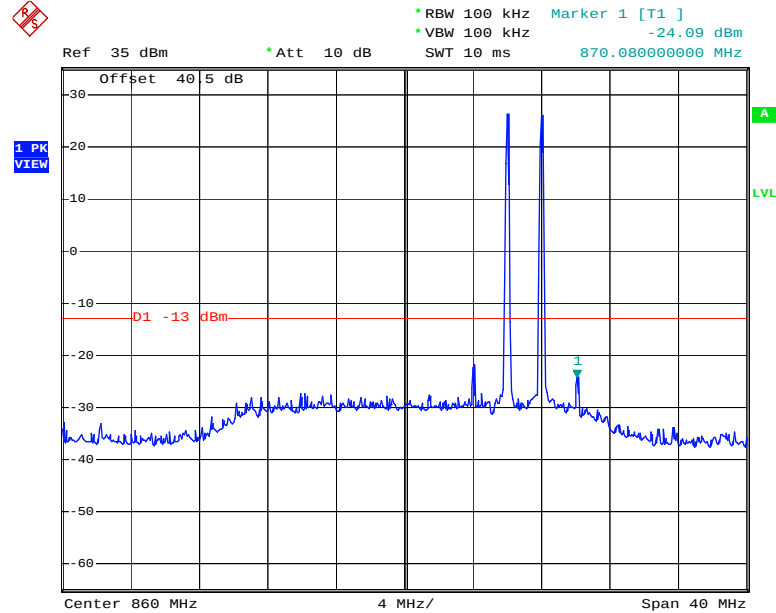

Date: 17.MAY.2005 15:52:15

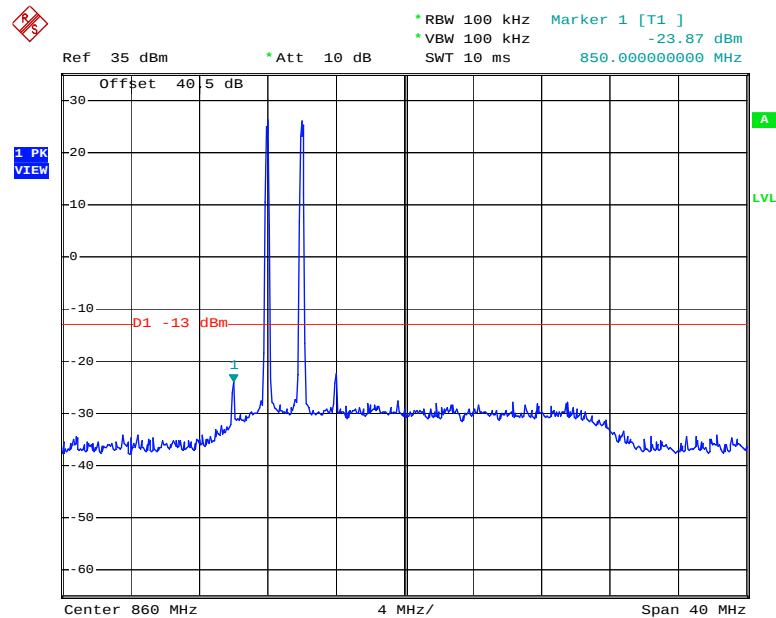

Date: 17.MAY.2005 15:51:07

EQUIPMENT: MW-CBDA-SMR-10W80-PS8

Section 6. Field Strength of Spurious Emissions

Para. No.: 2.1053

Test Performed By: Xu Jin	Date of Test: May 18, 2005
----------------------------------	-----------------------------------

Minimum Standard: Para. No. 90.210

Test Results: Complies

Measurement Data: See attached graph(s).

The EUT was searched from 30MHz to 10GHz and in both UL and DL directions.

No emissions were detected within 20dB below the limit.

EQUIPMENT: MW-CBDA-SMR-10W80-PS8

Radiated Emissions Setup Photos

Front View



EQUIPMENT: MW-CBDA-SMR-10W80-PS8

Rear View



EQUIPMENT: MW-CBDA-SMR-10W80-PS8

Section 7. Out of Band Rejection

Para. No.: EAB/RF-2-11-04

Test Performed By: Xu Jin	Date of Test: May 17, 2005
----------------------------------	-----------------------------------


Minimum Standard: Filter frequency response was required to be presented.

Test Results: Complies

Measurement Data: See attached plots.


EQUIPMENT: MW-CBDA-SMR-10W80-PS8

UpLink

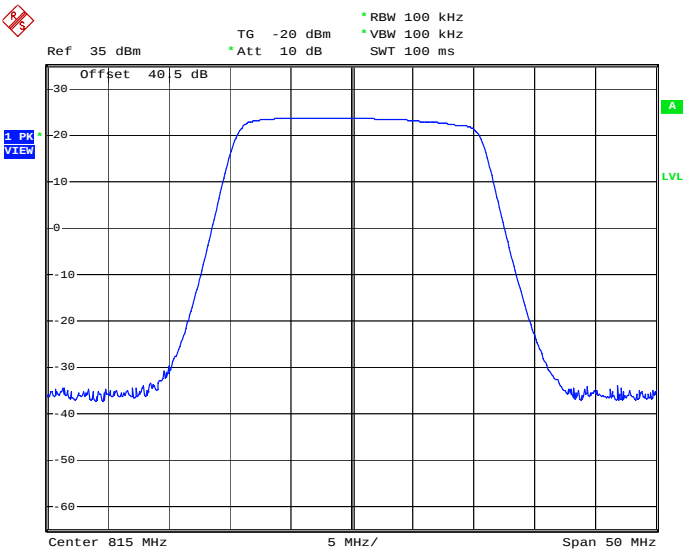

Date: 17.MAY.2005 20:12:44

DownLink

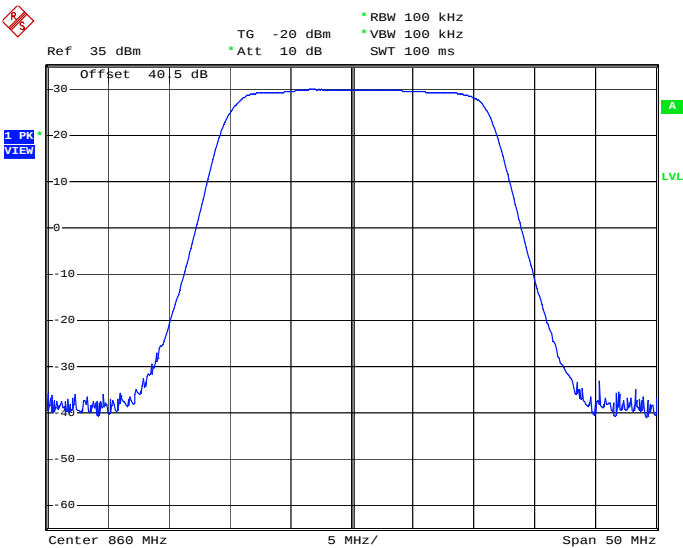

Date: 17.MAY.2005 20:15:59

EQUIPMENT: MW-CBDA-SMR-10W80-PS8


Section 8. Test Equipment List

Equipment	Manufacturer	Model No.	Asset/Serial No.	Last Cal.	Next Cal.
Spectrum Analyzer	Rohde & Schwarz	FSP	FA001920	Mar 22/05	Mar 22/06
Power Meter	HP	E4418B	FA001413	May 26/04	May 26/05
Power Sensor	HP	8487A	FA001741	June 9/04	June 9/05
Signal Generator	Rohde & Schwarz	SMIQ 03E	FA001269	March 3/05	March 3/06
Signal Generator	Rohde & Schwarz	SMIQ 03	FA001091	Aug 20/05	Aug 20/06
Receiver	Rohde & Schwarz	ESVS-30	FA001437	July 26/04	July 26/05
Biconical (1) Antenna	EMCO	3109	FA000805	April 22/05	April 22/06
Horn Antenna #1	EMCO	3115	FA000649	Dec. 22/04	Dec. 22/05
1.0 – 2.0 GHz Amplifier	JCA	12-400	FA001498	June 18/04	June 18/05
2.0 – 4.0 GHz Amplifier	JCA	24-600	FA001496	June 18/04	June 18/05
4.0 – 8.0 GHz Amplifier	JCA	48-600	FA001497	June 18/04	June 18/05


Annex A
Test Diagrams

EQUIPMENT: MW-CBDA-SMR-10W80-PS8

Para. No. 2.1046 - R.F. Power Output

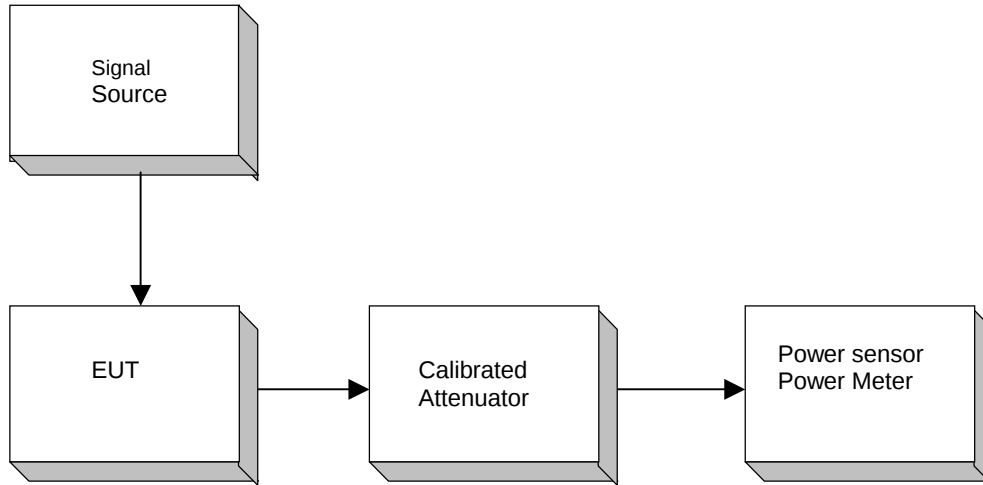


Para. No. 2.1049 - Occupied Bandwidth

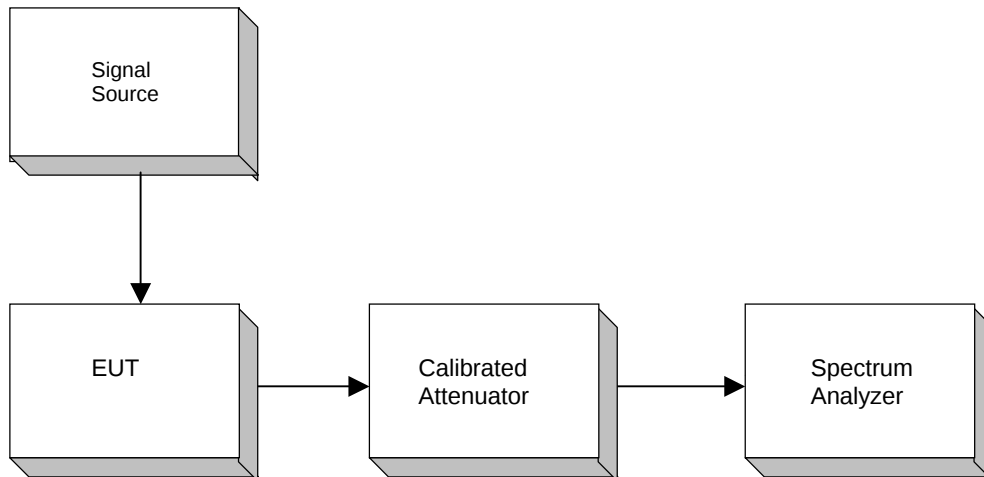

EQUIPMENT: MW-CBDA-SMR-10W80-PS8

Para. No. 2.1051 - Spurious Emissions at Antenna Terminals

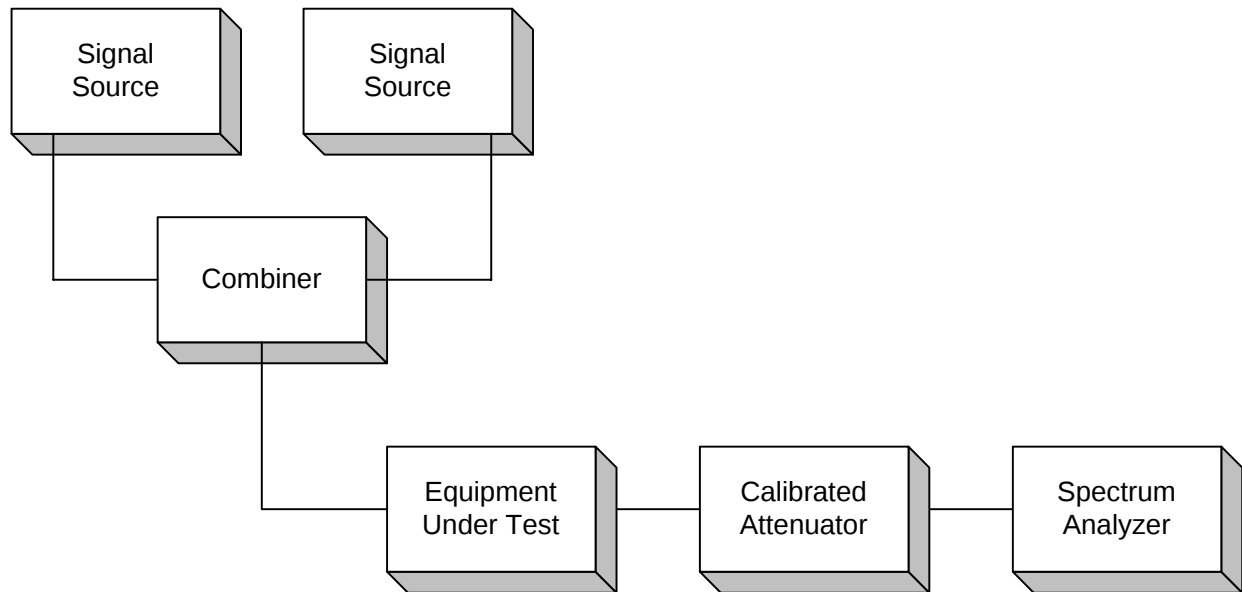

Para. No. 2.1053 - Field Strength of Spurious Radiation

