



FCC Part 15B TEST REPORT

FCC ID: OLEU511

of

Product : 3G MOBILE PHONE

Trade Name : unnecto™

Model Number : U511

Serial Model : N/A

Report No. : STS1411047E01

Prepared for

PARKTEL FZE

WAREHOUSE NO:FF01,ROUND ABOUT NO:05,JEBEL ALI FREEZONE DUBAI U.A.E

Prepared by

Shenzhen STS Test Services Co., Ltd.

**1/F A, Building 2, Zhuoke Science Park, Chongqing Road, Fuyong,
Baoan District, Shenzhen, China**

TEL: +86-755 3688 6288

FAX: +86-755 3688 6277

E-mail:sts@stsapp.com

TEST RESULT CERTIFICATION

Applicant's name: PARKTEL FZE
 Address: WAREHOUSE NO:FF01,ROUND ABOUT NO:05,JEBEL ALI
 FREEZONE DUBAI U.A.E

Manufacture's Name: SHENZHEN UNI-ONE ELECTRONIC CO.,LTD
 Address: 5/F,BLDG A2,KEXING SCIENCE PARK,KEYUAN RD.,HI-TECH
 PARK SHENZHEN,P.R.CHINA

Product description

Product name: 3G MOBILE PHONE

Brand name: unnecto ™

Model and/or type reference...: U511

Serial Model.....: N/A

Ratings: N/A

Standards: FCC 47 CFR Part 15 Subpart B

Test procedure.....: ANSI C63.4-2009

This device described above has been tested by STS, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test.....

Date (s) of performance of tests .. 19 Nov. 2014 ~ 24 Nov. 2014

Date of Issue..... 24 Nov. 2014

Test Result..... **Pass**

Testing Engineer : 

(Tony Liu)

Technical Manager : 

(Vita Li)

Authorized Signatory : 

(Bovey Yang)



Table of Contents

	Page
1 . SUMMARY OF TEST RESULTS	4
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	7
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	7
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	8
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	9
3 . EMC EMISSION TEST	10
3.1 CONDUCTED EMISSION MEASUREMENT	10
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	10
3.1.2 TEST PROCEDURE	11
3.1.3 DEVIATION FROM TEST STANDARD	11
3.1.4 TEST SETUP	11
3.1.5 EUT OPERATING CONDITIONS	11
3.1.6 TEST RESULTS	12
3.2 RADIATED EMISSION MEASUREMENT	14
3.2.1 RADIATED EMISSION LIMITS	14
3.2.2 TEST PROCEDURE	15
3.2.3 DEVIATION FROM TEST STANDARD	15
3.2.4 TEST SETUP	16
3.2.5 EUT OPERATING CONDITIONS	17
3.2.6 TEST RESULTS (BELOW 30 MHZ)	18
3.2.7 TEST RESULTS (BETWEEN 30M – 1000 MHZ)	19
4. EUT TEST PHOTO	22
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

EMISSION			
Standard	Item	Result	Remarks
FCC 47 CFR Part 15 Subpart B (10-1-05 Edition)	Conducted Emission	PASS	Meet Class B limit
	Radiated Emission	PASS	Meet Class B limit

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

1.1 TEST FACILITY

Shenzhen STS Test Services Co., Ltd.

Add. : 1/F, Building 2, Zhuoke Science Park, Chongqing Road, Fuyong, Baoan District, Shenzhen, China.

FCC Registration No.: 842334

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	3G MOBILE PHONE
Trade Name	unnecto ™
Model Name	U511
Serial Model	N/A
Model Difference	N/A
Channel List	Please refer to the Note 2.
Adapter	Input:AC 100-240V,50/60Hz,0.15A Output:DC 5V,700mA
Battery	Rated Voltage: 3.8V capacity :1250mAh
Hardware version number	U01_MB_V0.1
Software versioning number	UNI_C231_1.3_140820
Connecting I/O Port(s)	Please refer to the User's Manual
CPU processor speed	1.2GHz

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	USB Model


For Conducted Emission	
Final Test Mode	Description
Mode1	USB Model

For Radiated Emission	
Final Test Mode	Description
Mode 1	USB Model

Note:

- (1) Due to the different configuration and test, in this list only some worse mode. The worst test data of the worse mode is reported by this report.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

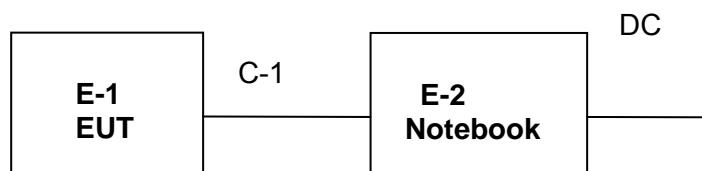

2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	3G MOBILE PHONE	unnecto™	U511	N/A	EUT
E-2	Notebook	Lenovo	B460	WB03928113	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	0.5m	
C-2	NO	NO	1.2m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Due
1	Spectrum Analyzer	Agilent	E4407B	160400005	Jul. 06. 2015
2	Test Receiver	R&S	ESPI	101318	Jul. 06. 2015
3	Bilog Antenna	TESEQ	CBL6111D	31216	Nov.22. 2015
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	Jul. 06. 2015
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	Jul. 06. 2015
6	Horn Antenna	EM	EM-AH-10180	2011071402	Nov.22. 2015
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	Jul. 06. 2015
8	Amplifier	EM	EM-30180	060538	Jul. 06. 2015
9	Loop Antenna	ARA	PLA-1030/B	1029	Jul. 06. 2015
10	Power Meter	R&S	NRVS	100696	Jul. 06. 2015
11	Power Sensor (Peak)	R&S	NRV-Z31	0396.0101.19	Jul. 06. 2015

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Test Receiver	R&S	ESCI	101160	Jul. 06. 2015
2	LISN	R&S	ENV216	101313	Jul. 06. 2015
3	LISN	EMCO	3816/2	00042990	Jul. 06. 2015
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	Jul. 06. 2015
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	Jul. 06. 2015
6	Absorbing clamp	R&S	MOS-21	100423	Jul. 06. 2015
7	RICOH Aficio	LI GUANG	3025 PCL 6	125471	Jul.06.2015
8	MOUSE	SteelSeries	Kinzu v2 Pro	584667	Jul.06.2015

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

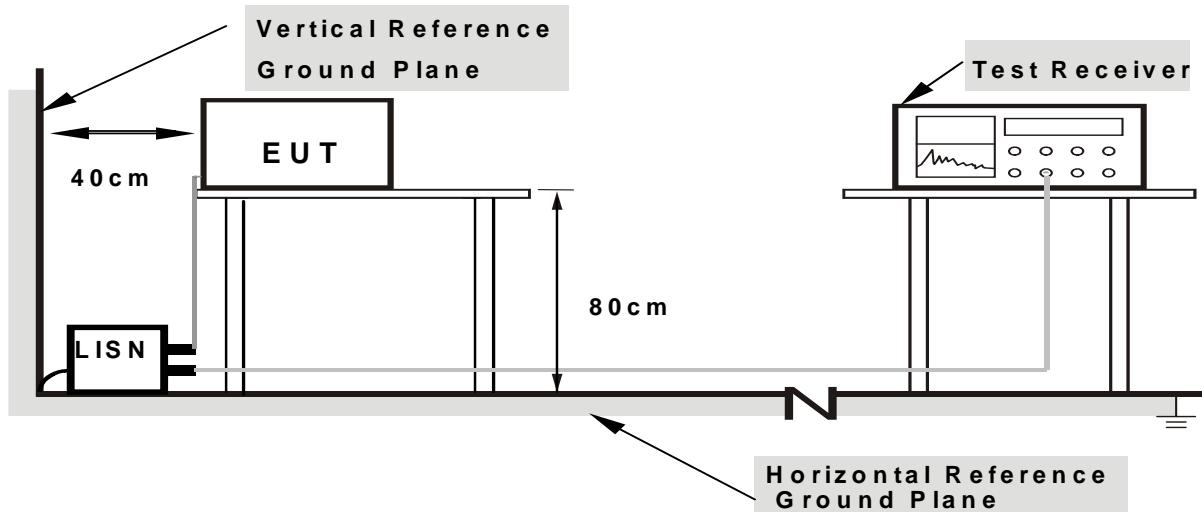

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


3.1.6 TEST RESULTS

EUT :	3G MOBILE PHONE	Model Name. :	U511
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter with AC 120V/60Hz	Test Mode :	1

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
0.1840	37.15	10.44	47.59	64.30	-16.71	QP
0.1840	23.13	10.44	33.57	54.30	-20.73	AVG
0.5110	35.78	10.40	46.18	56.00	-9.82	QP
0.5110	22.26	10.40	32.66	46.00	-13.34	AVG
0.5477	35.57	10.40	45.97	56.00	-10.03	QP
0.5477	16.64	10.40	27.04	46.00	-18.96	AVG
0.6856	27.92	10.41	38.33	56.00	-17.67	QP
0.6856	17.17	10.41	27.58	46.00	-18.42	AVG
1.0828	31.03	10.41	41.44	56.00	-14.56	QP
1.0828	16.60	10.41	27.01	46.00	-18.99	AVG
2.6726	22.79	10.42	33.21	56.00	-22.79	QP
2.6726	8.67	10.42	19.09	46.00	-26.91	AVG

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

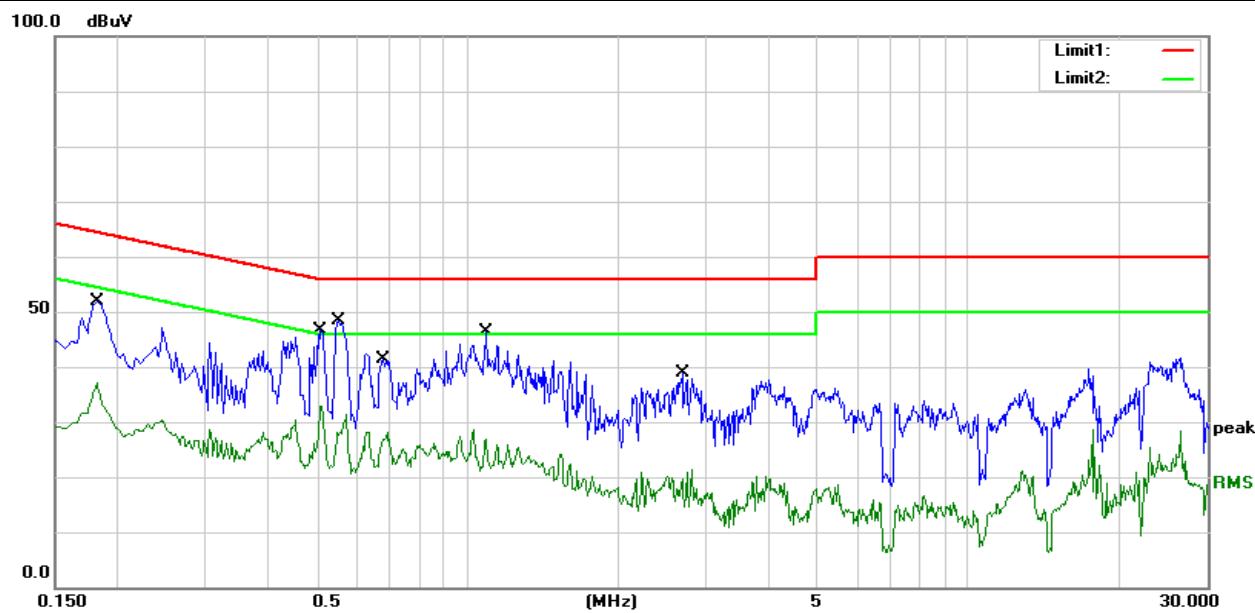


EUT :	3G MOBILE PHONE	Model Name. :	U511
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter with AC 120V/60Hz	Test Mode :	1

Frequency	Reading	Correct	Result	Limit	Margin	Remark
(MHz)	(dBuV)	Factor(dB)	(dBuV)	(dBuV)	(dB)	
0.1843	36.35	10.39	46.74	64.29	-17.55	QP
0.1843	22.78	10.39	33.17	54.29	-21.12	AVG
0.5100	34.04	10.41	44.45	56.00	-11.55	QP
0.5100	20.29	10.41	30.70	46.00	-15.30	AVG
0.5470	33.83	10.41	44.24	56.00	-11.76	QP
0.5470	21.90	10.41	32.31	46.00	-13.69	AVG
1.0376	33.94	10.45	44.39	56.00	-11.61	QP
1.0376	18.36	10.45	28.81	46.00	-17.19	AVG
1.1596	33.27	10.45	43.72	56.00	-12.28	QP
1.1596	16.84	10.45	27.29	46.00	-18.71	AVG
2.7678	23.42	10.46	33.88	56.00	-22.12	QP
2.7678	7.69	10.46	18.15	46.00	-27.85	AVG

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

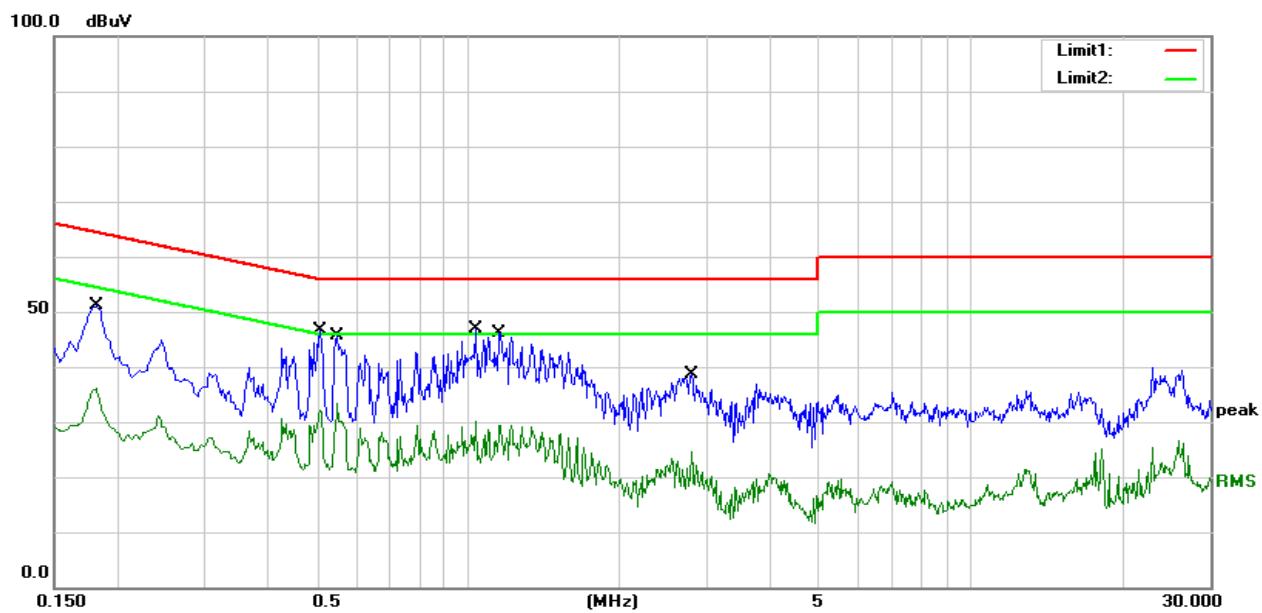

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m) (at 3M)		Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80	60	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz (Peak/AV)
Stop Frequency	10th carrier harmonic (Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 1 MHz, Average=1 MHz / 10Hz

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 1 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 1 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

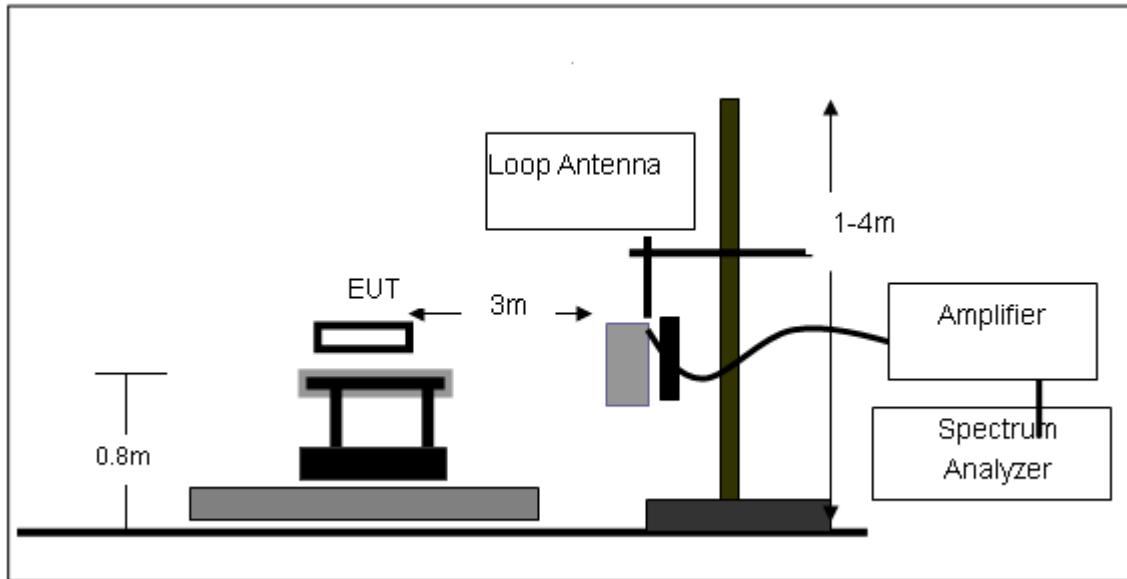

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

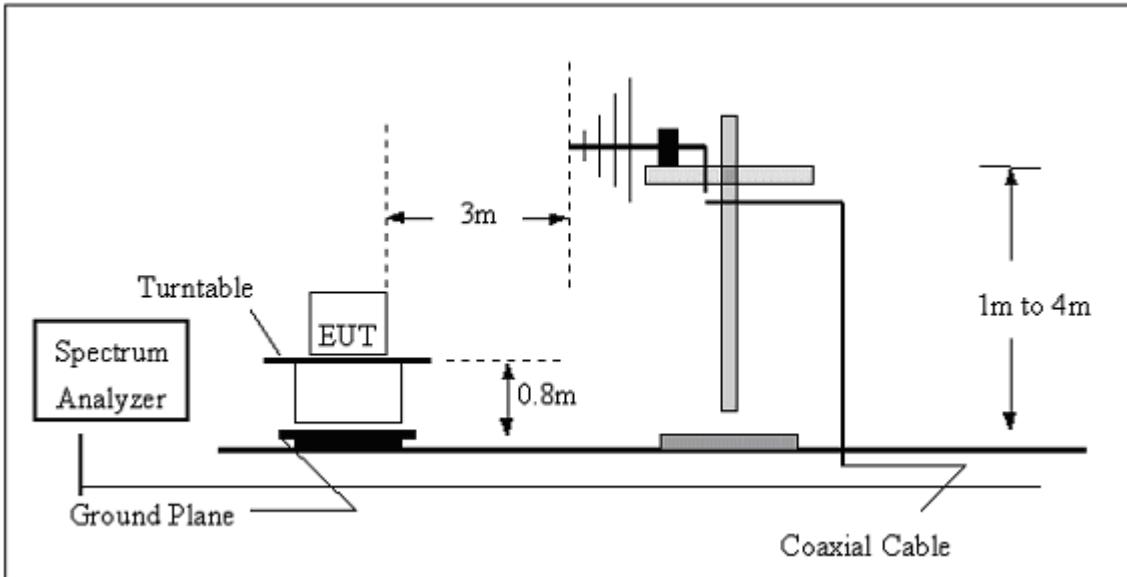

(C) Radiated Emission Test-Up Frequency Above 1GHz

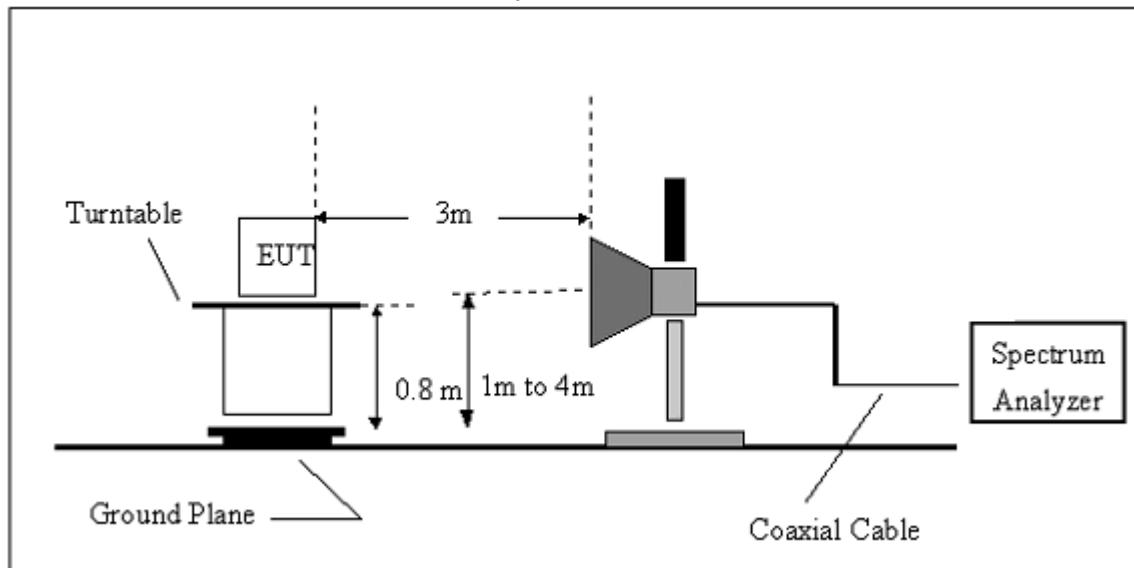**3.2.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.6 TEST RESULTS (BELOW 30 MHZ)

EUT :	3G MOBILE PHONE	Model Name. :	U511
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Polarization :	---
Test Voltage :	DC 5V from Adapter AC 120V/60Hz		
Test Mode :	Mode 1		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);
 Limit line = specific limits(dBuV) + distance extrapolation factor.


3.2.7 TEST RESULTS (BETWEEN 30M – 1000 MHZ)

EUT :	3G MOBILE PHONE	Model Name. :	U511
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 5V from Adapter AC 120V/60Hz		
Test Mode :	Mode 1		

	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
83.5222	13.20	8.67	21.87	40.00	-18.13	QP	
150.0108	24.63	12.33	36.96	43.50	-6.54	QP	
233.3487	24.32	11.42	35.74	46.00	-10.26	QP	
314.3765	24.17	15.82	39.99	46.00	-6.01	QP	
349.2500	26.18	17.16	43.34	46.00	-2.66	QP	
721.7260	8.91	25.09	34.00	46.00	-12.00	QP	

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

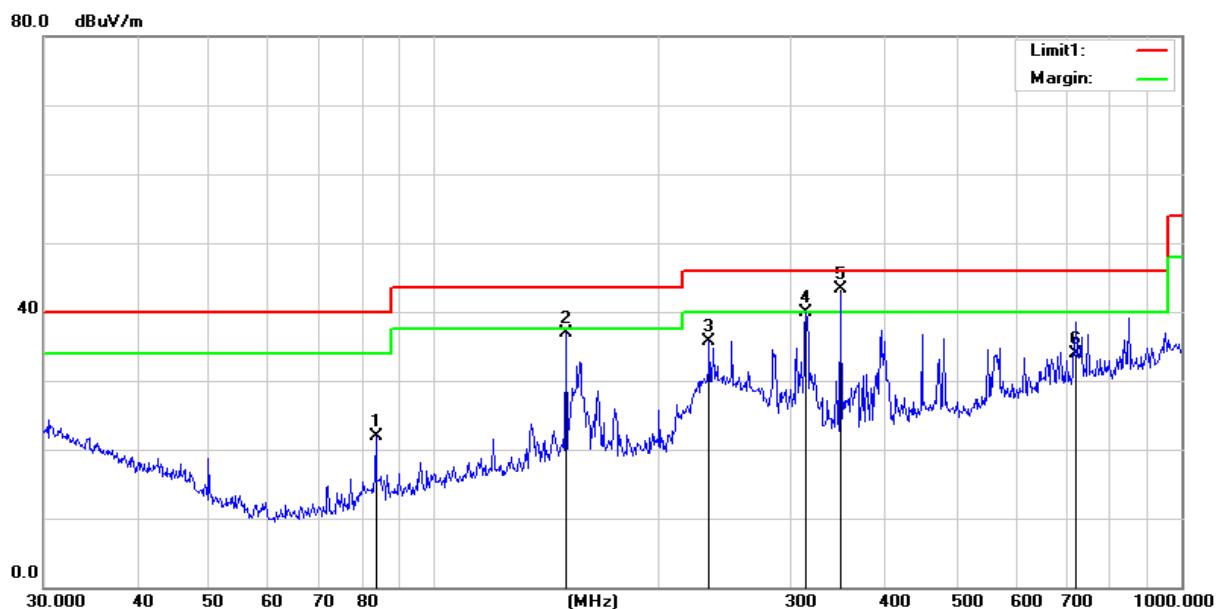


EUT :	3G MOBILE PHONE	Model Name. :	U511
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 5V from Adapter AC 120V/60Hz		
Test Mode :	Mode 1		

Frequency	Reading	Correct	Result	Limit	Margin	Remark
(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
150.0108	21.19	12.33	33.52	43.50	-9.98	QP
236.6447	17.78	11.74	29.52	46.00	-16.48	QP
314.3765	14.87	15.82	30.69	46.00	-15.31	QP
349.2500	21.83	17.16	38.99	46.00	-7.01	QP
480.5276	15.73	20.40	36.13	46.00	-9.87	QP
975.7530	9.03	29.77	38.80	54.00	-15.20	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

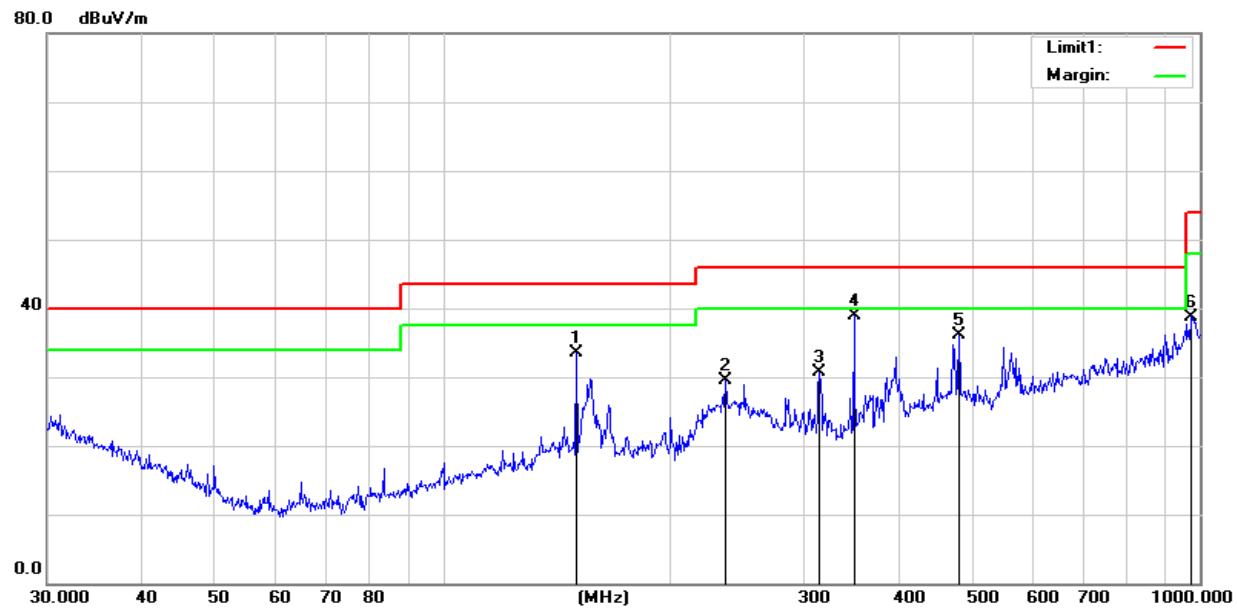

The worst test data above 1 GHz was showed as the follow:

EUT :	3G MOBILE PHONE	Model Name. :	U511
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 5V from Adapter AC 120V/60Hz		
Test Mode :	Mode 1		


Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant./CL CF	Actual Fs		Peak	AV	Peak	AV
							Limit	Limit	margin	margin
1087.22	H	58.23	40.32	5.12	63.35	45.44	74	54	-10.65	-8.56
2676.43	H	53.13	38.24	9.38	62.51	47.62	74	54	-11.49	-6.38
N/A										
1087.22	V	54.43	37.55	5.21	59.64	42.76	74	54	-14.36	-11.24
2676.43	V	49.25	32.14	9.49	58.74	41.63	74	54	-15.26	-12.37
N/A										

Notes:


1. Measuring frequencies from 1 GHz to 6GHz.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
3. The frequency that above 3GHz is mainly from the environment noise.

4. EUT TEST PHOTO

Radiated Measurement Photos
Blow 1GHz

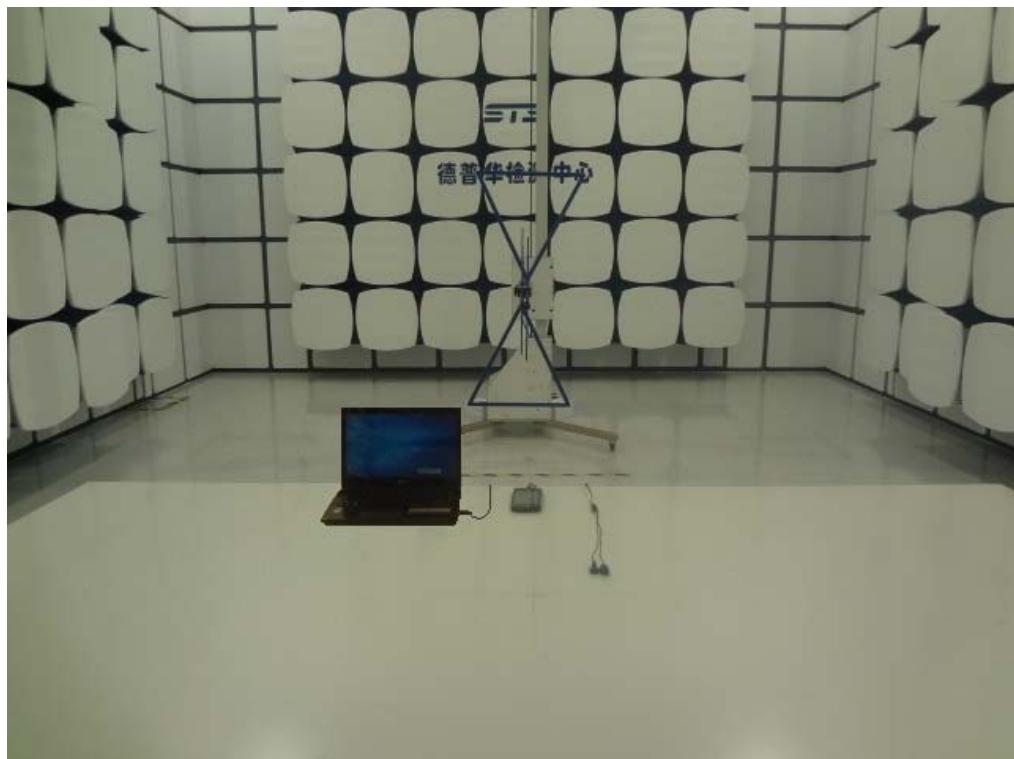

Above 1GHz

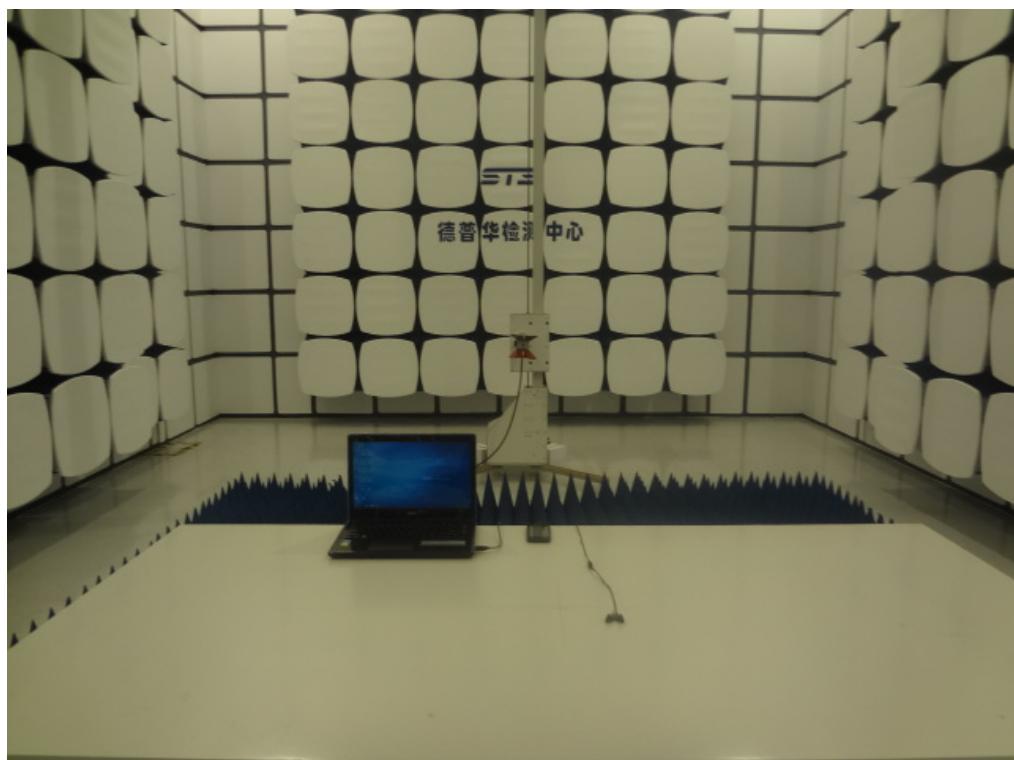

Conducted Measurement Photos

