



SGS-CSTC Standards Technical Services Co., Ltd.

198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technological
Development District, Guangzhou, China 510663
Telephone: +86 (0) 20 82155555
Fax: +86 (0) 20 82075059
Email: ee.guangzhou@sgs.com

Report No.: GZEM120400124401

Page: 1 of 28

FCC ID: OLU13802339466

TEST REPORT

Application No.:	GZEM1204001244RF
Applicant:	Koome Crafts & Toys Co., Ltd.
FCC ID:	OLU13802339466
Product Name:	ROADABLE AIRPLANE
Product Description:	Radio control toys with 2.4GHz as carrier
Model No.:	K027
Standards:	FCC PART 15 Subpart C: 2011 section 15.249
Date of Receipt:	2012-05-19
Date of Test:	2012-05-20 to 2012-07-05
Date of Issue:	2012-07-16
Test Result :	Pass*

* In the configuration tested, the EUT complied with the standards specified above.


Strong Yao
Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2012-07-16		Original

Authorized for issue by:				
Tested By		 (Storm Shu) / Project Engineer		2012-05-20 to 2012-07-05 Date
Prepared By		 (Storm Shu) / Project Engineer		2012-07-10 Date
Checked By		 Strong Yao/ Reviewer		2012-07-16 Date



3 Test Summary

TEST	TEST REQUIREMENT	TEST METHOD	RESULT
Field Strength of Fundamental	FCC PART 15 C section 15.249 (a)	ANSI C63.10: Clause 6.6	PASS
Field Strength of Unwanted Emissions	FCC PART 15 C section 15.249 (a) section 15.249 (d)	ANSI C63.10: Clause 6.4, 6.6 and 6.7	PASS
Band Edges	FCC PART 15 C section 15.249 (d)	ANSI C63.10: Clause 6.9.2	PASS
Occupied Bandwidth	FCC PART 15 C section 15.215(c)	ANSI C63.10: Clause 6.9.1	PASS

Remark:

EUT: In this whole report EUT means Equipment Under Test.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radio Frequency.

ANSI C63.10: the detail version is ANSI C63.10:2009 in the whole report.



4 Contents

1 COVER PAGE 1

2 VERSION..... 2

3 TEST SUMMARY 3

4 CONTENTS..... 4

5 GENERAL INFORMATION 5

5.1 Client Information 5

5.2 General Description of E.U.T. 5

5.3 Details of E.U.T. 5

5.4 Description of Support Units 7

5.5 Other Information Requested by the Customer 7

5.6 Deviation from Standards 7

5.7 Test Location 7

6 EQUIPMENT USED DURING TEST 9

7 TEST RESULTS 10

7.1 E.U.T. Operation..... 10

7.2 Antenna Requirement 11

7.3 Field Strength of Fundamental& Field Strength of Unwanted Emissions& Band Edge 12

7.4 Occupied Bandwidth 27



5 General Information

5.1 Client Information

Applicant: Koome Crafts & Toys Co., Ltd.
Address of Applicant: Fuan Road Guangyi Industrial Area Chenghai, Shantou, Guangdong
China

5.2 General Description of E.U.T.

Product Name: ROADABLE AIRPLANE
Model No.: K027

5.3 Details of E.U.T.

Operating Frequency: 2402 MHz to 2475 MHz
Type of Modulation: GFSK
Number of Channels: 76
Channel Separation: 1 MHz
Antenna Type: ISM Band Planar Chip Antenna
Antenna gain: 0 dBi
Function: Transmitter will be hopped between 2.402GHz and 2.475GHz for searching the Receiver. When the receiver is found, this frequency will be fixed and not be changed any more.
Power Supply: DC 6.0 V size "AA" batteries x 4 for Tx.
Power cord: N/A



EUT channels and frequencies list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2402	28	2427	53	2452
2	2403	29	2428	54	2453
3	2404	30	2429	55	2454
4	2405	31	2430	56	2455
5	2406	32	2431	57	2456
6	2407	33	2432	58	2457
7	2408	34	2433	59	2458
8	2409	35	2434	60	2459
9	2410	36	2435	61	2460
10	2411	37	2436	62	2461
11	2412	38	2437	63	2462
12	2413	39	2438	64	2463
13	2414	40	2439	65	2464
14	2415	41	2440	66	2465
15	2416	42	2441	67	2466
16	2417	43	2442	68	2467
17	2418	44	2443	69	2468
18	2419	45	2444	70	2469
19	2420	46	2445	71	2470
20	2421	47	2446	72	2471
21	2422	48	2447	73	2472
22	2423	49	2448	74	2473
23	2424	50	2449	75	2474
24	2425	51	2450	76	2475
25	2426	52	2451		

Test frequencies are the lowest channel: 1 channel(2402 MHz), middle channel: 34 channel(2433 MHz) and highest channel: 76 channel(2475 MHz)



5.4 Description of Support Units

The EUT has been tested as an independent unit.

5.5 Other Information Requested by the Customer

None.

5.6 Deviation from Standards

Biconical and log periodic antennas were used instead of dipole antennas.

5.7 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory,
198 Kezhu Road, Scienteck Park, Guangzhou Economic & Technology Development District,
Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.



5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is recognized under the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

- **FCC (Registration No.: 282399)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002.

- **Industry Canada (Registration No.: 4620B-1)**

The 3m/10m Alternate Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering of Industry Canada for radio equipment testing with Registration No. 4620B-1.

- **VCCI (Registration No.: R-2460, C-2584, G-449 and T-1179)**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2460, C-2584, G-449 and T-1179 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2005, the Basic Rules, IECEE 01:2006-10 and Rules of procedure IECEE 02:2006-10, and the relevant IECEE CB-Scheme Operational documents.



6 Equipment Used during Test

RE in Chamber						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Due date	Calibration Interval
					(YYYY-MM-DD)	
EMC0525	Compact Semi-Anechoic Chamber	ChangZhou ZhongYu	N/A	N/A	2012-09-06	2Y
EMC0522	EMI Test Receiver	Rohde & Schwarz	ESIB26	100283	2012-11-11	1Y
EMC0056	EMI Test Receiver	Rohde & Schwarz	ESCI	10036	2013-03-12	1Y
EMC0528	RI High frequency Cable	SGS	20 m	N/A	2013-06-01	1Y
EMC2025	Trilog Broadband Antenna 30-3000MHz	SCHWARZBECK MESS-ELEKTRONIK	VULB 9163	9163-450	2012-10-20	1Y
EMC0524	Bi-log Type Antenna	Schaffner -Chase	CBL6112B	2966	2012-11-28	1Y
EMC0519	Bilog Type Antenna	Schaffner -Chase	CBL6143	5070	2012-11-28	1Y
EMC2026	Horn Antenna 1-18GHz	R&S	BBHA 9120D	9120D-841	2012-10-20	1Y
EMC0518	Horn Antenna	Rohde & Schwarz	HF906	100096	2012-08-29	1Y
EMC0521	1-26.5 GHz Pre-Amplifier	Agilent	8449B	3008A01649	2012-08-29	1Y
EMC0049	Amplifier	Agilent	8447D	2944A10862	2013-03-12	1Y
EMC0075	310N Amplifier	Sonoma	310N	272683	2012-08-29	1Y
EMC0523	Active Loop Antenna	EMCO	6502	42963	2012-11-17	1Y
EMC2041	Broad-Band Horn Antenna (14)15-26.5(40)GHz	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9170	9170-375	2014-06-01	3Y
EMC0530	10m Semi-Anechoic Chamber	ETS	N/A	N/A	2014-04-27	2Y

General used equipment						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Due date	Calibration Interval
					(YYYY-MM-DD)	
EMC0006	DMM	Fluke	73	70681569	2012-11-14	1Y
EMC0007	DMM	Fluke	73	70671122	2012-11-14	1Y

7 Test Results

7.1 E.U.T. Operation

Test Voltage: DC 6.0V
Temperature: 20.0 -25.0 °C
Humidity: 38-50 % RH
Atmospheric Pressure: 1000 -1010 mbar

Test frequencies and frequency range: According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

According to the 15.33 (a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

Number of fundamental frequencies to be tested in EUT transmit band

Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

Frequency range of radiated emission measurements

Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified



7.2 Antenna Requirement

Standard requirement

15.203 requirement:

For intentional device. According to 15.203. an intentional radiator shall be designed to Ensure that no antenna other than that furnished by the responsible party shall be used with the device.

EUT Antenna

The antenna is an ISM Band Planar Chip Antenna integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0 dBi.

Test result: The unit does meet the FCC requirements.



7.3 Field Strength of Fundamental& Field Strength of Unwanted Emissions& Band Edge

Test Requirement: FCC Part15 C section 15.249

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dBμV/m @ 3m)	Field Strength of Harmonics (dBμV/m @ 3m)
902 to 928	94.0	54.0
2400 to 2483.5	94.0	54.0
5725 to 5875	94.0	54.0
24000 to 24250	108.0	68.0

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Limits: The fundamental frequency rang is in the frequency band of the EUT is 2410MHz ~ 2470MHz.

The limit for Average field strength dBμV/m for the fundamental frequency = 94.0 dBμV/m.

The limit for Peak field strength dBμV/m for the fundamental frequency = 114.0 dBμV/m.

No fundamental is allowed in the restricted bands.

The limit for average field strength dBμV/m for the harmonics = 54.0 dBμV/m.

The limit for peak field strength dBμV/m for the harmonics = 74.0 dBμV/m.

Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or 54.0 dBμV/m in 15.209. Here the limit for the other emission is 54.0 dBμV/m.

Test Method: ANSI C63.10: Clause 6.4, 6.6 and 6.7 for Field Strength of Fundamental& Field Strength of Unwanted Emissions

ANSI C63.10: Clause 6.9.2 for Band Edge

Status Pre-test the EUT in continuous transmitting mode with setup as stand-alone in X, Y, Z threes axes, found the worst case is X axes and report the data.

Measurement Distance: 3m (Semi-Anechoic Chamber)

Frequency range 9 KHz – 25 GHz for transmitting mode.

Test instrumentation resolution bandwidth

9 kHz (9 kHz - 30 MHz), 120 kHz (30 MHz - 1000 MHz),

1 MHz (1000 MHz – 25 GHz)

Test Procedure:

1) 9 kHz to 30 MHz emissions:

For testing performed with the loop antenna, testing was performed in accordance to ANSI C63.10. The centre of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT, During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

2) 30 MHz to 1 GHz emissions:


For testing performed with the bi-log type antenna, testing was performed in accordance to ANSI C63.10. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

3) 1 GHz to 25 GHz emissions:


For testing performed with the horn antenna, testing was performed in accordance to ANSI C63.10. The measurement is performed with the EUT rotated 360°, the antenna height scan between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

Test Configuration:


1) 9 kHz to 30 MHz emissions:

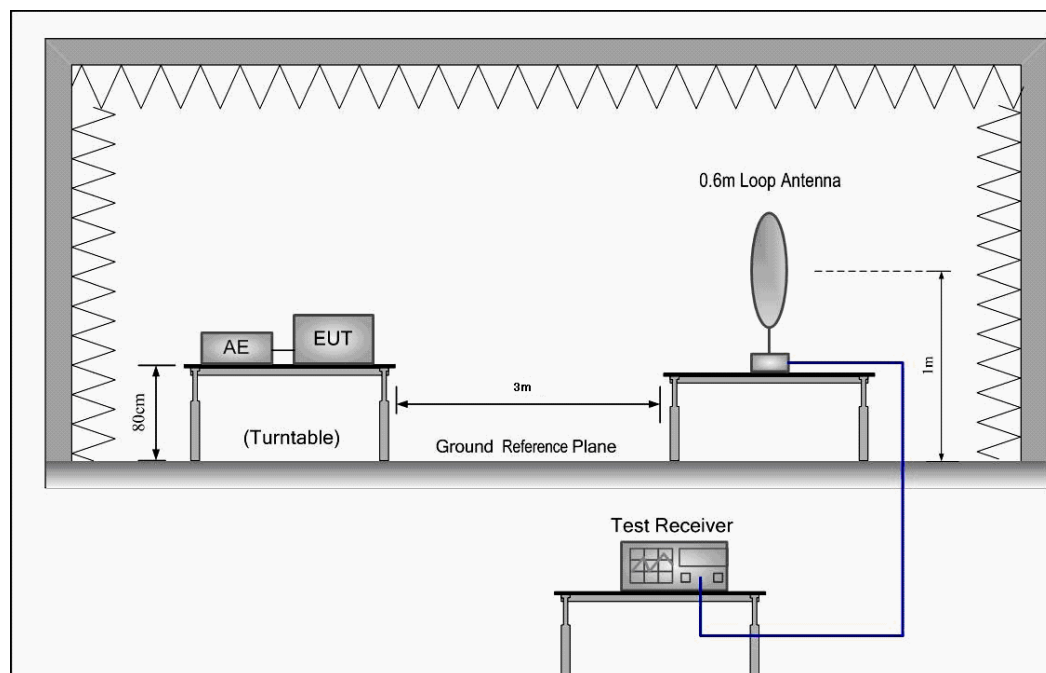

2) 30 MHz to 1 GHz emissions:

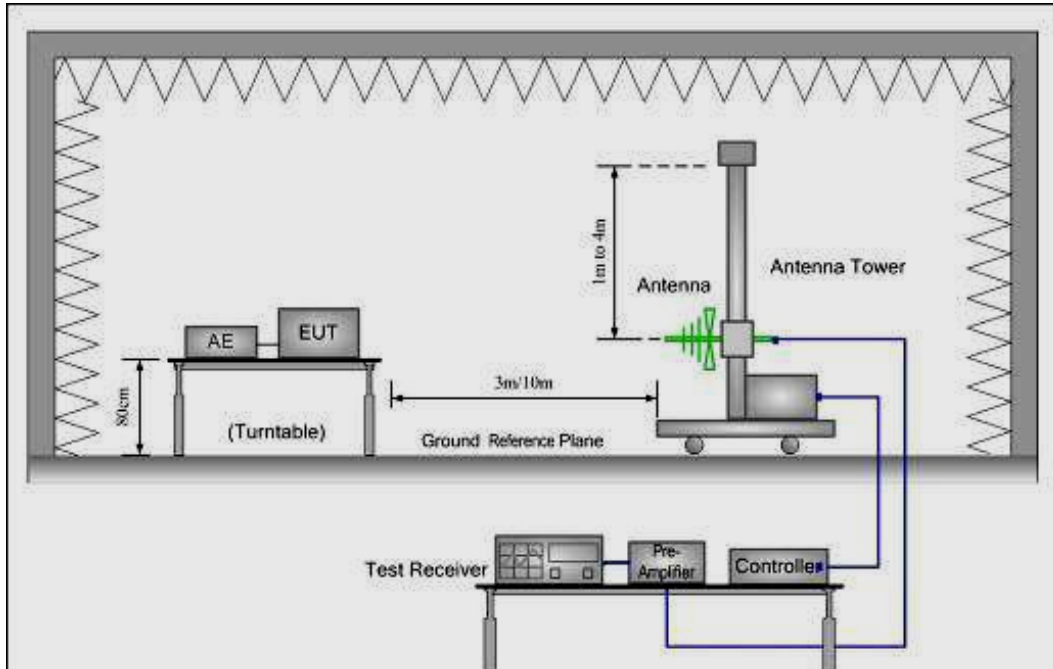

3) 1 GHz to 25 GHz emissions:

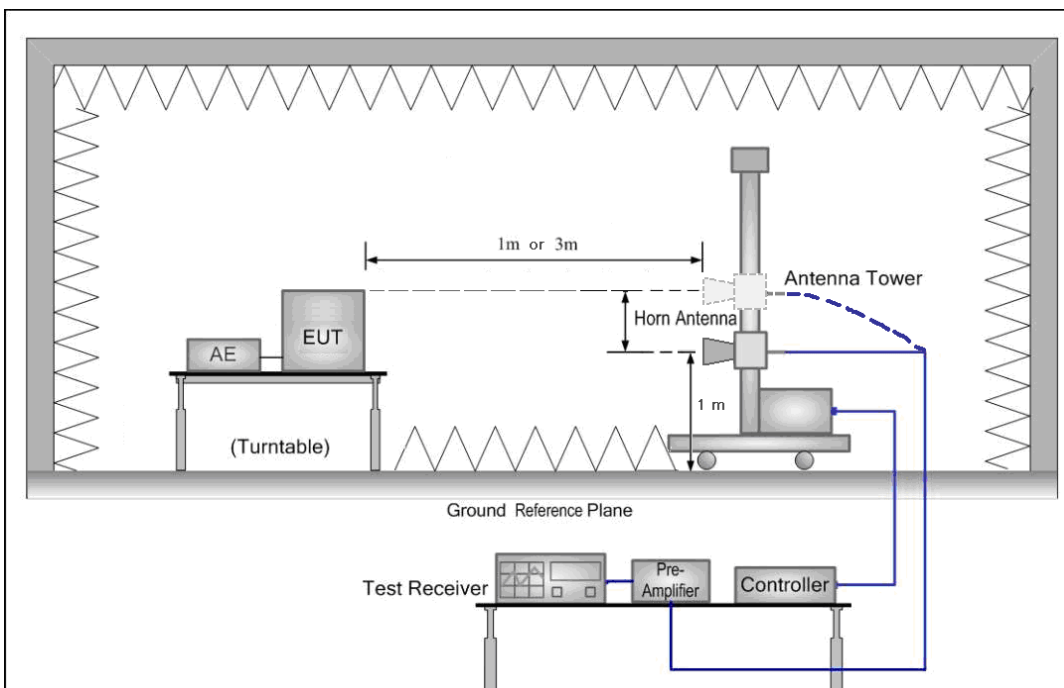

The field strength is calculated by adding the Antenna Factor, Cable Loss & Pre-amplifier. The basic equation with a sample calculation is as follows:

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Preamplifier Factor}$$

Test at low Channel in transmitting status


9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

30 MHz~1 GHz Field Strength of Unwanted Emissions.Quasi-Peak Measurement

Vertical:

Peak scan

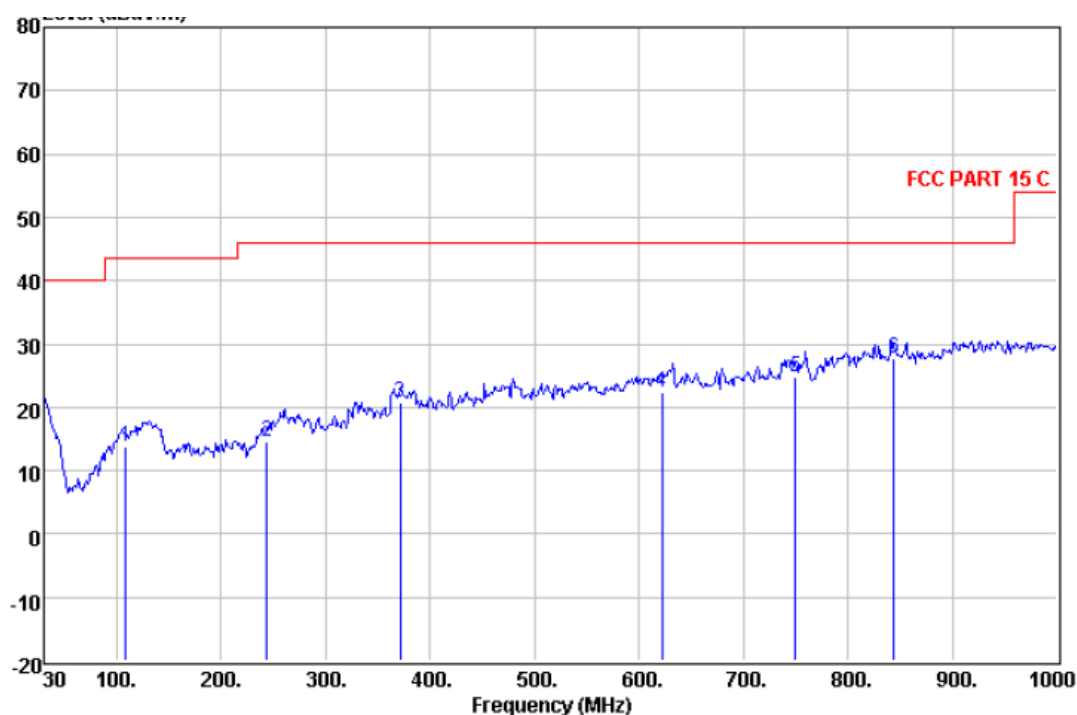Level (dB μ V/m)

Quasi-peak measurement


Freq	ReadAntenna	Cable Preamp	Over	Limit				
Level	Factor	Loss	Factor	Level	Limit	Line	Remark	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dB	dBuV/m	
108.570	28.45	11.81	1.04	27.63	13.67	-29.83	43.50	QP
243.400	28.82	11.23	1.57	27.16	14.46	-31.54	46.00	QP
371.440	31.02	15.27	2.02	27.59	20.72	-25.28	46.00	QP
621.700	29.58	18.50	2.65	28.25	22.48	-23.52	46.00	QP
749.740	29.35	20.30	2.90	27.75	24.80	-21.20	46.00	QP
843.830	31.15	20.45	3.27	27.21	27.66	-18.34	46.00	QP



Horizontal:

Peak scan

Level (dB μ V/m)

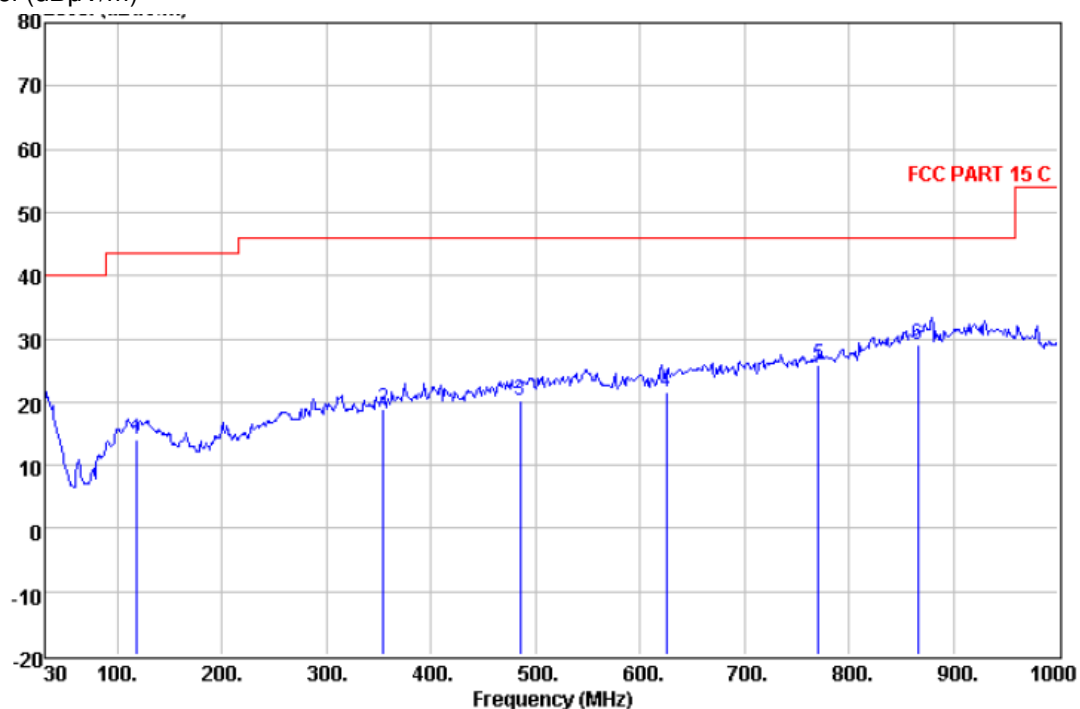

Quasi-peak measurement

Freq	ReadAntenna	Cable	Preamp	Over	Limit	
Level	Factor	Loss	Factor	Level	Limit	Line Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dB
118.270	28.81	11.77	1.08	27.57	14.09	-29.41 43.50 QP
353.980	29.83	14.51	1.96	27.48	18.82	-27.18 46.00 QP
484.930	28.56	17.35	2.34	28.00	20.25	-25.75 46.00 QP
625.580	28.58	18.65	2.65	28.24	21.64	-24.36 46.00 QP
771.080	30.85	19.80	2.97	27.70	25.92	-20.08 46.00 QP
866.140	32.06	20.63	3.36	27.03	29.02	-16.98 46.00 QP



1~25 GHz Field Strength of Fundamental & Field Strength of Unwanted Emissions.

Peak & Average Measurement

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamplifier factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2402.000	27.58	5.00	35.04	87.52	85.06	114.00	V
4804.000	31.53	7.65	34.30	46.48	51.36	74.00	V
7206.000	36.47	7.20	32.76	46.29	57.20	74.00	V
9608.000	38.08	8.56	34.08	47.64	60.20	74.00	V
2402.000	27.58	5.00	35.04	83.67	81.21	114.00	H
4804.000	31.53	7.65	34.30	47.70	52.58	74.00	H
7206.000	36.47	7.20	32.76	45.77	56.68	74.00	H
9608.000	38.08	8.56	34.08	46.11	58.68	74.00	H

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamplifier factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2402.000	27.58	5.00	35.04	85.57	83.11	94.00	V
4804.000	31.53	7.65	34.30	45.48	50.36	54.00	V
7206.000	36.47	7.20	32.76	37.05	47.96	54.00	V
9608.000	38.08	8.56	34.08	37.29	49.86	54.00	V
2402.000	27.58	5.00	35.04	81.95	79.49	94.00	H
4804.000	31.53	7.65	34.30	44.84	49.72	54.00	H
7206.000	36.47	7.20	32.76	38.90	43.15	54.00	H
9608.000	38.08	8.56	34.08	37.65	50.21	54.00	H



Band Edge:

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2400.00	37.69	35.04	27.58	6.14	36.37	74.00	V
2483.50	37.76	34.99	27.55	6.30	36.62	74.00	V
2400.00	29.26	35.04	27.58	6.14	27.94	74.00	H
2483.50	31.76	34.99	27.55	6.30	30.62	74.00	H

Average Measurement:


Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2400.00	36.70	35.04	27.58	6.14	35.38	54.00	V
2483.50	36.92	34.99	27.55	6.30	35.78	54.00	V
2400.00	30.90	35.04	27.58	6.14	29.58	54.00	H
2483.50	28.46	34.99	27.55	6.30	27.32	54.00	H

Test at middle Channel in transmitting status

30 MHz~1 GHz Field Strength of Unwanted Emissions.Quasi-Peak Measurement

Vertical:

Peak scan

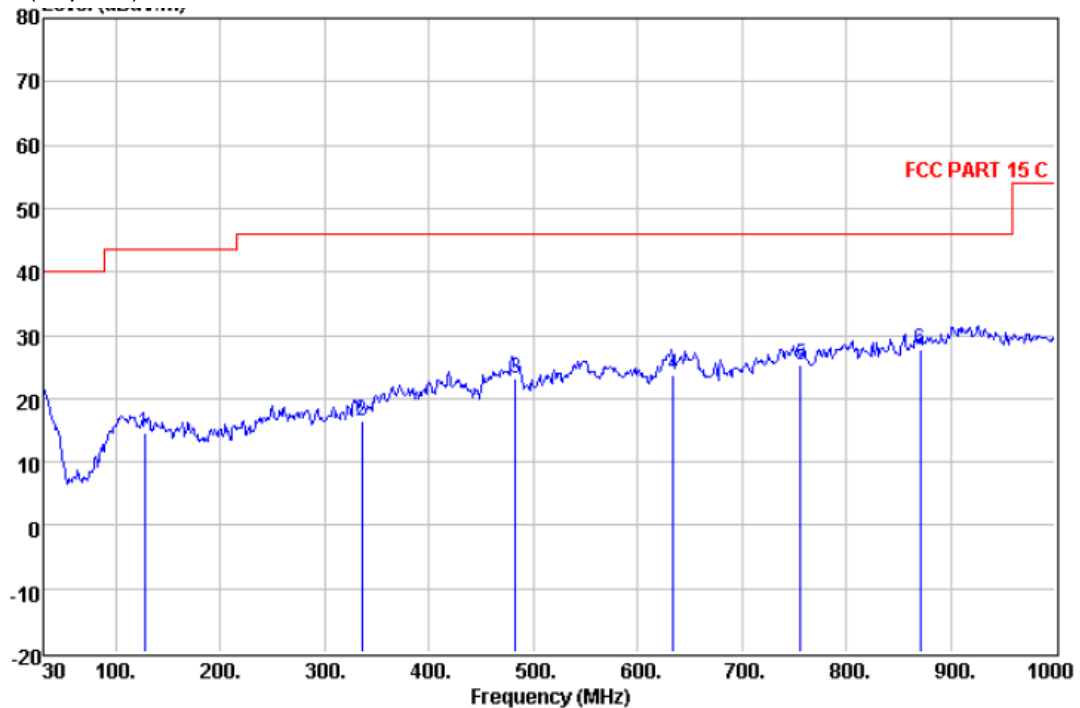Level (dB μ V/m)


Quasi-peak measurement


Freq	ReadAntenna	Cable	Preamp	Over	Limit	Limit	Line	Remark
MHz	Level	Factor	Loss	Factor	Level	Limit	dB μ V/m	
127.000	29.06	11.95	1.12	27.53	14.60	-28.90	43.50	QP
335.550	28.11	13.82	1.92	27.34	16.51	-29.49	46.00	QP
482.990	31.63	17.32	2.34	28.00	23.29	-22.71	46.00	QP
634.310	30.43	18.80	2.66	28.19	23.70	-22.30	46.00	QP
756.530	29.93	20.20	2.93	27.73	25.33	-20.67	46.00	QP
870.990	30.48	20.73	3.39	26.97	27.63	-18.37	46.00	QP



Horizontal:

Peak scan

Level (dB μ V/m)

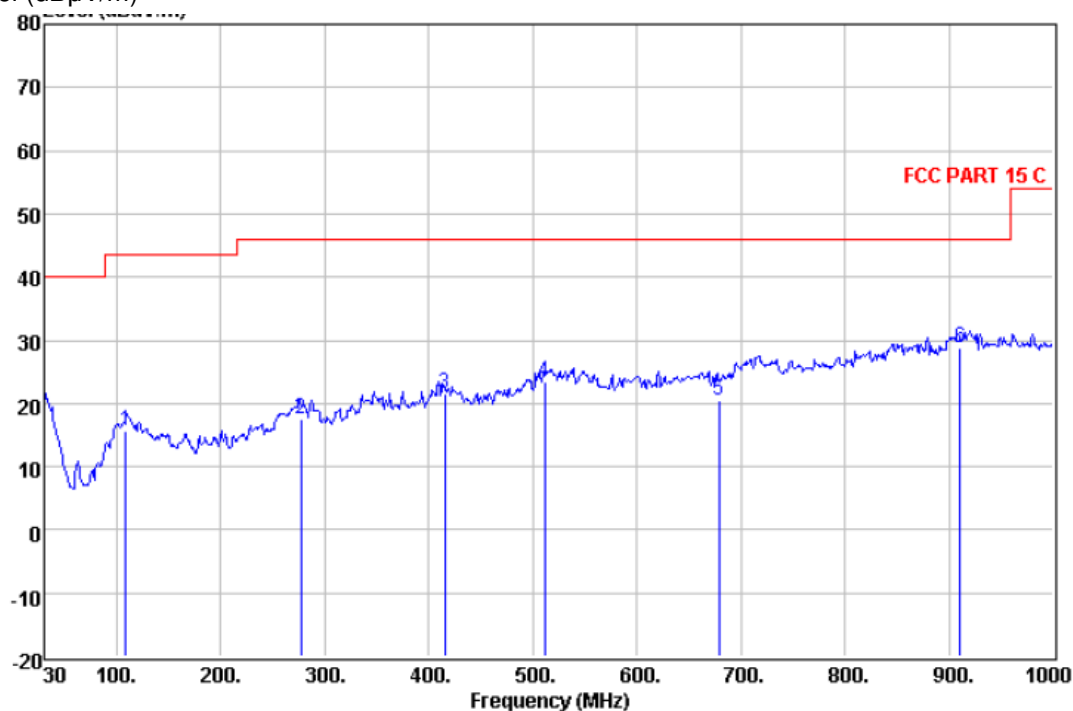

Quasi-peak measurement

Freq	Read	Antenna	Cable	Preamp	Over	Limit	
MHz	Level	Factor	Loss	Factor	Level	Limit	Line Remark
	dBuV				dBuV/m	dB	dBuV/m
108.570	30.56	11.81	1.04	27.63	15.78	-27.72	43.50 QP
277.350	30.70	12.18	1.72	27.10	17.50	-28.50	46.00 QP
415.090	30.90	16.31	2.12	27.81	21.52	-24.48	46.00 QP
511.120	31.48	17.58	2.43	28.08	23.41	-22.59	46.00 QP
678.930	27.03	18.60	2.76	27.98	20.41	-25.59	46.00 QP
910.760	31.00	20.90	3.52	26.75	28.67	-17.33	46.00 QP



1~25 GHz Field Strength of Fundamental & Field Strength of Unwanted Emissions.

Peak & Average Measurement

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2433.000	27.57	4.95	35.02	86.57	84.07	114.00	V
4866.000	31.56	7.75	34.30	47.35	52.36	74.00	V
7299.000	36.50	7.68	32.61	45.82	57.39	74.00	V
9732.000	38.51	8.66	34.17	46.39	59.39	74.00	V
2433.000	27.57	4.95	35.02	83.71	81.21	114.00	H
4866.000	31.56	7.75	34.30	47.57	52.58	74.00	H
7299.000	36.50	7.68	32.61	45.61	57.18	74.00	H
9732.000	38.51	8.66	34.17	46.02	59.02	74.00	H

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2433.000	27.57	4.95	35.02	84.21	81.71	94.00	V
4866.000	31.56	7.75	34.30	44.74	49.75	54.00	V
7299.000	36.50	7.68	32.61	38.26	49.83	54.00	V
9732.000	38.51	8.66	34.17	37.26	50.26	54.00	V
2433.000	27.57	4.95	35.02	81.68	79.18	94.00	H
4866.000	31.56	7.75	34.30	44.85	49.86	54.00	H
7299.000	36.50	7.68	32.61	37.26	48.83	54.00	H
9732.000	38.51	8.66	34.17	37.29	50.29	54.00	H



Band Edge:

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
2400.00	37.69	35.04	27.58	6.14	36.37	74.00	V
2483.50	37.76	34.99	27.55	6.30	36.62	74.00	V
2400.00	29.26	35.04	27.58	6.14	27.94	74.00	H
2483.50	31.76	34.99	27.55	6.30	30.62	74.00	H

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
2400.00	36.70	35.04	27.58	6.14	35.38	54.00	V
2483.50	36.92	34.99	27.55	6.30	35.78	54.00	V
2400.00	30.90	35.04	27.58	6.14	29.58	54.00	H
2483.50	28.46	34.99	27.55	6.30	27.32	54.00	H


Test at high Channel in transmitting status

30 MHz~1 GHz Field Strength of Unwanted Emissions.Quasi-Peak Measurement

Vertical:

Peak scan

Level (dBμV/m)

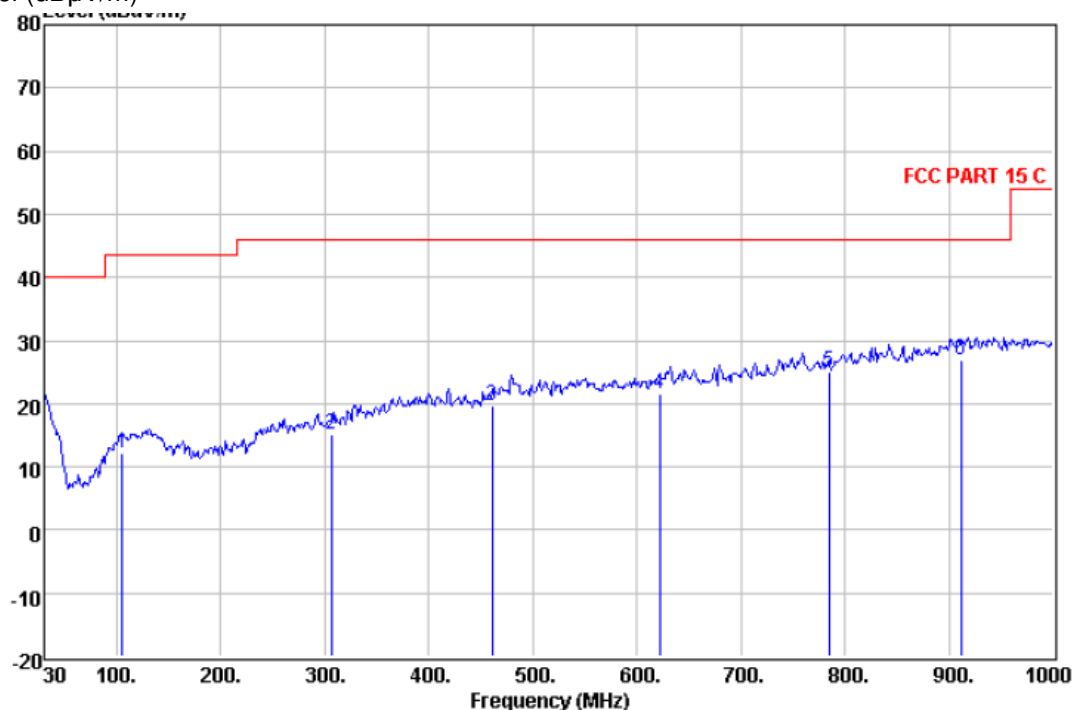

Quasi-peak measurement


Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Over Limit	Limit Line	Remark
MHz	dBμV	dB/m	dB	dB	dBμV/m	dB	dBμV/m	
105.660	27.24	11.64	1.03	27.65	12.26	-31.24	43.50	QP
306.450	27.50	13.00	1.82	27.13	15.19	-30.81	46.00	QP
460.680	28.83	16.50	2.25	27.94	19.64	-26.36	46.00	QP
621.700	28.58	18.50	2.65	28.25	21.48	-24.52	46.00	QP
784.660	29.76	19.85	3.03	27.67	24.97	-21.03	46.00	QP
911.730	29.19	20.93	3.53	26.75	26.90	-19.10	46.00	QP



Horizontal:

Peak scan

Level (dBμV/m)

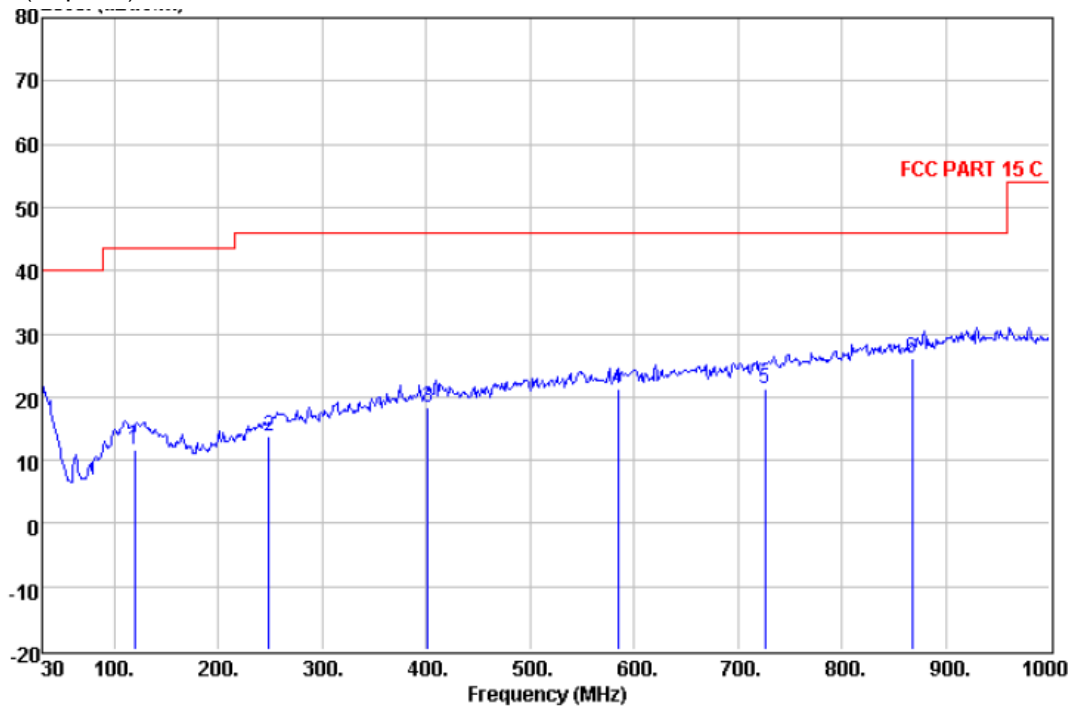

Quasi-peak measurement

Freq	ReadAntenna	Cable	Preamp	Over	Limit	
Level	Factor	Loss	Factor	Level	Limit	Line Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dB
119.240	26.38	11.79	1.08	27.57	11.68	-31.82 43.50 QP
248.250	27.86	11.50	1.59	27.15	13.80	-32.20 46.00 QP
401.510	28.04	16.06	2.08	27.77	18.41	-27.59 46.00 QP
584.840	28.44	18.54	2.57	28.34	21.21	-24.79 46.00 QP
726.460	26.53	19.60	2.86	27.81	21.18	-24.82 46.00 QP
868.080	29.12	20.70	3.36	27.00	26.18	-19.82 46.00 QP



1~25 GHz Field Strength of Fundamental & Field Strength of Unwanted Emissions.

Peak & Average Measurement

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
2475.000	27.56	4.90	34.99	84.60	82.07	114.00	V
4950.000	31.68	7.70	34.30	47.85	52.93	74.00	V
7425.000	36.60	7.47	32.46	46.03	57.63	74.00	V
9900.000	38.68	8.75	34.26	46.10	59.27	74.00	V
2475.000	27.56	4.90	34.99	81.23	78.69	114.00	H
4950.000	31.68	7.70	34.30	46.98	52.06	74.00	H
7425.000	36.60	7.47	32.46	45.30	56.91	74.00	H
9900.000	38.68	8.75	34.26	37.26	50.43	74.00	H

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
2475.000	27.56	4.90	34.99	82.60	80.06	94.00	V
4950.000	31.68	7.70	34.30	45.23	50.31	54.00	V
7425.000	36.60	7.47	32.46	37.26	48.86	54.00	V
9900.000	38.68	8.75	34.26	37.20	50.37	54.00	V
2475.000	27.56	4.90	34.99	79.21	76.67	94.00	H
4950.000	31.68	7.70	34.30	44.62	49.70	54.00	H
7425.000	36.60	7.47	32.46	37.26	48.86	54.00	H
9900.000	38.68	8.75	34.26	37.26	50.43	54.00	H



Band Edge:

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2400.00	37.69	35.04	27.58	6.14	36.37	74.00	V
2483.50	37.76	34.99	27.55	6.30	36.62	74.00	V
2400.00	29.26	35.04	27.58	6.14	27.94	74.00	H
2483.50	31.76	34.99	27.55	6.30	30.62	74.00	H

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2400.00	36.70	35.04	27.58	6.14	35.38	54.00	V
2483.50	36.92	34.99	27.55	6.30	35.78	54.00	V
2400.00	30.90	35.04	27.58	6.14	29.58	54.00	H
2483.50	28.46	34.99	27.55	6.30	27.32	54.00	H

Remark:

1). The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Loss – Preamplifier Factor.

2). As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

3). The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.

Test result: The unit does meet the FCC requirements.



7.4 Occupied Bandwidth

Test Requirement: FCC Part 15 C section 15.249


(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Test Method: ANSI C63.10: Clause 6.9.1

Operation within the band 2.400 to 2.4835 GHz


Method of measurement: A small sample of the transmitter output was fed into the Spectrum Analyzer and the attached plot was taken.

1.Test in the lowest frequency 2.402 GHz

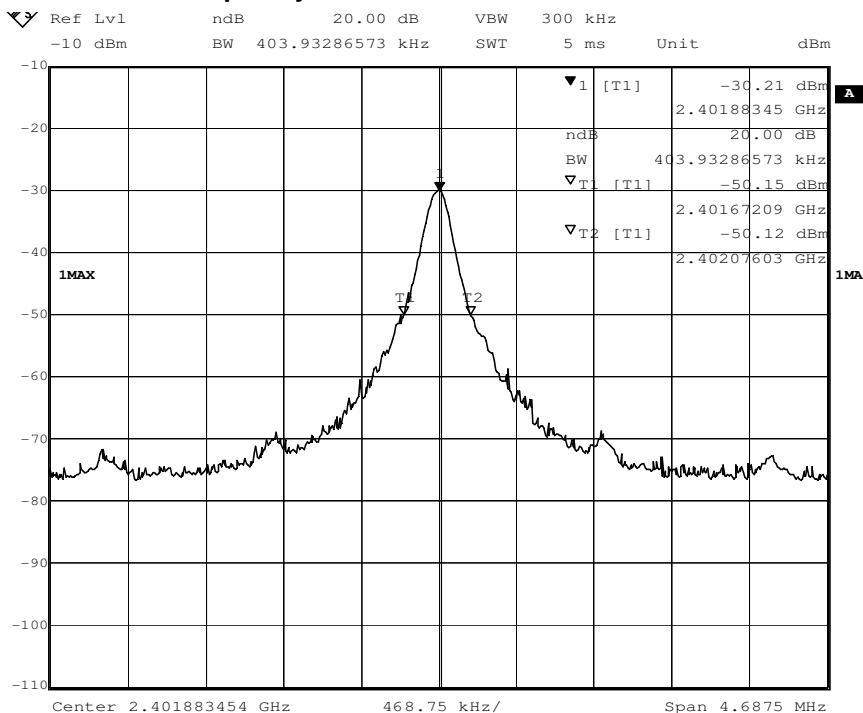




2.Test in the middle frequency 2.433 GHz

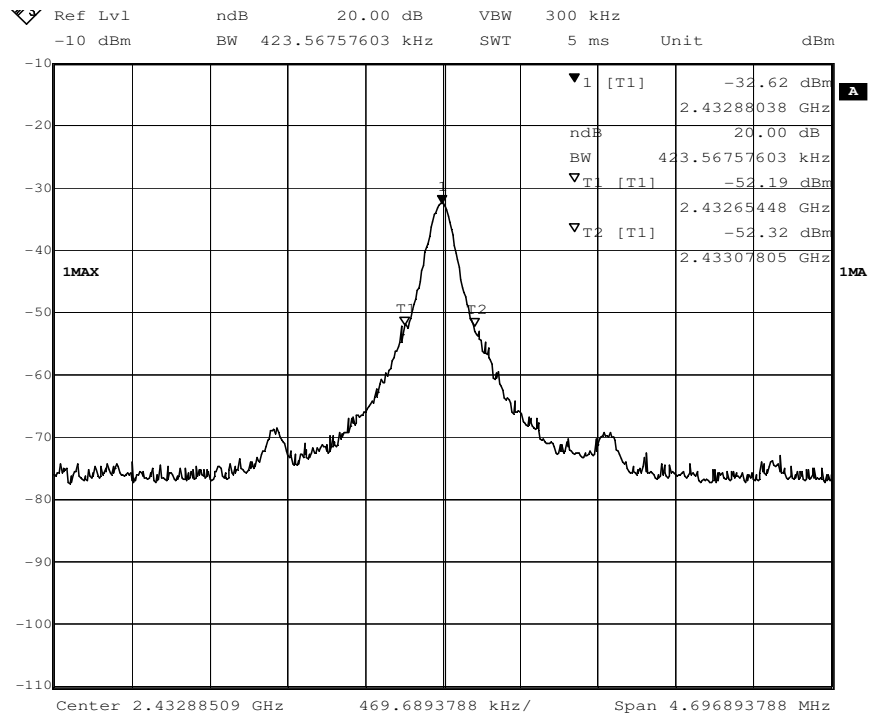

3.Test in the highest frequency 2.475 GHz

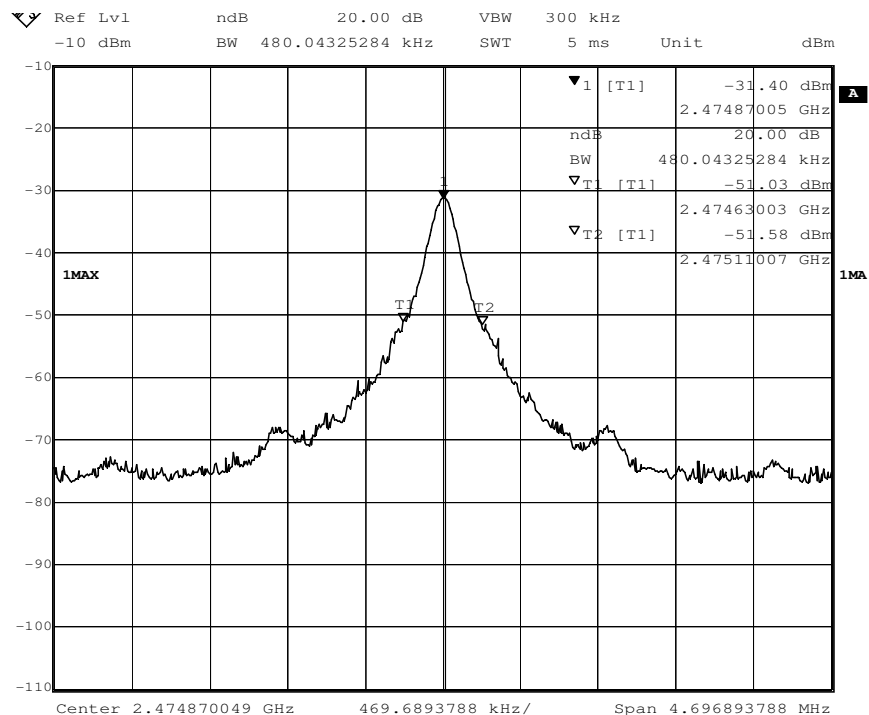

The results: The unit does meet the FCC requirements.

--End of Report--