

FCC RADIO TEST REPORT

according to

47 CFR FCC Part 15 Subpart C § 15.249

Equipment	: Wireless Keyboard with Optical Trackball
Model No.	: GKM-701
Brand Name	: Globlink
Filing Type	: New Application
Applicant	: Globlink Technology Inc. : 2F 101 Rui-Hu Street, Nei-Hu, Taipei, Taiwan
FCC ID	: OR7GKM701
Manufacturer	: Dong Guan Ju Quan Electronic Technology Ltd : The area of Administration of Lang Bei
Received Date	: May 09, 2007
Final Test Date	: Jul. 06, 2007

Statement

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Testing Laboratory
1190
ILAC MRA

SPORTON International Inc.

6F, No. 106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Table of Contents

1. SUMMARY OF THE TEST RESULT	2
2. GENERAL INFORMATION.....	3
2.1. Product Details	3
2.2. Table for Carrier Frequencies	3
2.3. Table for Test Modes	3
2.4. Table for Testing Locations.....	4
2.5. Table for Supporting Units.....	4
2.6. Test Configurations	4
3. TEST RESULT	5
3.1. AC Power Line Conducted Emissions Measurement.....	5
3.2. Field Strength of Fundamental Emissions Measurement.....	8
3.3. 20dB Spectrum Bandwidth Measurement.....	10
3.4. Radiated Emissions Measurement.....	13
3.5. Band Edge Emissions Measurement	25
3.6. Antenna Requirements.....	27
4. LIST OF MEASURING EQUIPMENTS	28
5. TEST LOCATION	29
6. TAF CERTIFICATE OF ACCREDITATION.....	30
APPENDIX A. TEST PHOTOS	A1 ~ A3
APPENDIX B. PHOTOGRAPHS OF EUT	B1 ~ B8

History of This Test Report

Original Issue Date: Jul. 20, 2007

Report No.: FR750210

■ No additional attachment.

Additional attachment were issued as following record:

CERTIFICATE OF COMPLIANCE

according to

47 CFR FCC Part 15 Subpart C § 15.249

Equipment : Wireless Keyboard with Optical Trackball

Model No. : GKM-701

Brand Name : Globlink

Applicant : **Globlink Technology Inc.**
2F 101 Rui-Hu Street, Nei-Hu, Taipei, Taiwan

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on May 09, 2007 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.


Wayne Hsu

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
3.1	15.207	AC Power Line Conducted Emissions	-	-
3.2	15.249(a)	Field Strength of Fundamental Emissions	Complies	26.80 dB
3.3	15.215(c)	20dB Spectrum Bandwidth	Complies	-
3.4	15.249(a)/(d)	Radiated Emissions	Complies	3.30 dB
3.5	15.249(d)	Band Edge Emissions	Complies	9.44 dB
3.6	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Field Strength of Fundamental Emissions	±0.8dB	Confidence levels of 95%
20dB Spectrum Bandwidth	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

2. GENERAL INFORMATION

2.1. Product Details

Items	Description
Power Type	3VDC from batteries
Modulation	GFSK
Frequency Range	2400 ~ 2483.5MHz
Channel Number	8
Channel Band Width (99%)	1.07 MHz
Max. Field Strength	67.20 dBuV/m at 3m (Average)
Antenna	Printed Antenna

2.2. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency
2400 ~ 2483.5MHz	1	2423 MHz
	2	2431 MHz
	3	2439 MHz
	4	2447 MHz
	5	2453 MHz
	6	2461 MHz
	7	2469 MHz
	8	2477 MHz

2.3. Table for Test Modes

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Channel	Antenna
AC Power Line Conducted Emissions	-	-	-
Field Strength of Fundamental Emissions	CTX	1/4/8	1
20dB Spectrum Bandwidth			
Radiated Emissions 9kHz~1GHz	CTX	4	1
Radiated Emissions 1GHz~10 th Harmonic	CTX	1/4/8	1
Band Edge Emissions	CTX	1/8	1

Note: CTX=continuously transmitting


2.4. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH02-HY	SAC	Hwa Ya	101377	IC 4088	-
CO01-HY	Conduction	Hwa Ya	101377	IC 4088	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

2.5. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	D400	DoC
Notebook	DELL	D505	DoC
Printer	EPSON	C60	DoC
Modem	ACEEX	DM1414	IFAXDM1414

2.6. Test Configurations**2.6.1. Radiation Emissions Test Configuration**

3. TEST RESULT

3.1. AC Power Line Conducted Emissions Measurement

3.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

3.1.2. Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

3.1.4. Test Setup Layout

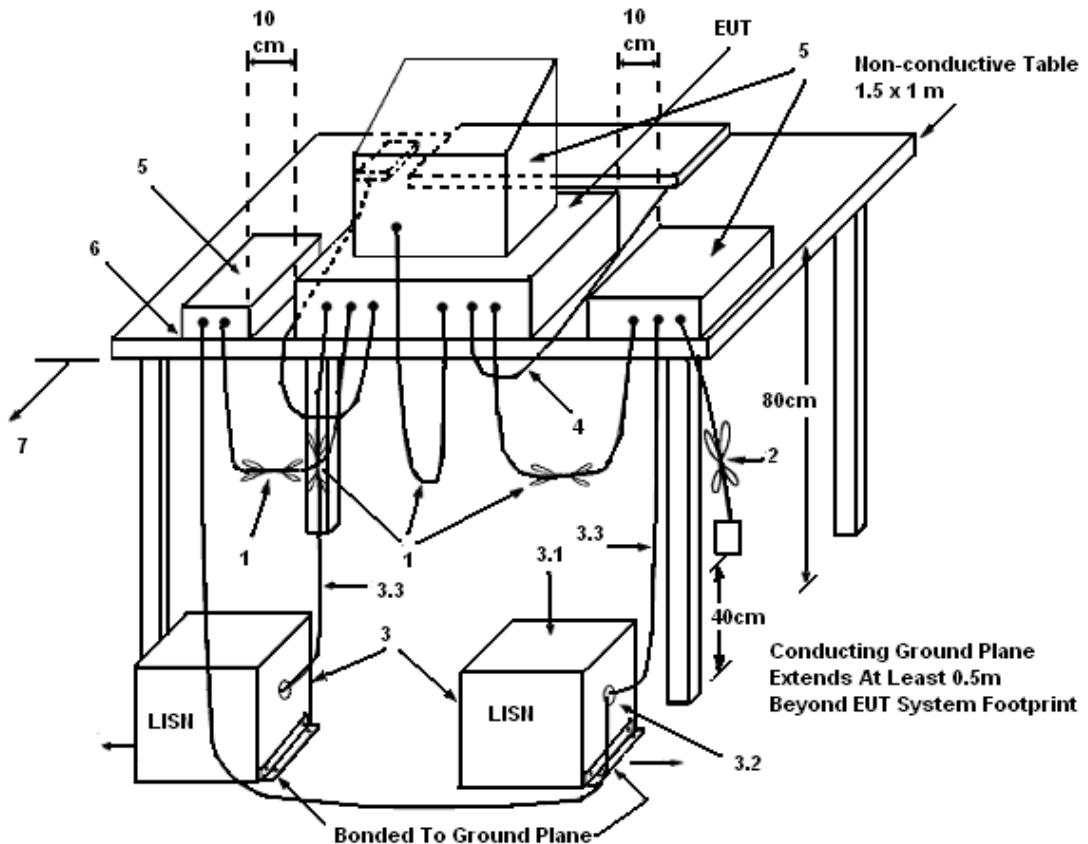

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

3.1.5. Test Deviation

There is no deviation with the original standard.

3.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

3.1.7. Results of AC Power Line Conducted Emissions Measurement

The transmitter is battery powered; there is no need to do this testing.

3.2. Field Strength of Fundamental Emissions Measurement

3.2.1. Limit

The field strength of fundamental emissions within these bands specified at a distance of 3 meters (measurement instrumentation employing an average detector) shall comply with the following table.

Frequency Band (MHz)	Fundamental Emissions Limit (dBuV/m) at 3m
2400-2483.5	94
5725-5875	94

3.2.2. Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Power Meter Parameter	Setting
RB	1 MHz Peak / 1MHz Average
VB	1 MHz Peak / 10Hz Average
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

3.2.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. For Fundamental emissions, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

3.2.4. Test Setup Layout

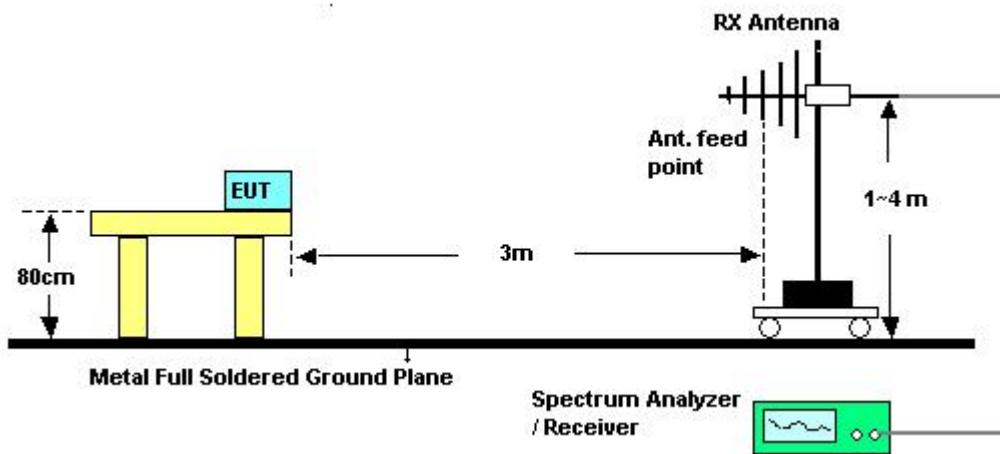

3.2.5. Test Deviation

There is no deviation with the original standard.

3.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.2.7. Test Result of Field Strength of Fundamental Emissions

Temperature	28°C	Humidity	58%
Test Engineer	Murphy Lin	Configurations	Channel 1/4/8

Ch.	Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Read Level (dBuV)	Cable Loss (dB)	Remark	Pol.
1	2422.86	70.27	-43.73	114.00	38.51	3.45	Peak	V
1	2422.86	66.38	-27.62	94.00	34.62	3.45	Average	V
4	2447.18	69.92	-44.08	114.00	38.11	3.45	Peak	V
4	2447.18	57.26	-36.74	94.00	25.45	3.45	Average	V
8	2477.01	68.80	-45.20	114.00	36.87	3.48	Peak	V
8	2477.01	67.20	-26.80	94.00	35.27	3.48	Average	V

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.3. 20dB Spectrum Bandwidth Measurement

3.3.1. Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (2400 ~ 2483.5MHz).

3.3.2. Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

3.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.

3.3.4. Test Setup Layout

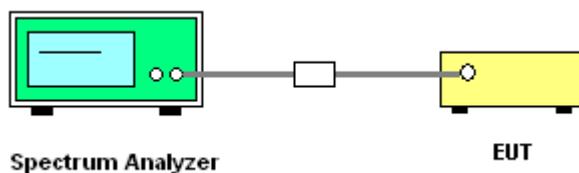

3.3.5. Test Deviation

There is no deviation with the original standard.

3.3.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

3.3.7. Test Result of 20dB Spectrum Bandwidth

Temperature	28°C	Humidity	58%
Test Engineer	Murphy Lin	Configurations	Channel 1/4/8


Frequency	20dB BW (MHz)	99% OBW (MHz)	Frequency range (MHz) $f_L > 2400\text{MHz}$	Frequency range (MHz) $f_H < 2483.5\text{MHz}$	Test Result
2423 MHz	0.92	0.81	2422.3920	-	Complies
2447 MHz	1.25	0.97	-	-	Complies
2477 MHz	1.34	1.07	-	2477.7120	Complies

20 dB/99% Bandwidth Plot on 2423 MHz

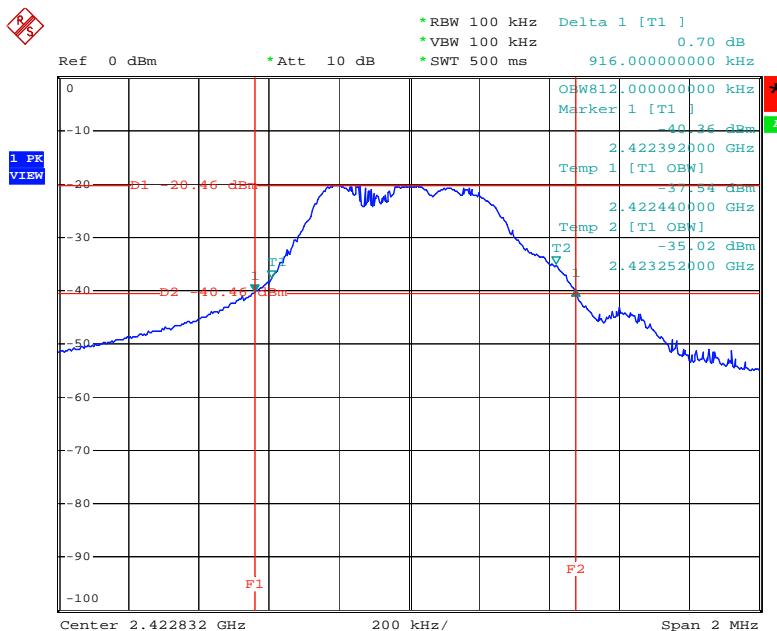


Date: 4.JUL.2007 04:09:24

20 dB/99% Bandwidth Plot on 2447 MHz

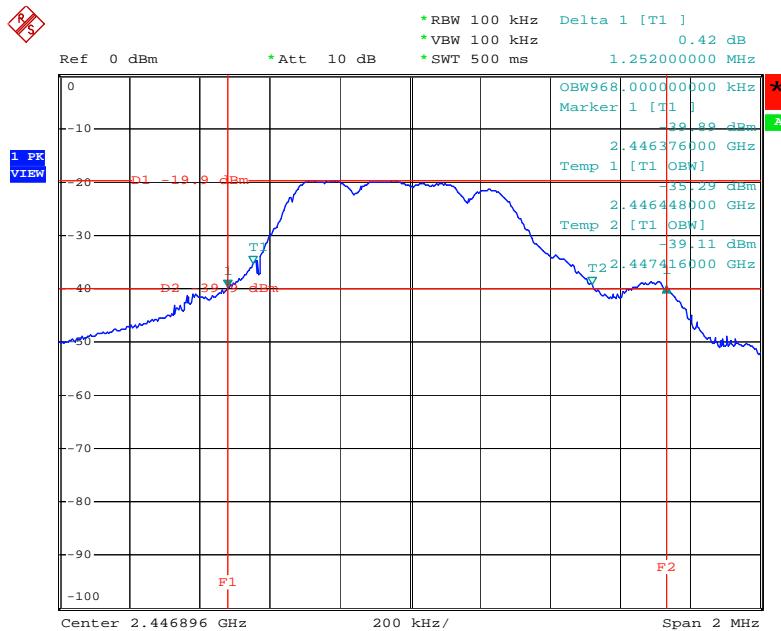

Date: 4.JUL.2007 04:13:13

20 dB/99% Bandwidth Plot on 2477 MHz

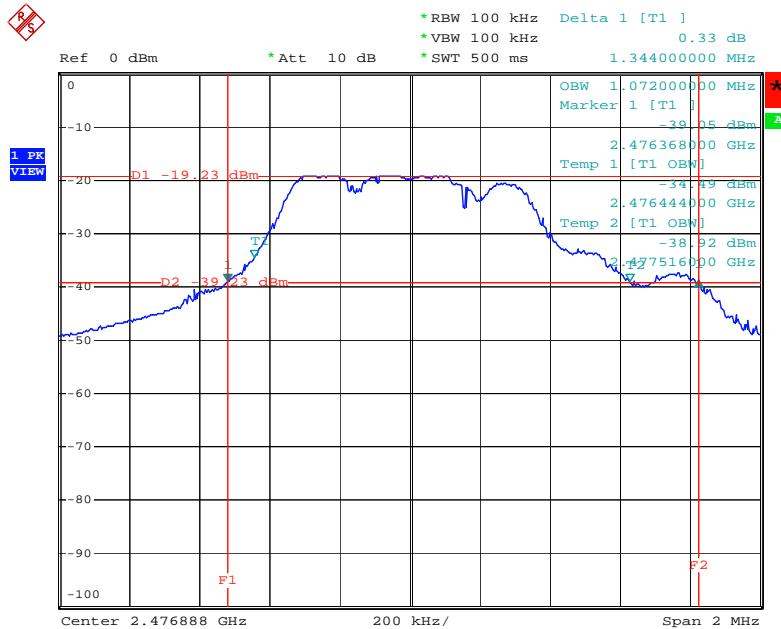

Date: 4.JUL.2007 04:16:28

3.4. Radiated Emissions Measurement

3.4.1. Limit

Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.4.2. Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.4.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

3.4.4. Test Setup Layout

For radiated emissions below 30MHz

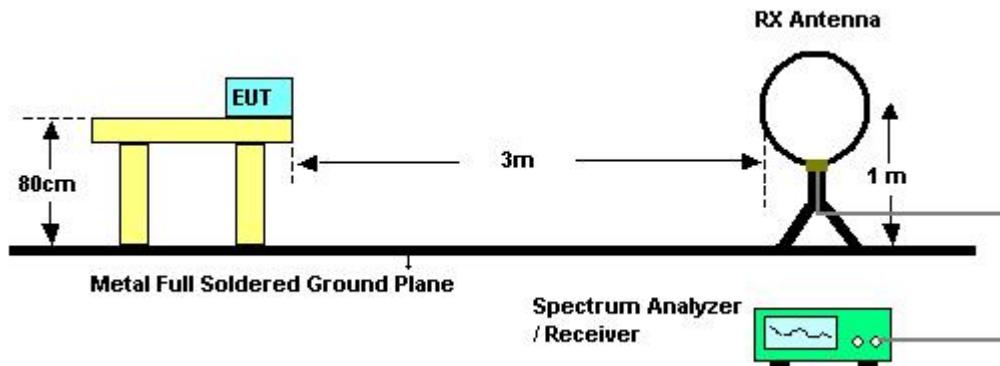

For radiated emissions above 30MHz

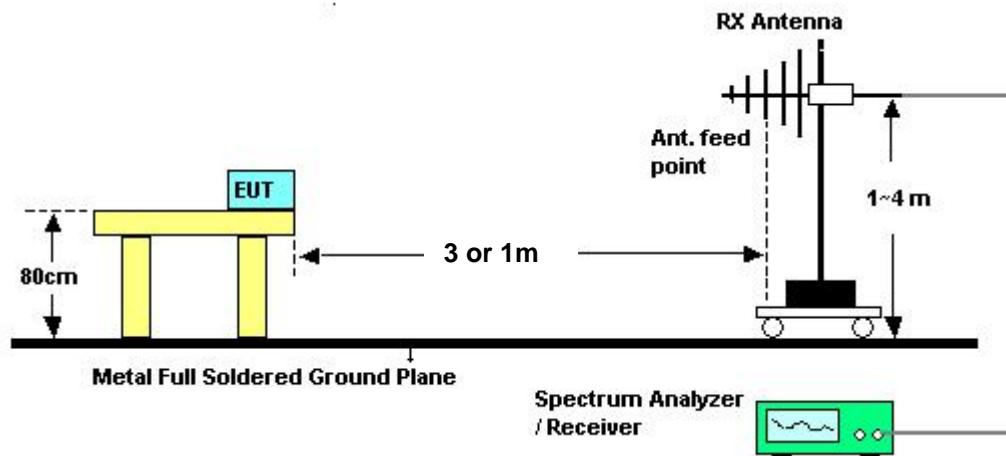

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

3.4.5. Test Deviation

There is no deviation with the original standard.

3.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.4.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25°C	Humidity	55%
Test Engineer	Duncan Chang		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


3.4.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	25°C	Humidity	55%
Test Engineer	Duncan Chang	Configurations	TX Mode

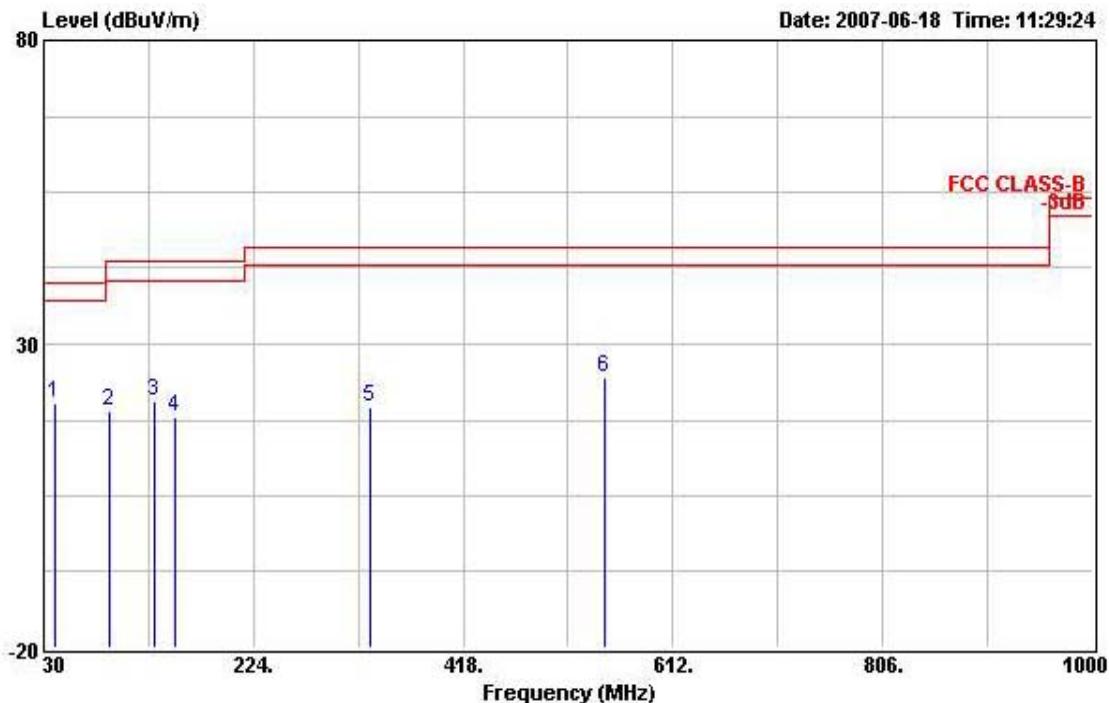Horizontal

Freq	Level	Over	Limit	Read	Cable	Ant	Table	
		Limit	Line	Level	Cable			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB			
1	39.700	20.15	-19.85	40.00	36.37	1.37 Peak	---	---
2	90.140	19.02	-24.48	43.50	38.39	1.93 Peak	---	---
3	132.820	20.72	-22.78	43.50	36.58	2.30 Peak	---	---
4	152.220	17.83	-25.67	43.50	35.32	2.48 Peak	---	---
5	331.670	19.71	-26.29	46.00	32.28	3.57 Peak	---	---
6	548.950	24.40	-21.60	46.00	30.98	4.48 Peak	---	---

Vertical

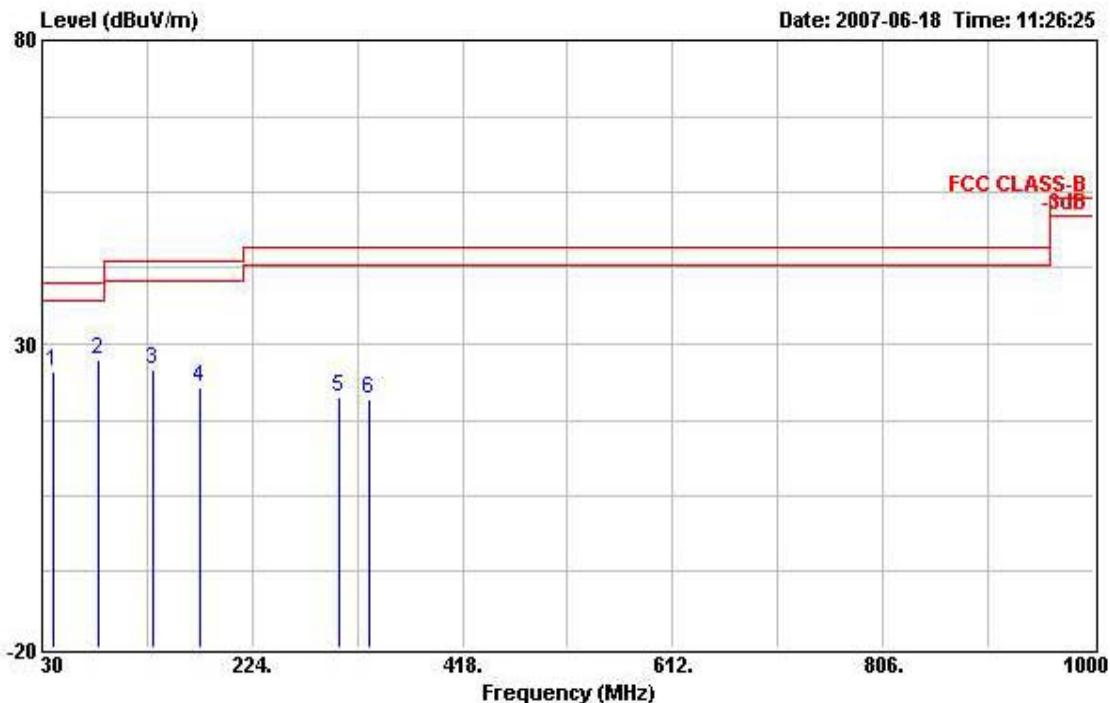

Freq	Level	Over	Limit	Read	Cable	Remark	Ant	Table
		Limit	Line	Level	Loss			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB		cm	deg
1	39.700	25.49	-14.51	40.00	41.71	1.37 Peak	---	---
2	82.380	27.46	-12.54	40.00	48.55	1.76 Peak	---	---
3	132.820	25.92	-17.58	43.50	41.78	2.30 Peak	---	---
4	175.500	22.88	-20.62	43.50	41.07	2.58 Peak	---	---
5	303.540	21.13	-24.87	46.00	34.30	3.46 Peak	---	---
6	331.670	20.85	-25.15	46.00	33.42	3.57 Peak	---	---

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


3.4.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	25°C	Humidity	55%
Test Engineer	Duncan Chang	Configurations	Channel 1

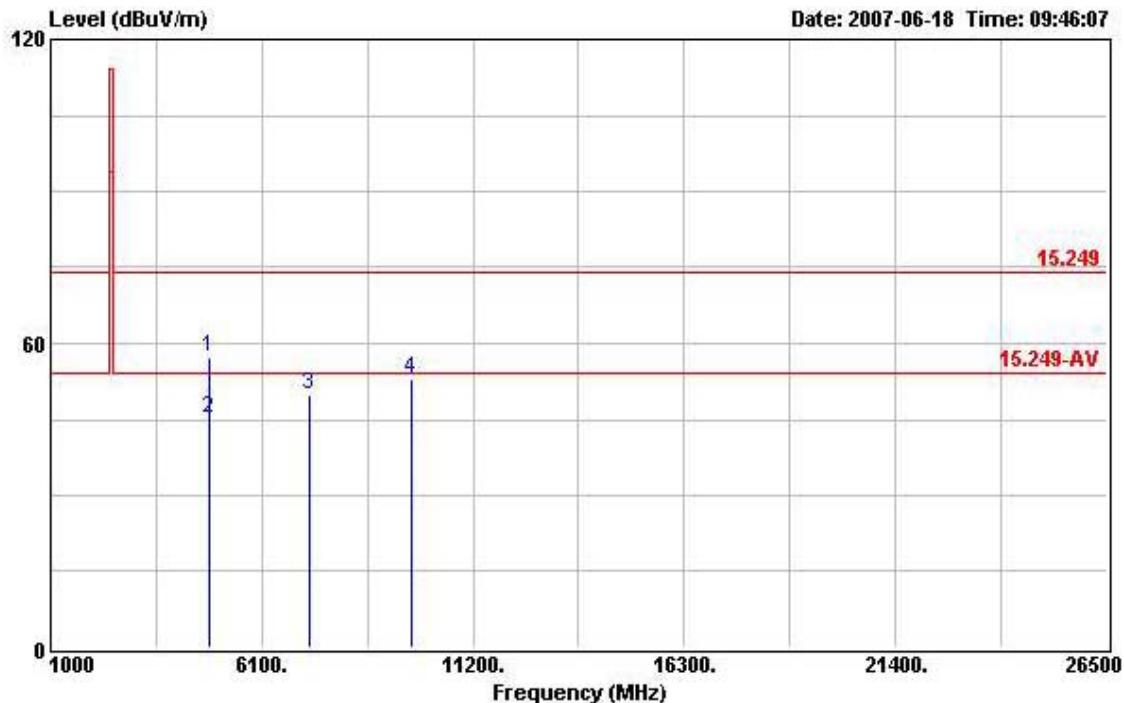Horizontal


Freq	Level	Over	Limit	Read	Cable	Ant	Table
		Line	Level	Level	Cable		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB		
1 4848.000	57.28	-16.72	74.00	53.24	3.28	Peak	---
2 4848.000	45.23	-8.77	54.00	41.19	3.28	Average	---
3 7266.000	49.92	-4.08	54.00	41.72	4.53	Average	---
4 9692.000	52.83	-21.17	74.00	41.75	5.88	Peak	---

Vertical

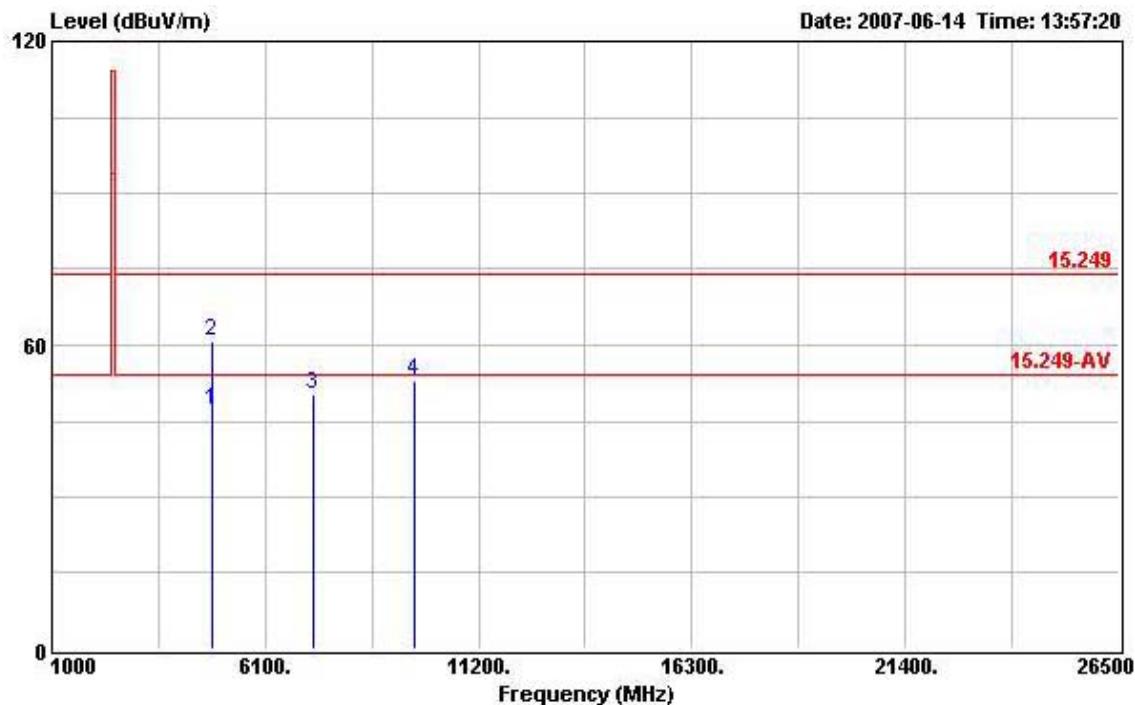


Freq	Level	Over	Limit	Read	Cable	Ant	Table
		Limit	Line	Level	Loss		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg
1 4848.000	47.31	-6.69	54.00	43.27	3.28	Average	---
2 4848.000	60.59	-13.41	74.00	56.55	3.28	Peak	---
3 7270.000	50.18	-3.82	54.00	41.98	4.53	Average	---
4 9684.000	52.95	-21.05	74.00	41.87	5.88	Peak	---

Temperature	25°C	Humidity	55%
Test Engineer	Duncan Chang	Configurations	Channel 4

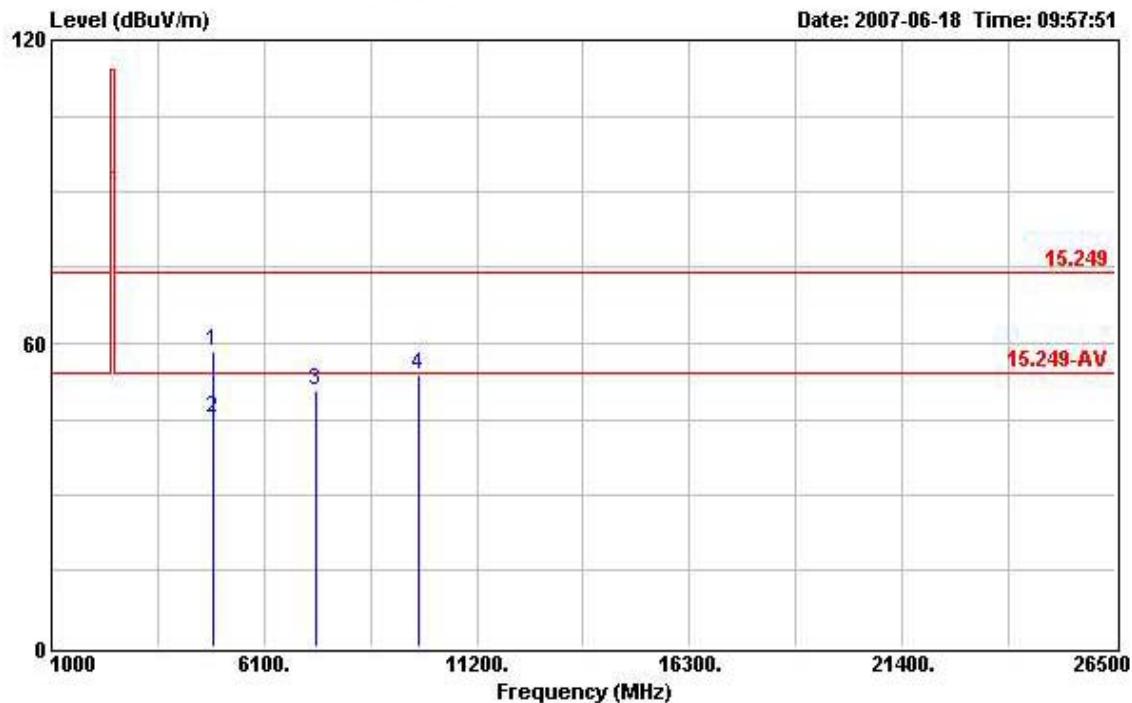Horizontal


Freq	Level	Over	Limit	Read	Cable	Ant	Table		
		Limit	Line	Level	Loss			Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB		cm	deg
1	4896.000	58.41	-15.59	74.00	54.28	3.27	Peak	---	---
2	4896.000	45.10	-8.90	54.00	40.97	3.27	Average	---	---
3	7359.000	50.53	-3.47	54.00	42.14	4.51	Average	---	---
4	9808.000	53.77	-20.23	74.00	42.54	5.99	Peak	---	---

Vertical

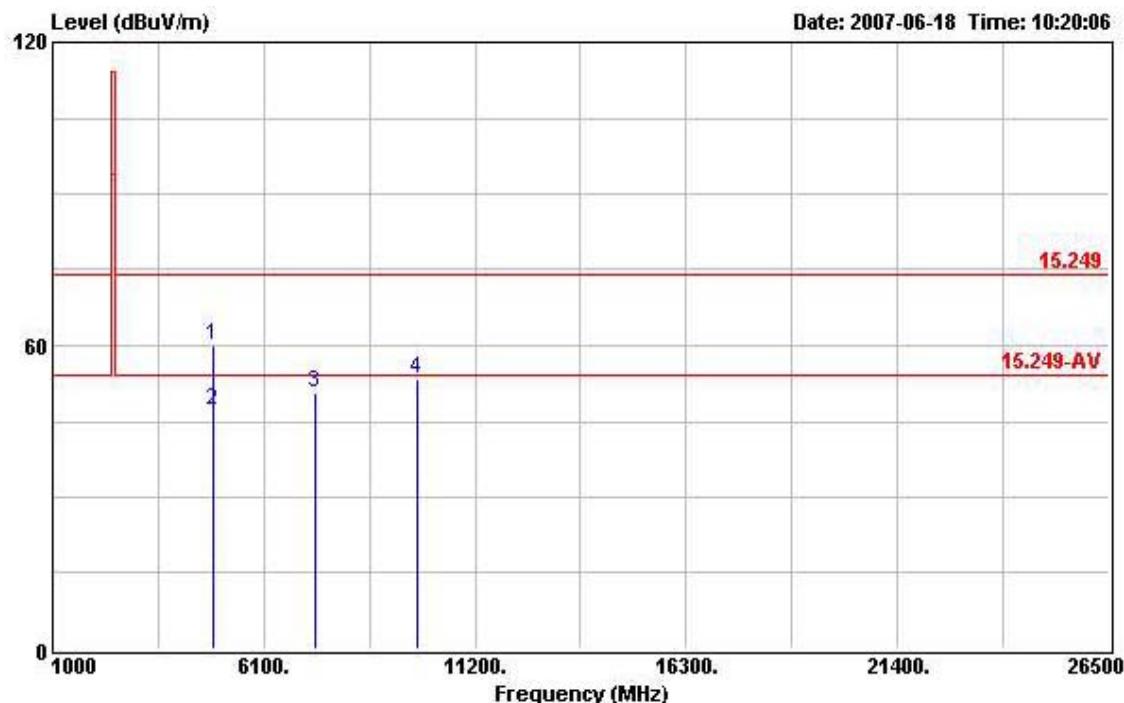


Freq	Level	Over	Limit	Read	Cable	Ant	Table
		Limit	Line	Level	Loss		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg
1	4896.000	59.93	-14.07	74.00	55.80	3.27	Peak
2	4896.000	47.28	-6.72	54.00	43.15	3.27	Average
3	7355.000	50.70	-3.30	54.00	42.31	4.51	Average
4	9812.000	53.38	-20.62	74.00	42.12	6.02	Peak

Temperature	25°C	Humidity	55%
Test Engineer	Duncan Chang	Configurations	Channel 8

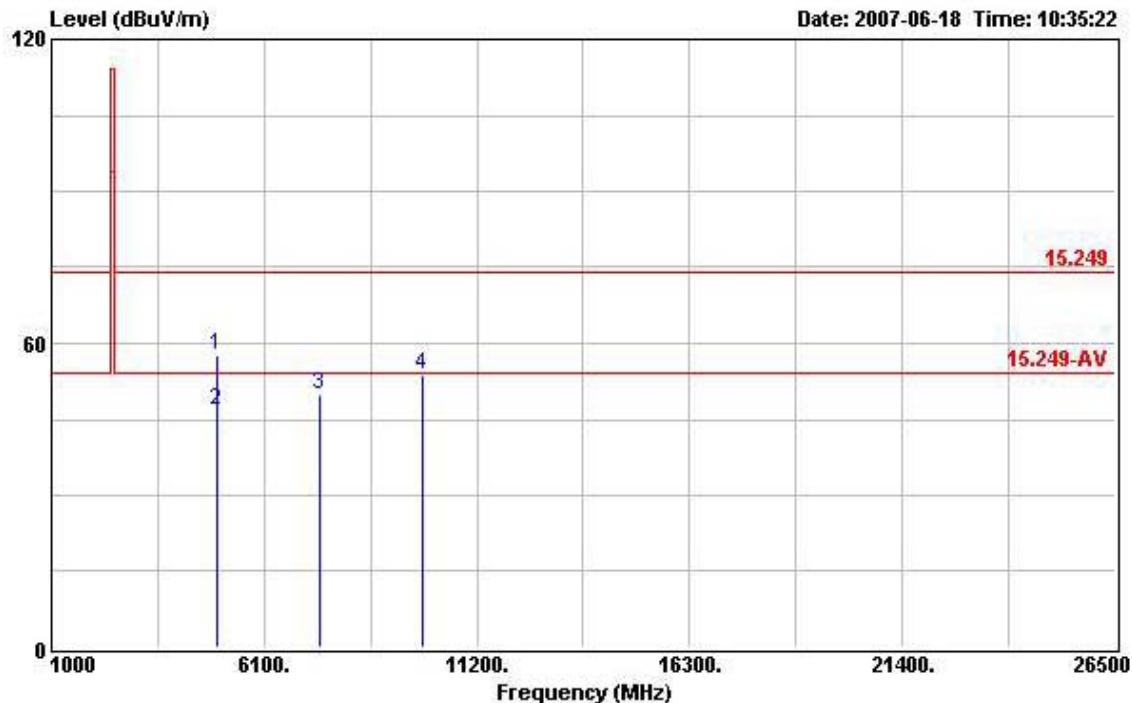Horizontal

Freq	Level	Over	Limit	Read	Cable	Ant	Table
		Line	Level	Level	Loss		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg
1 4956.000	57.52	-16.48	74.00	53.30	3.24	Peak	---
2 4956.000	46.64	-7.36	54.00	42.42	3.24	Average	---
3 7431.000	50.04	-3.96	54.00	41.50	4.48	Average	---
4 9904.000	53.72	-20.28	74.00	42.34	6.10	Peak	---

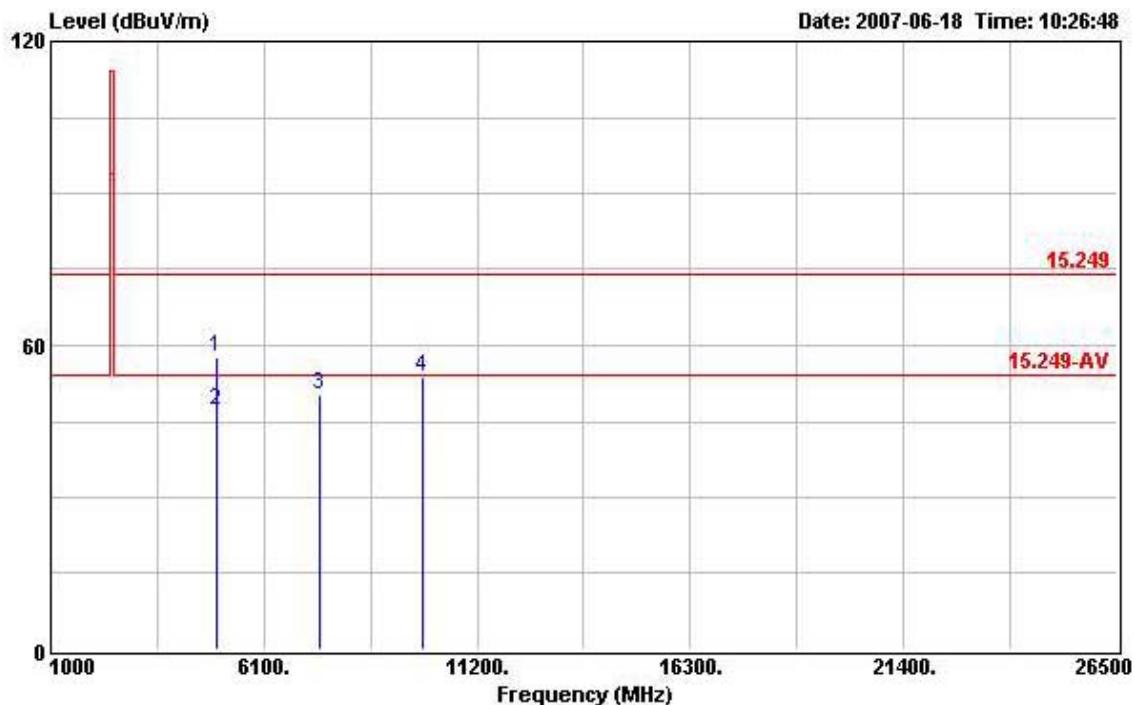Vertical

Freq	Level	Over	Limit	Read	Cable	Ant	Table
		Limit	Line	Level	Loss		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg
1 4956.000	57.62	-16.38	74.00	53.40	3.24	Peak	---
2 4956.000	47.18	-6.82	54.00	42.96	3.24	Average	---
3 7431.000	50.39	-3.61	54.00	41.85	4.48	Average	---
4 9912.000	53.78	-20.22	74.00	42.40	6.10	Peak	---

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.5. Band Edge Emissions Measurement

3.5.1. Limit

Band edge emissions radiated outside of the specified frequency bands shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.5.2. Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

3.5.3. Test Procedures

1. The test procedure is the same as section 3.2.3, only the frequency range investigated is limited to 2MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

3.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 3.2.4.

3.5.5. Test Deviation

There is no deviation with the original standard.

3.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.5.7. Test Result of Band Edge

Temperature	25°C	Humidity	55%
Test Engineer	Duncan Chang	Configurations	Channel 1, 8

Channel 1

Freq	Level	Over Limit		Read Level	Cable		Ant Pos	Table Pos
		MHz	dBuV/m		dB	dBuV/m	dBuV	
1	2390.000	55.03	-18.97	74.00	23.39	3.43	Peak	---
1	2390.000	44.16	-9.84	54.00	12.52	3.43	Average	---

Channel 8

Freq	Level	Over Limit		Read Level	Cable		Ant Pos	Table Pos
		MHz	dBuV/m		dB	dBuV/m	dBuV	
2	2483.500	55.29	-18.71	74.00	23.36	3.48	Peak	---
2	2483.500	44.56	-9.44	54.00	12.63	3.48	Average	---

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.6. Antenna Requirements

3.6.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

3.6.2. Antenna Connector Construction

Please refer to section 2.1 in this test report, antenna connector complied with the requirements.

4. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100132	9kHz – 2.75GHz	Aug. 30, 2006	Conduction (CO01-HY)
LISN	MessTec	NNB-2/16Z	2001/004	9kHz – 30MHz	Mar. 30, 2007	Conduction (CO01-HY)
LISN (Support Unit)	MessTec	NNB-2/16Z	2001/009	9kHz – 30MHz	Mar. 30, 2007	Conduction (CO01-HY)
EMI Filter	LINDGREN	LRE-2060	1004	< 450Hz	N/A	Conduction (CO01-HY)
EMI Filter	LINDGREN	N6006	201052	0 – 60Hz	N/A	Conduction (CO01-HY)
RF Cable-CON	Suhner Switzerland	RG223/U	CB029	9kHz – 30MHz	Dec. 04, 2006	Conduction (CO01-HY)
Isolation Transformer	Erika Fiedler OHG	D-65396 Walluf	58	45MHz-2.15GHz	N/A	Conduction (CO01-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30 MHz - 1 GHz 3m	May 14, 2007	Radiation (03CH02-HY)
Amplifier	ADVANTEST	BB525C	CH300001	9 kHz - 2 GHz	Nov 21, 2006	Radiation (03CH02-HY)
Spectrum Analyzer	R&S	FSP40	100305/040	9 kHz - 40GHz	Dec. 15, 2006	Radiation (03CH02-HY)
Receiver	SCHAFFNER	SCR3501	416	9 kHz - 1 GHz	Feb. 15, 2007	Radiation (03CH02-HY)
Bilog Antenna	SCHAFFNER	CBL61128	2723	30 MHz - 2 GHz	Nov. 28, 2006	Radiation (03CH02-HY)
Turn Table	HD	DS 420	420/649/00	0 - 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	HD	MA 240	240/559/00	1 m - 4 m	N/A	Radiation (03CH02-HY)
RF Cable-R03m	Jye Bao	RG142	CB020	30 MHz - 1 GHz	Dec. 02, 2006	Radiation (03CH02-HY)
Spectrum Analyzer	R&S	FSP30	100023	9kHz ~ 30GHz	Dec. 17, 2006	Conducted (TH01-HY)
Power Meter	R&S	NRVD	100764	DC ~ 40GHz	Jul. 20, 2006	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100666	DC ~ 40GHz	Jul. 20, 2006	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jun. 27, 2007	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 03, 2007	Conducted (TH01-HY)
Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 02, 2006	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 01, 2006	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 01, 2006	Conducted (TH01-HY)
Vector Signal Generator	R&S	SMU200A	102098	100kHz ~ 6GHz	Nov. 14, 2006	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 07, 2007	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	May 04, 2007*	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.

5. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

6. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-070110

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria : ISO/IEC 17025:2005
Accreditation Number : 1190
Originally Accredited : December 15, 2003
Effective Period : January 10, 2007 to January 09, 2010
Accredited Scope : Testing Field, see described in the Appendix
Specific Accreditation Program : Accreditation Program for Designated Testing Laboratory
for Commodities Inspection
: Accreditation Program for Telecommunication Equipment
Testing Laboratory

Jay-San Chen
President, Taiwan Accreditation Foundation
Date : January 10, 2007

P1, total 9 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when used without the Appendix.