



REV	REF	DESCRIPTION OF CHANGE	CHK BY	DATE
02		FILM # WAS: LS-1036; ADDED RECES FOR 3.5mm. CHANGE MATERIAL CALL OUT	TN	13JUN11

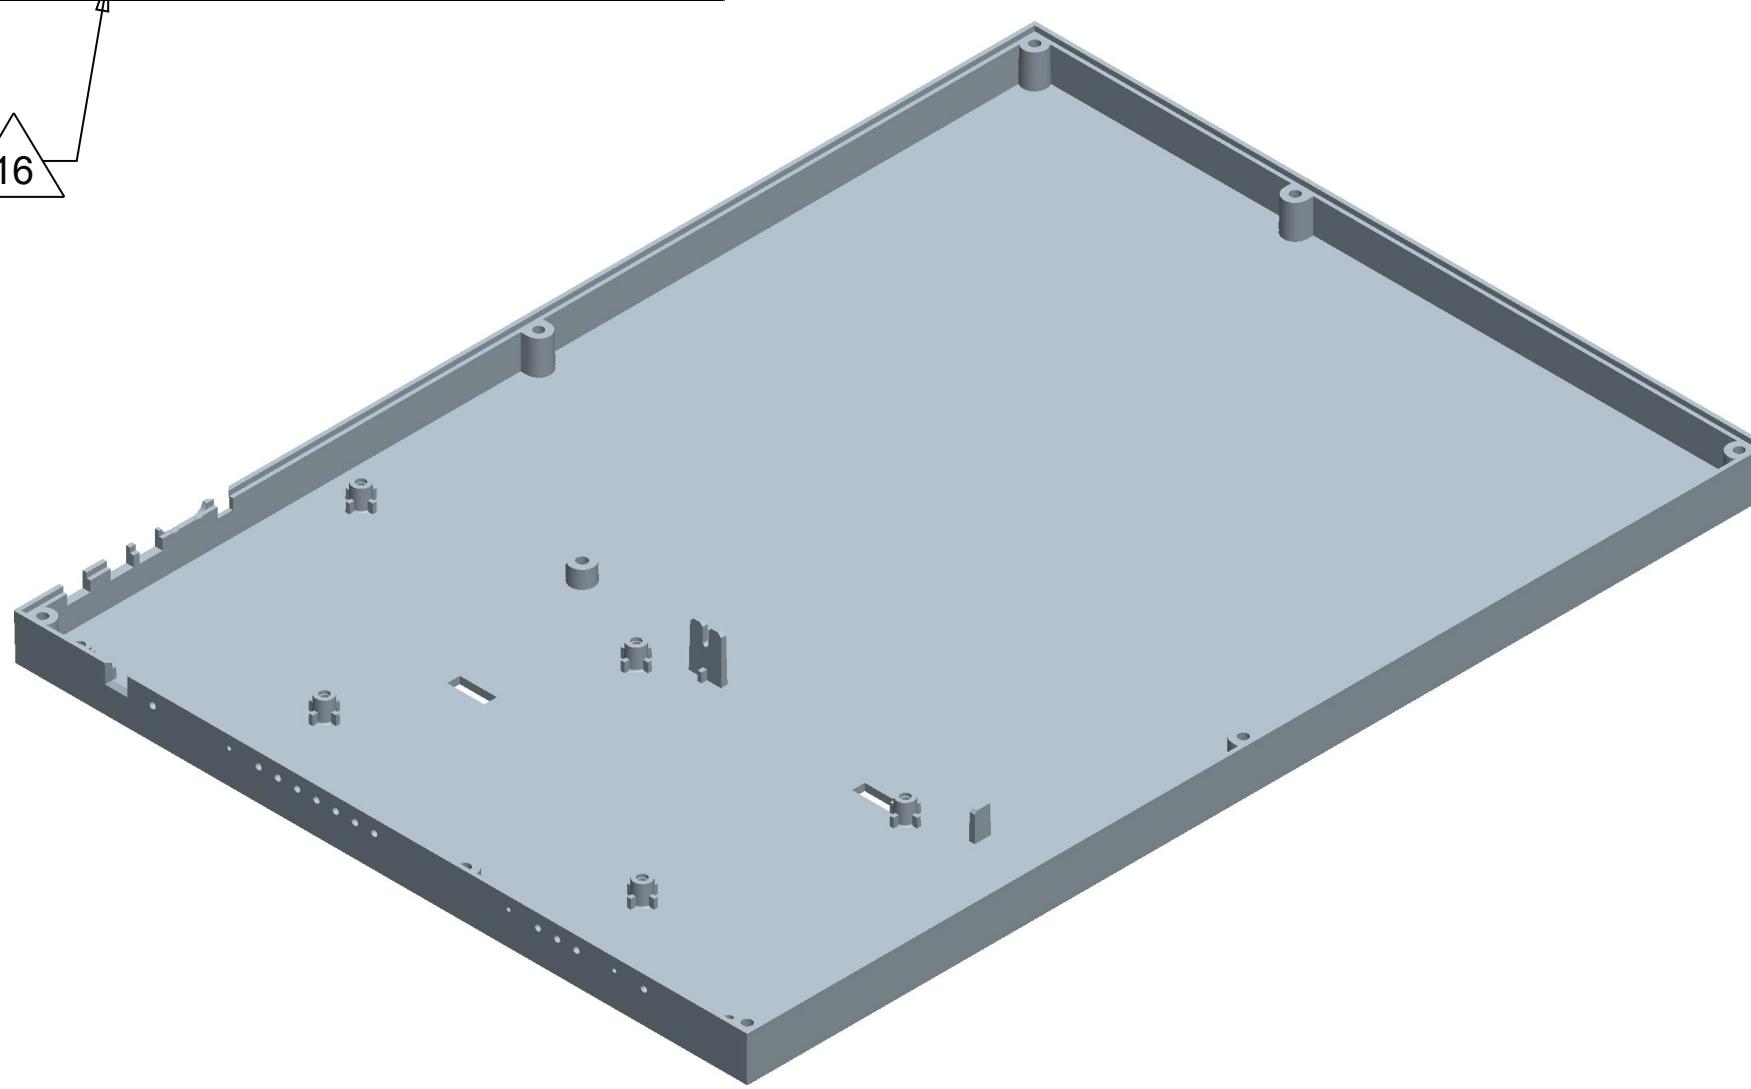

- 16 FILM NUMBER: LS-1036-A
- 15. ALL OUTSIDE SURFACES: TEXTURE MOLD-TECH MT 11010
- 14. UL REQUIRED MARKINGS & DOCUMENTATION FOR SUBPARTS WITH UL REQUIREMENTS, MUST BE INCLUDED WITH EACH SHIPMENT.
- 13. PARTS MUST BE FABRICATED/MOLDED BY A UL RECOGNIZED FABRICATOR/MOLDER. MATERIAL AND PROCESS MUST BE UL RECOGNIZED.
- 12 MOLD REVISION DATE CODE AND REVISION NUMBER TO BE ENGRAVED IN THIS AREA.
- 11 PLASTIC RECYCLING CODE ">PC/ABS<" THIS AREA. RAISED/RECESSED TEXT HEIGHT .094 X .003/.006
- 10. ALL MATERIALS AND PROCESSES SHALL BE ROHS COMPLIANT
- 9. MOLD DESIGN TO BE APPROVED BY LIGHTSPEED INC.
- 8. COSMETIC GRADE B ALL SURFACES
- 7. UL 94 HB FLAME RATED
- 6. CORNERS AND FILLETS MODELED SHARP: R .005 MAX
- 5. SINK: .005MAX
- 4. FLASH: .008 MAX
- 3. EJECTOR MARKS: +.xxx/-yyy MAX
- 2. DEGATE: +.008/-0.008
- 1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M - 1994

NOTES: UNLESS OTHERWISE SPECIFIED.

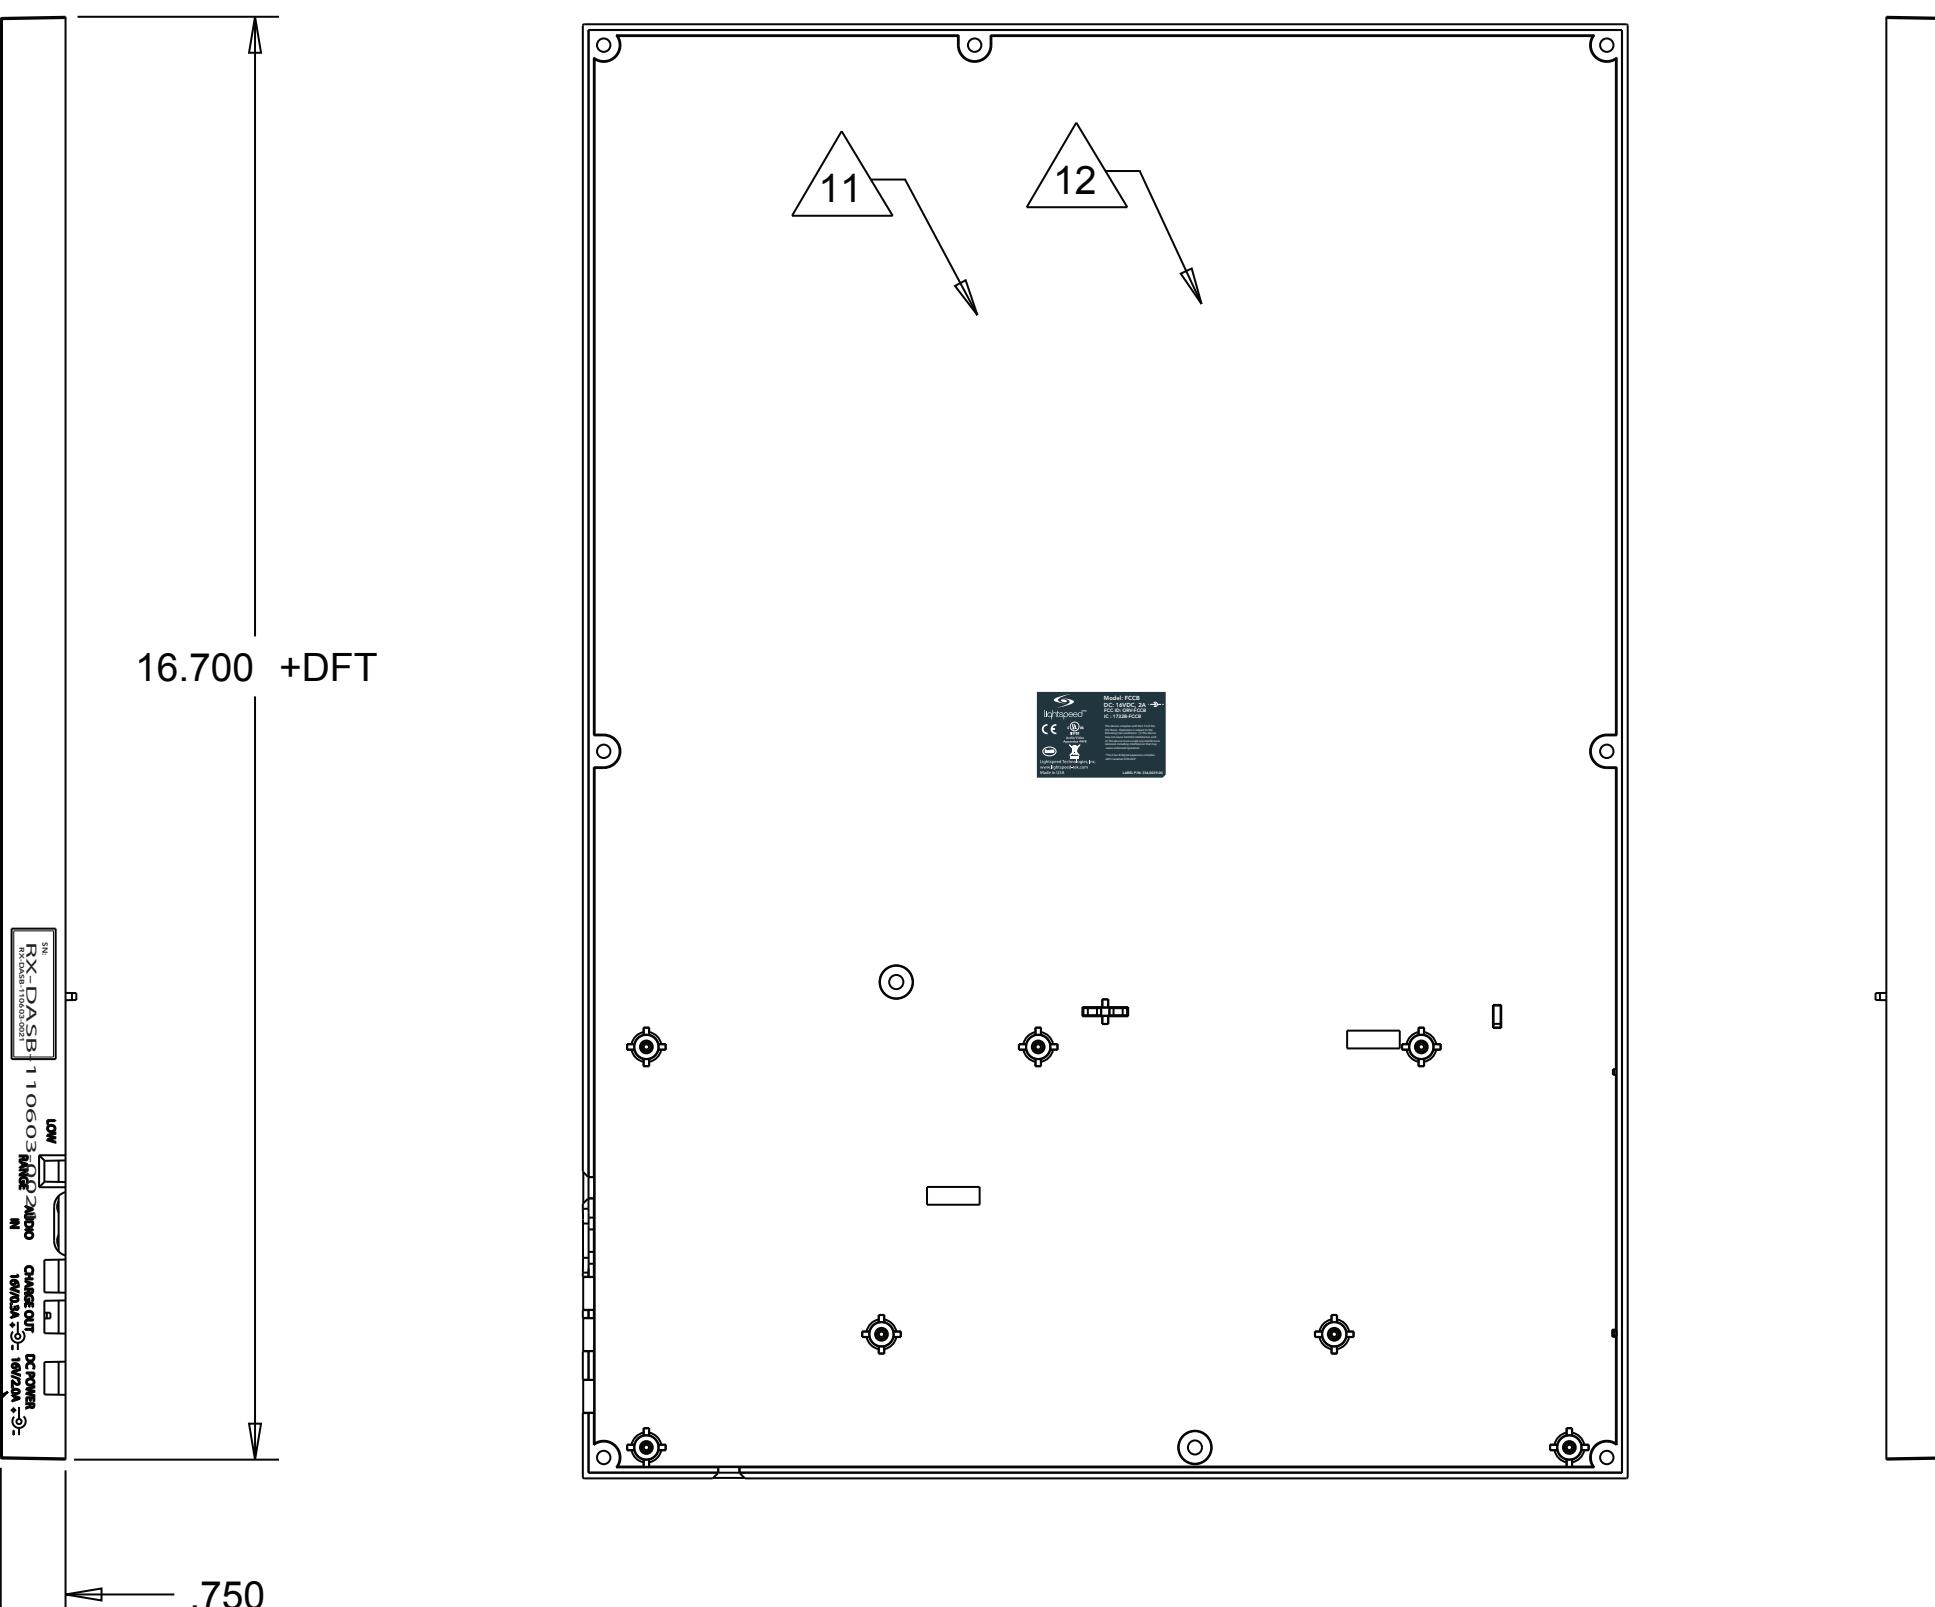

LightSPEED Technologies, INC.
11509 SW HERMAN ROAD
TUALATIN, OR 97062 USA

RELEASED FOR PRODUCTION TOOLING	SIGNATURE	DATE
DWN	DIMENSIONS ARE IN INCHES TOLERANCES UNLESS OTHERWISE SPECIFIED	
ENGR	DEC	± .005
CHKR	ANLR	±
PROD	SCALE	FIRST USED ON
NONE DAS		
MATERIAL PC/ABS - LIGHTSPEED DARK GRAY, OMNI COLOR UN7994		
FINISH SEE NOTES		
TITLE CASE, BASE, DAS BASE		
CODE IDENT NO C	SIZE C	PART NUMBER 395-0037-00
SH 1 OF 1	REV 02	



lightspeed




Label Specification

Label P/N: 334-0039-00

Units: Inches

Date: 08/23/11

Dederick

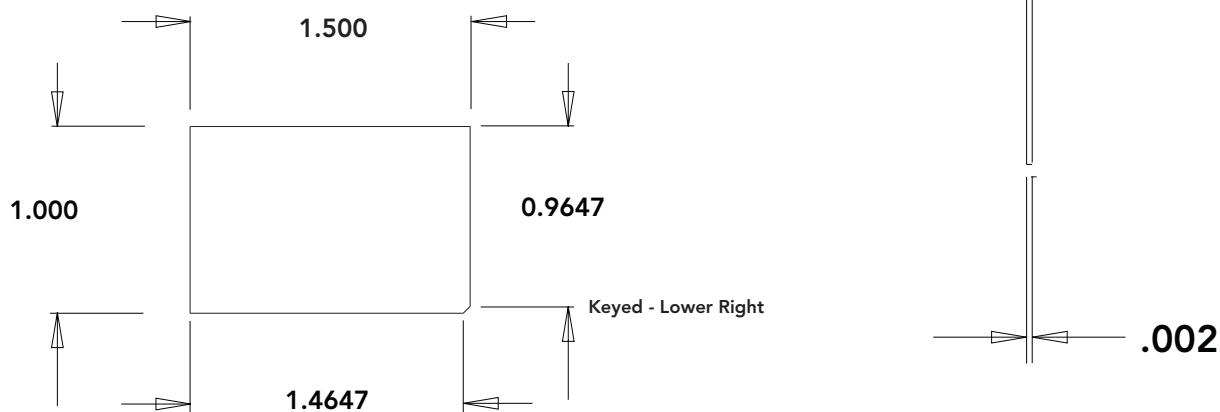

Background Color to be:
Pantone 327-2

LIGHTSPEED TECHNOLOGIES, INC.
www.lightspeed-tek.com
800.732.8999
334-0039-00_FCCB_NAMEPLATE
LABEL SPECIFICATIONS

LABEL PART:	334-0039-00
REVISION:	02
DATE:	8/23/2011
MATERIAL:	POLYESTER, GLOSS
ADHESIVE:	UL APPROVED
WIDTH:	1.500 INCHES
HEIGHT:	1.000 INCHES
THICKNESS:	2 MIL
TOLERANCES:	0.002 INCH
COLORS:	PANTONE 327-2 BACKGROUND, WHITE TEXT
SUBSTRATES:	ABS
ENVIRONMENT:	INDOOR USE
APPLICATION:	Sheets - Applied by Lightspeed
SERIALIZED:	NO
UL REQUIREMENTS:	UL APPROVED PROCESS FOR MAT/ADH
REGULATORY REQUIREMENTS:	UL, RoHS

MATERIAL:

POLYESTER

OVERLAY:

- GLOSS
- SEMI-GLOSS
- MATTE
- TEXTURED LEXAN

PANTONE 327-2 SWATCH

