

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2117  
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

## DASY/EASY – Parameters of Probe: EX3DV4 – SN:3836

### Basic Calibration Parameters

|                                                          | Sensor X | Sensor Y | Sensor Z | Unc ( $k=2$ ) |
|----------------------------------------------------------|----------|----------|----------|---------------|
| Norm( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup> | 0.40     | 0.46     | 0.44     | $\pm 10.0\%$  |
| DCP(mV) <sup>B</sup>                                     | 92.4     | 100.1    | 100.7    |               |

### Modulation Calibration Parameters

| UID | Communication System Name |   | A<br>dB | B<br>dB/ $\mu\text{V}$ | C   | D<br>dB | VR<br>mV | Unc <sup>E</sup><br>( $k=2$ ) |
|-----|---------------------------|---|---------|------------------------|-----|---------|----------|-------------------------------|
| 0   | CW                        | X | 0.0     | 0.0                    | 1.0 | 0.00    | 141.8    | $\pm 2.3\%$                   |
|     |                           | Y | 0.0     | 0.0                    | 1.0 |         | 159.9    |                               |
|     |                           | Z | 0.0     | 0.0                    | 1.0 |         | 154.7    |                               |

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution Corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X, Y, Z do not affect the  $E^2$ -field uncertainty inside TSL (see Page 4).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2117  
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

## DASY/EASY – Parameters of Probe: EX3DV4 – SN:3836

### Calibration Parameter Determined in Head Tissue Simulating Media

| f [MHz] <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 41.9                               | 0.89                            | 9.43    | 9.43    | 9.43    | 0.34               | 0.82                    | ± 12.7%     |
| 835                  | 41.5                               | 0.90                            | 9.03    | 9.03    | 9.03    | 0.18               | 1.09                    | ± 12.7%     |
| 1750                 | 40.1                               | 1.37                            | 8.02    | 8.02    | 8.02    | 0.22               | 1.06                    | ± 12.7%     |
| 1900                 | 40.0                               | 1.40                            | 7.69    | 7.69    | 7.69    | 0.21               | 1.12                    | ± 12.7%     |
| 2100                 | 39.8                               | 1.49                            | 7.74    | 7.74    | 7.74    | 0.19               | 1.17                    | ± 12.7%     |
| 2300                 | 39.5                               | 1.67                            | 7.60    | 7.60    | 7.60    | 0.45               | 0.73                    | ± 12.7%     |
| 2450                 | 39.2                               | 1.80                            | 7.35    | 7.35    | 7.35    | 0.46               | 0.74                    | ± 12.7%     |
| 2600                 | 39.0                               | 1.96                            | 7.18    | 7.18    | 7.18    | 0.53               | 0.69                    | ± 12.7%     |
| 3300                 | 38.2                               | 2.71                            | 6.89    | 6.89    | 6.89    | 0.38               | 0.99                    | ± 13.9%     |
| 3500                 | 37.9                               | 2.91                            | 6.69    | 6.69    | 6.69    | 0.45               | 0.93                    | ± 13.9%     |
| 3700                 | 37.7                               | 3.12                            | 6.49    | 6.49    | 6.49    | 0.35               | 1.15                    | ± 13.9%     |
| 3900                 | 37.5                               | 3.32                            | 6.41    | 6.41    | 6.41    | 0.30               | 1.52                    | ± 13.9%     |
| 4100                 | 37.2                               | 3.53                            | 6.45    | 6.45    | 6.45    | 0.35               | 1.25                    | ± 13.9%     |
| 4400                 | 36.9                               | 3.84                            | 6.23    | 6.23    | 6.23    | 0.30               | 1.50                    | ± 13.9%     |
| 4600                 | 36.7                               | 4.04                            | 6.17    | 6.17    | 6.17    | 0.30               | 1.60                    | ± 13.9%     |
| 4800                 | 36.4                               | 4.25                            | 6.15    | 6.15    | 6.15    | 0.30               | 1.60                    | ± 13.9%     |
| 4950                 | 36.3                               | 4.40                            | 5.90    | 5.90    | 5.90    | 0.35               | 1.50                    | ± 13.9%     |
| 5250                 | 35.9                               | 4.71                            | 5.22    | 5.22    | 5.22    | 0.40               | 1.60                    | ± 13.9%     |
| 5600                 | 35.5                               | 5.07                            | 4.67    | 4.67    | 4.67    | 0.40               | 1.50                    | ± 13.9%     |
| 5750                 | 35.4                               | 5.22                            | 4.82    | 4.82    | 4.82    | 0.45               | 1.40                    | ± 13.9%     |

<sup>C</sup> Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequency up to 6 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.


Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2117

E-mail: emf@caict.ac.cn

<http://www.caict.ac.cn>

## Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

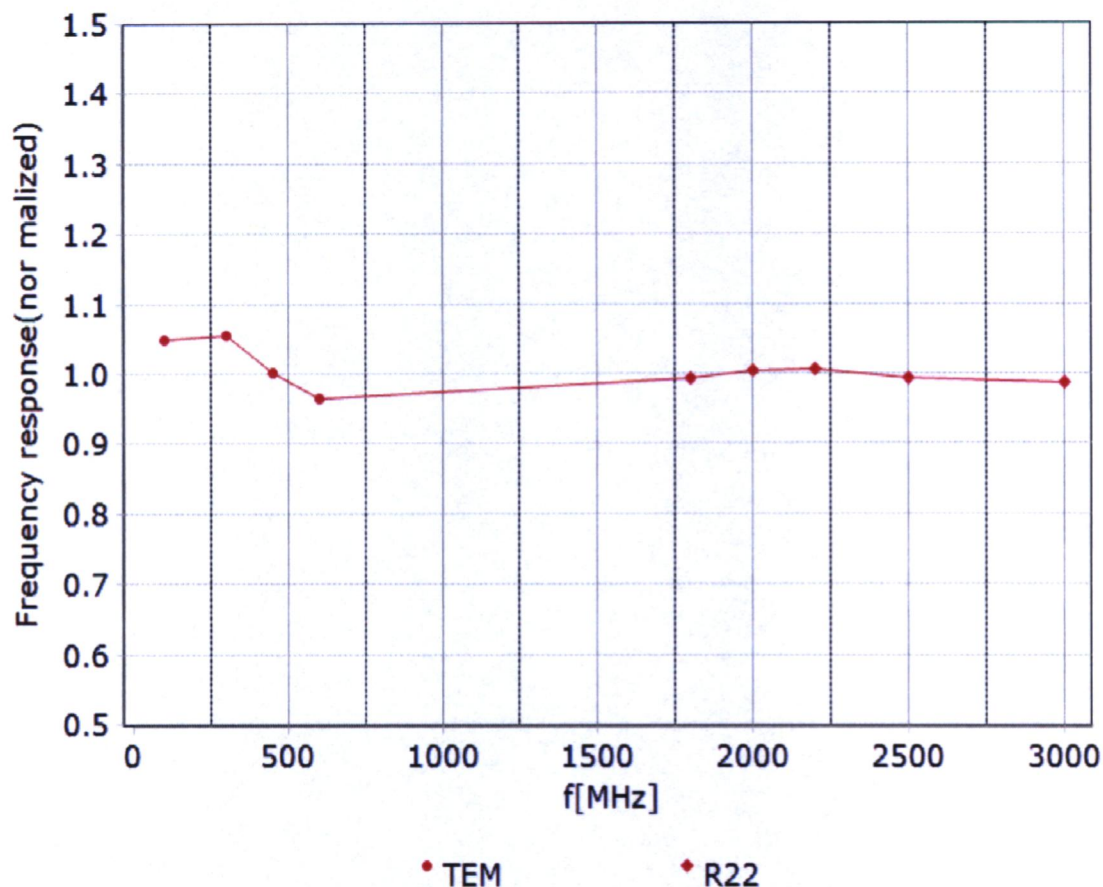


Uncertainty of Frequency Response of E-field:  $\pm 7.4\%$  ( $k=2$ )



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2117  
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

## Receiving Pattern ( $\Phi$ ), $\theta=0^\circ$

**f=600 MHz, TEM**

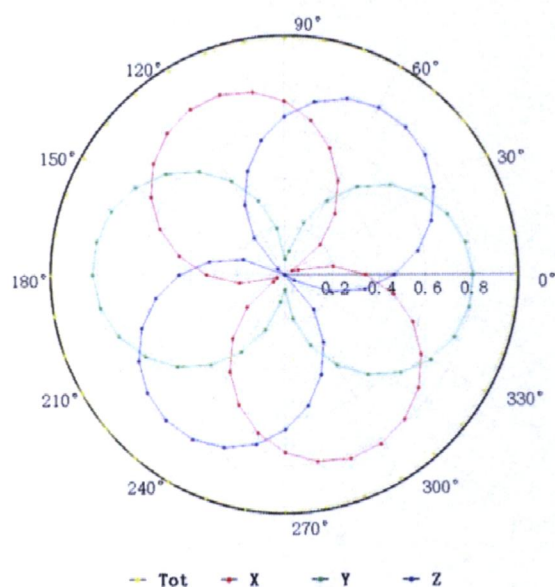



**f=1800 MHz, R22**

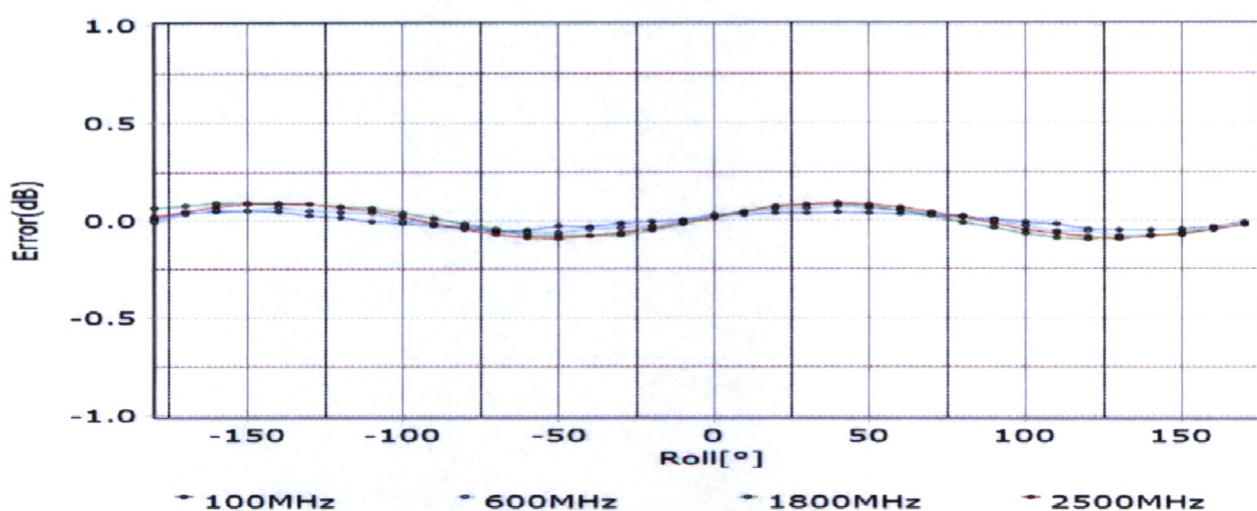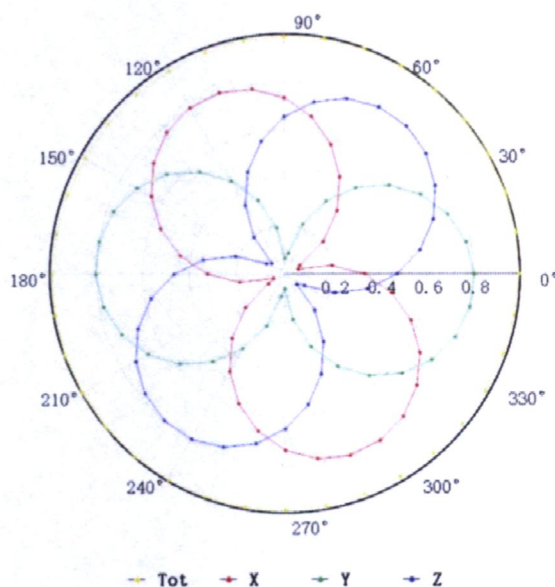

Uncertainty of Axial Isotropy Assessment:  $\pm 1.2\%$  ( $k=2$ )

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2117  
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

## Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f = 900 \text{ MHz}$ )

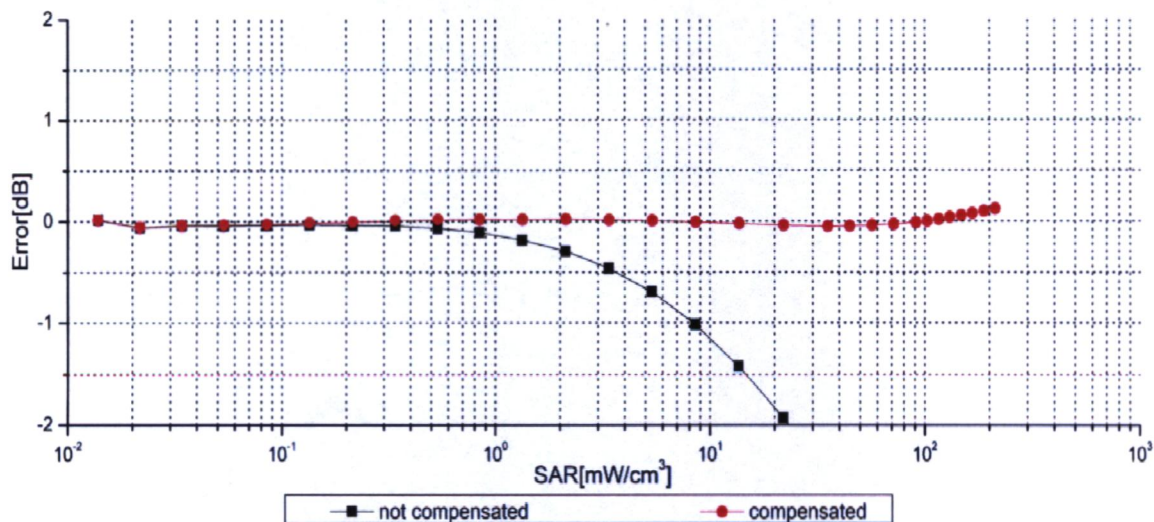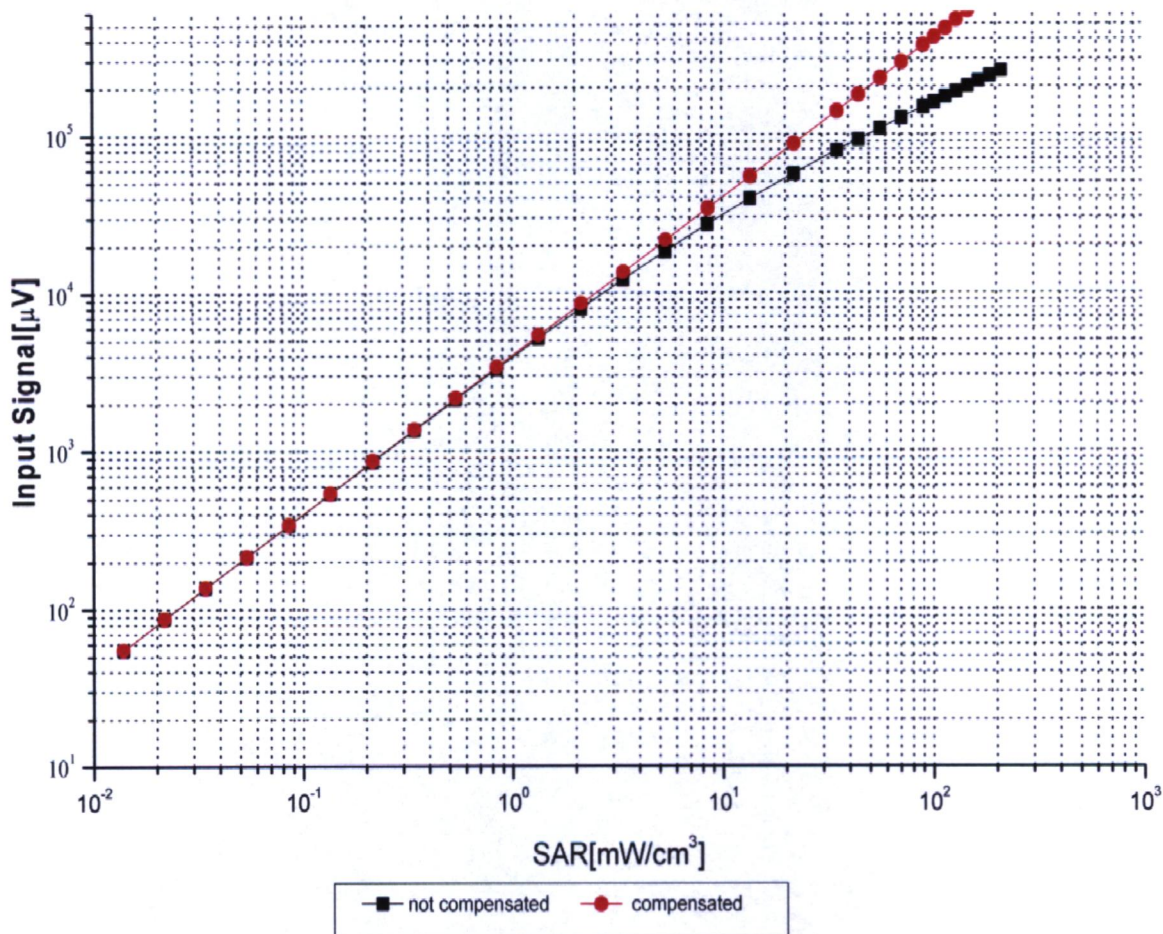



Uncertainty of Linearity Assessment:  $\pm 0.9\%$  ( $k=2$ )

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2117  
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>


## Conversion Factor Assessment

**f=750 MHz, WGLS R9(H\_convF)**

**f=1750 MHz, WGLS R22(H\_convF)**

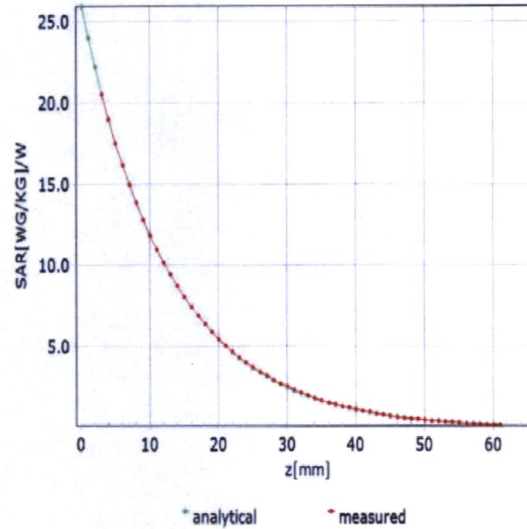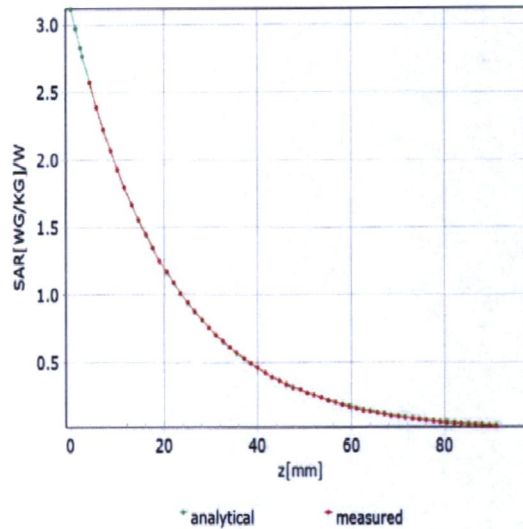

## Deviation from Isotropy in Liquid

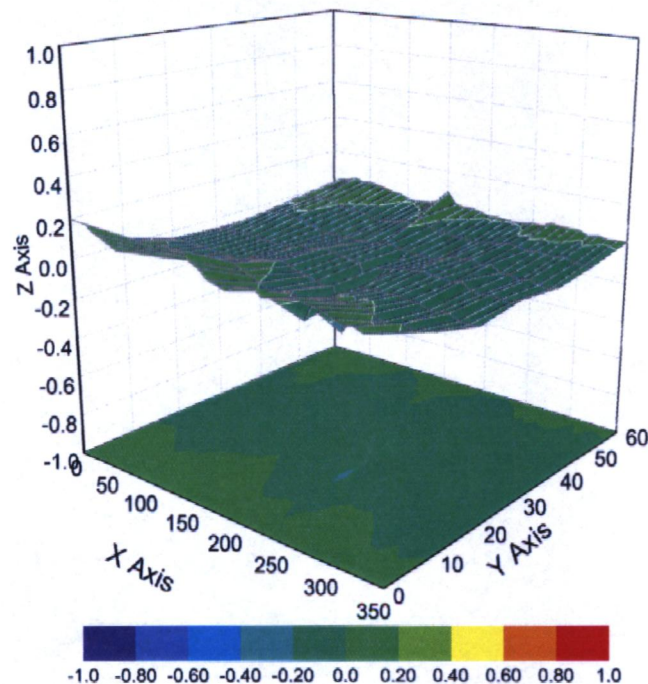

**Uncertainty of Spherical Isotropy Assessment:  $\pm 3.2\%$  ( $k=2$ )**



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2117  
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

## DASY/EASY – Parameters of Probe: EX3DV4 – SN:3836

### Other Probe Parameters

|                                                      |                   |
|------------------------------------------------------|-------------------|
| <b>Sensor Arrangement</b>                            | <b>Triangular</b> |
| <b>Connector Angle (°)</b>                           | <b>47.4</b>       |
| <b>Mechanical Surface Detection Mode</b>             | <b>enabled</b>    |
| <b>Optical Surface Detection Mode</b>                | <b>disable</b>    |
| <b>Probe Overall Length</b>                          | <b>337mm</b>      |
| <b>Probe Body Diameter</b>                           | <b>10mm</b>       |
| <b>Tip Length</b>                                    | <b>9mm</b>        |
| <b>Tip Diameter</b>                                  | <b>2.5mm</b>      |
| <b>Probe Tip to Sensor X Calibration Point</b>       | <b>1mm</b>        |
| <b>Probe Tip to Sensor Y Calibration Point</b>       | <b>1mm</b>        |
| <b>Probe Tip to Sensor Z Calibration Point</b>       | <b>1mm</b>        |
| <b>Recommended Measurement Distance from Surface</b> | <b>1.4mm</b>      |

| Dipole D2450V2 SN 733 |                 |            |                        |                  |
|-----------------------|-----------------|------------|------------------------|------------------|
| Head Liquid           |                 |            |                        |                  |
| Date of Measurement   | Return Loss(dB) | $\Delta$ % | Impedance ( $\Omega$ ) | $\Delta\Omega()$ |
| 2022/11/2             | -28.7           | /          | 50.2                   | /                |
| 2024/10/31            | -28.1           | 2.14%      | 50.7                   | 0.5 $\Omega$     |

- End of Appendix -