

TEST REPORT

Application No.: GZCR2403000309ME
Applicant: Guangdong Transtek Medical Electronics Co., Ltd.
Address of Applicant: Zone A, No.105, Dongli Road, Torch Development District, 528437 Zhongshan, Guangdong, China
Manufacturer: Guangdong Transtek Medical Electronics Co., Ltd.
Address of Manufacturer: Zone A, No.105, Dongli Road, Torch Development District, 528437 Zhongshan, Guangdong, China
Factory: Guangdong Transtek Medical Electronics Co., Ltd.
Address of Factory: Zone A, No.105, Dongli Road, Torch Development District, 528437 Zhongshan, Guangdong, China
Product Name: Blood pressure monitor
Model No.: LS802-Ga, LS802-Gb
Standard(s) : 47 CFR Part 2
 47 CFR Part 24 subpart E
 47 CFR Part 27 subpart C
Date of Receipt: 2024-03-29
Date of Test: 2024-04-08 to 2024-04-27
Date of Issue: 2024-04-28

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.




Jerry Chan
Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Revision Record			
Version	Report No.	Date	Remark
01	GZCR240300030901	2024-04-28	Original

Authorized for issue by:			
			
		Jim Li/Project Engineer	
			
		Ricky Liu/Reviewer	

2 Test Summary

LTE CatM1 Band 2

Test Item	FCC Rule No.	Requirements	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046 §24.232	EIRP≤2W	PASS
Peak-Average Ratio	§2.1046 §24.232	≤13dB	PASS
Modulation Characteristics	§2.1047	Digital modulation	PASS
Bandwidth	§2.1049(h)	OBW: No limit EBW: No limit	PASS
Band Edge Compliance	§2.1051 §24.238	≤43 + 10 log ₁₀ (P) dB, (P) in watts.	PASS
Spurious emissions at antenna terminals	§2.1051 §24.238	≤ -13 dBm/1MHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	PASS
Field strength of spurious radiation	§2.1053 §24.238	≤ -13dBm/1MHz	PASS
Frequency stability	§2.1055 §24.235	The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.	PASS

LTE CatM1 Band 4

Test Item	FCC Rule No.	Requirements	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046 §27.50(d)	EIRP≤1W	PASS
Peak-Average Ratio	§2.1046 §27.50(d)	≤13dB	PASS
Modulation Characteristics	§2.1047	Digital modulation	PASS
Bandwidth	§2.1049(h)	OBW: No limit EBW: No limit	PASS
Band Edge Compliance	§2.1051 §27.53(h)	≤ 43 + 10 log ₁₀ (P) dB, (P) in watts.	PASS
Spurious emissions at antenna terminals	§2.1051 §27.53(h)	≤ -13 dBm/1MHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	PASS
Field strength of spurious radiation	§2.1053 §27.53(h)	≤ -13dBm/1MHz	PASS
Frequency stability	§2.1055 §27.54	The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.	PASS



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch, Testing Center, EEC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

LTE CatM1 Band 12

Test Item	FCC Rule No.	Requirements	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046 §27.50(c)	ERP≤3W	PASS
Modulation Characteristics	§2.1047	Digital modulation	PASS
Bandwidth	§2.1049(h)	OBW: No limit EBW: No limit	PASS
Band Edge Compliance	§2.1051 §27.53(g)	≤ 43 + 10 log (P) dB, (P) in watts. (However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.)	PASS
Spurious emissions at antenna terminals	§2.1051 §27.53(g)	≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	PASS
Field strength of spurious radiation	§2.1053 §27.53(g)	≤ -13dBm/100KHz	PASS
Frequency stability	§2.1055 §27.54	The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.	PASS

Note:

E.U.T./EUT means Equipment Under Test.

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch Testing Center EEC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents.....	5
4 General Information	7
4.1 Details of E.U.T.	7
4.2 Description of Support Units.....	7
4.3 Test Frequency.....	8
4.4 Test Environment	9
4.5 Measurement Uncertainty	9
4.6 Test Location	9
4.7 Test Facility	10
4.8 Deviation from Standards.....	10
4.9 Abnormalities from Standard Conditions	10
5 Equipment List	11
6 Radio Spectrum Matter Test Results	13
6.1 Effective (Isotropic) Radiated Power Output Data	13
6.1.1 E.U.T. Operation	13
6.1.2 Test Mode Description	13
6.1.3 Test Setup Diagram	13
6.1.4 Measurement Procedure and Data	13
6.2 Peak-Average Ratio	14
6.2.1 E.U.T. Operation	14
6.2.2 Test Mode Description	14
6.2.3 Test Setup Diagram	14
6.2.4 Measurement Procedure and Data	14
6.3 Modulation Characteristics	15
6.3.1 E.U.T. Operation	15
6.3.1 Test Mode Description	15
6.3.2 Test Setup Diagram	15
6.3.3 Measurement Procedure and Data	15
6.4 Bandwidth.....	16
6.4.1 E.U.T. Operation	16
6.4.2 Test Mode Description	16
6.4.3 Test Setup Diagram	16
6.4.4 Measurement Procedure and Data	16
6.5 Band Edge Compliance	17
6.5.1 E.U.T. Operation	17
6.5.2 Test Mode Description	17
6.5.3 Test Setup Diagram	17
6.5.4 Measurement Procedure and Data	17
6.6 Spurious emissions at antenna terminals.....	18
6.6.1 E.U.T. Operation	18



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

6.6.2	Test Mode Description	18
6.6.3	Test Setup Diagram	18
6.6.4	Measurement Procedure and Data	18
6.7	Field strength of spurious radiation	19
6.7.1	E.U.T. Operation	19
6.7.2	Test Mode Description	19
6.7.3	Test Setup Diagram	19
6.7.4	Measurement Procedure and Data	20
6.8	Frequency stability	24
6.8.1	E.U.T. Operation	24
6.8.2	Test Mode Description	24
6.8.3	Test Setup Diagram	24
6.8.4	Measurement Procedure and Data	24
7	Test Setup Photo	25
8	EUT Constructional Details (EUT Photos)	26



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

4 General Information

4.1 Details of E.U.T.

Power supply: AC Adapter
Model: BLJ06L060100P-U
Input: 100-240V, 50/60Hz, 0.2A Max
Output: 6.0V, 1.0A
DC 6 V = Size "AA" battery 1.5V x 4pcs

Test voltage: AC 120V, 60Hz powered by AC adapter.
DC 6V powered by batteries.

Cable(s): Adapter DC output cable, 2 wires, 1.5m, unshielded.

Operation Frequency: LTE CatM1 Band 2, 4, 12

Modulation Type: QPSK, 16QAM

Antenna Type: PIFA Antenna
CatM1 Band 2: 2.81 dBi
CatM1 Band 4: 0.66 dBi
CatM1 Band 12: -1.89 dBi
(Declared by antenna specifications)

Antenna Gain:

Extreme temp. Tolerance: -30°C to +50°C

Sample Type: Fixed device.

Remark: The information in this section is provided by the applicant or manufacturer, SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
CMW500 Test Card	/	/	/



4.3 Test Frequency

Test Mode	Nominal Bandwidth (MHz)	RF Channel		
		Low (L)	Middle (M)	High (H)
		MHz	MHz	MHz
CatM1 Band 2	1.4	1850.7	1880	1909.3
	3	1851.5	1880	1908.5
	5	1852.5	1880	1907.5
	10	1855.0	1880	1905.0
	15	1857.5	1880	1902.5
	20	1860.0	1880	1900.0

Test Mode	Nominal Bandwidth (MHz)	RF Channel		
		Low (L)	Middle (M)	High (H)
		MHz	MHz	MHz
CatM1 Band 4	1.4	1710.7	1732.5	1754.3
	3	1711.5	1732.5	1753.5
	5	1712.5	1732.5	1752.5
	10	1715.0	1732.5	1750.0
	15	1717.5	1732.5	1747.5
	20	1720.0	1732.5	1745.0

Test Mode	Nominal Bandwidth (MHz)	RF Channel		
		Low (L)	Middle (M)	High (H)
		MHz	MHz	MHz
CatM1 Band 12	1.4	699.7	707.5	715.3
	3	700.5	707.5	714.5
	5	701.5	707.5	713.5
	10	704.0	707.5	711.0

4.4 Test Environment

Environment Parameter	Selected Values During Tests	
Relative Humidity	52.4%	
Atmospheric Pressure:	1018Pa	
Temperature:	TL	-30°C
	TN	+20°C
	TH	+50°C
Test Voltage:	VL	102 V
	VN	120 V
	VH	138 V
NOTE: VL= Lower extreme test voltage VN= Nominal voltage VH= Upper extreme test voltage TL= Lower extreme test temperature TN= Normal temperature TH= Upper extreme test temperature		

4.5 Measurement Uncertainty

Test Item	Measurement Uncertainty
Effective (Isotropic) Radiated Power Output Data	± 0.75dB
Peak-Average Ratio	± 0.75dB
Bandwidth	± 3%
Band Edge Compliance	± 0.75dB
Spurious emissions at antenna terminals	± 0.75dB
Field strength of spurious radiation	±5.00dB (3m); ±4.38dB (10m) (Below 1GHz) ±5.12dB (1GHz-6GHz); ±5.38dB (6GHz-18GHz); ±5.61dB (18GHz-40GHz)
Frequency stability	7.25 x 10 ⁻⁸
Remark: The U _{lab} (lab Uncertainty) is less than U _{ETSI} (ETSI Uncertainty), so the test results – compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit; – non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.	

4.6 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,
 No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou,
 Guangdong, China 510663

Tel: +86 20 82155555

No tests were sub-contracted.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
 Guangzhou Branch EMC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
 中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
 t (86-20) 82155555 sgs.china@sgs.com

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian/New Zealand Regulatory Compliance Mark (RCM).

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **FCC Recognized Accredited Test Firm(Registration No.: 486818)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818.

- **ISED (Registration No.: 4620B, CAB identifier: CN0052)**

SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Innovation Science and Economic Development Canada for Wireless Device Testing laboratories to test to Canadian radio equipment requirements. Registration No. 4620B, CAB identifier: CN0052.

- **VCCI (Registration No.: R-12460, C-12584, G-20107 and T-11179)**

The 10m Semi-anechoic chamber, 966 Anechoic Chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-12460, C-12584, G-20107 and T-11179 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2017, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.

4.8 Deviation from Standards

None

4.9 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch EMC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

5 Equipment List

RF Conducted Test					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
MI CABLE	SGS-EMC	0.8M	EMC2137	2023-11-02	2025-11-01
MI CABLE	SGS-EMC	0.8M	EMC0543	2023-11-02	2025-11-01
EXA Signal Analyzer (10Hz-44GHz)	Keysight	N9010A	EMC2138	2023-08-23	2024-08-22
4X4 Power sensor Unit	TST	TSPS2023R	EMC2226	2023-08-23	2024-08-22
Test Software	TST	V2.0	GZE100-78	N/A	N/A
Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	EMC2215	2023/11/10	2024/11/09
Temperature Chamber	GZ GongWen Co.Ltd.	GDJW-100	EMC0039	2023-06-29	2024-06-28
Splitter	Mini-Circuits	ZFSC-2-10G+	RFCONMBINE R05	2023-11-02	2025-11-01

Field strength of spurious radiation Above 1GHz					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2023-11-10	2024-11-09
EMI Test Receiver (10Hz-26.5GHz)	Rohde & Schwarz	ESIB26	EMC0522	2023-12-15	2024-12-14
Chamber cable (Above 1GHz)	Scoflex	KMKM-8.0m	EMC0545	2022-08-24	2024-08-23
Horn Antenna (1GHz-18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2022-09-23	2025-09-22
Horn Antenna (14-40GHz)	SCHWARZBECK	BBHA 9170	EMC2041	2023-06-18	2026-06-17
EXA Signal Analyzer (10Hz-44GHz)	Keysight	N9010A	EMC2138	2023-08-23	2024-08-22
MXE EMI Receiver (10Hz-8.4GHz)	Keysight	N9038A	EMC2139	2023-10-20	2024-10-19
Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	EMC2215	2023/11/10	2024/11/09
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2023-12-20	2026-12-19
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch Testing Center EEC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Field strength of spurious radiation below 1GHz					
966 Anechoic Chamber	Shenzhen C.R.T	CRTSGSSAC966	EMC2230	2022-04-12	2025-04-11
EMI Test Receiver(1Hz-8GHz)	Rohde & Schwarz	ESW8	EMC2229	2024-02-19	2025-02-18
Amplifier(9k-1000MHz)	SONOMA	310	EMC2237	2024-03-22	2025-03-21
TRILOG Broadband Antenna (25M-2GHz)	SCHWRZBECK	VULB 9168	EMC2238	2022-04-20	2025-04-19
Coaxial Cable	Mirco-COAX UTIFLEX ve	LA2-C125-8000	EMC2239	2023-06-14	2025-06-13
Test Software E3	Audix	Ver.6.191211	GZE100-81	N/A	N/A
Active Loop Antenna-RED	ETS-Lindgren	6502	EMC2190	2024-04-08	2026-04-07

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DMM	Fluke	73	EMC0006	2023-06-11	2024-06-10



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch Testing Center EEC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

6 Radio Spectrum Matter Test Results

6.1 Effective (Isotropic) Radiated Power Output Data

Test Requirement	Reference test summary
Test Method:	ANSI C63.26, KDB 971168 D01 v03
Limit:	Reference test summary

6.1.1 E.U.T. Operation


Operating Environment:

Temperature: 25.9 °C Humidity: 56.6 % RH Atmospheric Pressure: 1020 mbar

6.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in transmitting mode

6.1.3 Test Setup Diagram

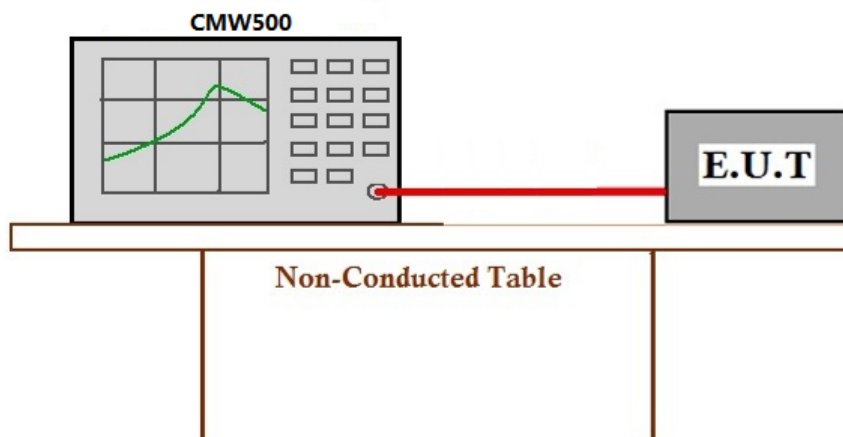

6.1.4 Measurement Procedure and Data

Please Refer to Appendix for Details

6.2 Peak-Average Ratio

Test Requirement	Reference test summary
Test Method:	ANSI C63.26, KDB 971168 D01 v03
Limit:	Reference test summary

6.2.1 E.U.T. Operation


Operating Environment:

Temperature: 25.9 °C Humidity: 56.6 % RH Atmospheric Pressure: 1020 mbar

6.2.2 Test Mode Description

Pre-scan / Mode	Description
Final test Code	
Final test 00	TX mode_Keep the EUT in transmitting mode

6.2.3 Test Setup Diagram

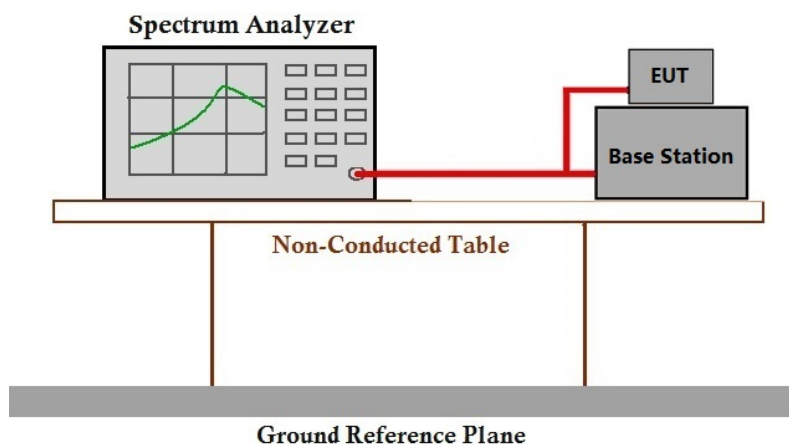

6.2.4 Measurement Procedure and Data

Please Refer to Appendix for Details

6.3 Modulation Characteristics

Test Requirement	Reference test summary
Test Method:	ANSI C63.26, KDB 971168 D01 v03
Limit:	Reference test summary

6.3.1 E.U.T. Operation


Operating Environment:

Temperature: 25.9 °C Humidity: 56.6 % RH Atmospheric Pressure: 1020 mbar

6.3.1 Test Mode Description

Pre-scan / Mode	Description
Final test Code	
Final test 00	TX mode_Keep the EUT in transmitting mode

6.3.2 Test Setup Diagram

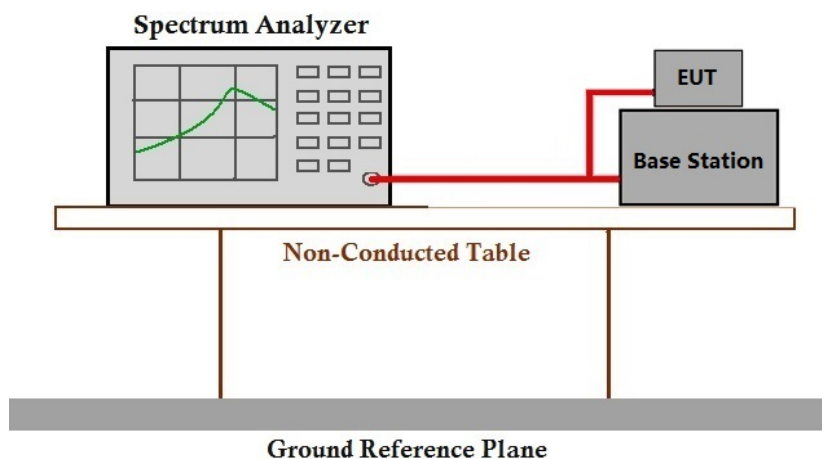

6.3.3 Measurement Procedure and Data

Note: This device uses digital modulation.

6.4 Bandwidth

Test Requirement	Reference test summary
Test Method:	ANSI C63.26, KDB 971168 D01 v03
Limit:	Reference test summary

6.4.1 E.U.T. Operation


Operating Environment:

Temperature: 25.9 °C Humidity: 56.6 % RH Atmospheric Pressure: 1020 mbar

6.4.2 Test Mode Description

Pre-scan / Mode	Description
Final test Code	
Final test 00	TX mode_Keep the EUT in transmitting mode

6.4.3 Test Setup Diagram

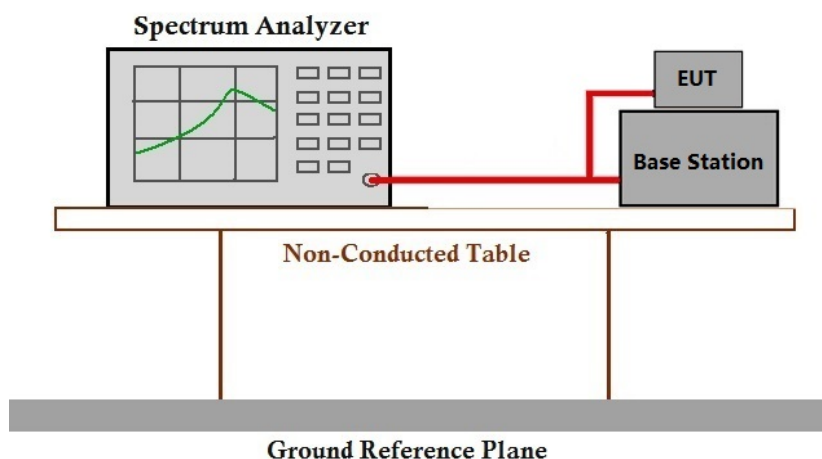

6.4.4 Measurement Procedure and Data

Please Refer to Appendix for Details

6.5 Band Edge Compliance

Test Requirement	Reference test summary
Test Method:	ANSI C63.26, KDB 971168 D01 v03
Limit:	Reference test summary

6.5.1 E.U.T. Operation


Operating Environment:

Temperature: 25.9 °C Humidity: 56.6 % RH Atmospheric Pressure: 1020 mbar

6.5.2 Test Mode Description

Pre-scan / Mode	Description
Final test Code	
Final test 00	TX mode_Keep the EUT in transmitting mode

6.5.3 Test Setup Diagram

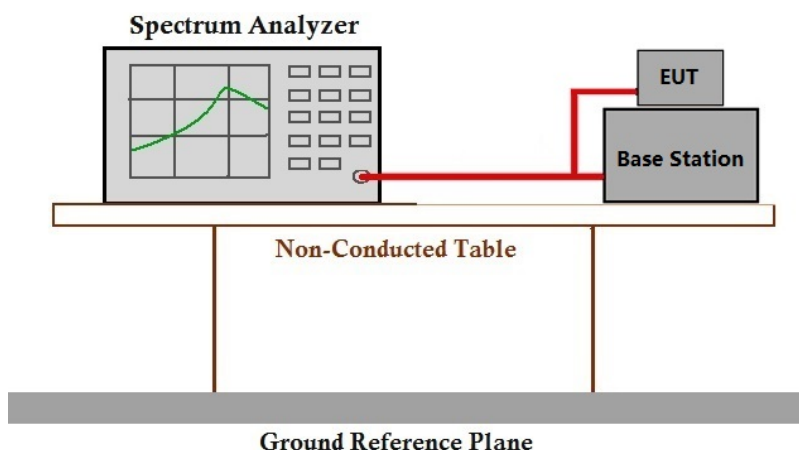

6.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details

6.6 Spurious emissions at antenna terminals

Test Requirement	Reference test summary
Test Method:	ANSI C63.26, KDB 971168 D01 v03
Limit:	Reference test summary

6.6.1 E.U.T. Operation


Operating Environment:

Temperature: 25.9 °C Humidity: 56.6 % RH Atmospheric Pressure: 1020 mbar

6.6.2 Test Mode Description

Pre-scan / Mode	Description
Final test Code	
Final test 00	TX mode_Keep the EUT in transmitting mode

6.6.3 Test Setup Diagram

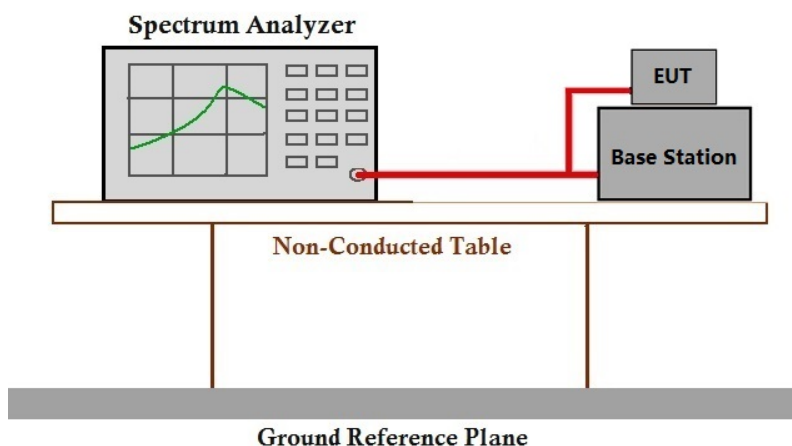

6.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

6.7 Field strength of spurious radiation

Test Requirement	Reference test summary
Test Method:	ANSI C63.26, KDB 971168 D01 v03
Limit:	Reference test summary

6.7.1 E.U.T. Operation


Operating Environment:

Temperature: 25.9 °C Humidity: 56.6 % RH Atmospheric Pressure: 1020 mbar


6.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	LTE B2 TX Mode_ Establish connection with auxiliary equipment CMW500(Only the data of worst case for QPSK@1RB is recorded in the report).
Final test	02	LTE B4 TX Mode_ Establish connection with auxiliary equipment CMW500(Only the data of worst case for QPSK@1RB is recorded in the report).
Final test	03	LTE B12 TX Mode_ Establish connection with auxiliary equipment CMW500(Only the data of worst case for QPSK@1RB is recorded in the report).

6.7.3 Test Setup Diagram

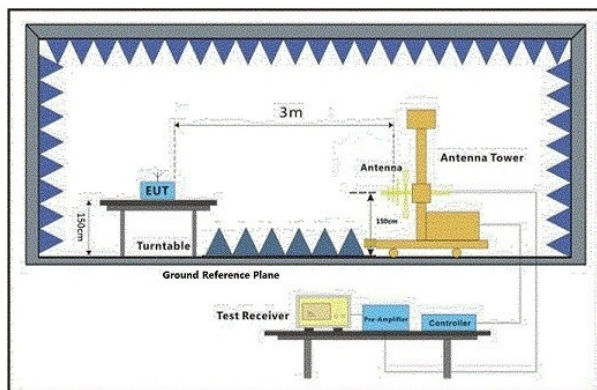

30MHz-1GHz

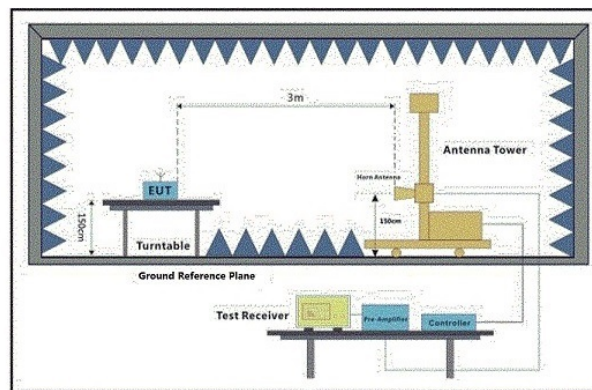

Above 1GHz

6.7.4 Measurement Procedure and Data

Test Procedure:

- (1) On a test site, the EUT shall be placed on a turntable and in the position closest to the normal use as declared by the user.
- (2) The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- (3) The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- (4) The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- (5) The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- (6) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- (7) The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- (8) The maximum signal level detected by the measuring receiver shall be noted.
- (9) The measurement shall be repeated with the test antenna set to horizontal polarization.
- (10) Replace the antenna with a proper Antenna (substitution antenna).
- (11) The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- (12) The substitution antenna shall be connected to a calibrated signal generator.
- (13) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- (14) The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- (15) The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- (16) The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- (17) The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.

Remark:

The spurious emissions 9kHz to 1GHz were very low and not displayed in this report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch, Testing Center, EEC Laboratory.

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Test Mode: 01

CatM Band 2-20MHz Low channel, Modulation: QPSK, 1 RB								
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
3702	-50.34	-13	-37.34	-52.56	6.99	9.21	Horizontal	Pass
5553	-47.13	-13	-34.13	-49.45	8.27	10.59	Horizontal	Pass
7404	-45.08	-13	-32.08	-48.62	8.19	11.73	Horizontal	Pass
3702	-50.52	-13	-37.52	-52.74	6.99	9.21	Vertical	Pass
5553	-47.84	-13	-34.84	-50.16	8.27	10.59	Vertical	Pass
7404	-43.99	-13	-30.99	-47.53	8.19	11.73	Vertical	Pass

CatM Band 2-20MHz Middle channel, Modulation: QPSK, 1 RB								
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
3742	-51.23	-13	-38.23	-53.45	6.99	9.21	Horizontal	Pass
5613	-47.62	-13	-34.62	-49.94	8.27	10.59	Horizontal	Pass
7484	-45.18	-13	-32.18	-48.72	8.19	11.73	Horizontal	Pass
3742	-49.45	-13	-36.45	-51.67	6.99	9.21	Vertical	Pass
5613	-48.12	-13	-35.12	-50.44	8.27	10.59	Vertical	Pass
7484	-43.79	-13	-30.79	-47.33	8.19	11.73	Vertical	Pass

CatM Band 2-20MHz High channel, Modulation: QPSK, 1 RB								
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
3782	-49.34	-13	-36.34	-51.56	6.99	9.21	Horizontal	Pass
5673	-48.15	-13	-35.15	-50.47	8.27	10.59	Horizontal	Pass
7564	-44.58	-13	-31.58	-48.41	8.43	12.26	Horizontal	Pass
3782	-49.73	-13	-36.73	-51.95	6.99	9.21	Vertical	Pass
5673	-49.17	-13	-36.17	-51.49	8.27	10.59	Vertical	Pass
7564	-44.34	-13	-31.34	-48.17	8.43	12.26	Vertical	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663 t (86-20) 82155555 www.sgs.com.cn
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 sgs.china@sgs.com

Test Mode: 02

CatM Band 4-20MHz Low channel, Modulation: QPSK, 1 RB								
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
3422	-51.34	-13	-38.34	-53.92	5.72	8.3	Horizontal	Pass
5133	-46.74	-13	-33.74	-48.74	8.3	10.3	Horizontal	Pass
6844	-46.66	-13	-33.66	-50.21	7.7	11.25	Horizontal	Pass
3422	-51.7	-13	-38.7	-54.28	5.72	8.3	Vertical	Pass
5133	-47.88	-13	-34.88	-49.88	8.3	10.3	Vertical	Pass
6844	-46.72	-13	-33.72	-50.27	7.7	11.25	Vertical	Pass

CatM Band 4-20MHz Middle channel, Modulation: QPSK, 1 RB								
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
3447	-50.54	-13	-37.54	-53.12	5.72	8.3	Horizontal	Pass
5170.5	-48.14	-13	-35.14	-50.14	8.3	10.3	Horizontal	Pass
6894	-46.01	-13	-33.01	-49.56	7.7	11.25	Horizontal	Pass
3447	-51.25	-13	-38.25	-53.83	5.72	8.3	Vertical	Pass
5170.5	-48.08	-13	-35.08	-50.08	8.3	10.3	Vertical	Pass
6894	-46.24	-13	-33.24	-49.79	7.7	11.25	Vertical	Pass

CatM Band 4-20MHz High channel, Modulation: QPSK, 1 RB								
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
3472	-51.35	-13	-38.35	-53.93	5.72	8.3	Horizontal	Pass
5208	-47.17	-13	-34.17	-49.17	8.3	10.3	Horizontal	Pass
6944	-45.87	-13	-32.87	-49.42	7.7	11.25	Horizontal	Pass
3472	-50.08	-13	-37.08	-52.66	5.72	8.3	Vertical	Pass
5208	-47.24	-13	-34.24	-49.24	8.3	10.3	Vertical	Pass
6944	-46.16	-13	-33.16	-49.71	7.7	11.25	Vertical	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663 t (86-20) 82155555 www.sgs.com.cn
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 sgs.china@sgs.com

Test Mode: 03

CatM Band 12-10MHz Low channel, Modulation: QPSK, 1 RB								
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
1399	-42.24	-13	-29.24	-44.77	2.64	5.17	Horizontal	Pass
2098.5	-49.59	-13	-36.59	-51.92	4.75	7.08	Horizontal	Pass
2798	-52.15	-13	-39.15	-54.62	5.13	7.6	Horizontal	Pass
1399	-51.14	-13	-38.14	-53.67	2.64	5.17	Vertical	Pass
2098.5	-53.58	-13	-40.58	-55.91	4.75	7.08	Vertical	Pass
2798	-50.15	-13	-37.15	-52.62	5.13	7.6	Vertical	Pass

CatM Band 12-10MHz Middle channel, Modulation: QPSK, 1 RB								
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
1406	-41.73	-13	-28.73	-44.26	2.64	5.17	Horizontal	Pass
2109	-55.14	-13	-42.14	-57.47	4.75	7.08	Horizontal	Pass
2812	-51.37	-13	-38.37	-53.84	5.13	7.6	Horizontal	Pass
1406	-54.21	-13	-41.21	-56.74	2.64	5.17	Vertical	Pass
2109	-54.42	-13	-41.42	-56.75	4.75	7.08	Vertical	Pass
2812	-52.09	-13	-39.09	-54.56	5.13	7.6	Vertical	Pass

CatM Band 12-10MHz High channel, Modulation: QPSK, 1 RB								
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
1413	-41.22	-13	-28.22	-43.75	2.64	5.17	Horizontal	Pass
2119.5	-53.38	-13	-40.38	-55.71	4.75	7.08	Horizontal	Pass
2826	-51.46	-13	-38.46	-53.93	5.13	7.6	Horizontal	Pass
1413	-52.08	-13	-39.08	-54.61	2.64	5.17	Vertical	Pass
2119.5	-53.49	-13	-40.49	-55.82	4.75	7.08	Vertical	Pass
2826	-49.46	-13	-36.46	-51.93	5.13	7.6	Vertical	Pass

Note: All modes have been tested and we found QPSK test mode has the worst test result. Only record the worst test result.

EIRP= S.G. Power- Cable loss+ Antenna Gain



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663 t (86-20) 82155555 www.sgsgroup.com.cn
Guangzhou Branch Testing Center EEC Laboratory. 中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 sgs.china@sgs.com

6.8 Frequency stability

Test Requirement	Reference test summary
Test Method:	ANSI C63.26, KDB 971168 D01 v03
Limit:	Reference test summary

6.8.1 E.U.T. Operation


Operating Environment:

Temperature: 25.9 °C Humidity: 56.6 % RH Atmospheric Pressure: 1020 mbar

6.8.2 Test Mode Description

Pre-scan / Mode	Description
Final test Code	
Final test 00	TX mode_Keep the EUT in transmitting mode

6.8.3 Test Setup Diagram

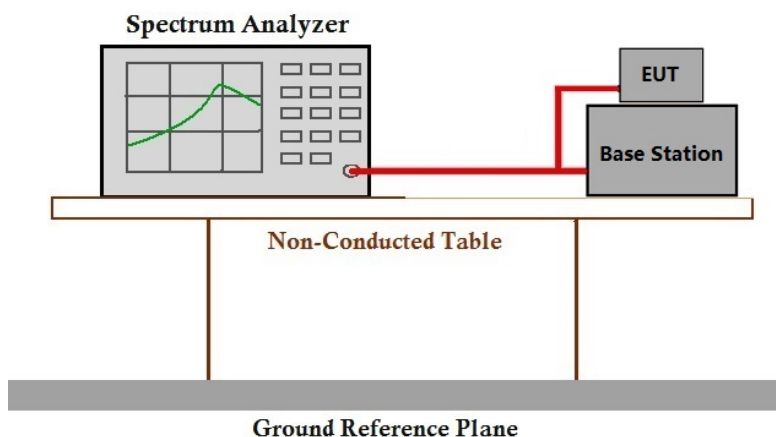

6.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7 Test Setup Photo

Refer to Appendix - Test Setup Photos for GZCR240300030901



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

8 EUT Constructional Details (EUT Photos)

Refer to Appendix - External and Internal Photos for GZCR2403000309ME

--End of the Report--

