



FCC PART 15.247

TEST REPORT

For

Vanstone Electronic (Beijing) Co., Ltd.

3F No.2 Building, Aisino Corporation Park 18A, Xingshikou Road, Haidian District, Beijing,
China 100195

FCC ID: OWLV71

Report Type: Original Report	Product Type: Wireless POS Terminal
Report Number: SZXX1210918-48932E-00A	
Report Date: 2021-11-01	
Reviewed By: RF Engineer	Candy Li <i>Candy . Li</i>
Prepared By: Shenzhen Accurate Technology Co., Ltd. 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China Tel: (0755) 26503290 Fax: (0755) 26503396 Http://www.atc-lab.com	

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
DUTY CYCLE	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
FCC §1.1307(b) & §2.1093 - RF EXPOSURE	11
APPLICABLE STANDARD	11
TEST RESULT:	11
FCC §15.203 - ANTENNA REQUIREMENT	12
APPLICABLE STANDARD	12
ANTENNA CONNECTOR CONSTRUCTION	12
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	13
APPLICABLE STANDARD	13
EUT SETUP	13
EMI TEST RECEIVER SETUP	13
TEST PROCEDURE	13
TRANSD FACTOR & MARGIN CALCULATION	14
TEST DATA	14
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS	19
APPLICABLE STANDARD	19
EUT SETUP	19
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	20
TEST PROCEDURE	20
FACTOR & MARGIN CALCULATION	20
TEST DATA	20
APPLICABLE STANDARD	28
TEST PROCEDURE	28
TEST DATA	28
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER	29
APPLICABLE STANDARD	29
TEST PROCEDURE	29
TEST DATA	29
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE	30
APPLICABLE STANDARD	30
TEST PROCEDURE	30

TEST DATA30

FCC §15.247(e) - POWER SPECTRAL DENSITY31

 APPLICABLE STANDARD31

 TEST PROCEDURE31

 TEST DATA31

APPENDIX Wi-Fi.....32

 APPENDIX A: 6dB EMISSION BANDWIDTH.....32

 APPENDIX B: OCCUPIED CHANNEL BANDWIDTH39

 APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER46

 APPENDIX D: POWER SPECTRAL DENSITY47

 APPENDIX E: BAND EDGE MEASUREMENTS54

 APPENDIX F: DUTY CYCLE58

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Wireless POS Terminal
Trademark	Aisino
Tested Model	V71
Frequency Range	Wi-Fi: 2412-2472MHz
Maximum Conducted Peak Output Power	Wi-Fi: 14.02dBm(802.11b), 12.68dBm(802.11g), 13.51dBm(802.11n20), 12.13dBm(802.11n40)
Modulation Technique	Wi-Fi: DSSS, OFDM
Antenna Specification*	PCB Antenna: 1.5dBi(provided by the applicant)
Voltage Range	DC3.7V by battery or DC 5V from adapter
Date of Test	2021-10-18 to 2021-10-20
Sample serial number	SZXX1210918-48932E-RF-S1 (Assigned by ATC)
Received date	2021-09-18
Sample/EUT Status	Good condition
Adapter 1 Information	Model: A18A-050100U-US2 Input: 100-240V~, 50/60Hz, Max 0.2A Output: DC 5V, 1A
Adapter 2 Information	Model: SW-0018 Input: 100-240V~, 50/60Hz, Max 0.2A Output: DC 5V, 1A

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 mode, total 13 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442	/	/

802.11b, 802.11g and 802.11n-HT20 mode was tested with Channel 1, 7 and 13.

802.11n-HT40 mode was tested with Channel 3, 7 and 11.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

WIFI test in the engineer mode during testing and power level as below:

Item	Mode	Data Rate (Mbps)	Power Level*
Wi-Fi	802.11 b	1	32
	802.11 g	6	32
	802.11 n20	MCS0	32
	802.11 n40	MCS0	32

Duty cycle

Test Result: Compliant. Please refer to the Appendix Wi-Fi.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To
Unshielded Detachable USB Cable	1.5	Adapter	EUT

Block Diagram of Test Setup


For conducted emission:

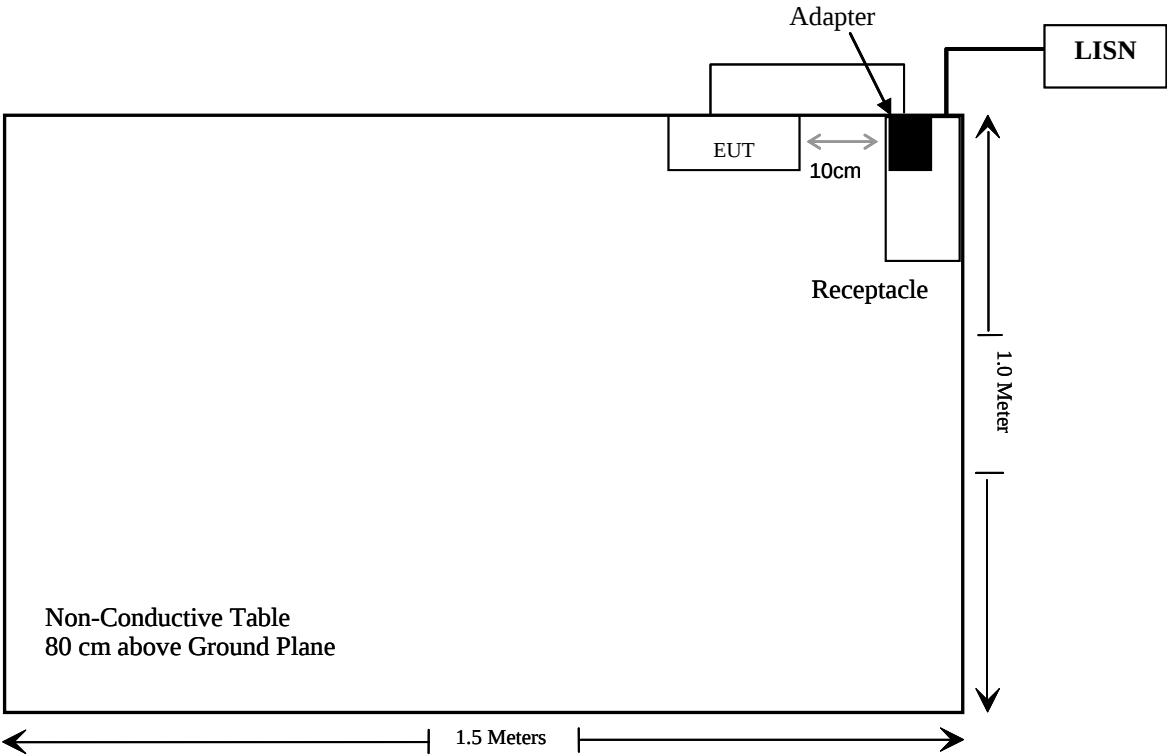

For Radiated emission:
Below 1GHz

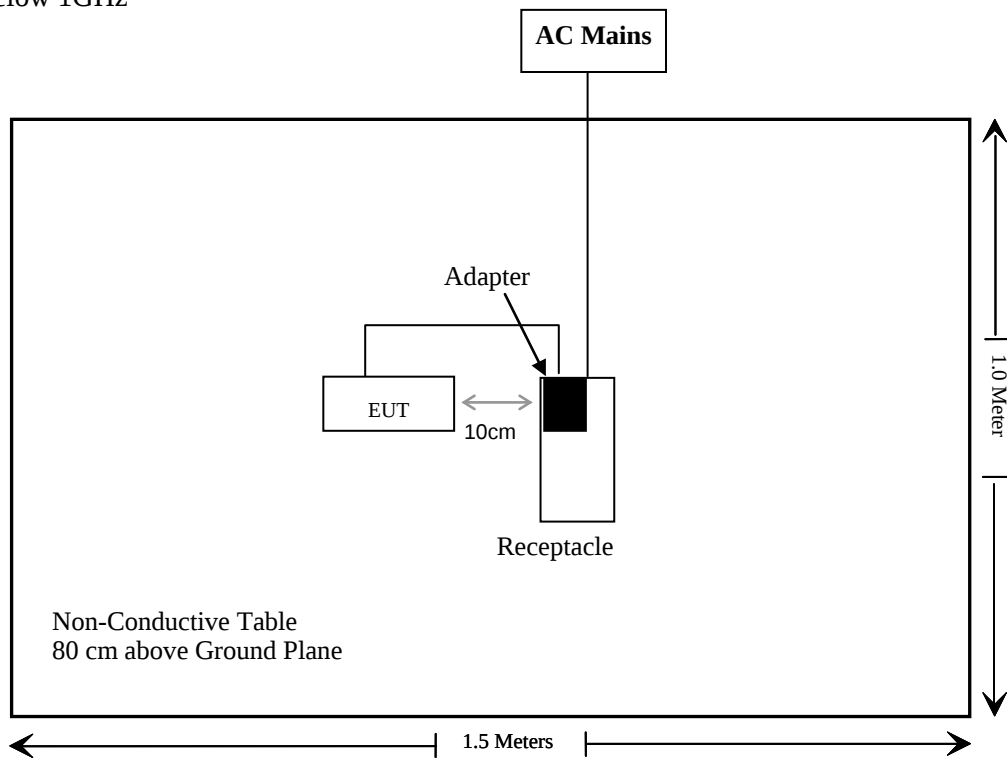

Above 1GHz:

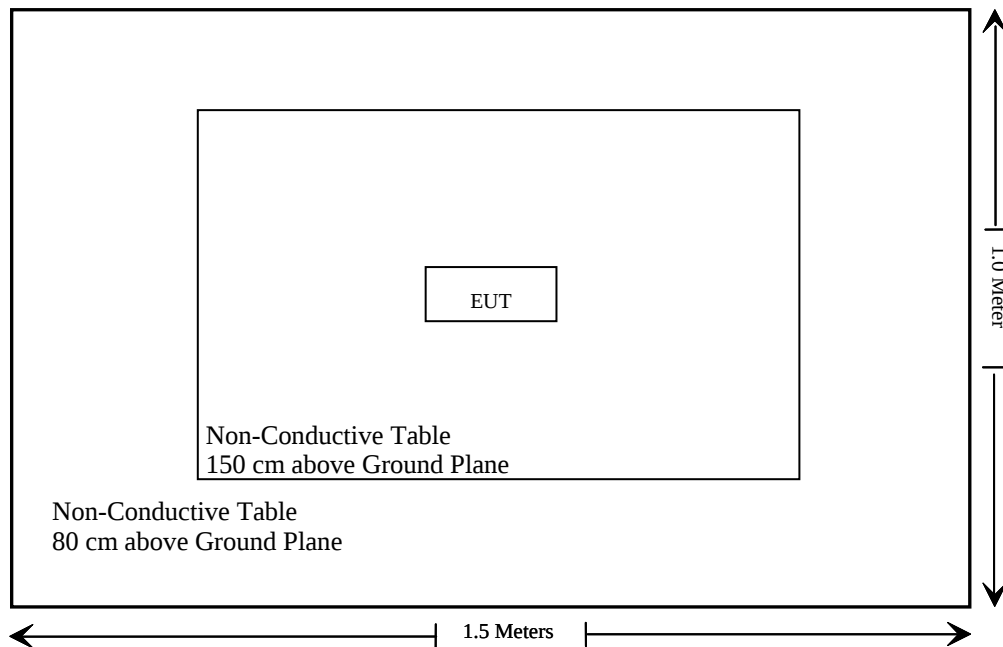

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307 , §2.1093	RF Exposure (SAR)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth & Occupied Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde& Schwarz	Test Receiver	ESPI3	100396	2020/12/24	2021/12/23
R & S	L.I.S.N.	ENV216	101314	2020/12/25	2021/12/24
Anritsu Corp	50Ω Coaxial Switch	MP59B	6200506474	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-2m	No.2	2020/12/25	2021/12/24
Conducted Emission Test Software: ES-K1 V1.71					
Radiated Emissions Test					
Rohde&Schwarz	Test Receiver	ESR	101817	2020/12/24	2021/12/23
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2020/12/24	2021/12/23
A.H. Systems, inc.	Preamplifier	PAM-0118P	531	2021/07/08	2022/07/07
SONOMA INSTRUMENT	Amplifier	310 N	186131	2020/12/25	2021/12/24
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Quinstar	Amplifier	QLW-1840553 6-J0	15964001002	2020/11/28	2021/11/27
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2020/01/04	2023/01/03
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Unknown	RF Coaxial Cable	N-5m	No.3	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-5m	No.4	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-1m	No.5	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-1m	No.6	2020/12/25	2021/12/24
Radiated Emission Test Software: EZ EMC V 1.1.4.2					
RF Conducted Test					
Rohde&Schwarz	Spectrum Analyzer	FSV40	101495	2020/12/24	2021/12/23
Rohde & Schwarz	Open Switch and Control Unit	OSP120 + OSP-B157	101244 + 100866	2020/12/24	2021/12/23

*** Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307(b) & §2.1093 - RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$\left[\frac{\text{max. power of channel, including tune-up tolerance, mW}}{(\text{min. test separation distance, mm})} \right] \cdot \sqrt{f(\text{GHz})} \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$$

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Test Result:

Compliant, please refer to the SAR report: SZXX1210918-48932E-SA.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has one internal antenna arrangement, which was permanently attached and the antenna gain is 1.5dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

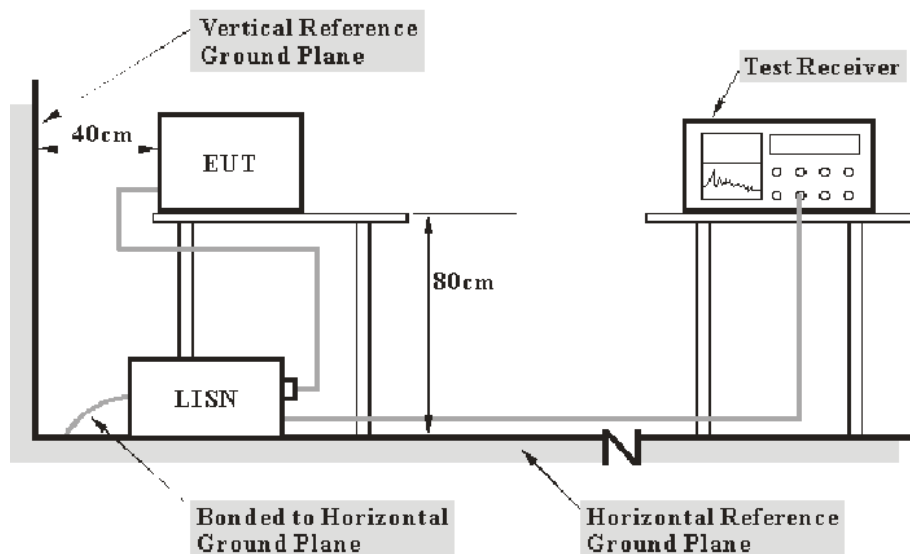

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Transd Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss. The basic equation is as follows:

$$\text{Transd Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{level}$$

$$\text{Level} = \text{reading level} + \text{Transd Factor}$$

Test Data**Environmental Conditions**


Temperature:	24-25 °C
Relative Humidity:	48-50 %
ATM Pressure:	101.0 kPa

The testing was performed by Black Ding on 2021-10-19 and 2021-10-20.

EUT operation mode: Charging+2.4G Wi-Fi (Worst case as below)

For adapter1

AC 120V/60 Hz, Line

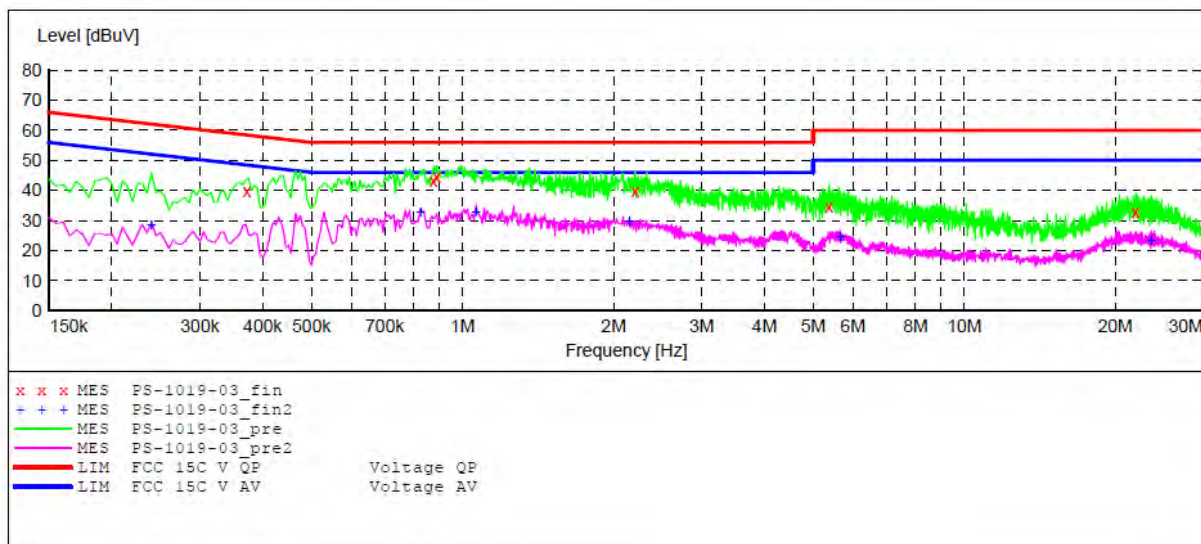**MEASUREMENT RESULT: "PS-1019-03_fin"**


2021-10-19 09:23

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.360000	40.10	10.9	59	18.9	QP	L1	GND
0.875000	43.10	11.1	56	12.9	QP	L1	GND
0.890000	44.60	11.1	56	11.4	QP	L1	GND
2.210000	39.90	11.3	56	16.1	QP	L1	GND
5.380000	34.80	11.5	60	25.2	QP	L1	GND
21.975000	32.80	11.7	60	27.2	QP	L1	GND

MEASUREMENT RESULT: "PS-1019-03_fin2"

2021-10-19 09:23

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.240000	28.50	10.9	52	23.5	AV	L1	GND
0.825000	33.00	11.1	46	13.0	AV	L1	GND
1.065000	33.00	11.1	46	13.0	AV	L1	GND
2.150000	29.80	11.3	46	16.2	AV	L1	GND
5.660000	24.90	11.5	50	25.1	AV	L1	GND
23.600000	23.30	11.7	50	26.7	AV	L1	GND

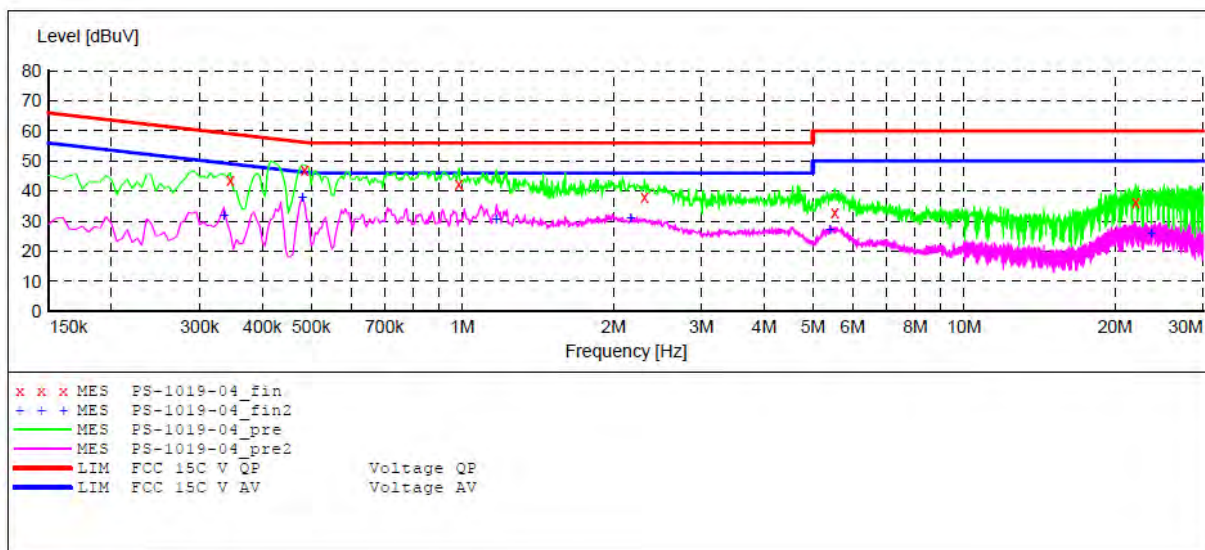AC 120V/60 Hz, Neutral**MEASUREMENT RESULT: "PS-1019-04_fin"**

2021-10-19 09:25

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.345000	43.30	10.9	59	15.7	QP	N	GND
0.485000	46.90	11.0	56	9.1	QP	N	GND
0.985000	42.30	11.1	56	13.7	QP	N	GND
2.310000	38.10	11.3	56	17.9	QP	N	GND
5.530000	33.10	11.5	60	26.9	QP	N	GND
22.000000	36.30	11.7	60	23.7	QP	N	GND


MEASUREMENT RESULT: "PS-1019-04_fin2"

2021-10-19 09:25

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.335000	31.90	10.9	49	17.1	AV	N	GND
0.480000	38.10	11.0	46	7.9	AV	N	GND
1.170000	30.70	11.2	46	15.3	AV	N	GND
2.170000	31.40	11.3	46	14.6	AV	N	GND
5.410000	27.20	11.5	50	22.8	AV	N	GND
23.650000	26.00	11.7	50	24.0	AV	N	GND

For adapter2

AC 120V/60 Hz, Line

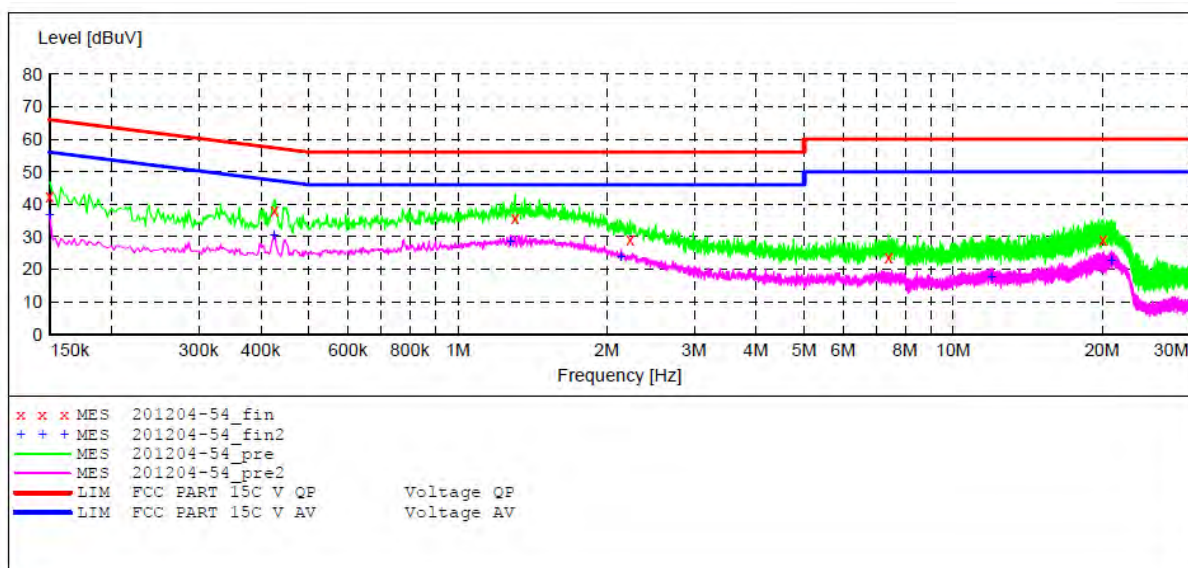**MEASUREMENT RESULT: "201204-54_fin"**


2021-10-20 14:32

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.150000	42.40	10.8	66	23.6	QP	L1	GND
0.426000	38.10	11.0	57	18.9	QP	L1	GND
1.304000	35.60	11.2	56	20.4	QP	L1	GND
2.230000	29.30	11.3	56	26.7	QP	L1	GND
7.405000	23.80	11.5	60	36.2	QP	L1	GND
20.080000	29.30	11.7	60	30.7	QP	L1	GND

MEASUREMENT RESULT: "201204-54_fin2"

2021-10-20 14:32

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.150000	36.80	10.8	56	19.2	AV	L1	GND
0.426000	30.80	11.0	47	16.2	AV	L1	GND
1.278000	28.70	11.2	46	17.3	AV	L1	GND
2.135000	24.20	11.3	46	21.8	AV	L1	GND
11.945000	17.90	11.6	50	32.1	AV	L1	GND
20.880000	23.00	11.7	50	27.0	AV	L1	GND

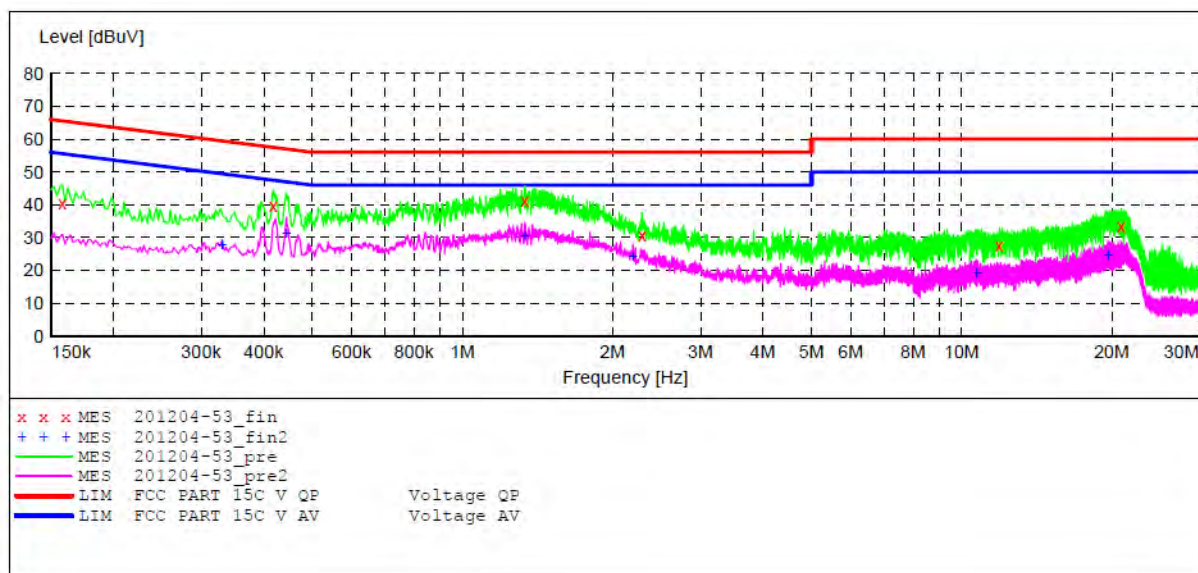AC 120V/60 Hz, Neutral**MEASUREMENT RESULT: "201204-53_fin"**

2021-10-20 14:29

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.158000	40.50	10.8	66	25.5	QP	N	GND
0.418000	39.60	11.0	58	18.4	QP	N	GND
1.334000	41.10	11.2	56	14.9	QP	N	GND
2.290000	30.60	11.3	56	25.4	QP	N	GND
11.895000	27.40	11.6	60	32.6	QP	N	GND
20.850000	33.40	11.7	60	26.6	QP	N	GND



MEASUREMENT RESULT: "201204-53_fin2"

2021-10-20 14:29

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.330000	28.50	10.9	50	21.5	AV	N	GND
0.444000	31.50	11.0	47	15.5	AV	N	GND
1.334000	30.50	11.2	46	15.5	AV	N	GND
2.195000	24.30	11.3	46	21.7	AV	N	GND
10.705000	19.30	11.6	50	30.7	AV	N	GND
19.615000	24.90	11.7	50	25.1	AV	N	GND

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

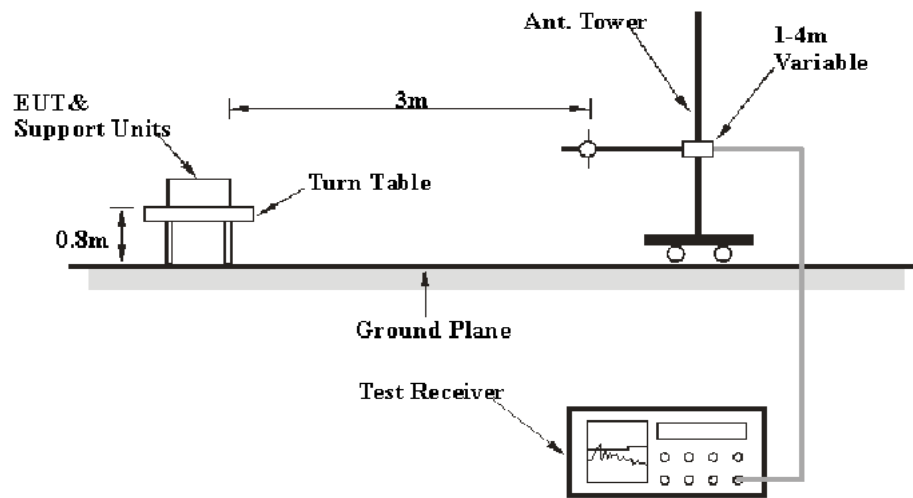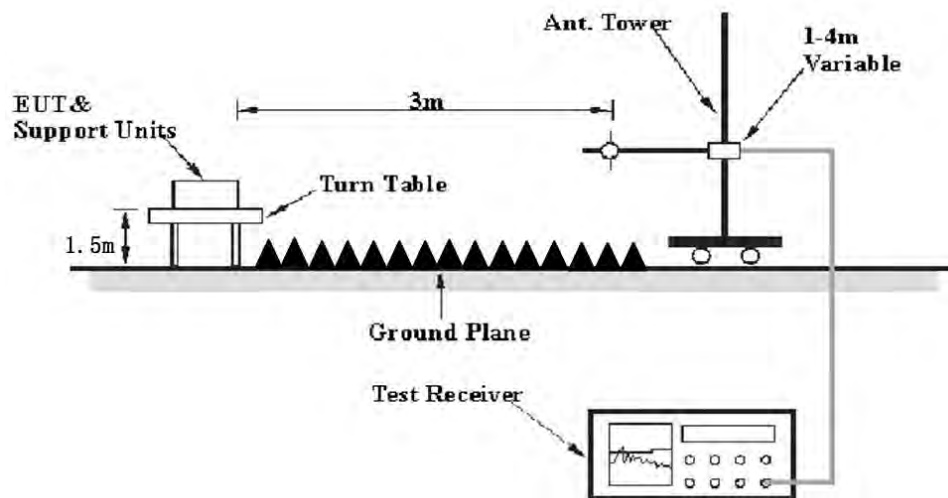EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	> 1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned} \text{Margin} &= \text{Result} / \text{Corrected Amplitude-Limit} \\ \text{Result} / \text{Corrected Amplitude} &= \text{Reading} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions

Temperature:	23-24 °C
Relative Humidity:	48-52 %
ATM Pressure:	101.0 kPa



The testing was performed by Black Ding on 2021-10-18 and 2021-10-19.

EUT operation mode: Transmitting



(Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

30MHz-1GHz: (Worst case)

For adapter1

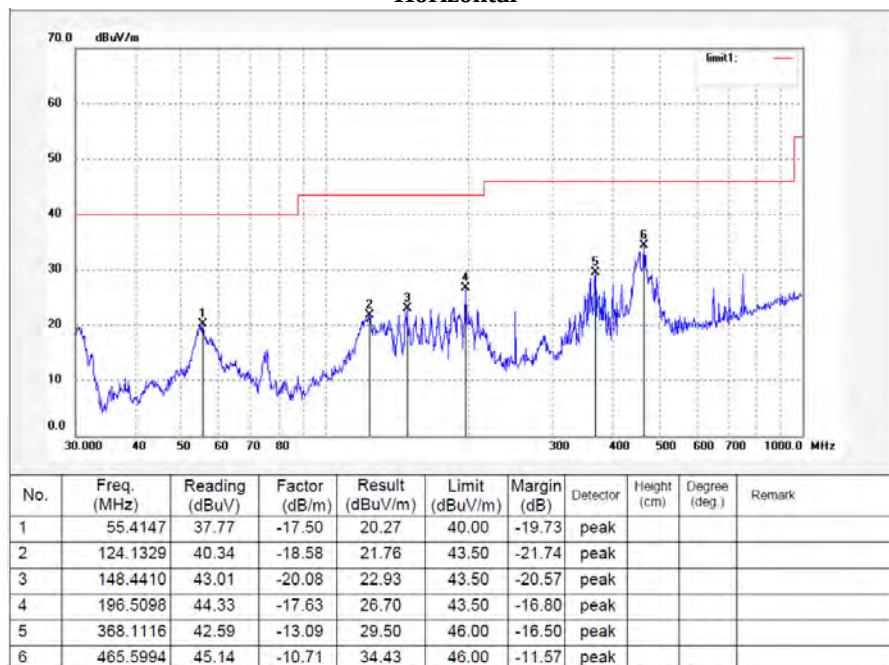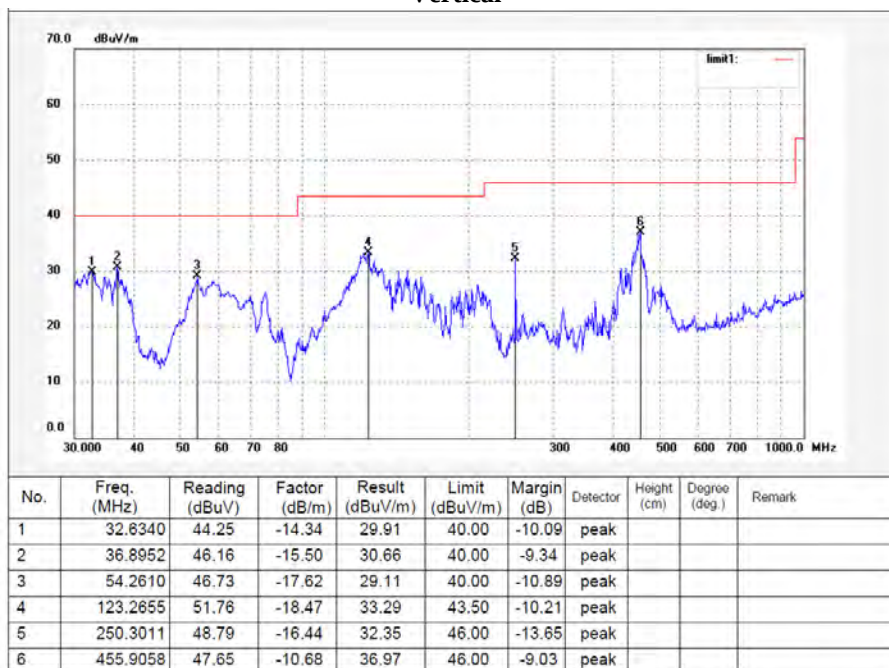Wi-Fi: 802.11B mode, low Channel**Horizontal****Vertical**

For adapter2

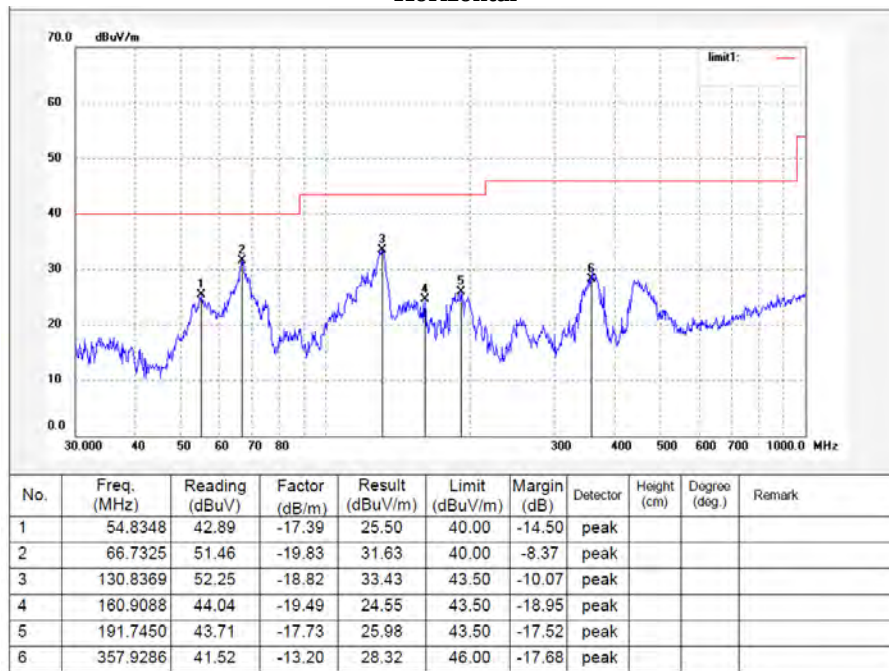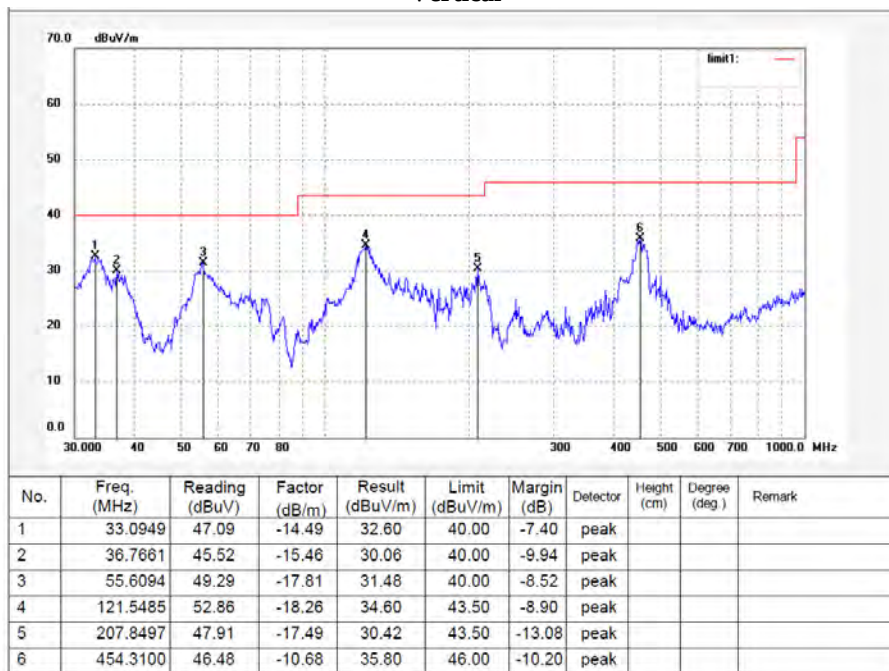Horizontal**Vertical**

1-25 GHz:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave		Height (m)	Polar (H/V)				
802.11B, Low Channel									
2310.00	67.92	PK	252	2.3	H	-6.84	61.08	74.00	-12.92
2310.00	55.03	AV	252	2.3	H	-6.84	48.19	54.00	-5.81
2310.00	65.61	PK	153	2.1	V	-6.84	58.77	74.00	-15.23
2310.00	52.88	AV	153	2.1	V	-6.84	46.04	54.00	-7.96
2390.00	67.64	PK	49	1.9	H	-6.44	61.20	74.00	-12.80
2390.00	54.24	AV	49	1.9	H	-6.44	47.80	54.00	-6.20
2390.00	64.96	PK	130	1.6	V	-6.44	58.52	74.00	-15.48
2390.00	52.23	AV	130	1.6	V	-6.44	45.79	54.00	-8.21
4824.00	47.79	PK	150	1.8	H	2.87	50.66	74.00	-23.34
4824.00	46.07	PK	353	1.4	V	2.87	48.94	74.00	-25.06
802.11B, Middle Channel									
4884.00	47.98	PK	6	1.3	H	3.04	51.02	74.00	-22.98
4884.00	45.25	PK	251	2.4	V	3.04	48.29	74.00	-25.71
11B, High Channel									
2483.50	67.2	PK	99	1.2	H	-5.96	61.24	74.00	-12.76
2483.50	53.06	AV	99	1.2	H	-5.96	47.1	54.00	-6.9
2483.50	64.64	PK	104	1.3	V	-5.96	58.68	74.00	-15.32
2483.50	50.51	AV	104	1.3	V	-5.96	44.55	54.00	-9.45
2500.00	69.29	PK	35	1.2	H	-5.88	63.41	74.00	-10.59
2500.00	56.23	AV	35	1.2	H	-5.88	50.35	54.00	-3.65
2500.00	67.42	PK	270	1.9	V	-5.88	61.54	74.00	-12.46
2500.00	54.54	AV	270	1.9	V	-5.88	48.66	54.00	-5.34
4944.00	48.01	PK	248	2.2	H	3.23	51.24	74.00	-22.76
4944.00	45.61	PK	325	2.4	V	3.23	48.84	74.00	-25.16
802.11G, Low Channel									
2310.00	68.37	PK	175	2.3	H	-6.84	61.53	74.00	-12.47
2310.00	54.78	AV	175	2.3	H	-6.84	47.94	54.00	-6.06
2310.00	65.19	PK	233	1.5	V	-6.84	58.35	74.00	-15.65
2310.00	51.85	AV	233	1.5	V	-6.84	45.01	54.00	-8.99
2390.00	67.49	PK	139	1.2	H	-6.44	61.05	74.00	-12.95
2390.00	54.22	AV	139	1.2	H	-6.44	47.78	54.00	-6.22
2390.00	64.46	PK	342	1.6	V	-6.44	58.02	74.00	-15.98
2390.00	51.12	AV	342	1.6	V	-6.44	44.68	54.00	-9.32
4824.00	47.39	PK	162	2.0	H	2.87	50.26	74.00	-23.74
4824.00	43.49	PK	338	1.9	V	2.87	46.36	74.00	-27.64
802.11G, Middle Channel									
4884.00	47.59	PK	41	1.4	H	3.04	50.63	74.00	-23.37
4884.00	43.4	PK	225	2.2	V	3.04	46.44	74.00	-27.56
802.11G, High Channel									
2483.50	69.41	PK	22	1.3	H	-5.96	63.45	74.00	-10.55
2483.50	53.05	AV	22	1.3	H	-5.96	47.09	54.00	-6.91
2483.50	67.32	PK	286	1.8	V	-5.96	61.36	74.00	-12.64
2483.50	51.05	AV	286	1.8	V	-5.96	45.09	54.00	-8.91
2500.00	76.72	PK	136	2.2	H	-5.88	70.84	74.00	-3.16
2500.00	56.05	AV	136	2.2	H	-5.88	50.17	54.00	-3.83
2500.00	74.43	PK	248	2.0	V	-5.88	68.55	74.00	-5.45
2500.00	53.75	AV	248	2.0	V	-5.88	47.87	54.00	-6.13

4944.00	47.79	PK	170	2.1	H	3.23	51.02	74.00	-22.98
4944.00	43.64	PK	305	2.2	V	3.23	46.87	74.00	-27.13
802.11N20, Low Channel									
2310.00	69.58	PK	283	1.3	H	-6.84	62.74	74.00	-11.26
2310.00	55.03	AV	283	1.3	H	-6.84	48.19	54.00	-5.81
2310.00	66.38	PK	175	2.3	V	-6.84	59.54	74.00	-14.46
2310.00	52.16	AV	175	2.3	V	-6.84	45.32	54.00	-8.68
2390.00	68.13	PK	134	1.9	H	-6.44	61.69	74.00	-12.31
2390.00	54.2	AV	134	1.9	H	-6.44	47.76	54.00	-6.24
2390.00	64.91	PK	348	1.7	V	-6.44	58.47	74.00	-15.53
2390.00	51.29	AV	348	1.7	V	-6.44	44.85	54.00	-9.15
4824.00	47.13	PK	358	1.3	H	2.87	50.00	74.00	-24.00
4824.00	43.15	PK	354	1.3	V	2.87	46.02	74.00	-27.98
802.11N20, Middle Channel									
4884.00	47.73	PK	265	2.5	H	3.04	50.77	74.00	-23.23
4884.00	43.76	PK	335	2.1	V	3.04	46.80	74.00	-27.20
802.11N20, High Channel									
2483.50	67.6	PK	263	2.5	H	-5.96	61.64	74.00	-12.36
2483.50	53.51	AV	263	2.5	H	-5.96	47.55	54.00	-6.45
2483.50	64.32	PK	9	1.9	V	-5.96	58.36	74.00	-15.64
2483.50	50.97	AV	9	1.9	V	-5.96	45.01	54.00	-8.99
2500.00	76.7	PK	124	1.7	H	-5.88	70.82	74.00	-3.18
2500.00	55.73	AV	124	1.7	H	-5.88	49.85	54.00	-4.15
2500.00	73.62	PK	119	2.4	V	-5.88	67.74	74.00	-6.26
2500.00	52.52	AV	119	2.4	V	-5.88	46.64	54.00	-7.36
4944.00	47.38	PK	265	2.1	H	3.23	50.61	74.00	-23.39
4944.00	43.46	PK	264	1.6	V	3.23	46.69	74.00	-27.31
802.11N40, Low Channel									
2310.00	72.22	PK	114	1.6	H	-6.84	65.38	74.00	-8.62
2310.00	57.8	AV	114	1.6	H	-6.84	50.96	54.00	-3.04
2310.00	69.71	PK	258	1.3	V	-6.84	62.87	74.00	-11.13
2310.00	54.95	AV	258	1.3	V	-6.84	48.11	54.00	-5.89
2390.00	67.74	PK	207	1.4	H	-6.44	61.30	74.00	-12.70
2390.00	54.26	AV	207	1.4	H	-6.44	47.82	54.00	-6.18
2390.00	64.57	PK	5	2.4	V	-6.44	58.13	74.00	-15.87
2390.00	51.09	AV	5	2.4	V	-6.44	44.65	54.00	-9.35
4844.00	47.03	PK	330	2.1	H	2.92	49.95	74.00	-24.05
4844.00	42.72	PK	348	1.2	V	2.92	45.64	74.00	-28.36
802.11N40, Middle Channel									
4884.00	47.41	PK	30	1.8	H	3.04	50.45	74.00	-23.55
4884.00	43.46	PK	306	1.6	V	3.04	46.50	74.00	-27.50
802.11N40, High Channel									
2483.50	71.34	PK	355	2.3	H	-5.96	65.38	74.00	-8.62
2483.50	56.92	AV	355	2.3	H	-5.96	50.96	54.00	-3.04
2483.50	69.01	PK	266	2.2	V	-5.96	63.05	74.00	-10.95
2483.50	54.5	AV	266	2.2	V	-5.96	48.54	54.00	-5.46
2500.00	66.9	PK	298	1.3	H	-5.88	61.02	74.00	-12.98
2500.00	53.27	AV	298	1.3	H	-5.88	47.39	54.00	-6.61
2500.00	64.54	PK	281	1.1	V	-5.88	58.66	74.00	-15.34
2500.00	50.85	AV	281	1.1	V	-5.88	44.97	54.00	-9.03
4924.00	46.87	PK	198	1.8	H	3.17	50.04	74.00	-23.96
4924.00	43.17	PK	343	2.3	V	3.17	46.34	74.00	-27.66

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading


Margin = Corrected. Amplitude- Limit

The other spurious emission which is 20dB below to the limit was not recorded.


The test result of peak was less than the limit of average, so just peak values were recorded.

1-18 GHz:

**Pre-scan for Peak
802.11 b Low Channel
Horizontal**

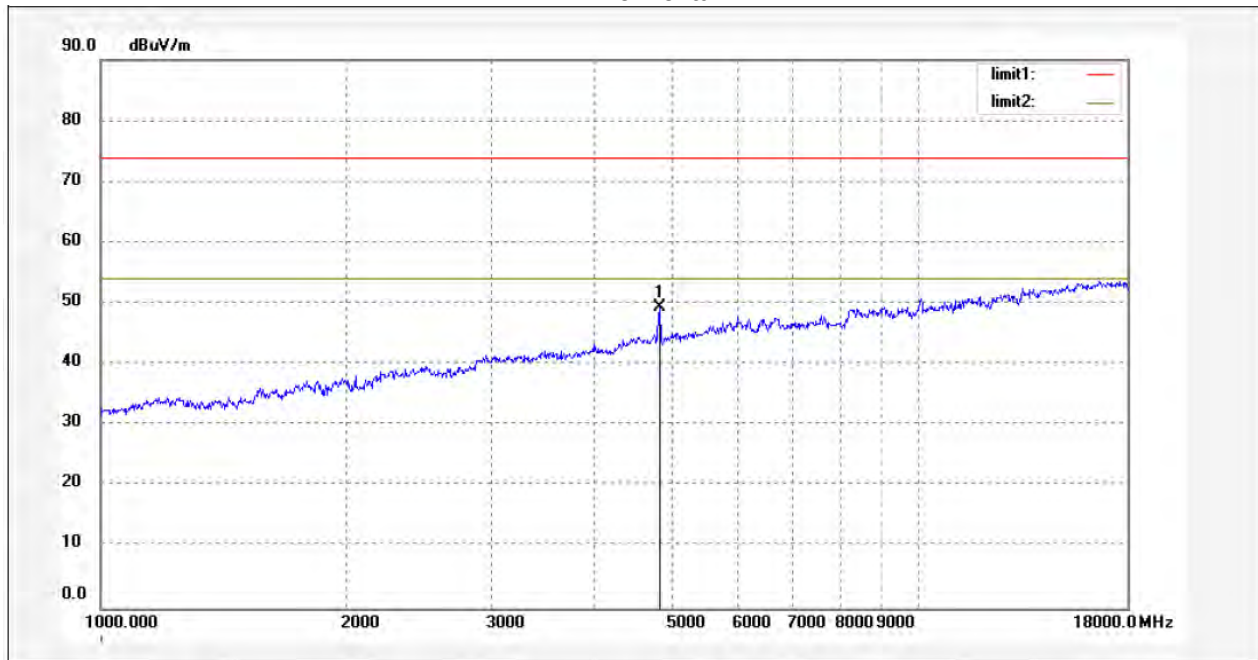


Vertical

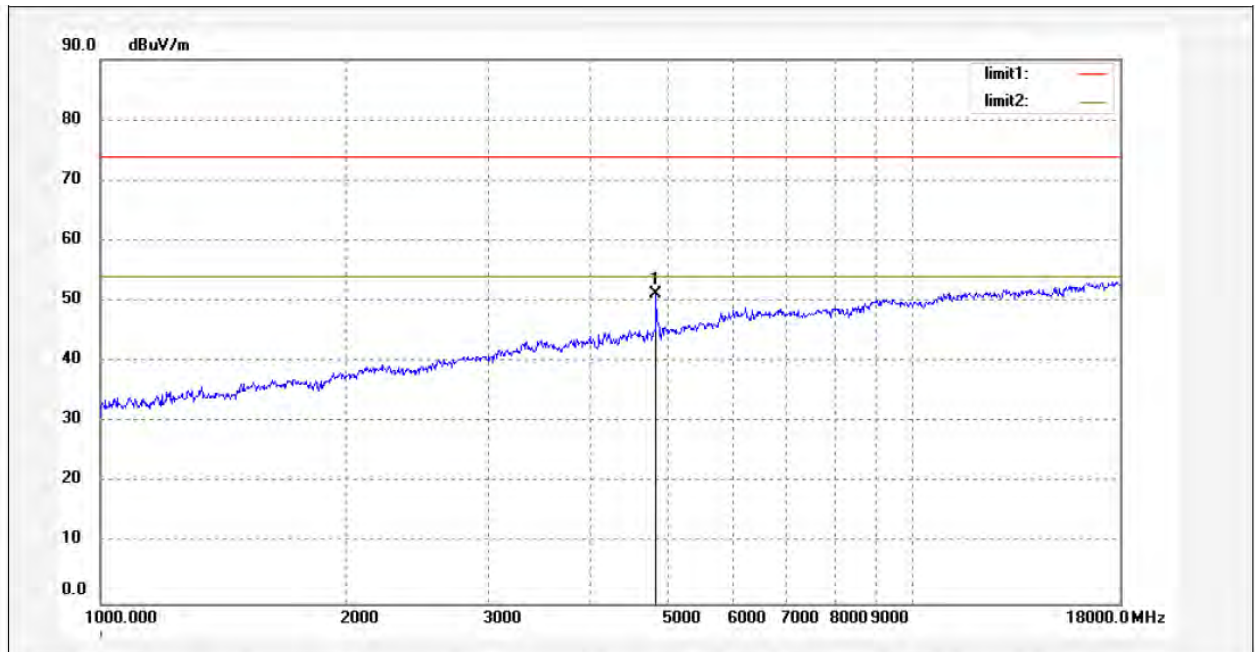


18 -25GHz:

Pre-scan for Peak
802.11 b Low Channel
Horizontal

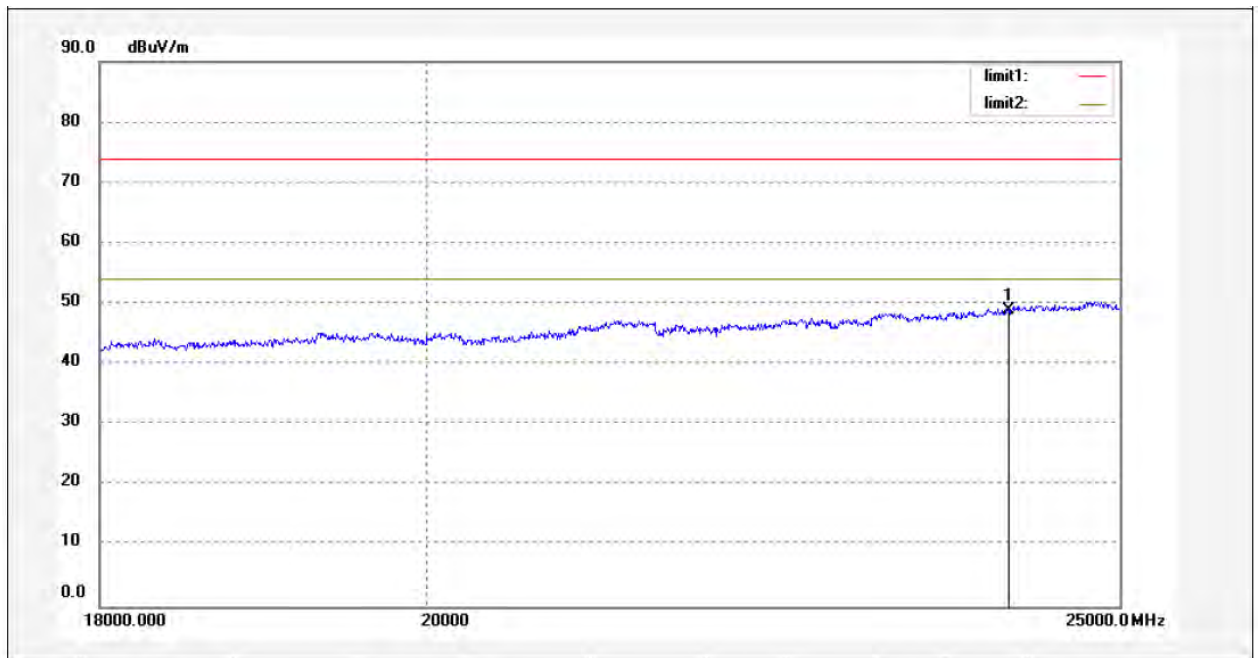

Vertical

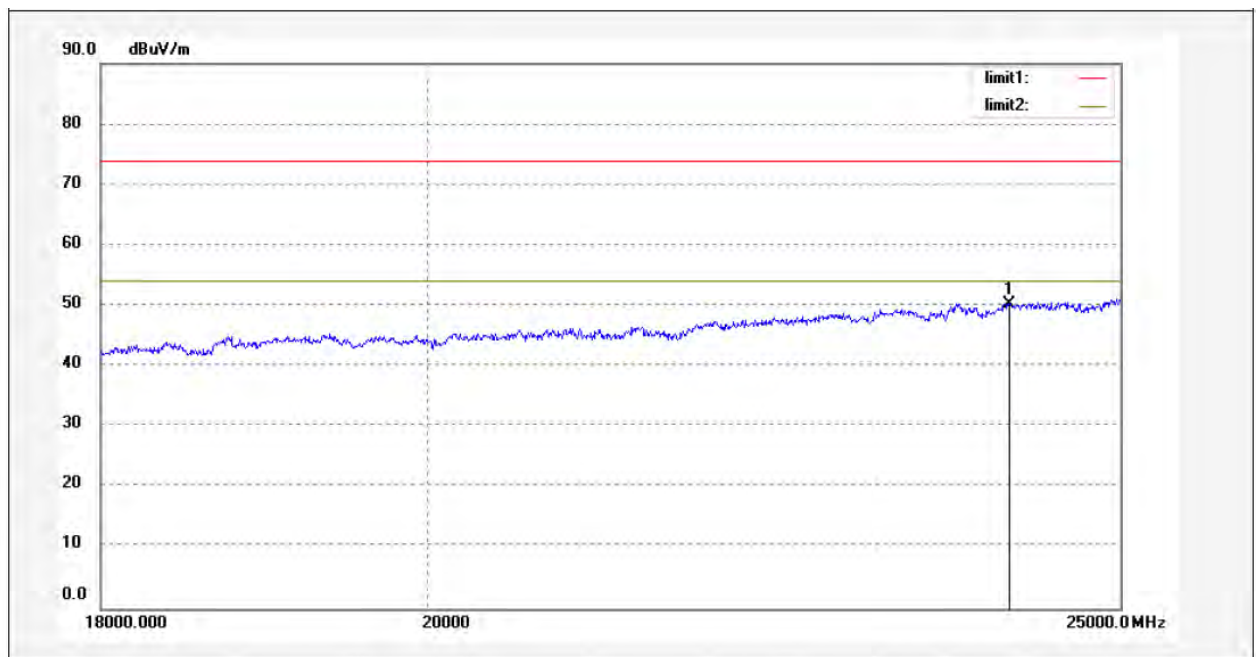


FCC §15.247(A) (2) – 6 DB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Data

Environmental Conditions

Temperature:	27 °C
Relative Humidity:	57 %
ATM Pressure:	101.0 kPa

The testing was performed by Black Ding on 2021-10-20.

EUT operation mode: Transmitting


Test Result: Compliant. Please refer to the Appendix Wi-Fi.

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER**Applicable Standard**

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

**Test Data****Environmental Conditions**

Temperature:	27 °C
Relative Humidity:	57 %
ATM Pressure:	101.0 kPa

The testing was performed by Black Ding on 2021-10-20.

EUT operation mode: Transmitting


Test Result: Compliant. Please refer to the Appendix Wi-Fi.

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

**Test Data****Environmental Conditions**

Temperature:	27 °C
Relative Humidity:	57 %
ATM Pressure:	101.0 kPa

The testing was performed by Black Ding on 2021-10-20.

EUT operation mode: Transmitting

Test Result: Compliant.

Conducted Band Edge Result:


Please refer to the Appendix Wi-Fi.

FCC §15.247(e) - POWER SPECTRAL DENSITY**Applicable Standard**

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

**Test Data****Environmental Conditions**

Temperature:	27 °C
Relative Humidity:	57 %
ATM Pressure:	101.0 kPa

The testing was performed by Black Ding on 2021-10-20.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix Wi-Fi.


APPENDIX Wi-Fi


Appendix A: 6dB Emission Bandwidth

Test Result


TestMode	Antenna	Channel [MHz]	DTS BW [MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	10.120	0.5	PASS
		2442	10.120	0.5	PASS
		2472	10.120	0.5	PASS
11G	Ant1	2412	16.600	0.5	PASS
		2442	16.600	0.5	PASS
		2472	16.600	0.5	PASS
11N20SISO	Ant1	2412	17.840	0.5	PASS
		2442	17.840	0.5	PASS
		2472	17.720	0.5	PASS
11N40SISO	Ant1	2422	36.560	0.5	PASS
		2442	36.480	0.5	PASS
		2462	36.480	0.5	PASS

Test Graphs

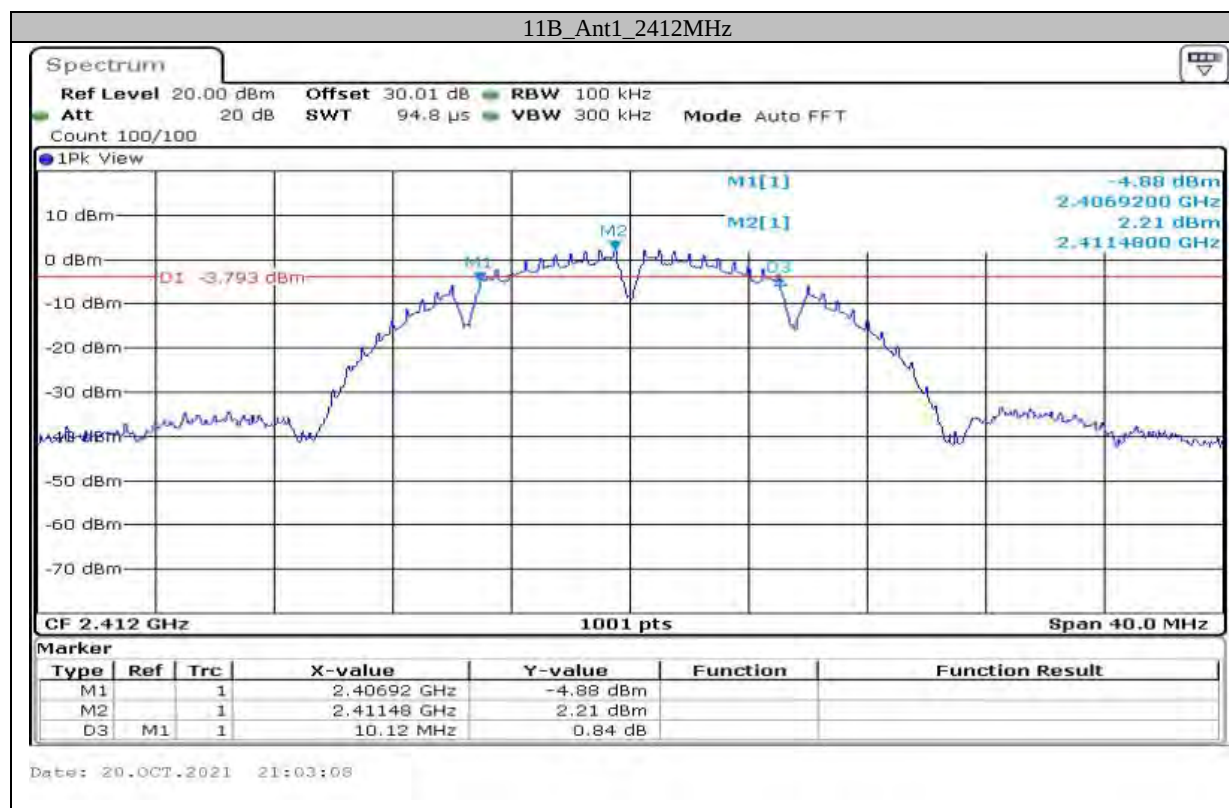

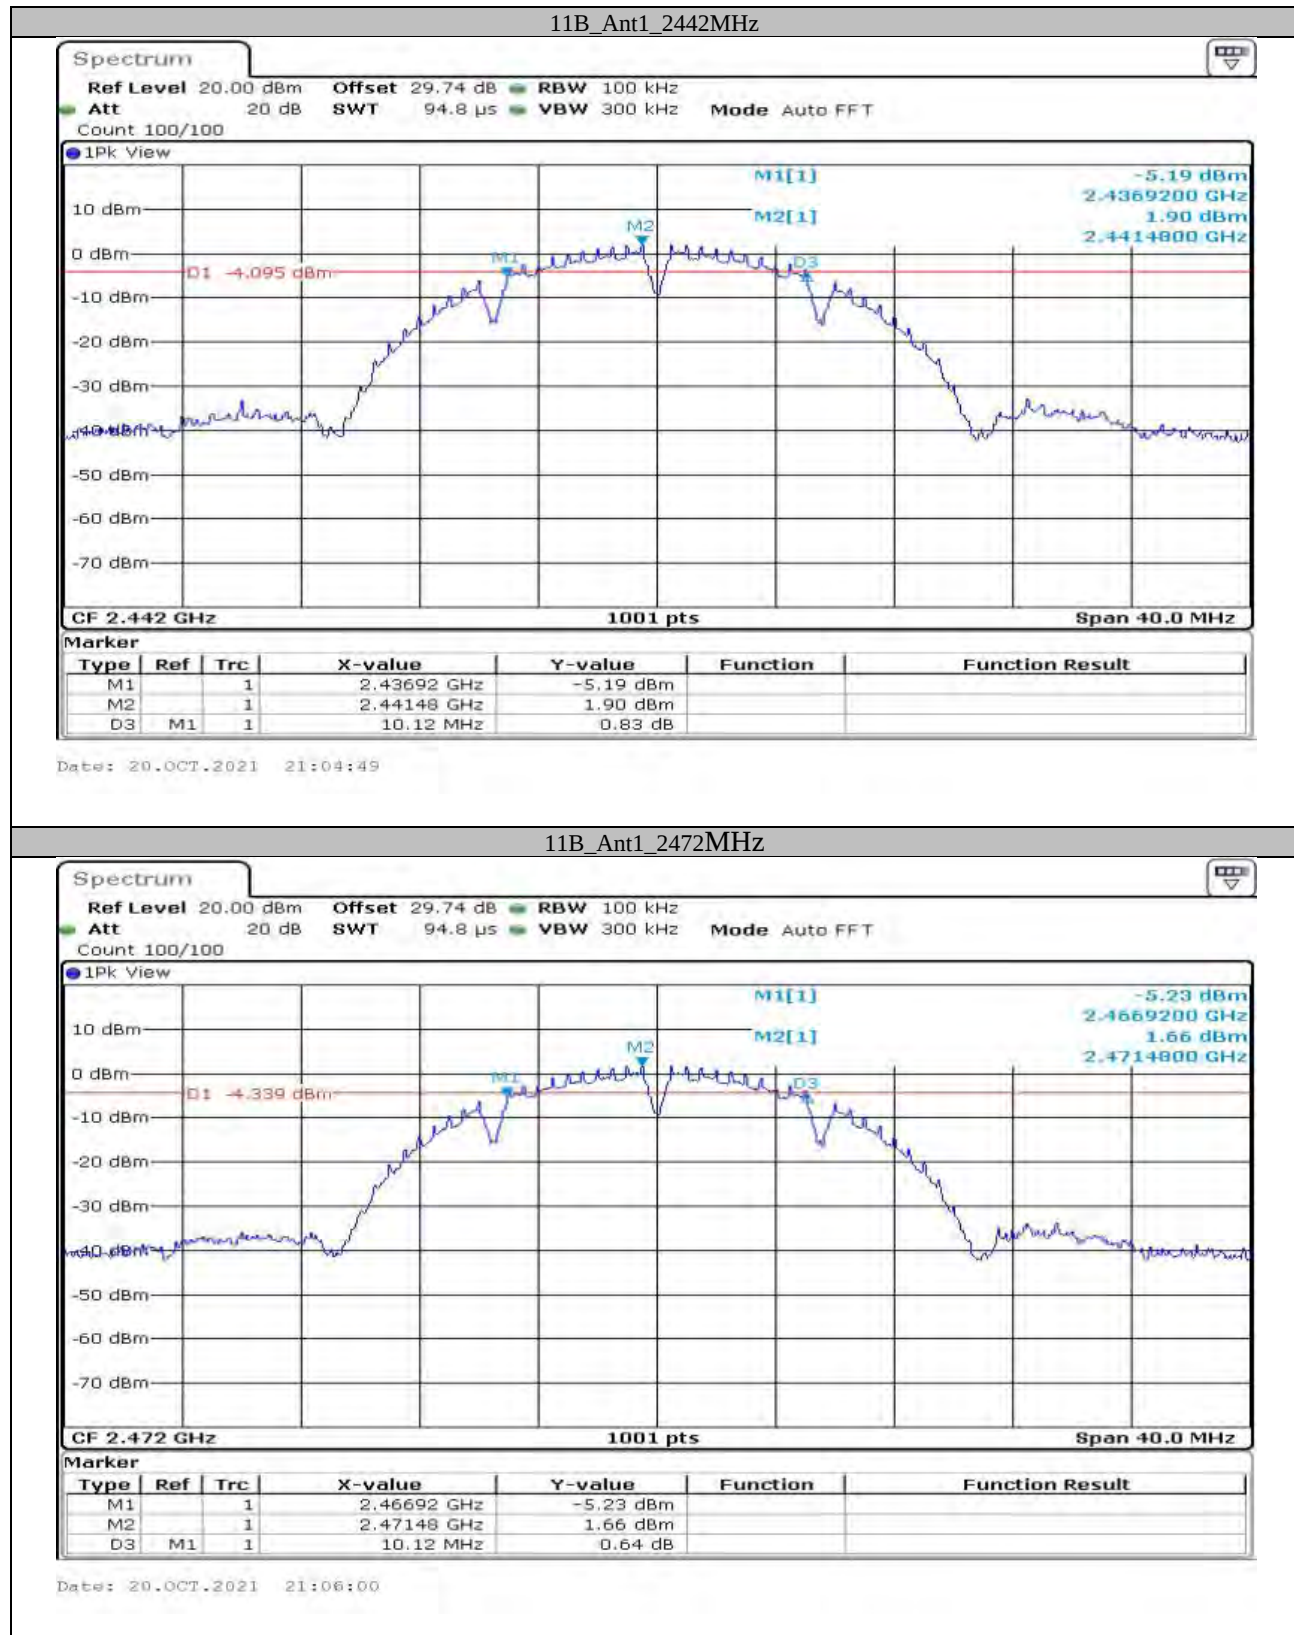


11G_Ant1_2412MHz

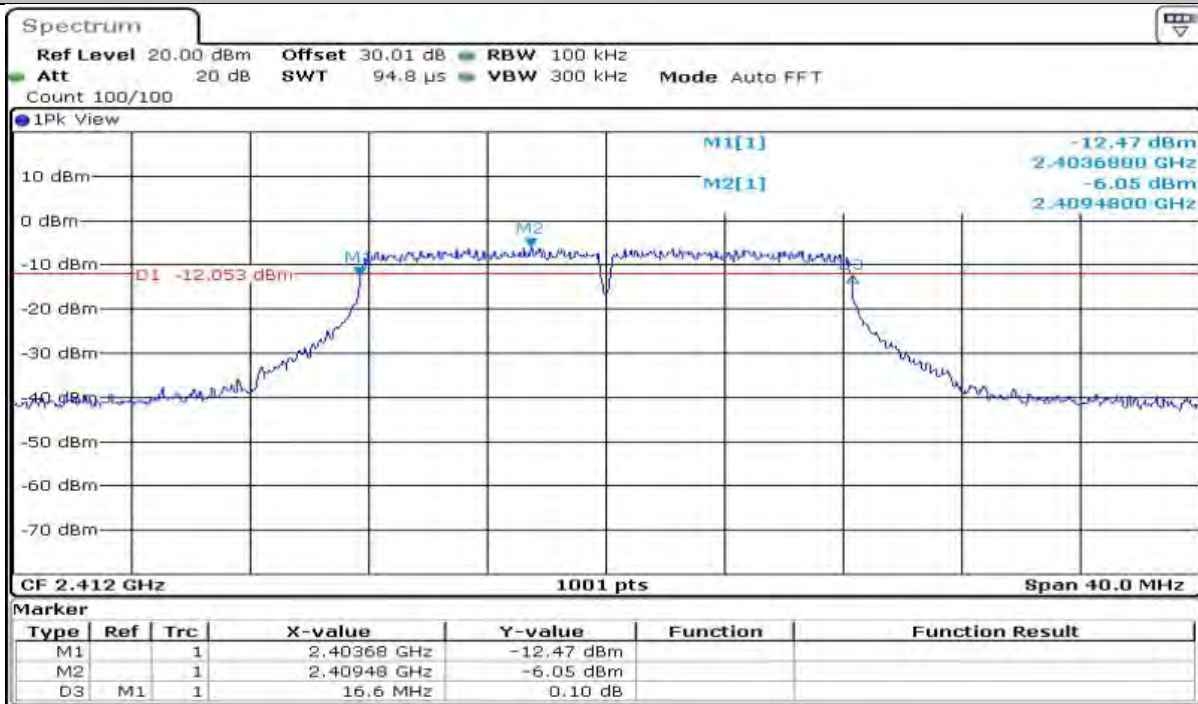


Date: 20.OCT.2021 21:07:28


11G_Ant1_2442MHz

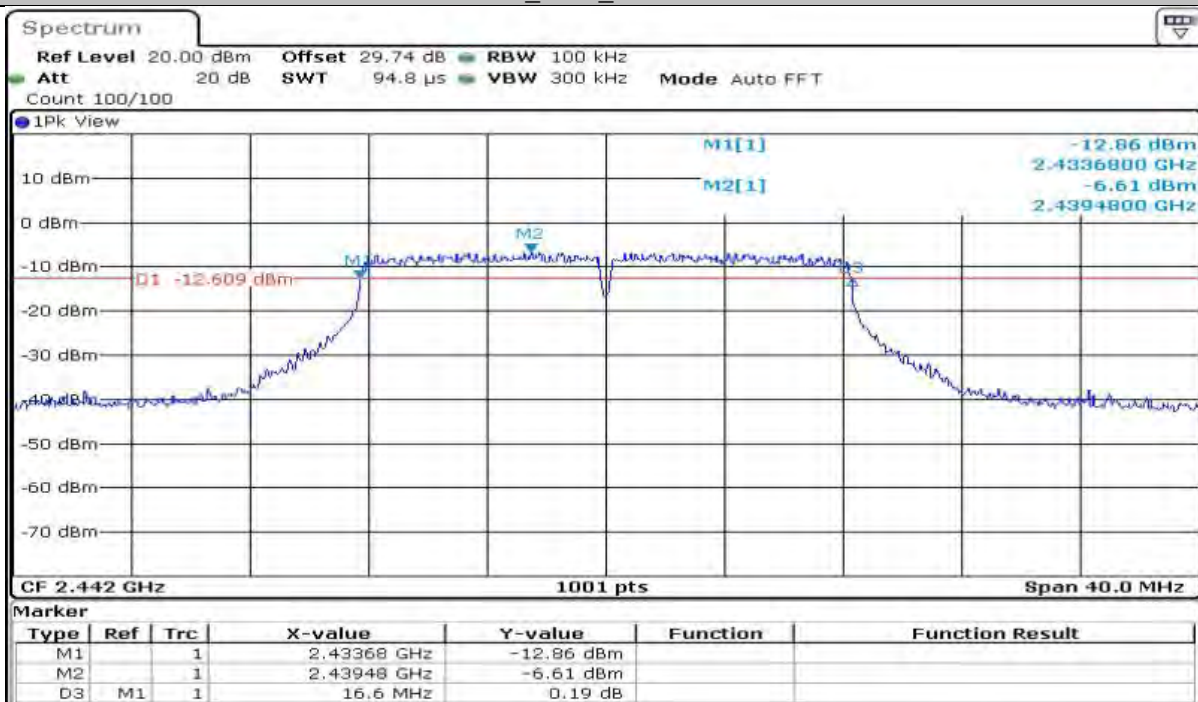

Date: 20.OCT.2021 21:09:08

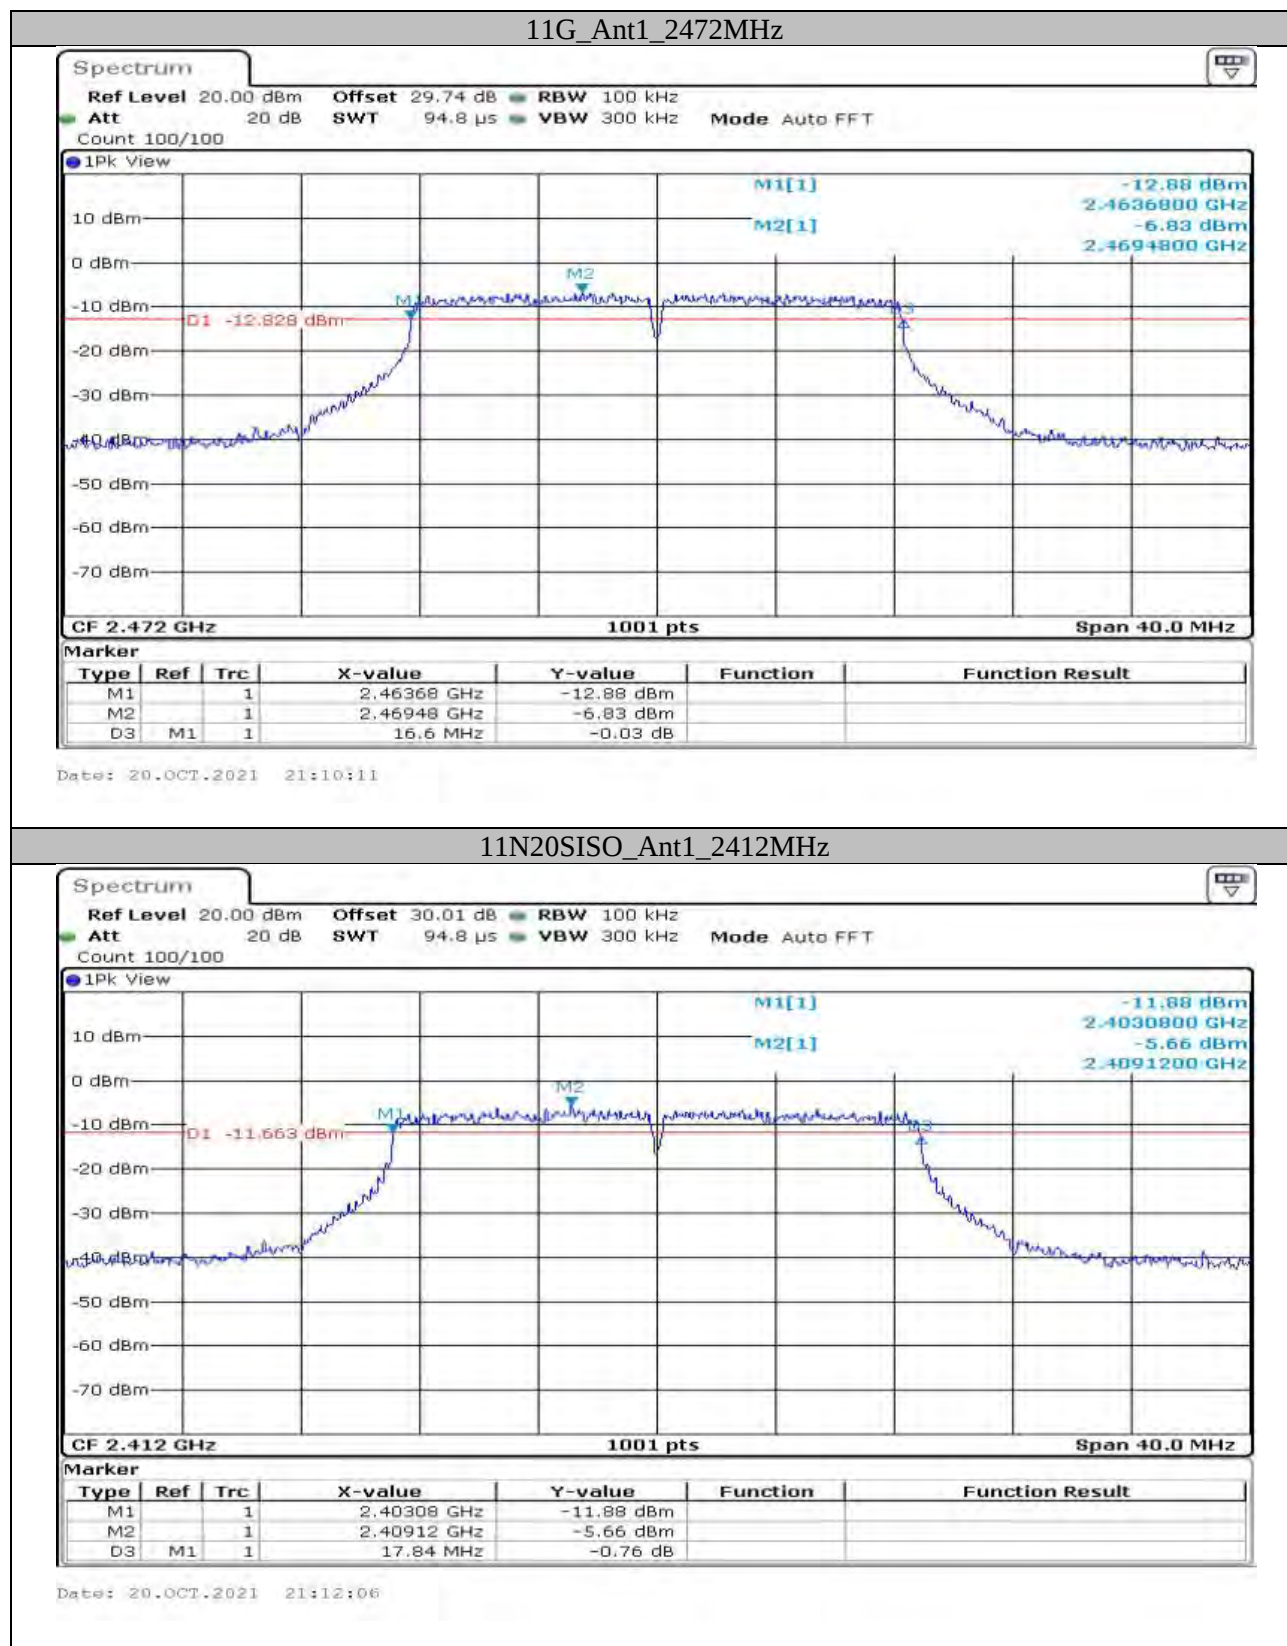


11N20SISO_Ant1_2442MHz

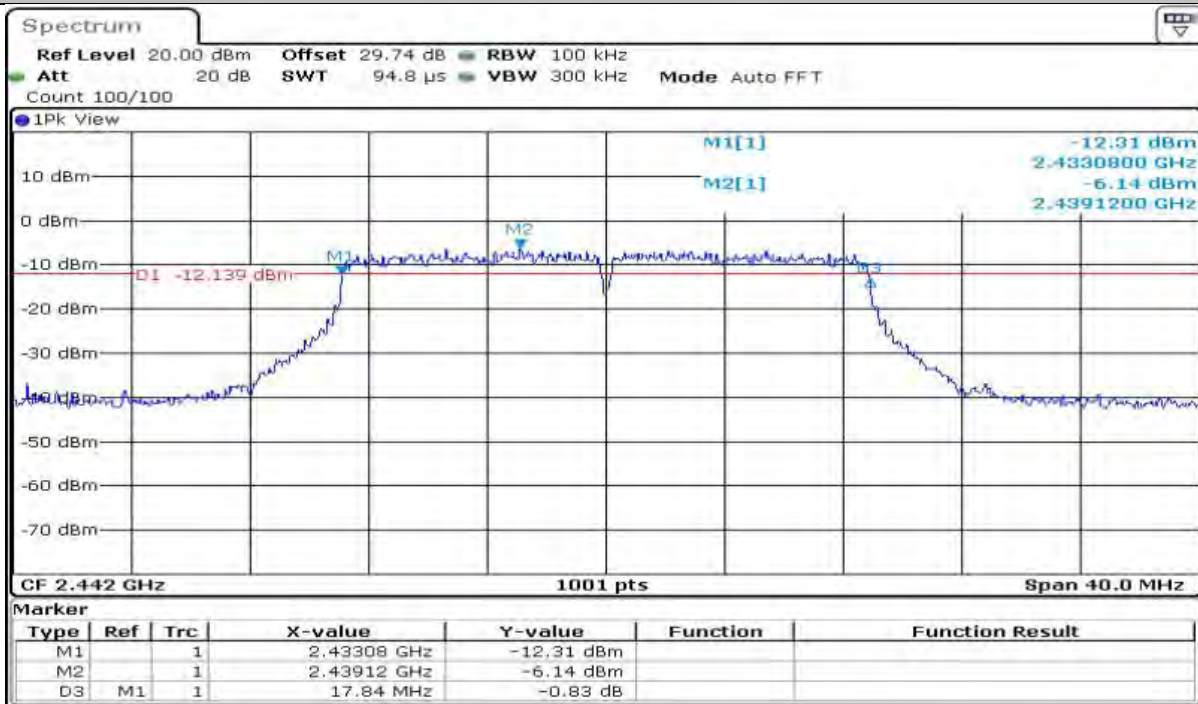

Date: 20.OCT.2021 21:14:08

11N20SISO_Ant1_2472MHz

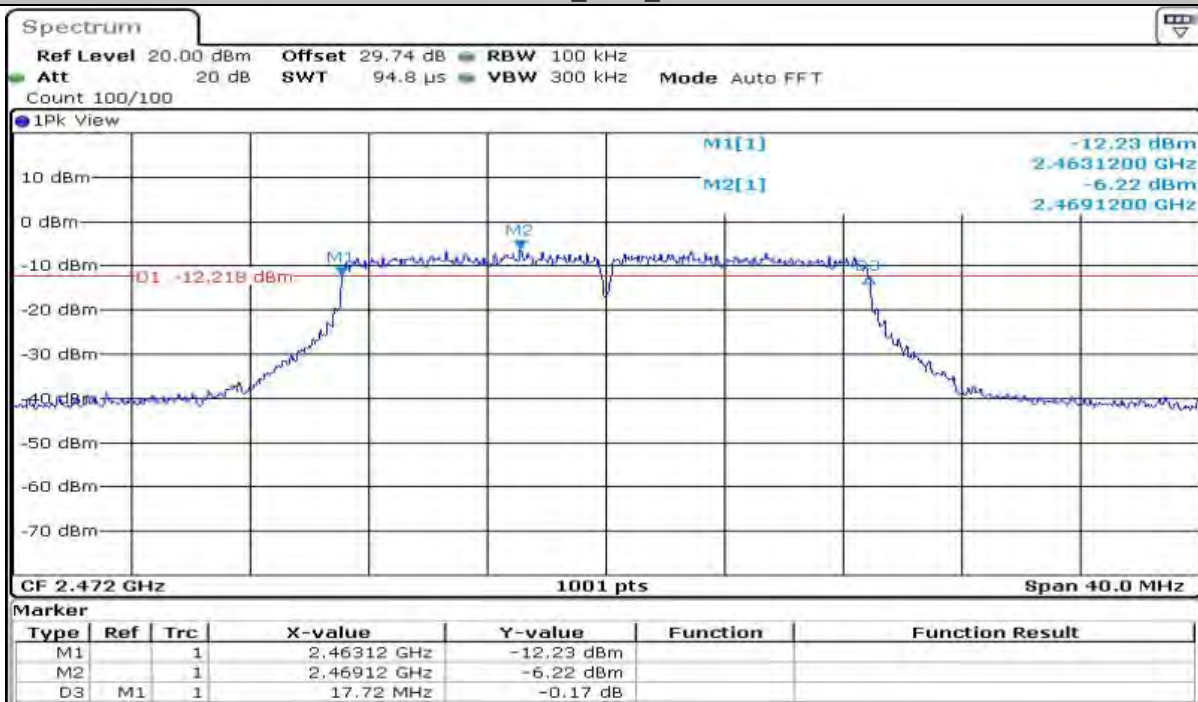


Date: 20.OCT.2021 21:15:28

11N40SISO_Ant1_2422MHz




Date: 20.OCT.2021 21:16:54

11N40SISO_Ant1_2442MHz

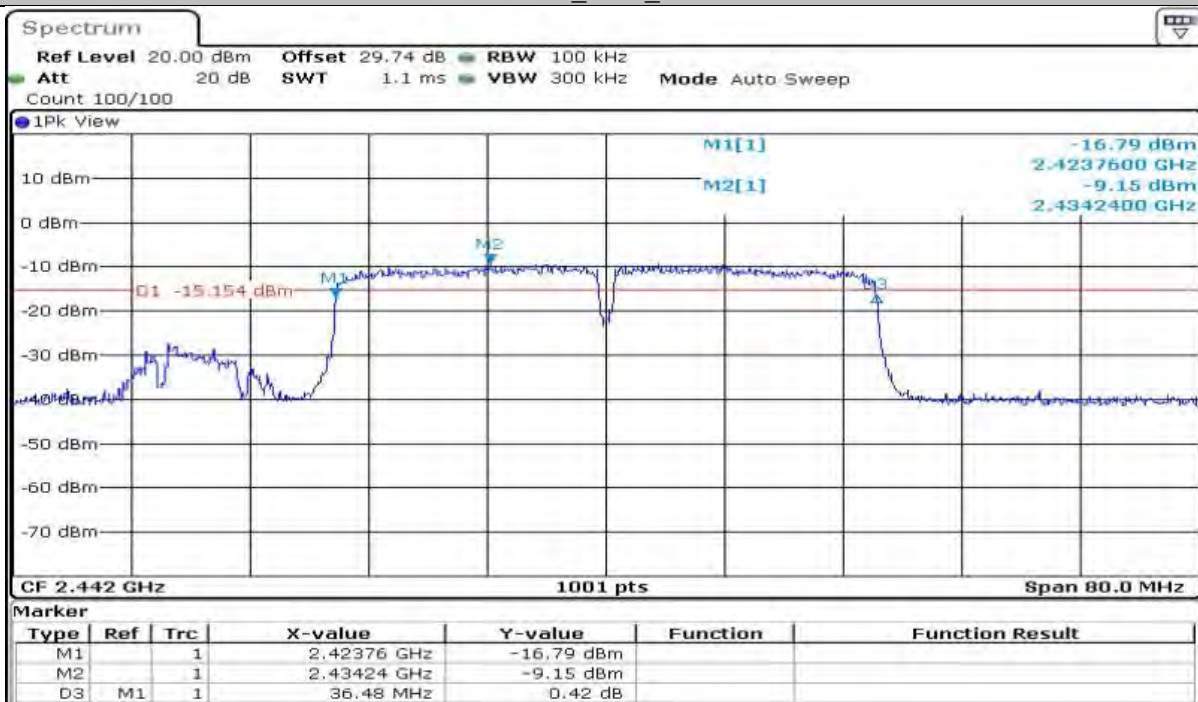

Date: 20.OCT.2021 21:16:37

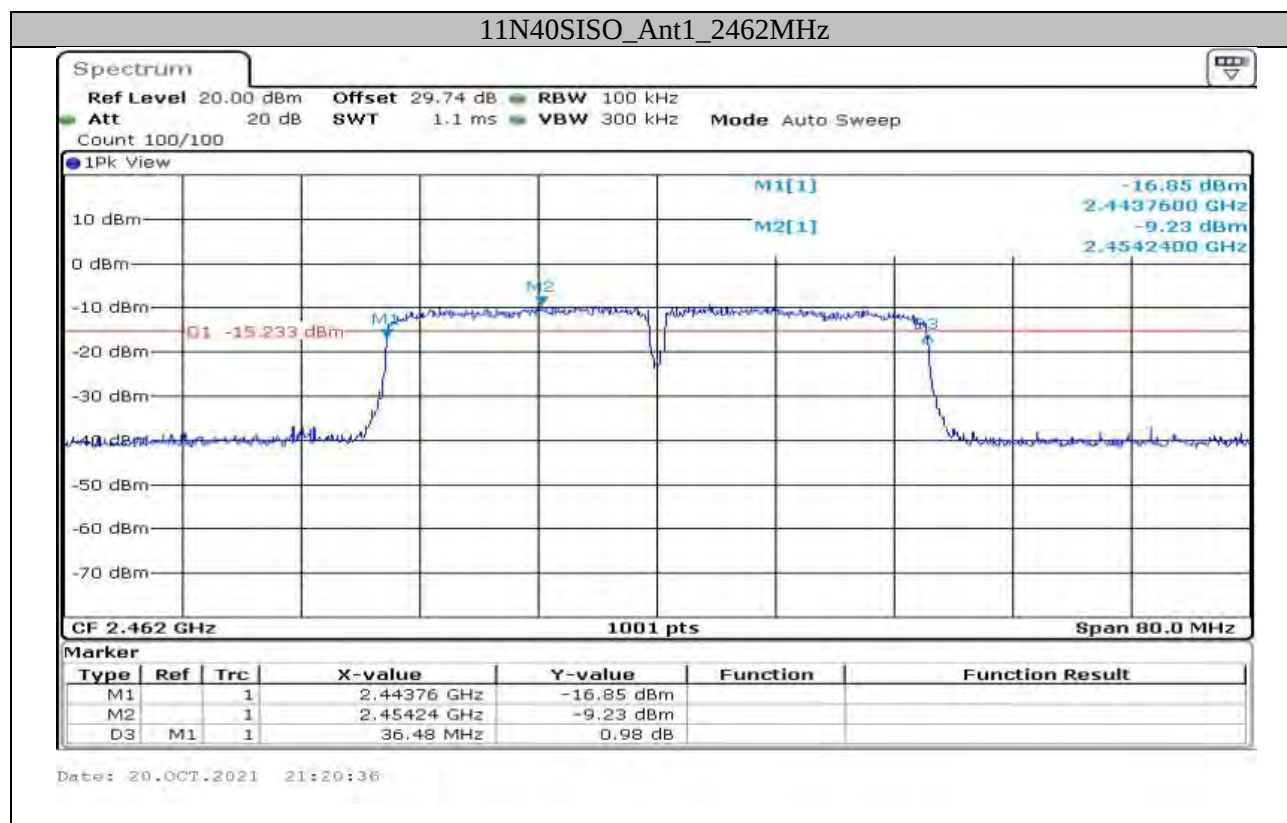


Appendix B: Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Channel[MHz]	OCB [MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	15.225	---	PASS
		2442	15.185	---	PASS
		2472	15.185	---	PASS
11G	Ant1	2412	17.662	---	PASS
		2442	17.662	---	PASS
		2472	17.702	---	PASS
11N20SISO	Ant1	2412	18.501	---	PASS
		2442	18.501	---	PASS
		2472	18.501	---	PASS
11N40SISO	Ant1	2422	36.124	---	PASS
		2442	36.124	---	PASS
		2462	36.124	---	PASS

Test Graphs

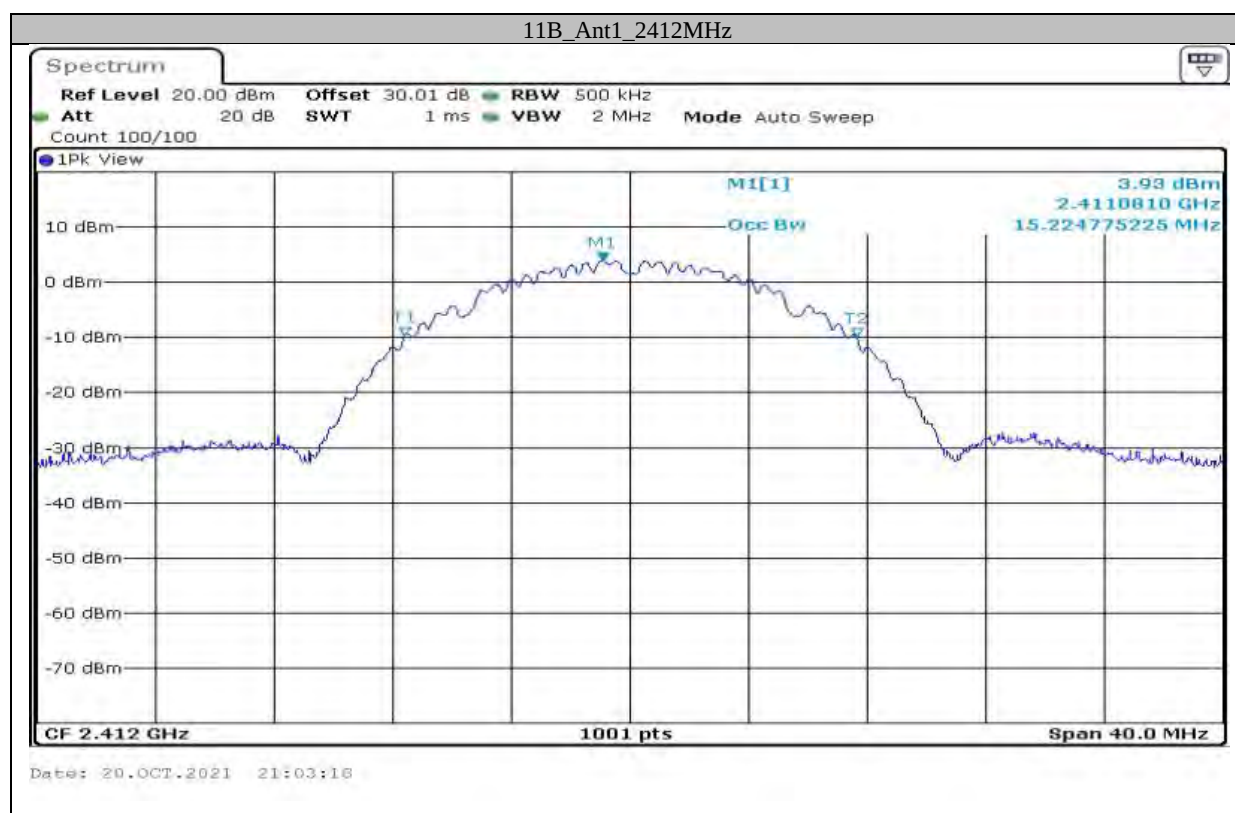









Date: 20.OCT.2021 21:14:17



Date: 20.OCT.2021 21:15:38






Appendix C: Maximum conducted output power**Test Result**


Test Mode	Antenna	Channel [MHz]	Peak Power Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	14.02	<=30	PASS
		2442	13.92	<=30	PASS
		2472	13.62	<=30	PASS
11G	Ant1	2412	12.68	<=30	PASS
		2442	12.55	<=30	PASS
		2472	12.13	<=30	PASS
11N20SISO	Ant1	2412	13.50	<=30	PASS
		2442	13.51	<=30	PASS
		2472	13.29	<=30	PASS
11N40SISO	Ant1	2422	12.13	<=30	PASS
		2442	12.13	<=30	PASS
		2462	11.69	<=30	PASS



Test Mode	Antenna	Channel [MHz]	Average Power Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	12.63	<=30	PASS
		2442	12.54	<=30	PASS
		2472	12.26	<=30	PASS
11G	Ant1	2412	8.53	<=30	PASS
		2442	8.51	<=30	PASS
		2472	8.22	<=30	PASS
11N20SISO	Ant1	2412	8.43	<=30	PASS
		2442	8.39	<=30	PASS
		2472	8.09	<=30	PASS
11N40SISO	Ant1	2422	8.45	<=30	PASS
		2442	8.45	<=30	PASS
		2462	8.26	<=30	PASS



Appendix D: Power spectral density**Test Result**



TestMode	Antenna	Channel[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-18.48	<=8	PASS
		2442	-18.66	<=8	PASS
		2472	-19.03	<=8	PASS
11G	Ant1	2412	-20.85	<=8	PASS
		2442	-20.95	<=8	PASS
		2472	-21.41	<=8	PASS
11N20SISO	Ant1	2412	-20.17	<=8	PASS
		2442	-20.57	<=8	PASS
		2472	-20.77	<=8	PASS
11N40SISO	Ant1	2422	-20.45	<=8	PASS
		2442	-20.62	<=8	PASS
		2462	-20.95	<=8	PASS


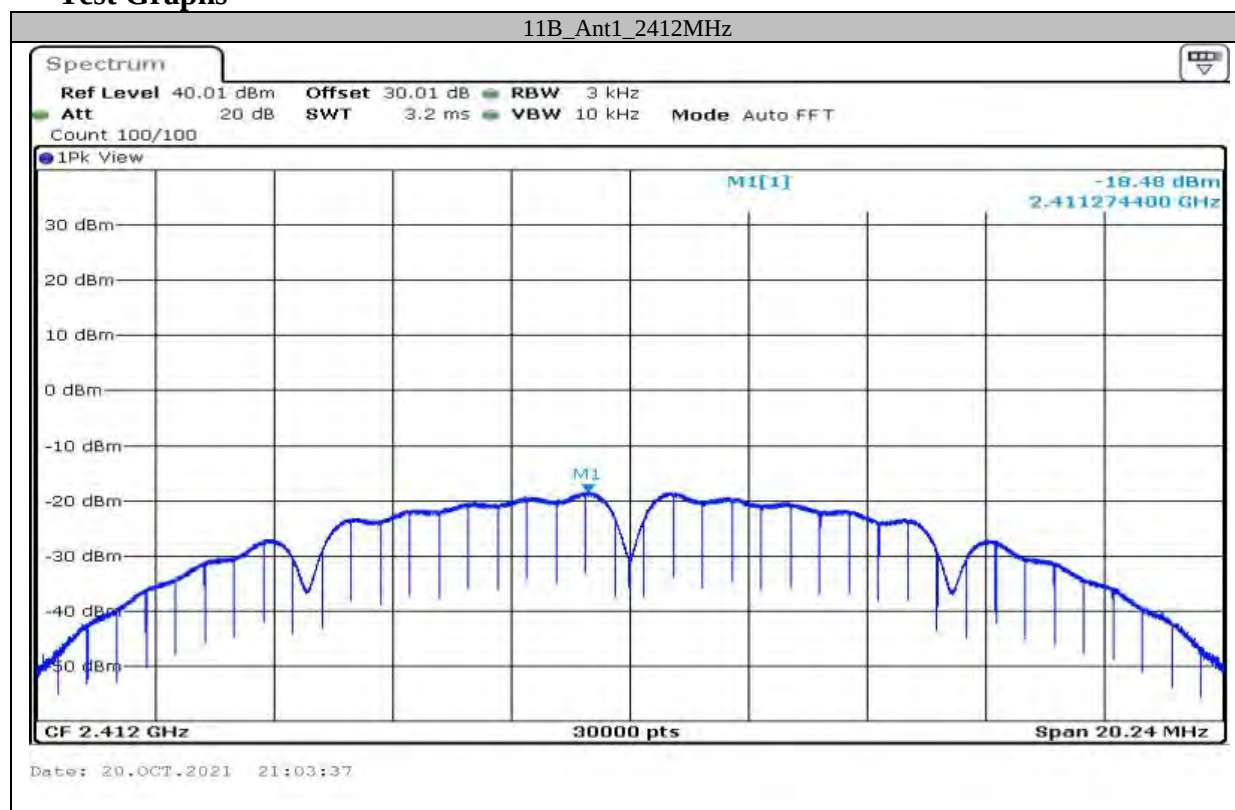
Test Graphs

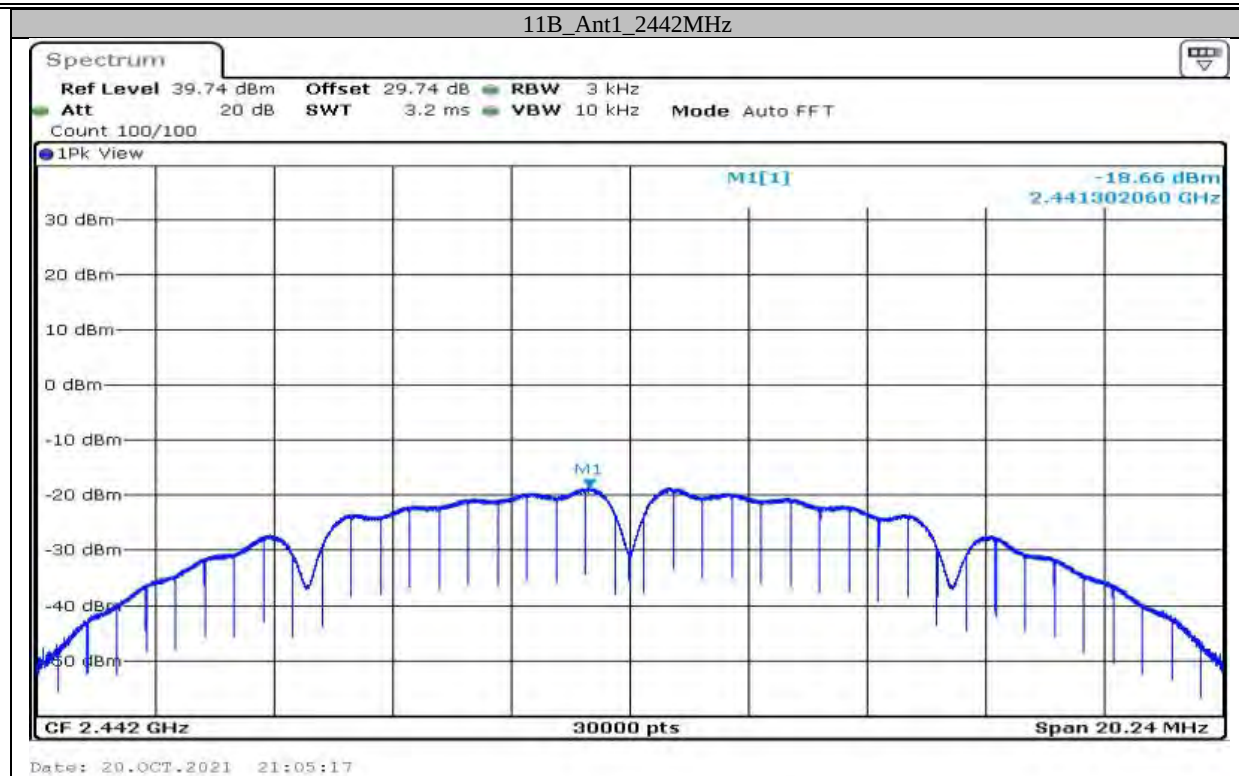


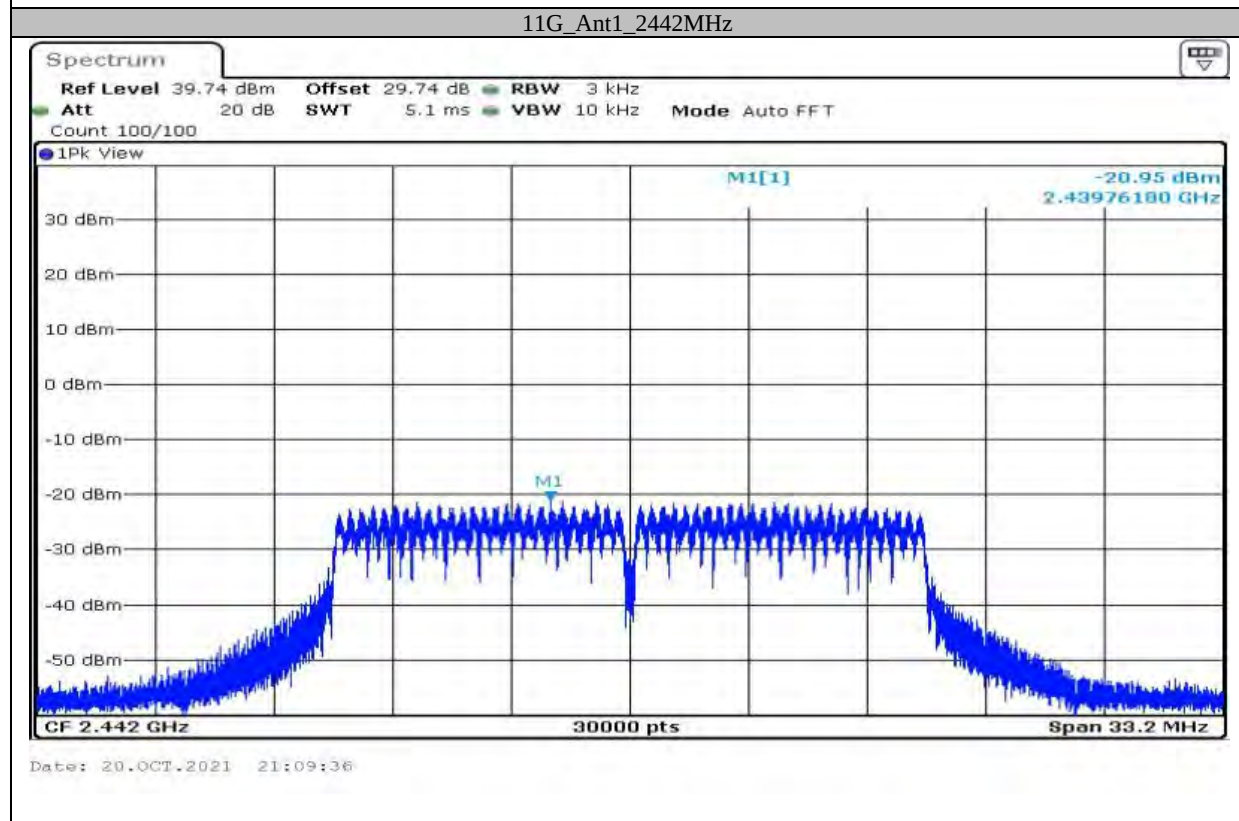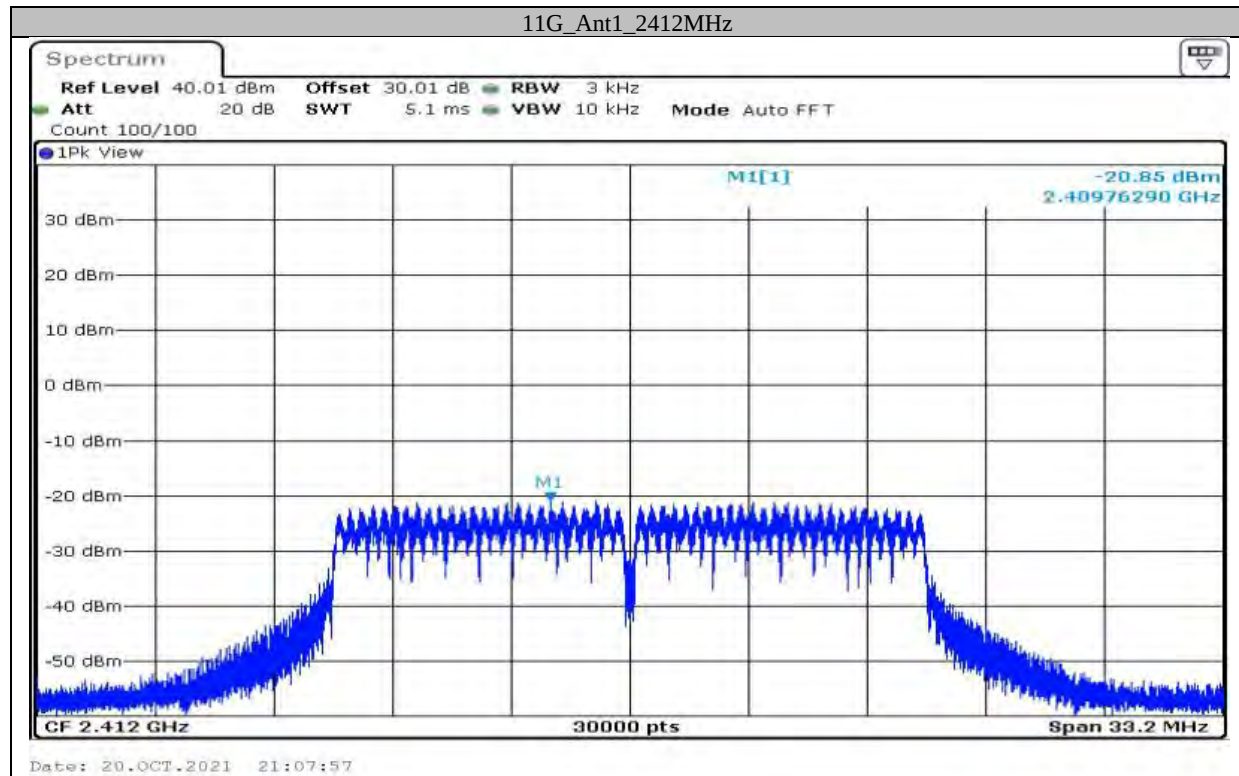

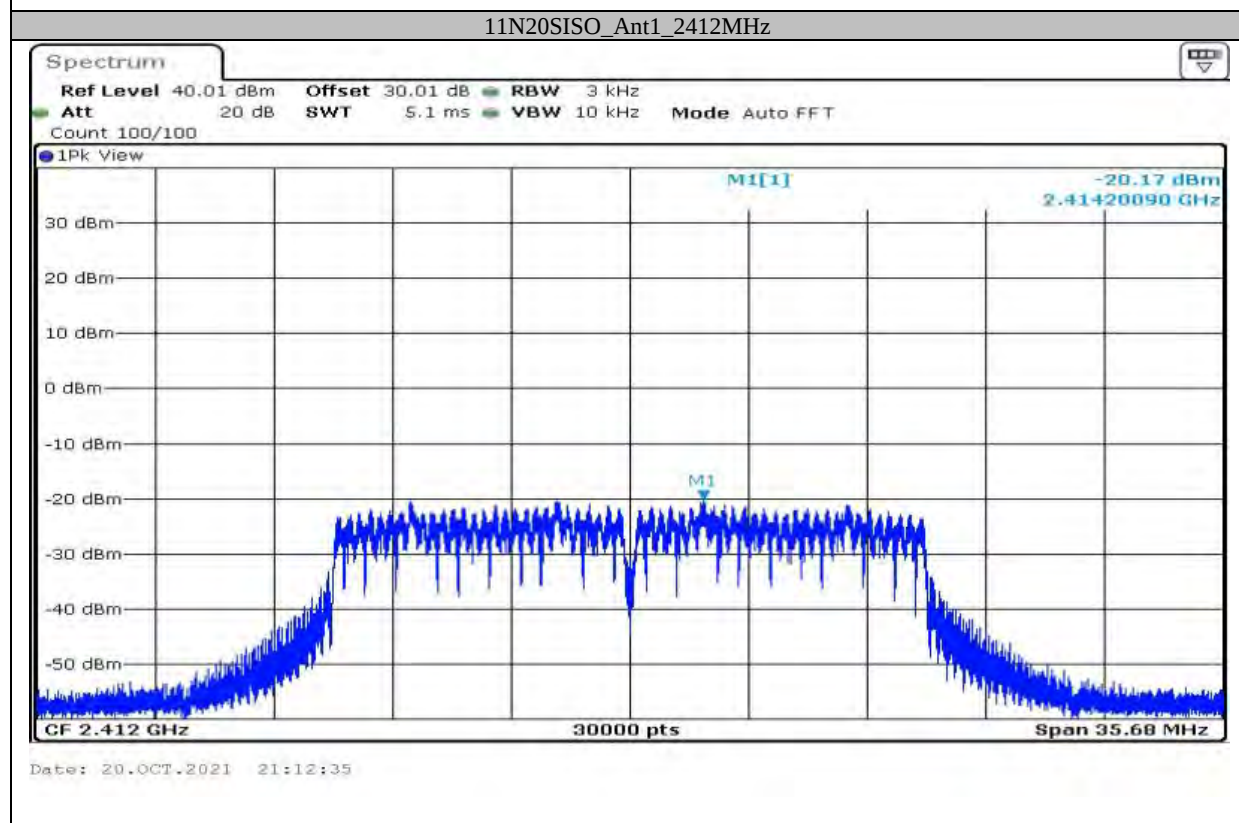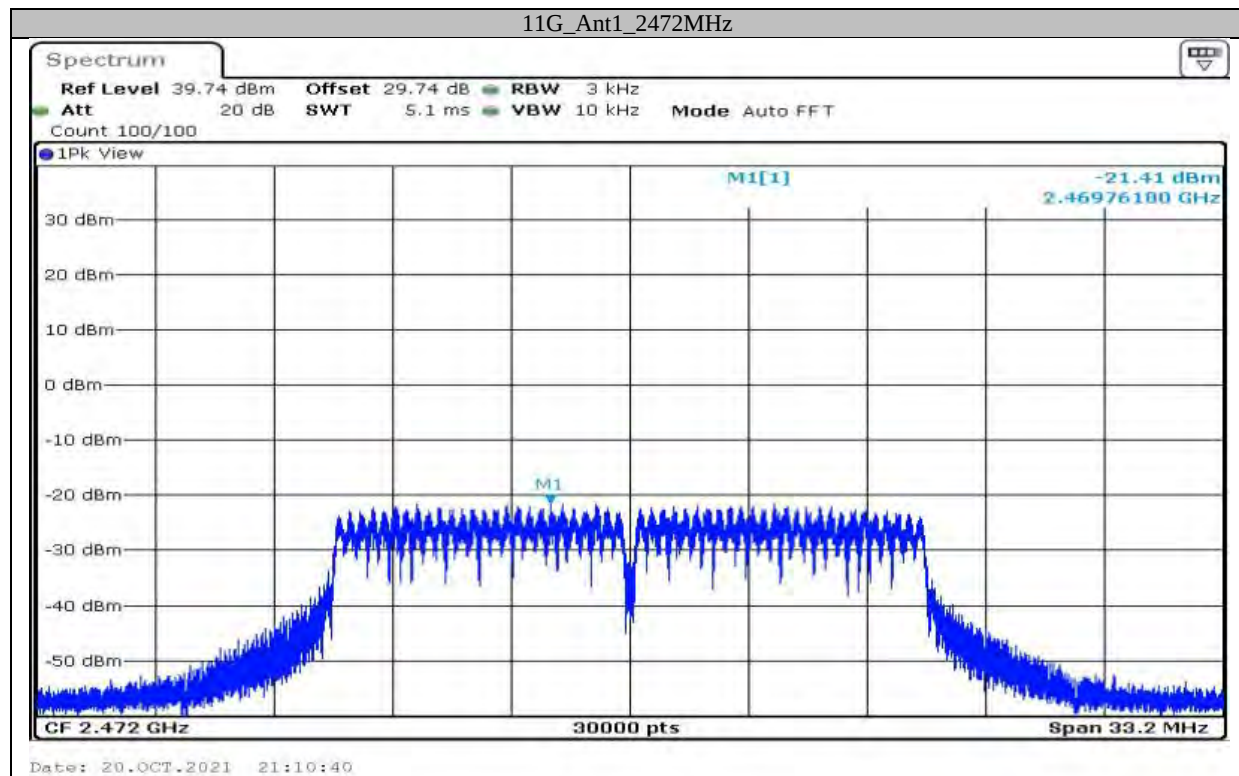

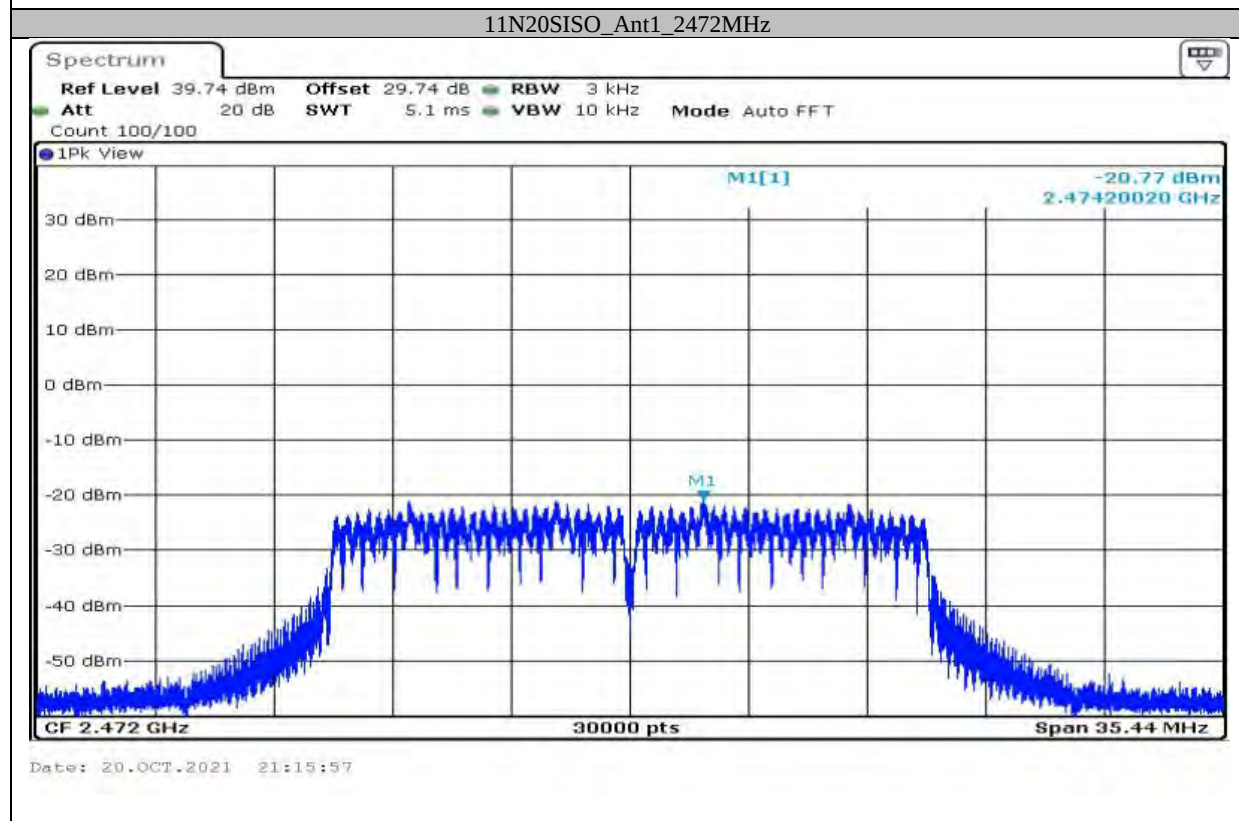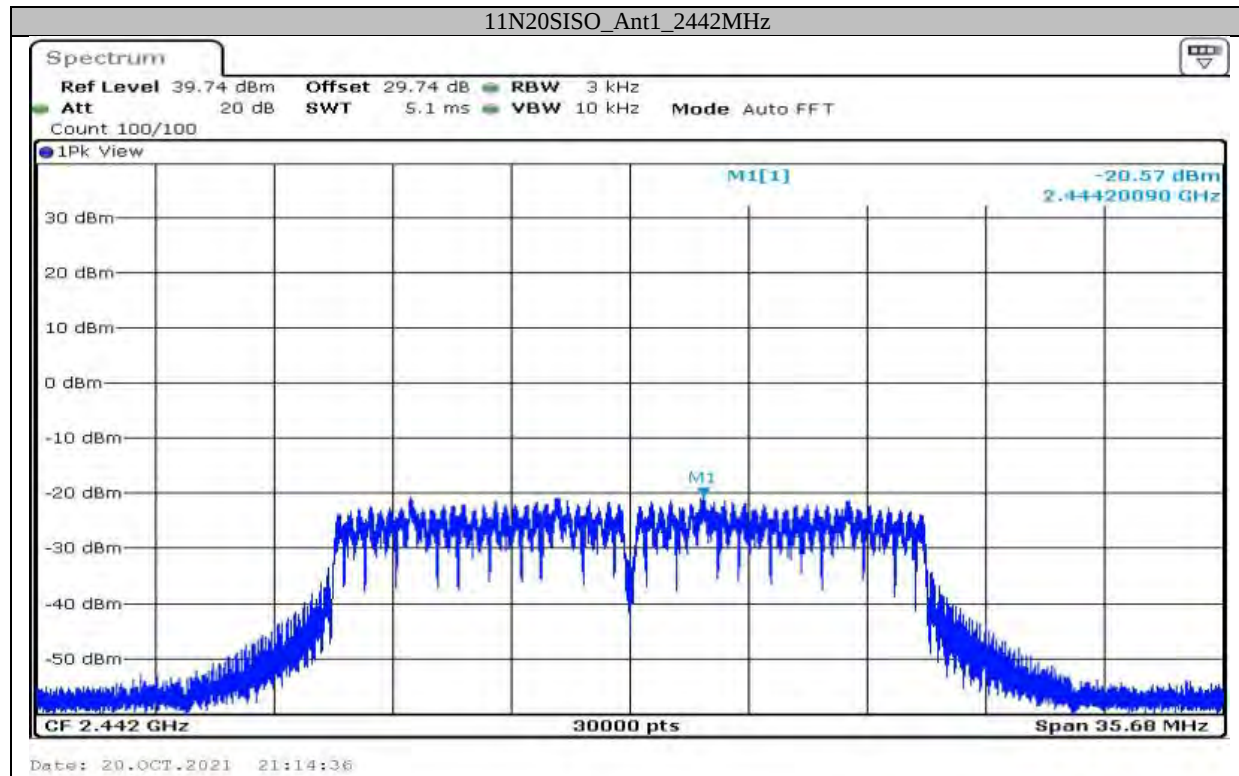


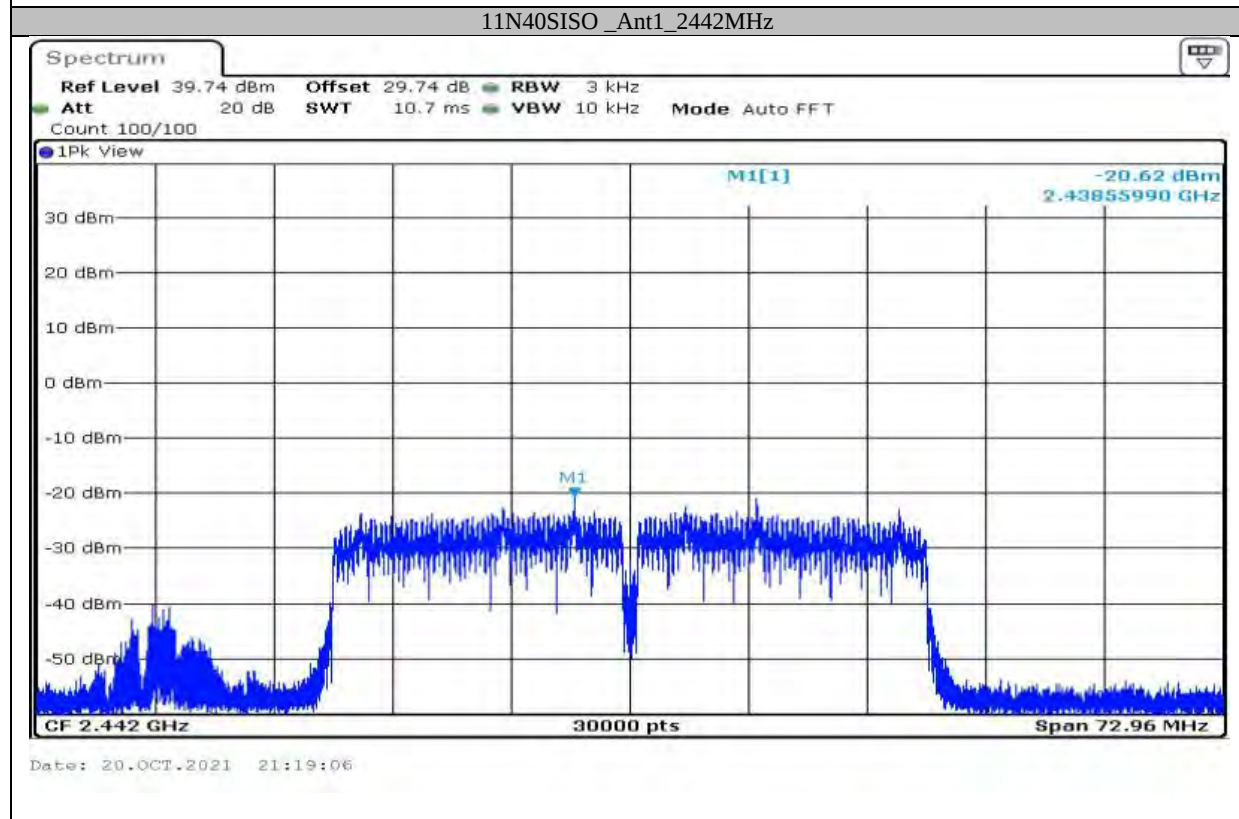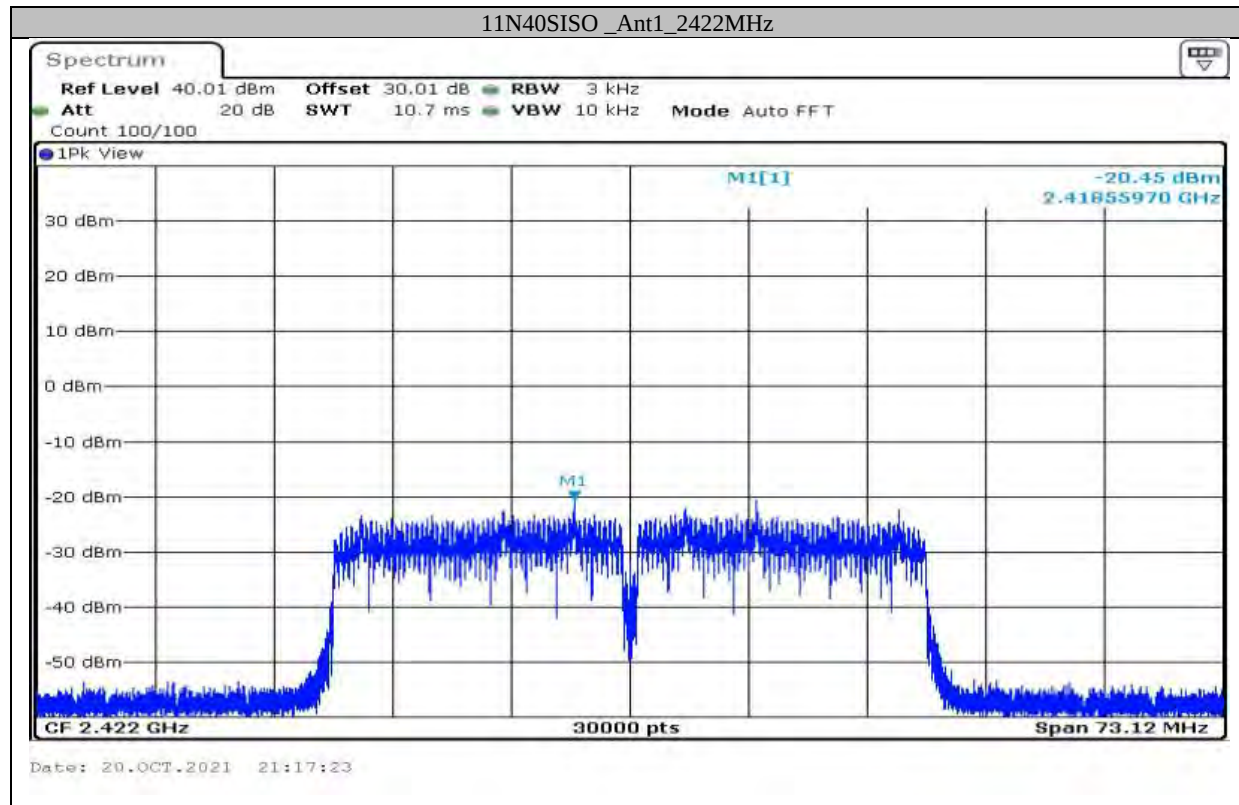


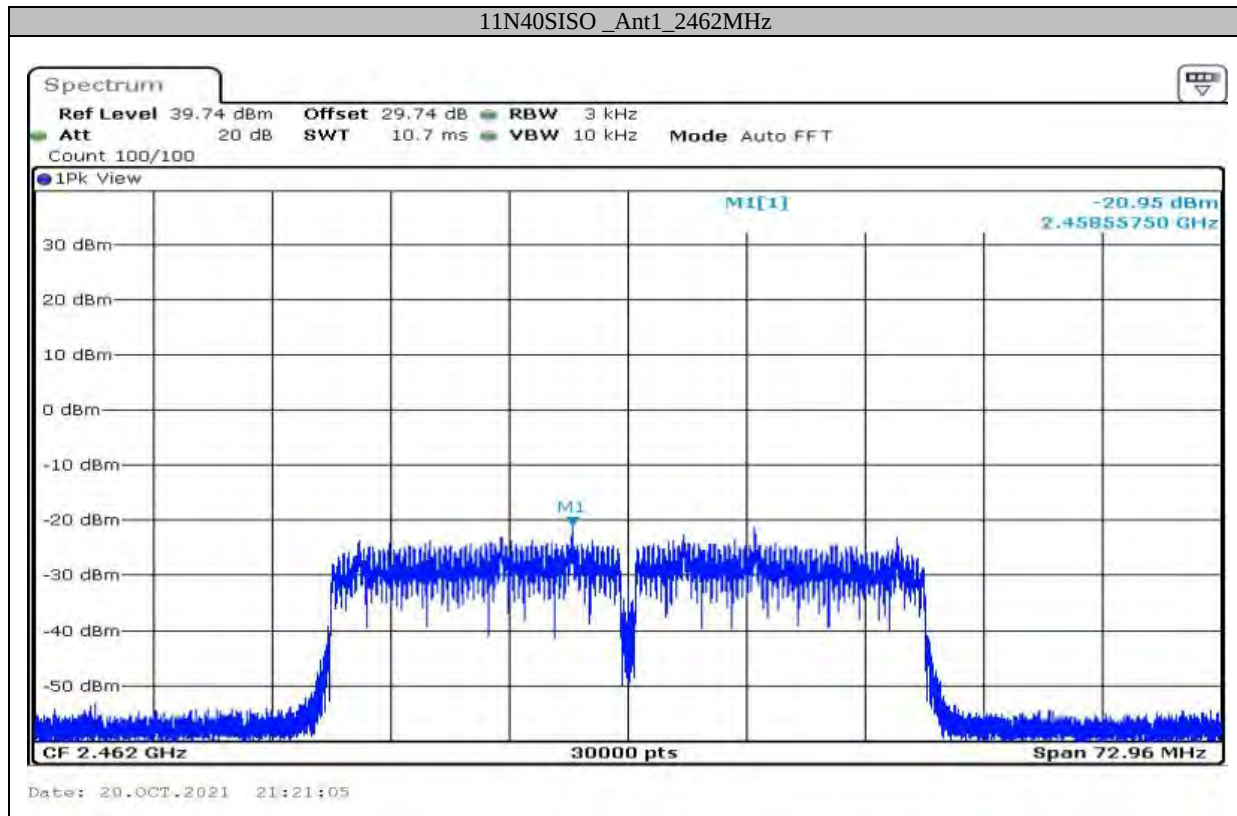



Appendix E: Band edge measurements

Test Graphs

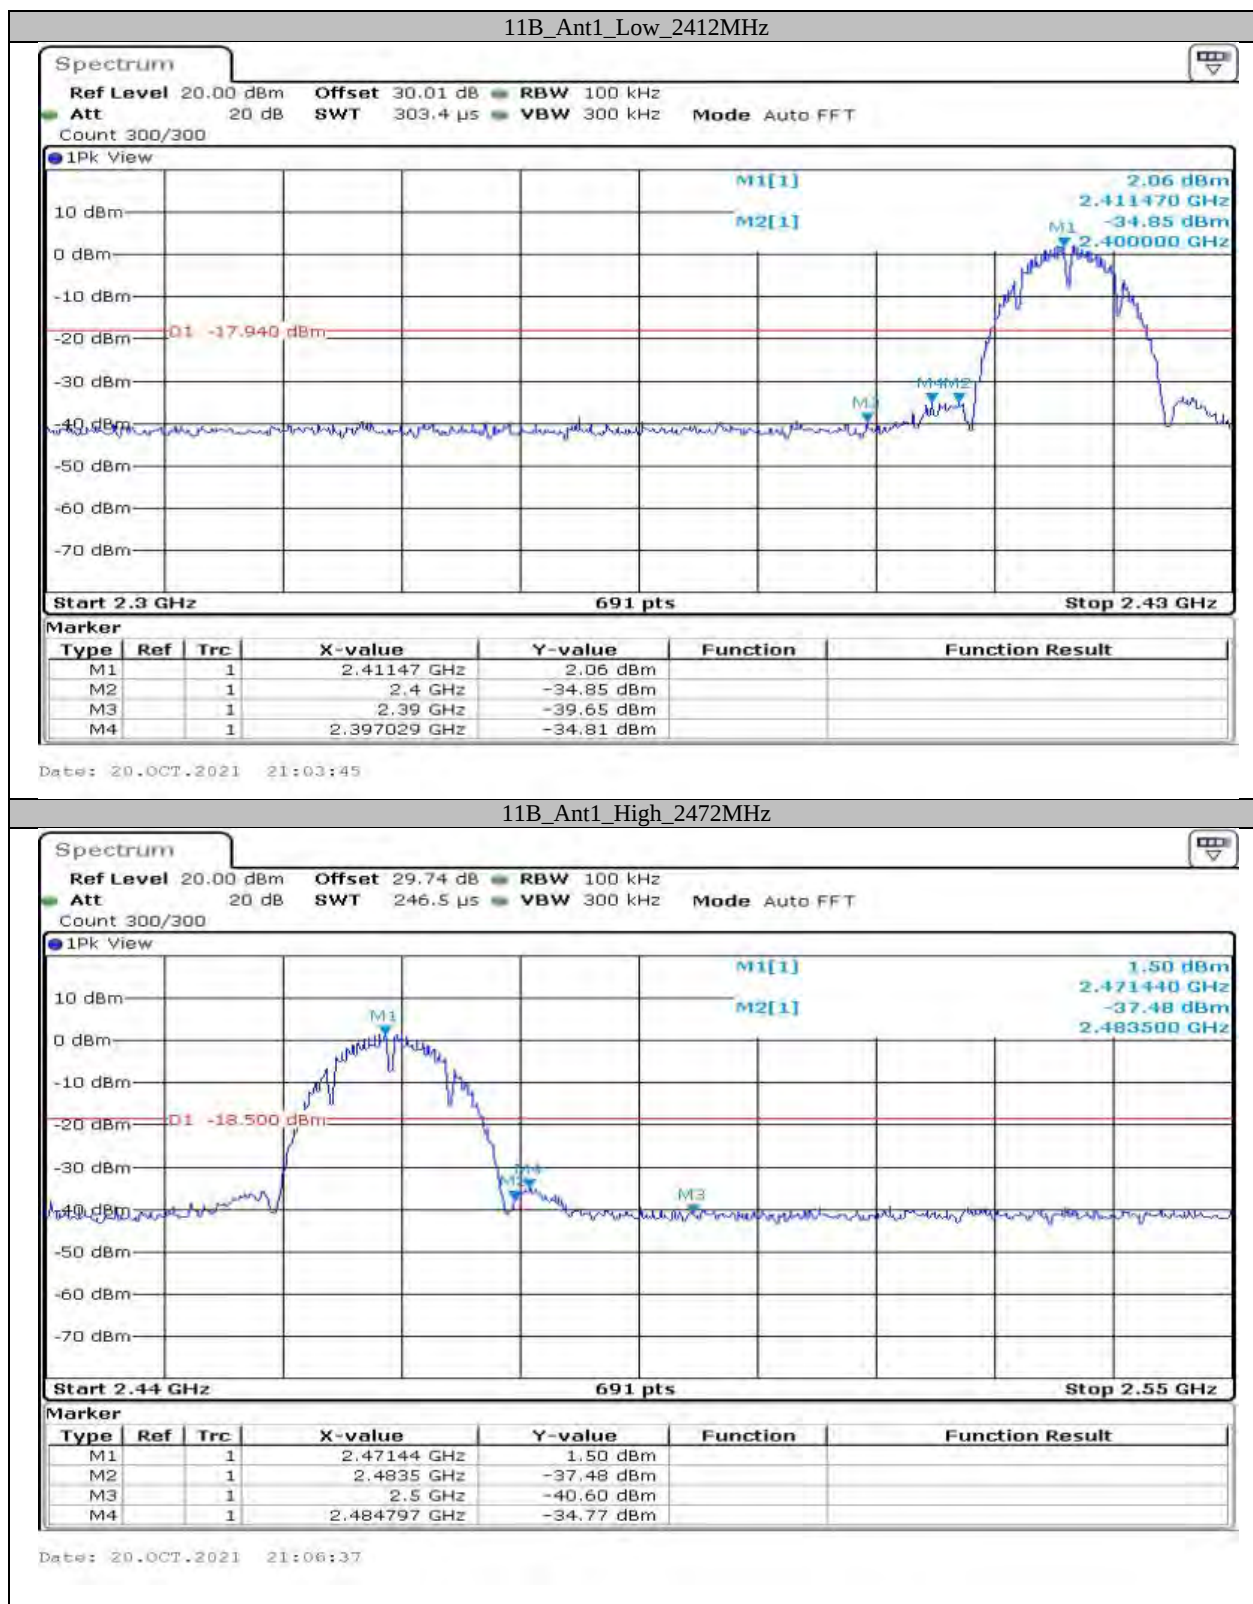

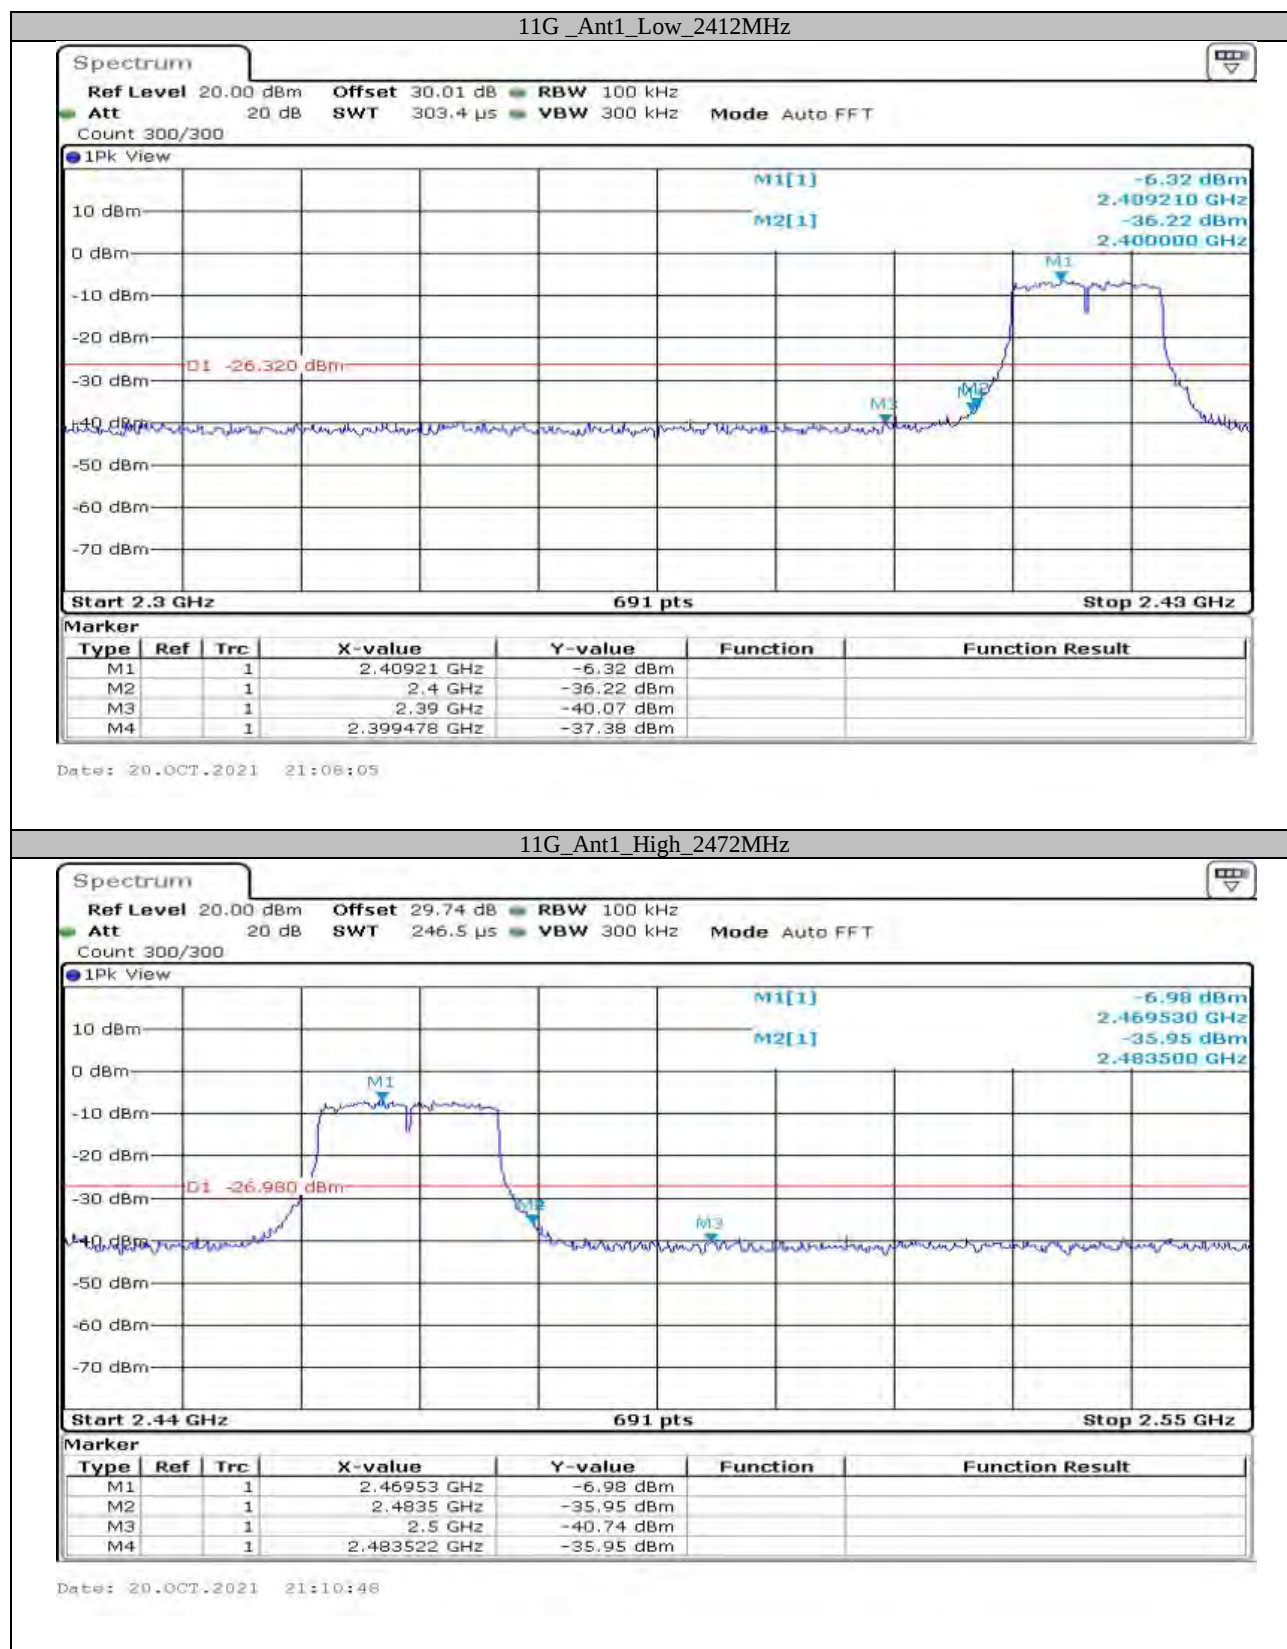

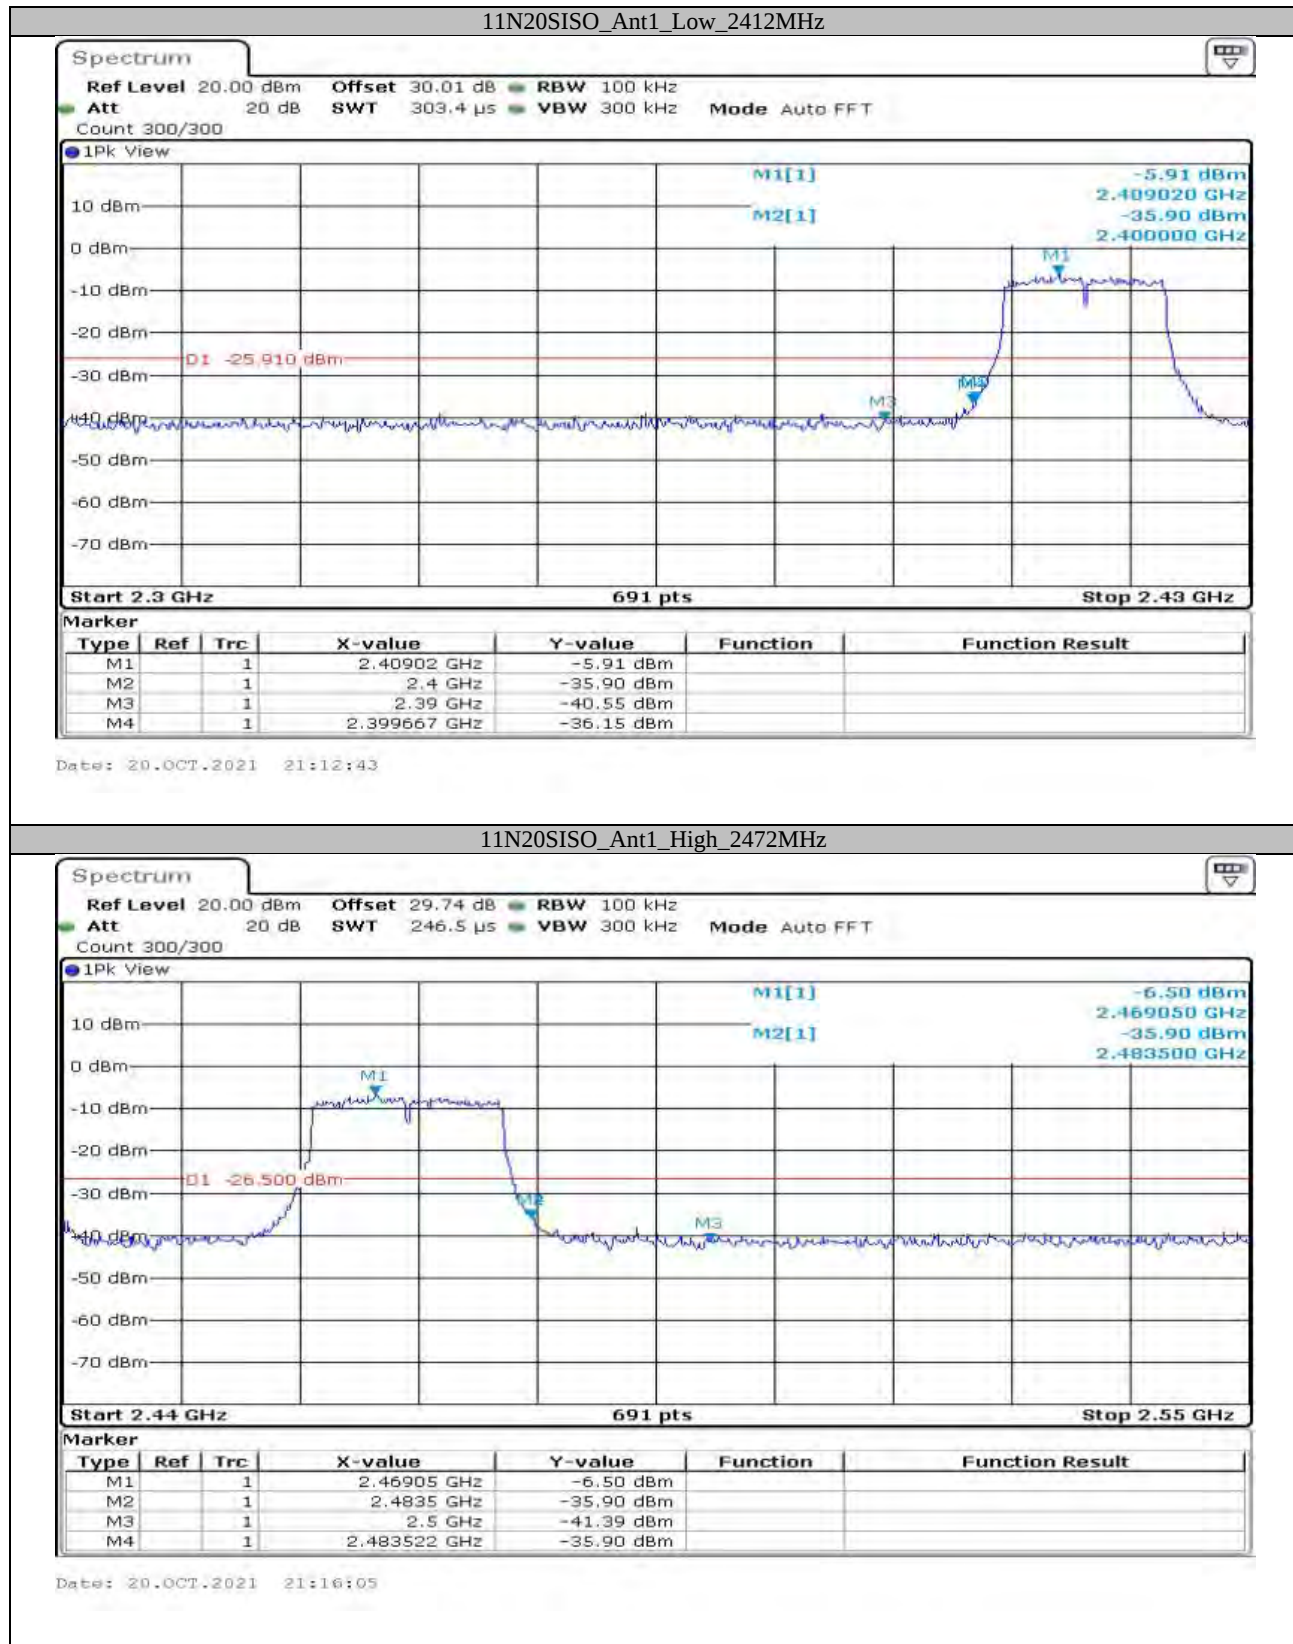

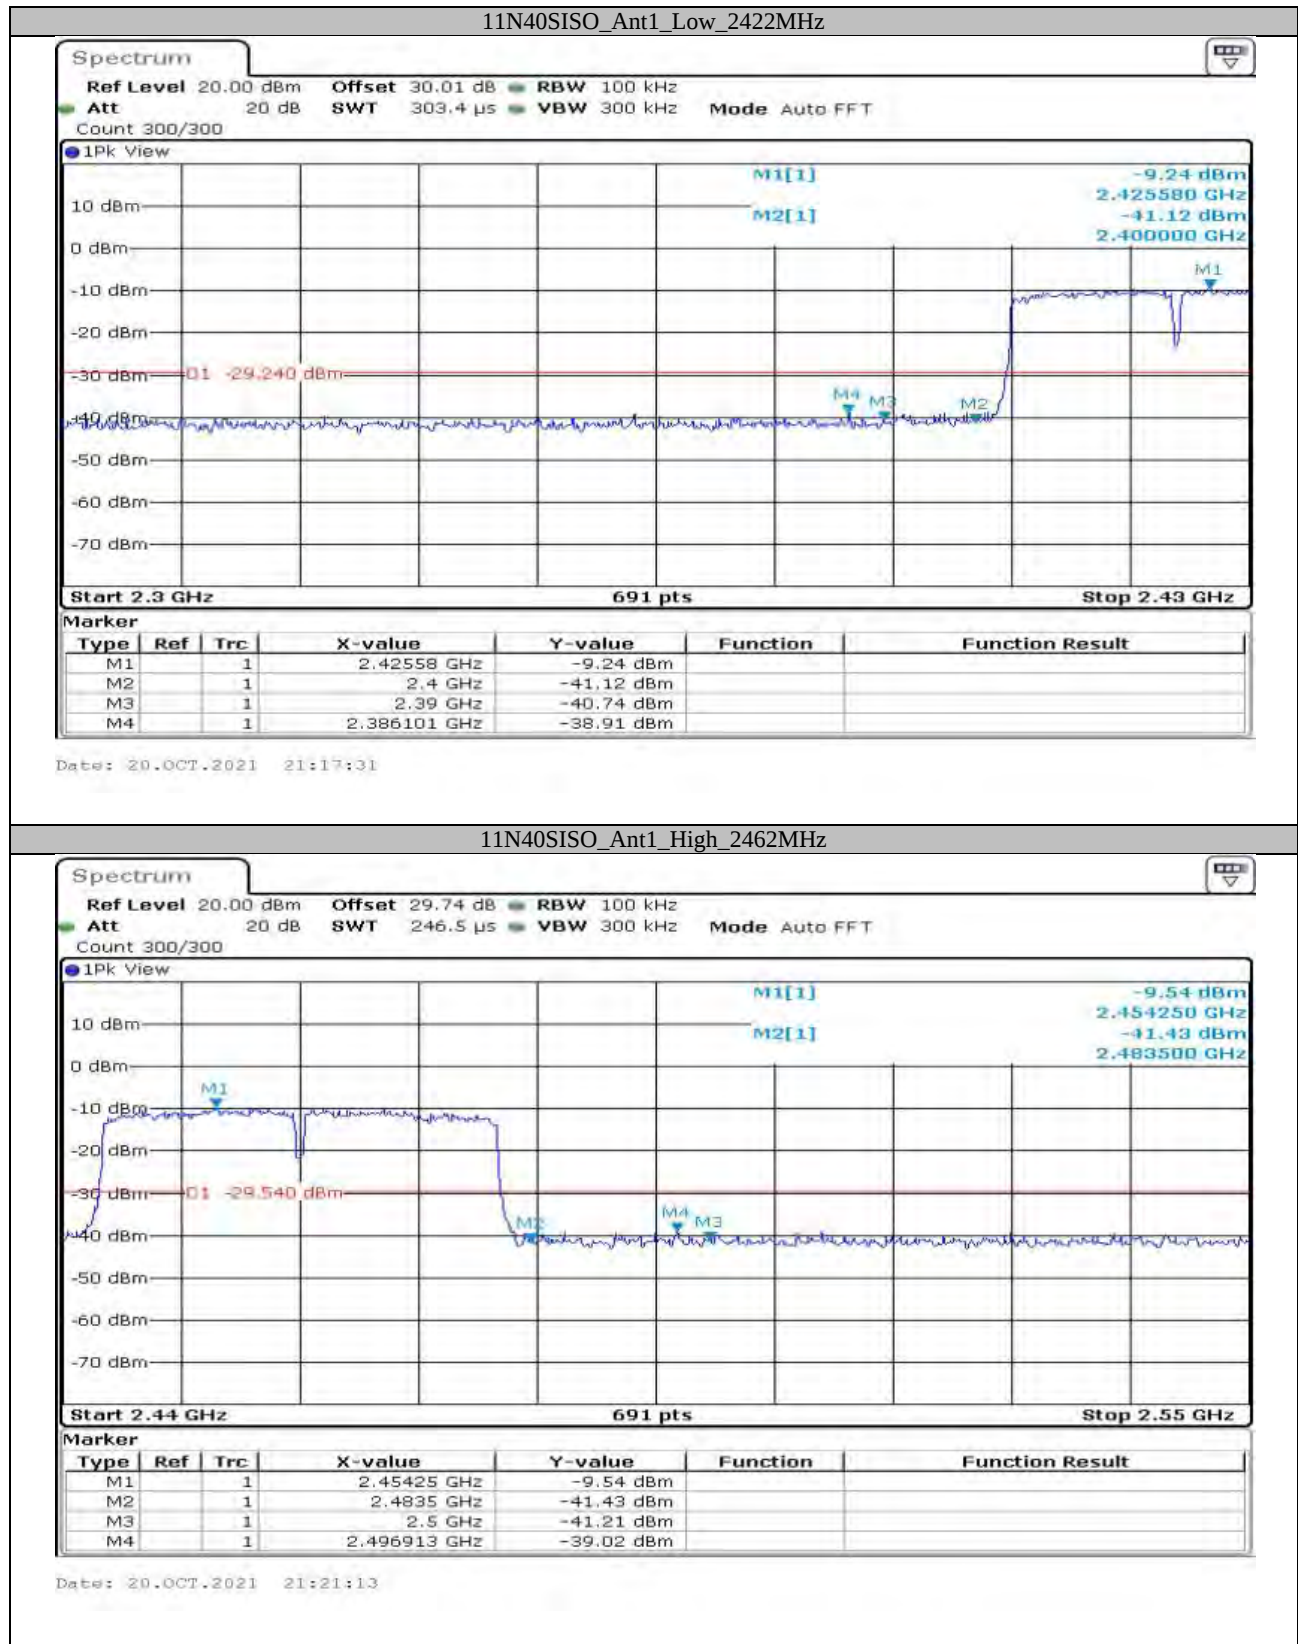




Appendix F: Duty Cycle


Test Result

TestMode	Antenna	Channel [MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11B	Ant1	2442	30.00	30.00	100.00
11G	Ant1	2442	30.00	30.00	100.00
11N20SISO	Ant1	2442	30.00	30.00	100.00
11N40SISO	Ant1	2442	30.00	30.00	100.00

Test Graphs

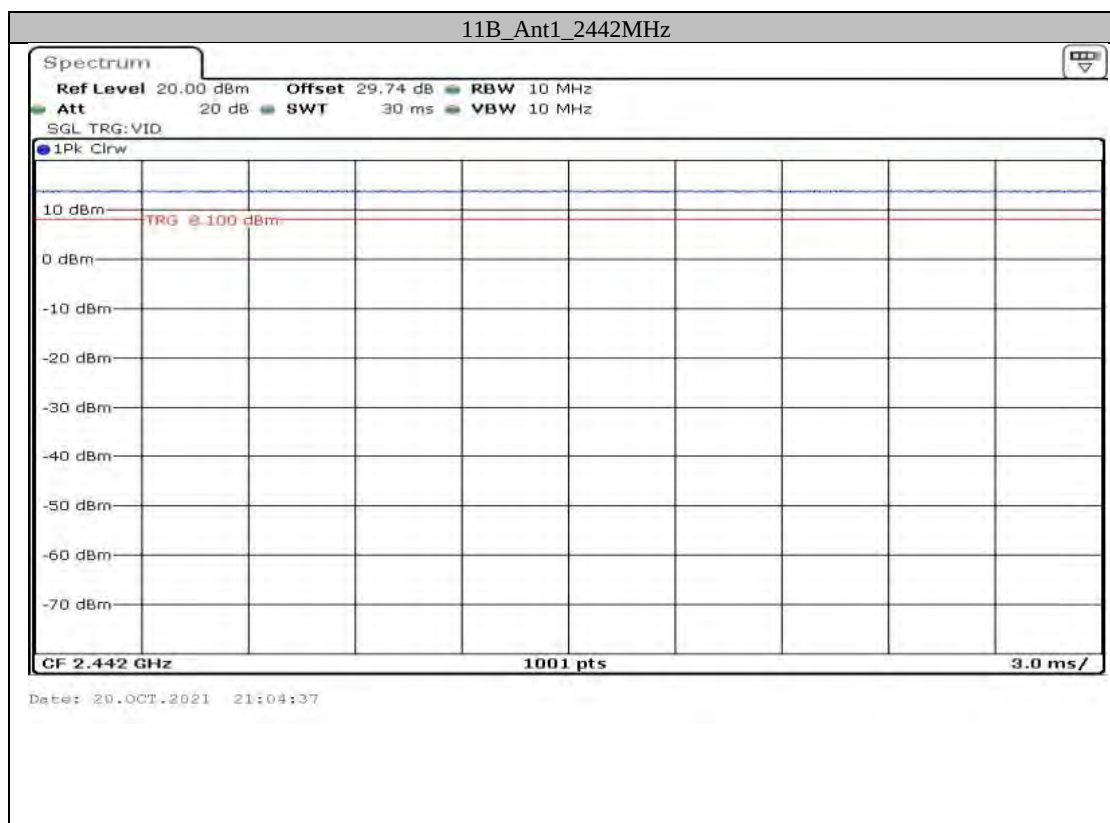

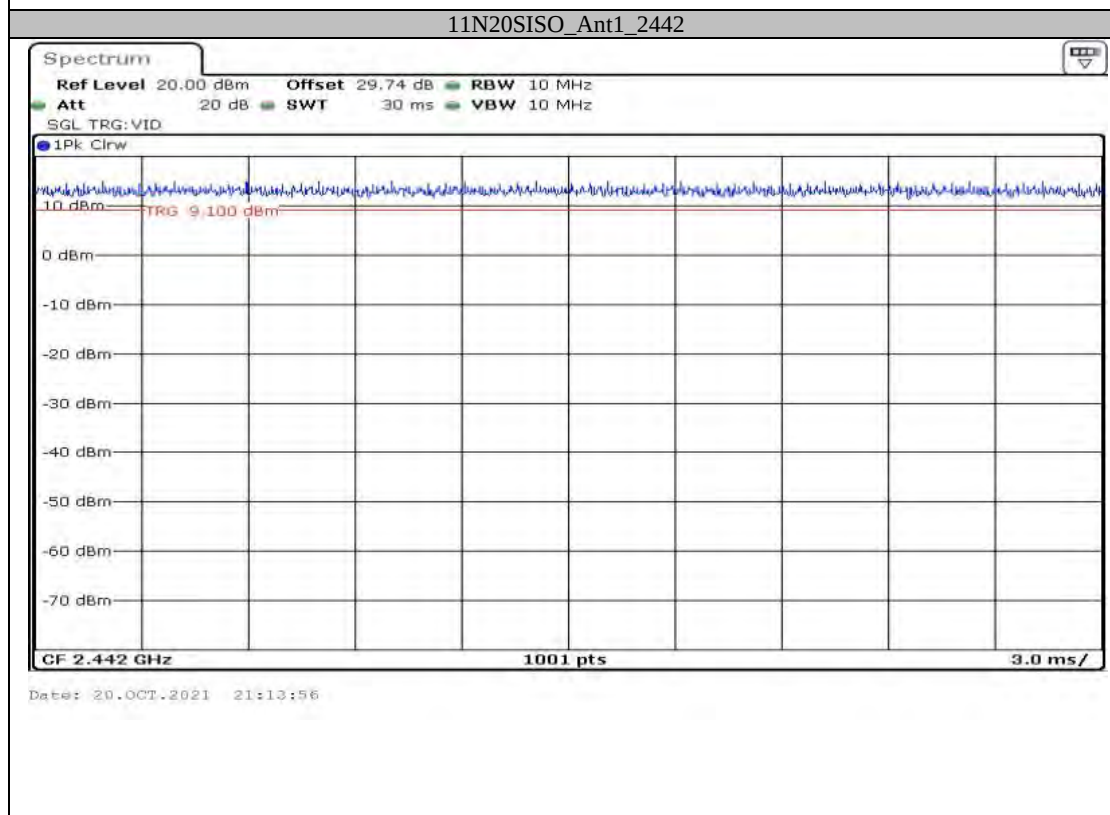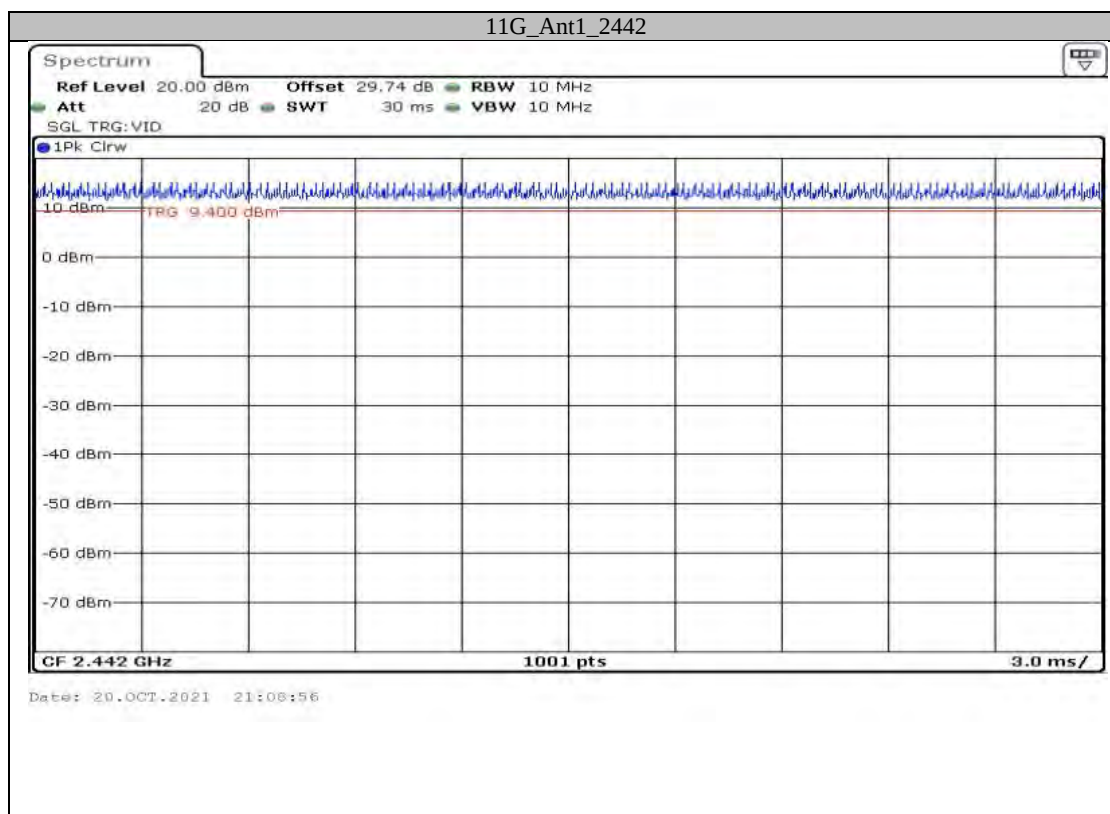

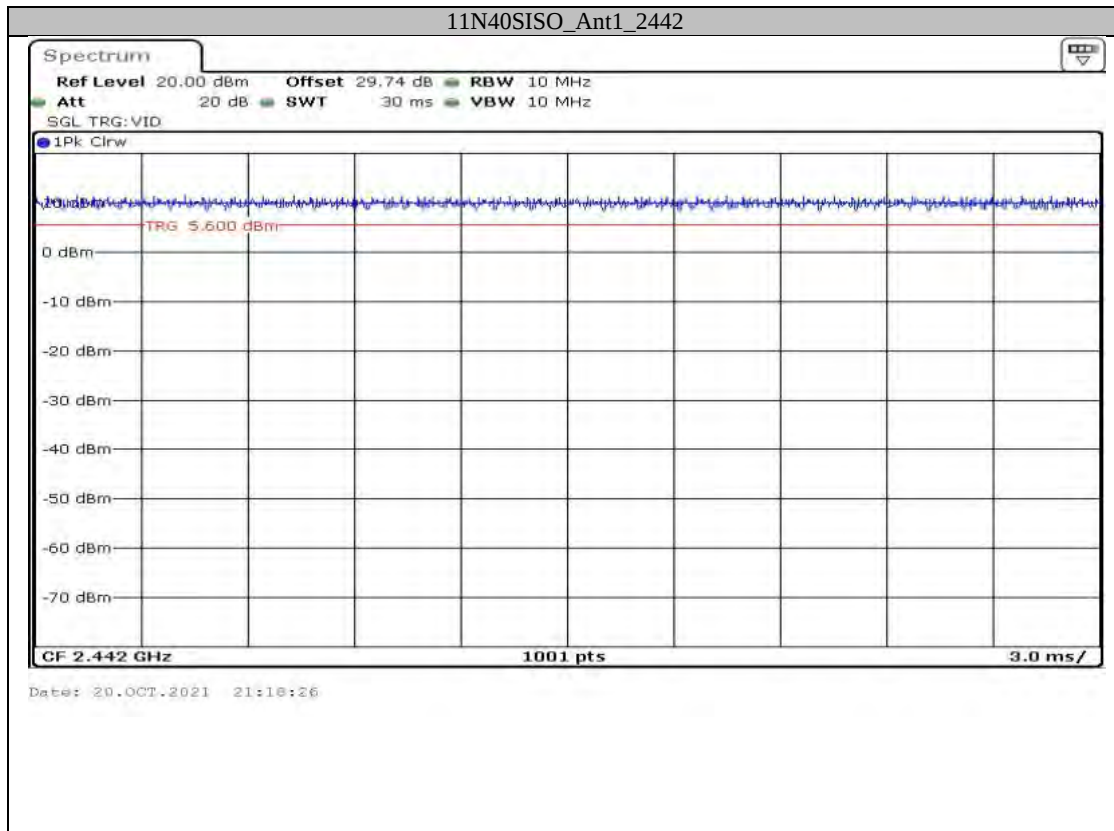

***** END OF REPORT *****