

FCC TEST REPORT

For

Firefly Global

Firefly Wireless Camera module

Model No.: FF-MDL-WF-X7X

Prepared For : Firefly Global

Address : 464 Common Street, #281, Belmont, MA 02478, USA

Prepared By : Shenzhen Anbotech Compliance Laboratory Limited

Address : 1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

Tel: (86) 755-26066365

Fax: (86) 755-26014772

Report Number : SZAWW181115014-01

Date of Receipt : Nov. 15, 2018

Date of Test : Nov. 15~Dec. 05, 2018

Date of Report : Dec. 05, 2018

Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	4
1.4. Description of Test Modes.....	5
1.5. List of channels.....	5
1.6. Description Of Test Setup.....	6
1.7. Test Equipment List.....	7
1.8. Measurement Uncertainty.....	8
1.9. Description of Test Facility.....	8
2. Summary of Test Results.....	9
3. Conducted Emission Test.....	10
3.1. Test Standard and Limit.....	10
3.2. Test Setup.....	10
3.3. Test Procedure.....	10
3.4. Test Data.....	10
4. Radiation Spurious Emission and Band Edge.....	15
4.1. Test Standard and Limit.....	15
4.2. Test Setup.....	15
4.3. Test Procedure.....	16
4.4. Test Data.....	17
5. Maximum Peak Output Power Test.....	24
5.1. Test Standard and Limit.....	24
5.2. Test Setup.....	24
5.3. Test Procedure.....	24
5.4. Test Data.....	24
6. Occupy Bandwidth Test.....	25
6.1. Test Standard.....	25
6.2. Test Setup.....	25
6.3. Test Procedure.....	25
6.4. Test Data.....	25
7. Power Spectral Density Test.....	28
7.1. Test Standard and Limit.....	28
7.2. Test Setup.....	28
7.3. Test Procedure.....	28
7.4. Test Data.....	28
8. Antenna Requirement.....	30
8.1. Test Standard and Requirement.....	30
8.2. Antenna Connected Construction.....	31
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	32
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	34
APPENDIX III -- INTERNAL PHOTOGRAPH.....	35

TEST REPORT

Applicant : Firefly Global
Manufacturer : Firefly Global
Product Name : Firefly Wireless Camera module
Model No. : FF-MDL-WF-X7X
Trade Mark : Firefly
Rating(s) : Input: DC 5V, 1A

Test Standard(s) : FCC Part15 Subpart E 2018, Paragraph 15.407

Test Method(s) : ANSI C63.10: 2013,
KDB 789033 D02 General UNII Test Procedures New Rules v02r01

The device described above is tested by Shenzhen Anbotech Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotech Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart E requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotech Compliance Laboratory Limited.

Date of Test :

Nov. 15~Dec. 05, 2018

Prepared by :



Oliay Yang

(Engineer / Oliay Yang)

Reviewer :

Snowy Meng

(Supervisor / Snowy Meng)

Approved & Authorized Signer :

Sally Zhang

(Manager / Sally Zhang)

1. General Information

1.1. Client Information

Applicant	:	Firefly Global
Address	:	464 Common Street, #281, Belmont, MA 02478, USA
Manufacturer	:	Firefly Global
Address	:	464 Common Street, #281, Belmont, MA 02478, USA
Factory	:	Firefly Global
Address	:	464 Common Street, #281, Belmont, MA 02478, USA

1.2. Description of Device (EUT)

Product Name	:	Firefly Wireless Camera module	
Model No.	:	FF-MDL-WF-X7X	
Trade Mark	:	Firefly	
Test Power Supply	:	DC 5V	
Product Description	:	Operation Frequency:	5180 MHz
		Number of Channel:	1 Channel
		Modulation Type:	256-QAM, 64-QAM, 16-QAM, QPSK, BPSK
		Antenna Type:	PIFA Antenna
		Antenna Gain(Peak):	2 dBi
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.			

1.3. Auxiliary Equipment Used During Test

N/A	:	
-----	---	--

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test channel	Frequency (MHz)
CH 01	5180MHz

Note:


1. The measurements are performed at the highest, middle, lowest available channels.
2. The EUT has been tested as an independent unit. And Continual Transmitting in maximum power.
3. For the relevant Conducted Measurement, the temporary antenna connector is used during the measurement. Antenna Connector Impedance: $50\ \Omega$, Cable Loss: 1.0 dB
4. The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is more than 98%

1.5. List of channels


Channel	Freq. (MHz)
01	5180

1.6. Description Of Test Setup

CE

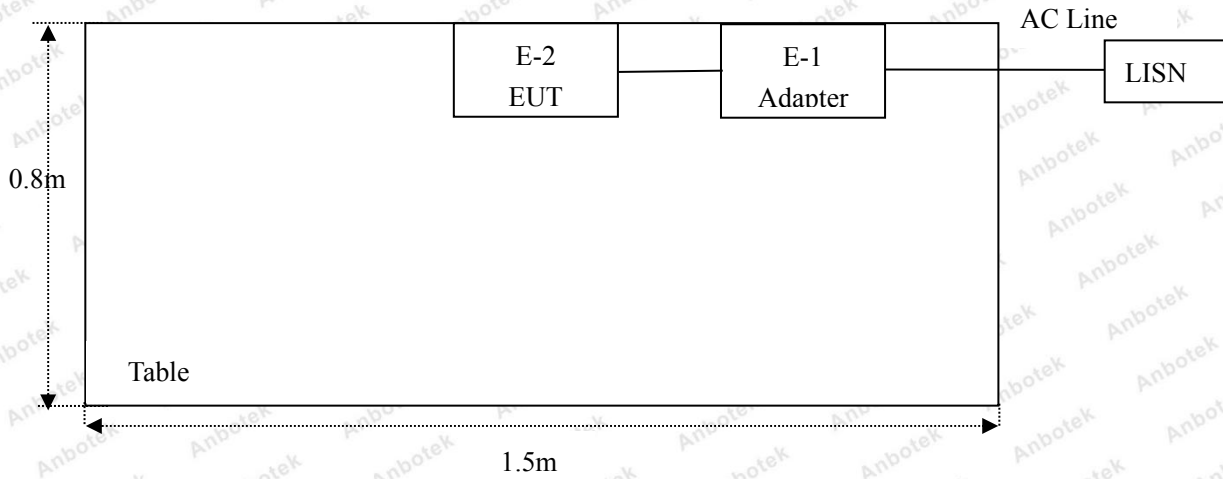

RE

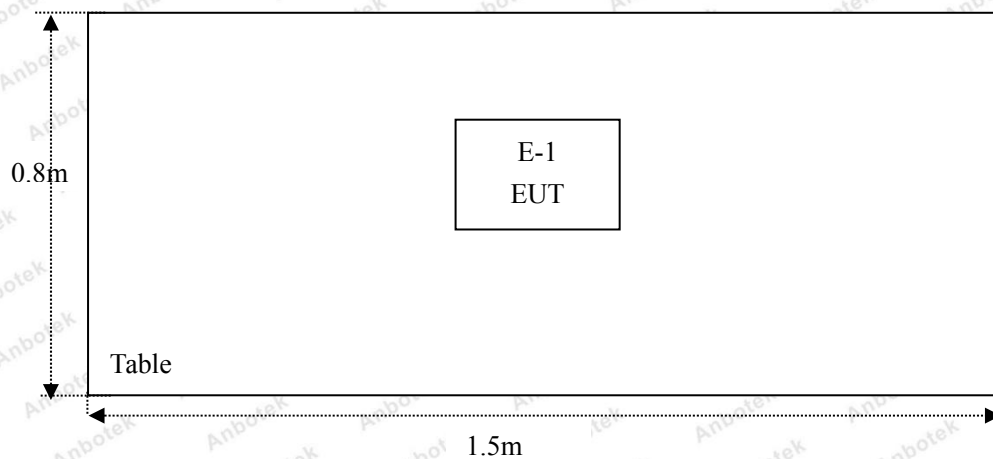

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Nov. 05, 2018	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESPI3	101604	Nov. 05, 2018	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Nov. 05, 2018	1 Year
4.	Spectrum Analysis	Agilent	E4407B	US39390582	Nov. 05, 2018	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 05, 2018	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30D	KD17503	Nov. 05, 2018	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 19, 2018	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 19, 2018	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 19, 2018	1 Year
10.	Horn Antenna	A-INFO	LB-180400-K F	J211060628	Nov. 20, 2018	1 Year
11.	Pre-amplifier	SONOMA	310N	186860	Nov. 05, 2018	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Nov. 05, 2018	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN045	Nov. 05, 2018	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN046	Nov. 05, 2018	1 Year
16.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 05, 2018	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Nov. 05, 2018	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Nov. 05, 2018	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Apr. 02, 2018	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80B	N/A	Nov. 01, 2018	1 Year

1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 4.1 dB (Horizontal)
		Ur = 4.3 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4dB

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, July 31, 2017.

ISED-Registration No.: 8058A-1

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

Test Location

All Emissions tests were performed at
Shenzhen Anbotech Compliance Laboratory Limited. at 1/F, Building D, Sogood Science and Technology Park,
Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

2. Summary of Test Results

Standard	Test Type	Result
15.207 & 15.407	Conducted Emission	PASS
15.205/15.209	Spurious Emission	PASS
15.407(b)	Band Edge	PASS
15.407(a)(5)	Occupy Bandwidth	PASS
15.407(a)(1)(3)	Maximum Conducted Output Power	PASS
15.407(a)(1)(3)	Peak Power Spectral Density	PASS
15.203/15.407g	Antenna Requirement	PASS


3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207&15.407		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

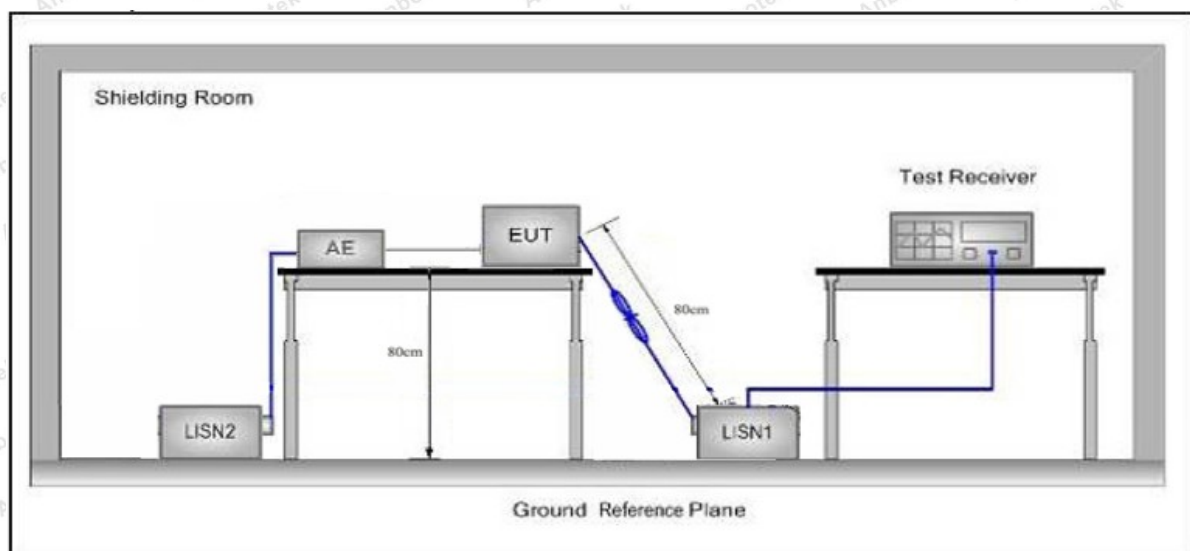

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

Please to see the following pages

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: TX+Charging mode
Test Specification: AC 120V, 60Hz
Comment: Live Line
Tem.:24.3℃ Hum.:60%

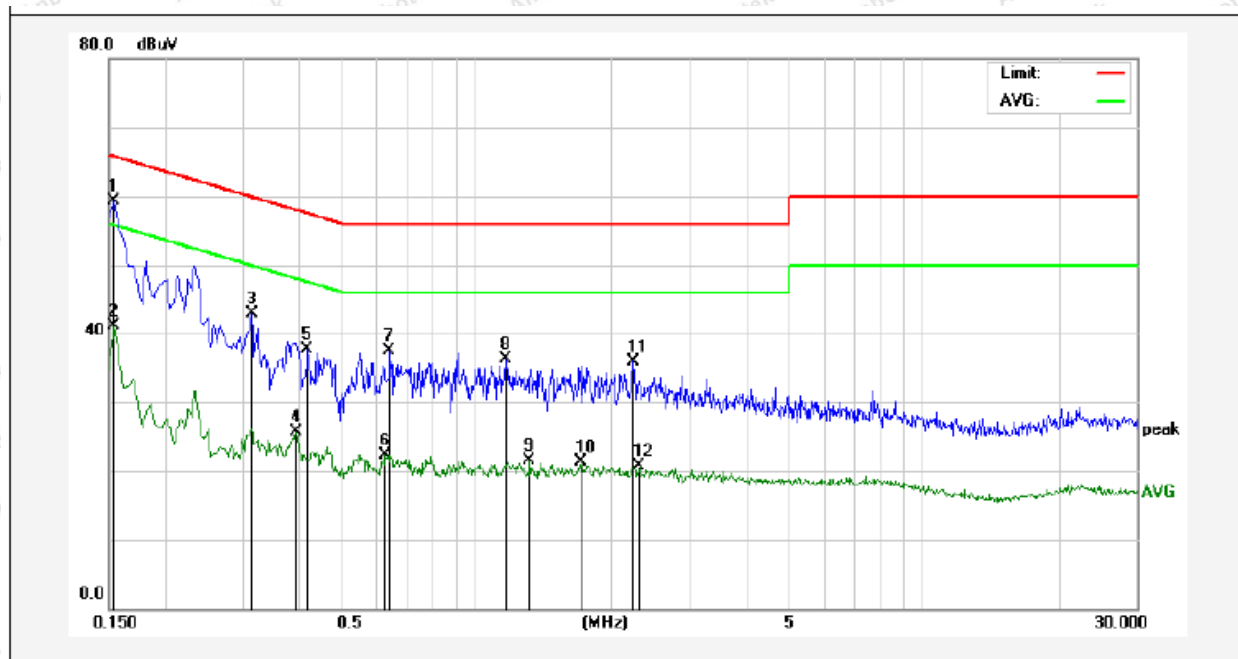

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1539	39.31	19.90	59.21	65.78	-6.57	QP	
2	0.1539	21.26	19.90	41.16	55.78	-14.62	AVG	
3	0.3140	22.99	19.90	42.89	59.86	-16.97	QP	
4	0.3940	5.72	19.93	25.65	47.98	-22.33	AVG	
5	0.4180	17.68	19.94	37.62	57.49	-19.87	QP	
6	0.6260	2.36	20.02	22.38	46.00	-23.62	AVG	
7	0.6380	17.39	20.02	37.41	56.00	-18.59	QP	
8	1.1620	16.19	20.12	36.31	56.00	-19.69	QP	
9	1.3099	1.42	20.13	21.55	46.00	-24.45	AVG	
10	1.7140	1.13	20.13	21.26	46.00	-24.74	AVG	
11	2.2420	15.80	20.14	35.94	56.00	-20.06	QP	
12	2.3179	0.46	20.15	20.61	46.00	-25.39	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: TX+Charging mode
Test Specification: AC 120V, 60Hz
Comment: Neutral Line
Tem.:24.3℃ Hum.:60%

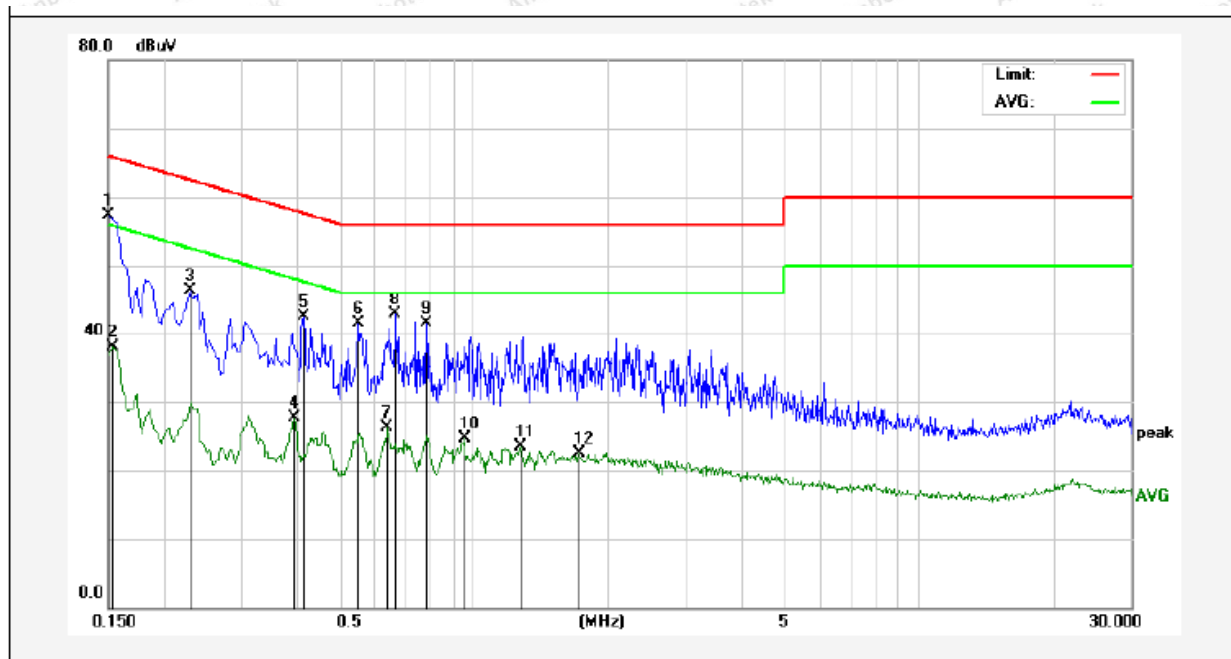

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1500	37.45	19.90	57.35	65.99	-8.64	QP	
2	0.1539	18.16	19.90	38.06	55.78	-17.72	AVG	
3	0.2300	26.46	19.89	46.35	62.45	-16.10	QP	
4	0.3940	7.78	19.93	27.71	47.98	-20.27	AVG	
5	0.4140	22.63	19.94	42.57	57.57	-15.00	QP	
6	0.5500	21.45	19.99	41.44	56.00	-14.56	QP	
7	0.6380	6.30	20.02	26.32	46.00	-19.68	AVG	
8	0.6660	22.87	20.03	42.90	56.00	-13.10	QP	
9	0.7820	21.41	20.06	41.47	56.00	-14.53	QP	
10	0.9500	4.50	20.11	24.61	46.00	-21.39	AVG	
11	1.2700	3.28	20.13	23.41	46.00	-22.59	AVG	
12	1.7100	2.36	20.13	22.49	46.00	-23.51	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: TX+Charging mode
Test Specification: AC 240V, 60Hz
Comment: Live Line
Tem.:24.3℃ Hum.:60%

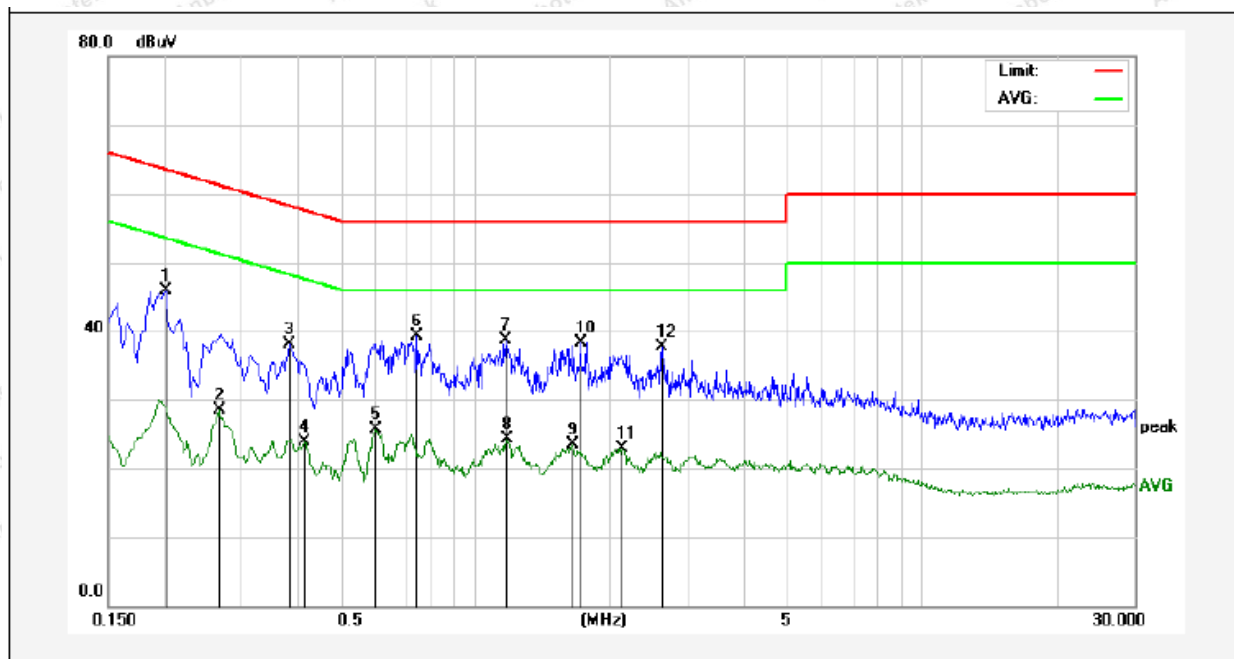

No.	Freq. (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit dBμV	Over Limit (dB)	Detector	Remark
1	0.2020	25.99	19.90	45.89	63.52	-17.63	QP	
2	0.2660	8.65	19.89	28.54	51.24	-22.70	AVG	
3	0.3820	18.11	19.93	38.04	58.23	-20.19	QP	
4	0.4140	3.99	19.94	23.93	47.57	-23.64	AVG	
5	0.5980	5.78	20.01	25.79	46.00	-20.21	AVG	
6	0.7420	19.27	20.05	39.32	56.00	-16.68	QP	
7	1.1700	18.53	20.12	38.65	56.00	-17.35	QP	
8	1.1740	4.21	20.12	24.33	46.00	-21.67	AVG	
9	1.6540	3.43	20.13	23.56	46.00	-22.44	AVG	
10	1.7220	18.11	20.13	38.24	56.00	-17.76	QP	
11	2.1300	2.76	20.14	22.90	46.00	-23.10	AVG	
12	2.6180	17.62	20.15	37.77	56.00	-18.23	QP	

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: TX+Charging mode
Test Specification: AC 240V, 60Hz
Comment: Neutral Line
Tem.:24.3℃ Hum.:60%

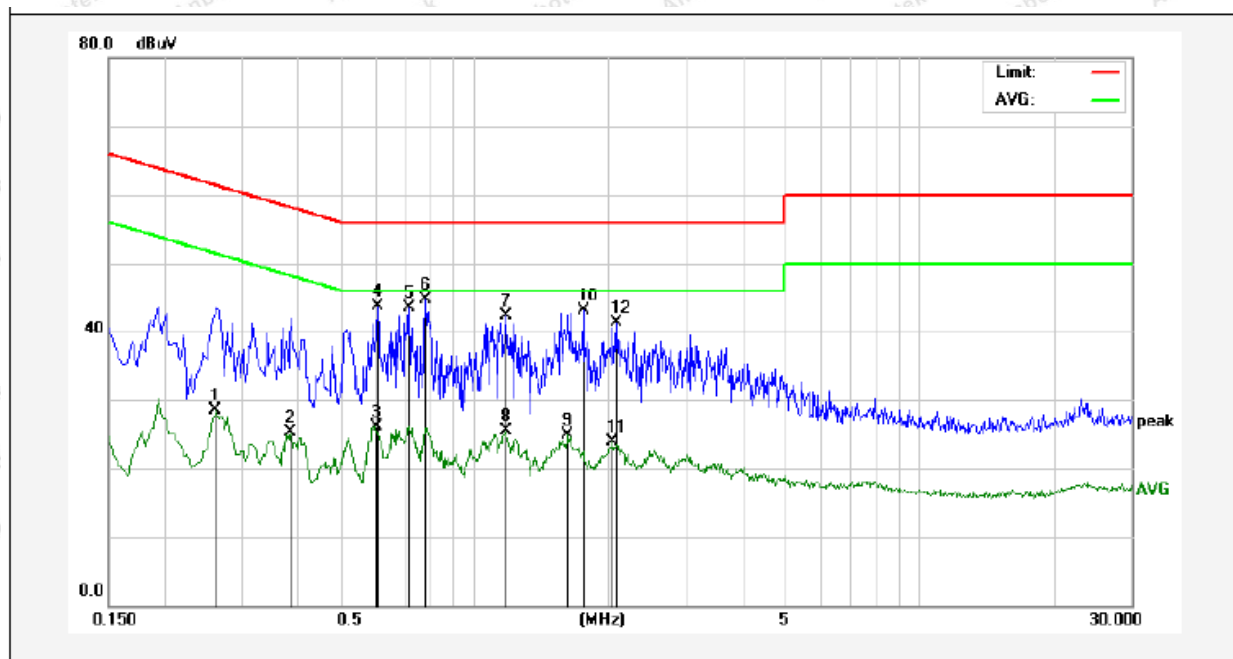

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.2620	8.54	19.89	28.43	51.36	-22.93	AVG	
2	0.3860	5.29	19.93	25.22	48.15	-22.93	AVG	
3	0.5980	6.16	20.01	26.17	46.00	-19.83	AVG	
4	0.6060	23.63	20.01	43.64	56.00	-12.36	QP	
5	0.7140	23.44	20.04	43.48	56.00	-12.52	QP	
6	0.7780	24.59	20.06	44.65	56.00	-11.35	QP	
7	1.1740	22.25	20.12	42.37	56.00	-13.63	QP	
8	1.1740	5.34	20.12	25.46	46.00	-20.54	AVG	
9	1.6260	4.73	20.13	24.86	46.00	-21.14	AVG	
10	1.7540	23.03	20.14	43.17	56.00	-12.83	QP	
11	2.0460	3.83	20.14	23.97	46.00	-22.03	AVG	
12	2.0820	21.25	20.14	41.39	56.00	-14.61	QP	

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209, 15.205 and 15.407				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	68.2	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

(3)Above 1GHz limit: $E[dBuV/m] = EIRP[dBm] + 95.2 = 68.2 \text{ dBuV/m}$, for $EIRP[dBm] = -27\text{dBm}$.

4.2. Test Setup

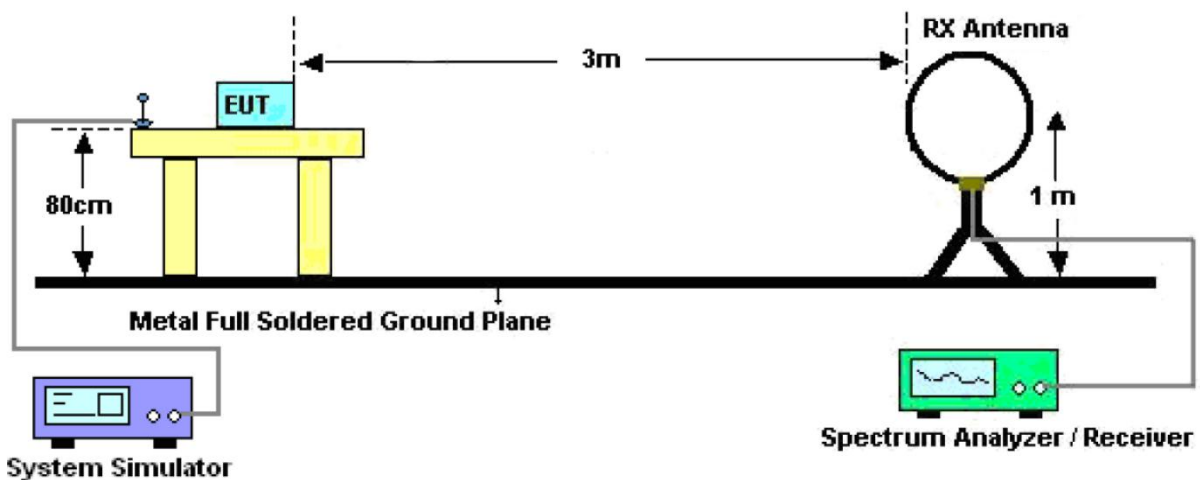


Figure 1. Below 30MHz

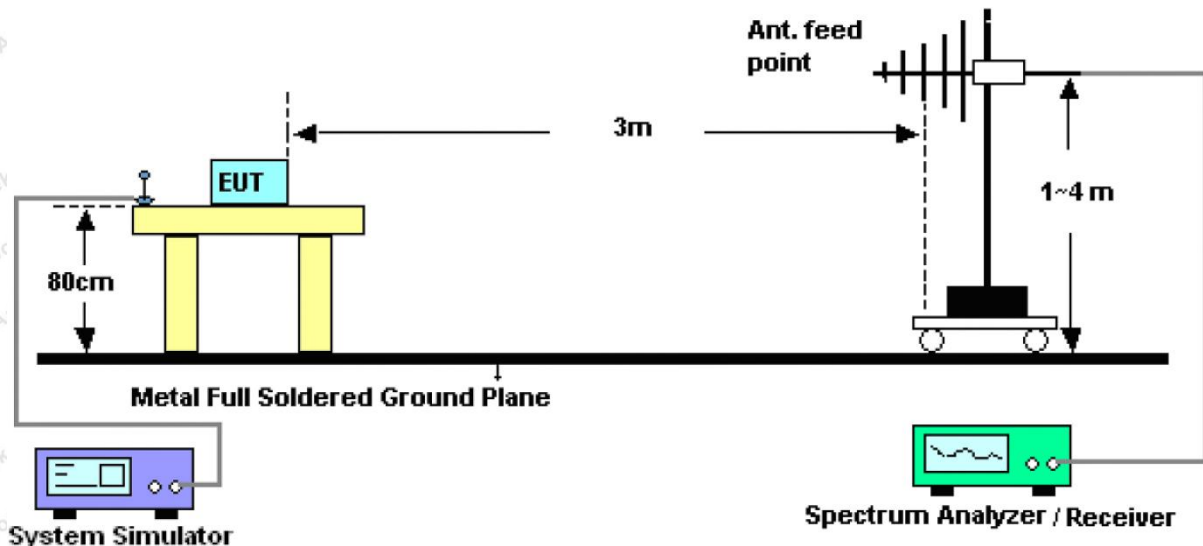


Figure 2. 30MHz to 1GHz

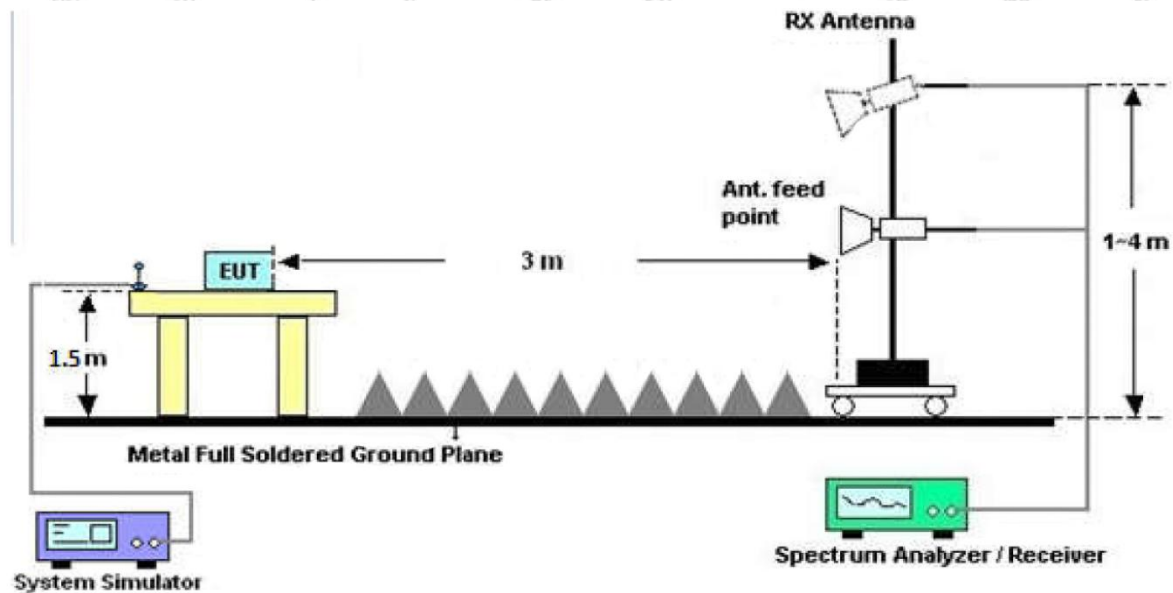


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying

aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector = Quasi-Peak, Trace mode = Max hold, Sweep = auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9kHz, VBW = 30kHz, Detector = Quasi-Peak, Trace mode = Max hold, Sweep = auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector = Quasi-Peak, Trace mode = Max hold, Sweep = auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector = Peak, Trace mode = Max hold, Sweep = auto couple.

RBW = 1MHz, VBW = 10Hz, Detector = Average, Trace mode = Max hold, Sweep = auto couple.

4.4. Test Data

PASS

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Results (30~1000MHz)

Job No.: SZAWW181115014-01


Temp.(°C)/Hum.(%RH): 24.6°C/54%RH

Standard: FCC PART 15C

Power Source: AC 120V, 60Hz

Test Mode: TX+Charging mode

Polarization: Horizontal

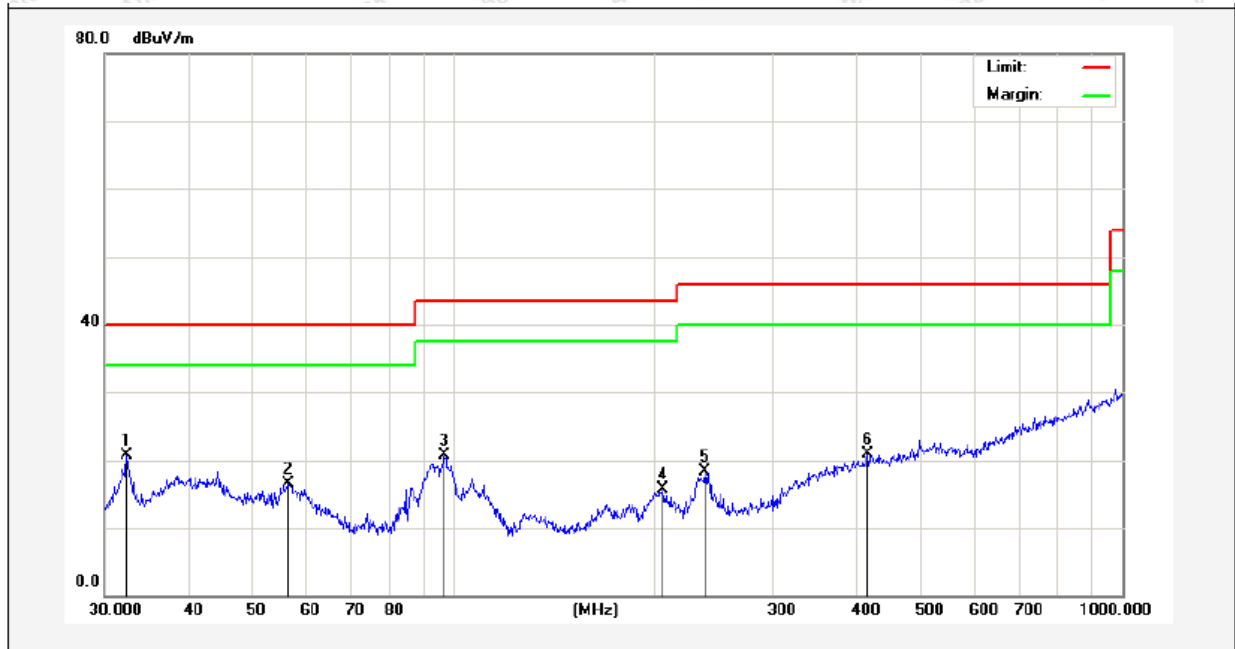

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	32.4059	38.57	-17.85	20.72	40.00	-19.28	QP	300	46	
2	56.3948	34.39	-17.80	16.59	40.00	-23.41	QP	300	152	
3	96.7749	42.83	-22.06	20.77	43.50	-22.73	QP	300	312	
4	205.6751	35.73	-19.99	15.74	43.50	-27.76	QP	300	224	
5	237.4760	37.05	-18.72	18.33	46.00	-27.67	QP	300	176	
6	416.1791	33.28	-12.47	20.81	46.00	-25.19	QP	300	260	

Test Results (30~1000MHz)

Job No.: SZAWW181115014-01


Temp.(°C)/Hum.(%RH): 24.6°C/54%RH

Standard: FCC PART 15C

Power Source: AC 120V, 60Hz

Test Mode: TX+Charging mode

Polarization: Vertical

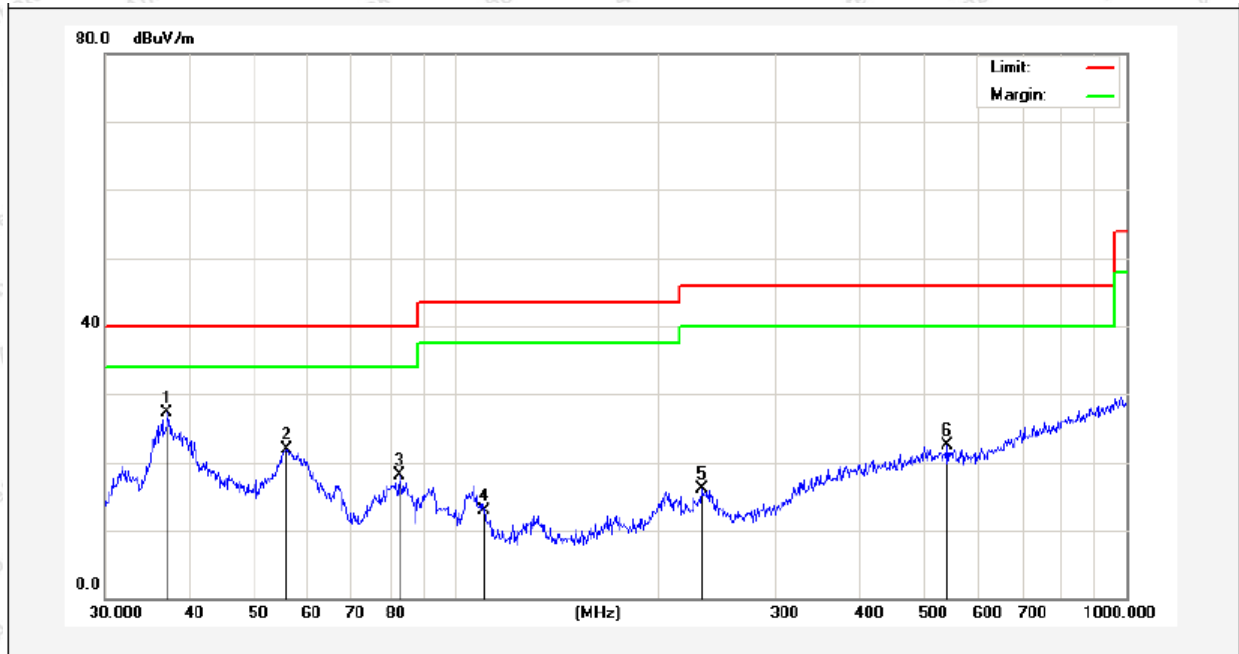


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	37.1550	42.25	-14.92	27.33	40.00	-12.67	QP	300	142	
2	56.0007	38.65	-16.79	21.86	40.00	-18.14	QP	300	63	
3	82.3588	38.08	-19.92	18.16	40.00	-21.84	QP	300	230	
4	110.1816	28.46	-15.63	12.83	43.50	-30.67	QP	300	241	
5	233.3487	30.92	-14.76	16.16	46.00	-29.84	QP	300	332	
6	541.3725	32.75	-10.24	22.51	46.00	-23.49	QP	300	360	

Test Results (30~1000MHz)

Job No.: SZAWW181115014-01
Standard: FCC PART 15C
Test Mode: TX+Charging mode

Temp.(°C)/Hum.(%RH): 24.6°C/54%RH
Power Source: AC 240V, 60Hz
Polarization: Horizontal

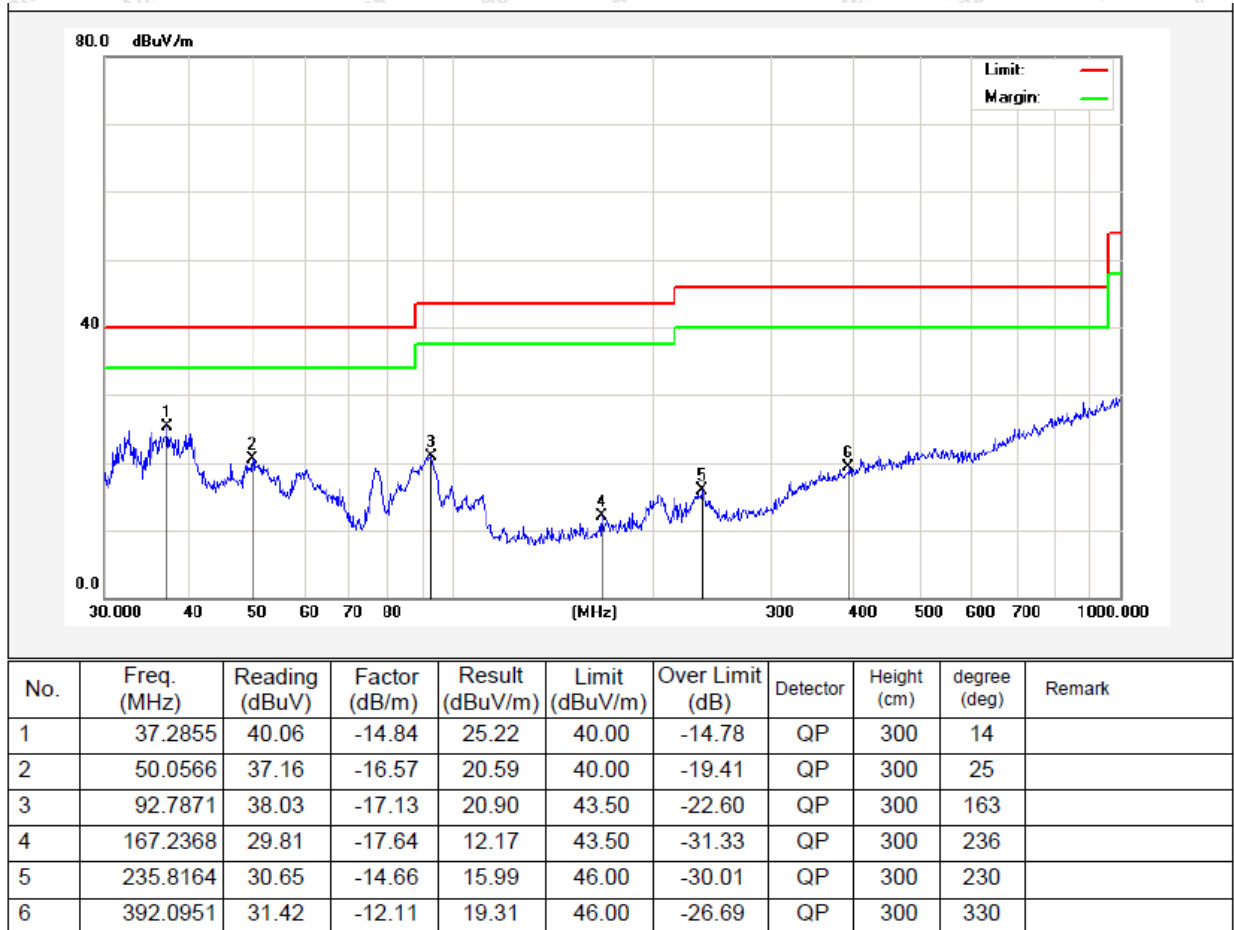

Test Results (30~1000MHz)

Job No.: SZAWW181115014-01


Temp.(°C)/Hum.(%RH): 24.6°C/54%RH

Standard: FCC PART 15C

Power Source: AC 240V, 60Hz

Test Mode: TX+Charging mode

Polarization: Vertical

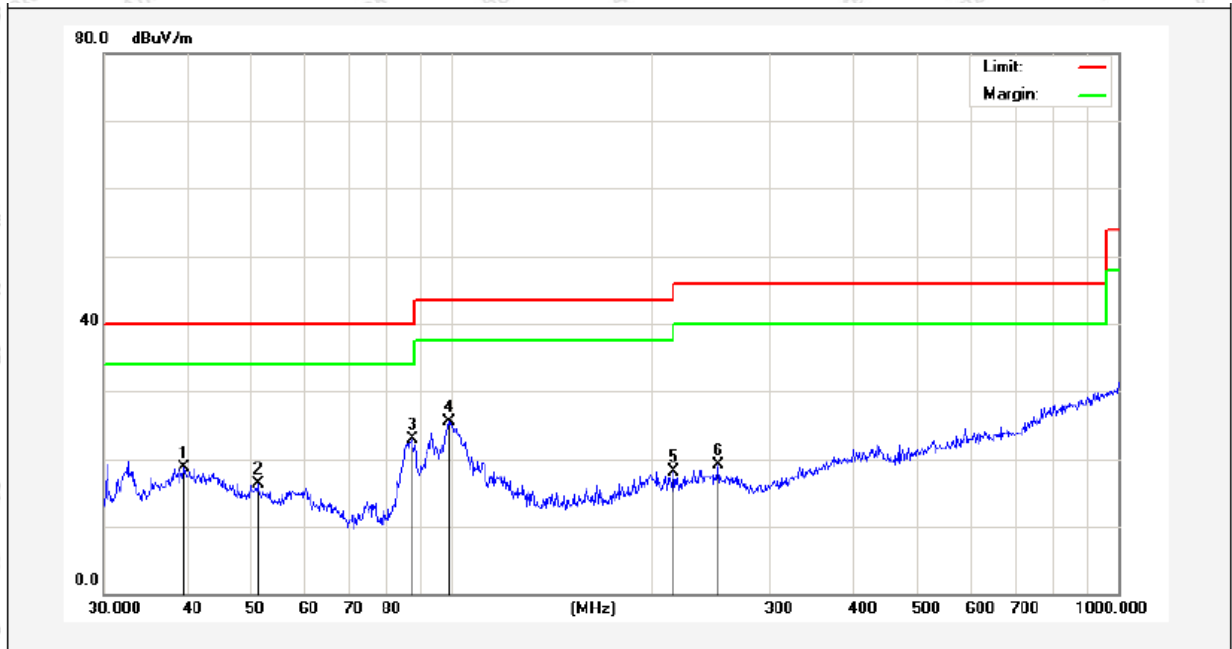

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	39.5757	33.24	-14.60	18.64	40.00	-21.36	QP	300	123	
2	51.1209	33.87	-17.60	16.27	40.00	-23.73	QP	300	52	
3	87.1117	45.77	-22.93	22.84	40.00	-17.16	QP	300	112	
4	99.1797	47.30	-21.84	25.46	43.50	-18.04	QP	300	321	
5	215.2678	38.28	-20.20	18.08	43.50	-25.42	QP	300	152	
6	251.1804	38.26	-19.10	19.16	46.00	-26.84	QP	300	222	

Test Results (Above 1000MHz)

Test channel:	5180MHz
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10360.00	42.44	31.98	17.08	33.91	57.59	68.20	-10.61	V
15540.00	34.99	32.65	20.03	34.85	52.82	68.20	-15.38	V
10360.00	37.54	31.98	17.08	33.91	52.69	68.20	-15.51	H
15540.00	36.20	32.65	20.03	34.85	54.03	68.20	-14.17	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10360.00	31.66	31.98	17.08	33.91	46.81	54.00	-7.19	V
15540.00	28.19	32.65	20.03	34.85	46.02	54.00	-7.98	V
10360.00	28.72	31.98	17.08	33.91	43.87	54.00	-10.13	H
15540.00	27.82	32.65	20.03	34.85	45.65	54.00	-8.35	H

Note:


1. Final Level = Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor

Radiated Band Edge:

Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	41.94	28.65	13.58	31.04	53.13	68.20	-15.07	H
5350.00	42.35	29.16	14.68	31.96	54.23	68.20	-13.97	H
5150.00	42.31	28.65	13.58	31.04	53.50	68.20	-14.70	V
5350.00	43.86	29.16	14.68	31.96	55.74	68.20	-12.46	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	35.11	28.65	13.58	31.04	46.30	54.00	-7.70	H
5350.00	35.93	29.16	14.68	31.96	47.81	54.00	-6.19	H
5150.00	35.18	28.65	13.58	31.04	46.37	54.00	-7.63	V
5350.00	35.95	29.16	14.68	31.96	47.83	54.00	-6.17	V

For conducted test:

Band Edge

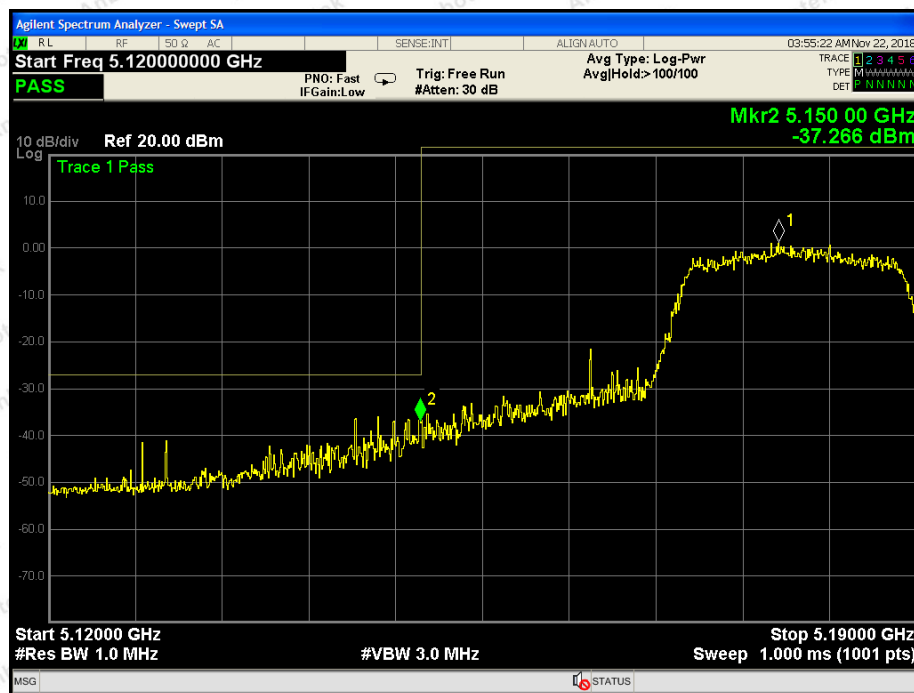


5. Maximum Peak Output Power Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.407 (a)(1) (3)
Test Limit	24dBm

5.2. Test Setup



5.3. Test Procedure

1. The Transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the power value.
3. Repeat above procedures on all channels needed to be tested.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

5.4. Test Data

Test Item	: Max. peak output power	Test Mode	: CH 01
Test Voltage	: DC 5V	Temperature	: 24°C
Test Result	: PASS	Humidity	: 55%RH


Channel Frequency (MHz)	Peak Power output (dBm)	Limit (dBm)	Results
5180	14.17	24.00	PASS

6. Occupy Bandwidth Test

6.1. Test Standard

Test Standard	FCC Part15 C Section 15.407 (a)(5)
---------------	------------------------------------

6.2. Test Setup



6.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

3. Set the spectrum analyzer as:

26 dB & 99% bandwidth

RBW = approximately 1% of the emission bandwidth;

Set the VBW > RBW;

Detector= Peak

Trace mode= Max hold.

Sweep- auto couple.

6 dB bandwidth

RBW = 100kHz;

Set the video bandwidth (VBW) ≥ 3 RBW;

Detector= Peak

Trace mode= Max hold.

Sweep- auto couple.

4. Measure the maximum width of the emission that is 26dB /6dB down from the maximum of the emission.
Compare this with the RBW setting of the analyzer.

5. Repeat until all the rest channels are investigated.

6.4. Test Data


Test Item : 6dB & 26dB BW
Test Voltage : DC 5V
Test Result : PASS

Test Mode : CH Low ~ CH High
Temperature : 24℃
Humidity : 55%RH


Channel Frequency (MHz)	6dB BW(MHz)	Limit	Results
5180	17.62	>0.5MHz	PASS

Channel Frequency (MHz)	26dB BW(MHz)	99%Bandwidth (MHz)
5180	19.09	17.756

6dB Bandwidth

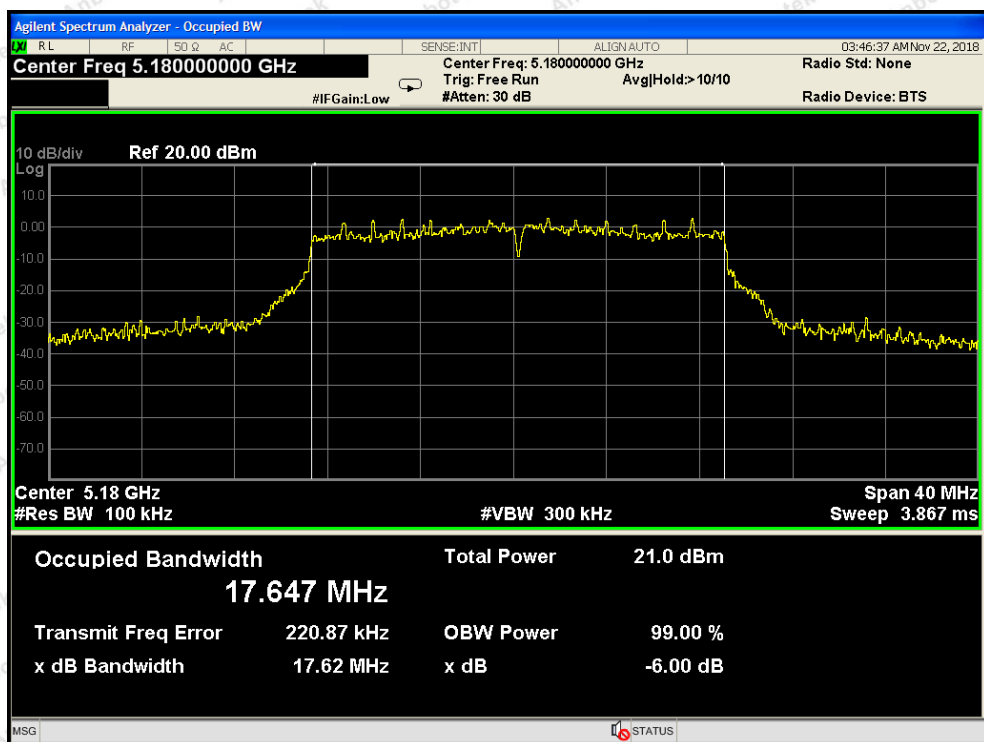

26dB & 99% Bandwidth

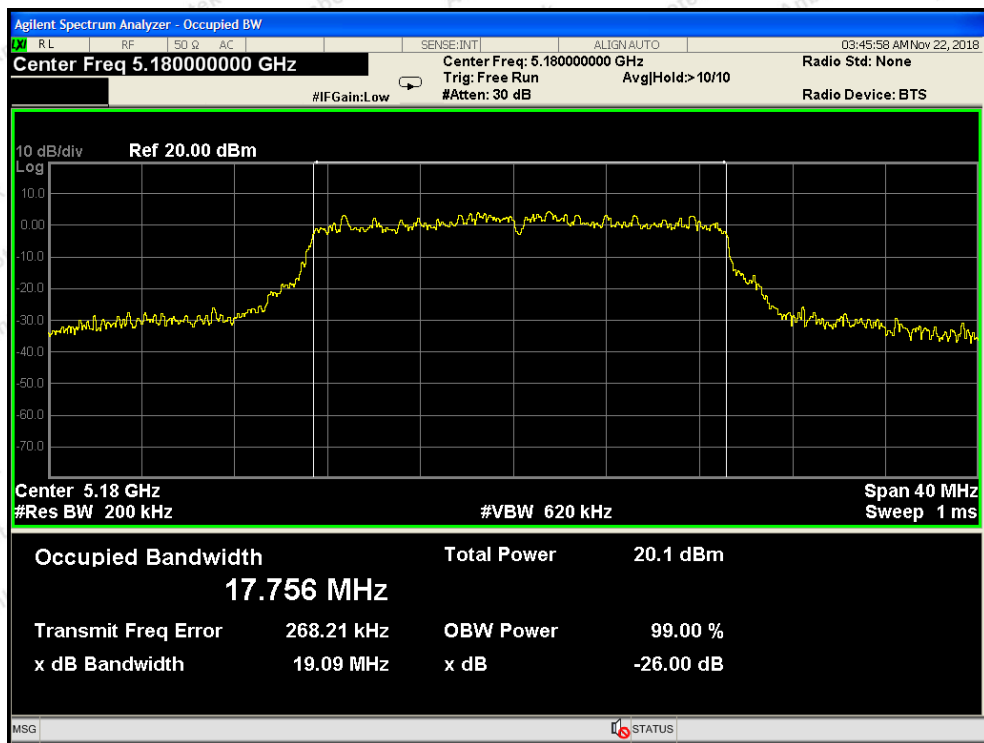


7. Power Spectral Density Test

7.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.407 (a) (1) (2) (3)
Test Limit	11dBm

7.2. Test Setup



7.3. Test Procedure

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz).

1. The EUT is directly connected to the spectrum analyzer;
2. Set RBW =1MHz;
3. Set VBW $\geq$ 3 RBW=3MHz;
3. Set the span to encompass the entire emissions bandwidth (EBW) of the signal;
5. Detector=RMS;
6. Sweep time= auto couple;
7. Trace mode=max. hold;


7.4. Test Data

Test Item : Power Spectral Density
Test Voltage : DC 5V
Test Result : PASS

Test Mode : CH 01
Temperature : 24°C
Humidity : 55%RH

Channel Frequency (MHz)	Final Power Spectral Density (dBm)	Limit	Results
5180	6.360	11dBm	PASS

Test Mode: CH 01

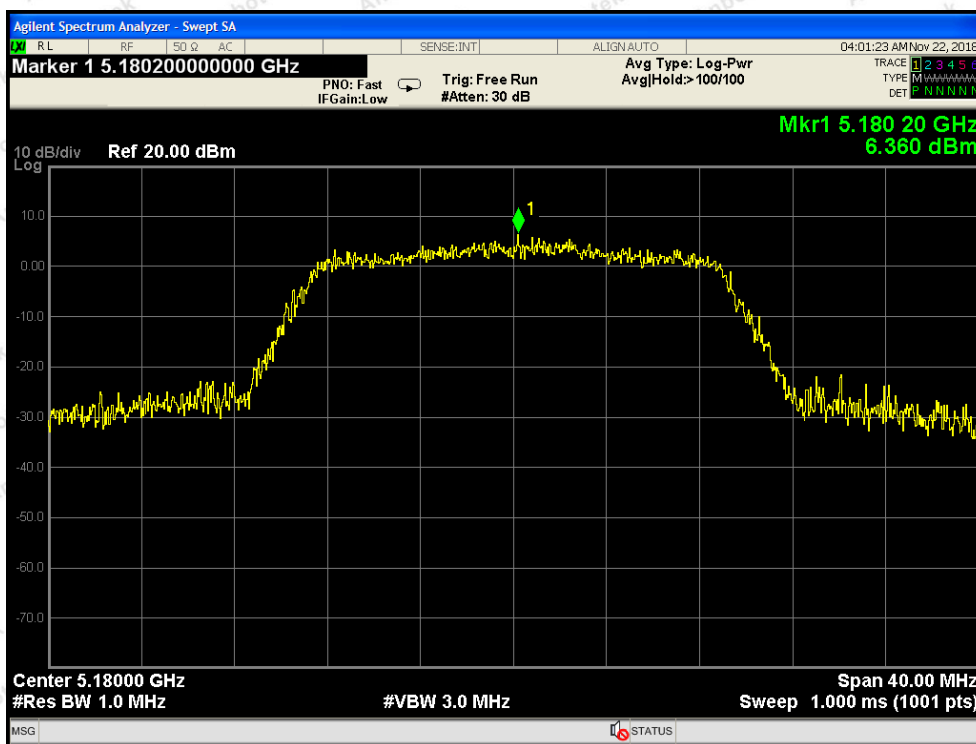


8. Antenna Requirement

8.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /15.407
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.407 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

8.2. Antenna Connected Construction

The WIFI antenna is a PIFA Antenna which permanently attached, and the best case gain of the antenna is 2 dBi. It complies with the standard requirement.

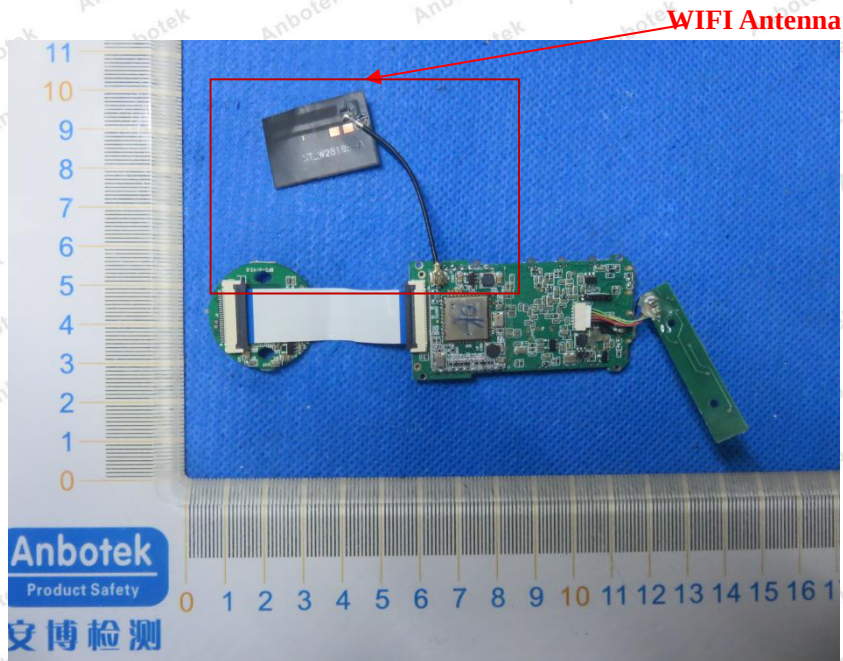



APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement





Photo of Radiation Emission Test

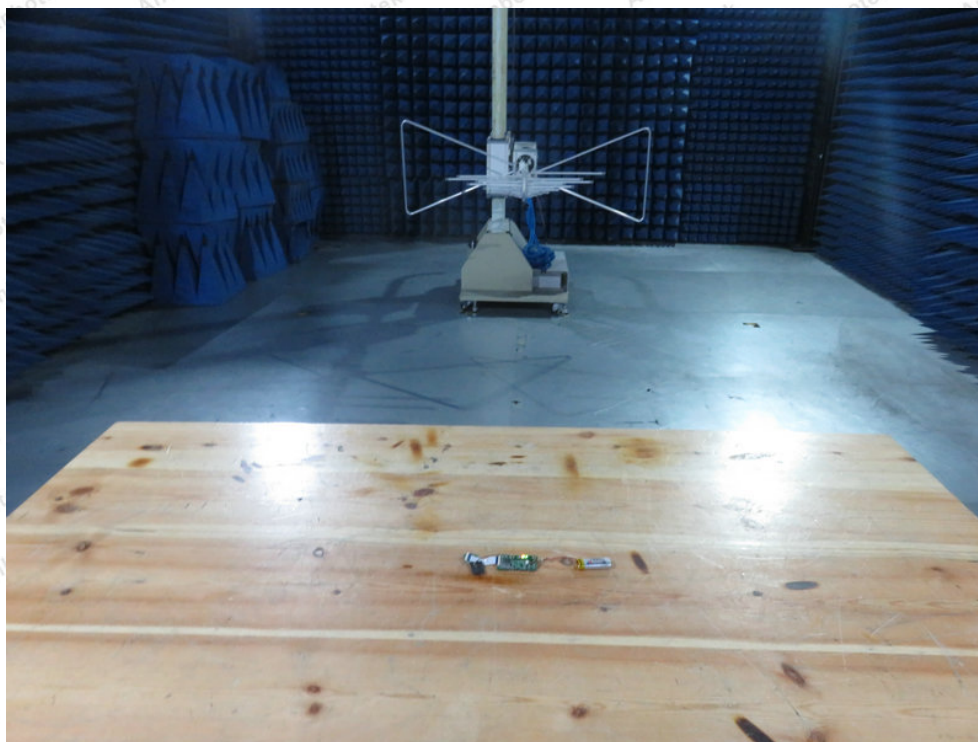


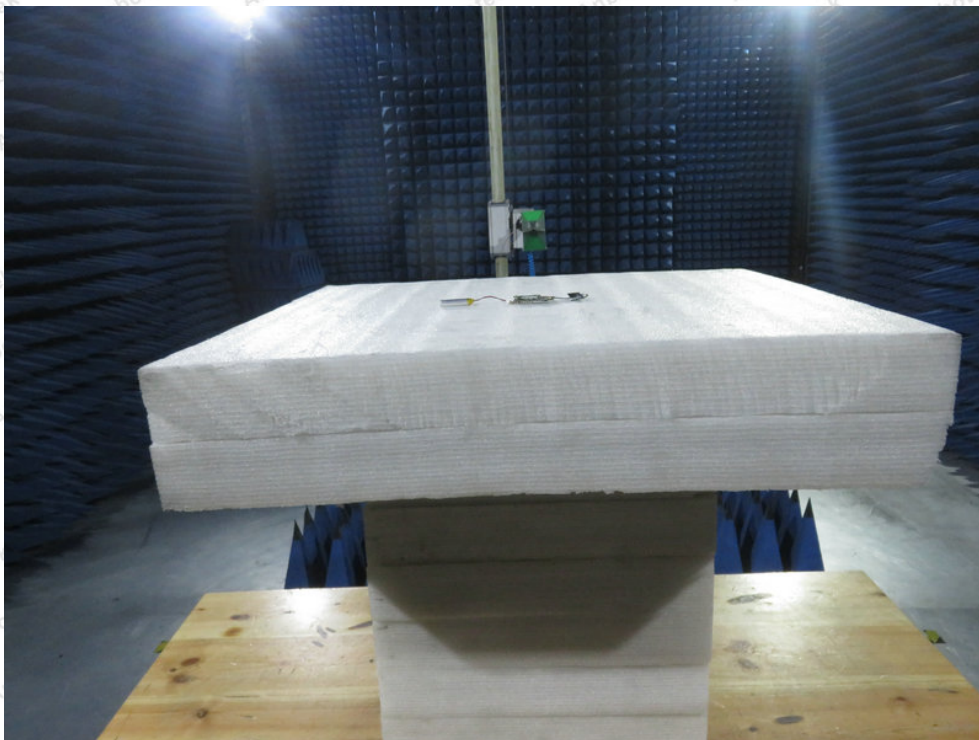




APPENDIX II -- EXTERNAL PHOTOGRAPH

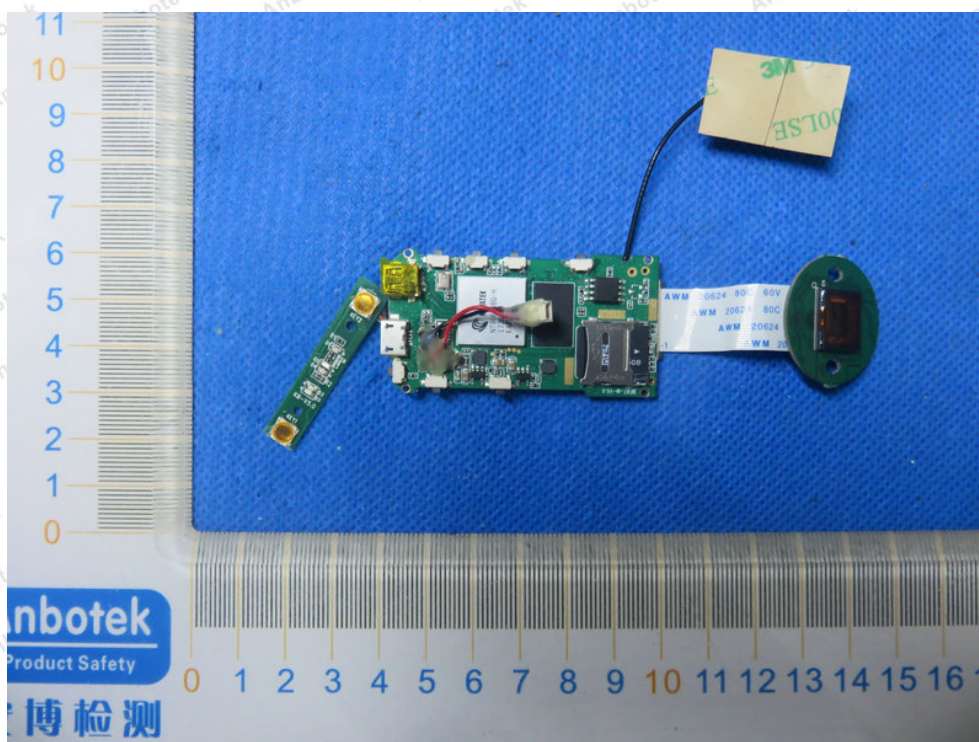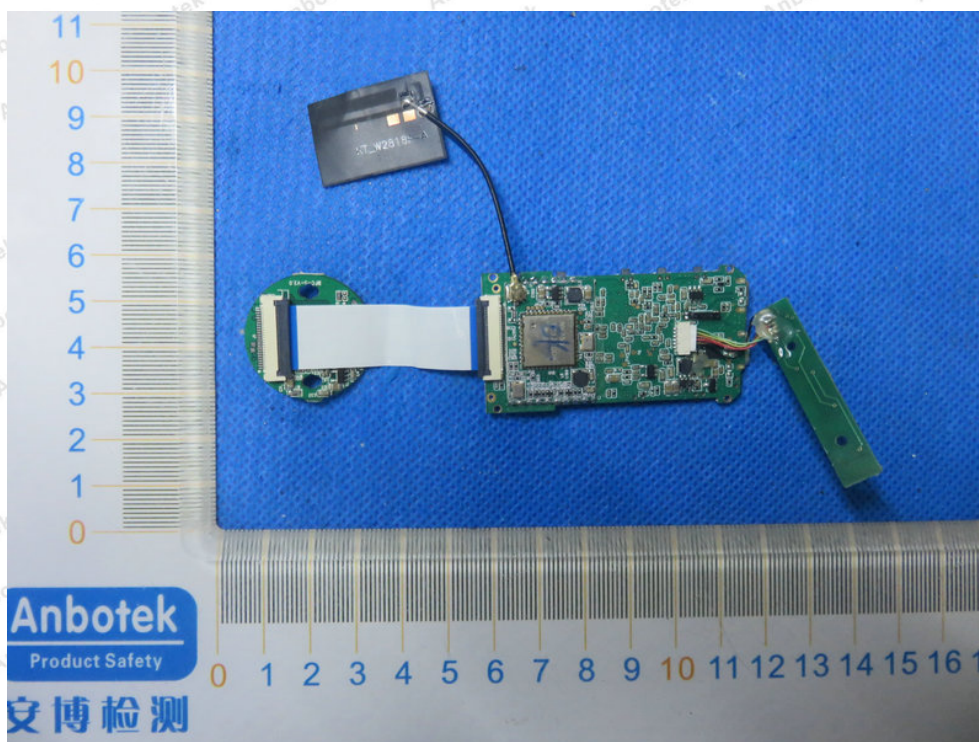


APPENDIX III -- INTERNAL PHOTOGRAPH



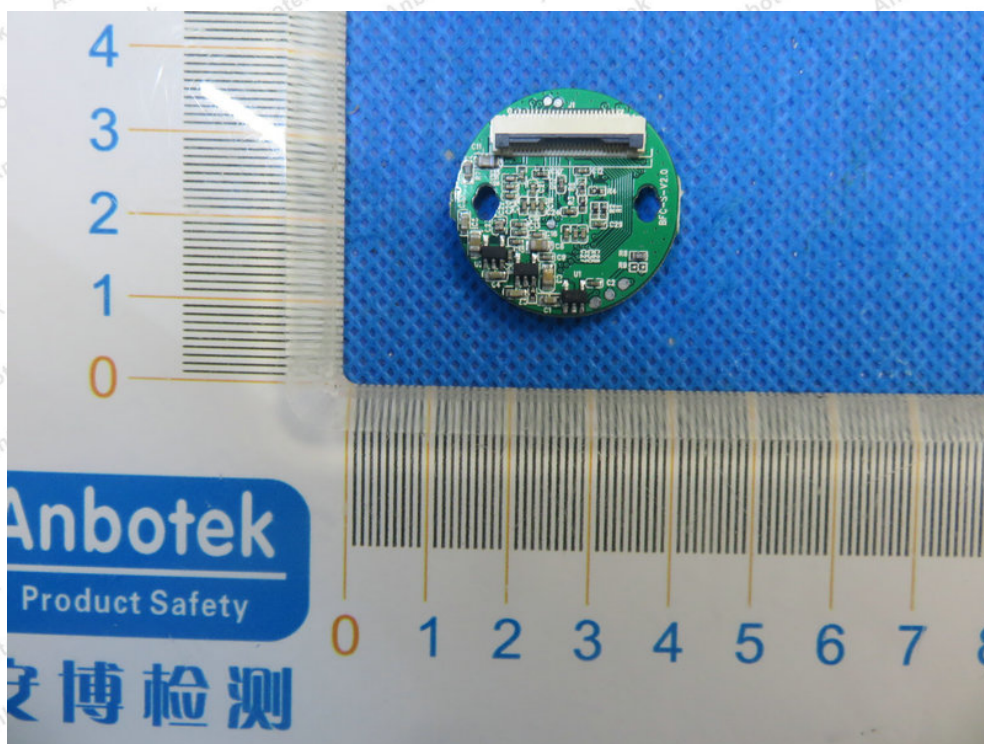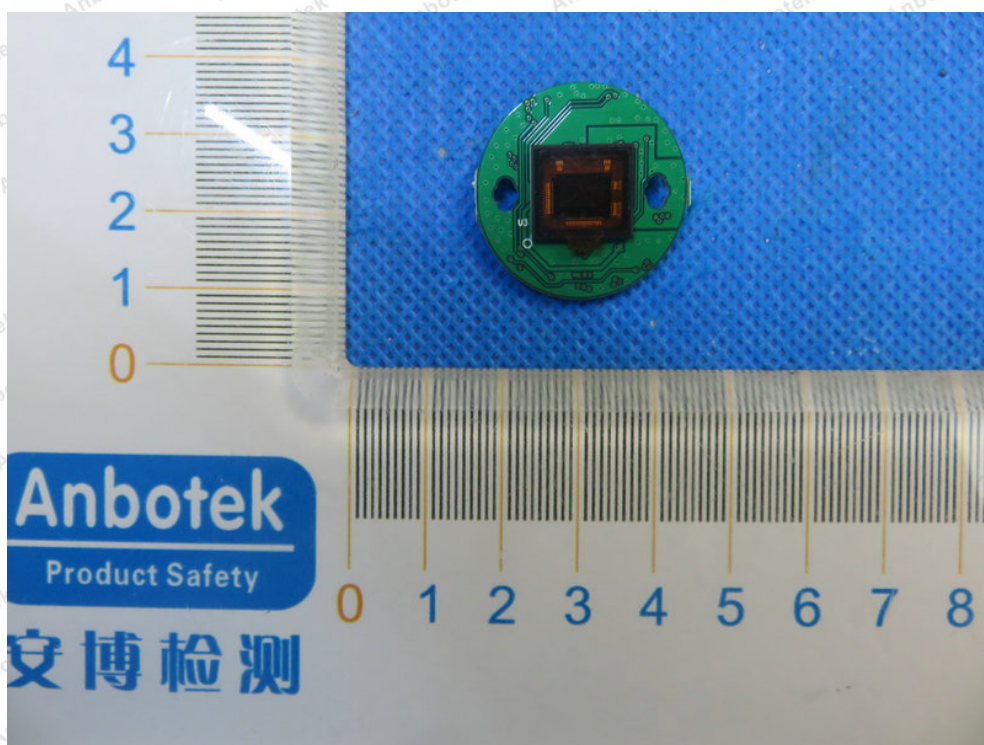

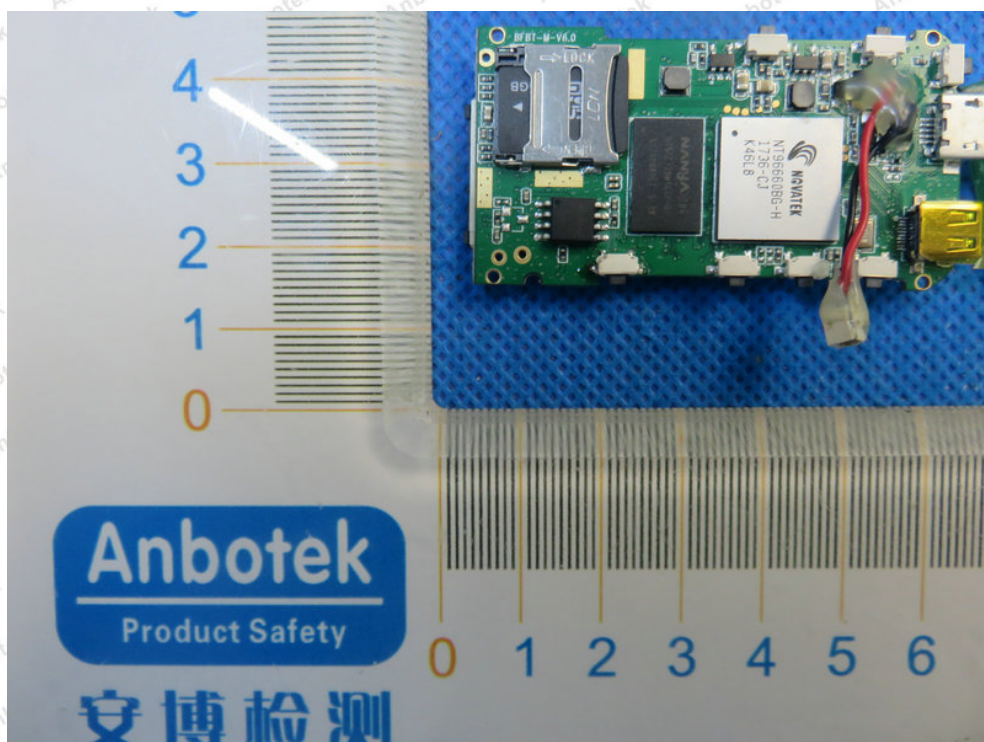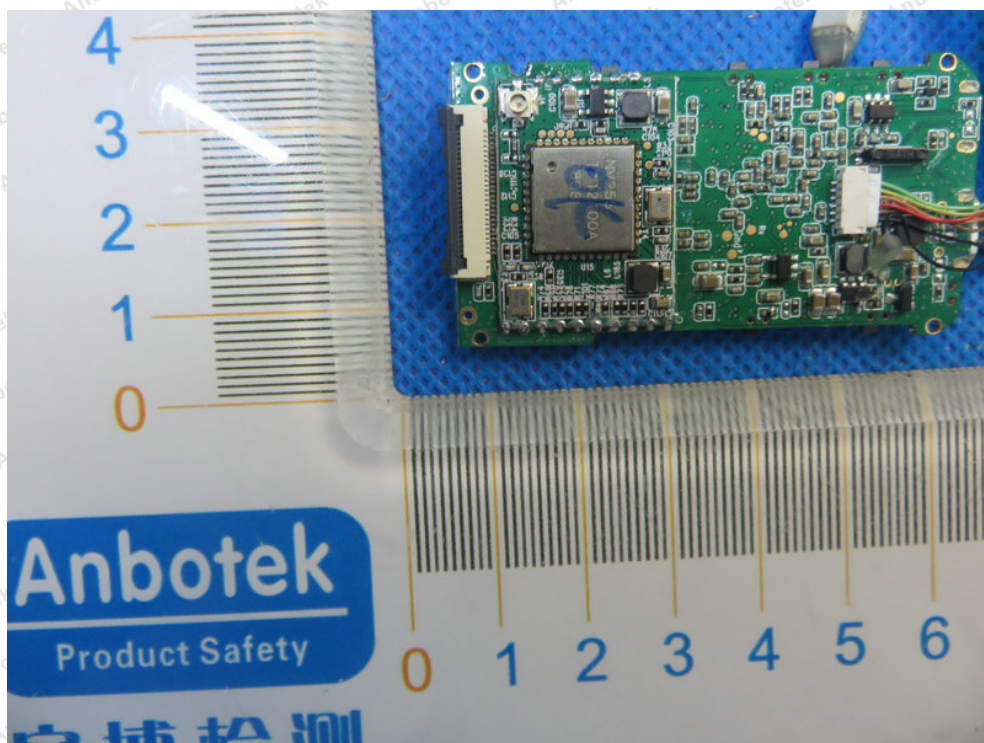

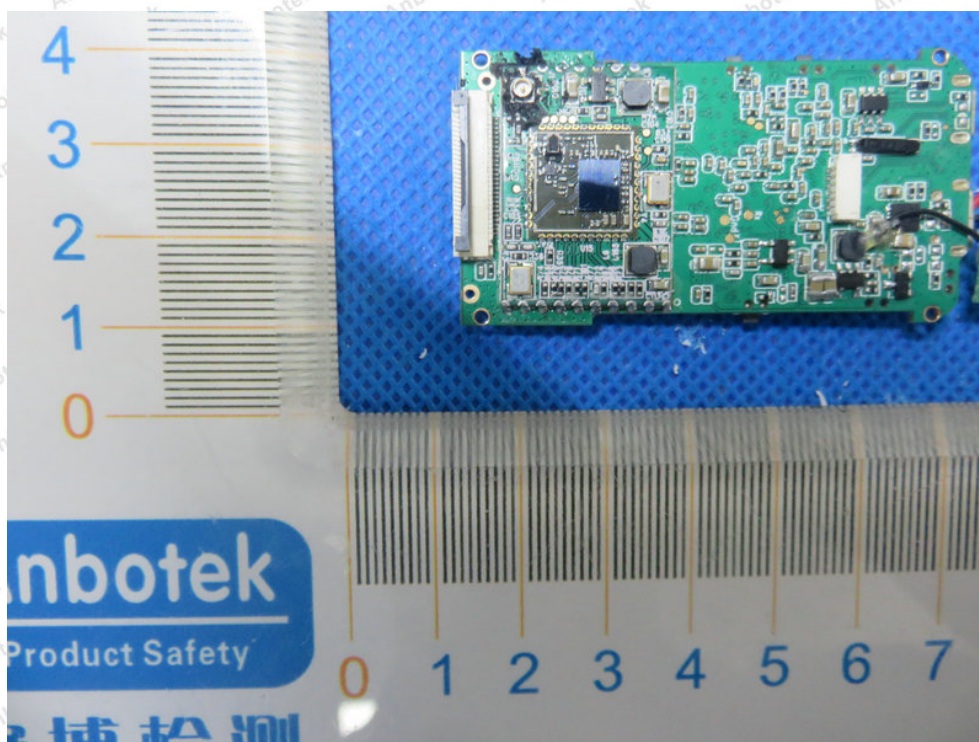

----- End of Report -----