



A D T

FCC TEST REPORT

REPORT NO.: RF130806D01A
MODEL NO.: CN-SZ-011– *multiple listing see item 3.1*
FCC ID: P27SZESW01
RECEIVED: Dec. 10, 2013
TESTED: Dec. 14 ~19, 2013
ISSUED: Dec. 25, 2013

APPLICANT: Sercomm Corp.

ADDRESS: 8F, No.3-1, YuangQu St., NanKang, Taipei
115, Taiwan, R.O.C. (NanKang Software Park)

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,
New Taipei City, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1. CERTIFICATION.....	5
2. SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	6
3. GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	8
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	9
3.3 DUTY CYCLE OF TEST SIGNAL	11
3.4 DESCRIPTION OF SUPPORT UNITS	12
3.4.1 CONFIGURATION OF SYSTEM UNDER TEST.....	12
3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	13
4. TEST TYPES AND RESULTS	14
4.1 RADIATED EMISSION AND BANDEGE MEASUREMENT	14
4.1.1 LIMITS OF RADIATED EMISSION AND BANDEGE MEASUREMENT ..	14
4.1.2 TEST INSTRUMENTS.....	15
4.1.3 TEST PROCEDURES	16
4.1.4 DEVIATION FROM TEST STANDARD.....	16
4.1.5 TEST SETUP.....	17
4.1.6 EUT OPERATING CONDITIONS	17
4.1.7 TEST RESULTS	18
4.2 6dB BANDWIDTH MEASUREMENT	23
4.2.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	23
4.2.2 TEST SETUP.....	23
4.2.3 TEST INSTRUMENTS.....	23
4.2.4 TEST PROCEDURE.....	23
4.2.5 DEVIATION FROM TEST STANDARD.....	23
4.2.6 EUT OPERATING CONDITIONS	23
4.2.7 TEST RESULTS	24
4.3 CONDUCTED OUTPUT POWER.....	25
4.3.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT.....	25
4.3.2 TEST SETUP.....	25
4.3.3 TEST INSTRUMENTS.....	25
4.3.4 TEST PROCEDURES	25
4.3.5 DEVIATION FROM TEST STANDARD.....	25
4.3.6 EUT OPERATING CONDITIONS	25
4.3.7 TEST RESULTS	26
4.4 POWER SPECTRAL DENSITY MEASUREMENT	27
4.4.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	27
4.4.2 TEST SETUP.....	27
4.4.3 TEST INSTRUMENTS.....	27
4.4.4 TEST PROCEDURE.....	27
4.4.5 DEVIATION FROM TEST STANDARD.....	27
4.4.6 EUT OPERATING CONDITION.....	27
4.4.7 TEST RESULTS	28



A D T

4.5	CONDUCTED OUT OF BAND EMISSION MEASUREMENT	29
4.5.1	LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT .	29
4.5.2	TEST SETUP	29
4.5.3	TEST INSTRUMENTS	29
4.5.4	TEST PROCEDURE	29
4.5.5	DEVIATION FROM TEST STANDARD	30
4.5.6	EUT OPERATING CONDITION	30
4.5.7	TEST RESULTS	30
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION	32
6.	INFORMATION ON THE TESTING LABORATORIES	33
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	34



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF130806D01A	Original release	Dec. 25, 2013



A D T

1. CERTIFICATION

PRODUCT: ZigBee Energy Switch
MODEL NO.: CN-SZ-011 – *multiple listing see item 3.1*
BRAND: Sercomm, iControl, AT&T, Securifi
APPLICANT: Sercomm Corp.
TESTED: Dec. 14 ~19, 2013
TEST SAMPLE: ENGINEERING SAMPLE
STANDARDS: FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10-2009

The above equipment (model: CN-SZ-011) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Jessica Cheng , **DATE:** Dec. 25, 2013
(Jessica Cheng / Specialist)

APPROVED BY : Rex Lai , **DATE:** Dec. 25, 2013
(Rex Lai / Assistant Manager)



2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	NA	Refer to NOTE below
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -1.1dB at 2483.50MHz.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

NOTE: No need to retest the test item due to the change should not influence test result.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Radiated emissions	30MHz ~ 1GHz	4.00 dB
	Above 1GHz	3.36 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	ZigBee Energy Switch
MODEL NO.	CN-SZ-011 – <i>multiple listing see Note</i>
POWER SUPPLY	120Vac , 60Hz
MODULATION TYPE	O-QPSK
MODULATION TECHNOLOGY	DSSS
TRANSFER RATE	250kbps
OPERATING FREQUENCY	2405MHz ~ 2480MHz
NUMBER OF CHANNEL	16
OUTPUT POWER	77.6mW
ANTENNA TYPE	Printed antenna with 0.3dBi gain
ANTENNA CONNECTOR	N/A
DATA CABLE	N/A
I/O PORTS	Refer to user’s manual
ACCESSORY DEVICES	N/A

Note:

1. This report is a supplementary report of the original one (BV CPS report no.: RF130806D01) issued on Aug. 19, 2013 to verify test result for some electronic and mechanical changes. The main changes are motherboard change layout and addition CH25 test data, since original high channel 26, has very low output power due to out of band emission limitation, we want to show permitted output power on next channel 25.
2. The changes are meeting the PCB and hardware changes of the permissive changes rules; therefore this report is prepared for FCC class II permissive change.
3. The EUT is has several models, all models are electrically identical, different model names are for marketing differentiation:

MODEL	DIFFERENCE
SZ-ESW01XXXXXXXX (The “x” in model name can be 0 to 9, A to Z, blank or “-“ , for marking purpose)	marketing differentiation
CN-SZ-011	

During the test, **model no.: CN-SZ-011** was selected as the representative one for the test and only its test data was recorded in this report.

4. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



3.2 DESCRIPTION OF TEST MODES

16 channels are listed as below:

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
11	2405MHz	19	2445MHz
12	2410MHz	20	2450MHz
13	2415MHz	21	2455MHz
14	2420MHz	22	2460MHz
15	2425MHz	23	2465MHz
16	2430MHz	24	2470MHz
17	2435MHz	25	2475MHz
18	2440MHz	26	2480MHz



3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO					DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	OB	
-	√	√	NOTE	√	√	-

Where **RE≥1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement
OB: Conducted Out-Band Emission Measurement

NOTE: No need to retest the test item due to the change should not influence test result.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	11 to 26	11, 18, 25, 26	O-QPSK

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	11 to 26	25	O-QPSK



CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	11 to 26	25	O-QPSK

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	11 to 26	25	O-QPSK

TEST CONDITION:


APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE≥1G	21deg. C, 75%RH	120Vac, 60Hz	Joey Liu
RE<1G	21deg. C, 75%RH	120Vac, 60Hz	Joey Liu
OB	25deg. C, 60%RH	120Vac, 60Hz	Chad Lee
APCM	25deg. C, 60%RH	120Vac, 60Hz	Chad Lee



A D T

3.3 DUTY CYCLE OF TEST SIGNAL


Duty cycle of test signal is 100 %

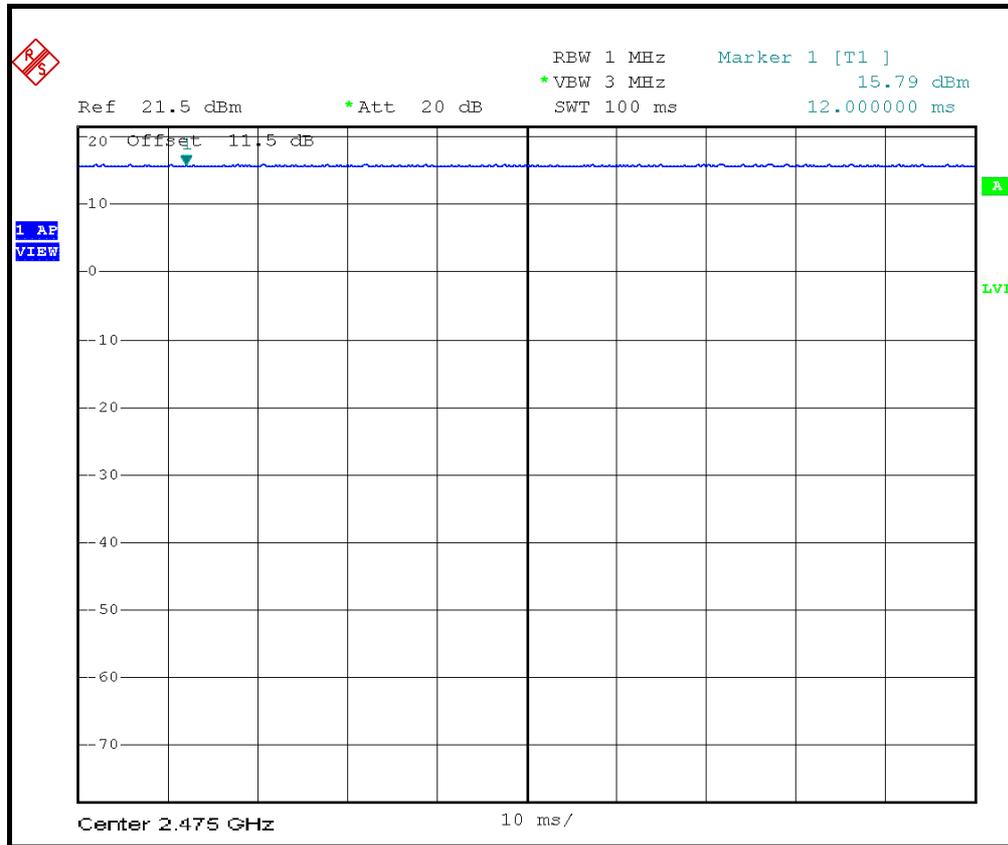

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together without other necessary accessories or support unit.

3.4.1 CONFIGURATION OF SYSTEM UNDER TEST

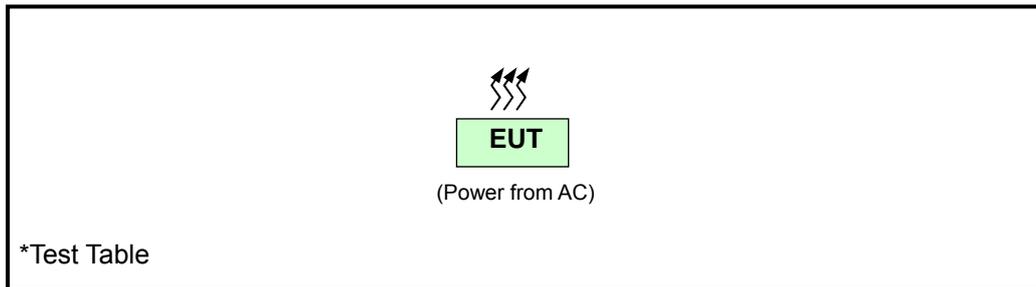



A D T

3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2009

558074 D01 DTS Meas Guidance v03r01

All test items have been performed and recorded as per the above standards.



4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
HP Preamplifier	8447D	2432A03504	Feb. 26, 2013	Feb. 25, 2014
HP Preamplifier	8449B	3008A01201	Feb. 26, 2013	Feb. 25, 2014
Agilent TEST RECEIVER	N9038A	MY51210129	Jan. 03, 2013	Jan. 02, 2014
Schwarzbeck Antenna	VULB 9168	137	Mar. 20, 2013	Mar. 19, 2014
Schwarzbeck Antenna	VHBA 9123	480	May 29, 2013	May 28, 2014
ADT. Turn Table	TT100	0306	NA	NA
ADT. Tower	AT100	0306	NA	NA
Software	ADT_Radiated_V 7.6.15.9.2	NA	NA	NA
SUHNER RF cable	SF102	CABLE-CH6	Aug. 16, 2013	Aug. 15, 2014
Schwarzbeck Horn Antenna	BBHA 9120-D1	D130	May 13, 2013	May 12, 2014
Highpass filter Wainwright Instruments	WHK 3.1/18G-10SS	SN 8	NA	NA
ROHDE & SCHWARZ Spectrum Analyzer	FSP 40	100036	May. 17, 2013	May. 16, 2014
Anritsu Power Sensor	MA2411B	0738404	Apr. 24, 2013	Apr. 23, 2014
Anritsu Power Meter	ML2495A	0842014	Apr. 25, 2013	Apr. 24, 2014

- NOTE:**
1. The calibration interval of the above test instruments is 12/24 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 3. The test was performed in Chamber No. 6.
 4. The Industry Canada Reference No. IC 7450E-6.
 5. The FCC Site Registration No. is 447212.



A D T

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 100kHz and video bandwidth is 300kHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 1kHz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

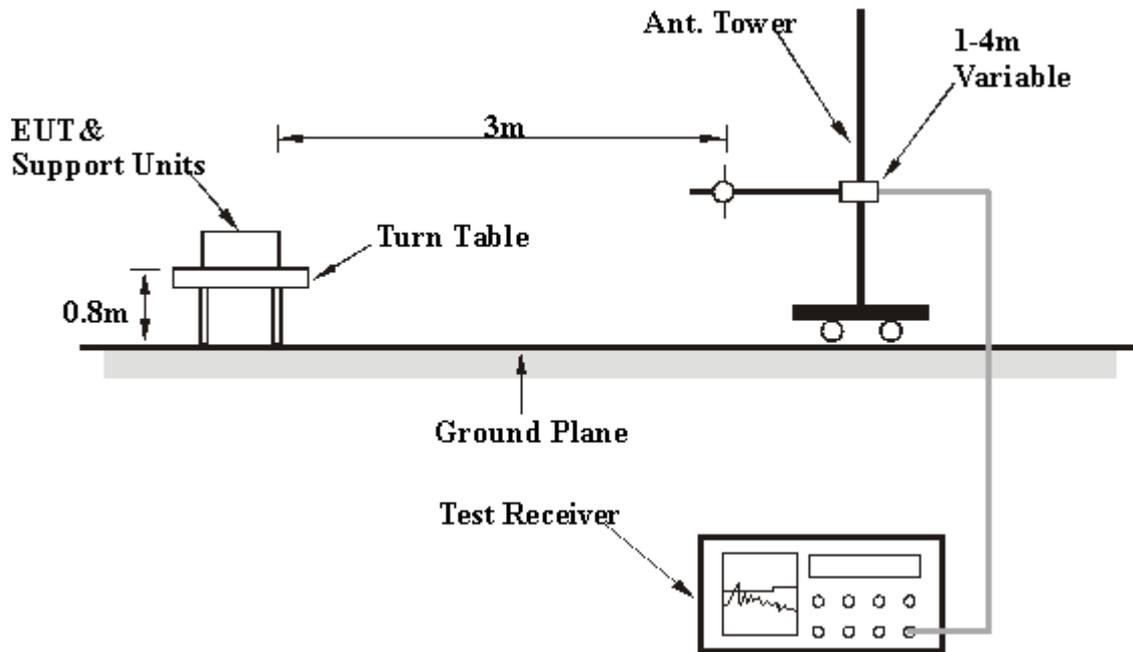

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. Set the EUT under transmitting condition.



A D T

4.1.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

CHANNEL	TX Channel 25	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	42.61	32.5 QP	40.0	-7.5	1.17 H	254	46.52	-14.06
2	97.12	34.9 QP	43.5	-8.6	1.48 H	285	53.53	-18.59
3	258.00	39.0 QP	46.0	-7.0	1.37 H	226	52.18	-13.22
4	400.01	37.9 QP	46.0	-8.1	1.42 H	254	47.48	-9.62
5	500.11	39.3 QP	46.0	-6.7	1.43 H	90	46.69	-7.37
6	819.19	38.8 QP	46.0	-7.2	1.28 H	248	40.41	-1.61
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	129.13	36.2 QP	43.5	-7.4	1.37 V	288	51.07	-14.92
2	250.00	38.7 QP	46.0	-7.4	1.48 V	187	52.16	-13.51
3	300.00	38.8 QP	46.0	-7.2	1.27 V	44	50.23	-11.44
4	500.01	39.1 QP	46.0	-6.9	1.57 V	70	46.43	-7.37
5	819.19	37.5 QP	46.0	-8.5	1.68 V	119	39.11	-1.61
6	851.98	38.6 QP	46.0	-7.4	1.16 V	151	39.82	-1.26

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

ABOVE 1GHz DATA

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.4 PK	74.0	-17.6	1.00 H	340	60.11	-3.75
2	2390.00	44.4 AV	54.0	-9.6	1.00 H	340	48.16	-3.75
3	*2405.00	104.9 PK			1.00 H	340	108.55	-3.67
4	*2405.00	102.6 AV			1.00 H	340	106.29	-3.67
5	4810.00	43.2 PK	74.0	-30.8	1.00 H	342	39.51	3.72
6	4810.00	29.3 AV	54.0	-24.7	1.00 H	342	25.59	3.72

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.6 PK	74.0	-15.4	1.00 V	97	62.31	-3.75
2	2390.00	46.3 AV	54.0	-7.7	1.00 V	97	50.05	-3.75
3	*2405.00	109.1 PK			1.00 V	97	112.74	-3.67
4	*2405.00	106.6 AV			1.00 V	97	110.28	-3.67
5	4810.00	43.2 PK	74.0	-30.8	1.00 V	1	39.45	3.72
6	4810.00	31.3 AV	54.0	-22.7	1.00 V	1	27.57	3.72

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 18	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	106.4 PK			1.00 H	340	109.95	-3.52
2	*2440.00	104.1 AV			1.00 H	340	107.64	-3.52
3	4880.00	42.7 PK	74.0	-31.3	1.00 H	340	38.93	3.75
4	4880.00	29.7 AV	54.0	-24.3	1.00 H	340	25.91	3.75

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	109.6 PK			1.00 V	96	113.10	-3.52
2	*2440.00	107.2 AV			1.00 V	96	110.74	-3.52
3	4880.00	43.7 PK	74.0	-30.3	1.00 V	100	39.91	3.75
4	4880.00	31.4 AV	54.0	-22.6	1.00 V	100	27.65	3.75

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 25	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2475.00	105.4 PK			1.00 H	345	108.75	-3.36
2	*2475.00	103.0 AV			1.00 H	345	106.36	-3.36
3	2483.50	62.7 PK	74.0	-11.4	1.00 H	345	65.97	-3.32
4	2483.50	50.5 AV	54.0	-3.6	1.00 H	345	53.77	-3.32
5	4950.00	42.2 PK	74.0	-31.8	1.00 H	350	38.46	3.71
6	4950.00	29.2 AV	54.0	-24.8	1.00 H	350	25.48	3.71

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2475.00	109.4 PK			1.00 V	103	112.75	-3.36
2	*2475.00	107.1 AV			1.00 V	103	110.45	-3.36
3	2483.50	67.0 PK	74.0	-7.0	1.00 V	103	70.32	-3.32
4	2483.50	52.7 AV	54.0	-1.3	1.00 V	103	56.01	-3.32
5	4950.00	42.4 PK	74.0	-31.6	1.00 V	105	38.67	3.71
6	4950.00	29.5 AV	54.0	-24.5	1.00 V	105	25.81	3.71

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 26	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	90.8 PK			1.00 H	20	94.12	-3.33
2	*2480.00	88.4 AV			1.00 H	20	91.75	-3.33
3	2483.50	63.4 PK	74.0	-10.6	1.00 H	20	66.73	-3.32
4	2483.50	51.2 AV	54.0	-2.8	1.00 H	20	54.52	-3.32
5	4960.00	41.6 PK	74.0	-32.4	1.00 H	25	37.92	3.70
6	4960.00	28.8 AV	54.0	-25.2	1.00 H	25	25.12	3.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	95.1 PK			1.00 V	103	98.42	-3.33
2	*2480.00	92.4 AV			1.00 V	103	95.71	-3.33
3	2483.50	65.4 PK	74.0	-8.6	1.00 V	103	68.75	-3.32
4	2483.50	52.9 AV	54.0	-1.1	1.00 V	103	56.19	-3.32
5	4960.00	42.1 PK	74.0	-31.9	1.00 V	110	38.41	3.70
6	4960.00	28.9 AV	54.0	-25.1	1.00 V	110	25.18	3.70

REMARKS:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

4.2 6dB BANDWIDTH MEASUREMENT

4.2.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.2.2 TEST SETUP

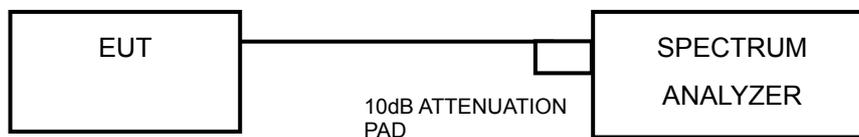

4.2.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.2.4 TEST PROCEDURE

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.2.5 DEVIATION FROM TEST STANDARD

No deviation.

4.2.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



A D T

4.2.7 TEST RESULTS

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
25	2475	1.60	0.5	PASS

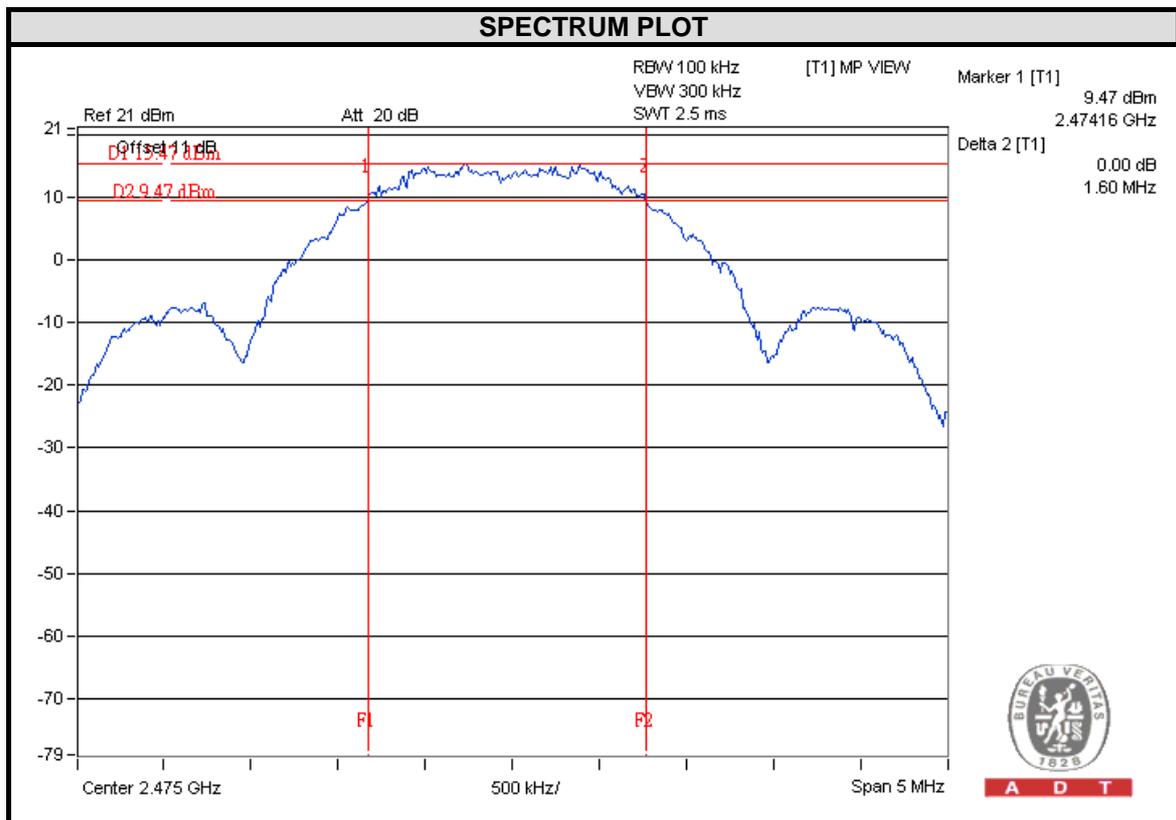


4.3 CONDUCTED OUTPUT POWER

4.3.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

4.3.2 TEST SETUP

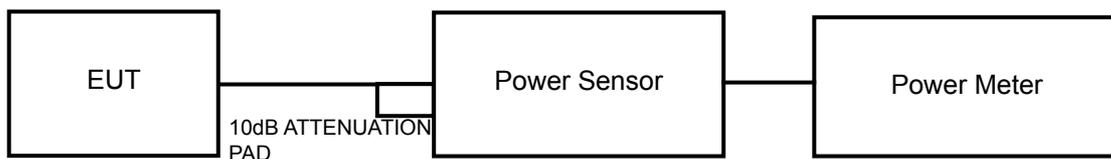

4.3.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.3.4 TEST PROCEDURES

A peak / average power sensor were used on the output port of the EUT. A power meter was used to read the response of the peak / average power sensor. Record the peak power level.

4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

4.3.6 EUT OPERATING CONDITIONS

Same as Item 4.2.6.



A D T

4.3.7 TEST RESULTS

FOR PEAK POWER

CHAN.	CHAN. FREQ. (MHz)	POWER OUTPUT (mW)	POWER OUTPUT (dBm)	POWER LIMIT (dBm)	PASS / FAIL	REMARK
11	2405	72.3	18.59	30	PASS	Original Approved
18	2440	81.3	19.10	30	PASS	Original Approved
25	2475	77.6	18.90	30	PASS	Additional
26	2480	1.1	0.56	30	PASS	Original Approved

FOR AVERAGE POWER


CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (dBm)	REMARK
11	2405	18.53	Original Approved
18	2440	19.03	Original Approved
25	2475	18.80	Additional
26	2480	-2.36	Original Approved

4.4 POWER SPECTRAL DENSITY MEASUREMENT

4.4.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.4.2 TEST SETUP

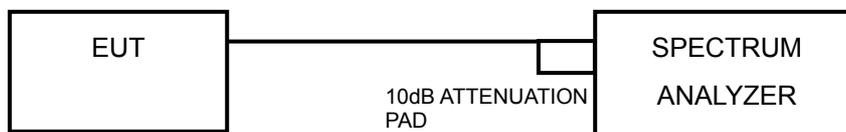

4.4.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.4.4 TEST PROCEDURE

- Set the RBW = 3 kHz, VBW = 10 kHz, Detector = peak.
- Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITION


Same as Item 4.2.6



A D T

4.4.7 TEST RESULTS

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
25	2475	3.91	8	PASS

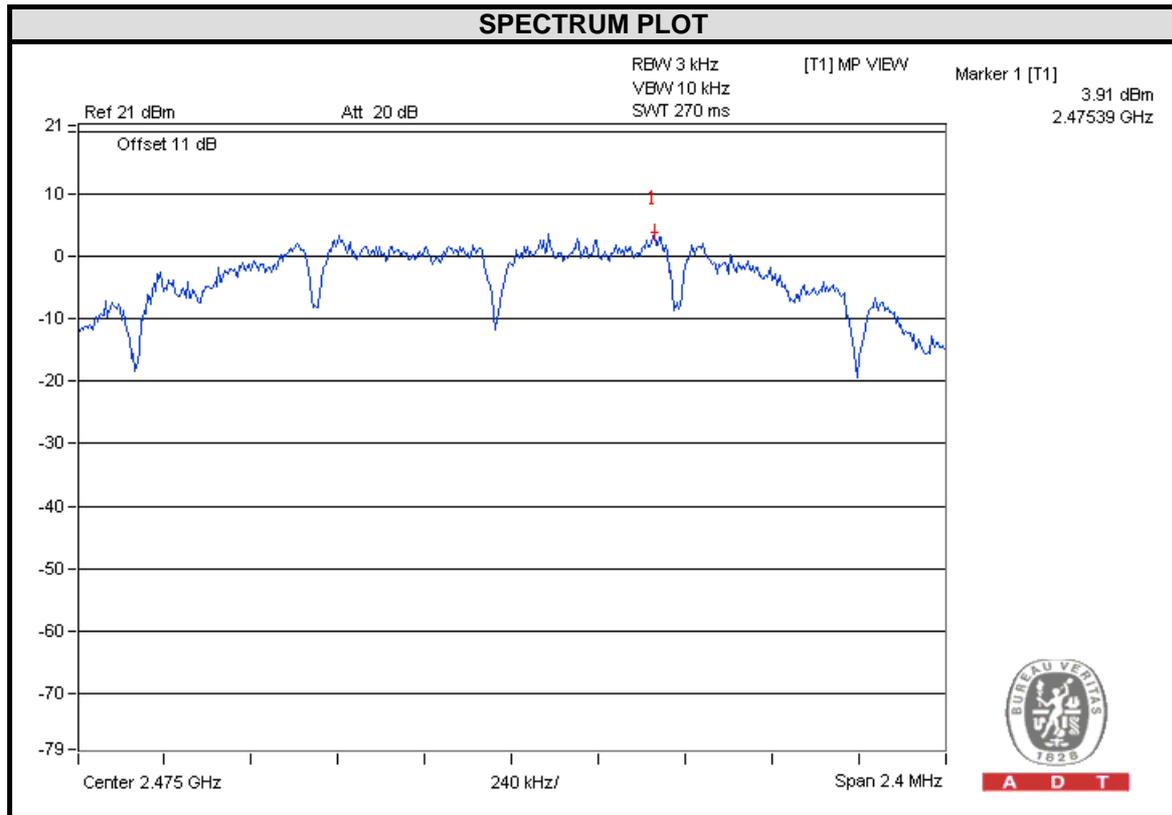


4.5 CONDUCTED OUT OF BAND EMISSION MEASUREMENT

4.5.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.5.2 TEST SETUP

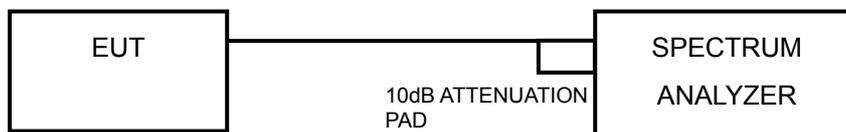

4.5.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.5.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



A D T

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined.
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION

Same as Item 4.2.6



4.5.7 TEST RESULTS

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T

CH 25

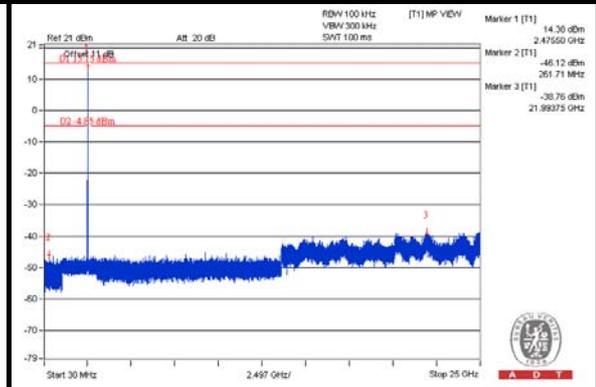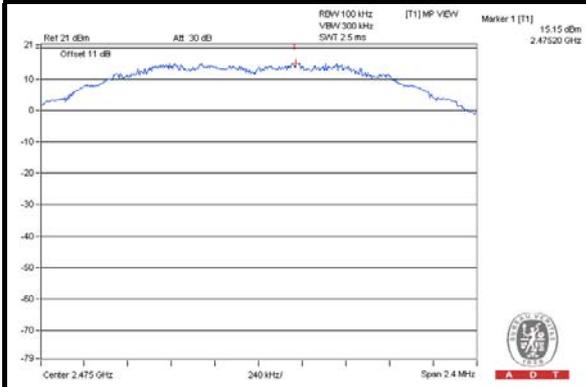

CH25 Band edge

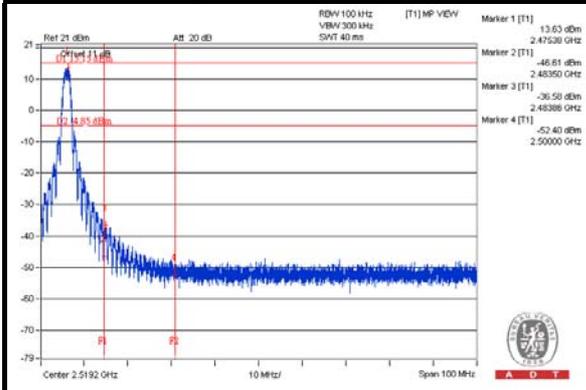



A D T

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



A D T

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---