



RF Exposure Evaluation Report

APPLICANT	FIPLEX COMMUNICATIONS INC.
ADDRESS	2101 NW 79th Ave. MIAMI FL 33122 USA
FCC ID	P3TDH737
MODEL NUMBER	DH737
PRODUCT DESCRIPTION	700MHZ BAND INDUSTRIAL BOOSTER
DATE SAMPLE RECEIVED	07/15/2019
FINAL TEST DATE	07/26/2019
PREPARED BY	Franklin Rose
TEST RESULTS	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

Report Number	Report Version	Description	Issue Date
1803AUT19 MPE_TestReport_	Rev1	Initial Issue	08/02/2019

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL WITHOUT THE
WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**

TABLE OF CONTENTS

GENERAL REMARKS	2
GENERAL INFORMATION	3
ANTENNA INFORMATION	3
MPE CALCULATION	3
MPE TABLE	5
GENERAL UNCONTROLLED EXPOSURE	5
GENERAL CONTROLLED EXPOSURE	6

GENERAL REMARKS

Summary

The device under test does:

- Fulfill the general approval requirements as identified in this test report and was selected by the customer.
- Not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669
Designation #: US1070

Prepared by:




Name and Title	Franklin Rose, Project Manager / EMC Specialist
Date	08/02/2019

GENERAL INFORMATION

EUT Description	700 BAND INDUSTRIAL BOOSTER		
Model Number	DH737		
EUT Power Source	<input checked="" type="checkbox"/> 110–120Vac, 50–60Hz	<input type="checkbox"/> DC Power	<input type="checkbox"/> Battery Operated
Test Item	<input type="checkbox"/> Engineering Prototype	<input checked="" type="checkbox"/> Pre-Production	<input type="checkbox"/> Production
Type of Equipment	<input checked="" type="checkbox"/> Fixed	<input type="checkbox"/> Mobile	<input type="checkbox"/> Portable
Antenna Connector	external N Type		
Test Conditions	The temperature was 26°C Relative humidity of 50%.		
Modification to the EUT	No Modification to EUT.		
Applicable Standards	FCC CFR 47 Part 2.1091		
Test Facility	Timco Engineering Inc. at 849 NW State Road 45 Newberry, FL 32669 USA. Designation #: US1070		

ANTENNA INFORMATION

Manufacturer Provides Antenna	Type	Max Gain (dBi)
No	Unspecified	0 dBi

POWER OUTPUT OF EUT

Frequency	Maximum Output (+Tune-up Tolerance) (dBm)	Output (W)
800.00	39.00	7.94

The output power levels of the Uplink and Downlink of this Distributed Antenna System Industrial Signal Booster have been evaluated together for a worst-case MPE Safety Distance.

MPE CALCULATION

The minimum separation distance is calculated as follows:


$$E(V/m) = \frac{\sqrt{30 \times P \times G}}{d}$$

$$\text{Power density: } P_d(mW/cm^2) = \frac{E^2}{3770}$$

MPE LIMITS

Figure 1. FCC Limits for Maximum Permissible Exposure (MPE)

Plane-wave Equivalent Power Density

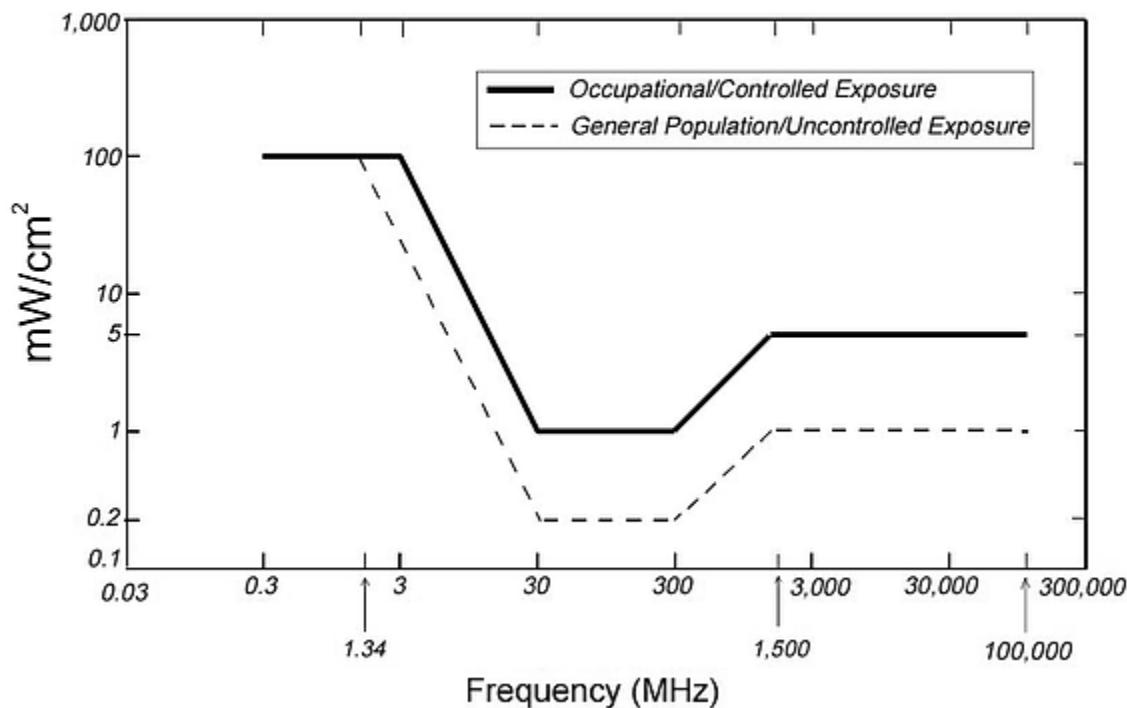


MPE Table

General Uncontrolled Exposure

The limit for General Uncontrolled Exposure Environment is calculated as shown in FCC Pt. 1.1310, Table B:

Variable	Value
Max Power	7.94 W
Frequency Range	758 – 805 MHz
Duty Cycle (at full power)	100%
Max Antenna Gain	0 dB
Coax Loss	0 dB
Power Density	0.505 mW/cm ²
Minimum Separation Distance	35.36 cm

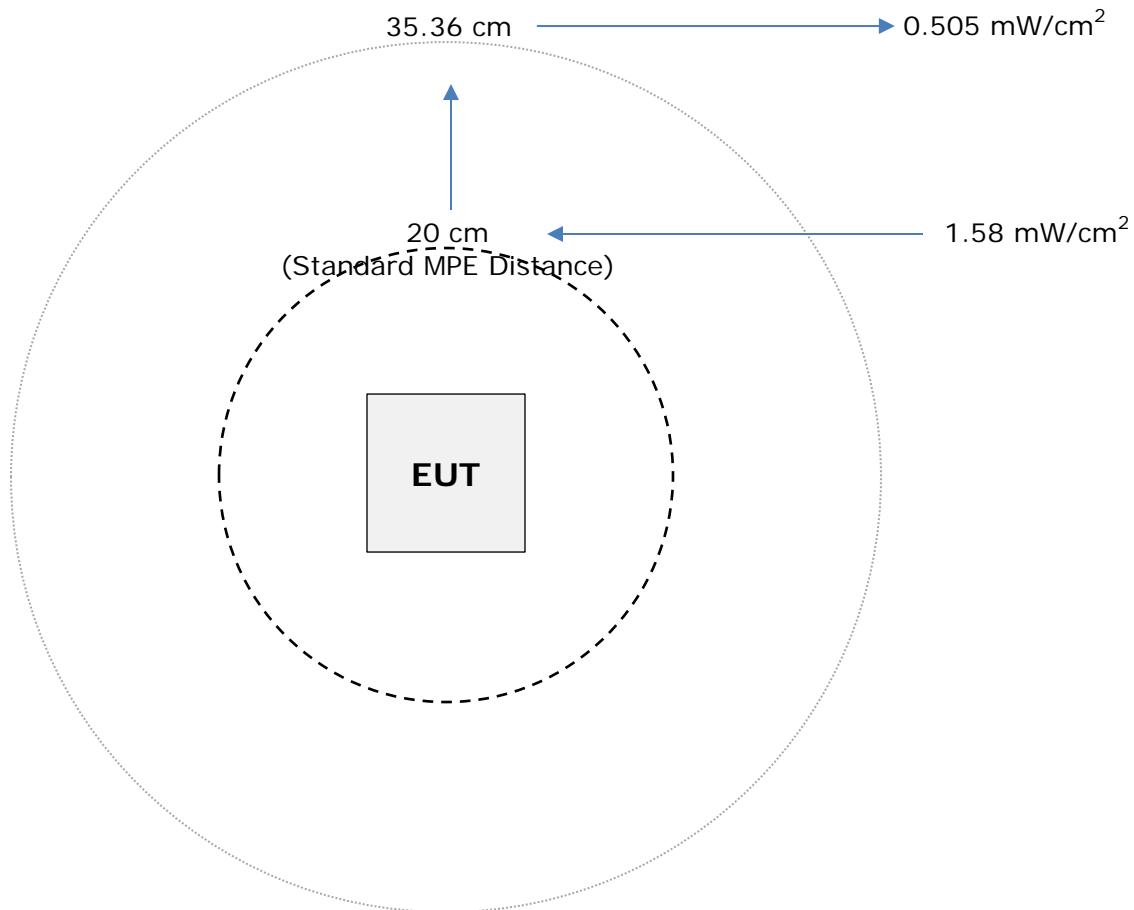

General Controlled Exposure

The limit for General Controlled Exposure Environment is calculated as shown in FCC Pt. 1.1310, Table A:

Variable	Value
Max Power	7.94 W
Frequency Range	758 – 805 MHz
Duty Cycle (at full power)	100%
Max Antenna Gain	0 dBi
Coax Loss	0 dB
Power Density	1.58 mW/cm ²
Minimum Separation Distance	20 cm

