


SK TECH CO., LTD.

Page 1 of 14

FCC-Certificate of Compliance

Test Report No.:	SKTFCE-060412-039		
NVLAP CODE :	200220-0		
Applicant:	SysOnChip Inc.		
Applicant Address:	#14Fl, Sahak Yeongum Bldg. 929 Dunsan-Dong, Seo-Gu, Daejeon 302-120 South Korea		
Manufacturer :	SysOnChip Inc.		
Manufacturer Address:	#14Fl, Sahak Yeongum Bldg. 929 Dunsan-Dong, Seo-Gu, Daejeon 302-120 South Korea		
Product:	Handheld GPS Receiver		
FCC ID:	P47SOC1S06	Model No.:	SOC1S06, SOC2S06, SOC3S06, SOC4S06
Receipt No.:	SKTEU06-0153	Date of receipt:	Mar. 17, 2006
Date of Issue:	Apr. 12, 2006		
Testing location:	SK TECH CO., LTD. 820-2, Wolmoon-Ri, Wabu-Up, Namyangju-Si, Kyunggi-Do, Korea		
Test Standards:	ANSI C63.4 / 2003		
Rule Parts:	FCC part 15 Subpart B, CISPR 22		
Equipment Class :	All other receivers subject to Part 15		
Other Aspects :	This Class B Digital apparatus complies with Canadian IECS-003		
Test Result:	The above mentioned product has been tested and passed.		

Prepared by: S.Y.Ye

Tested by: H.P.Kim/Engineer

Approved by: D.H.Kang
/Manager & Chief Engineer

Signature	Date	Signature	Date	Signature	Date
Other Aspects :					
Abbreviations :	· OK, Pass = passed · Fail = failed · N/A = not applicable				

- ☞ •This test report is not permitted to copy partly without our permission.
- This test result is dependent on only equipment to be used.
- This test result is based on a single evaluation of one sample of the above mentioned.
- This test report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S Government.
- We certify that this test report has been based on the measurement standards that is traceable to the national or International standards.

NVLAP Lab. Code: 200220-0


 » » **Contents** « «

Contents	2
List of Tables	2
List of Figures	2
1. General	3
2. Test Site	3
2.1 Location	3
2.2 List of Test and Measurement Instruments	4
2.3 Test Date	4
2.4 Test Environment	4
3. Description of the tested samples	5
3.1 Rating and Physical Characteristics	5
3.2 Submitted Documents	5
4. Measurement Conditions	6
4.1 Modes of Operation	6
4.2 List of Peripherals	6
4.3 Type of Used cables	7
4.4 Test Setup	7
4.5 Uncertainty	8
5. EMISSION Test	9
5.1 Conducted Emissions	9
5.2 Radiated Emissions	13

 » **List of Tables**

Table 1	List of test and measurement Equipment	4
Table 2	Test Data, Conducted Disturbance	10
Table 3	Test Data, Radiated Emissions	14

 » **List of Figures**

Figure 1	Spectral Diagram, LINE-PE	11
Figure 2	Spectral Diagram, NEUTRAL-PE	12



1. General

This equipment has been shown to be capable of compliance with the applicable technical standards and was tested in accordance with the measurement procedures as indicated in this report.

We attest to the accuracy of data. All measurements reported herein were performed by SK TECH Co., Ltd. and were made under Chief Engineer's supervision.

We assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

2. Test Site

SK TECH Co., Ltd.

2.1 Location

820-2, Wolmoon Ri, Wabu-Up, Namyangju-Si, Kyunggi-Do, Korea

The test site is in compliance with ISO/IEC 17025 for general requirements for the competence of testing and calibration laboratories.

This laboratory is recognized as a Conformity Assessment Body(CAB) for CAB's, Designation Number: **KR0007** by FCC, is accredited by NVLAP for NVLAP Lab. Code : **200220-0** and DATech for DAR-Registration No.:**DAT-P-076/97-01**.



2.2 List of Test and Measurement Instruments

Table 1 : List of Test and Measurement Equipment

- **Conducted Disturbance**

Kind of Equipment	Type	S/N	Calibrated until
EMI Receiver	ESHS10	835871/002	09.2006
Artificial Mains Network	ESH3-Z5	836679/018	08.2006

- **Radiated Disturbance**

Kind of Equipment	Type	S/N	Calibrated until
EMI Receiver	ESIB40	100277	02.2007
Amplifier	8447F	3113A05153	08.2006
Log Periodic Antenna	UHALP9107	1819	11.2006
Biconical Antenna	BBA9106	91031626	11.2006
Antenna Turntable Driver	5907	91X518	N/A
Antenna Turntable controller	5906	91X519	N/A

2.3 Test Date

Date of Application : Mar. 17, 2006

Date of Test : Apr. 04, 2006 ~ Apr. 10, 2006

2.4 Test Environment

See each test item's description.



3. Description of the tested samples

The EUT is handheld GPS receiver using without any PDA or Computing device.

It is receive only Mobile Earth Stations(ROMESs) operating in the 1.5 GHz band providing data communications.

Basically, there is no hardware difference between SOC1S06 and SOC2S06, SOC3S06, SOC4S06. We just asked the multi-lists for our buyers to use the different serial number from us. Only the name will be different depending on the selling route.

-Function-

- Navigation • MP3 Player • Memo • Media Player

3.1 Rating and Physical Characteristics

MODEL	SPEC
Operating System	Microsoft Windows CE.NET 4.2
Processor	Samsung S3C2440A RISC Microprocessor at 400MHz
Memory	64MB SDRAM and 32MB Flash Memory
GPS Chipset	SiRFstarIII
GPS Antenna	High performance Helical Antenna
Display	Samsung Wise View 3.5" TFT LCD 320x240 pixels with Landscape Mode
User Controls	5-way Navigation Jog Button 4 function Buttons(Home, GPS, Map enlargement, Map reduction) Touch Screen Hold Button Power ON/OFF
Expansion Slot	1SD(Secure Digital)/MMC(Multi Media Card) Memory Card Slot
Audio	3.5mm Stereo Headphone jack and Built-in Speaker
External Ports	Mini USB Connector for Active Sync and Battery Charging
Dimension	115x73x21mm
Battery	Rechargeable and Removable Li-ion Battery(1,100mAh)
Power	AC Adapter: Input:110V-230V 50Hz Output:5V, 1.0A, 5W Cigarette Car Charger:Input:12V Output:5V,1.5A

3.2 Submitted Documents

N/A

**SK TECH CO., LTD.**

Page 6 of 14

4. Measurement Conditions

Operating voltage of the EUT is 230V, 50Hz

-Adaptor input:110V~230V, 50Hz

-Adaptor output:5V, 1A, 5W.

4.1 Modes of Operation

The EUT was GPS simulation mode during the test

4.2 List of Peripherals

Equipment	Manufacturer	Model Name	Serial No.
Adaptor	Tae Young Electronics Co., LTD.	TY-2A05	N/A




4.3 Type of Used Cables

Equipment	Manufacturer	M/N	S/N	Cables &connectors
EUT (For ANT)	SysOnChip Inc.	SOC1S06	N/A	2.0m unshielded ANT cable
EUT (For Earphone)	SysOnChip Inc.	SOC1S06	N/A	1.0m unshielded Audio cable
EUT (For Power)	SysOnChip Inc.	SOC1S06	N/A	1.2m unshielded AC/DC Adaptor cable

4.4 Test Setup

The test setup photographs showed the external supply connections and interfaces.

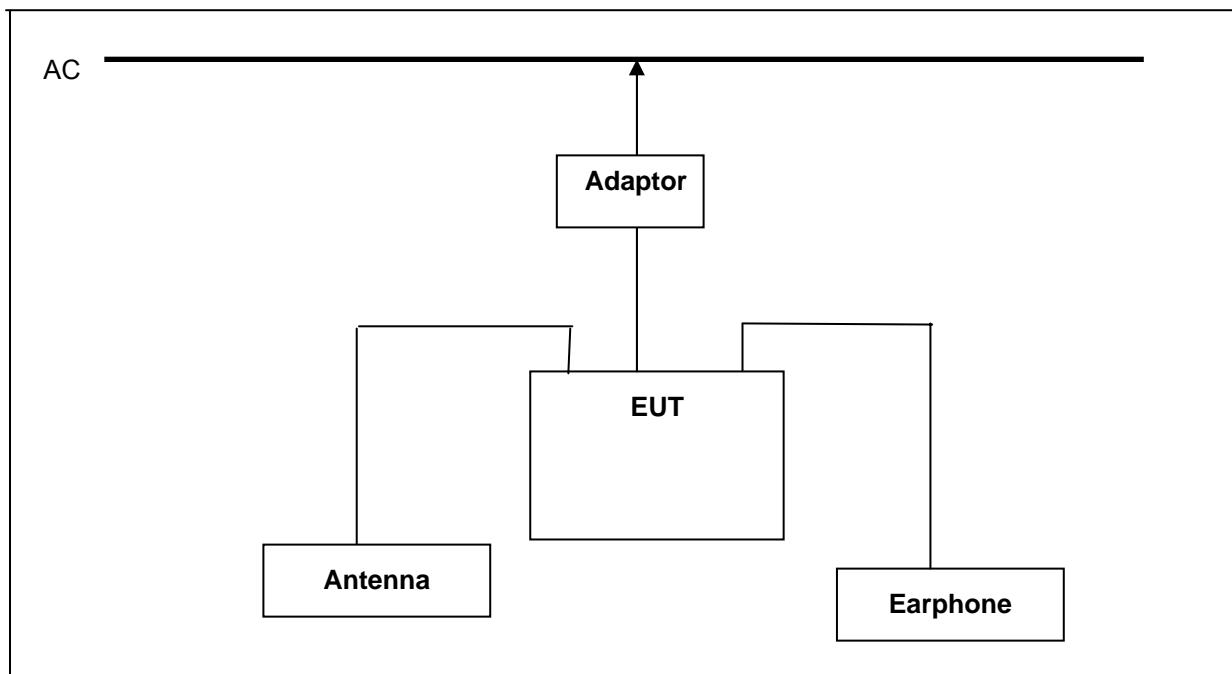

[System Block Diagram of Test Configuration]



4.5 Uncertainty

1) Radiated disturbances from 30 MHz to 1000 MHz at a distance of 3m and 10 m

Input quantity	Xi	Probability distribution function
Receiver reading	Vr	Rectangular $\sqrt{3}$
Attenuation: antenna-receiver	Lc	k=1
Amplifier Error	Ae	k=2
antenna factor	Lac	k=2
Receiver corrections:		
Sine wave voltage	dVsw	Rectangular $\sqrt{3}$
Pulse amplitude response	dVpa	Rectangular $\sqrt{3}$
Pulse repetition rate response	dVpr	Rectangular $\sqrt{3}$
Mismatch: antenna-receiver	dM	k=1
Antenna corrections:		
AF frequency interpolation	dAFF	Rectangular $\sqrt{3}$
AF height deviations	dAFh	Rectangular $\sqrt{3}$
Directivity difference	dAdir	3 m: Rectangular $\sqrt{3}$, 10 m: Rectangular $\sqrt{3}$
Phase centre location	dAph	3 m: Rectangular $\sqrt{3}$, 10 m: Rectangular $\sqrt{3}$
Cross-polarisation	dAcp	Rectangular $\sqrt{3}$
Balance	dAbal	Rectangular $\sqrt{3}$
Site corrections:		
Site imperfections	dSA	Rectangular $\sqrt{6}$
Separation distance	dd	3 m: Rectangular $\sqrt{3}$, 10 m: Rectangular $\sqrt{3}$
Table height	dh	3 m: k=2, 10 m: k=2
Expanded Uncertainty		4.60(Vertical)/4.59(Horizontal) k=2 (Level of confidence)

Expanded Uncertainty

$$U = k * U_c(x_i) = 2 * 2.3 = 4.60 \text{dB}$$

The coverage factor k =2 yields approximately a 95% level of confidence.

2) Conducted disturbance from 150 KHz to 30 MHz using a 50 Ω/50 uH AMN

Input quantity	Xi	Probability distribution function
Receiver reading	Vr	Rectangular $\sqrt{3}$
Attenuation: AMN-receiver	Lc	k=1
AMN voltage division factor	Lamn	k=2
Receiver corrections:		
Sine wave voltage	dVsw	Rectangular $\sqrt{3}$
Pulse amplitude response	dVpa	Rectangular $\sqrt{3}$
Pulse repetition rate response	dVpr	Rectangular $\sqrt{3}$
Mismatch: AMN-receiver	dM	U-shape $\sqrt{2}$
AMN impedance	dZ	Triangular $\sqrt{6}$
Expanded Uncertainty		3.99 k=2 (Level of confidence)

Expanded uncertainty

$$U = k * U_c(x_i) = 2 * 1.96 = 3.92 \text{dB}$$

The coverage factor k =2 yields approximately a 95% level of confidence.



5. EMISSION Test

5.1 Conducted Emissions

Result: **PASS**

The line-conducted facility is located inside a 2.6M x 3.6M x 7.0M shielded enclosure.

The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 604-05. A 1 m x 1.5 m wooden table 80 cm high is placed 40 cm. away from the vertical wall and 1.5 m away from the side wall of the shielded room. ROHDE & SCHWARZ Model ESH3-Z5 (10 kHz-30 MHz) 50 ohm/50 uH Line-Impedance Stabilization Networks(LISNs) are bonded to the shielded room.

The EUT is powered from the ROHDE & SCHWARZ LISN and the support equipment is powered from the ROHDE & SCHWARZ LISN. Power to the LISNs are filtered by a high-current high-insertion loss Lindgren enclosures power line filters (100dB 14 kHz-10 GHz).

The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure.

All electrical cables are shielded by braided tinned copper zipper tubing with inner diameter of 1/2". If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the ROHDE & SCHWARZ LISN.

All interconnecting cables more than 1 meter were shortened by non-inductive bundling (serpentine fashion) to a 1-meter length.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT.

The spectrum was scanned from 150 kHz to 30 MHz with 100msec. sweep time.

The frequency producing the maximum level was reexamined using EMI/field Intensity Meter (ESHS 10) and Quasi-Peak adapter. The detector function was set to CISPR quasi-peak mode.

The bandwidth of the receiver was set to 10 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

Each emission was maximized by: switching power lines; varying the mode of operation or resolution;clock or data exchange speed; if applicable; whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in photograph of conducted test.

Each EME reported was calibrated using self-calibrating mode.

**Table 2: Test Data, Conducted Disturbance****<Quasi-Peak>**

Frequency (MHz)	Reading (dBuV)	Line	C/F (dB)	C/L (dB)	Actual (dBuV)	Limit (dBuV)	Margin (dB)
1.820	44.37	N	0.14	0.07	44.58	56.00	11.42
1.825	42.44	L	0.15	0.07	42.66	56.00	13.34
1.875	42.06	N	0.14	0.07	42.27	56.00	13.73
1.935	41.34	N	0.14	0.07	41.55	56.00	14.45
2.000	41.63	N	0.15	0.11	41.89	56.00	14.11
2.005	43.52	L	0.18	0.11	43.81	56.00	12.19

<Average>

Frequency (MHz)	Reading (dBuV)	Line	C/F (dB)	C/L (dB)	Actual (dBuV)	Limit (dBuV)	Margin (dB)
0.665	36.00	N	0.12	0.05	36.17	46.00	9.83
0.725	34.75	N	0.12	0.05	34.92	46.00	11.08
0.850	34.76	N	0.13	0.06	34.95	46.00	11.05
0.910	35.10	N	0.13	0.06	35.29	46.00	10.71
1.030	33.99	L	0.15	0.07	34.21	46.00	11.79
1.090	35.87	L	0.15	0.07	36.09	46.00	9.91

► NOTE

* **C/F = Correction Factor**

* **C/L = Cable Loss**

* **LINE : L = Line-PE, N = Neutral-PE**

* **Margin Calculation**

Margin(Q.P) = Limit - Actual

[Actual(Q.P)= Reading(Q.P) + C/F + C/L]

**SK TECH CO., LTD.**

Page 11 of 14

Figure 1: Spectral Diagram, LINE – PE**FCC PART15 Subpart B
CONDUCTED DISTURBANCE**

08 Apr 2006 13:22

EUT: SOC1S06

Manuf: Sysonchip, Inc.

Op Cond:

Operator:

Test Spec: 120V / 60Hz


Comment: LINE-PE

Result File: fcc_I.dat : SOC1S06

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	30MHz	5kHz	10kHz	PK+AV	20msec	Auto	OFF	60dB

Final Measurement: Detectors: X QP / + AV
Meas Time: 1sec
Peaks: 8
Acc Margin: 35 dB

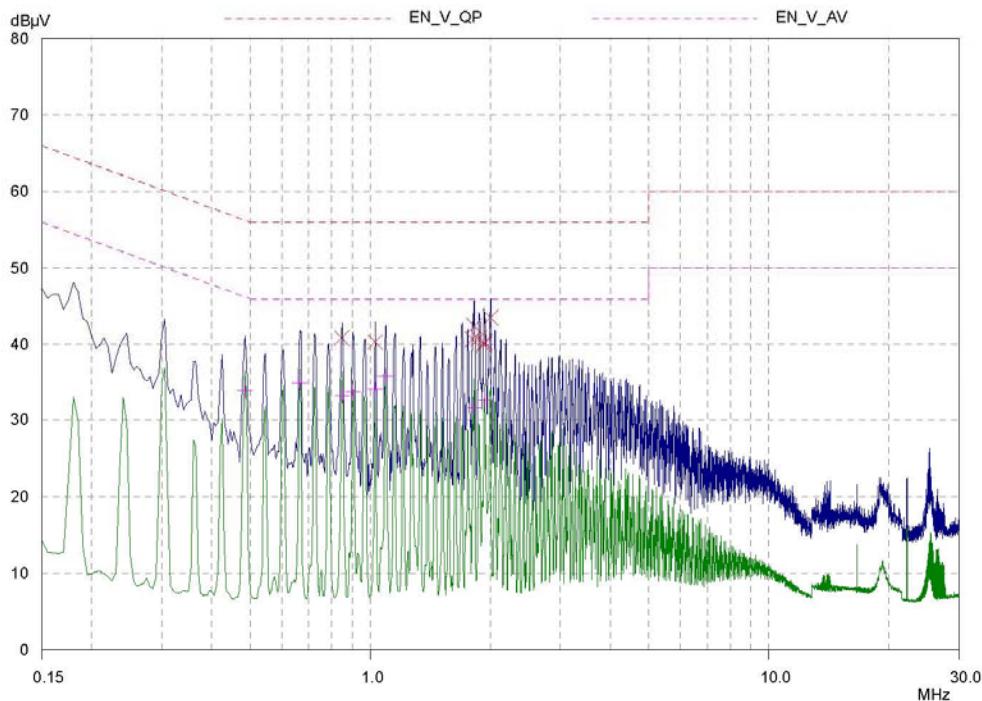

**SK TECH CO., LTD.**

Page 12 of 14

Figure 2: Spectral Diagram, NEUTRAL – PE**FCC PART 15 Subpart B
CONDUCTED DISTURBANCE**

08 Apr 2006 13:07

EUT: SOC1S06

Manuf: Sysonchip, Inc.

Op Cond:

Operator:

Test Spec: 120V / 60Hz


Comment: NEUTRAL-PE

Result File: fcc_n.dat : SOC1S06

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	30MHz	5kHz	10kHz	PK+AV	20msec	Auto	OFF	60dB

Final Measurement: Detectors: X QP / + AV
Meas Time: 1sec
Peaks: 8
Acc Margin: 35 dB

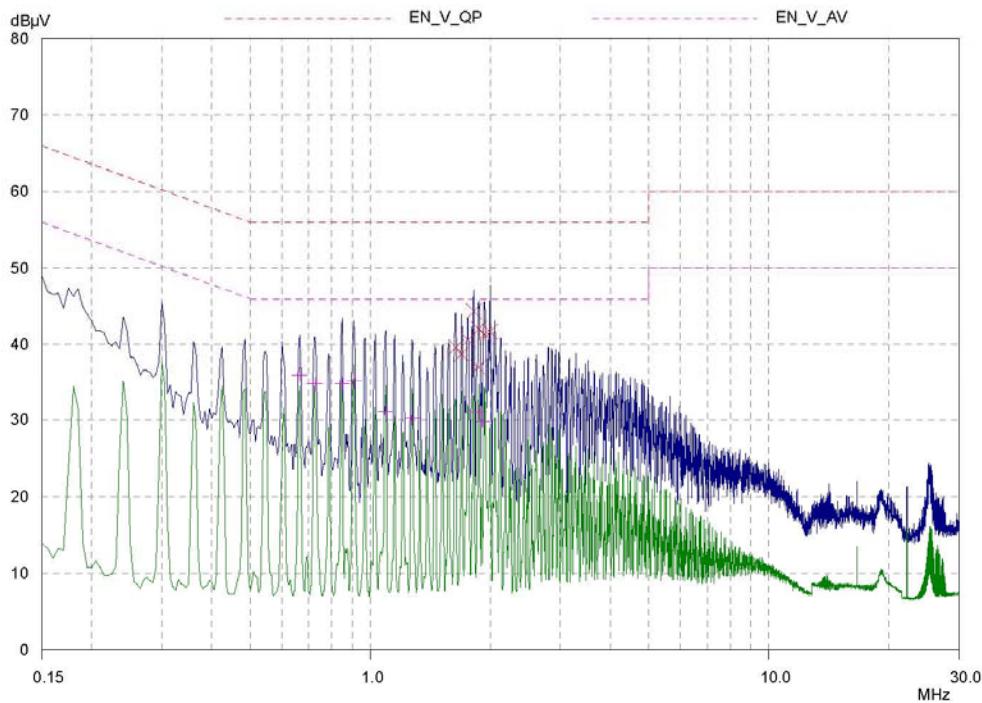



5.2 Radiated Emissions

Result :**PASS**

Preliminary measurements were made indoors at 3 meter using broadband antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME.

Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna were noted for each frequency found.

The spectrum was scanned from 30 to 300 MHz using biconical antenna and from 300 to 1000 MHz using log-periodic antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3-meter test range using SCHWARZBECK dipole antennas.

The test equipment was placed on a wooden table situated on a 4x4 meter area adjacent to the measurement area. Turntable was to protect from weather in the dome that made with FRP.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined and investigated using EMI/Field Intensity Meter(ESVS 10) and Quasi-Peak Adapter.

The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 100 kHz or 1 MHz depending on the frequency or type of signal.

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non- metallic 1 x 1.5 meter table.

The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission.

Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed, and/or support equipment, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in photograph of radiated emission test.

Each EME reported was calibrated using self-calibrating mode.


Table 3 : Test Data, Radiated Emissions

Frequency [MHz]	Pol.	Height [m]	Real Reading	Correction Factor		T-Fact [dB]	Data [dBuV/m]	Limits [dBuV/m]	Margin [dB]
				Antenna	Cable				
132.30	H	3.0	14.3	13.9	1.2	15.1	29.4	43.5	14.1
268.16	H	4.0	12.0	17.9	1.4	19.3	31.3	46.0	14.7
401.05	H	4.0	15.4	18.2	1.7	19.9	35.3	46.0	10.7
533.27	V	1.0	9.6	19.6	2.0	21.6	31.2	46.0	14.8
665.40	V	1.0	8.3	22.1	2.3	24.4	32.7	46.0	13.3

Table. Radiated Measurements at 3-meters

NOTES:

1. All modes of operation were investigated and the worst-case emission are reported.
2. All other emission are non-significant.
3. All readings are calibrated by self-mode in receiver.
4. Measurements using CISPR Quasi-peak mode.
5. H = Horizontal, V = Vertical Polarization
6. Data = Real Reading + T - Fact(Antenna+Cable)
7. Margin = Limits - Data